

**UNII-1 (5150-5250MHz) Wi-Fi Radio Test Report  
(Radiated Spurious Emissions Only)**

For

**IW9165DH-B, IW9165DH-A & IW9165DH-ROW**

Supports

5/6 GHz 802.11 a/ac/ax/n Wi-Fi + Bluetooth LE v5.0 + GNSS radio

**FCC ID: LDKIW9165DH  
ISED: 2461A-IW9165DH**

**Against the following Specifications:**

**47 CFR 15.205**

**47 CFR 15.209**

**CFR47 Part 15.407**

**RSS-247 issue 2**

**RSS-Gen issue 5**






**CERTIFICATE #1178.01**

**Cisco Systems**  
170 West Tasman Drive  
San Jose, CA 95134



Radio Test Report No: **EDCS - 24042660**

---

<b>Author:</b> Danh Le	
<b>Tested By:</b> Farida Rahmanzai <b>Title:</b> Test Engineer	
<b>Approved By:</b> Howard Ji <b>Title:</b> Compliance Manager	
<b>Revision</b>	1.0

This report replaces any previously entered test report under EDCS – 24042660. This test report has been electronically authorized and archived using the CISCO Engineering Document Control system. Test Report Template EDCS# 1526148

This test report has been electronically authorized and archived using the CISCO Engineering Document Control system.

**SECTION 1: OVERVIEW .....5**

    1.1 TEST SUMMARY .....5

**SECTION 2: ASSESSMENT INFORMATION .....6**

    2.1 GENERAL .....6

    2.2 UNITS OF MEASUREMENT .....6

    2.3 DATE OF TESTING (INITIAL SAMPLE RECEIPT DATE TO LAST DATE OF TESTING).....8

    2.4 REPORT ISSUE DATE .....8

    2.5 TESTING FACILITIES .....8

    2.6 EQUIPMENT ASSESSED (EUT).....9

    2.7 EUT DESCRIPTION.....9

**SECTION 3: RESULT SUMMARY.....12**

    3.1 RESULTS SUMMARY TABLE .....12

**SECTION 4: SAMPLE DETAILS.....13**

    4.1 SAMPLE DETAILS .....13

    4.2 SYSTEM DETAILS .....13

    4.3 MODE OF OPERATION DETAILS.....13

**APPENDIX A: RADIATED SPURIOUS EMISSION .....14**

    A.1 SETUP DIAGRAM .....14

    A.2 RADIATED SPURIOUS EMISSIONS TEST REQUIREMENTS & LIMITS .....16

    A.3 LIMIT CONVERSION (POWER TO FIELD STRENGTH) .....20

    A.4 TEST PROCEDURE.....21

    A.5 TX RADIATED SPURIOUS EMISSIONS GRAPHICAL DATA RESULTS.....22

**APPENDIX B: LIST OF TEST EQUIPMENT USED TO PERFORM THE TEST .....34**

**APPENDIX C: ABBREVIATION KEY AND DEFINITIONS.....35**

**APPENDIX D: PHOTOGRAPHS OF TEST SETUPS.....36**

**APPENDIX E: SOFTWARE USED TO PERFORM TESTING.....36**

**APPENDIX F: TEST PROCEDURES .....36**

**APPENDIX G: SCOPE OF ACCREDITATION (A2LA CERTIFICATE NUMBER 1178-01).....36**

**APPENDIX H: TEST ASSESSMENT PLAN.....37**

**APPENDIX I: WORST CASE JUSTIFICATION .....37**



Radio Test Report No: **EDCS - 24042660**

---

### Revision History

Revision	Date	Comment
1	04/19/2023	Initial release

## **Section 1: Overview**

### **1.1 Test Summary**

The samples were assessed against the tests detailed in section 3 under the requirements of the following specifications:

<b>Specifications</b>
47 CFR 15.205
47 CFR 15.209
47 CFR 15.407
RSS-247 Issue 2
RSS-Gen Issue 5

## Section 2: Assessment Information

### 2.1 General

This report contains an assessment of an apparatus against Radio Standards based upon tests carried out on the samples submitted. The testing was performed by and for the use of Cisco systems Inc:

With regard to this assessment, the following points should be noted:

- a) The results contained in this report relate only to the items tested and were obtained in the period between the date of the initial assessment and the date of issue of the report. Manufactured products will not necessarily give identical results due to production and measurement tolerances.
- b) The apparatus was set up and exercised using the configuration and modes of operation defined in this report only.
- c) Where relevant, the apparatus was only assessed using the susceptibility criteria defined in this report and the Test Assessment Plan (TAP).
- d) All testing was performed under the following environmental conditions:
  - Temperature 15°C to 35°C (54°F to 95°F)
  - Atmospheric Pressure 860mbar to 1060mbar (25.4" to 31.3")
  - Humidity 10% to 75\*%
- e) All AC testing was performed at one or more of the following supply voltages:
  - 48VDC

### 2.2 Units of Measurement

The units of measurements defined in the appendices are reported in specific terms, which are test dependent. Where radiated measurements are concerned these are defined at a particular distance. Basic voltage measurements are defined in units of [dBuV]

As an example, the basic calculation for all measurements is as follows:

$$\text{Emission level [dBuV]} = \text{Indicated voltage level [dBuV]} + \text{Cable Loss [dB]} + \text{Other correction factors [dB]}$$

The combinations of correction factors are dependent upon the exact test configurations [see test equipment lists for further details] and may include:-

Antenna Factors, Pre Amplifier Gain, LISN Loss, Pulse Limiter Loss and Filter Insertion Loss..

Note: to convert the results from dBuV/m to uV/m use the following formula:-

$$\text{Level in uV/m} = \text{Common Antilogarithm } [(X \text{ dBuV/m})/20] = Y \text{ uV/m}$$

Measurement Uncertainty Values

voltage and power measurements	± 2 dB
RF Output Power, conducted	± 2 dB
radiated measurements	± 3.2 dB
frequency measurements	± 2.4 10 <sup>-7</sup> MHz
temperature measurements	± 0.54°C
humidity measurements	± 2.3%
DC and low frequency measurements	± 2.5%.

Where relevant measurement uncertainty levels have been estimated for tests performed on the apparatus. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Radiated emissions (expanded uncertainty, confidence interval 95%)

30 MHz - 300 MHz	+/- 3.8 dB
300 MHz - 1000 MHz	+/- 4.3 dB
1 GHz - 10 GHz	+/- 4.0 dB
10 GHz - 18GHz	+/- 8.2 dB
18GHz - 26.5GHz	+/- 4.1 dB
26.5GHz - 40GHz	+/- 3.9 dB

Conducted emissions (expanded uncertainty, confidence interval 95%)

30 MHz – 40GHz	+/- 0.38 dB
----------------	-------------

A product is considered to comply with a requirement if the nominal measured value is below the limit line. The product is considered to not be in compliance in case the nominal measured value is above the limit line.

**This report must not be reproduced except in full, without written approval of Cisco Systems.**

**2.3 Date of testing (initial sample receipt date to last date of testing)**

27-March-2023 to 07-April-2023

**2.4 Report Issue Date**

19-April-2023

**2.5 Testing facilities**

This assessment was performed by:

**Testing Laboratory**

Cisco Systems, Inc.  
125 West Tasman Drive (Building P)  
San Jose, CA 95134  
USA

**Headquarters**

Cisco Systems, Inc.  
170 West Tasman Drive  
San Jose, CA 95134  
USA

**Registration Numbers for Industry Canada**

<b>Cisco System Site</b>	<b>Address</b>	<b>Site Identifier</b>
Building P, 10m Chamber	125 West Tasman Dr San Jose, CA 95134	Company #: 2461N-2
Building P, 5m Chamber	125 West Tasman Dr San Jose, CA 95134	Company #: 2461N-1
Building 7, 5m Chamber	425 E. Tasman Drive San Jose, California 95134 United States	Company #: 2461N-3

**Test Engineer**

Farida Rahmanzai



## 2.6 Equipment Assessed (EUT)

IW9165DH-B with embedded 5GHz radio module.

## 2.7 EUT Description

The Catalyst IW9165 Series addresses the growing need for reliable client wireless connectivity to mission-critical applications as organizations automate processes and operations. It comes with two 2x2 radios, features an industrial design, and is packed with advanced features.

The Cisco Catalyst IW9165D Heavy Duty Access Point is designed to make wireless backhaul deployment simple. It comes with a built-in directional antenna that enables long-range, high-throughput connectivity anywhere fiber is not an option. The external antenna ports let you quickly extend your network to new places when needed and choose the right antenna based on the use cases and deployment architectures. With heavy-duty IP67 design, the Catalyst IW9165D is certified to operate under wet, dusty, and extreme temperature conditions.

### **IW9165DH Key Features:**

- Dual radio – 5GHz, 5/6GHz
- Directional & External (2 x N Type) antennas
- 2x2 MIMO 2SS, Max data rate – 3.6 Gbps
- BTLE, GNSS radio
- CURWB mode provides reliable wireless connectivity
- RJ45, M12 – 1 x 2.5Gbps, 1x 1 Gbps
- Dual power input – PoE-in & 24-48VDC
- Dual mounting options – Pole & Wall mount
- IP67

### **Wireless Protocols support**

- Wi-Fi: IEEE 802.11a, 802.11n, 802.11ac, 802.11ax
- Bluetooth Low Energy v5.0: IEEE 802.15 (1Mbps & 2Mbps, single stream)
- GNSS (Global Navigation Satellite System) receiver

### **5 GHz Radio Specification:**

- 802.11a: 6, 9, 12, 18, 24, 36, 48, 54 Mbps
- 802.11n: HT20 and HT40, MCS0 to 15
- 802.11ac: ◦ VHT20, MCS0 to 8, 1 or 2 spatial streams  
◦ VHT40 and VHT80 MCS0 to 9, 1 or 2 spatial streams
- 802.11ax: ◦ HE20, HT40, and HE80 MCS0 to 11, 1 or 2 spatial streams



Radio Test Report No: **EDCS - 24042660**

---

The following antennas are supported by this product series.

Please note the following antenna gain information was provided by the customer:

Frequency	Part Number	Antenna Type	Peak Antenna Gain (dBi)
5 GHz	IW-ANT-PNL-515-N	4-Element Dual-Polarized Patch Antenna, N Female Connectors	15



## **Model/PID differences**

All PIDs have identical components, PCB layout, electronics circuitries, and enclosure. The only difference is domain code selected in the software.

The model differences are described below:

IW9165DH-B represents U.S PID with US domain code selected

IW9165DH-A represents Canada PID with Canada domain code selected.

IW9165DH-ROW represents Worldwide PID, except for US & CAN, with ROW domain code selected.

## Section 3: Result Summary

### 3.1 Results Summary Table

#### Radiated Emissions (General requirements)

Basic Standard	Technical Requirements / Details	Result
<b>FCC 15.407</b> (b)(1)	<b>TX Spurious Emissions in non-restricted bands:</b> <b>FCC: Undesirable emission limits.</b> Except as shown in <a href="#">paragraph (b)(7)</a> of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits: For transmitters operating in the 5.15–5.25 GHz band: All emissions outside of the 5.15–5.35 GHz band shall not exceed an e.i.r.p. of –27 dBm/MHz.	
<b>FCC 15.407</b> (b)(9)	<b>FCC:</b> Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in <a href="#">§15.209</a> .	Pass
<b>FCC 15.209</b>	<b>FCC:</b> Except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the field strength limits table in this section.	
<b>RSS-247</b> 6.2.1.2	<b>RSS:</b> For transmitters with operating frequencies in the band 5150-5250 MHz, all emissions outside the band 5150-5350 MHz shall not exceed -27 dBm/MHz e.i.r.p.	
<b>FCC 15.209</b>  <b>FCC 15.205</b>  <b>RSS-Gen 8.10</b>	<b>TX Spurious Emissions in restricted bands:</b> <b>FCC:</b> Unwanted emissions falling within the restricted bands, as defined in FCC 15.205 (a) must also comply with the radiated emission limits specified in FCC 15.209 (a).  <b>RSS:</b> Unwanted emissions falling into restricted bands of Table 6 shall comply with the limits of Table 4 specified in RSS-Gen 8.9.	Pass

## Section 4: Sample Details

Note: Each sample was evaluated to ensure that its condition was suitable to be used as a test sample prior to the commencement of testing. Please also refer to the “Justification for worst Case test Configuration” section of this report for further details on the selection of EUT samples.

### 4.1 Sample Details

Sample Number	Equipment Details	Serial Number	CISCO Part Number	Radio FW Version
S01	IW9165DH-B with embedded 5GHz radio module.	FOC2638BL9T	68-103412-02	QC_IMAGE_VERSION_STRING=WLAN.HK.2.4.c2-00211-QCAHKSUPL_SILICON Z-1
S02	IW-PWRADPT-MFIT4PN Liteon AC Adaptor	LIN26292020	341-101392-01	----

### 4.2 System Details

System #	Description	Samples
1	IW9165DH-B with embedded Radio module, radio + ext. PS.	S01, S02

### 4.3 Mode of Operation Details


Mode	Mode	Modulation	Data Rate	BW
1. Transmit	2x2 MIMO 802.11n/HT20	MIMO-OFDM	MCS0	20MHz

**Note:** Table above represents the worst-case scenarios for all modulations and data rate combination of each mode. The TX modes in the table above were determined to be the worst-case emissions of all TX modes and selected for RSE testing.

## Appendix A: Radiated Spurious Emission


### A.1 Setup Diagram

#### Radiated Emission Setup Diagram-Below 1G (Preamp used is optional)

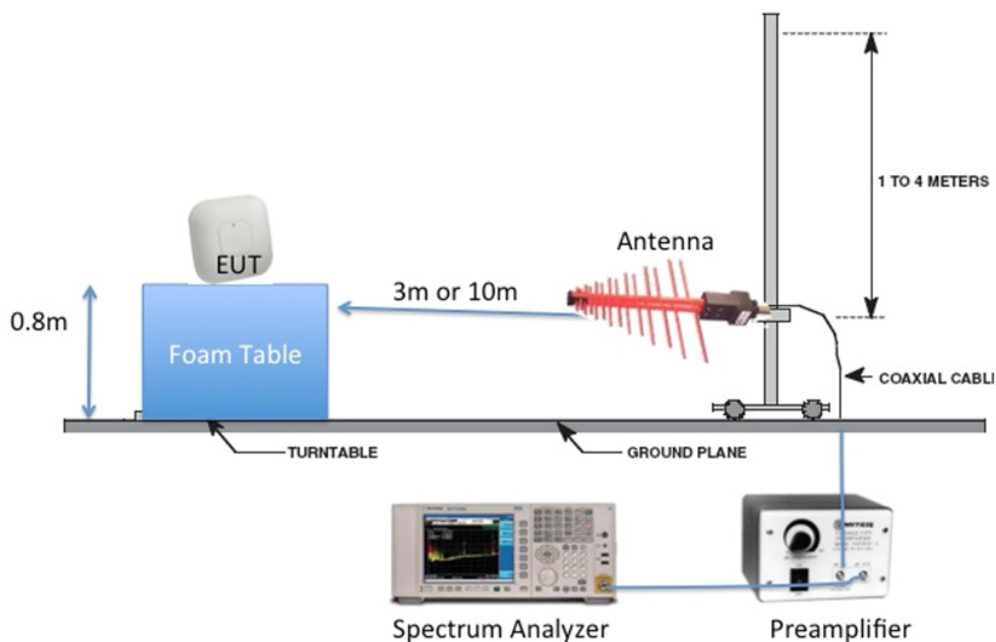

**Note:** The radiated spurious emissions test setup referenced to KDB789033 D02, v02r01, Section II (G)(3)(b)(i)), the EUT antenna ports were terminated with 50Ω loads.

**Radiated Emission Setup Diagram-Above 1G**

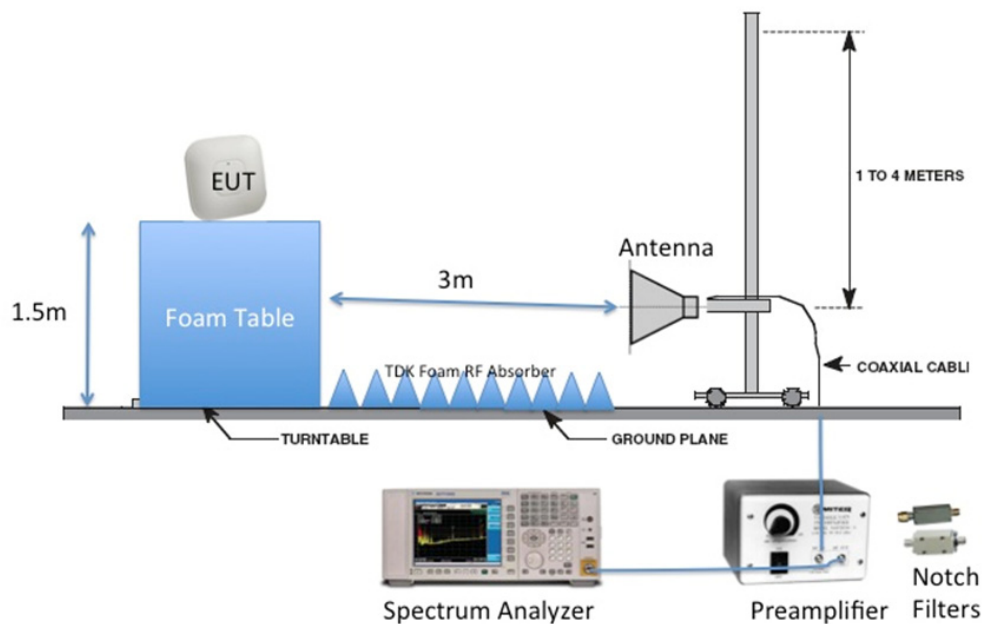

**Note:** The radiated spurious emissions test setup referenced to KDB789033 D02, v02r01, Section II (G)(3)(b)(i)), the EUT antenna ports were terminated with 50Ω loads.

## **A.2 Radiated Spurious Emissions Test Requirements & Limits**

Emissions on frequency or frequencies which are outside the necessary bandwidth and level of which may be reduced without effecting the corresponding transmission of information. Spurious emissions include harmonic emissions, parasitic emissions, intermodulation products and frequency conversion products, but exclude out-of-band emissions.



## Restricted bands Limits

**FCC 15.407** (b) (10) The provisions of 15.205 apply to intentional radiators operating under this section.

**FCC 15.205** (b) Except as provided in paragraphs (d) and (e) of this section, the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in § 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in § 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in § 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in § 15.35 apply to these measurements.

Restricted Bands for FCC			
MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
10.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	Above 38.6
13.36-13.41			

**RSS-Gen 8.10**

(b) Unwanted emissions that fall into restricted bands of Table 7 shall comply with the limits specified in table 5 (general field strength limits at frequencies above 30 MHz) and table 6 (general field strength limits at frequencies below 30 MHz).

(c) Unwanted emissions that do not fall within the restricted frequency bands of Table 7 comply either with the limits specified in the applicable RSS or with those specified in table 5 and table 6.

**Table 7 Restricted Bands**

MHz	MHz	GHz
0.090-0.110	74.8-75.2	9.0-9.2
2.1735-2.1905	108-138	9.3-9.5
3.020-3.026	156.52475-156.52525	10.6-12.7
4.125-4.128	156.7-156.9	13.25-13.4
4.17725-4.17775	240-285	14.47-14.5
4.20725-4.20775	322-335.4	15.35-16.2
5.677-5.683	399.9-410	17.7-21.4
6.215-6.218	608-614	22.01-23.12
6.26775-6.26825	960-1427	23.6-24.0
6.31175-6.31225	1435-1626.5	31.2-31.8
8.291-8.294	1645.5-1646.5	36.43-36.5
8.362-8.366	1660-1710	Above 38.6
8.37625-8.38675	1718.8-1722.2	*
8.41425-8.41475	2200-2300	
12.29-12.293	2310-2390	
12.51975-12.52025	2655-2900	
12.57675-12.57725	3260-3267	
13.36-13.41	3332-3339	
16.42-16.423	3345.8-3358	
16.69475-16.69525	3500-4400	
16.80425-16.80475	4500-5150	
25.5-25.67	5350-5460	
37.5-38.25	7250-7750	
73-74.6	8025-8500	

## Non-Restricted Bands Limits

### Below 1 GHz

#### FCC 15.209

The level of any unwanted emissions from an intentional radiator operating under these general provisions shall not exceed the level of the fundamental emission. Except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the table specified in the table in FCC§15.209(a).

#### FCC15.407

(b) (9) Unwanted emissions below 1GHz must comply with general field strength limits set forth in §15.209.

#### RSS-Gen 8.9

Except when the requirements applicable to a given device state otherwise, emissions from licence-exempt transmitters shall comply with the field strength limits shown in Table below. Additionally, the level of any transmitter emission shall not exceed the level of the transmitter's fundamental emission.

General Field Strength Limits Table			
Frequency (MHz)	Field strength (uV/meter)	Field strength (dBuV/meter)	Measurement distance (meters)
30-88	100**	40 Qp	3
88-216	150**	43.5 Qp	3
216-960	200**	46 Qp	3
Above 960	500	54 Av / 74 Pk	3

### Above 1 GHz

#### FCC15.407

(b) *Undesirable emission limits.* Except as shown in paragraph (b) (7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

- (1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz

#### RSS-247 (6.2.1.2)

For transmitters with operating frequencies in the band 5150-5250 MHz, all emissions outside the band 5150-5350 MHz shall not exceed -27 dBm/MHz e.i.r.p.

### A.3 Limit Conversion (power to field strength)

The field strength limit in dBμV can be converted from power (logarithmic) by using the field strength (linear) approach formula as follows:

$$V/m = \frac{\sqrt{30 \times P_t \times g_t}}{d}$$

where: **pt** = transmitter output power in watts,  
**gt** = numeric gain of the transmitting antenna (unit less),  
**E** = electric field strength in V/m,  
**d** = measurement distance in meters (m).

From the equation above, unit conversion from log => linear with a known power limit of -27 dBm.

#### (1) Conversion from dBm to Watt

$$\text{dBm to Watts } W = 10^{((\text{dBm} - 30)/10)}$$

$$\begin{aligned} P(W) &= 10^{(-27 - 30) / 10} \\ &= 10^{-5.7} \\ &= 1.995 \times 10^{-6} \end{aligned}$$

#### (2) Convert from Watt to field strength

a. Convert from Watt to V/m @ 3m distance

$$\begin{aligned} V/m &= \frac{\sqrt{30 \times P_t \times g_t}}{3} \\ &= \frac{\sqrt{30 \times 0.000001995 \times 1}}{3} \\ &= 0.00257 \end{aligned}$$

b. Convert field strength to power density (V/m to dBμV/m)

$$\begin{aligned} \text{dB}\mu\text{V/m} &= 20 \log (V/m) + 120 \\ &= 68.2 \end{aligned}$$

#### A.4 Test Procedure

**Ref.** ANSI C63.10: 2013 section 5 / section 6.5, section 6.6

<b>Test Procedure</b>
<ol style="list-style-type: none"> <li>1. Place EUT on the tabletop 80cm above ground below 1GHz scan and 1.5m above 1GHz scan with @3m test distance from measuring antenna from 30MHz – 40GHz preferably. If necessary due to instrument setup capabilities in higher frequency range, 1m test distance can be used.</li> <li>2. Turn on the lowest radio operating frequency in continuous transmit mode.</li> <li>3. Use Vasona software to configure the Spectrum analyzer test parameters as shown below (be sure to enter all losses between the transmitter output and the spectrum analyzer).</li> <li>4. Allow Vasona software to initiate the pre-scan and identify all emissions close to the limits.</li> <li>5. Manually fine tune all identified emissions and use the marker function to determine the maximum spurs amplitude level.</li> <li>6. Record at least 6 highest identified emissions with amplitude relative to the limits. Emissions more than 20 dB below the peak limits do not need to be reported.</li> <li>7. For all emissions identified in the restricted bands, perform formal measurement.</li> <li>8. Capture graphs and record pertinent measurement data.</li> <li>9. Repeat step 2- 8 with middle and highest operating radio frequency.</li> </ol>
<p>Note: Vasona software shall automatically control the movement of the antenna height from 1m – 4m and rotation of the turntable from 0° - 360° and perform the measurement for all identified emissions.</p>

**Ref.** ANSI C63.10: 2013 section 4.1.4 / section 12.7.5 (Quasi-Peak), section 12.7.6 (peak), section 12.7.7.3 (average), Cisp16-1-1

<b>Test parameters</b>
<ol style="list-style-type: none"> <li>(i) Span = Entire frequency range or segment if necessary.</li> <li>(ii) Reference Level <math>\geq</math> 10dB headroom between Spectrum analyzer's ceiling and top carrier signal</li> <li>(iii) RBW = 100 kHz (less than or equal to 1 GHz); 1 MHz (above 1 GHz)</li> <li>(iv) VBW <math>\geq</math> 3 x RBW</li> <li>(v) Detector = Peak &amp; Quasi-Peak (frequency range 30 MHz to 1 GHz); Peak &amp; Average (frequency range above 1 GHz); Change VBW to 10 Hz for average measurement</li> <li>(vi) Sweep Time = Couple</li> </ol>


**Note:** The data displayed on the plots detailed in the graphical test results section were measured using a 'Peak Detector'. Please refer to the results table for the detectors used during formal measurements.



Radio Test Report No: **EDCS - 24042660**

### A.5 TX Radiated Spurious Emissions Graphical Data Results

<b>Subtest Date</b>	07-April-2023
<b>Subtest Title</b>	Transmitter Spurious Emissions
<b>Frequency Range</b>	30MHz - 1GHz
<b>Mode</b>	<b>2x2 MIMO 802.11n/HT20</b> (Refer to section 4.3 for mode details)
<b>Comments on the above Test Results</b>	Tx Channel 36 (5180 MHz)

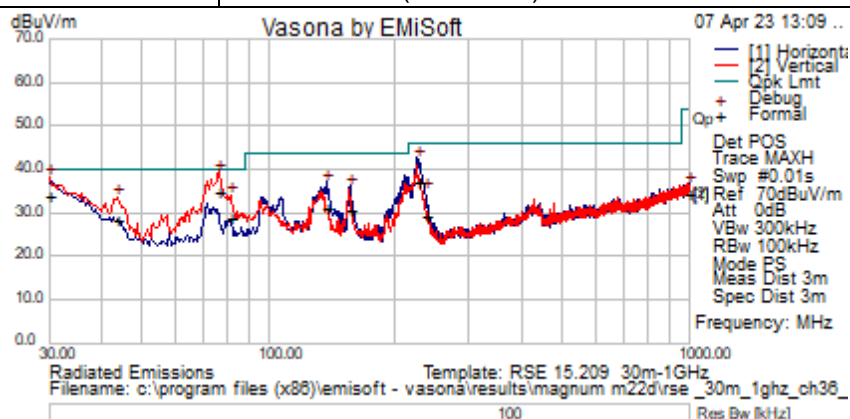


Frequency (MHz)	Raw (dBuV)	Cab Loss (dB)	AF (dB)	Level (dBuV)	Detector	Polarity	Height (cm)	Azt (Deg)	Limit (dBuV)	Margin (dB)	Results Pass / Fail	Comments
76.23299	26.58	0.56	7.91	35.05	Quasi-pk	V	104	185	40	-4.95	Pass	
30.06032	12.43	0.37	21.26	34.05	Quasi-pk	H	317	185	40	-5.95	Pass	
225.3171	25.34	0.97	10.75	37.07	Quasi-pk	H	148	251	46	-8.93	Pass	
81.00874	20.81	0.58	7.52	28.91	Quasi-pk	V	128	206	40	-11.09	Pass	
136.4269	17.03	0.75	13.57	31.35	Quasi-pk	H	243	236	43.5	-12.15	Pass	
43.304	16.3	0.44	11.76	28.49	Quasi-pk	V	124	360	40	-11.51	Pass	
156.0463	17.91	0.8	12.2	30.91	Quasi-pk	H	151	124	43.5	-12.59	Pass	
235.4576	17.19	1	11.22	29.41	Quasi-pk	H	123	119	46	-16.59	Pass	
999.7342	9.35	2.16	23.02	34.53	Quasi-pk	H	310	274	54	-19.47	Pass	



Radio Test Report No: **EDCS - 24042660**


<b>Subtest Date</b>	27-March-2023
<b>Subtest Title</b>	Transmitter Spurious Emissions
<b>Frequency Range</b>	1GHz - 10GHz
<b>Mode</b>	2x2 MIMO 802.11n/HT20 (Refer to section 4.3 for system details)
<b>Comments on the above Test Results</b>	Tx Channel 36 (5180 MHz)

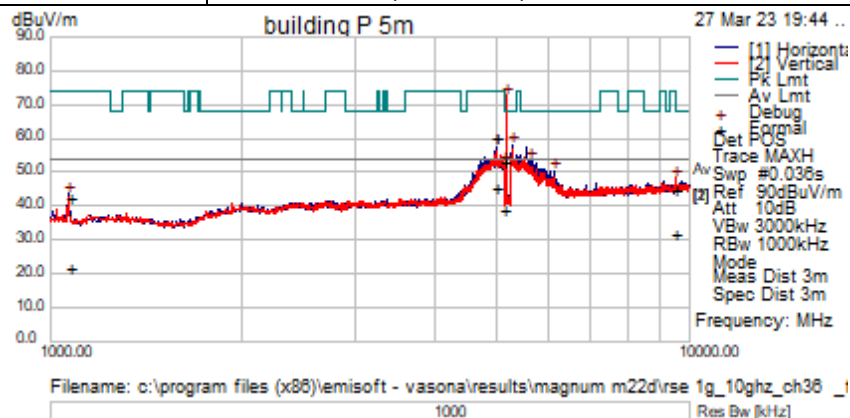

Frequency (MHz)	Raw (dBuV)	Cab Loss (dB)	AF (dB)	Level (dBuV)	Detector	Polarity	Height (cm)	Azt (Deg)	Limit (dBuV)	Margin (dB)	Results Pass / Fail	Comments
5180.5	83.44	6.17	-16.92	72.69	Peak	V	200	0	--	--	Ignored	fundamental
1071.522	44.24	2.77	-25.04	21.96	Average	H	251	40	54	-32.04	Pass	RB
1071.522	65.04	2.77	-25.04	42.76	Peak	H	251	40	74	-31.24	Pass	RB
4991.752	56.66	6.09	-17.28	45.47	Average	H	195	360	54	-8.53	Pass	RB
4991.752	71.37	6.09	-17.28	60.19	Peak	H	195	360	74	-13.81	Pass	RB
5130.868	50.01	6.17	-16.99	39.19	Average	V	151	361	54	-14.81	Pass	RB
5130.868	64.01	6.17	-16.99	53.2	Peak	V	151	361	74	-20.8	Pass	RB
9527.418	37.49	8.4	-14.08	31.81	Average	H	282	70	54	-22.19	Pass	RB
9527.418	50.73	8.4	-14.08	45.05	Peak	H	282	70	74	-28.95	Pass	RB
5279.5	68.47	6.25	-16.74	57.98	Peak	H	150	358	68.2	-10.22	Pass	
5635	63.41	6.46	-16.5	53.38	Peak	H	150	349	68.2	-14.82	Pass	
6143.5	59.22	6.73	-15.71	50.24	Peak	H	150	0	68.2	-17.96	Pass	
9527.5	53.89	8.4	-14.08	48.21	Peak	V	250	247	68.2	-19.99	Pass	

Note: RB means Restricted Band



Radio Test Report No: **EDCS - 24042660**
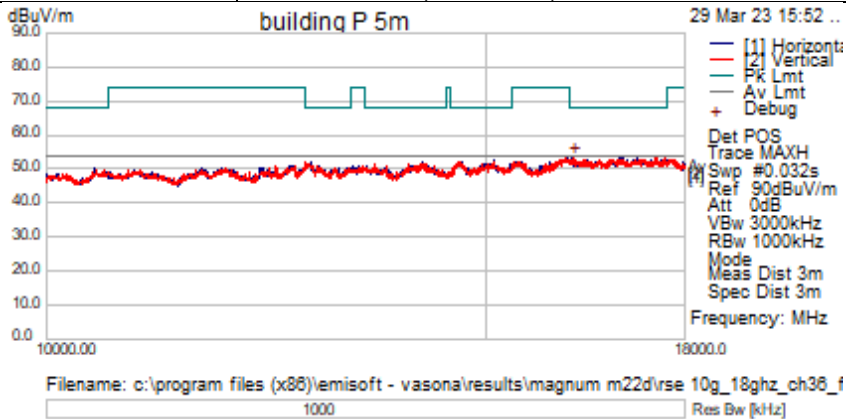
<b>Subtest Date</b>	29-March-2023
<b>Subtest Title</b>	Transmitter Spurious Emissions
<b>Frequency Range</b>	10GHz - 18GHz
<b>Mode</b>	<b>2x2 MIMO 802.11n/HT20</b> (Refer to section 4.3 for system details)
<b>Comments on the above Test Results</b>	Tx Channel 36 (5180 MHz)
	

Note: No measurable emissions found from 10GHz - 18GHz




<b>Subtest Date:</b>	04-April-2023
<b>Subtest Title</b>	Transmitter Spurious Emissions
<b>Frequency Range</b>	18GHz - 40GHz
<b>Mode</b>	2x2 MIMO 802.11n/HT20 (Refer to section 4.3 for system details)
<b>Comments on the above Test Results</b>	Tx Channel 36 (5180 MHz)

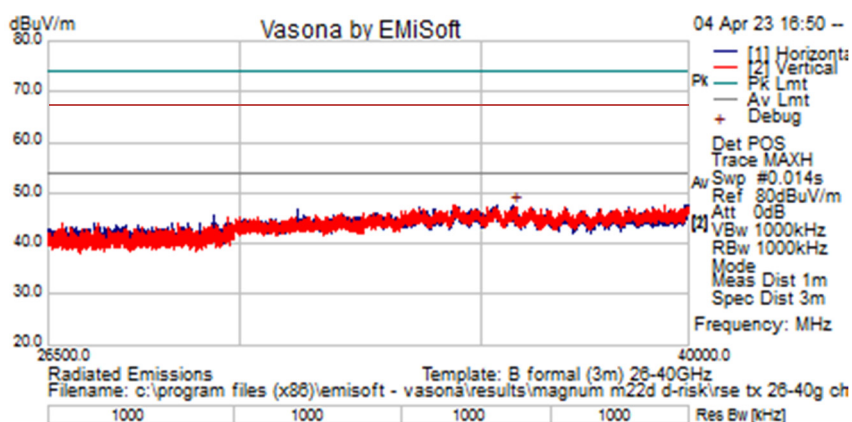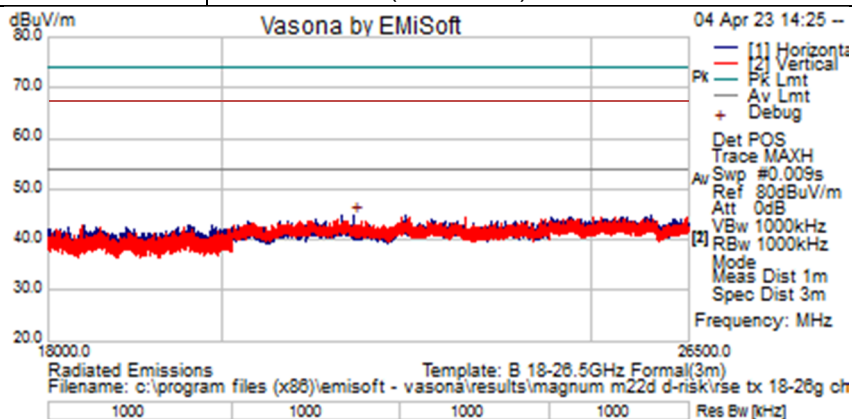

Legend: — 74dB $\mu$ V/m (Peak); — 54 dB $\mu$ V/m (Average); — 68dB $\mu$ V/m (Peak)(-27dbm)

Note: No measurable emissions found from 18GHz - 40GHz.

<b>Subtest Date</b>	07-April-2023
<b>Subtest Title</b>	Transmitter Spurious Emissions
<b>Frequency Range</b>	30MHz - 1GHz
<b>Mode</b>	2x2 MIMO 802.11n/HT20 (Refer to section 4.3 for system details)
<b>Comments on the above Test Results</b>	Channel 44 (5220 MHz)

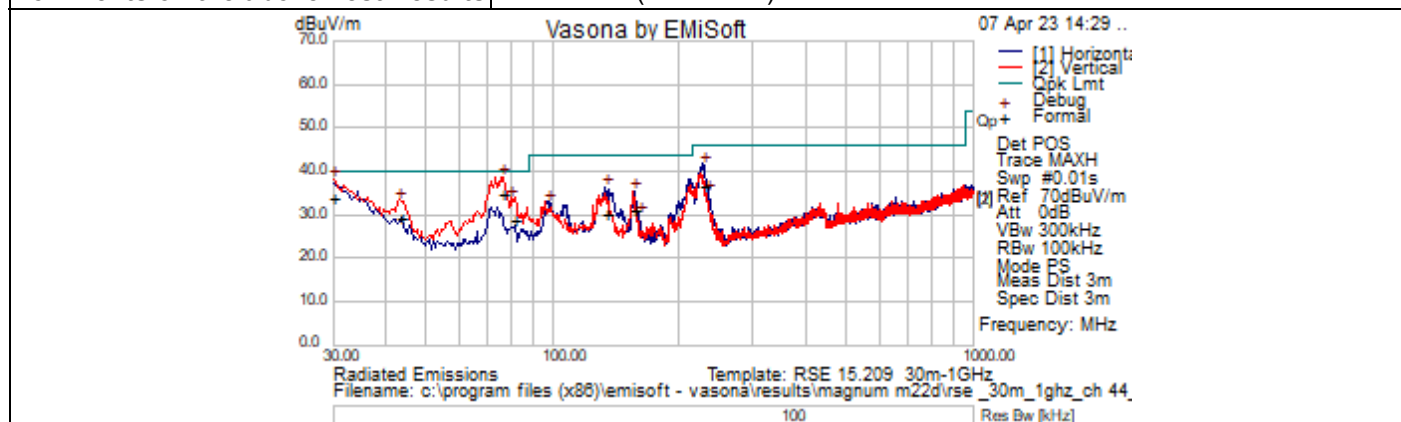


Frequency (MHz)	Raw (dBuV)	Cab Loss (dB)	AF (dB)	Level (dBuV)	Detector	Polarity	Height (cm)	Azt (Deg)	Limit (dBuV)	Margin (dB)	Results Pass / Fail	Comments
76.25041	26.56	0.56	7.9	35.03	Quasi-pk	V	119	155	40	-4.97	Pass	
30.12958	12.51	0.37	21.22	34.09	Quasi-pk	H	308	0	40	-5.91	Pass	
227.3653	24.83	0.98	10.84	36.65	Quasi-pk	H	99	122	46	-9.35	Pass	
80.61522	20.8	0.58	7.57	28.94	Quasi-pk	V	99	245	40	-11.06	Pass	
43.29101	16.97	0.44	11.77	29.17	Quasi-pk	V	99	165	40	-10.83	Pass	
133.7679	15.91	0.75	13.8	30.46	Quasi-pk	H	226	245	43.5	-13.04	Pass	
155.5082	18.23	0.8	12.25	31.29	Quasi-pk	H	167	117	43.5	-12.21	Pass	




Radio Test Report No: **EDCS - 24042660**

<b>Subtest Date</b>	28-March-2023
<b>Subtest Title</b>	Transmitter Spurious Emissions
<b>Frequency Range</b>	1GHz - 10GHz
<b>Mode</b>	2x2 MIMO 802.11n/HT20 (Refer to section 4.3 for system details)
<b>Comments on the above Test Results</b>	Tx Channel 44 (5220 MHz)

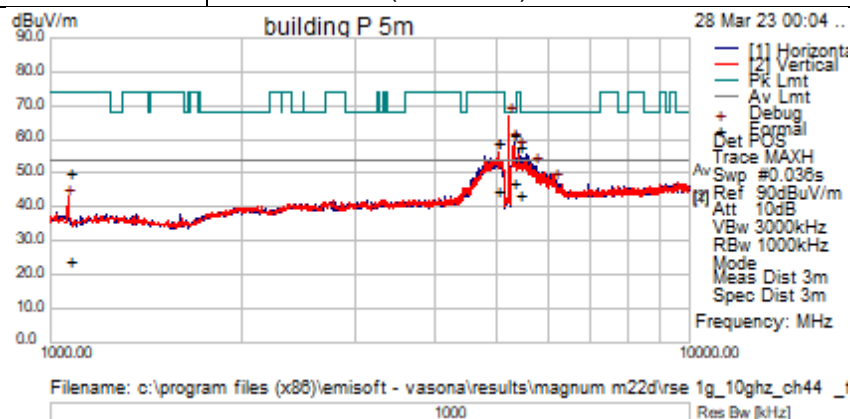



Frequency (MHz)	Raw (dBuV)	Cab Loss (dB)	AF (dB)	Level (dBuV)	Detector	Polarity	Height (cm)	Azt (Deg)	Limit (dBuV)	Margin (dB)	Results Pass / Fail	Comments
5225.5	77.76	6.2	-16.8	67.15	Peak	V	150	359	--	--	Ignored	Fundamental
1071.326	46.27	2.77	-25.04	23.99	Average	H	169	51	54	-30.01	Pass	RB
1071.326	72.22	2.77	-25.04	49.95	Peak	H	169	51	74	-24.05	Pass	RB
5025.037	56.03	6.08	-17.14	44.98	Average	H	163	360	54	-9.02	Pass	RB
5025.037	69.94	6.08	-17.14	58.89	Peak	H	163	360	74	-15.11	Pass	RB
5315.571	57.58	6.27	-16.68	47.17	Average	H	193	360	54	-6.83	Pass	RB
5315.571	72.11	6.27	-16.68	61.7	Peak	H	193	360	68.2	-6.5	Pass	RB
5414.438	54.14	6.33	-16.65	43.82	Average	H	184	361	54	-10.18	Pass	RB
5414.438	68.09	6.33	-16.65	57.77	Peak	H	184	361	74	-16.23	Pass	RB
5752	62.22	6.52	-16.48	52.25	Peak	H	150	353	68.2	-15.95	Pass	
6175	56.77	6.74	-15.73	47.78	Peak	H	150	6	68.2	-20.42	Pass	

Note: RB means Restricted Band
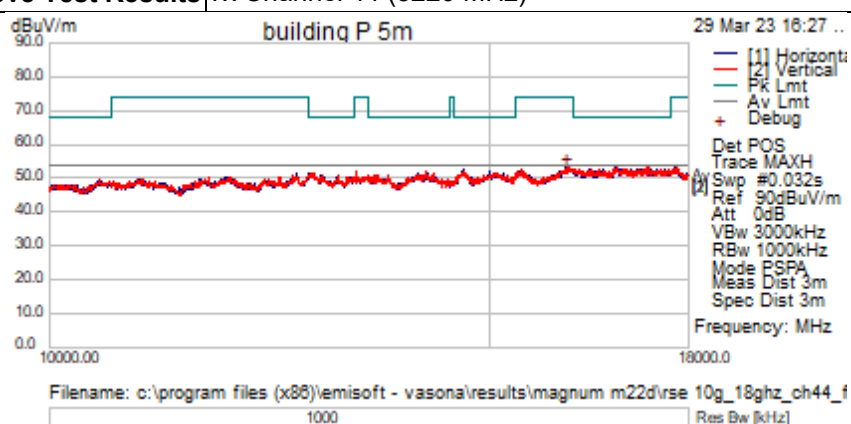
<b>Subtest Date</b>	29-March-2023
<b>Subtest Title</b>	Transmitter Spurious Emissions
<b>Frequency Range</b>	10GHz - 18GHz
<b>Mode</b>	2x2 MIMO 802.11n/HT20 (Refer to section 4.3 for system details)
<b>Comments on the above Test Results</b>	Tx Channel 44 (5220 MHz)
	

Note: No measurable emissions found from 10GHz - 18GHz


<b>Subtest Date</b>	04-April-2023
<b>Subtest Title</b>	Transmitter Spurious Emissions
<b>Frequency Range</b>	18GHz - 40GHz
<b>Mode</b>	<b>2x2 MIMO 802.11n/HT20</b> (Refer to section 4.3 for system details)
<b>Comments on the above Test Results</b>	Tx Channel 44 (5220 MHz)

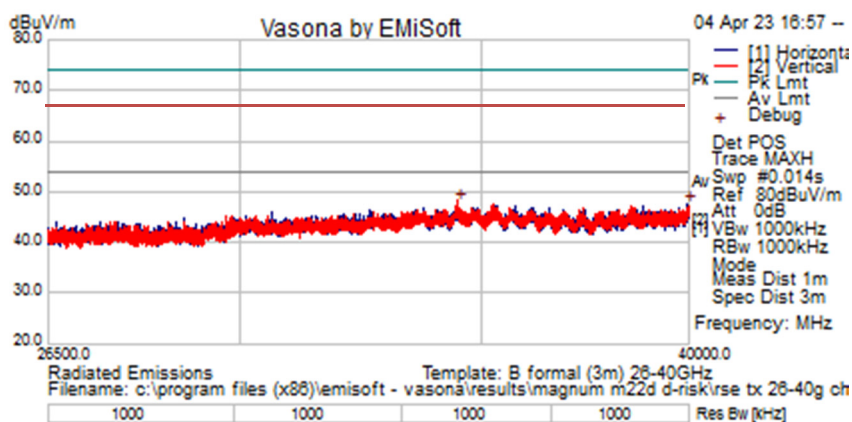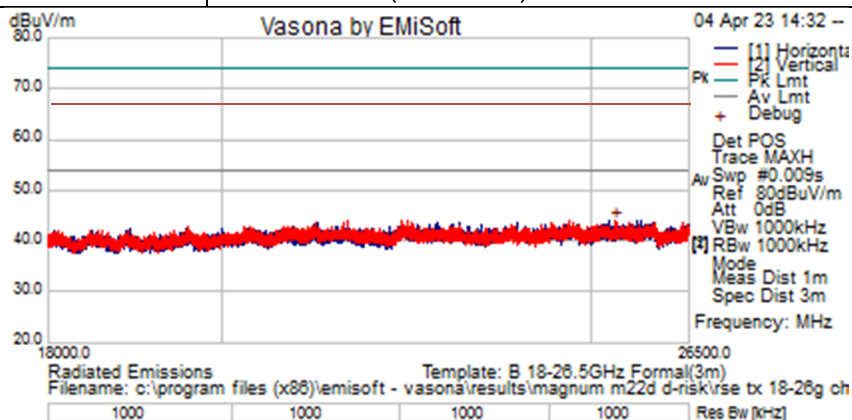

Legend: — 74dB $\mu$ V/m (Peak); — 54 dB $\mu$ V/m (Average); — 68dB $\mu$ V/m (Peak)(-27dbm)

Note: No measurable emissions found from 18GHz - 40GHz.

<b>Subtest Date</b>	07-April-2023
<b>Subtest Title</b>	Transmitter Spurious Emissions
<b>Frequency Range</b>	30MHz - 1GHz
<b>Mode</b>	2x2 MIMO 802.11n/HT20 (Refer to section 4.3 for system details)
<b>Comments on the above Test Results</b>	Tx Channel 48 (5240 MHz)

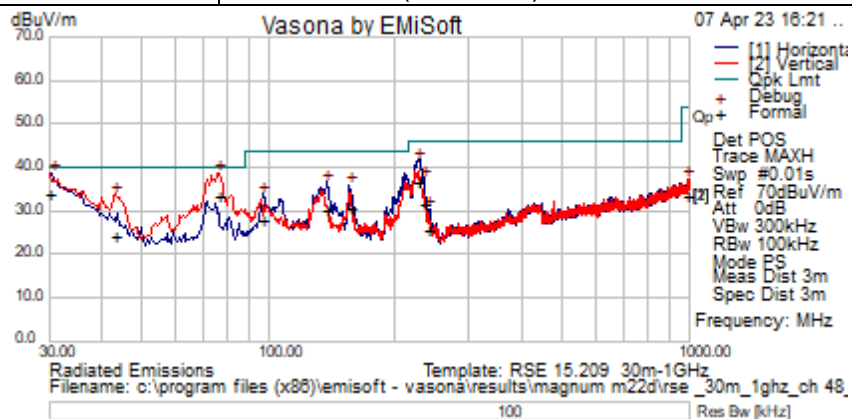


Frequency (MHz)	Raw (dBuV)	Cab Loss (dB)	AF (dB)	Level (dBuV)	Detector	Polarity	Height (cm)	Azt (Deg)	Limit (dBuV)	Margin (dB)	Results Pass / Fail	Comments
30.06022	12.4	0.37	21.26	34.02	Quasi-pk	V	307	44	40	-5.98	Pass	
76.23924	25.11	0.56	7.91	33.58	Quasi-pk	V	175	225	40	-6.42	Pass	
227.2439	24.98	0.98	10.83	36.79	Quasi-pk	H	99	264	46	-9.21	Pass	
43.12459	11.95	0.44	11.89	24.28	Quasi-pk	V	170	149	40	-15.72	Pass	
137.4521	16.05	0.76	13.58	30.39	Quasi-pk	H	212	88	43.5	-13.11	Pass	
156.181	17.56	0.81	12.19	30.55	Quasi-pk	H	214	129	43.5	-12.95	Pass	
234.2172	19.41	0.99	11.18	31.59	Quasi-pk	H	105	243	46	-14.41	Pass	
96.75784	18.11	0.63	9.27	28.01	Quasi-pk	H	206	247	43.5	-15.49	Pass	
989.9479	8.74	2.06	22.93	33.72	Quasi-pk	V	313	350	54	-20.28	Pass	
239.1812	13.16	1	11.39	25.56	Quasi-pk	H	99	261	46	-20.44	Pass	




Radio Test Report No: **EDCS - 24042660**

<b>Subtest Date</b>	28-March-2023
<b>Subtest Title</b>	Transmitter Spurious Emissions
<b>Frequency Range</b>	1GHz - 18GHz
<b>Mode</b>	2x2 MIMO 802.11n/HT20 (Refer to section 4.3 for system details)
<b>Comments on the above Test Results</b>	Tx Channel 48 (5240 MHz)

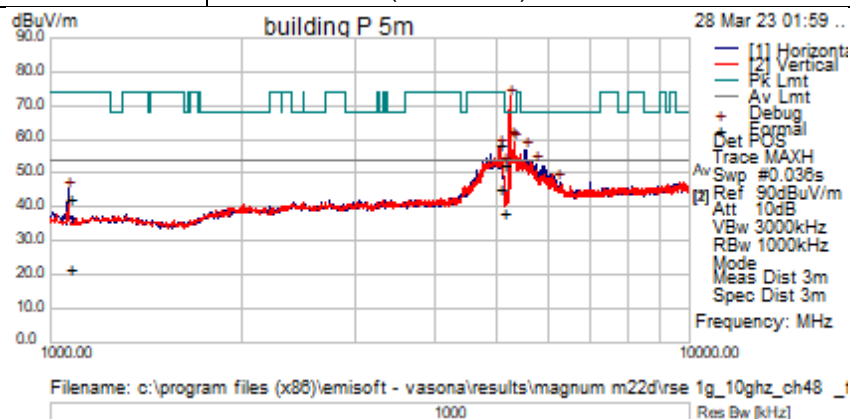

Frequency (MHz)	Raw (dBuV)	Cab Loss (dB)	AF (dB)	Level (dBuV)	Detector	Polarity	Height (cm)	Azt (Deg)	Limit (dBuV)	Margin (dB)	Results Pass / Fail	Comments
5243.5	83.18	6.21	-16.78	72.61	Peak	V	150	360	--	---	Ignored	Fundamental
1070.712	44.24	2.76	-25.04	21.96	Average	H	136	53	54	-32.04	Pass	RB
1070.712	64.61	2.76	-25.04	42.34	Peak	H	136	53	74	-31.66	Pass	RB
5041.195	56.18	6.09	-17.08	45.19	Average	V	175	360	54	-8.81	Pass	RB
5041.195	69.79	6.09	-17.08	58.8	Peak	V	175	360	74	-15.2	Pass	RB
5116.698	49.42	6.16	-16.98	38.6	Average	V	191	0	54	-15.4	Pass	RB
5116.698	63.53	6.16	-16.98	52.71	Peak	V	191	0	74	-21.29	Pass	RB
5266	70.28	6.23	-16.78	59.74	Peak	H	200	358	68.2	-8.46	Pass	
5329	69.73	6.28	-16.67	59.34	Peak	V	150	360	68.2	-8.86	Pass	
5567.5	66.83	6.42	-16.47	56.78	Peak	H	150	350	68.2	-11.42	Pass	
5761	62.62	6.53	-16.45	52.7	Peak	H	200	358	68.2	-15.5	Pass	
6211	56.7	6.77	-15.68	47.8	Peak	H	150	2	68.2	-20.4	Pass	



Note: RB means Restricted Band
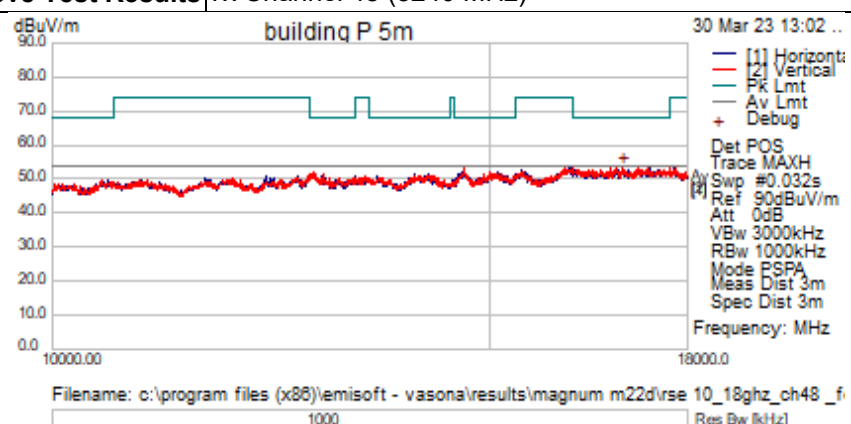
<b>Subtest Date</b>	30-March-2023
<b>Subtest Title</b>	Transmitter Spurious Emissions
<b>Frequency Range</b>	1GHz - 18GHz
<b>Mode</b>	<b>2x2 MIMO 802.11n/HT20</b> (Refer to section 4.3 for system details)
<b>Comments on the above Test Results</b>	Tx Channel 48 (5240 MHz)
 <p>building P 5m</p> <p>30 Mar 23 13:02 ..</p> <p>dBuV/m</p> <p>90.0</p> <p>80.0</p> <p>70.0</p> <p>60.0</p> <p>50.0</p> <p>40.0</p> <p>30.0</p> <p>20.0</p> <p>10.0</p> <p>0.0</p> <p>10000.00</p> <p>18000.0</p> <p>Filename: c:\program files (x86)\emisoft - vasona\results\magnum m22d\vrse 10_18ghz_ch48 _f</p> <p>1000</p> <p>Res Bw [kHz]</p> <p>Det POS</p> <p>Trace MAXH</p> <p>Av Swp #0.032s</p> <p>Ref 90dBuV/m</p> <p>Att 0dB</p> <p>VBw 3000kHz</p> <p>RBw 1000kHz</p> <p>Mode PSPA</p> <p>Meas Dist 3m</p> <p>Spec Dist 3m</p> <p>Frequency: MHz</p> <p>[1] Horizontal</p> <p>[2] Vertical</p> <p>Pk Lmt</p> <p>Av Lmt</p> <p>+ Debug</p>	

Note: No measurable emissions found from 10GHz - 18GHz



<b>Subtest Date</b>	04-April-2023
<b>Subtest Title</b>	Transmitter Spurious Emissions
<b>Frequency Range</b>	18GHz - 40GHz
<b>Mode</b>	2x2 MIMO 802.11n/HT20 (Refer to section 4.3 for system details)
<b>Comments on the above Test Results</b>	Tx Channel 48 (5240 MHz)

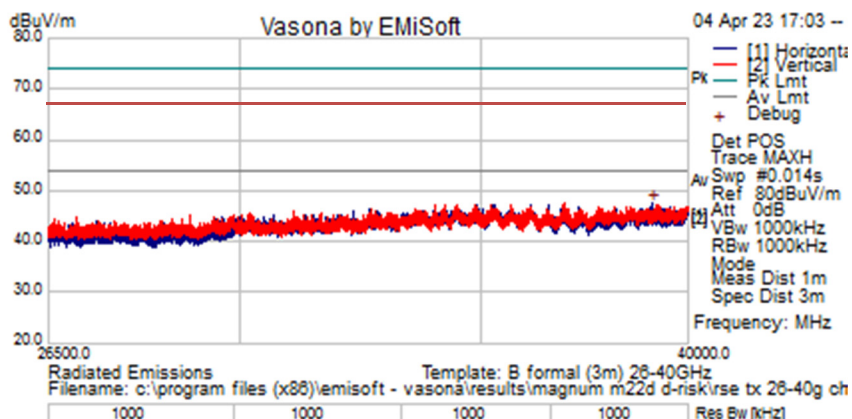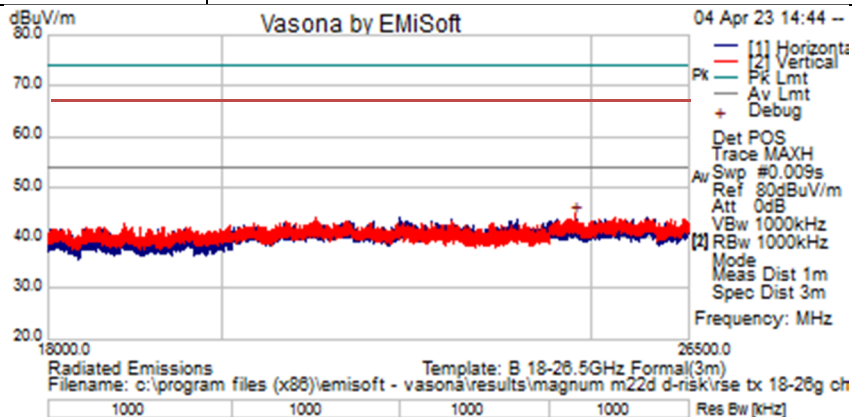

Legend: — 74dB $\mu$ V/m (Peak); — 54 dB $\mu$ V/m (Average); — 68dB $\mu$ V/m (Peak)(-27dbm)

Note: No measurable emissions found from 18GHz - 40GHz.



**Appendix B: List of Test Equipment Used to perform the test**

Equip#	Manufacturer/ Model	Description	Last Cal	Next Due	Test Section
<b>Radiated Emissions 30MHz – 1GHz</b>					
CIS008448	Cisco/NSA 5m Chamber	NSA 5m Chamber	23-Aug-2022	23-Aug-2023	A.5
CIS058263	ROHDE & SCHWARZ/ ESW44	EMI TEST RECEIVER, 44Ghz	22-Aug-2022	22-Aug-2023	A.5
CIS032367	Sunol Sciences / JB1	Combination Bi-Log Antenna, 30MHz-2GHz	16-May-2022	16-May-2023	A.5
CIS063527	MICRO-COAX/UFB311A	RF Coaxial Cable	05-Jan-2023	05-Jan-2024	A.5
CIS021117	Micro-Coax / UFB311A-0- 2484-520520	RF Coaxial Cable, 272.0 in. - 18GHz	12-Sep-2022	12-Sep-2023	A.5
CIS063069	HUBER + SUHNER / Sucoflex 104PEA	Sucoflex N Type blue 7ft cable	28-Jul-2022	28-Jul-2023	A.5
<b>Radiated Emissions 1GHz – 18GHz</b>					
CIS040597	Cisco/NSA 5m Chamber	NSA 5m Chamber Above 1GHz	10-Sep-2022	10-Sep-2023	A.5
CIS058263	ROHDE & SCHWARZ/ ESW44	EMI TEST RECEIVER, 44Ghz	22-Aug-2022	22-Aug-2023	A.5
CIS037581	ETS Lindgren / 3117	Double Ridged Guide Horn Antenna	05-May-2022	05-May-2023	A.5
CIS063061	Cisco / TstHd1	External Preamplifier Array, 1-18GHz	06-Jul-2022	06-Jul-2023	A.5
CIS055357	MITEQ/TTA1800-30-HG-N-M	N-Type Pre-amplifier 18GHz	09-Jun-2022	09-Jun-2023	A.5
CIS063527	MICRO-COAX/UFB311A	RF Coaxial Cable	05-Jan-2023	05-Jan-2024	A.5
CIS021117	Micro-Coax / UFB311A-0- 2484-520520	RF Coaxial Cable, 272.0 in. - 18GHz	12-Sep-2022		A.5
CIS063069	HUBER + SUHNER / Sucoflex 104PEA	Sucoflex N Type blue 7ft cable	28-Jul-2022	28-Jul-2023	A.5
CIS025000	Micro-Coax / UFB197C	RF Coaxial Cable	10-Aug-2022	10-Aug-2023	A.5
CIS063512	Wainwright Instruments/WRCJV 8-5100- 5150-5250-5300-4+	SMA Band Reject Filter. 5.100GHz to 5.300GHz	15-Nov-2022	15-12-Sep- 2023Nov- 2023	A.5
<b>Radiated Emissions 18GHz – 40GHz</b>					
CIS040597	Cisco/NSA 5m Chamber	NSA 5m Chamber Above 1GHz	10-Sep-2022	10-Sep-2023	A.5
CIS058778	ETS Lindgren//3116C	18-40 GHz, Horn Antenna	19-Sep-2022	19-Sep-2023	A.5
CIS059871	Cisco/Test Head 1840.2	18-40GHz test head, includes Pre-Amp, Ant Cable, 6inch formable cable to amp input, 15V pwr pack,+	27-Feb-2023	27-Feb-2024	A.5
CIS59832	ROHDE & SCHWARZ/ ESW44	EMI TEST RECEIVER, 44Ghz	31 Oct 2022	30 Nov 2023	A.5

## Appendix C: Abbreviation Key and Definitions

The following table defines abbreviations used within this test report.

Abbreviation	Description	Abbreviation	Description
EMC	Electro Magnetic Compatibility	°F	Degrees Fahrenheit
EMI	Electro Magnetic Interference	°C	Degrees Celsius
EUT	Equipment Under Test	Temp	Temperature
ITE	Information Technology Equipment	S/N	Serial Number
TAP	Test Assessment Schedule	Qty	Quantity
ESD	Electro Static Discharge	emf	Electromotive force
EFT	Electric Fast Transient	RMS	Root mean square
EDCS	Engineering Document Control System	Qp	Quasi Peak
Config	Configuration	Av	Average
CIS#	Cisco Number (unique identification number for Cisco test equipment)	Pk	Peak
Cal	Calibration	kHz	Kilohertz (1x10 <sup>3</sup> )
EN	European Norm	MHz	MegaHertz (1x10 <sup>6</sup> )
IEC	International Electro technical Commission	GHz	Gigahertz (1x10 <sup>9</sup> )
CISPR	International Special Committee on Radio Interference	H	Horizontal
CDN	Coupling/Decoupling Network	V	Vertical
LISN	Line Impedance Stabilization Network	dB	decibel
PE	Protective Earth	V	Volt
GND	Ground	kV	Kilovolt (1x10 <sup>3</sup> )
L1	Line 1	μV	Microvolt (1x10 <sup>-6</sup> )
L2	Line2	A	Amp
L3	Line 3	μA	Micro Amp (1x10 <sup>-6</sup> )
DC	Direct Current	mS	Milli Second (1x10 <sup>-3</sup> )
RAW	Uncorrected measurement value, as indicated by the measuring device	μS	Micro Second (1x10 <sup>-6</sup> )
RF	Radio Frequency	μS	Micro Second (1x10 <sup>-6</sup> )
SLCE	Signal Line Conducted Emissions	m	Meter
Meas dist	Measurement distance	Spec dist	Specification distance
N/A or NA	Not Applicable	SL	Signal Line (or Telecom Line)
P	Power Line	L	Live Line
N	Neutral Line	R	Return
S	Supply	AC	Alternating Current

## **Appendix D: Photographs of Test Setups**

See FCC/RSS RSE Test Setup document – EDCS-24043302

## **Appendix E: Software Used to Perform Testing**

EMlsoft Vasona, version 6.083

## **Appendix F: Test Procedures**

Measurements were made in accordance with

- KDB 789033 - D02 General UNII Test Procedures New Rules v02r01
- KDB 662911 - MIMO
- ANSI C63.10 2013 Intentional Radiators

Test procedures are summarized below:

FCC 5GHz Test Procedures	EDCS # 1445048
FCC 5GHz RSE Test Procedures	EDCS # 1511600

## **Appendix G: Scope of Accreditation (A2LA certificate number 1178-01)**

The scope of accreditation of Cisco Systems, Inc. can be found on the A2LA web page at:

<http://www.a2la.org/scopepdf/1178-01.pdf>

## **Appendix H: Test Assessment Plan**

Compliance Test Plan (Excel) EDCS# 23771097

Target Power Tables EDCS# 23409888

## **Appendix I: Worst Case Justification**

Worst case modes were selected by by ANSI C63.10 2013 Section **5.6.2.2, 6.3.1**

All 3 orientations (Z, Y, Z) of the EUT were assessed by performing pre-scan.

The Y orientation was determined to be the worst-case orientation.