



FCC PART 15, SUBPART C
ISED C RSS-247, ISSUE 3, AUGUST 2023



TEST REPORT

For

Cisco Systems, Inc.

125 West Tasman Drive
San Jose, CA 95134, USA

FCC ID: LDKIW9165E
IC: 2461A-IW9165E

Report Type: Original Report	Product Type: Wi-Fi 6E Outdoor Access Point
Prepared By: Deepak Mishra Test Technician	
Report Number: R2303171-247	
Report Date: 2023-07-27	
Reviewed By: Christian McCaig RF Lead Engineer	
Bay Area Compliance Laboratories Corp. 1274 Anvilwood Avenue, Sunnyvale, CA 94089, USA Tel: (408) 732-9162, Fax: (408) 732-9164	



Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. This report **must not** be used by the customer to claim product certification, approval, or endorsement by A2LA*, NIST, or any agency of the Federal Government.

* This report may contain data that are not covered by the A2LA accreditation and are marked with an asterisk "*" (Rev.2)

TABLE OF CONTENTS

1	GENERAL DESCRIPTION	4
1.1	PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
1.2	OBJECTIVE	4
1.3	RELATED SUBMITTAL(S)/GRANT(S)	4
1.4	TEST METHODOLOGY	4
1.5	MEASUREMENT UNCERTAINTY	5
1.6	TEST FACILITY REGISTRATIONS	5
1.7	TEST FACILITY ACCREDITATIONS	6
2	SYSTEM TEST CONFIGURATION	8
2.1	JUSTIFICATION	8
2.2	EUT EXERCISE SOFTWARE	8
2.3	EQUIPMENT MODIFICATIONS	8
2.4	LOCAL SUPPORT EQUIPMENT	8
2.5	REMOTE SUPPORT EQUIPMENT	8
2.6	POWER SUPPLY AND LINE FILTERS	8
2.7	INTERFACE PORTS AND CABLING	9
3	SUMMARY OF TEST RESULTS.....	10
4	FCC §15.209, §15.247(D) & ISEDC RSS-247 §5.5, RSS-GEN §8.9, §8.10 - SPURIOUS RADIATED EMISSIONS	11
4.1	APPLICABLE STANDARDS	11
4.2	TEST SETUP	13
4.3	TEST PROCEDURE	13
4.4	CORRECTED AMPLITUDE & MARGIN CALCULATION	14
4.5	TEST SETUP BLOCK DIAGRAM.....	15
4.6	TEST EQUIPMENT LIST AND DETAILS	17
4.7	TEST ENVIRONMENTAL CONDITIONS.....	18
4.8	SUMMARY OF TEST RESULTS.....	18
4.9	RADIATED EMISSIONS TEST RESULTS	19
5	ANNEX A (NORMATIVE) – A2LA ELECTRICAL TESTING CERTIFICATE.....	23

DOCUMENT REVISION HISTORY

Revision Number	Report Number	Description of Revision	Date of Revision
0	R2303171-247	Original Report	2023-07-27

1 General Description

1.1 Product Description for Equipment Under Test (EUT)

This test report was prepared on behalf of *Cisco Systems, Inc.*, and their product model: *IW9165E-B (USA)*, *IW9165E-A (Canada)*, FCC ID: LDKIW9165E, IC: 2461A-IW9165E, or the “EUT” as referred to in this report. It is a Wi-Fi 6E Outdoor Access Point.

Note: 5600-5650 MHz range shall not be applicable to ISED.

1.2 Objective

This report was prepared on behalf of *Cisco Systems, Inc.*, in accordance with Part 2, Subpart J, and Part 15, Subparts B and C of the Federal Communication Commission’s rules and ISEDC RSS-247 Issue 3, August 2023.

The objective was to determine compliance with FCC Part 15.247 and ISEDC RSS-247 rules for RF Radiated Spurious Emissions.

1.3 Related Submittal(s)/Grant(s)

FCC Part 15, Subpart E, Equipment NII with FCC ID: LDKIW9165E, IC: 2461A-IW9165E
FCC Part 90 with FCC ID: LDKIW9165E, IC: 2461A-IW9165E

1.4 Test Methodology

All measurements contained in this report were conducted in accordance with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices and FCC KDB 558074 D01 DTS Meas Guidance v05r02: Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247.

1.5 Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in the field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.

Parameter	Measurement uncertainty
Occupied Channel Bandwidth	±5 %
RF output power, conducted	±0.86 dB
Power Spectral Density, conducted	±0.86 dB
Unwanted Emissions, conducted	±2.76 dB
All emissions, radiated	±4.94 dB
AC power line Conducted Emission	±2.0 dB
Temperature	±2 ° C
Humidity	±5 %
DC and low frequency voltages	±1.0 %
Time	±2 %
Duty Cycle	±3 %

1.6 Test Facility Registrations

BACLs test facilities that are used to perform Radiated and Conducted Emissions tests are currently recognized by the Federal Communications Commission as Accredited with NIST Designation Number US1129.

BACL's test facilities that are used to perform Radiated and Conducted Emissions tests are currently registered with Industry Canada under Registration Numbers: 3062A-1, 3062A-2, and 3062A-3.

BACL is a Chinese Taipei Bureau of Standards Metrology and Inspection (BSMI) validated Conformity Assessment Body (CAB), under Appendix B, Phase I Procedures of the APEC Mutual Recognition Arrangement (MRA). BACL's BSMI Lab Code Number is: SL2-IN-E-1002R

BACL's test facilities that are used to perform AC Line Conducted Emissions, Telecommunications Line Conducted Emissions, Radiated Emissions from 30 MHz to 1 GHz, and Radiated Emissions from 1 GHz to 6 GHz are currently recognized as Accredited in accordance with the Voluntary Control Council for Interference [VCCI] Article 15 procedures under Registration Number A-0027.

1.7 Test Facility Accreditations

Bay Area Compliance Laboratories Corp. (BACL) is:

A- An independent, 3rd-Party, Commercial Test Laboratory accredited to ISO/IEC 17025:2017 by A2LA (Test Laboratory Accreditation Certificate Number 3297.02), in the fields of: Electromagnetic Compatibility and Telecommunications. Unless noted by an Asterisk (*) in the Compliance Matrix (See Section 3 of this Test Report), BACL's ISO/IEC 17025:2017 Scope of Accreditation includes all of the Test Method Standards and/or the Product Family Standards detailed in this Test Report..

BACL's ISO/IEC 17025:2017 Scope of Accreditation includes a comprehensive suite of EMC Emissions, EMC Immunity, Radio, RF Exposure, Safety and wireline Telecommunications test methods applicable to a wide range of product categories. These product categories include Central Office Telecommunications Equipment [including NEBS - Network Equipment Building Systems], Unlicensed and Licensed Wireless and RF devices, Information Technology Equipment (ITE); Telecommunications Terminal Equipment (TTE); Medical Electrical Equipment; Industrial, Scientific and Medical Test Equipment; Professional Audio and Video Equipment; Industrial and Scientific Instruments and Laboratory Apparatus; Cable Distribution Systems, and Energy Efficient Lighting.

B- A Product Certification Body accredited to ISO/IEC 17065:2012 by A2LA (Product Certification Body Accreditation Certificate Number 3297.03) to certify

- For the USA (Federal Communications Commission):

- 1- All Unlicensed radio frequency devices within FCC Scopes A1, A2, A3, and A4;
- 2- All Licensed radio frequency devices within FCC Scopes B1, B2, B3, and B4;
- 3- All Telephone Terminal Equipment within FCC Scope C.

- For the Canada (Industry Canada):

- 1 All Scope 1-Licence-Exempt Radio Frequency Devices;
- 2 All Scope 2-Licensed Personal Mobile Radio Services;
- 3 All Scope 3-Licensed General Mobile & Fixed Radio Services;
- 4 All Scope 4-Licensed Maritime & Aviation Radio Services;
- 5 All Scope 5-Licensed Fixed Microwave Radio Services
- 6 All Broadcasting Technical Standards (BETS) in the Category I Equipment Standards List.

- For Singapore (Info-Communications Development Authority (IDA)):

- 1 All Line Terminal Equipment: All Technical Specifications for Line Terminal Equipment – Table 1 of IDA MRA Recognition Scheme: 2011, Annex 2
2. All Radio-Communication Equipment: All Technical Specifications for Radio-Communication Equipment – Table 2 of IDA MRA Recognition Scheme: 2011, Annex 2

- For the Hong Kong Special Administrative Region:

- 1 All Radio Equipment, per KHCA 10XX-series Specifications;
- 2 All GMDSS Marine Radio Equipment, per HKCA 12XX-series Specifications;
- 3 All Fixed Network Equipment, per HKCA 20XX-series Specifications.

- For Japan:

- 1 MIC Telecommunication Business Law (Terminal Equipment):
 - All Scope A1 - Terminal Equipment for the Purpose of Calls;
 - All Scope A2 - Other Terminal Equipment
- 2 Radio Law (Radio Equipment):
 - All Scope B1 - Specified Radio Equipment specified in Article 38-2-2, paragraph 1, item 1 of the Radio Law
 - All Scope B2 - Specified Radio Equipment specified in Article 38-2-2, paragraph 1, item 2 of the Radio Law
 - All Scope B3 - Specified Radio Equipment specified in Article 38-2-2, paragraph 1, item 3 of the Radio Law

C- A Product Certification Body accredited to ISO/IEC 17065:2012 by A2LA (Product Certification Body Accreditation Certificate Number 3297.01) to certify Products to USA's Environmental Protection Agency (EPA) ENERGY STAR Product Specifications for:

- 1 Electronics and Office Equipment:
 - for Telephony (ver. 3.0)
 - for Audio/Video (ver. 3.0)
 - for Battery Charging Systems (ver. 1.1)
 - for Set-top Boxes & Cable Boxes (ver. 4.1)
 - for Televisions (ver. 6.1)
 - for Computers (ver. 6.0)
 - for Displays (ver. 6.0)
 - for Imaging Equipment (ver. 2.0)
 - for Computer Servers (ver. 2.0)
- 2 Commercial Food Service Equipment
 - for Commercial Dishwashers (ver. 2.0)
 - for Commercial Ice Machines (ver. 2.0)
 - for Commercial Ovens (ver. 2.1)
 - for Commercial Refrigerators and Freezers
- 3 Lighting Products
 - For Decorative Light Strings (ver. 1.5)
 - For Luminaires (including sub-components) and Lamps (ver. 1.2)
 - For Compact Fluorescent Lamps (CFLs) (ver. 4.3)
 - For Integral LED Lamps (ver. 1.4)
- 4 Heating, Ventilation, and AC Products
 - for Residential Ceiling Fans (ver. 3.0)
 - for Residential Ventilating Fans (ver. 3.2)
- 5 Other
 - For Water Coolers (ver. 3.0)

D- A NIST Designated Phase-I and Phase-II Conformity Assessment Body (CAB) for the following economies and regulatory authorities under the terms of the stated MRAs/Treaties:

- Australia: ACMA (Australian Communication and Media Authority) – APEC Tel MRA -Phase I;
- Canada: (Innovation, Science and Economic development Canada - ISEDC) Foreign Certification Body – FCB – APEC Tel MRA -Phase I & Phase II;
- Chinese Taipei (Republic of China – Taiwan):
 - o BSMI (Bureau of Standards, Metrology and Inspection) APEC Tel MRA -Phase I;
 - o NCC (National Communications Commission) APEC Tel MRA -Phase I;
- European Union:
 - o EMC Directive 2014/30/EU US-EU EMC & Telecom MRA CAB (NB)
 - o Radio Equipment (RE) Directive 2014/53/EU US-EU EMC & Telecom MRA CAB (NB)
 - o Low Voltage Directive (LVD) 2014/35/EU
- Hong Kong Special Administrative Region: (Office of the Telecommunications Authority – OFTA) APEC Tel MRA -Phase I & Phase II
- Israel – US-Israel MRA Phase I
- Republic of Korea (Ministry of Communications - Radio Research Laboratory) APEC Tel MRA -Phase I
- Singapore: (Infocomm Media Development Authority - IMDA) APEC Tel MRA -Phase I & Phase II;
- Japan: VCCI - Voluntary Control Council for Interference US-Japan Telecom Treaty VCCI Side Letter-
- USA:
 - o ENERGY STAR Recognized Test Laboratory – US EPA
 - o Telecommunications Certification Body (TCB) – US FCC;
 - o Nationally Recognized Test Laboratory (NRTL) – US OSHA
- Vietnam: APEC Tel MRA -Phase I;

2 System Test Configuration

2.1 Justification

The EUT was configured for testing according to ANSI C63.10-2013 and FCC KDB 558074 D01 DTS Meas Guidance v05r02.

The EUT was tested in a testing mode to represent worst-case results during the final qualification test.

The worst-case data rates are determined to be as follows for each mode based upon investigation by measuring the average power, peak power and PPSD across all data rates bandwidths, and modulations.

2.2 EUT Exercise Software

The test software used was Tera Term. The software is compliant with the standard requirements being tested against.

2.3 Equipment Modifications

No modifications were made to the EUT during testing.

2.4 Local Support Equipment

Manufacturer	Description	Model
Dell	Laptop	Latitude E6410

2.5 Remote Support Equipment

Manufacturer	Description	Model
LiteON	Power Supply	PA-1600-1C

2.6 Power Supply and Line Filters

Manufacturer	Description	Model	Serial Number
Volteq	DC Power Supply	HY5003D	160402343

2.7 Interface Ports and Cabling

Cable Description	Length (m)	To	From
USB A to RJ45	< 1 m	EUT	Laptop
Power Supply	< 1 m	EUT	Power

3 Summary of Test Results

Results reported relate only to the product tested.

FCC/ISED Rules	Description of Test	Results
FCC §15.209, §15.247(d) ISED RSS-247 §5.5 RSS-Gen §8.9, §8.10	Radiated Spurious Emissions	Compliant

BACL is responsible for all the information provided in this report, except when information is provided by the customer as identified in this report. Information provided by the customer, e.g., antenna gain, can affect the validity of results.

4 FCC §15.209, §15.247(d) & ISEDC RSS-247 §5.5, RSS-Gen §8.9, §8.10 - Spurious Radiated Emissions

4.1 Applicable Standards

As per FCC §15.35(d): Unless otherwise specified, on any frequency or frequencies above 1000 MHz, the radiated emission limits are based on the use of measurement instrumentation employing an average detector function. Unless otherwise specified, measurements above 1000 MHz shall be performed using a minimum resolution bandwidth of 1 MHz.

As Per FCC §15.205(a) and RSS-Gen except as show in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 – 0.110	16.42 – 16.423	960 – 1240	4.5 – 5.15
0.495 – 0.505	16.69475 – 16.69525	1300 – 1427	5.35 – 5.46
2.1735 – 2.1905	25.5 – 25.67	1435 – 1626.5	7.25 – 7.75
4.125 – 4.128	37.5 – 38.25	1645.5 – 1646.5	8.025 – 8.5
4.17725 – 4.17775	73 – 74.6	1660 – 1710	9.0 – 9.2
4.20725 – 4.20775	74.8 – 75.2	1718.8 – 1722.2	9.3 – 9.5
6.215 – 6.218	108 – 121.94	2200 – 2300	10.6 – 12.7
6.26775 – 6.26825	123 – 138	2310 – 2390	13.25 – 13.4
6.31175 – 6.31225	149.9 – 150.05	2483.5 – 2500	14.47 – 14.5
8.291 – 8.294	156.52475 – 156.52525	2690 – 2900	15.35 – 16.2
8.362 – 8.366	156.7 – 156.9	3260 – 3267	17.7 – 21.4
8.37625 – 8.38675	162.0125 – 167.17	3.332 – 3.339	22.01 – 23.12
8.41425 – 8.41475	167.72 – 173.2	3.3458 – 3.358	23.6 – 24.0
12.29 – 12.293	240 – 285	3.600 – 4.400	31.2 – 31.8
12.51975 – 12.52025	322 – 335.4		36.43 – 36.5
12.57675 – 12.57725	399.9 – 410		Above 38.6
13.36 – 13.41	608 – 614		

As per FCC §15.209(a): Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (micro volts/meter)	Measurement Distance (meters)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100**	3
88 - 216	150**	3
216 - 960	200**	3
Above 960	500	3

** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

As per FCC §15.247(d),

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

As per ISEDC RSS-Gen 8.9,

Except when the requirements applicable to a given device state otherwise, emission from licence-exempt transmitters shall comply with the field strength limits shown in the table below. Additionally, the level of any transmitter emission shall not exceed the level of the transmitter's fundamental emission.

General Field Strength Limits for Licence-Exemption Transmitters at Frequencies above 30 MHz

Frequency (MHz)	Field Strength ($\mu\text{V}/\text{m}$ at 3 meters)
30-88	100
88-216	150
216-960	200
Above 960*	500

* Unless otherwise specified, for all frequencies greater than 1 GHz, the radiated emission limits for licence-exempt radio apparatus stated in applicable RSSs (including RSS-Gen) are based on measurements using a linear average detector function having a minimum resolution bandwidth of 1 MHz. If an average limit is specified for the EUT, then the peak emission shall also be measured with instrumentation properly adjusted for such factors as pulse desensitization to ensure the peak emission is less than 20 dB above the average limit.

Note: Transmitting devices are not permitted in restricted frequency bands unless stated otherwise in the specific RSS.

As per ISEDC RSS-247 §5.5, in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted under Section 5.4(4), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits specified in RSS-Gen is not required.

4.2 Test Setup

The radiated emissions tests were performed in the 5-meter Chamber, using the setup in accordance with ANSI C63.10-2013. The specification used was the FCC 15 Subpart C and ISEDC RSS-247 limits.

The spacing between the peripherals was 10 centimeters.

External I/O cables were draped along the edge of the test table and bundle when necessary.

4.3 Test Procedure

The antenna-port methodology from ANSI C63.10: 2013 Section 11.12.2 was utilized as an alternative to radiated emissions in the restricted bands.

In order to assess the cabinet radiated spurious emissions, a radiated scan was performed with the antenna of proper impedance installed. The transmitter was turned on.

For the radiated emissions test, the EUT host, and all support equipment power cords was connected to the AC floor outlet.

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

The EUT was set 3 meter away from the testing antenna, which was varied from 1-4 meter, and the EUT was placed on a turntable, which was 0.8 meter and 1.5 meter above the ground plane for below and above 1000 MHz measurements, the table shall be rotated for 360 degrees to find out the highest emission. The receiving antenna should be changed the polarization both of horizontal and vertical.

The spectrum analyzer or receiver is set as:

Below 1000 MHz:

RBW = 100 kHz / VBW = 300 kHz / Sweep = Auto

Above 1000 MHz:

- (1) Peak: RBW = 1MHz / VBW = 1MHz / Sweep = Auto
- (2) Average: RBW = 1MHz / VBW = 10Hz / Sweep = Auto

4.4 Corrected Amplitude & Margin Calculation

For emissions below 1 GHz,

The Corrected Amplitude (CA) is calculated by adding the Correction Factor to the S.A. Reading. The basic equation is as follows:

$$CA = \text{S.A. Reading} + \text{Correction Factor}$$

For example, a corrected amplitude of 40.3 dBuV/m = S.A. Reading (32.5 dBuV) + Correction Factor (7.8 dB/m)

The Correction Factor is calculated by adding the Antenna Factor (AF), the Cable Loss (CL), the Attenuator Factor (Atten) and subtracting the Amplifier Gain (Ga) together. This calculation is done in the measurement software, and reported in the test result section. The basic equation is as follows:

$$\text{Correction Factor} = AF + CL + \text{Atten} - Ga$$

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. For example, a margin of -7 dB means the emission is 7 dB below the maximum limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corrected Amplitude} - \text{Limit}$$

For emission above 1 GHz,

The Corrected Amplitude (CA) is calculated by adding the Antenna Factor (AF), the Cable Loss (CL), the Attenuator Factor (Atten) and subtracting the Amplifier Gain (Ga) to indicated Amplitude (Ai) reading. The basic equation is as follows:

$$CA = Ai + AF + CL + \text{Atten} - Ga$$


For example, a corrected amplitude of 40.3 dBuV/m = Indicated Reading (32.5 dBuV) + Antenna Factor (+23.5dB) + Cable Loss (3.7 dB) + Attenuator (10 dB) - Amplifier Gain (29.4 dB)

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. For example, a margin of -7 dB means the emission is 7 dB below the maximum limit. The equation for margin calculation is as follows:


$$\text{Margin} = \text{Corrected Amplitude} - \text{Limit}$$

4.5 Test Setup Block Diagram


30 MHz to 1000 MHz

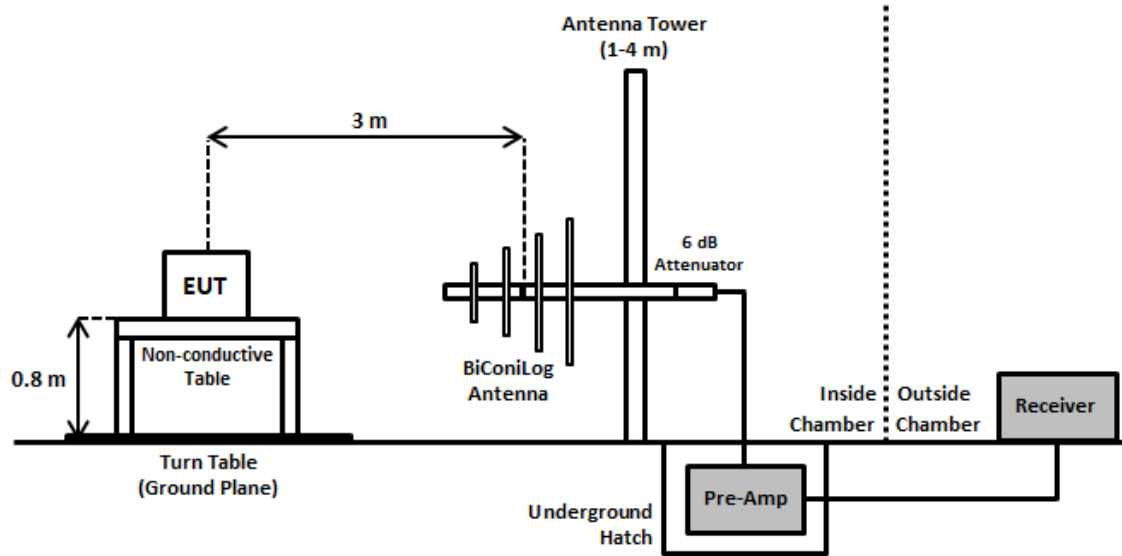

1 GHz to 18 GHz

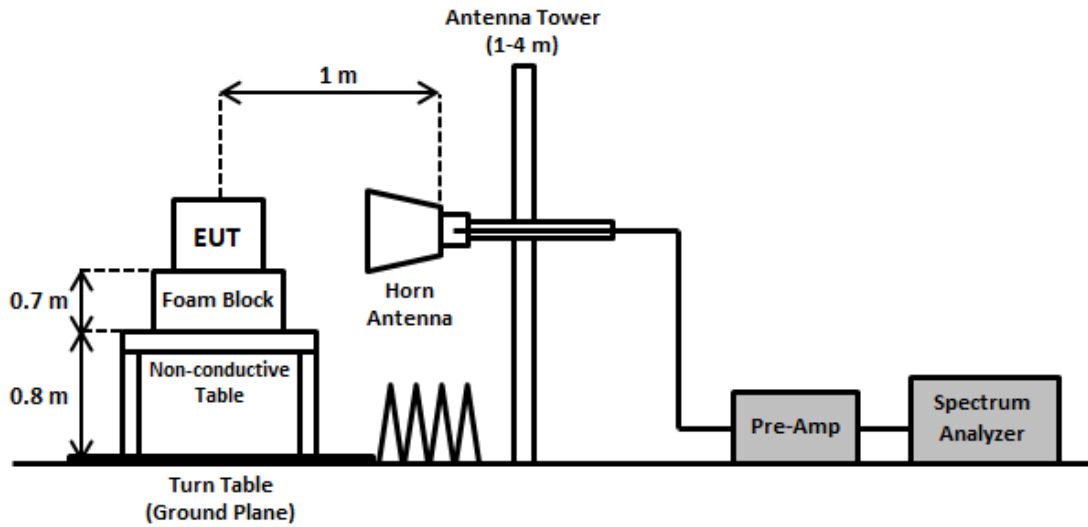

18 GHz to 26.5 GHz

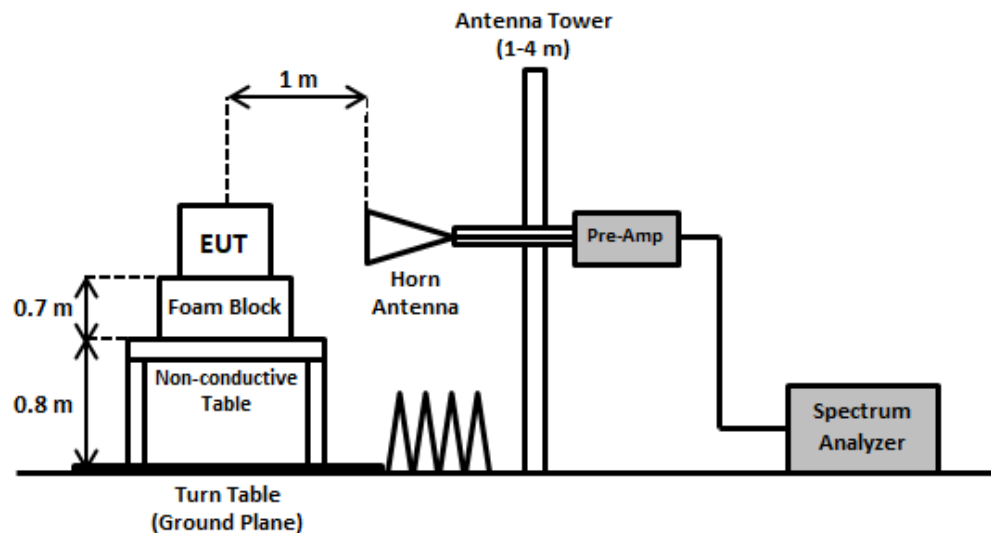

4.6 Test Equipment List and Details

BACL No.	Manufacturer	Description	Model No.	Serial No.	Calibration Date	Calibration Interval
655	Rhode & Schwarz	Signal Analyzer	FSQ26	200749	2022-02-07	2 years
287	Agilent	Spectrum Analyzer	E4446A	US443003 86	2022-05-05	1 year
124	Rhode & Schwarz	EMI Test Receiver	ESCI 1166.5950 K03	100044	2021-05-14	2 years
-	Sunol Sciences	System Controller	SC99V	011003-1	N/R	N/A
321	Sunol Sciences	Biconilog Antenna	JB3	A020106-2	2021-11-22	2 years
1192	ETS Lindgren	Horn Antenna	3117	00218973	2022-09-29	2 years
91	Wisewave	Antenna, Horn	ARH- 4223-02	10555-02	2022-03-08	2 years
-	-	SMA cable	-	-	Each time ¹	N/A
-	-	Notch Filter	-	-	Each time ¹	N/A
1228	Pasternack	Coaxial Cable, RG213	PE3496- 800CM	2111301	2021-11-30	1 year
1295	Carlisle	10m Ultra Low Loss Coaxial Cable	UFB142A- 1-3937- 200200	646398909 12-001	2022-10-28	6 months
827	AH Systems	Preamplifier	PAM 1840 VH	170	2022-06-21	1 year
658	Agilent	Pre-Amplifier	8449B	3008A011 03	2022-07-22	1 year
459	HP	Pre Amplifier	8447D	2443A043 74	2022-07-27	6 months
-	Vasona	Test software	V6.0 build 11	10400213	N/R	N/R

Note: cable and notch filters included in the test set-up will be checked each time before testing.

Statement of Traceability: *BACL Corp.* attests that all of the calibrations on the equipment items listed above were traceable to NIST or to another internationally recognized National Metrology Institute (NMI), and were compliant with the latest version of A2LA policy P102 "A2LA Policy on Metrological Traceability".

4.7 Test Environmental Conditions

Temperature:	23.1 to 24.1 °C
Relative Humidity:	54.0-56.1 %
ATM Pressure:	101.9 kPa

The testing was performed by Steven Lianto on 2023-07-11 in 5m chamber 3.

4.8 Summary of Test Results

According to the data hereinafter, the EUT complied with the FCC Part 15C and ISEDC RSS-247 standards' radiated emissions limits, and had the worst margin of:

Mode: Transmitting			
Margin (dB)	Frequency (MHz)	Polarization (Horizontal/Vertical)	Mode, Channel
-4.65	25283.437	Horizontal	BLE, 2440MHz

Please refer to the following table and plots for specific test result details

4.9 Radiated Emissions Test Results


Note: Pre-scan was performed in order to determine worst-case orientation of device [shown in Test Setup Photos] with respect to measurement antenna. Plots/data shown represent measurements made in worst-case orientation.

Note: Below results are representative of worst-case cabinet emissions. For full evaluations of various configurations' restricted band compliance, please refer to conducted measurement test report.

Note: Worst-case data rate (determined from highest power measured in conducted report) was chosen for radiated testing in order to cover worst-case results.

1) 30 MHz – 1 GHz Worst Case, Measured at 3 meters

Co-location: Wi-Fi Radio 1 ax20 5180 + Wi-Fi Radio2 ax20 5500 + ble 2440

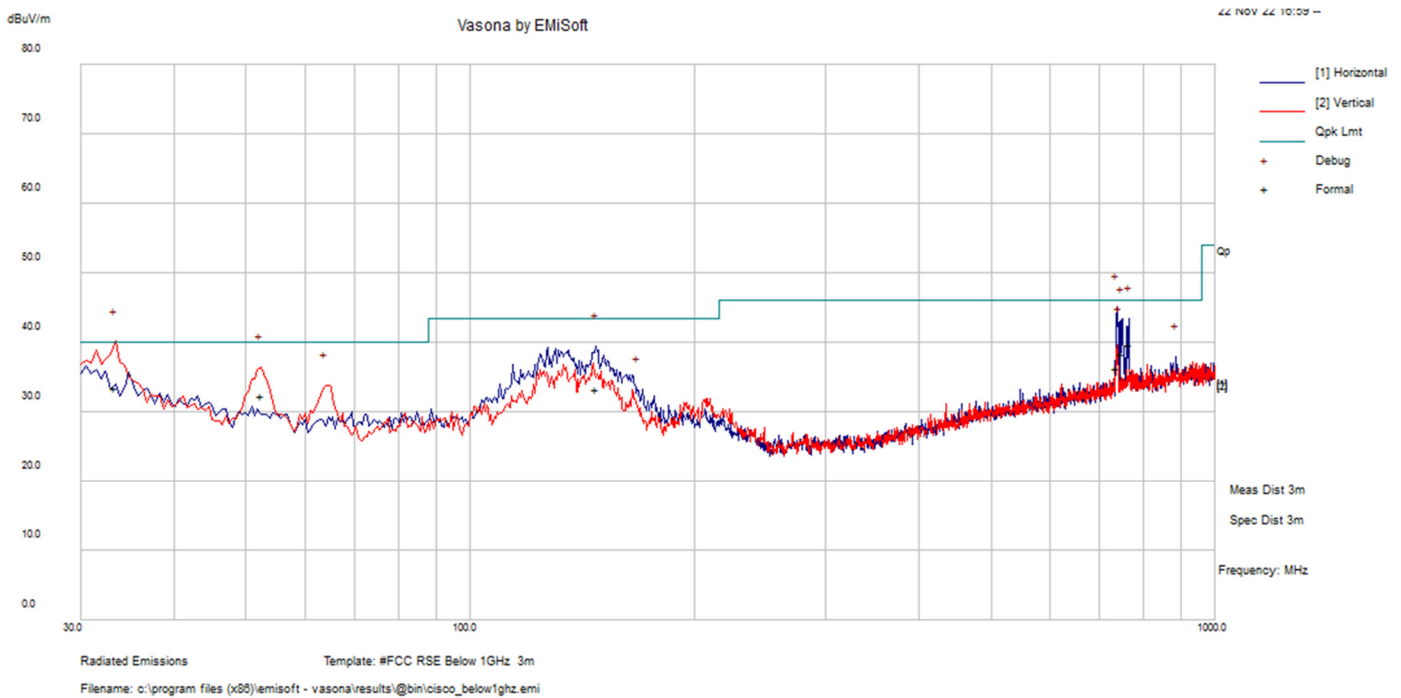

Frequency (MHz)	S.A. Reading (dBuV)	Correction Factor (dB/m)	Corrected Amplitude (dBµV/m)	Antenna Height (cm)	Antenna Polarity (H/V)	Turntable Azimuth (degrees)	Limit (dBµV/m)	Margin (dB)	Comment
33.36575	36.38	-2.87	33.5	210	V	179	40	-6.5	Pass
738.639	34.78	1.61	36.39	127	H	188	46	-9.61	Pass
766.0773	37.69	2.01	39.7	126	H	281	46	-6.3	Pass
749.9893	36.49	1.87	38.36	126	H	47	46	-7.64	Pass
52.5355	45.52	-13.15	32.37	159	V	158	40	-7.63	Pass
147.5393	41.61	-8.41	33.21	166	H	143	43.5	-10.29	Pass

FCC/IC Limits for 1 GHz to 26.5 GHz				
Applicability	(dBm)	(uV/m at 3meters)	(dBuV/m at 3meters)	(dBuV/m at 1meter) ²
Restricted Band Average Limit	-	500	54	64
Restricted Band Peak Limit ¹	-	-	74	84

Note¹: Restricted Band Peak Limit is defined to be 20dB higher than Average Limit.

Note²: Limits at 1 meter are determined by applying a Distance correction factor accounts for extrapolation from 1 meters to 3 meters. Formula used is as follows: $20 \cdot \log(3\text{meters}/1\text{meter}) = 9.54$ (According to ANSI C63.10-2013 Section 9.4)


2) 1–18 GHz Measured at 3 meters

BLE 1Mbps

Frequency (MHz)	S.A. Reading (dBμV)	Turntable Azimuth (degrees)	Test Antenna			Cable Loss (dB)	Pre-Amp. (dB)	Cord. Reading (dBμV/m)	FCC/ISED		Comments
			Height (cm)	Polarity (H/V)	Factor (dB/m)				Limit (dBμV/m)	Margin (dB)	
Low Channel 2402 MHz											
4804	48.280	27	273	H	34.418	7.100	36.071	53.727	74	-20.273	Peak
4804	48.010	39	171	V	34.418	7.100	36.071	53.457	74	-20.543	Peak
4804	35.420	27	273	H	34.418	7.100	36.071	40.867	54	-13.133	Ave
4804	35.500	39	171	V	34.418	7.100	36.071	40.947	54	-13.053	Ave
Middle Channel 2440 MHz											
4880	48.160	128	270	H	34.360	7.290	36.907	52.903	74	-21.097	Peak
4880	47.860	163	169	V	34.360	7.290	36.907	52.603	74	-21.397	Peak
4880	35.100	128	270	H	34.360	7.290	36.907	39.843	54	-14.157	Ave
4880	35.130	163	169	V	34.360	7.290	36.907	39.873	54	-14.127	Ave
High Channel 2480 MHz											
4924	48.160	128	270	H	34.360	7.290	36.907	52.903	74	-21.097	Peak
4924	47.860	163	169	V	34.360	7.290	36.907	52.603	74	-21.397	Peak
4924	35.100	128	270	H	34.360	7.290	36.907	39.843	54	-14.157	Ave
4924	35.130	163	169	V	34.360	7.290	36.907	39.873	54	-14.127	Ave

3) 1 to 18 GHz Worst Case Scan at 1 meter


Co-location: Wi-Fi Radio 1 ax20 5180 + Wi-Fi Radio2 ax20 5500 + ble 2440

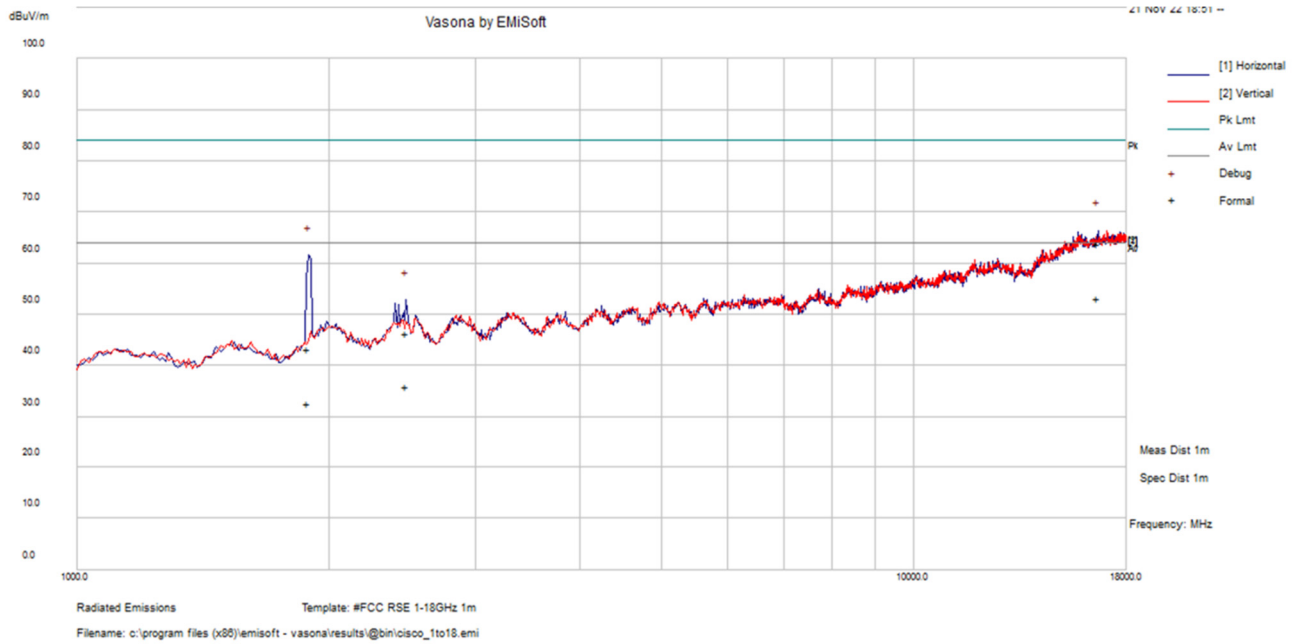

Frequency (MHz)	S.A. Reading (dBuV)	Correction Factor (dB/m)	Corrected Amplitude (dBuV/m)	Antenna Height (cm)	Antenna Polarity (H/V)	Turntable Azimuth (degrees)	Limit (dBuV/m)	Margin (dB)	Comment
16640.365	46.71	17.04	63.75	164	H	252	84	-20.25	Pass
1891.01	47.39	-4.15	43.24	158	H	314	84	-40.76	Pass
2478.695	47.88	-1.53	46.35	217	H	332	84	-37.65	Pass
16640.365	36.2	17.04	53.24	164	H	252	64	-10.76	Pass
1891.01	36.86	-4.15	32.71	158	H	314	64	-31.29	Pass
2478.695	37.49	-1.53	35.95	217	H	332	64	-28.05	Pass

4) 18 – 26.5 GHz Worst Case Scan at 1 Meter

Co-location: Wi-Fi Radio 1 ax20 5180 + Wi-Fi Radio2 ax20 5500 + ble 2440

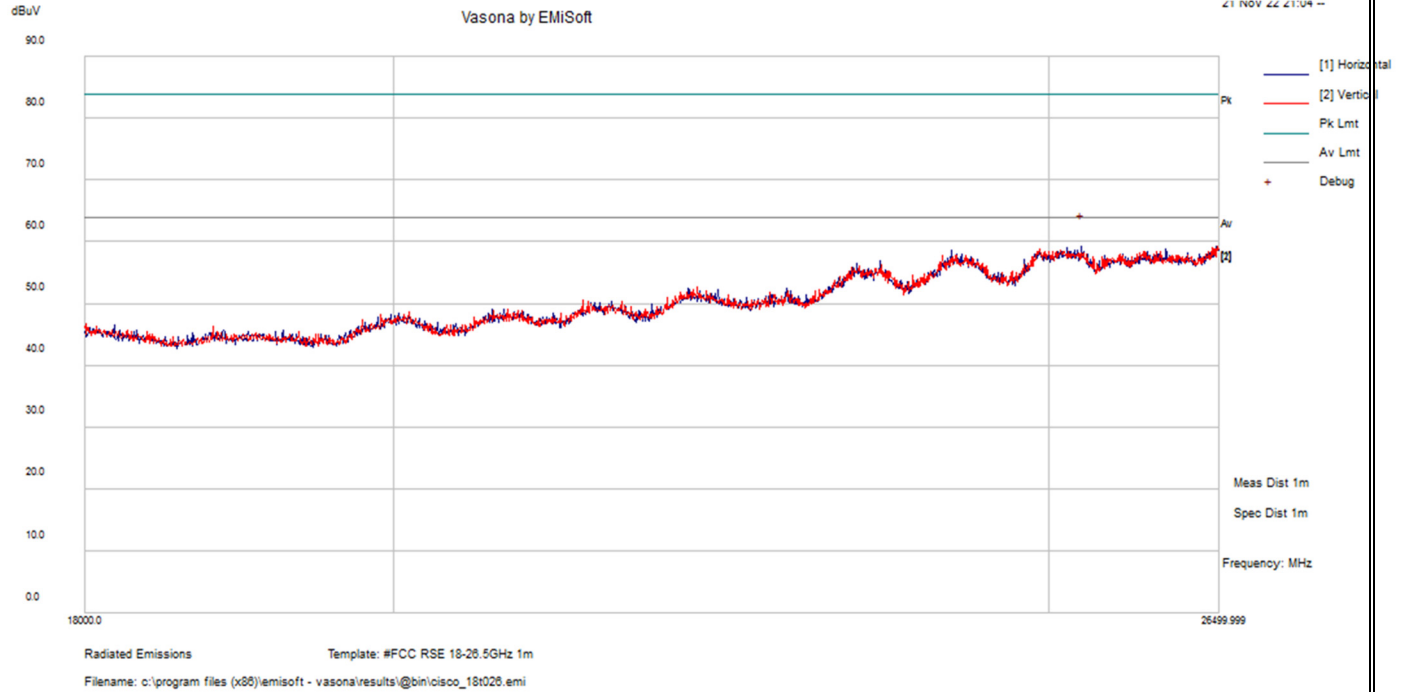

Frequency (MHz)	S.A. Reading (dBµV)	Correction Factor (dB/m)	Corrected Amplitude (dBµV/m)	Antenna Height (cm)	Antenna Polarity (H/V)	Turntable Azimuth (degrees)	Limit (dBµV/m)	Margin (dB)	Comment
25283.437	38.38	20.96	59.35	100	H	0	64	-4.65	Pass

Note: Worst case peak measurement was compared to average limit to show compliance.

5 Annex A (Normative) – A2LA Electrical Testing Certificate



Accredited Laboratory

A2LA has accredited

BAY AREA COMPLIACE LABORATORIES CORP.

Sunnyvale, CA

for technical competence in the field of

Electrical Testing

This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2017 *General requirements for the competence of testing and calibration laboratories*. This laboratory also meets A2LA R222 - Specific Requirements EPA ENERGY STAR Accreditation Program. This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (refer to joint ISO-ILAC-IAF Communiqué dated April 2017).



Presented this 21st day of December 2022.

A handwritten signature in blue ink, appearing to read 'Trace McInturf'.

Mr. Trace McInturf, Vice President, Accreditation Services
 For the Accreditation Council
 Certificate Number 3297.02
 Valid to September 30, 2024

For the tests to which this accreditation applies, please refer to the laboratory's Electrical Scope of Accreditation.

Please follow the web link below for a full ISO 17025 scope

<https://www.a2la.org/scopepdf/3297-02.pdf>

--- END OF REPORT ---