

FCC TEST REPORT (Bluetooth)

REPORT NO.: RF970909H06

MODEL NO.: SPA525G

RECEIVED: Sep. 09, 2008

TESTED: Oct. 03 to 14, 2008

ISSUED: Oct. 16, 2008

APPLICANT: Cisco Systems Inc

ADDRESS: 170 W Tasman Dr, San Jose, CA95134, USA

ISSUED BY: Advance Data Technology Corporation

LAB LOCATION: No. 81-1, Lu Liao Keng, 9 Ling, Wu Lung Tsuen,
Chiung Lin Hsiang, Hsin Chu Hsien,
Taiwan, R.O.C.

This test report consists of 68 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by TAF or any government agencies. The test results in the report only apply to the tested sample.



TABLE OF CONTENTS

1	CERTIFICATION	4
2	SUMMARY OF TEST RESULTS.....	5
2.1	MEASUREMENT UNCERTAINTY	6
3	GENERAL INFORMATION	7
3.1	GENERAL DESCRIPTION OF EUT.....	7
3.2	DESCRIPTION OF TEST MODES.....	9
3.3	TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL:	10
3.4	GENERAL DESCRIPTION OF APPLIED STANDARDS	12
3.5	DESCRIPTION OF SUPPORT UNITS	13
3.6	CONFIGURATION OF SYSTEM UNDER TEST.....	14
4	TEST PROCEDURES AND RESULTS	15
4.1	CONDUCTED EMISSION MEASUREMENT	15
4.1.1	LIMITS OF CONDUCTED EMISSION MEASUREMENT.....	15
4.1.2	TEST INSTRUMENTS.....	15
4.1.3	TEST PROCEDURES	16
4.1.4	TEST SETUP	16
4.1.5	EUT OPERATING CONDITIONS.....	17
4.1.6	TEST RESULTS	18
4.2	NUMBER OF HOPPING FREQUENCY USED	20
4.2.1	LIMIT OF HOPPING FREQUENCY USED.....	20
4.2.2	TEST INSTRUMENTS.....	20
4.2.3	TEST PROCEDURES	20
4.2.4	DEVIATION FROM TEST STANDARD	20
4.2.5	TEST SETUP	21
4.2.6	TEST RESULTS	21
4.3	DWELL TIME ON EACH CHANNEL	23
4.3.1	LIMIT OF DWELL TIME USED	23
4.3.2	TEST INSTRUMENTS.....	23
4.3.3	TEST PROCEDURES	24
4.3.4	DEVIATION FROM TEST STANDARD	24
4.3.5	TEST SETUP	24
4.3.6	TEST RESULTS	25
4.4	CHANNEL BANDWIDTH	29
4.4.1	TEST INSTRUMENTS.....	29
4.4.2	TEST PROCEDURE.....	30
4.4.3	DEVIATION FROM TEST STANDARD	30
4.4.4	TEST SETUP	30
4.4.5	EUT OPERATING CONDITION	30
4.4.6	TEST RESULTS	31
4.5	HOPPING CHANNEL SEPARATION	35
4.5.1	LIMIT OF HOPPING CHANNEL SEPARATION.....	35
4.5.2	TEST INSTRUMENTS.....	35
4.5.3	TEST PROCEDURES	36
4.5.4	DEVIATION FROM TEST STANDARD	36
4.5.5	TEST SETUP	36

4.5.6	TEST RESULTS	37
4.5.7	TEST RESULTS	39
4.6	MAXIMUM PEAK OUTPUT POWER	41
4.6.1	LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT	41
4.6.2	INSTRUMENTS	41
4.6.3	TEST PROCEDURES	42
4.6.4	DEVIATION FROM TEST STANDARD	42
4.6.5	TEST SETUP	43
4.6.6	EUT OPERATING CONDITION	43
4.6.7	TEST RESULTS	44
4.6.8	TEST RESULTS	46
4.7	RADIATED EMISSION MEASUREMENT	48
4.7.1	LIMITS OF RADIATED EMISSION MEASUREMENT	48
4.7.2	TEST INSTRUMENTS.....	49
4.7.3	TEST PROCEDURES	50
4.7.4	DEVIATION FROM TEST STANDARD	50
4.7.5	TEST SETUP	51
4.7.6	TEST RESULTS	52
4.8	BAND EDGES MEASUREMENT.....	59
4.8.1	LIMITS OF BAND EDGES MEASUREMENT	59
4.8.2	TEST INSTRUMENTS.....	59
4.8.3	TEST PROCEDURE.....	59
4.8.4	DEVIATION FROM TEST STANDARD	59
4.8.5	EUT OPERATING CONDITION	59
4.8.6	TEST RESULTS	60
4.9	ANTENNA REQUIREMENT.....	66
4.9.1	STANDARD APPLICABLE.....	66
4.9.2	ANTENNA CONNECTED CONSTRUCTION	66
5	INFORMATION ON THE TESTING LABORATORIES.....	67
6	APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB.....	68



1 CERTIFICATION

PRODUCT : 5-Line IP Phone
BRAND NAME : cisco
MODEL NO. : SPA525G
APPLICANT : Cisco Systems Inc
TESTED DATE : Oct. 03 to 14, 2008
TEST SAMPLE : R&D SAMPLE
STANDARDS : 47 CFR Part 15, Subpart C (Section 15.247),
ANSI C63.4-2003

The above equipment (Model: SPA525G) has been tested by **Advance Data Technology Corporation**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

PREPARED BY : Sunny Wen , **DATE:** Oct. 16, 2008
(Sunny Wen, Specialist)

TECHNICAL ACCEPTANCE : Hank Chung , **DATE:** Oct. 16, 2008
Responsible for RF (Hank Chung, Deputy Manager)

APPROVED BY : May Chen , **DATE:** Oct. 16, 2008
(May Chen, Deputy Manager)

2 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: 47 CFR Part 15, Subpart C			
Standard Section	Test Type and Limit	Result	REMARK
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit Minimum passing margin is -21.25dB at 0.404MHz
15.247(a)(1)(I)-(ii)	Number of Hopping Frequency Used Spec.: At least 15 channels	PASS	Meet the requirement of limit
15.247(a)(1)(ii)	Dwell Time on Each Channel Spec. : Max. 0.4 second within 31.6 second	PASS	Meet the requirement of limit
15.247(a)(1)(I)-(ii)	Hopping Channel Separation Spec. : Min. 25 kHz or two-thirds of 20 dB bandwidth, which ever is greater	PASS	Meet the requirement of limit
15.247(a)(2)	Spectrum Bandwidth of a Frequency Hopping Sequence Spread Spectrum System	PASS	Report reference
15.247(b)	Maximum Peak Output Power Spec.: max. 125mW	PASS	Meet the requirement of limit
15.247(c)	Transmitter Radiated Emissions Spec.: Table 15.209	PASS	Meet the requirement of limit Minimum passing margin is -3.98dB at 67.45MHz
15.247(c)	Band Edge Measurement	PASS	Meet the requirement of limit

2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4:

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

Measurement	Value
Conducted emissions	2.45 dB
Radiated emissions (30MHz-1GHz)	3.83 dB
Radiated emissions (1GHz ~18GHz)	2.28 dB
Radiated emissions (18GHz ~20GHz)	2.51 dB

3 GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

PRODUCT	5-Line IP Phone
MODEL NO.	SPA525G
FCC ID	LDKSBSPA525G01
POWER SUPPLY	DC 5V from power adapter or PoE
MODULATION TYPE	For WLAN : CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM
	For Bluetooth : GPSK, DQPSK, 8DPSK
RADIO TECHNOLOGY	For WLAN : DSSS, OFDM
	For Bluetooth : FHSS
TRANSFER RATE	For WLAN : 802.11b: 11/5.5/2/1Mbps 802.11g: 54/48/36/24/18/12/9/6Mbps
	For Bluetooth : 3/2/1 Mbits/s
FREQUENCY RANGE	For WLAN : 2412MHz ~ 2462MHz
	For Bluetooth : 2402MHz ~ 2480MHz
NUMBER OF CHANNEL	For WLAN : 13
	For Bluetooth : 79
OUTPUT POWER (For WLAN)	802.11b: 98.855mW
	802.11g: 190.108mW
OUTPUT POWER (For Bluetooth)	GPSK: 2.028 mW
	8DPSK: 1.197 mW
ANTENNA TYPE	For WLAN : PIFA antenna with cable (Antenna Gain : 2.7dBi)
	For Bluetooth : PIFA antenna with cable (Antenna Gain : 3.5dBi)
DATA CABLE	NA
I/O PORT	USB Port x 1, Earphone Port x 1, RJ11 Port x 1, PC Port (RJ45) x 1, WAN Port (RJ45) x 1, RJ9 Port x 1
ASSOCIATED DEVICES	Stand

NOTE:

1. The EUT must be supplied with a power adapter as following:

Brand:	Linksys
Model:	PSM11R-050
Input:	AC 100~240V, 0.3A, 50~60Hz
Output:	DC 5V, 2A, 1.8m / unshielded

2. The EUT was pre-tested in chamber under the following modes:

Pre-test Mode	Description
Mode A	Tower-set (Wall-mounted)
Mode B	With stand

From the above modes, the worst case was found in **Mode B**. Therefore only the test data of the modes were recorded in this report.

3. There are Bluetooth technology and WLAN technology used for the EUT. <the WLAN test data please refer "RF970909H06 for WLAN">
4. The above EUT information was declared by the manufacturer and for more detailed features description, please refer to the manufacturer's specifications or User's Manual.

3.2 DESCRIPTION OF TEST MODES

Seventy-nine channels are provided to this EUT.

Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)
0	2402	20	2422	40	2442	60	2462
1	2403	21	2423	41	2443	61	2463
2	2404	22	2424	42	2444	62	2464
3	2405	23	2425	43	2445	63	2465
4	2406	24	2426	44	2446	64	2466
5	2407	25	2427	45	2447	65	2467
6	2408	26	2428	46	2448	66	2468
7	2409	27	2429	47	2449	67	2469
8	2410	28	2430	48	2450	68	2470
9	2411	29	2431	49	2451	69	2471
10	2412	30	2432	50	2452	70	2472
11	2413	31	2433	51	2453	71	2473
12	2414	32	2434	52	2454	72	2474
13	2415	33	2435	53	2455	73	2475
14	2416	34	2436	54	2456	74	2476
15	2417	35	2437	55	2457	75	2477
16	2418	36	2438	56	2458	76	2478
17	2419	37	2439	57	2459	77	2479
18	2420	38	2440	58	2460	78	2480
19	2421	39	2441	59	2461		

3.3 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL:

EUT configure mode	Applicable to				Description
	PLC	RE<1G	RE≥1G	APCM	
-	√	√	√	√	Modulation Type: GFSK, DQPSK, 8DPSK

Where PLC: Power Line Conducted Emission
RE≥1G: Radiated Emission above 1GHz

RE<1G RE: Radiated Emission below 1GHz
APCM: Antenna Port Conducted Measurement

Power Line Conducted Emission Test:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

Available Channel	Tested Channel	Modulation Technology	Modulation Type
0 to 78	78	FHSS	GPSK

Radiated Emission Test (Below 1 GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

Available Channel	Tested Channel	Modulation Technology	Modulation Type
0 to 78	0	FHSS	GPSK

Radiated Emission Test (Above 1 GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

Available Channel	Tested Channel	Modulation Technology	Modulation Type
0 to 78	0, 39, 78	FHSS	GPSK
0 to 78	0, 39, 78	FHSS	8DPSK

Bandedge Measurement:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

Available Channel	Tested Channel	Modulation Technology	Modulation Type
0 to 78	0, 78	FHSS	GPSK
0 to 78	0, 78	FHSS	8DPSK

Antenna Port Conducted Measurement:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

Available Channel	Tested Channel	Modulation Technology	Modulation Type
0 to 78	0, 39, 78	FHSS	GPSK
0 to 78	0, 39, 78	FHSS	8DPSK

3.4 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a 5-Line IP Phone. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart C. (15.247)

ANSI C63.4 : 2003

All test items have been performed and recorded as per the above standards.

NOTE: The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.

3.5 DESCRIPTION OF SUPPORT UNITS


The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	Notebook Computer	DELL	PP05L	CN-04Y212-48643-38 E-0145	DoC
2	Notebook Computer	DELL	PP21L	CN-0GD366-70166-5B 3-09ZX	QDS-BRCM1016
3	32 Button Attendant console	Linksys	SPA932	NA	NA
4	iPod	Apple	A1199	6U6426MTVQS	DoC
5	Earphone	PHILIPS	SBC HL145	8710895759472	NA
6	Earphone	PLANTRONICS	PLANTRONICS 220	NA	NA

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	NA
2	NA
3	NA
4	1 m shielded cable, terminated with USB connector, w/o core.
5	1.2 m wrapped shielded wire, terminated with 3.5mm phone plug via drain wire, w/o core.
6	NA

NOTE: All power cords of the above support units are non-shielded (1.8m).

3.6 CONFIGURATION OF SYSTEM UNDER TEST

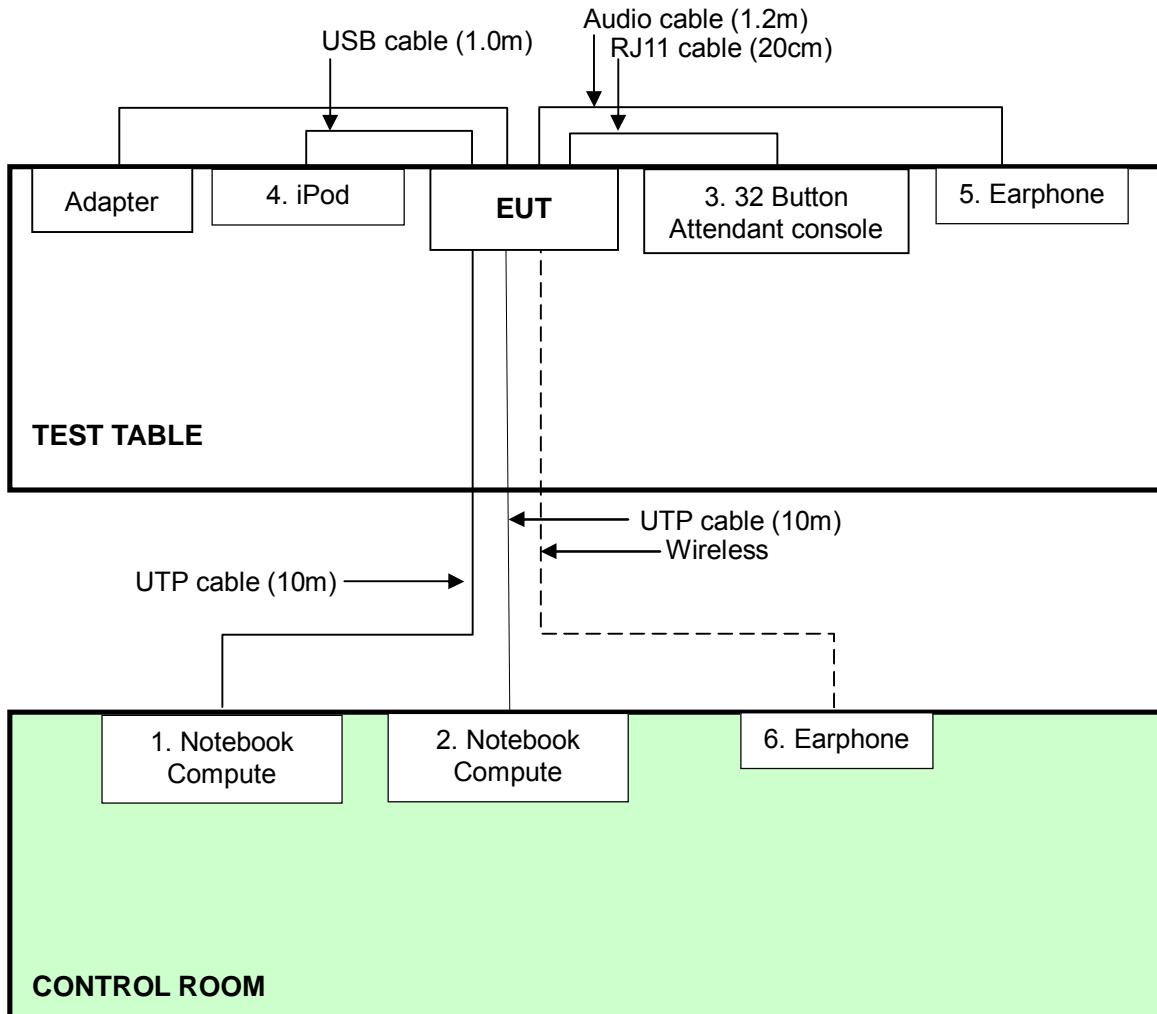

4 TEST PROCEDURES AND RESULTS

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. All emanations from a class B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

4.1.2 TEST INSTRUMENTS


DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATE D DATE	CALIBRATE D UNTIL
ROHDE & SCHWARZ Test Receiver	ESCS 30	100287	Mar. 11, 2008	Mar. 10, 2009
Line-Impedance Stabilization Network (for EUT)	KNW-407	8-1395-12	May 07, 2008	May 06, 2009
Line-Impedance Stabilization Network (for Peripheral)	ENV-216	100072	June 13, 2008	June 12, 2009
RF Cable (JYEBAO)	5DFB	COACAB-001	July 24, 2008	July 23, 2009
50 ohms Terminator	50	3	Nov. 16, 2007	Nov. 15, 2008
Software	ADT_Cond_V7.3.2	NA	NA	NA

- NOTE: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. The test was performed in ADT Shielded Room No. A.
 3. The VCCI Con A Registration No. is C-817.

4.1.3 TEST PROCEDURES

- a. The EUT/HOST was placed 0.4 meters from the conducting wall of the shielded room with EUT/HOST being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT/HOST were checked for maximum conducted interference.
- c. The frequency range from 150 kHz to 30 MHz was searched. Emission levels over 10dB under the prescribed limits could not be reported

4.1.4 TEST SETUP

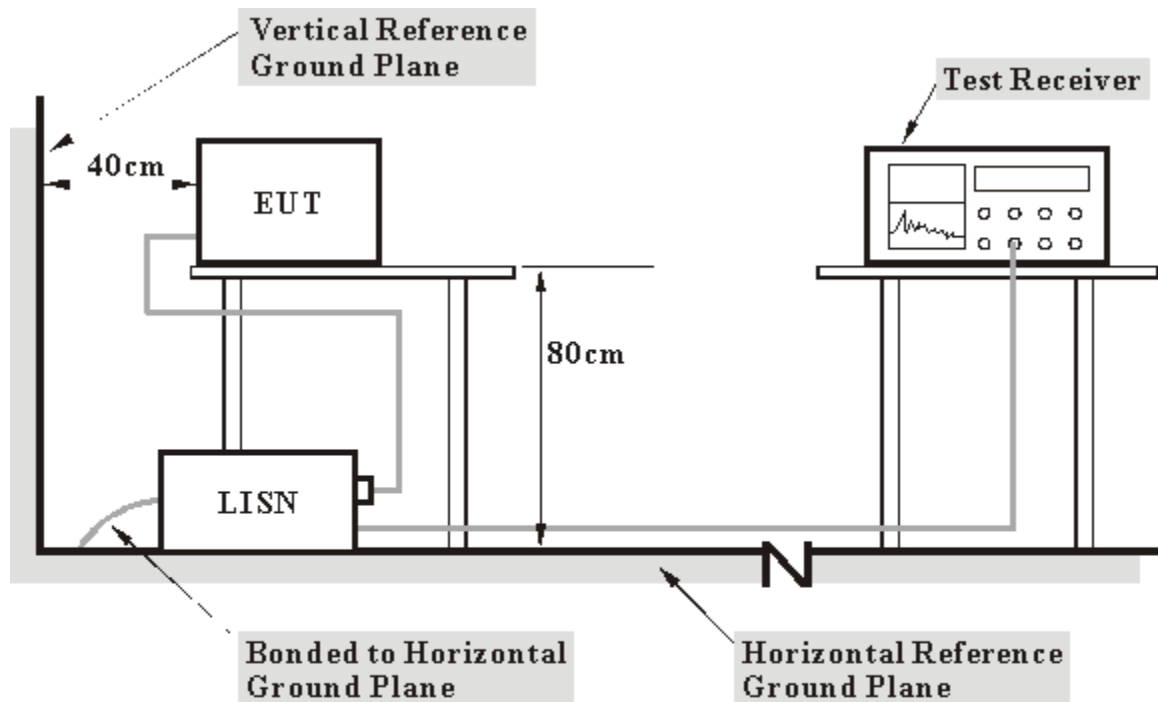

- Note:**
1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.1.5 EUT OPERATING CONDITIONS


- a. Placed the EUT on testing table.
- b. Prepared other computer systems (support units 1~2) to act as communication partners and placed them outside of testing area.
- c. The communication partners run test program “CSR Blue Test3.exe” to enable EUT under transmission/receiving condition continuously at specific channel frequency.

4.1.6 TEST RESULTS

INPUT POWER	120Vac, 60 Hz	6DB BANDWIDTH	9 kHz
ENVIRONMENTAL CONDITIONS	25 deg. C, 60%RH, 959 hPa	PHASE	Line (L)
TESTED BY	Rex Huang		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.201	0.50	33.27	-	33.77	-	63.58	53.58	-29.81	-
2	0.400	0.40	33.57	-	33.97	-	57.85	47.85	-23.88	-
3	0.670	0.43	29.90	-	30.33	-	56.00	46.00	-25.67	-
4	0.927	0.46	28.61	-	29.07	-	56.00	46.00	-26.93	-
5	7.316	0.56	31.65	-	32.21	-	60.00	50.00	-27.79	-
6	13.020	0.66	29.72	-	30.38	-	60.00	50.00	-29.62	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

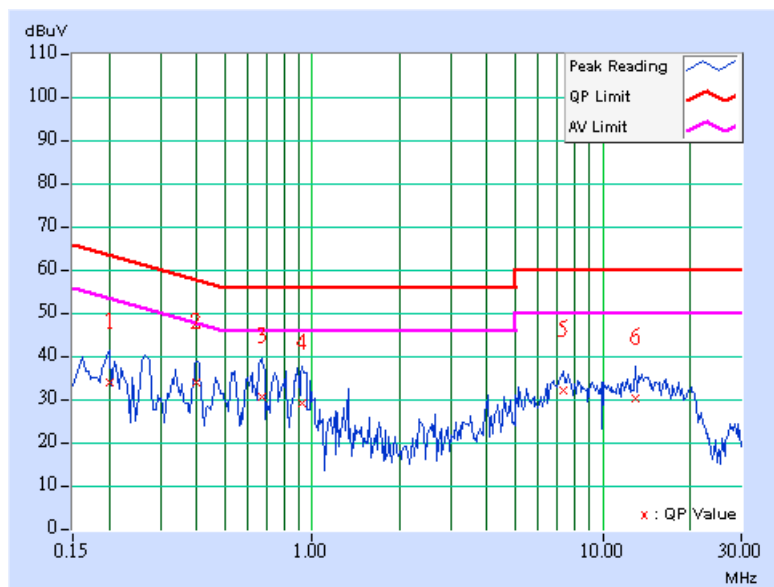

INPUT POWER	120Vac, 60 Hz	6dB BANDWIDTH	9 kHz
ENVIRONMENTAL CONDITIONS	25 deg. C, 60%RH, 959 hPa	PHASE	Neutral (N)
TESTED BY	Rex Huang		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.201	0.25	36.71	-	36.96	-	63.58	53.58	-26.62	-
2	0.404	0.17	36.35	-	36.52	-	57.77	47.77	-21.25	-
3	0.660	0.20	33.75	-	33.95	-	56.00	46.00	-22.05	-
4	0.923	0.22	32.18	-	32.40	-	56.00	46.00	-23.60	-
5	6.691	0.34	36.35	-	36.69	-	60.00	50.00	-23.31	-
6	13.734	0.47	34.17	-	34.64	-	60.00	50.00	-25.36	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

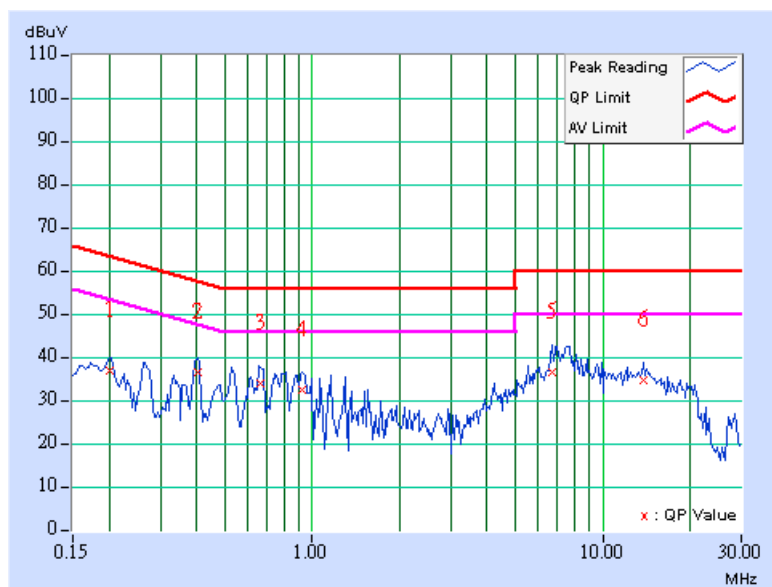

4.2 NUMBER OF HOPPING FREQUENCY USED

4.2.1 LIMIT OF HOPPING FREQUENCY USED

At least 15 hopping frequencies, and should be equally spaced.

4.2.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
R&S SPECTRUM ANALYZER	FSP40	100036	Dec. 18, 2007	Dec. 17, 2008

NOTE:

- 1.The measurement uncertainty is less than +/- 2.6dB, which is calculated as per the NAMAS document NIS81. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.
- 2.The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


4.2.3 TEST PROCEDURES

1. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
2. Turn on the EUT and connect its antenna terminal to measurement via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
3. Set the SA on MaxHold Mode, and then keep the EUT in hopping mode. Record all the signals from each channel until each one has been recorded.
4. Set the SA on View mode and then plot the result on SA screen.
5. Repeat above procedures until all frequencies measured were complete.

4.2.4 DEVIATION FROM TEST STANDARD



No deviation

4.2.5 TEST SETUP

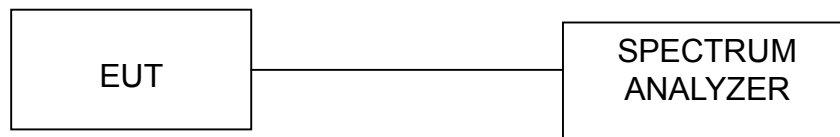

4.2.6 TEST RESULTS

There are 79 hopping frequencies in the hopping mode. Please refer to next pages for the test result. On the plots, it shows that the hopping frequencies are equally spaced.

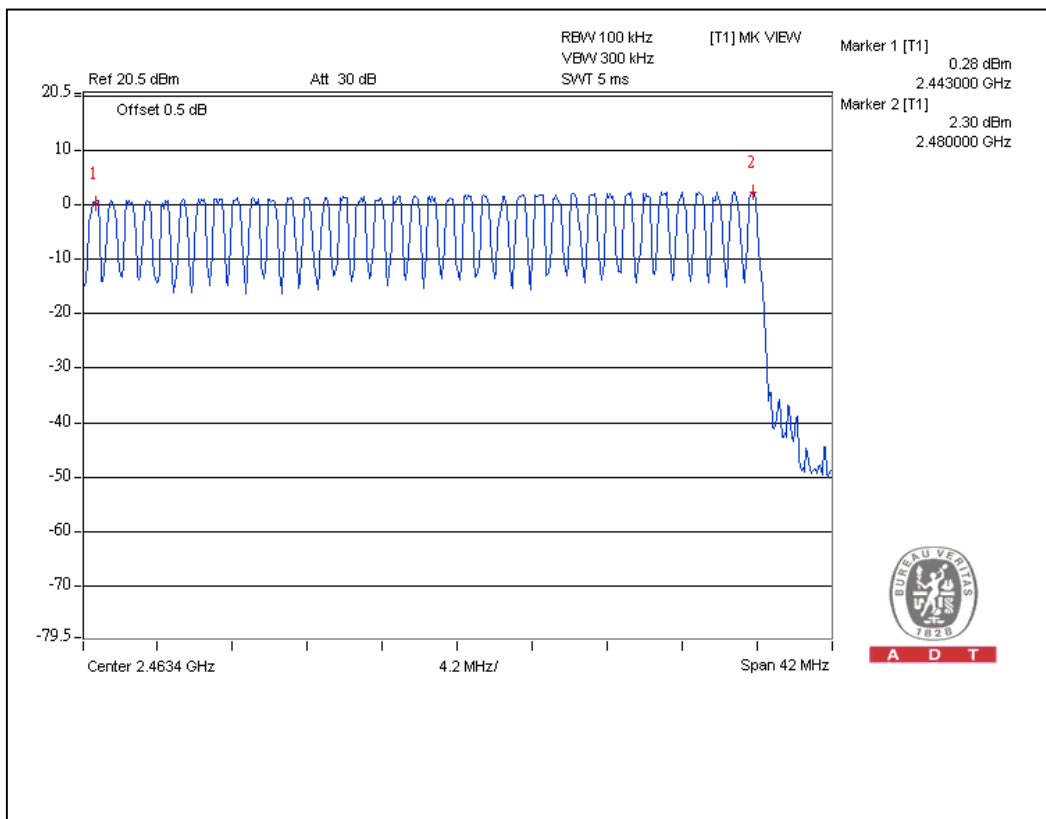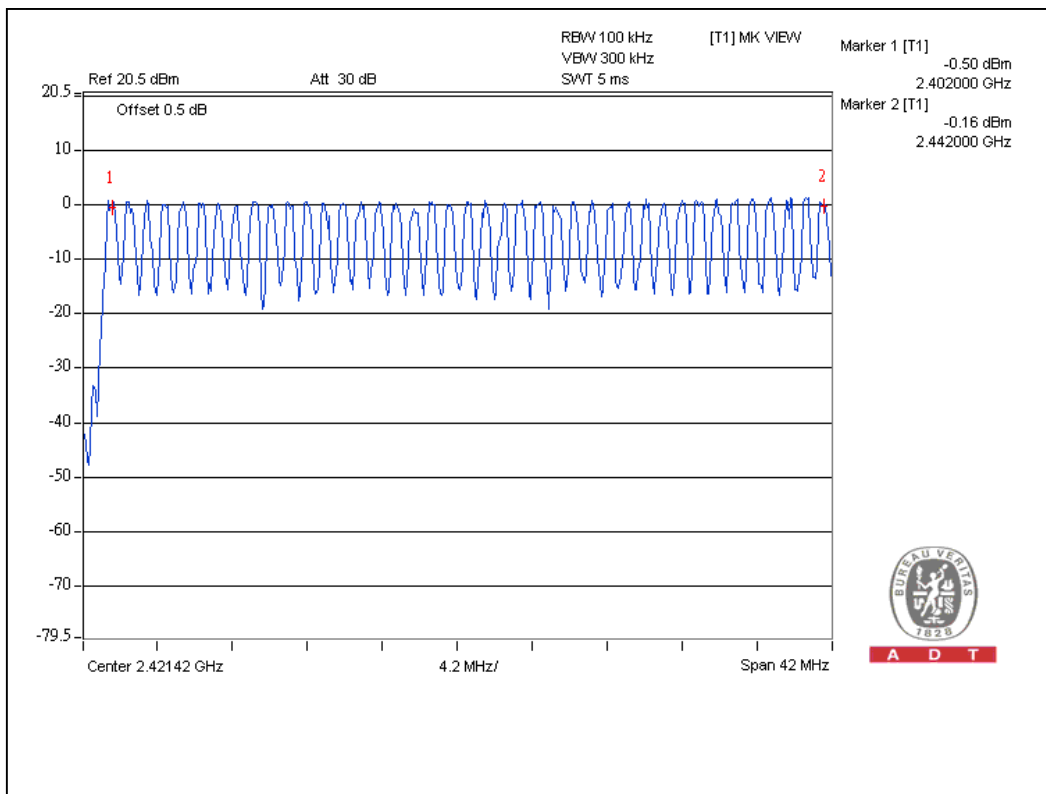

4.3 DWELL TIME ON EACH CHANNEL

4.3.1 LIMIT OF DWELL TIME USED

For FHSS, the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 31.6 second period. For hybrid systems, the average time of occupancy on any frequency should not exceed 0.4 seconds within a time period in seconds equal to the number of hopping frequencies employed multiplied by 0.4.

4.3.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
R&S SPECTRUM ANALYZER	FSP40	100036	Dec. 18, 2007	Dec. 17, 2008

NOTE:

- 1.The measurement uncertainty is less than +/- 2.6dB, which is calculated as per the NAMAS document NIS81. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.
- 2.The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.3.3 TEST PROCEDURES

1. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
2. Turn on the EUT and connect its antenna terminal to measurement via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
3. Adjust the center frequency of SA on any frequency be measured and set SA to zero span mode. And then, set RBW and VBW of spectrum analyzer to proper value.
4. Measure the time duration of one transmission on the measured frequency. And then plot the result with time difference of this time duration.
5. Repeat above procedures until all frequencies measured were complete.

4.3.4 DEVIATION FROM TEST STANDARD

No deviation

4.3.5 TEST SETUP





4.3.6 TEST RESULTS



Mode	Number of transmission in a 31.6 (79Hopping*0.4)	Length of transmission time (msec)	Result (msec)	Limit (msec)
DH1	50 (times / 5 sec) *6.32=316 times	0.45	142.20	400
DH3	25 (times / 5 sec) *6.32=158 times	1.71	270.18	400
DH5	17 (times / 5 sec) *6.32=107.44 times	3.02	324.47	400

Test plots of the transmitting time slot are shown on next page.

DH1

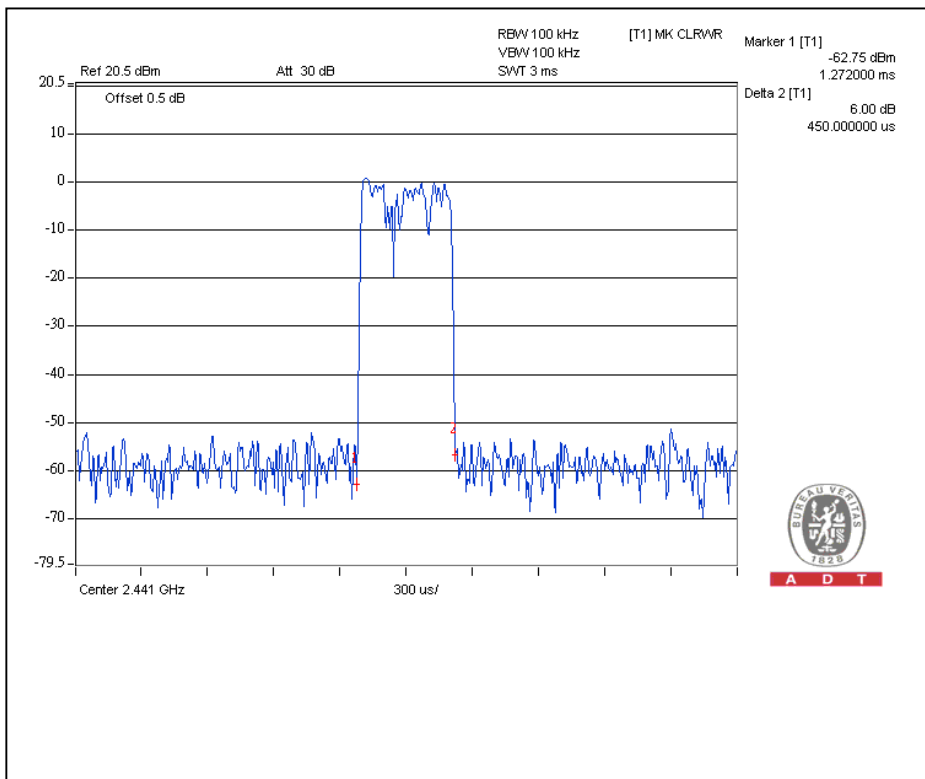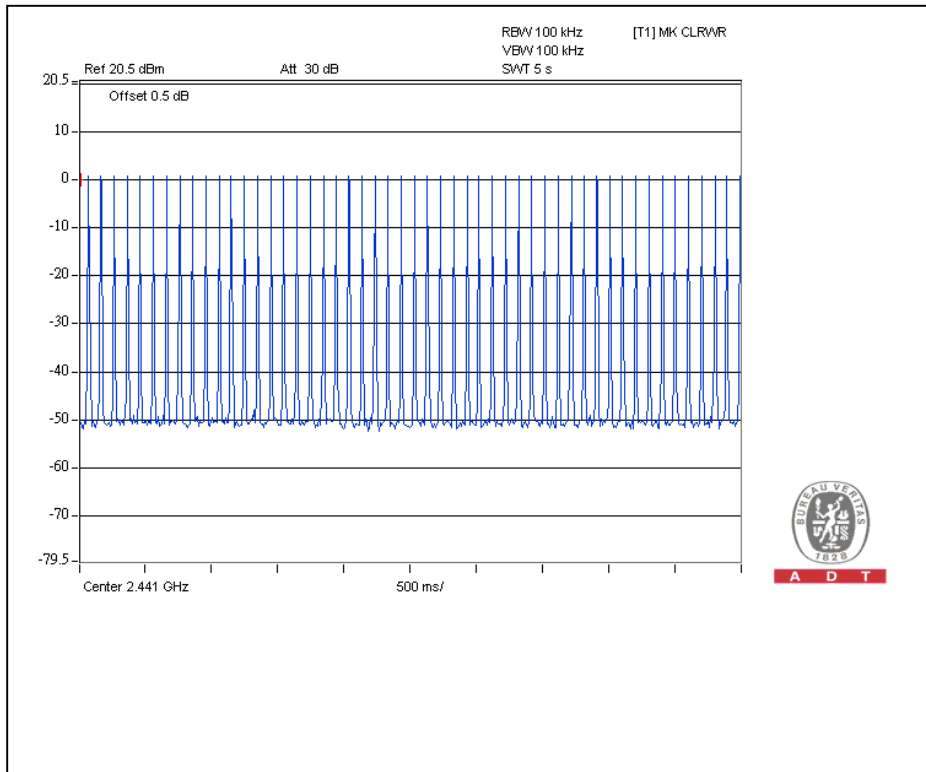

DH3

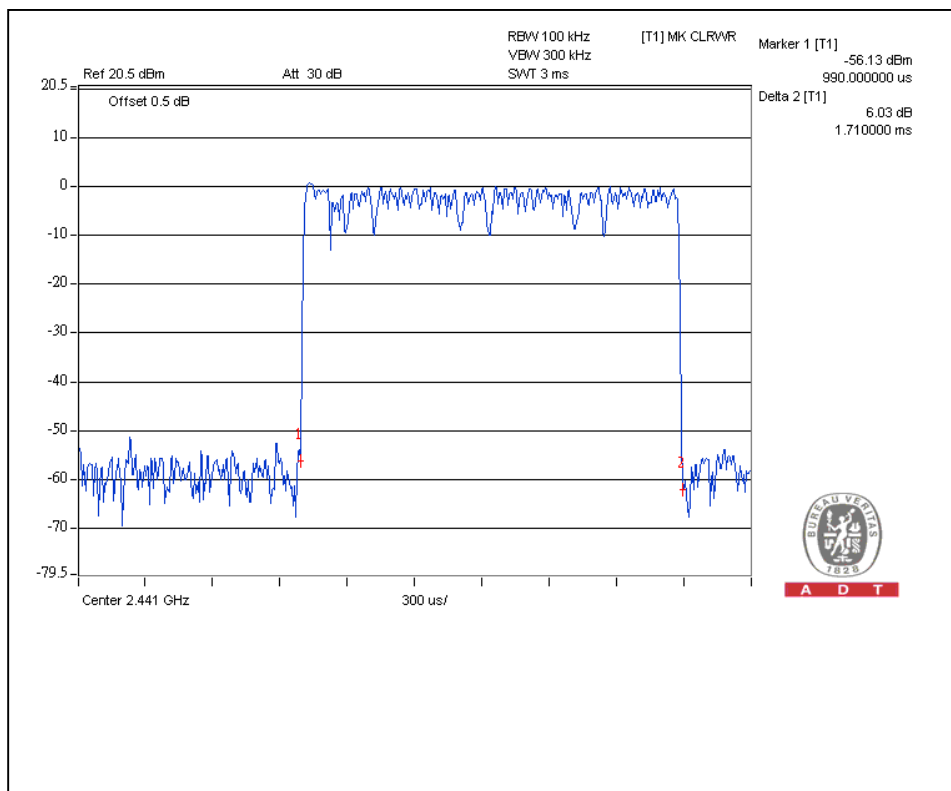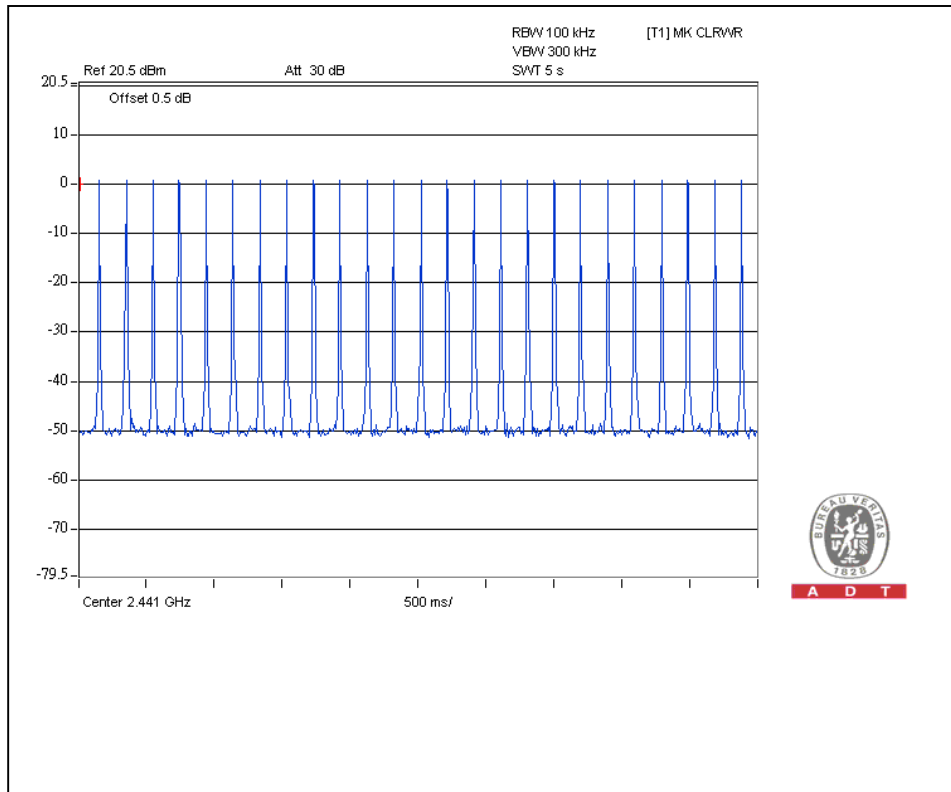

4.4 CHANNEL BANDWIDTH

4.4.1 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
R&S SPECTRUM ANALYZER	FSP40	100036	Dec. 18, 2007	Dec. 17, 2008

NOTE:

- 1.The measurement uncertainty is less than +/- 2.6dB, which is calculated as per the NAMAS document NIS81. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.
- 2.The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


4.4.2 TEST PROCEDURE

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 20dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.

4.4.3 DEVIATION FROM TEST STANDARD

No deviation

4.4.4 TEST SETUP

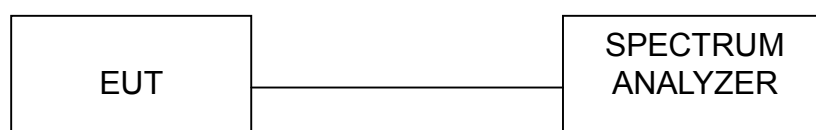

4.4.5 EUT OPERATING CONDITION


The software provided by client enabled the EUT to transmit and receive data at lowest, middle and highest channel frequencies individually.

4.4.6 TEST RESULTS

MODULATION TYPE	GPSK	INPUT POWER	120Vac, 60 Hz
ENVIRONMENTAL CONDITIONS	25deg. C, 60%RH, 959 hPa	TESTED BY	Rex Huang

CHANNEL	CHANNEL FREQUENCY (MHz)	20dB BANDWIDTH (kHz)
0	2402	858
39	2441	882
78	2480	867


Channel 0

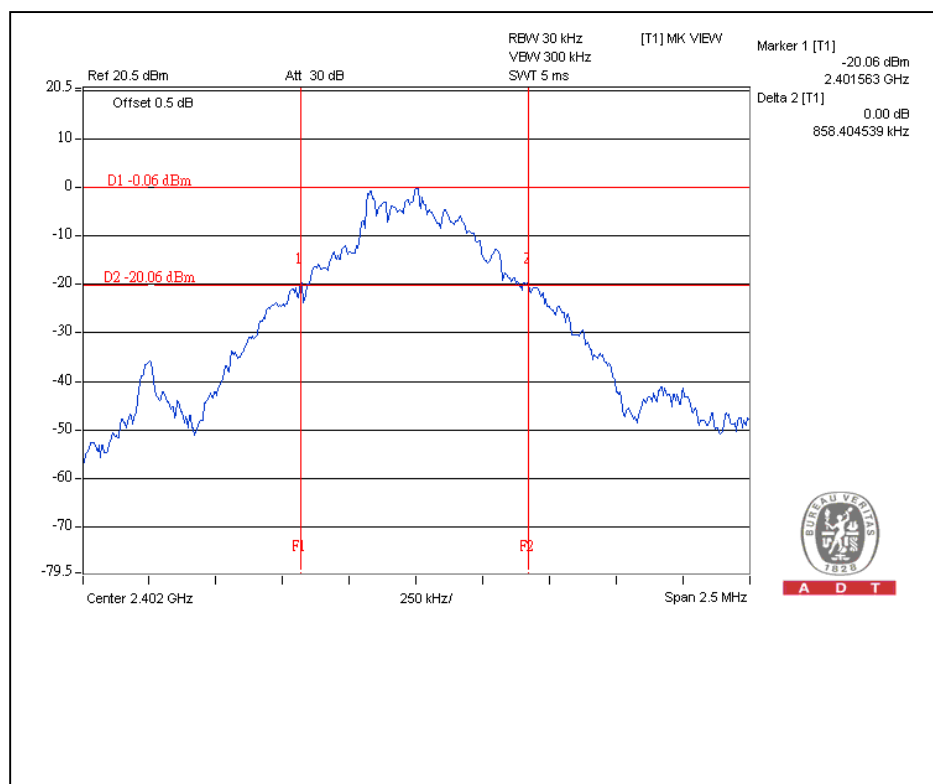

MODULATION TYPE	8DPSK	INPUT POWER	120Vac, 60 Hz
ENVIRONMENTAL CONDITIONS	25deg. C, 60%RH, 959 hPa	TESTED BY	Rex Huang

CHANNEL	CHANNEL FREQUENCY (MHz)	20dB BANDWIDTH (kHz)
0	2402	1270
39	2441	1272
78	2480	1291

Channel 0

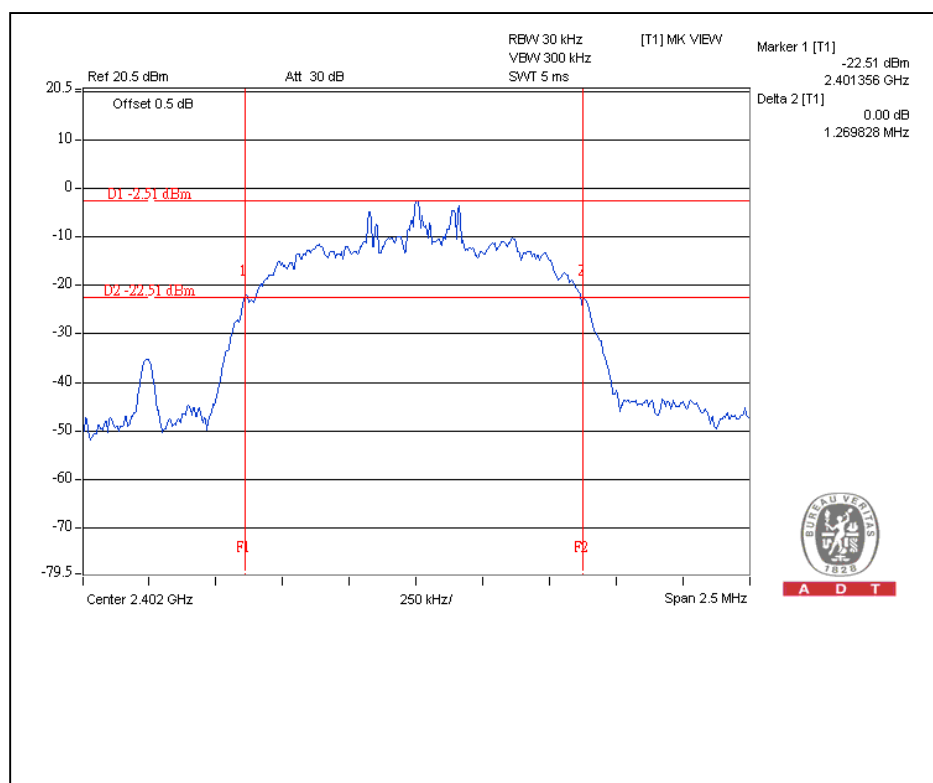

4.5 HOPPING CHANNEL SEPARATION

4.5.1 LIMIT OF HOPPING CHANNEL SEPARATION

At least 25 kHz or two-thirds of 20dB hopping channel bandwidth (whichever is greater).

4.5.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
R&S SPECTRUM ANALYZER	FSP40	100036	Dec. 18, 2007	Dec. 17, 2008

NOTE:

- 1.The measurement uncertainty is less than +/- 2.6dB, which is calculated as per the NAMAS document NIS81. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.
- 2.The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.5.3 TEST PROCEDURES

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range.
3. By using the MaxHold function record the separation of two adjacent channels.
4. Measure the frequency difference of these two adjacent channels by SA MARK function. And then plot the result on SA screen.
5. Repeat above procedures until all frequencies measured were complete.


4.5.4 DEVIATION FROM TEST STANDARD

No deviation


4.5.5 TEST SETUP



Channel 39

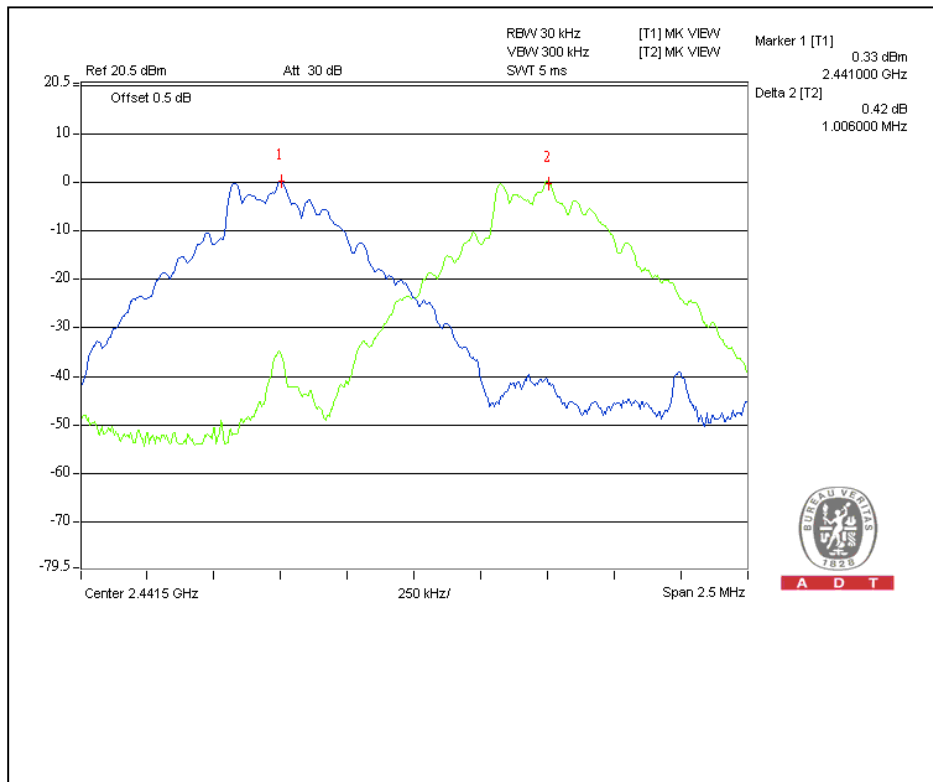

Channel 78

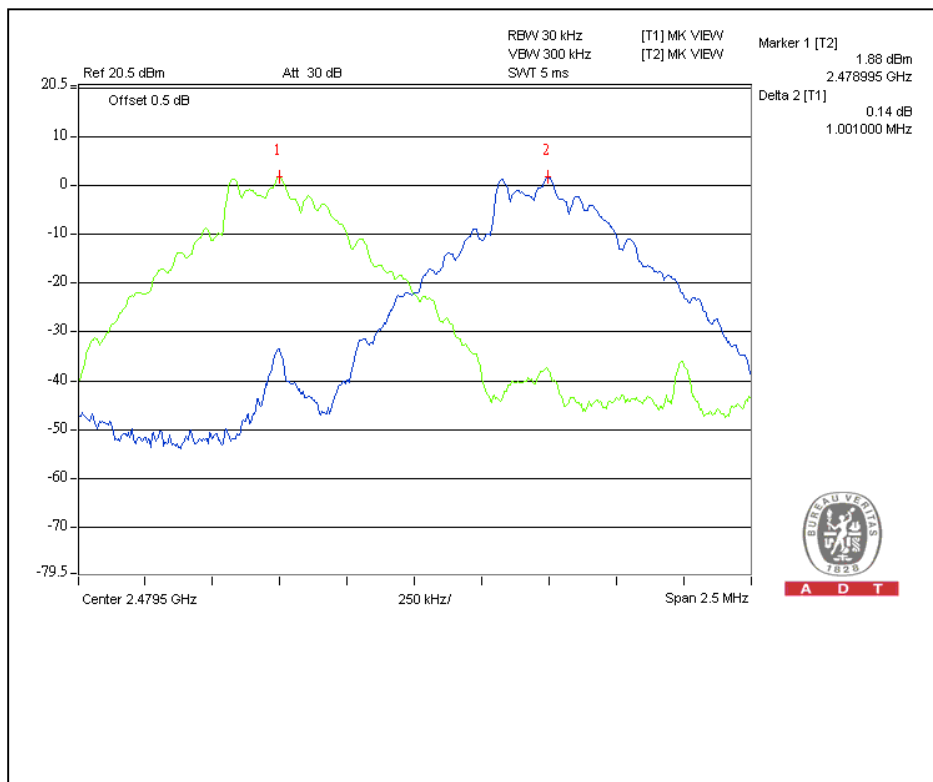

4.6 MAXIMUM PEAK OUTPUT POWER

4.6.1 LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT

The Maximum Peak Output Power Measurement is 125mW.

4.6.2 INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
R&S SPECTRUM ANALYZER	FSP40	100036	Dec. 18, 2007	Dec. 17, 2008

NOTE:

- 1.The measurement uncertainty is less than +/- 2.6dB, which is calculated as per the NAMAS document NIS81. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.
- 2.The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


4.6.3 TEST PROCEDURES

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. The center frequency of the spectrum analyzer is set to the fundamental frequency and using 3 MHz RBW and 3 MHz VBW.
4. Measure the frequency difference of two frequencies that were attenuated 20dB from the reference level. Record the frequency difference as the emission bandwidth.
5. Repeat above procedures until all frequencies measured were complete.

4.6.4 DEVIATION FROM TEST STANDARD

No deviation

4.6.5 TEST SETUP

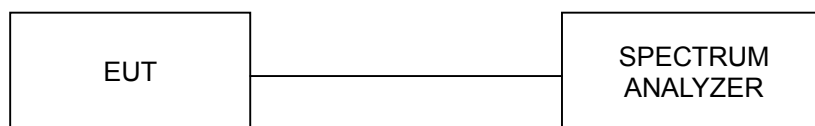

For the actual test configuration, please refer to the related Item – Photographs of the Test Configuration.

4.6.6 EUT OPERATING CONDITION


The software provided by client enabled the EUT to transmit and receive data at lowest, middle and highest channel frequencies individually.

4.6.7 TEST RESULTS


MODULATION TYPE	GPSK	INPUT POWER	120Vac, 60 Hz
ENVIRONMENTAL CONDITIONS	25deg. C, 60%RH, 959 hPa	TESTED BY	Rex Huang

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (mW)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (mW)	PASS/FAIL
0	2402	1.276	1.06	125	PASS
39	2441	1.409	1.49	125	PASS
78	2480	2.028	3.07	125	PASS


Channel 0

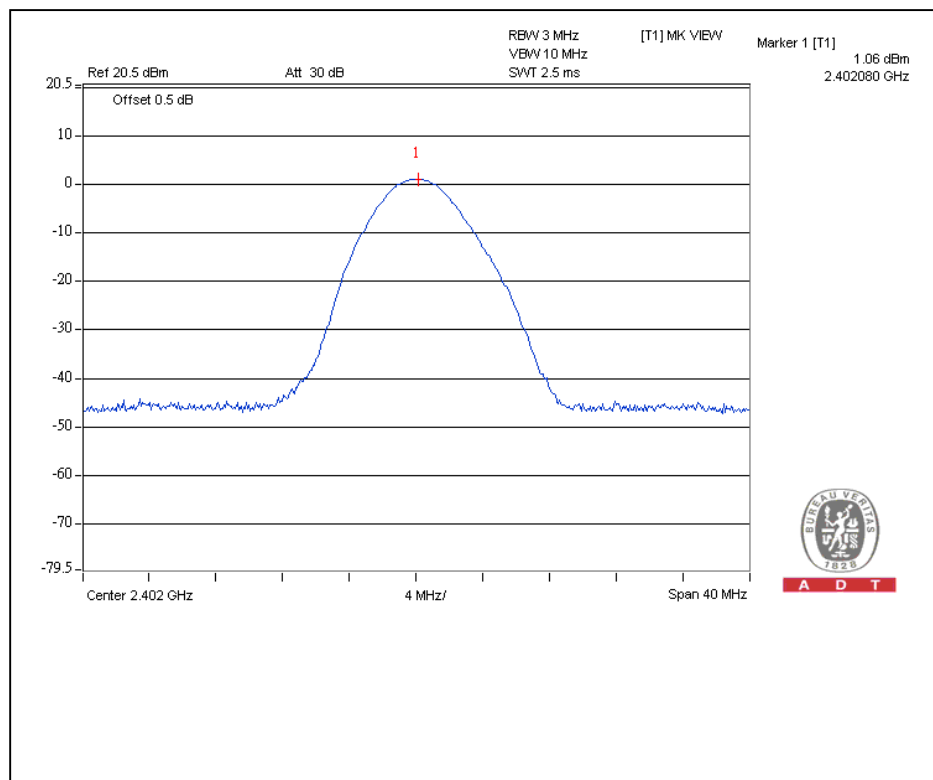

Channel 39

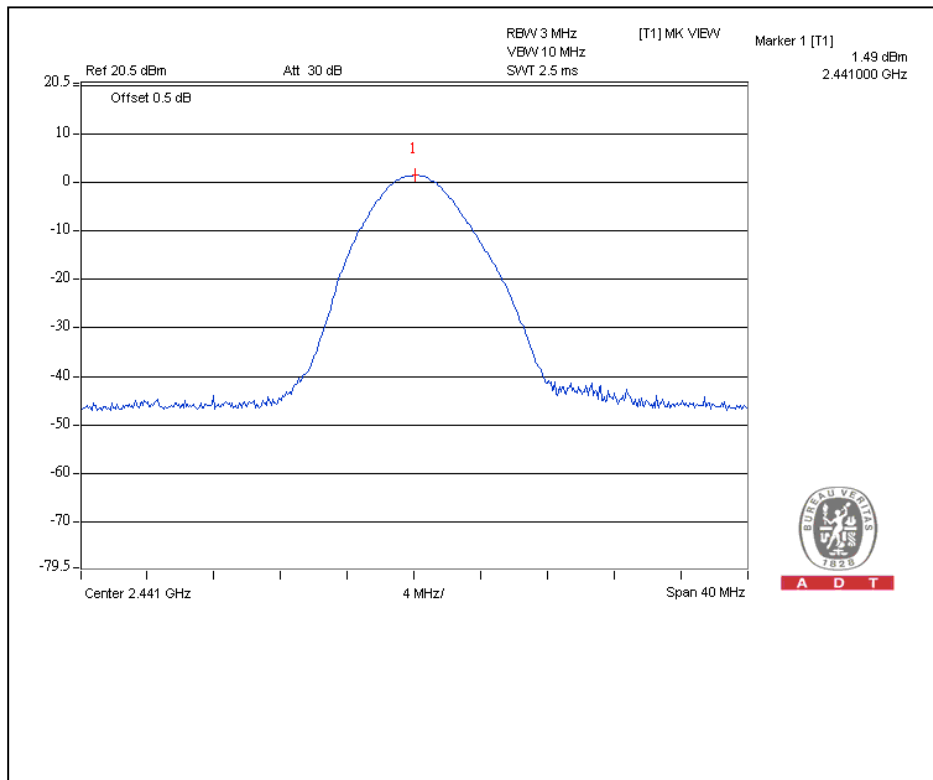

Channel 78

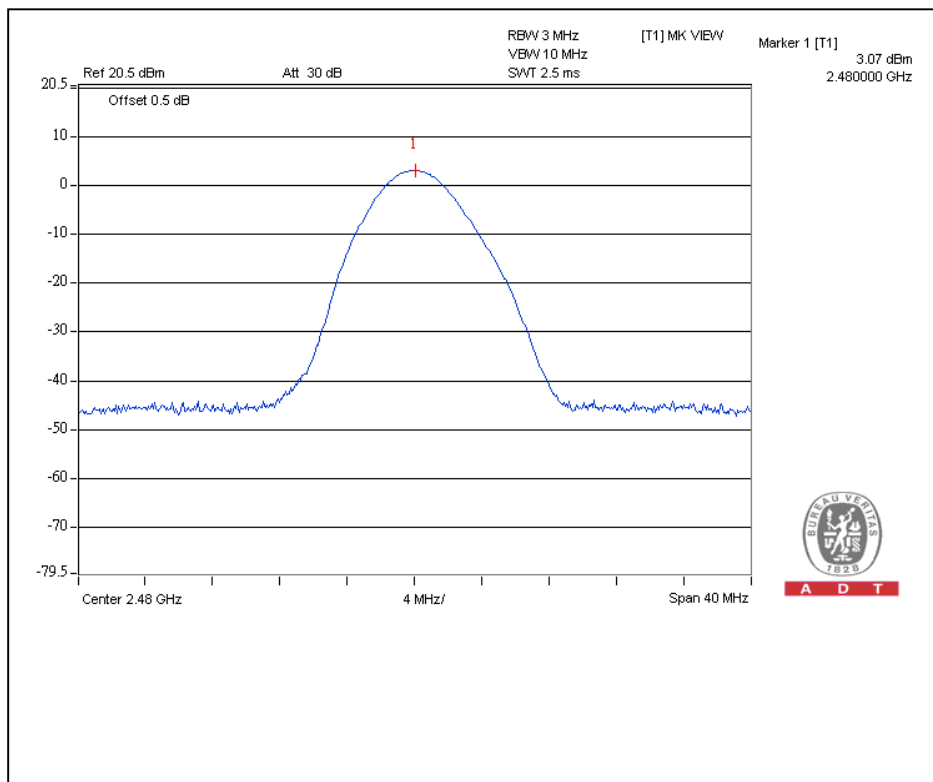


4.6.8 TEST RESULTS


MODULATION TYPE	8DPSK	INPUT POWER	120Vac, 60 Hz
ENVIRONMENTAL CONDITIONS	25deg. C, 60%RH, 959 hPa	TESTED BY	Rex Huang

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (mW)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (mW)	PASS/FAIL
0	2402	0.826	-0.83	125	PASS
39	2441	0.867	-0.62	125	PASS
78	2480	1.197	0.78	125	PASS


Channel 0

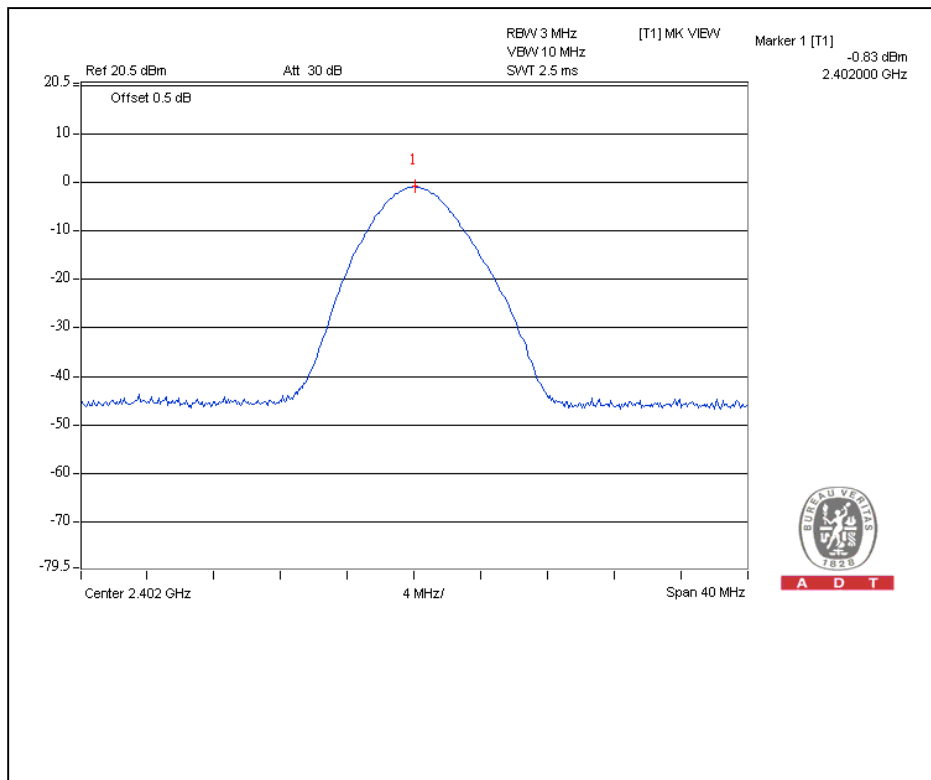

Channel 39

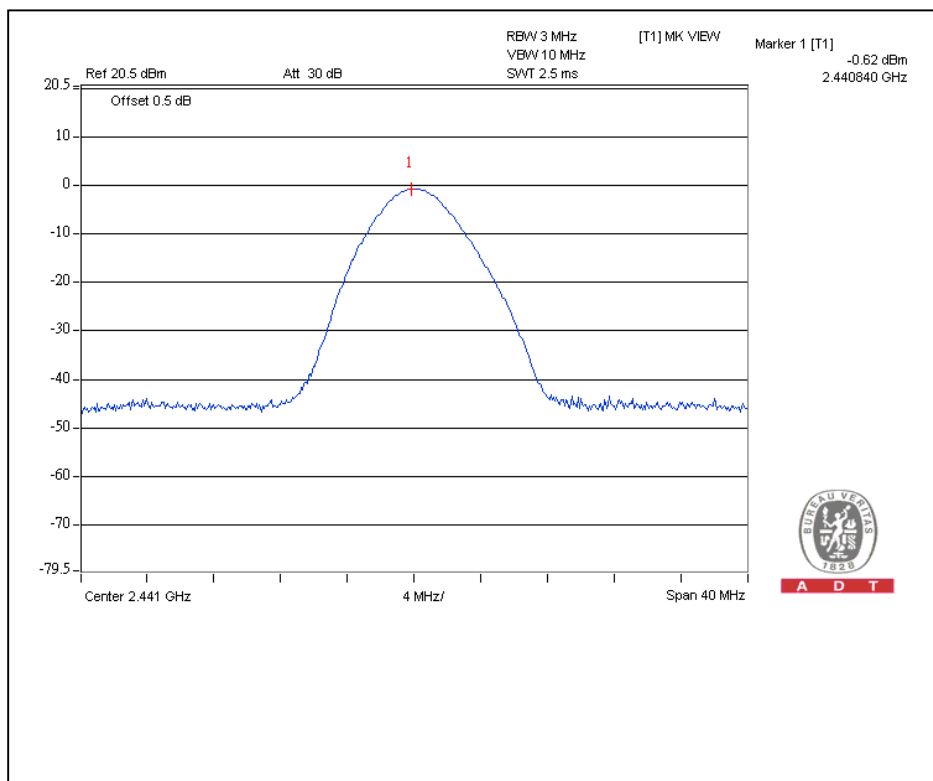

Channel 78

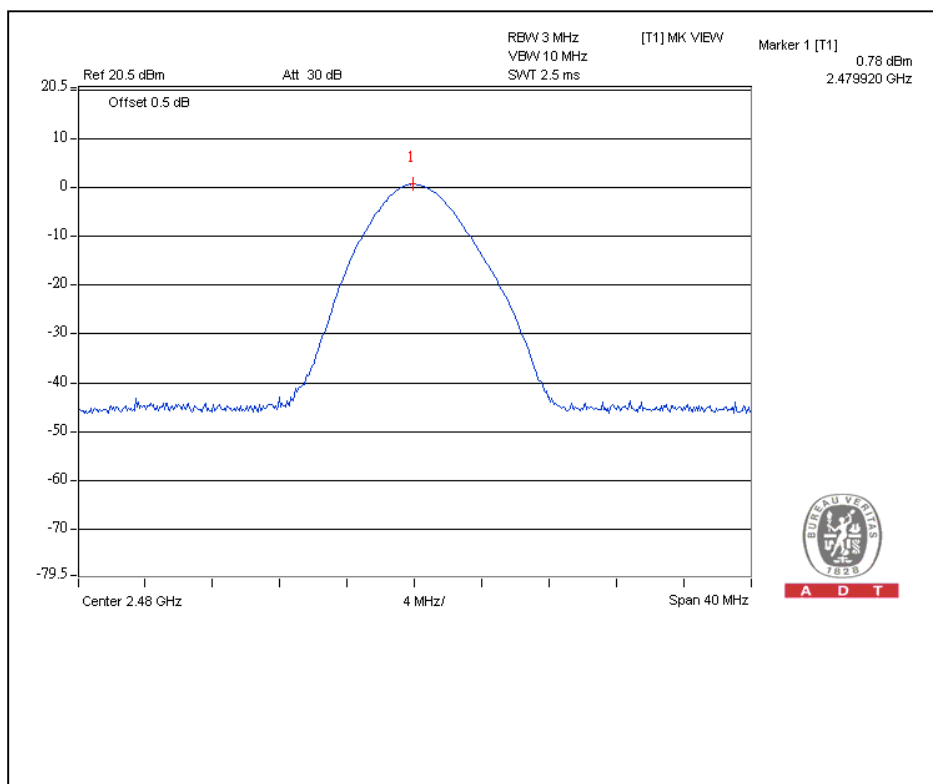

4.7 RADIATED EMISSION MEASUREMENT

4.7.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

Frequencies (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

4.7.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
ADVANTEST Spectrum Analyzer	R3271A	85060311	July 22, 2008	July 21, 2009
HP Pre_Amplifier	8449B	3008A01922	Sep. 25, 2008	Sep. 24, 2009
ROHDE & SCHWARZ Test Receiver	ESCS 30	841977/002	Nov. 13, 2007	Nov. 12, 2008
SCHAFFNER(CHASE) Broadband Antenna	CBL6112B	2798	April 30, 2008	April 29, 2009
Schwarzbeck Horn_Antenna	BBHA9120-D1	D123	Sep. 30, 2008	Sep. 29, 2009
Schwarzbeck Horn_Antenna	BBHA 9170	BBHA9170153	Jan. 28, 2008	Jan. 27, 2009
RF Switches	MP59B	6100175593	Aug. 11, 2008	Aug. 10, 2009
RF Cable	8DFB	STBCAB-30M-1GHz	Sep. 02, 2008	Sep. 01, 2009
Software	ADT_Radiated_V7.6.15.8	NA	NA	NA
CHANCE MOST Antenna Tower	AT-100	CM-A007	NA	NA
CHANCE MOST Turn Table	TC-008	CM-T007	NA	NA
CORCOM AC Filter	MRI2030	024/019	NA	NA

- Note: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The horn antenna, HP preamplifier (model: 8449B) and Spectrum Analyzer (model: R3271A) are used only for the measurement of emission frequency above 1GHz if tested.
3. The test was performed in ADT Open Site No. B.
4. The VCCI Site Registration No. is R-847.
5. The FCC Site Registration No. is 92753.
6. The CANADA Site Registration No. is IC 3789C-2.

4.7.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10 dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10 dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.


NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Peak detection (PK) and Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth is 1MHz and video bandwidth of test receiver/spectrum analyzer is 3MHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 10 Hz for Average detection (AV) at frequency above 1GHz.

4.7.4 DEVIATION FROM TEST STANDARD

No deviation

4.7.5 TEST SETUP

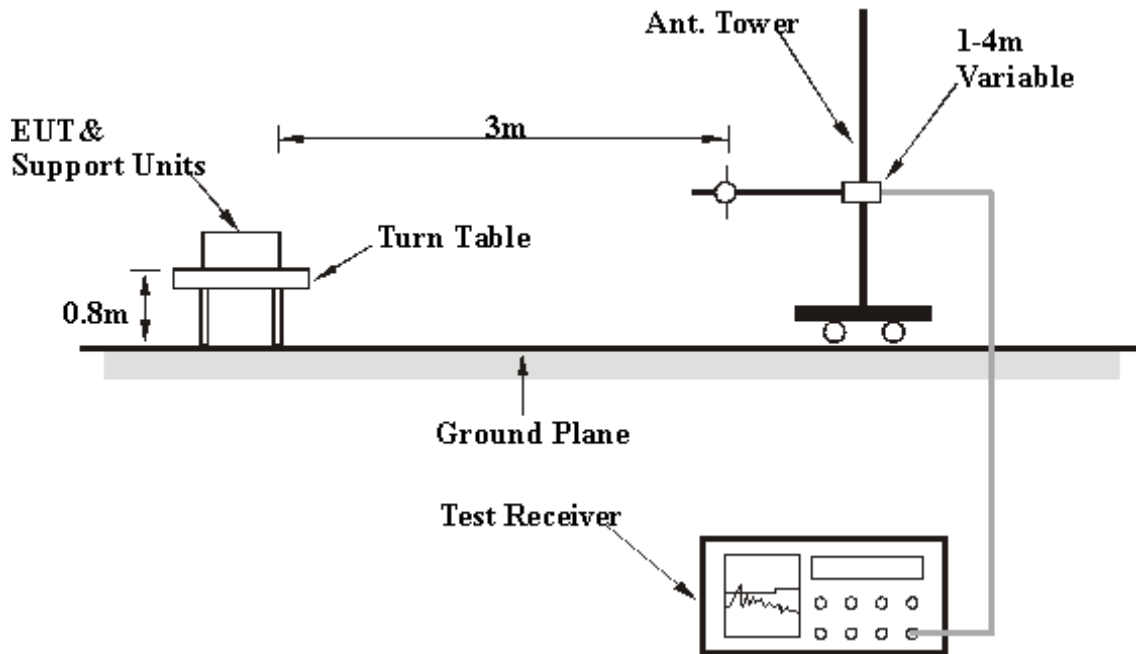

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.7.6 TEST RESULTS

BELOW 1GHz WORST-CASE DATA : GFSK MODULATION

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 0	FREQUENCY RANGE	Below 1000MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	27deg. C, 70%RH 959hPa	TESTED BY	Phoenix Huang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	71.12	32.15 QP	40.00	-7.85	2.99 H	142	19.31	12.84
2	111.58	27.48 QP	43.50	-16.02	1.66 H	265	15.07	12.41
3	200.00	28.24 QP	43.50	-15.26	1.33 H	249	15.26	12.98
4	250.00	41.24 QP	46.00	-4.76	1.00 H	255	25.82	15.42
5	300.00	34.11 QP	46.00	-11.89	1.00 H	305	17.09	17.02
6	375.00	38.46 QP	46.00	-7.54	1.00 H	22	18.36	20.10
7	500.00	38.42 QP	46.00	-7.58	1.60 H	25	15.76	22.66
8	725.00	36.24 QP	46.00	-9.76	1.16 H	251	8.49	27.75
9	800.00	36.42 QP	46.00	-9.58	1.00 H	45	6.48	29.94
10	825.00	35.02 QP	46.00	-10.98	1.00 H	325	4.83	30.19
11	875.00	34.61 QP	46.00	-11.39	1.00 H	264	3.89	30.72
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	67.45	36.02 QP	40.00	-3.98	1.00 V	313	22.71	13.31
2	120.00	35.24 QP	43.50	-8.26	1.00 V	347	21.41	13.83
3	125.00	31.28 QP	43.50	-12.22	1.00 V	29	17.16	14.12
4	137.51	34.89 QP	43.50	-8.61	1.00 V	236	20.05	14.84
5	200.00	31.96 QP	43.50	-11.54	1.00 V	175	18.98	12.98
6	250.00	33.99 QP	46.00	-12.01	1.00 V	153	18.57	15.42
7	375.00	36.58 QP	46.00	-9.42	1.00 V	26	16.48	20.10
8	500.00	33.36 QP	46.00	-12.64	1.00 V	145	10.70	22.66
9	700.00	31.12 QP	46.00	-14.88	1.42 V	305	4.08	27.04
10	825.00	35.02 QP	46.00	-10.98	1.20 V	8	4.83	30.19
11	875.00	37.12 QP	46.00	-8.88	1.00 V	87	6.40	30.72
12	975.00	41.21 QP	54.00	-12.79	1.00 V	135	8.97	32.24

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.

GFSK MODULATION

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 0	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 60%RH 959hPa	TESTED BY	Rex Huang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2386.16	55.36 PK	74.00	-18.35	1.51 H	188	25.63	30.02
2	2386.16	25.36 AV	54.00	-28.35	1.51 H	188	-4.37	30.02
3	*2402.00	99.46 PK			1.51 H	188	69.38	30.08
4	*2402.00	69.46 AV			1.51 H	188	39.38	30.08
5	4804.00	48.76 PK	74.00	-25.24	1.26 H	88	13.33	35.43
6	4804.00	18.76 AV	54.00	-35.24	1.26 H	88	-16.67	35.43
7	7206.00	51.56 PK	74.00	-22.44	1.17 H	93	10.57	40.99
8	7206.00	21.56 AV	54.00	-32.44	1.17 H	93	-19.43	40.99
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2386.16	55.65 PK	74.00	-18.35	1.40 V	283	25.63	30.02
2	2386.16	25.65 AV	54.00	-28.35	1.40 V	283	-4.37	30.02
3	*2402.00	99.30 PK			1.40 V	283	69.22	30.08
4	*2402.00	69.30 AV			1.40 V	283	39.22	30.08
5	4804.00	48.37 PK	74.00	-25.63	1.05 V	17	12.94	35.43
6	4804.00	18.37 AV	54.00	-35.63	1.05 V	17	-17.06	35.43
7	7206.00	50.54 PK	74.00	-23.46	1.33 V	40	9.55	40.99
8	7206.00	20.54 AV	54.00	-33.46	1.33 V	40	-20.45	40.99

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.
 6. The DH5 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon bluetooth theory the transmitter is on 0.625 * 5 per 296.25 ms per channel. Therefore, the duty cycle correlation factor be equal to: $20\log(3.125 / 100) = -30.1$ dB.
 7. Average value = peak reading + $20\log(\text{duty cycle})$.

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 39	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 60%RH 959hPa	TESTED BY	Rex Huang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2441.00	101.61 PK			1.51 H	9	71.38	30.23
2	*2441.00	71.61 AV			1.51 H	9	41.38	30.23
3	4882.00	49.21 PK	74.00	-24.79	1.18 H	126	13.57	35.64
4	4882.00	19.21 AV	54.00	-34.79	1.18 H	126	-16.43	35.64
5	7323.00	51.25 PK	74.00	-22.75	1.23 H	137	9.96	41.29
6	7323.00	21.25 AV	54.00	-32.75	1.23 H	137	-20.04	41.29
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2441.00	99.67 PK			1.40 V	283	69.44	30.23
2	*2441.00	69.67 AV			1.40 V	283	39.44	30.23
3	4882.00	48.05 PK	74.00	-25.95	1.15 V	23	12.41	35.64
4	4882.00	18.05 AV	54.00	-35.95	1.15 V	23	-17.59	35.64
5	7323.00	50.50 PK	74.00	-23.50	1.17 V	36	9.21	41.29
6	7323.00	20.50 AV	54.00	-33.50	1.17 V	36	-20.79	41.29

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.
 6. The DH5 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon bluetooth theory the transmitter is on 0.625 * 5 per 296.25 ms per channel. Therefore, the duty cycle correlation factor be equal to: $20\log(3.125 / 100) = -30.1$ dB.
 7. Average value = peak reading + $20\log(\text{duty cycle})$.

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 78	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 60%RH 959hPa	TESTED BY	Rex Huang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2480.00	99.50 PK			1.35 H	6	69.12	30.38
2	*2480.00	69.50 AV			1.35 H	6	39.12	30.38
3	2483.50	62.05 PK	74.00	-11.95	1.35 H	6	31.65	30.40
4	2483.50	32.05 AV	54.00	-21.95	1.35 H	6	1.65	30.40
5	4960.00	48.74 PK	74.00	-25.26	1.31 H	114	12.91	35.83
6	4960.00	18.74 AV	54.00	-35.26	1.31 H	114	-17.09	35.83
7	7440.00	51.56 PK	74.00	-22.44	1.21 H	103	9.97	41.59
8	7440.00	21.56 AV	54.00	-32.44	1.21 H	103	-20.03	41.59

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2480.00	99.18 PK			1.37 V	284	68.80	30.38
2	*2480.00	69.18 AV			1.37 V	284	38.80	30.38
3	2483.50	61.34 PK	74.00	-12.66	1.38 V	284	30.94	30.40
4	2483.50	31.34 AV	54.00	-22.66	1.38 V	284	0.94	30.40
5	4960.00	48.31 PK	74.00	-25.69	1.05 V	20	12.48	35.83
6	4960.00	18.31 AV	54.00	-35.69	1.05 V	20	-17.52	35.83
7	7440.00	51.55 PK	74.00	-22.45	1.07 V	29	9.96	41.59
8	7440.00	21.55 AV	54.00	-32.45	1.07 V	29	-20.04	41.59

- REMARKS:**
- Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 - Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 - The other emission levels were very low against the limit.
 - Margin value = Emission level – Limit value.
 - * * *: Fundamental frequency.
 - The DH5 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon bluetooth theory the transmitter is on 0.625 * 5 per 296.25 ms per channel. Therefore, the duty cycle correlation factor be equal to: $20\log(3.125 / 100) = -30.1$ dB.
 - Average value = peak reading + $20\log(\text{duty cycle})$.

8DPSK MODULATION

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 0	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 60%RH 959hPa	TESTED BY	Rex Huang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2386.00	55.85 PK	74.00	-18.15	1.50 H	8	25.83	30.02
2	2386.00	25.85 AV	54.00	-28.15	1.50 H	8	-4.17	30.02
3	*2402.00	97.93 PK			1.50 H	8	67.85	30.08
4	*2402.00	67.93 AV			1.50 H	8	37.85	30.08
5	4804.00	47.17 PK	74.00	-26.83	1.30 H	19	11.74	35.43
6	4804.00	17.17 AV	54.00	-36.83	1.30 H	19	-18.26	35.43
7	7206.00	51.27 PK	74.00	-22.73	1.37 H	28	10.28	40.99
8	7206.00	21.27 AV	54.00	-32.73	1.37 H	28	-19.72	40.99
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2386.16	56.16 PK	74.00	-17.84	1.41 V	127	26.14	30.02
2	2386.16	26.16 AV	54.00	-27.84	1.41 V	127	-3.86	30.02
3	*2402.00	96.62 PK			1.41 V	127	66.54	30.08
4	*2402.00	66.62 AV			1.41 V	127	36.54	30.08
5	4804.00	47.22 PK	74.00	-26.78	1.27 V	108	11.79	35.43
6	4804.00	17.22 AV	54.00	-36.78	1.27 V	108	-18.21	35.43
7	7206.00	51.36 PK	74.00	-22.64	1.22 V	113	10.37	40.99
8	7206.00	21.36 AV	54.00	-32.64	1.22 V	113	-19.63	40.99

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.
 6. The DH5 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon bluetooth theory the transmitter is on 0.625 * 5 per 296.25 ms per channel. Therefore, the duty cycle correlation factor be equal to: $20\log(3.125 / 100) = -30.1$ dB.
 7. Average value = peak reading + $20\log(\text{duty cycle})$.

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 39	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 60%RH 959hPa	TESTED BY	Rex Huang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2441.00	97.65 PK			1.71 H	6	67.42	30.23
2	*2441.00	67.65 AV			1.71 H	6	37.42	30.23
3	4882.00	46.93 PK	74.00	-27.07	1.55 H	29	11.29	35.64
4	4882.00	16.93 AV	54.00	-37.07	1.55 H	29	-18.71	35.64
5	7323.00	51.00 PK	74.00	-23.00	1.47 H	36	9.71	41.29
6	7323.00	21.00 AV	54.00	-33.00	1.47 H	36	-20.29	41.29
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2441.00	97.22 PK			1.65 V	280	66.99	30.23
2	*2441.00	67.22 AV			1.65 V	280	36.99	30.23
3	4882.00	47.03 PK	74.00	-26.97	1.29 V	339	11.39	35.64
4	4882.00	17.03 AV	54.00	-36.97	1.29 V	339	-18.61	35.64
5	7323.00	51.09 PK	74.00	-22.91	1.22 V	342	9.80	41.29
6	7323.00	21.09 AV	54.00	-32.91	1.22 V	342	-20.20	41.29

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.
 6. The DH5 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon bluetooth theory the transmitter is on 0.625 * 5 per 296.25 ms per channel. Therefore, the duty cycle correlation factor be equal to: $20\log(3.125 / 100) = -30.1$ dB.
 7. Average value = peak reading + $20\log(\text{duty cycle})$.

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 78	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 60%RH 959hPa	TESTED BY	Rex Huang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2480.00	97.06 PK			1.50 H	89	66.68	30.38
2	*2480.00	67.06 AV			1.50 H	89	36.68	30.38
3	2483.50	59.35 PK	74.00	-14.65	1.50 H	89	28.95	30.40
4	2483.50	29.35 AV	54.00	-24.65	1.50 H	89	-1.05	30.40
5	4960.00	47.12 PK	74.00	-26.88	1.45 H	9	11.29	35.83
6	4960.00	17.12 AV	54.00	-36.88	1.45 H	9	-18.71	35.83
7	7440.00	51.14 PK	74.00	-22.86	1.38 H	17	9.55	41.59
8	7440.00	21.14 AV	54.00	-32.86	1.38 H	17	-20.45	41.59

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2480.00	96.74 PK			1.39 V	287	66.36	30.38
2	*2480.00	66.74 AV			1.39 V	287	36.36	30.38
3	2483.50	59.89 PK	74.00	-14.11	1.39 V	287	29.49	30.40
4	2483.50	29.89 AV	54.00	-24.11	1.39 V	287	-0.51	30.40
5	4960.00	47.17 PK	74.00	-26.83	1.31 V	342	11.34	35.83
6	4960.00	17.17 AV	54.00	-36.83	1.31 V	342	-18.66	35.83
7	7440.00	51.23 PK	74.00	-22.77	1.28 V	293	9.64	41.59
8	7440.00	21.23 AV	54.00	-32.77	1.28 V	293	-20.36	41.59

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.
 6. The DH5 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon bluetooth theory the transmitter is on 0.625 * 5 per 296.25 ms per channel. Therefore, the duty cycle correlation factor be equal to: $20\log(3.125 / 100) = -30.1$ dB.
 7. Average value = peak reading + 20log(duty cycle).

4.8 BAND EDGES MEASUREMENT

4.8.1 LIMITS OF BAND EDGES MEASUREMENT

Below -20dB of the highest emission level of operating band (in 100KHz RBW).

4.8.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
R&S SPECTRUM ANALYZER	FSP40	100036	Dec. 18, 2007	Dec. 17, 2008

NOTE:

- 1.The measurement uncertainty is less than +/- 2.6dB, which is calculated as per the NAMAS document NIS81. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.
- 2.The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.8.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer via a low lose cable. Set RBW a of spectrum analyzer to 100 kHz and VBW of spectrum analyzer to 300 kHz with suitable frequency span including 100 MHz bandwidth from band edge. The band edges was measured and recorded.

4.8.4 DEVIATION FROM TEST STANDARD

No deviation

4.8.5 EUT OPERATING CONDITION

The software provided by client enabled the EUT to transmit and receive data at lowest, middle and highest channel frequencies individually.

4.8.6 TEST RESULTS

The spectrum plots are attached on the following 2 pages. D2 line indicates the highest level, D1 line indicates the 20dB offset below D2. It shows compliance with the requirement in part 15.247(C).

Note - The delta method is only used up to 2 MHz away from the restricted bandage, The radiated emissions which located in other restricted frequency band, the result, please refer to 4.2.

For GFSK MODULATION TYPE:

NOTE (Peak):

The band edge emission plot on the following first page show 52.08dB delta between carrier maximum power and local maximum emission in restrict band (2.3900GHz). The emission of carrier strength list in the test result of channel 0 at the item 4.7 is 99.46dBuV/m, so the maximum field strength in restrict band is $99.46 - 52.08 = 47.38$ dBuV/m which is under 74 dBuV/m limit.

The band edge emission plot on the following first page shows 53.94dB delta between carrier maximum power and local maximum emission in restrict band (2.4835GHz). The emission of carrier strength list in the test result of channel 78 at the item 4.7 is 99.50dBuV/m, so the maximum field strength in restrict band is $99.50 - 53.94 = 45.56$ dBuV/m which is under 74 dBuV/m limit.

NOTE (Average):


Average value = $47.38 - 30.00 = 17.38$ dBuV/m, which is under 54 dBuV/m limit.

*The DH5 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon bluetooth theory the transmitter is on $0.625 * 5$ per 296.25 ms per channel. Therefore, the duty cycle be equal to: $20\log(3.125/100) = -30$ dB. Average value = peak reading - 30.00.


Average value = $45.56 - 30.00 = 15.56$ dBuV/m, which is under 54 dBuV/m limit.

*The DH5 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon bluetooth theory the transmitter is on $0.625 * 5$ per 296.25 ms per channel. Therefore, the duty cycle be equal to: $20\log(3.125/100) = -30$ dB. Average value = peak reading - 30.00.


CH0

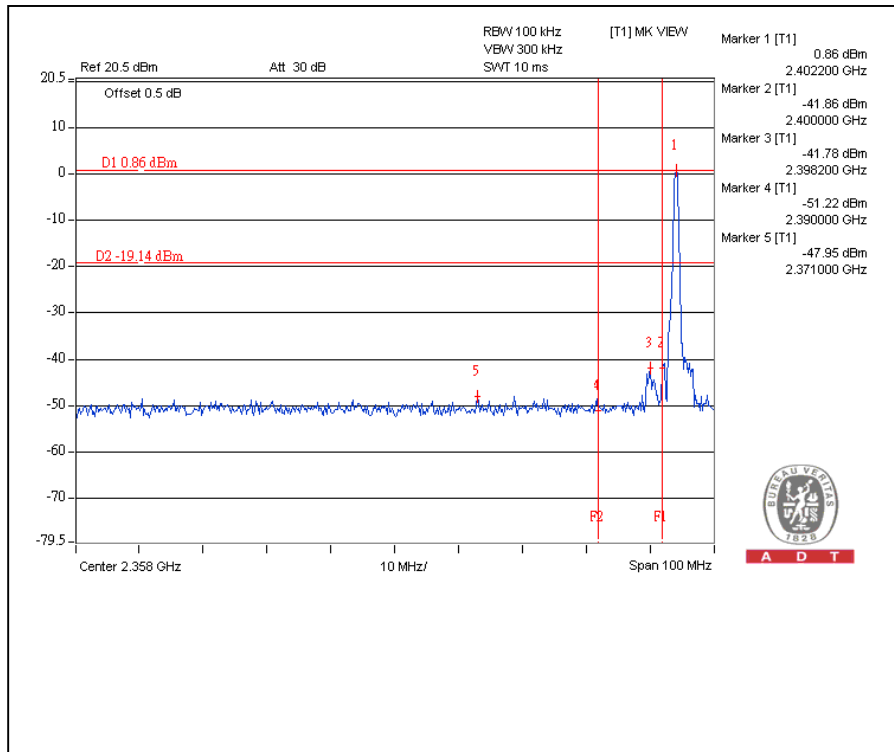


CH78

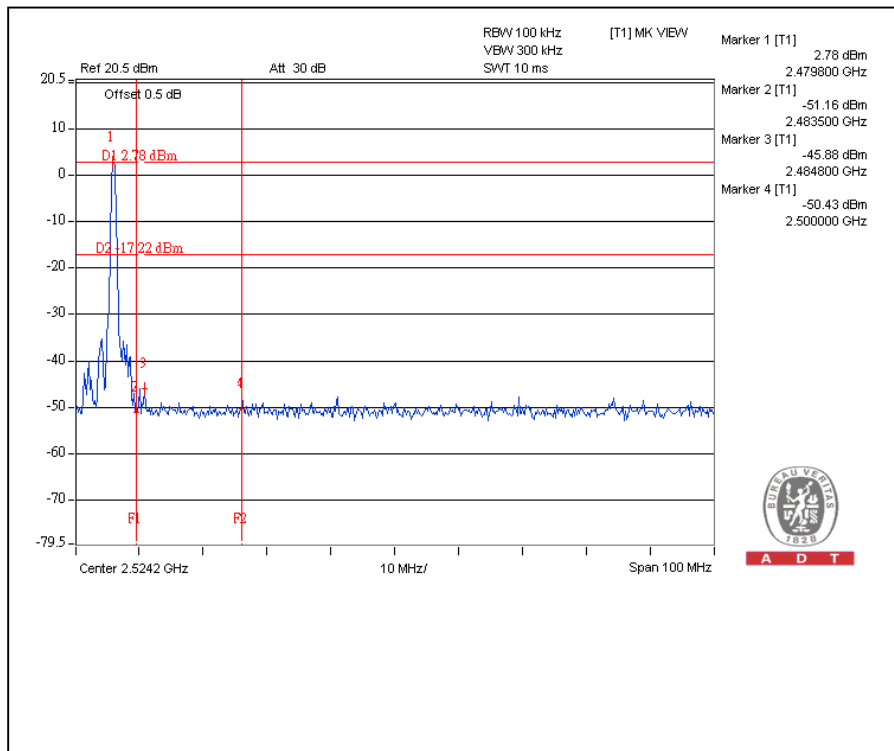

CH0

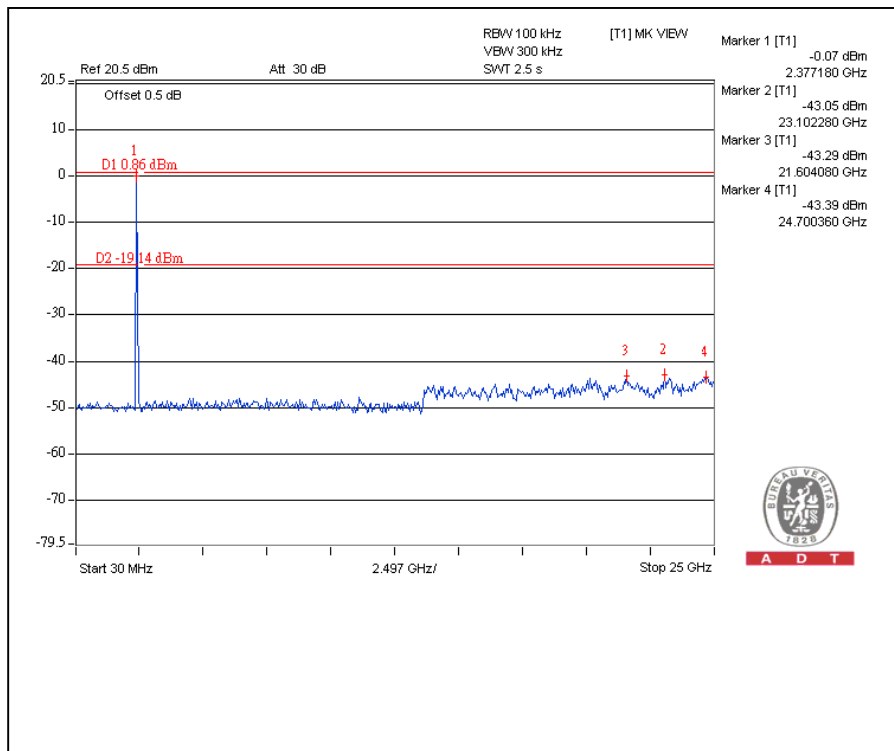

CH78

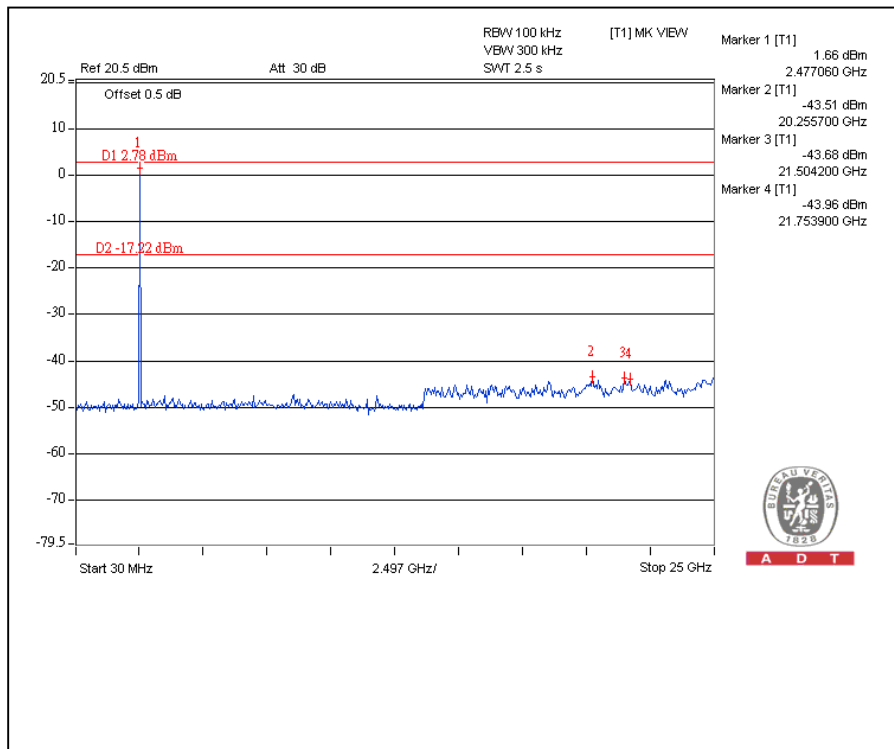

FOR 8DPSK MODULATION TYPE:

NOTE (Peak):

The band edge emission plot on the following first page show 49.96dB delta between carrier maximum power and local maximum emission in restrict band (2.3900GHz). The emission of carrier strength list in the test result of channel 0 at the item 4.2 is 97.93dBuV/m, so the maximum field strength in restrict band is $97.93-49.96=47.97$ dBuV/m which is under 74 dBuV/m limit.

The band edge emission plot on the following first page shows 51.27dB delta between carrier maximum power and local maximum emission in restrict band (2.4835GHz). The emission of carrier strength list in the test result of channel 78 at the item 4.2 is 97.06dBuV/m, so the maximum field strength in restrict band is $97.06-51.27=45.79$ dBuV/m which is under 74 dBuV/m limit.

NOTE (Average):


Average value = $47.97-30.00=17.97$ dBuV/m, which is under 54dBuV/m limit.

*The DH5 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon bluetooth theory the transmitter is on $0.625 * 5$ per 296.25 ms per channel. Therefore, the duty cycle be equal to: $20\log(3.125/100)= -30$ dB. Average value = peak reading - 30.00.


Average value = $45.79-30.00=15.79$ dBuV/m, which is under 54dBuV/m limit.

*The DH5 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon bluetooth theory the transmitter is on $0.625 * 5$ per 296.25 ms per channel. Therefore, the duty cycle be equal to: $20\log(3.125/100)= -30$ dB. Average value = peak reading - 30.00.


CH0

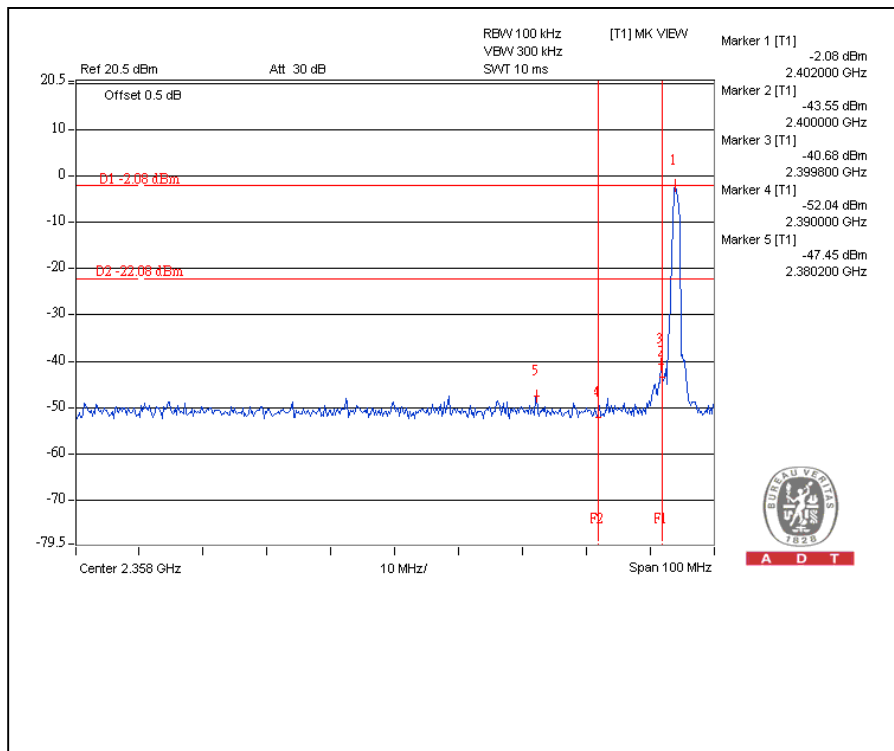


CH78

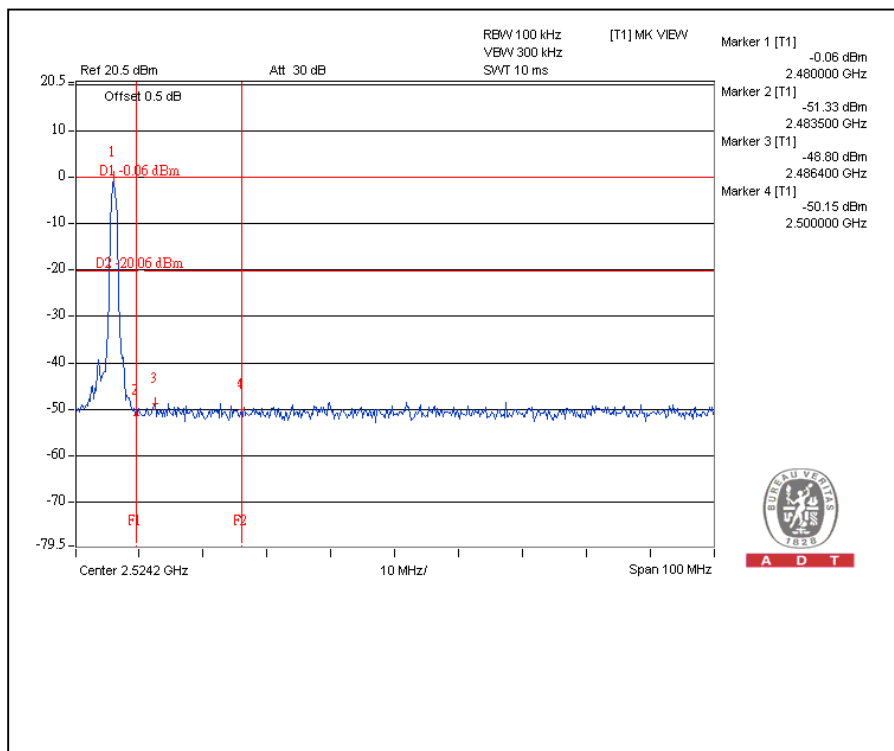

CH0

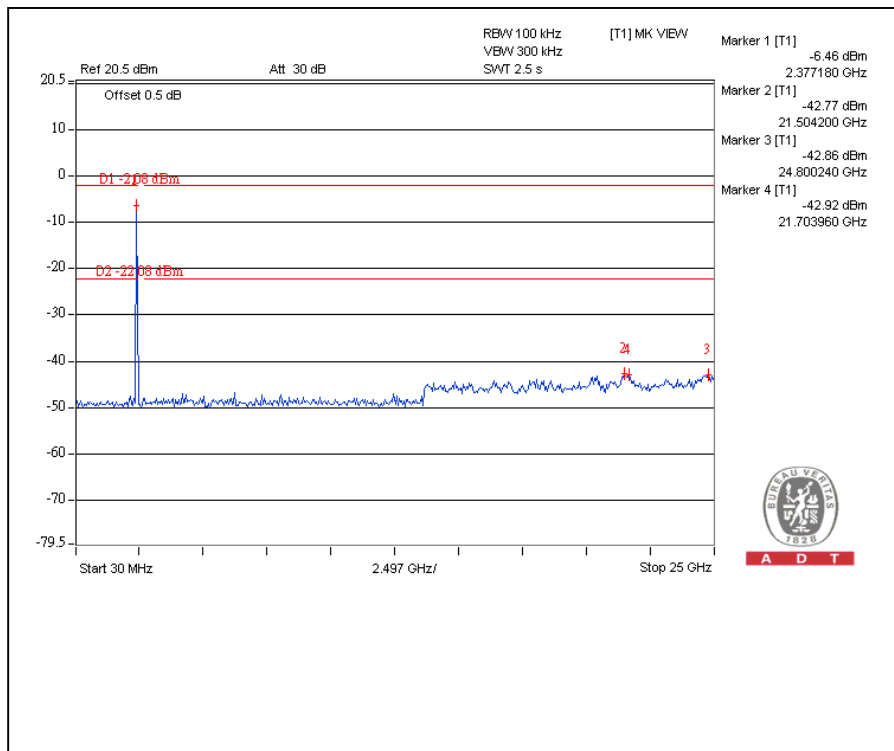

CH78

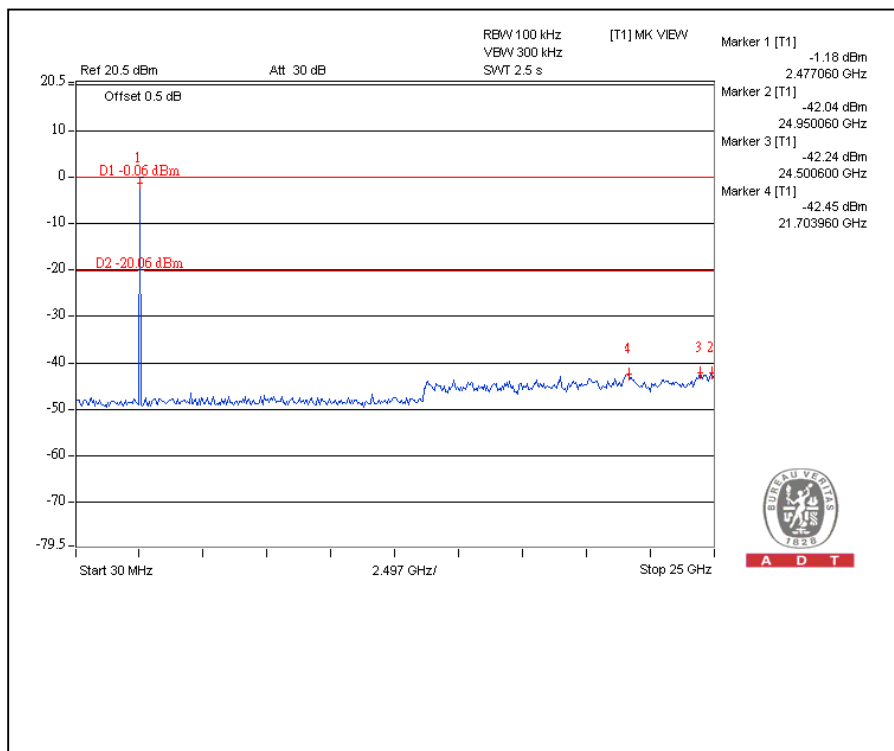

4.9 ANTENNA REQUIREMENT

4.9.1 STANDARD APPLICABLE

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

4.9.2 ANTENNA CONNECTED CONSTRUCTION

The antenna used in this product is PIFA antenna with cable. The maximum Gain of the antenna is 3.5dBi.



5 INFORMATION ON THE TESTING LABORATORIES

We, ADT Corp., were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved by the following approval agencies according to ISO/IEC 17025:

USA	FCC, UL
Germany	TUV Rheinland
Japan	VCCI
Norway	NEMKO
Canada	INDUSTRY CANADA, CSA
R.O.C.	TAF, BSMI, NCC
Netherlands	Telefication
Singapore	GOST-ASIA (MOU)
Russia	CERTIS (MOU)

Copies of accreditation certificates of our laboratories obtained from approval agencies can be downloaded from our web site: www.adt.com.tw/index.5/phtml.

If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab:

Tel: 886-2-26052180

Fax: 886-2-26052943

Hsin Chu EMC/RF Lab:

Tel: 886-3-5935343

Fax: 886-3-5935342

Hwa Ya EMC/RF/Safety/Telecom Lab:

Tel: 886-3-3183232

Fax: 886-3-3185050

Email: service@adt.com.tw

Web Site: www.adt.com.tw

The address and road map of all our labs can be found in our web site also.

6 APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No any modifications are made to the EUT by the lab during the test.

--- END ---