



## Radio Test Report

Model: C9120AXI-x  
Cisco Catalyst C9120AX Series 802.11ax Access Point  
5GHz AUX "Chillwave" Radio

FCC ID: LDKVCVER1937

**5470-5725 MHz**

Against the following Specifications for Radiated Spurious Emissions (RSE):

CFR47 Part 15.407



Cisco Systems  
170 West Tasman Drive  
San Jose, CA 95134

|  |  |
|--|--|
|           |              |
| <b>Authors:</b> Chris Blair, Allan Beecroft<br><b>Tested By:</b> Chris Blair, Allan Beecroft | <b>Approved By:</b> Gez Thorpe<br><b>Title:</b> Radio Compliance Manager<br><b>Revision:</b> 2.0 |

This report replaces any previously entered test report under EDCS – **18849636**. This test report has been electronically authorized and archived using the CISCO Engineering Document Control system. Test Report Template EDCS# 1526150.



This test report has been electronically authorized and archived using the CISCO Engineering Document Control system.

|   |           |
|---|-----------|
| <b>SECTION 1: OVERVIEW .....</b>  | <b>3</b>  |
| 1.1 TEST SUMMARY .....  | 3         |
| <b>SECTION 2: ASSESSMENT INFORMATION .....</b>                                    | <b>4</b>  |
| 2.1 GENERAL .....   | 4         |
| 2.2 UNITS OF MEASUREMENT .....  | 4         |
| 2.3 DATE OF TESTING (INITIAL SAMPLE RECEIPT DATE TO LAST DATE OF TESTING) .....   | 6         |
| 2.4 REPORT ISSUE DATE .....   | 6         |
| 2.5 TESTING FACILITIES .....  | 6         |
| 2.6 EQUIPMENT ASSESSED (EUT).....   | 7         |
| 2.7 EUT DESCRIPTION.....  | 7         |
| <b>SECTION 3: RESULT SUMMARY.....</b>   | <b>8</b>  |
| 3.1 RESULTS SUMMARY TABLE .....   | 8         |
| <b>SECTION 4: SAMPLE DETAILS.....</b>   | <b>10</b> |
| 4.1 SAMPLE DETAILS .....  | 10        |
| 4.2 SYSTEM DETAILS .....  | 10        |
| 4.3 MODE OF OPERATION DETAILS.....  | 10        |
| <b>APPENDIX A: RF CONDUCTED TEST RESULTS.....</b>                                 | <b>11</b> |
| <b>APPENDIX B: EMISSION TEST RESULTS.....</b>                                     | <b>12</b> |
| RADIATED EMISSION SETUP DIAGRAM-BELOW 1G .....                                    | 12        |
| B.1 RADIATED SPURIOUS EMISSIONS .....   | 13        |
| B.2 RADIATED EMISSIONS 30MHZ TO 1GHZ.....   | 19        |
| B.3 AC CONDUCTED EMISSIONS .....  | 21        |
| <b>APPENDIX C: LIST OF TEST EQUIPMENT USED TO PERFORM THE TEST.....</b>           | <b>22</b> |
| <b>APPENDIX D: ABBREVIATION KEY AND DEFINITIONS .....</b>                         | <b>25</b> |
| <b>APPENDIX E: PHOTOGRAPHS OF TEST SETUPS .....</b>                               | <b>26</b> |
| <b>APPENDIX F: SOFTWARE USED TO PERFORM TESTING.....</b>                          | <b>27</b> |
| <b>APPENDIX G: TEST PROCEDURES .....</b>  | <b>27</b> |
| <b>APPENDIX H: SCOPE OF ACCREDITATION (A2LA CERTIFICATE NUMBER 1178-01) .....</b> | <b>27</b> |
| <b>APPENDIX I: TEST ASSESSMENT PLAN .....</b>                                     | <b>27</b> |



## **Section 1: Overview**

### **1.1 Test Summary**

The samples were assessed against the tests detailed in section 3 under the requirements of the following specifications:

| specifications    |
|-------------------|
| CFR47 Part 15.407 |



## Section 2: Assessment Information

### 2.1 General

This report contains an assessment of an apparatus against Radio Standards based upon tests carried out on the samples submitted. The testing was performed by and for the use of Cisco systems Inc:

With regard to this assessment, the following points should be noted:

- a) The results contained in this report relate only to the items tested and were obtained in the period between the date of the initial assessment and the date of issue of the report. Manufactured products will not necessarily give identical results due to production and measurement tolerances.
- b) The apparatus was set up and exercised using the configuration and modes of operation defined in this report only.
- c) Where relevant, the apparatus was only assessed using the susceptibility criteria defined in this report and the Test Assessment Plan (TAP).
- d) All testing was performed under the following environmental conditions:

|                      |                                      |
|----------------------|--------------------------------------|
| Temperature          | 15°C to 35°C (54°F to 95°F)          |
| Atmospheric Pressure | 860mbar to 1060mbar (25.4" to 31.3") |
| Humidity             | 10% to 75*%                          |

### 2.2 Units of Measurement

The units of measurements defined in the appendices are reported in specific terms, which are test dependent. Where radiated measurements are concerned these are defined at a particular distance. Basic voltage measurements are defined in units of [dBuV]

As an example, the basic calculation for all measurements is as follows:

Emission level [dBuV] = Indicated voltage level [dBuV] + Cable Loss [dB] + Other correction factors [dB]

The combinations of correction factors are dependent upon the exact test configurations [see test equipment lists for further details] and may include:-

Antenna Factors, Pre Amplifier Gain, LISN Loss, Pulse Limiter Loss and Filter Insertion Loss..

Note: to convert the results from dBuV/m to uV/m use the following formula:-

Level in uV/m = Common Antilogarithm [(X dBuV/m)/20] = Y uV/m

## Measurement Uncertainty Values

|                                   |                         |
|-----------------------------------|-------------------------|
| voltage and power measurements    | $\pm 2$ dB              |
| conducted EIRP measurements       | $\pm 1.4$ dB            |
| radiated measurements             | $\pm 3.2$ dB            |
| frequency measurements            | $\pm 2.4 \cdot 10^{-7}$ |
| temperature measurements          | $\pm 0.54^\circ$        |
| humidity measurements             | $\pm 2.3\%$             |
| DC and low frequency measurements | $\pm 2.5\%$             |

Where relevant measurement uncertainty levels have been estimated for tests performed on the apparatus. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k=2$ .

Radiated emissions (expanded uncertainty, confidence interval 95%)

|                    |              |
|--------------------|--------------|
| 30 MHz - 300 MHz   | $\pm 3.8$ dB |
| 300 MHz - 1000 MHz | $\pm 4.3$ dB |
| 1 GHz - 10 GHz     | $\pm 4.0$ dB |
| 10 GHz - 18GHz     | $\pm 8.2$ dB |
| 18GHz - 26.5GHz    | $\pm 4.1$ dB |
| 26.5GHz - 40GHz    | $\pm 3.9$ dB |

Conducted emissions (expanded uncertainty, confidence interval 95%)

|                |               |
|----------------|---------------|
| 30 MHz – 40GHz | $\pm 0.38$ dB |
|----------------|---------------|

A product is considered to comply with a requirement if the nominal measured value is below the limit line. The product is considered to not be in compliance in case the nominal measured value is above the limit line.

**This report must not be reproduced except in full, without written approval of Cisco Systems.**

**2.3 Date of testing (initial sample receipt date to last date of testing)**

22-JAN-2020 to 20-FEB-2020

**2.4 Report Issue Date**

Cisco uses an electronic system to issue, store and control the revision of test reports. This system is called the Engineering Document Control System (EDCS). The actual report issue date is embedded into the original file on EDCS. Any copies of this report, either electronic or paper, that are not on EDCS must be considered uncontrolled

**2.5 Testing facilities**

This assessment was performed by:

**Testing Laboratory**

Cisco Systems, Inc.  
125 West Tasman Drive (Building P)  
San Jose, CA 95134  
USA

**Headquarters**

Cisco Systems, Inc.,  
170 West Tasman Drive  
San Jose, CA 95134,  
USA

**Registration Numbers for Industry Canada**

| <b>Cisco System Site</b> | <b>Address</b>                                    | <b>Site Identifier</b> |
|--------------------------|---|------------------------|
| Building P, 10m Chamber  | 125 West Tasman Dr<br>San Jose, CA 95134          | Company #: 2461N-2     |
| Building P, 5m Chamber   | 125 West Tasman Dr<br>San Jose, CA 95134          | Company #: 2461N-1     |
| Building I, 5m Chamber   | 285 W. Tasman Drive<br>San Jose, California 95134 | Company #: 2461M-1     |
| Building 7, 5m Chamber   | 425 E. Tasman Drive<br>San Jose, California 95134 | Company #: 2461N-3     |

**Test Engineers**

Chris Blair, Allan Beecroft



## 2.6 Equipment Assessed (EUT)

Model: C9120AXI-x, VE

## 2.7 EUT Description

802.11ax Access Point with Dual 4x4 MIMO with 4 Spatial Streams

The EUT AUX radio supports the following modes of operation. The modes are further defined in the radio Theory of Operation. The modes included in this report represent the worst case data for all modes. Data is recorded at the lowest supported data rate for each mode.

802.11a - Non HT20, One Antenna, 6 to 54 Mbps, 1ss

The following antennas are supported by this product series.

The data included in this report represent the worst case data for all antennas.

| Frequency | Part Number | Antenna Type                          | Antenna Gain (dBi) |
|-----------|-------------|---------------------------------------|--------------------|
| 5GHz      | -           | Internal, Dual-band, Omni-directional | 5                  |

### Section 3: Result Summary

#### 3.1 Results Summary Table

##### Conducted emissions

| Basic Standard           | Technical Requirements / Details  | Result     |
|--------------------------|---|------------|
| FCC 15.407               | <p><b>99% &amp; 26 dB Bandwidth:</b><br/>The 99% occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5% of the total mean power of the given emission. There is no limit for 99% OBW.</p> <p>The 26 dB emission is the width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 26 dB relative to the maximum level measured in the fundamental emission.</p>  | Not Tested |
| FCC 15.407               | <p><b>Output Power:</b><br/><b>15.407</b> (2) For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or 11 dBm + 10 log B, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.</p> | Not Tested |
| FCC 15.407               | <p><b>Power Spectral Density</b><br/><b>15.407</b> (2) For the 5.25-5.35 GHz and 5.47-5.725 GHz bands...the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.</p>   | Not Tested |
| FCC 15.407               | <p><b>Conducted Spurious Emissions / Band-Edge:</b><br/><b>15.407</b> (3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz..</p>   | Not Tested |
| FCC 15.407<br>FCC 15.205 | <p><b>Restricted band:</b><br/>Unwanted emissions falling within the restricted bands, as defined in FCC 15.205 (a) must also comply with the radiated emission limits specified in FCC 15.209 (a)</p>  | Not Tested |



**Radiated Emissions (General requirements)**

| Basic Standard | Technical Requirements / Details   | Result     |
|----------------|--|------------|
| FCC 15.209     | <b>TX Spurious Emissions:</b><br>Except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the field strength limits table in this section.   | Pass       |
| FCC 15.207     | <b>AC conducted Emissions:</b><br>Except when the requirements applicable to a given device state otherwise, for any radio apparatus equipped to operate from the public utility AC power supply, either directly or indirectly (such as with a battery charger), the radio frequency voltage of emissions conducted back onto the AC power lines in the frequency range of 0.15 MHz to 30 MHz shall not exceed the limits shown in the table in these sections. The more stringent limit applies at the frequency range boundaries. | Not Tested |



#### Section 4: Sample Details

Note: Each sample was evaluated to ensure that its condition was suitable to be used as a test sample prior to the commencement of testing. Please also refer to the "Justification for worst Case test Configuration" section of this report for further details on the selection of EUT samples.

##### 4.1 Sample Details

| Sample No. | Equipment Details | Maker                    | Hardware Rev. | Firmware Rev.                                   | Software Rev.   | Serial Number         |
|------------|-------------------|--------------------------|---------------|---|---|-----------------------|
| S01        | C9120AXI-B        | Foxconn<br>(for Cisco)   | 800-106693-01 | Radio FW ver. :<br>14948.14801.<br>r39245 39245 | Cisco AP Software, (ap1g7),<br>[cheetah-build6:/san2/BUILD/<br>workspace/Nightly-Cheetah-a<br>xel-bcm-mfg-c8_10_throttle]<br><br>Compiled Mon Jan 27<br>08:40:01 PST 2020 | FOC23447<br>WF2       |
| S02        | AIR-PWRINJ6       | Microsemi<br>(for Cisco) | V01           | NA  | NA  | C16176663<br>00000860 |

##### 4.2 System Details

| System # | Description                   | Samples |
|----------|-------------------------------|---------|
| 1        | EUT+power source for RSE test | S01+S02 |

##### 4.3 Mode of Operation Details

| Mode# | Description             | Comments |
|-------|-------------------------|----------|
| 1     | Continuous Transmitting |          |




## **Appendix A: RF Conducted Test Results**

RF conducted tests are not covered by this report.


## Appendix B: Emission Test Results

Testing Laboratory: Cisco Systems, Inc., 125 West Tasman Drive, San Jose, CA 95134, USA

### Radiated Emission Setup Diagram-Below 1G

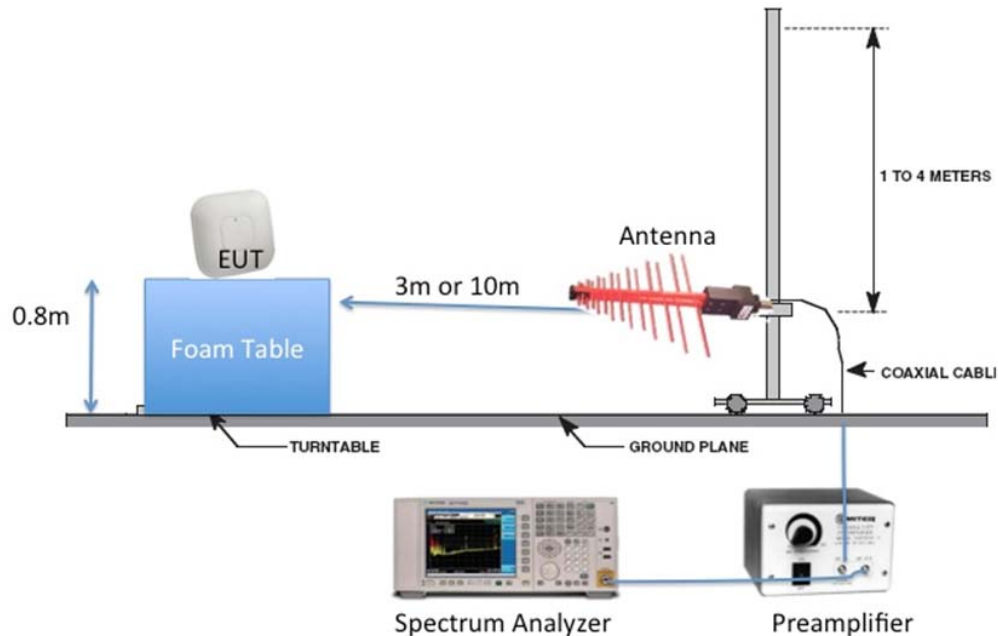

### Radiated Emission Setup Diagram-Above 1G

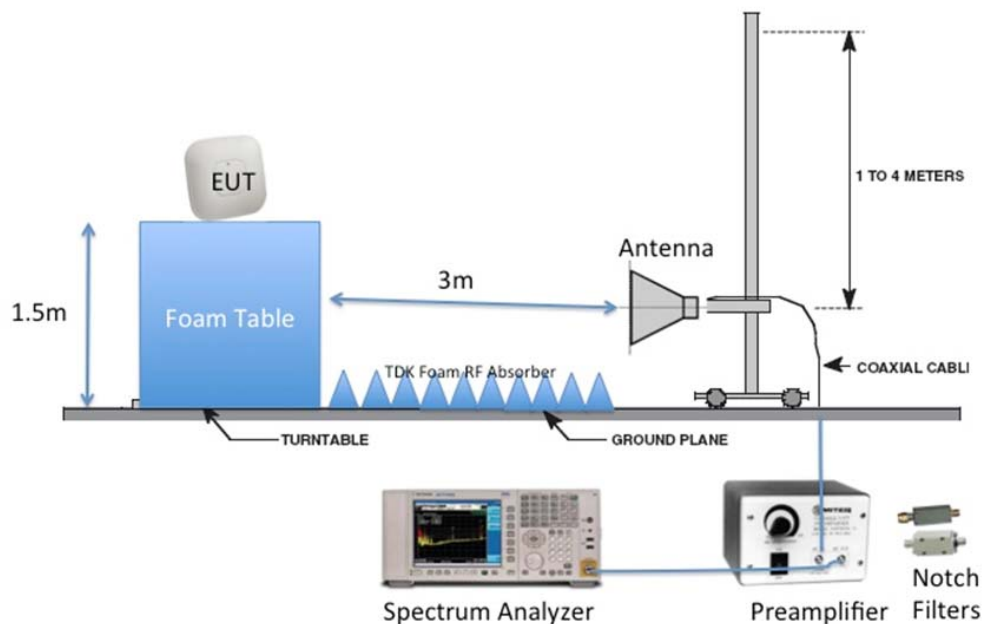



## B.1 Radiated Spurious Emissions

**15.407** (b) *Undesirable emission limits.* Except as shown in paragraph (b) (7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

(3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

### 15.205 / 15.209

(7) The provisions of 15.205 apply to intentional radiators operating under this section.

(6) Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in 15.209.

### Test Procedure

Ref. ANSI C63.10: 2013 section 12.7.6 (peak) & 12.7.7.3 (average)

| Radiated Spurious Emissions  |  |
|--|--|
| Test parameters  |  |
| <b>Peak</b><br>Span = 1-18GHz /18GHz-26.5GHz/26.5GHz-40GHz<br>RBW = 1 MHz<br>VBW $\geq$ 3 MHz<br>Sweep = Auto couple<br>Detector = Peak<br>Trace = Max Hold. | <b>Average</b><br>Span = 1-18GHz /18GHz-26.5GHz/26.5GHz-40GHz<br>RBW = 1 MHz<br>VBW $\geq$ 3 MHz<br>Sweep = Auto couple<br>Detector = RMS<br>Power Averaging |

Using Vasona, configure the spectrum analyzer as shown below (be sure to enter all losses between the transmitter output and the spectrum analyzer). Place the radio in continuous transmit mode.

Terminate the access Point RF ports with 50 ohm loads.

Maximize Turntable (find worst case table angle), Maximize Antenna (find worst case height)

Save 2 plots:      1) Average plot (Vertical and Horizontal), Limit= 54dBuV/m @3m  
                          2) Peak plot (Vertical and Horizontal), Limit = 74dBuV/m @3m

Place a marker at the end of the restricted band closest to the transmit frequency to show compliance.  
 Also measure any emissions in the restricted bands.

This report represents the worst case data for all supported operating modes and antennas.

### Samples, Systems, and Modes

| System Number | Description | Samples | System under test                   | Support equipment                   |
|---------------|-------------|---------|-------------------------------------|-------------------------------------|
| 1             | EUT         | S01     | <input checked="" type="checkbox"/> | <input type="checkbox"/>            |
|               | Support     | S02     | <input type="checkbox"/>            | <input checked="" type="checkbox"/> |

|  |                                      |
|--|--------------------------------------|
| Tested By : Chris Blair & Allan Beecroft | Date of testing: February 2-20, 2020 |
| Test Result : PASS                       |                                      |

See Appendix C for list of test equipment




## B.1.A Transmitter Radiated Spurious Emissions-Average

| Frequency (MHz) | Mode    | Data Rate (Mbps) | Spurious Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) |
|-----------------|---------|------------------|----------------------------------|----------------|-------------|
| 5500            | NonHT20 | 6                | 45.137                           | <54            | 8.9         |
| 5580            | NonHT20 | 6                | 45.265                           | <54            | 8.7         |
| 5700            | NonHT20 | 6                | 45.529                           | <54            | 8.5         |
| 5720            | NonHT20 | 6                | 45.012                           | <54            | 9.0         |


Note: Formal average measurements not required for 1-10GHz, because peak emissions were under the average limit. See section B.1.P.

### B.1.A.1 Radiated Transmitter Spurs, 5700 MHz, 6 to 54 Mbps , Average (10-18GHz)

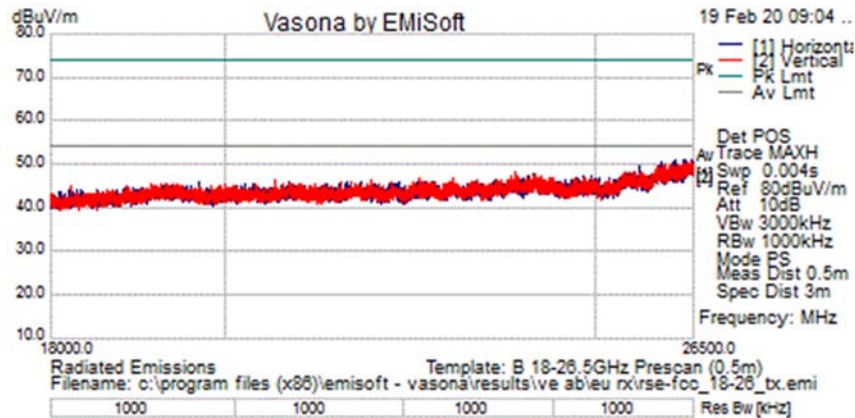

**B.1.A.2 Radiated Transmitter Spurs, Peak and Average (18-26.5GHz)**

All emissions were below the average limit when measured using a peak detector. There were no emissions within 20dB of the peak limit.

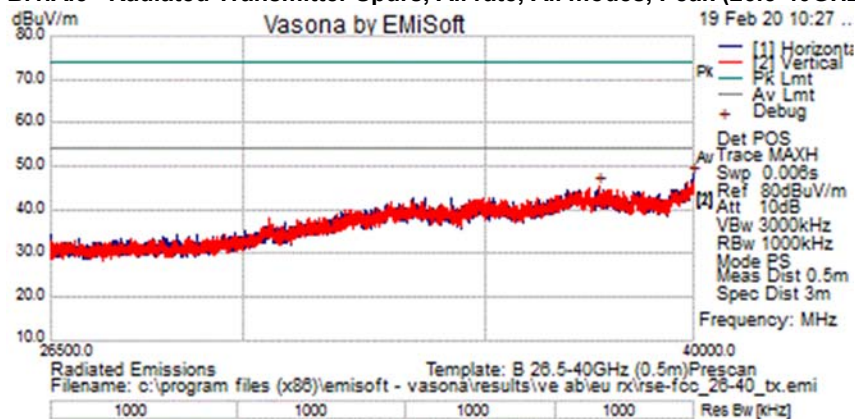**B.1.A.3 Radiated Transmitter Spurs, All rate, All modes, Peak (26.5-40GHz)**



All emissions were below the average limit when measured using a peak detector. There were no emissions within 20dB of the peak limit.


**B.1.P Transmitter Radiated Spurious Emissions-Peak**

| Frequency (MHz) | Mode    | Data Rate (Mbps) | Spurious Emission Level (dBuV/m) | Limit (dBuV/m)* | Margin (dB) |
|-----------------|---------|------------------|----------------------------------|-----------------|-------------|
| 5500            | NonHT20 | 6                | 52.92                            | <68.2           | 15.3        |
| 5580            | NonHT20 | 6                | 52.67                            | <68.2           | 15.5        |
| 5700            | NonHT20 | 6                | 53.06                            | <68.2           | 15.1        |
| 5720            | NonHT20 | 6                | 52.89                            | <68.2           | 15.3        |


\*The peak limit for emissions in the Restricted Band = 74dBuV/m, with additional average limit = 54dBuV/m.  
The peak limit for emissions in the Non-Restricted Band = 68.2dBuV/m, with no additional average limit.  
The limit in this column reflects the worst-case peak limit, to cover all emission frequencies.

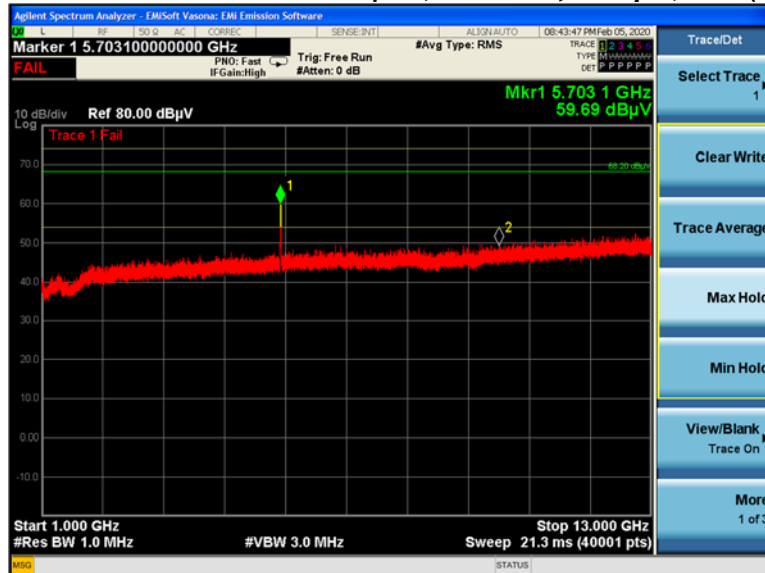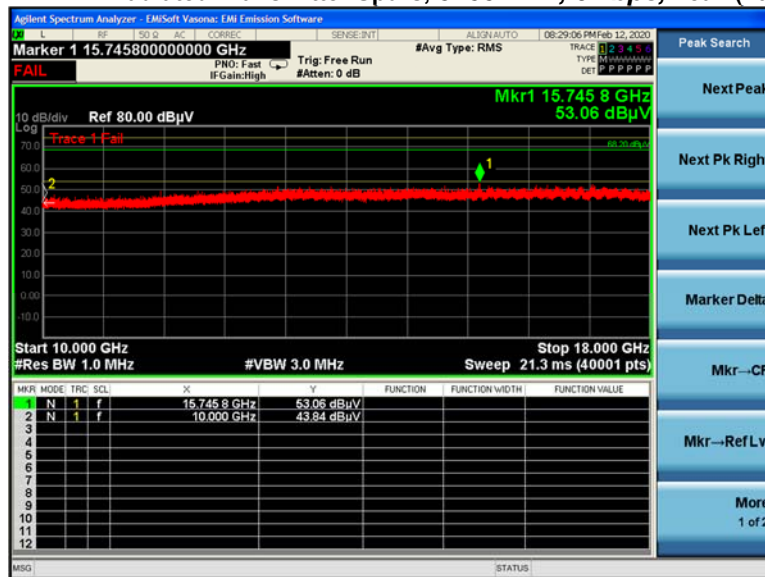

**B.1.P.1 Radiated Transmitter Spurs, 5700 MHz, 6 Mbps, Peak (1-10GHz)****B.1.P.2 Radiated Transmitter Spurs, 5700 MHz, 6Mbps, Peak (10-18GHz)**

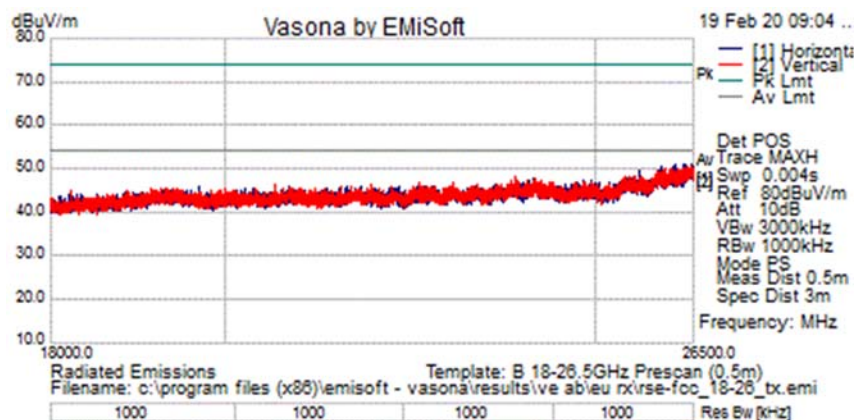**B.1.P.3 Radiated Transmitter Spurs, Peak and Average (18-26.5GHz)**

All emissions were below the average limit when measured using a peak detector. There were no emissions within 20dB of the peak limit.

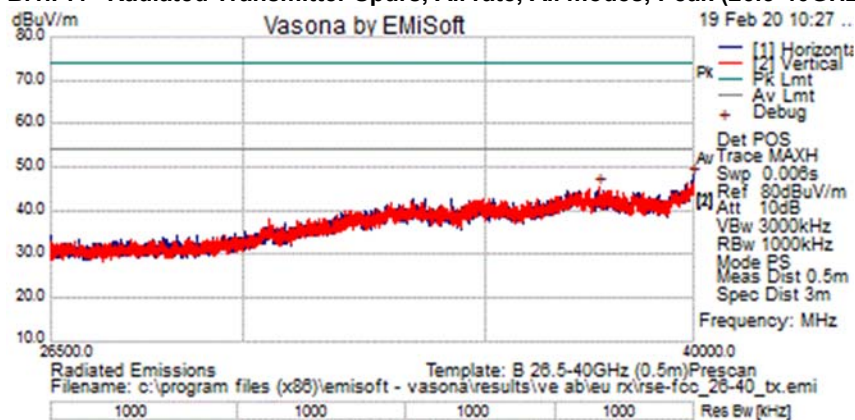**B.1.P.4 Radiated Transmitter Spurs, All rate, All modes, Peak (26.5-40GHz)**

All emissions were below the average limit when measured using a peak detector. There were no emissions within 20dB of the peak limit.



## B.2 Radiated Emissions 30MHz to 1GHz

### 15.205 / 15.209

(7) The provisions of §15.205 apply to intentional radiators operating under this section.

(6) Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in §15.209.

**Ref.** ANSI C63.10: 2013 section 12.7 sec 6.5

Using Vasona, configure the spectrum analyzer as shown below (be sure to enter all losses between the transmitter output and the spectrum analyzer). Place the radio in continuous transmit mode.

Span: 30MHz – 1GHz  
Reference Level: 80 dBuV  
Attenuation: 10 dB  
Sweep Time: Coupled  
Resolution Bandwidth: 100kHz  
Video Bandwidth: 300kHz  
Detector: Quasi-Peak

Terminate the access Point RF ports with 50 ohm loads.

Maximize Turntable (find worst case table angle), Maximize Antenna (find worst case height)

This report represents the worst case data for all supported operating modes and antennas.

#### Samples, Systems, and Modes


| System Number | Description | Samples | System under test                   | Support equipment                   |
|---------------|-------------|---------|-------------------------------------|-------------------------------------|
| 1             | EUT         | S01     | <input checked="" type="checkbox"/> | <input type="checkbox"/>            |
|               | Support     | S02     | <input type="checkbox"/>            | <input checked="" type="checkbox"/> |

|                                      |  |
|--------------------------------------|--|
| <b>Tested By :</b><br>Allan Beecroft | <b>Date of testing:</b><br>20-FEB-2020 |
| <b>Test Result : PASS</b>            |  |


#### Test Equipment

See Appendix C for list of test equipment

## Transmitter Radiated Emission

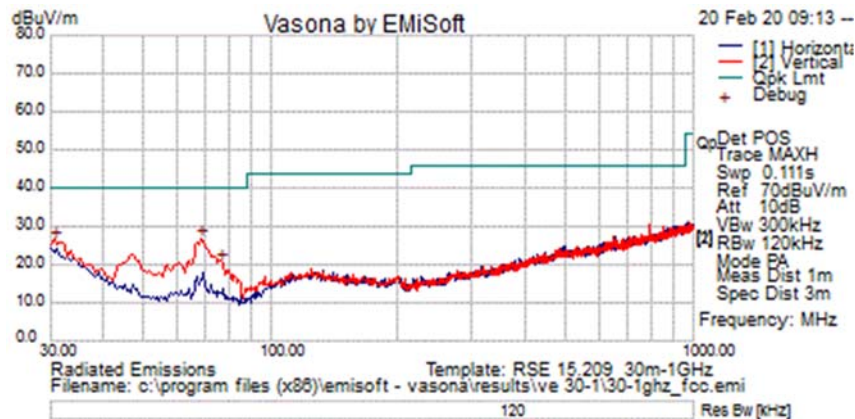

## Receiver Radiated Emission

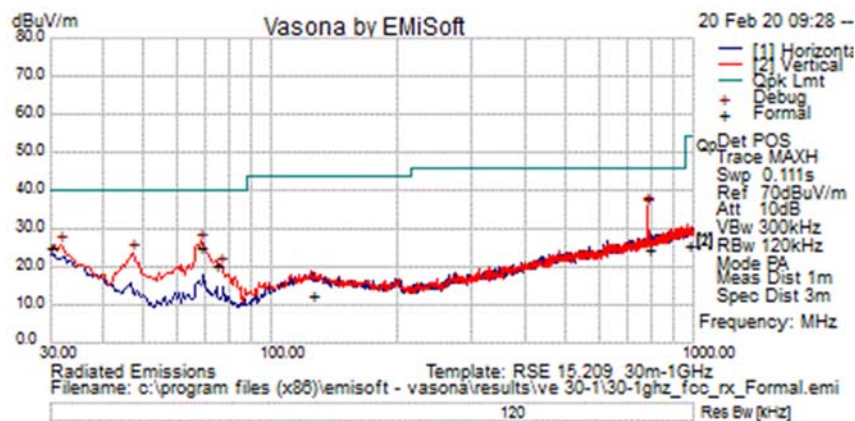

| Formal Data |                   |                 |                   |          |                     |                      |         |               |                |                     |               |                   |                |
|-------------|-------------------|-----------------|-------------------|----------|---------------------|----------------------|---------|---------------|----------------|---------------------|---------------|-------------------|----------------|
| N<br>o      | Frequenc<br>y MHz | Raw<br>dBu<br>V | Cabl<br>e<br>Loss | AF<br>dB | Level<br>dBuV/<br>m | Measuremen<br>t Type | Po<br>l | Hg<br>t<br>cm | Azt<br>De<br>g | Limit<br>dBuV/<br>m | Margi<br>n dB | Pass<br>/Fai<br>l | Comment        |
| 1           | 30.000            | 12.8            | .5                | 11.7     | 25.0                | Quasi Peak           | V       | 99            | -3             | 40.0                | -15.0         | Pass              |                |
| 2           | 68.372            | 25.7            | .8                | -1.4     | 25.1                | Quasi Peak           | V       | 261           | 363            | 40.0                | -14.9         | Pass              |                |
| 3           | 787.111           | 10.1            | 2.8               | 11.9     | 24.7                | Quasi Peak           | H       | 99            | 363            | 46.0                | -21.3         | Pass              | Cell frequency |
| 4           | 74.441            | 20.9            | .8                | -1.6     | 20.1                | Quasi Peak           | V       | 153           | -3             | 40.0                | -19.9         | Pass              |                |
| 5           | 977.875           | 9.2             | 3.1               | 13.6     | 25.8                | Quasi Peak           | H       | 361           | -3             | 54.0                | -28.2         | Pass              |                |
| 6           | 124.999           | 7.0             | 1.1               | 4.5      | 12.6                | Quasi Peak           | H       | 99            | -3             | 43.5                | -30.9         | Pass              |                |



## **B.3 AC Conducted Emissions**

AC conducted tests are not covered by this report.



## Appendix C: List of Test Equipment Used to perform the test

| Equip#   | Manufacturer/ Model                 | Description                                  | Last Cal    | Next Due    | Test Item |
|--|-------------------------------------|--|-------------|-------------|-----------|
| <b>Test Equipment used for Radiated Emissions, 1-18GHz</b> |                                     |  |             |             |           |
| 41201  | ETS/Lindgren 3117                   | Double Ridged Horn Antenna                   | 27 Aug 2019 | 27 Aug 2020 | B.1       |
| 45096  | Cisco TH0118                        | Mast Mount Preamplifier Array, 1-18GHz       | 29 Oct 2019 | 29 Oct 2020 | B.1       |
| 38375  | Cisco TH0118-PS                     | Power Supply for TH0118 1-18GHz Preamplifier | NA          | NA          | B.1       |
| 37237  | JFW 50CB-015                        | GPIB control box                             | NA          | NA          | B.1       |
| 41202  | ETS/Lindgren 3117                   | Double Ridged Horn Antenna                   | 15 Feb 2019 | 15 Feb 2020 | B.1       |
| 56066  | Miteq TTA1800-30-HG-S               | 18GHz SMA Pre-Amplifier                      | 20 May 2019 | 20 May 2020 | B.1       |
| 56060  | Miteq TTA1800-30-HG                 | SMA 18GHz Pre Amplifier                      | 08 Apr 2019 | 08 Apr 2020 | B.        |
| 47286  | H+S Sucoflex 102E                   | 40GHz Cable K Connector                      | 05 Sep 2019 | 05 Sep 2020 | B.1       |
| 35040  | Micro-Tronics HPM50112-02           | Notch Filter                                 | 27 Jun 2019 | 27 Jun 2020 | B.1       |
| 51802  | H+S Sucoflex 102PE                  | 40 GHz Cable, K-Type                         | 23 Dec 2019 | 23 Dec 2020 | B.1       |
| 49563  | H+S Sucoflex 106A                   | Coaxial Cable, 8m                            | 12 Aug 2019 | 12 Aug 2020 | B.1, B.2  |
| 21117  | Micro-coax<br>UFB311A-0-2484-520520 | Coaxial Cable-18Ghz                          | 12 Aug 2019 | 12 Aug 2020 | B.1, B.2  |
| 56155  | H+S Sucoflex 104PEA                 | Sucoflex N Type blue 7ft cable               | 13 Jan 2020 | 13 Jan 2021 | B.1, B.2  |
| 47300  | Keysight N9038A                     | EMI Receiver                                 | 29 May 2019 | 29 May 2020 | B.1, B.2  |
| 34075  | Schaffner RSG 2000                  | Reference Spectrum Generator, 1-18GHz        | NA          | NA          | B.1       |
| 4883   | EMCO 3115                           | Horn antenna                                 | NA          | NA          | B.1       |
| 8171   | Keysight 8491B Opt 010              | Attenuator                                   | 23 Apr 2019 | 23 Apr 2020 | B.1       |
| 35242  | Klein tools 926-8ME                 | 8m measurement tape                          | NA          | NA          | B.1, B.2  |
| 40597  | Cisco Above 1GHz Site Cal           | 1GHz Cispr Site Verification                 | 27 Sep 2019 | 27 Sep 2020 | B.1       |
| 8448   | Cisco NSA Cal                       | NSA/chamber                                  | 26 Sep 2019 | 26 Sep 2020 | B.1, B.2  |



|       |                     |  |             |             |          |
|-------|---------------------|--|-------------|-------------|----------|
| 58225 | Comet T7611-4       | WEB SENSOR FOR REMOTE THERMOMETER HYGROMETER | 20 Aug 2019 | 20 Aug 2020 | B.1, B.2 |
| 56328 | Pasternack PE5019-1 | Torque wrench                                | 25 Feb 2020 | 25 Feb 2021 | B.1      |
| 56330 | Pasternack PE5019-1 | Torque wrench                                | 02 Mar 2020 | 02 Mar 2021 | B.1      |
| 33040 | Fluke 175           | True RMS Multimeter                          | 04 Sep 2019 | 04 Sep 2020 | B.1, B.2 |

| Test Equipment used for Radiated Emissions, 18-40GHz |                              |  |                  |                  |  |
|--|------------------------------|--|------------------|------------------|--|
| CIS040597  | CISCO Above 1GHz Site Cal    | 1GHz Cispr Site Verification                 | 27 Sep 2019      | 27 Sep 2020      | B.1.A.2,<br>B.1.A.3,<br>B.1.P.3,<br>B.1.P.4,<br>B.2.3, B.2.4 |
| CIS45166   | STANLEY 33-428               | 26' Tape Measure                             | Cal Not Required | Cal Not Required | B.1.A.2,<br>B.1.A.3,<br>B.1.P.3,<br>B.1.P.4,<br>B.2.3, B.2.4 |
| CIS54235   | PASTERNAK PE5011-1           | PRESET TORQUE WRENCH, 8 IN/LBS               | 28 Feb 2019      | 28 Feb 2020      | B.1.A.2,<br>B.1.A.3,<br>B.1.P.3,<br>B.1.P.4,<br>B.2.3, B.2.4 |
| CIS41979   | CISCO 1840                   | 18-40GHz EMI Test Head/Verification Fixture  | 09 Apr 2019      | 09 Apr 2020      | B.1.A.2,<br>B.1.A.3,<br>B.1.P.3,<br>B.1.P.4,<br>B.2.3, B.2.4 |
| 58225  | Comet T7611-4                | WEB SENSOR FOR REMOTE THERMOMETER HYGROMETER | 20 Aug 2019      | 20 Aug 2020      | B.1.A.2,<br>B.1.A.3,<br>B.1.P.3,<br>B.1.P.4,<br>B.2.3, B.2.4 |
| CIS5972  | Keysight (Agilent/HP) 83712B | SYNTHESIZED CW GENERATOR                     | Cal Not Required | Cal Not Required | B.1.A.2,<br>B.1.A.3,<br>B.1.P.3,<br>B.1.P.4,<br>B.2.3, B.2.4 |
| CIS44940   | ROHDE & SCHWARZ ESU40        | EMI RECEIVER, 40GHZ                          | 18 Dec 2019      | 18 Dec 2020      | B.1.A.2,<br>B.1.A.3,<br>B.1.P.3,<br>B.1.P.4,<br>B.2.3, B.2.4 |



|                      |                                     |   |                  |                  |  |
|----------------------|-------------------------------------|---|------------------|------------------|--|
| CIS37236             | JFW 50CB-015                        | Control Box, GPIB                               | Cal Not Required | Cal Not Required | B.1.A.2,<br>B.1.A.3,<br>B.1.P.3,<br>B.1.P.4,<br>B.2.3, B.2.4 |
| <b>30MHz to 1GHz</b> |                                     |   |                  |                  |  |
| CIS008448            | NSA 5m Chamber<br>Cisco             | NSA 5m Chamber                                  | 26-SEP-19        | 26-SEP-20        | B3   |
| CIS047300            | Keysight N9038A                     | MXE EMI Receiver                                | 29-MAY-2019      | 29-MAY-2020      | B3   |
| CIS030654            | JB1<br>Sunol Sciences               | Combination Antenna,<br>30MHz-2GHz              | 05 Jun 2019      | 05 Jun 2020      | B3   |
| CIS021117            | MICRO-COAX<br>UFB311A-0-2484-520520 | Coaxial Cable-18Ghz                             | 12 Aug 2019      | 12 Aug 2020      | B3   |
| CIS 56157            | HUBER + SUHNER Sucoflex<br>104PEA   | Sucoflex N Type blue 7ft cable                  | 13 Jan 2020      | 13 Jan 2021      | B3   |
| 58225                | Comet T7611-4                       | WEB SENSOR FOR REMOTE<br>THERMOMETER HYGROMETER | 20 Aug 2019      | 20 Aug 2020      | B3   |
| CIS49563             | HUBER + SUHNER Sucoflex 106A        | Coaxial Cable, 8m                               | 12 Aug 2019      | 12 Aug 2020      | B3   |
| CIS45166             | STANLEY 33-428                      | 26' Tape Measure                                | Cal Not Required | Cal Not Required | B3   |
| CIS27233             | YORK VNE V                          | Comparison Noise Emitter                        | Cal Not Required | Cal Not Required | B3   |
| CIS54235             | PASTERNAK PE5011-1                  | PRESET TORQUE WRENCH, 8 IN/LBS                  | 28 Feb 2019      | 28 Feb 2020      | B3   |





## Appendix D: Abbreviation Key and Definitions

The following table defines abbreviations used within this test report.

| Abbreviation | Description  | Abbreviation | Description                         |
|--------------|--|--------------|-------------------------------------|
| EMC          | Electro Magnetic Compatibility                                       | °F           | Degrees Fahrenheit                  |
| EMI          | Electro Magnetic Interference  | °C           | Degrees Celsius                     |
| EUT          | Equipment Under Test   | Temp         | Temperature                         |
| ITE          | Information Technology Equipment                                     | S/N          | Serial Number                       |
| TAP          | Test Assessment Schedule   | Qty          | Quantity                            |
| ESD          | Electro Static Discharge   | emf          | Electromotive force                 |
| EFT          | Electric Fast Transient  | RMS          | Root mean square                    |
| EDCS         | Engineering Document Control System                                  | Qp           | Quasi Peak                          |
| Config       | Configuration  | Av           | Average                             |
| CIS#         | Cisco Number (unique identification number for Cisco test equipment) | Pk           | Peak                                |
| Cal          | Calibration  | kHz          | Kilohertz ( $1 \times 10^3$ )       |
| EN           | European Norm  | MHz          | MegaHertz ( $1 \times 10^6$ )       |
| IEC          | International Electro technical Commission                           | GHz          | Gigahertz ( $1 \times 10^9$ )       |
| CISPR        | International Special Committee on Radio Interference                | H            | Horizontal                          |
| CDN          | Coupling/Decoupling Network  | V            | Vertical                            |
| LISN         | Line Impedance Stabilization Network                                 | dB           | decibel                             |
| PE           | Protective Earth   | V            | Volt                                |
| GND          | Ground   | kV           | Kilovolt ( $1 \times 10^3$ )        |
| L1           | Line 1   | $\mu$ V      | Microvolt ( $1 \times 10^{-6}$ )    |
| L2           | Line2  | A            | Amp                                 |
| L3           | Line 3   | $\mu$ A      | Micro Amp ( $1 \times 10^{-6}$ )    |
| DC           | Direct Current   | mS           | Milli Second ( $1 \times 10^{-3}$ ) |
| RAW          | Uncorrected measurement value, as indicated by the measuring device  | $\mu$ S      | Micro Second ( $1 \times 10^{-6}$ ) |
| RF           | Radio Frequency  | $\mu$ S      | Micro Second ( $1 \times 10^{-6}$ ) |
| SLCE         | Signal Line Conducted Emissions                                      | m            | Meter                               |
| Meas dist    | Measurement distance   | Spec dist    | Specification distance              |
| N/A or NA    | Not Applicable   | SL           | Signal Line (or Telecom Line)       |
| P            | Power Line   | L            | Live Line                           |
| N            | Neutral Line   | R            | Return                              |
| S            | Supply   | AC           | Alternating Current                 |



## **Appendix E: Photographs of Test Setups**

Please refer to the attachment



## **Appendix F: Software Used to Perform Testing**

EMIsoft Vasona, version 6.047 & 6.071

## **Appendix G: Test Procedures**

Measurements were made in accordance with

- KDB 789033 - D02 General UNII Test Procedures New Rules v02r01
- KDB 662911 - MIMO
- ANSI C63.4 2014 Unintentional Radiators
- ANSI C63.10 2013 Intentional Radiators

Test procedures are summarized below:

|                              |                |
|------------------------------|----------------|
| FCC 5GHz Test Procedures     | EDCS # 1445048 |
| FCC 5GHz RSE Test Procedures | EDCS # 1511600 |

## **Appendix H: Scope of Accreditation (A2LA certificate number 1178-01)**

The scope of accreditation of Cisco Systems, Inc. can be found on the A2LA web page at:

<http://www.a2la.org/scopepdf/1178-01.pdf>

## **Appendix I: Test Assessment Plan**

Compliance Test Plan: EDCS:16915207

Target Power Tables EDCS# 16415414

**END**