
5.0 GHz Wi-Fi Radio Test Report
802.11a/ac/n
UNII-1 Band
For
Wi-Fi Dual Band Wireless Router

Model: WRP500

Against the following Specifications :

47 CFR 15.407

47 CFR 15.209

47 CFR 15.205

RSS-Gen Issue 4

RSS-210 Issue 8

Cisco Systems

EMC Laboratory

170 West Tasman Drive

San Jose, CA 95134



Author: Danh Le

Approved By: Dilip Patel

Title: Regulatory Compliance Manager

This report replaces any previously entered test report under EDCS – 1465481. This test report has been electronically authorized and archived using the CISCO Engineering Document Control system.



| | |
|--|----|
| SECTION 1: OVERVIEW | 3 |
| 1.1 TEST SUMMARY | 3 |
| SECTION 2: ASSESSMENT INFORMATION | 4 |
| 2.1 GENERAL | 4 |
| 2.4 TESTING FACILITIES | 5 |
| 2.6 EUT DESCRIPTION | 6 |
| SECTION 3: RESULT SUMMARY | 7 |
| 3.1 RESULTS SUMMARY TABLE | 7 |
| SECTION 4: SAMPLE DETAILS | 9 |
| 4.1 SAMPLE DETAILS | 9 |
| 4.4 SELECTED TEST MODE, MODULATION AND DATA RATE FOR TESTING | 9 |
| 4.5 ANTENNA INFORMATION | 10 |
| SECTION 5: MODIFICATIONS | 11 |
| 5.1 SAMPLE MODIFICATIONS PERFORMED DURING ASSESSMENT | 11 |
| SECTION 6: TARGET MAXIMUM CHANNEL POWER | 11 |
| THE FOLLOWING TABLE DETAILS THE MAXIMUM SUPPORTED TOTAL CHANNEL POWER FOR ALL OPERATING MODES. | 11 |
| APPENDIX A: TEST CASES | 12 |
| FREQUENCY STABILITY | 12 |
| 99% AND 26dB BANDWIDTH | 14 |
| MAXIMUM CONDUCTED OUTPUT POWER & EIRP | 22 |
| POWER SPECTRAL DENSITY | 33 |
| TRANSMITTER SPURIOUS EMISSIONS (UNDESIRABLE EMISSIONS) / OUT-OF-BAND EMISSIONS AND RESTRICTED BANDS | 45 |
| RECEIVER RADIATED SPURIOUS EMISSIONS | 54 |
| AC POWER LINE CONDUCTED EMISSIONS | 58 |
| APPENDIX B: PHOTOGRAPHS OF TEST SETUPS | 63 |
| APPENDIX C: TEST EQUIPMENT/SOFTWARE USED TO PERFORM THE TEST | 64 |



Section 1: Overview

1.1 Test Summary

Samples were assessed against the tests detailed in section 3 under the requirements of the following specifications:

| Emission | Immunity |
|---|----------|
| CFR47 Part 15.407 CFR47 Part 15.209 CFR47 Part 15.205 RSS-Gen Issue 4 RSS-210 Issue 8 | N/A |

Measurements were made in accordance with ANSI C63.10:2009, KDB Publication No.558074v3r2, ET docket 96-8 measurement method of spurious emission tolerance to the International Telecommunication Union (ITU) Recommendation SM329.



Section 2: Assessment Information

2.1 General

This report contains an assessment of an apparatus against Electromagnetic Compatibility Standards based upon tests carried out on the samples submitted. The testing was performed by and for the use of Cisco systems Inc:

With regard to this assessment, the following points should be noted:

- a) The results contained in this report relate only to the items tested and were obtained in the period between the date of the initial assessment and the date of issue of the report. Manufactured products will not necessarily give identical results due to production and measurement tolerances.
- b) The apparatus was set up and exercised using the configuration and modes of operation defined in this report only.
- c) Where relevant, the apparatus was only assessed using the susceptibility criteria defined in this report and the Test Assessment Plan (TAP).
- d) All testing was performed under the following environmental conditions:
 - Temperature 15°C to 35°C (54°F to 95°F)
 - Atmospheric Pressure 860mbar to 1060mbar (25.4" to 31.3")
 - Humidity 10% to 75*%

*[Where applicable] For ESD testing the humidity limits used were 30% to 60% and for EFT/B tests the humidity limits used were 25% to 75%.
- e) All AC testing was performed at the following supply voltage:
 - 110V 60 Hz (+/-20%)

This report must not be reproduced except in full, without written approval of Cisco Systems.

2.2 Date of testing

01-Oct-2014 – 15-Nov-2014

2.3 Report Issue Date

Cisco uses an electronic system to issue, store and control the revision of test reports. This system is called the Engineering Document Control System (EDCS). The actual report issue date is embedded into the original file on EDCS. Any copies of this report, either electronic or paper, that are not on EDCS must be considered uncontrolled.



2.4 Testing facilities

This assessment was performed by:

Testing Laboratory

Cisco Systems, Inc.,
170 West Tasman Drive
San Jose, CA 95134,
USA

Registration Numbers for Industry Canada

| Cisco System Site | Site Identifier |
|--------------------------|------------------------|
| Building P, 10m Chamber | Company #: 2461N-2 |
| Building P, 5m Chamber | Company #: 2461N-1 |
| Building I, 5m Chamber | Company #: 2461M-1 |

Test Engineers

Danh Le



2.5 Equipment Assessed (EUT)

WRP500-A-k9 Dual Band Router

2.6 EUT Description

The WRP500-A-K9 is the dual band Wireless-B, G, A, AC, N Broadband router with one WAN port, four 10/100 LAN ports for wired connections and two phone jacks for voice over Internet Protocol (VoIP) functionality. The WRP500-A-K9 uses advanced quality-of-service (QoS) functionality to preserve the consistency and clarity of voice and video communications. It keeps your data safe by supporting WPS2.0 and WPA/WPA2 and WAPI wireless security protocols, access limitations based on MAC and IP addresses, and a robust firewall that prevents against malicious external attacks to the network.

Additional features of the WRP500 Wireless Broadband Router include:

- WiFi 802.11a/ac/n
- Support 20 MHz, 40 MHz, 80 MHz in 5.0 GHz band
- Dual-band 2T2R mode with data rate up to 867 Mbps
- Greenfield, mixed mode legacy modes support
- Integrated LNA, PA and T/R switch
- IEEE 802.11 d/e/h/i/k/r/w support
- Security support for WFA WPA/WPA2 personal, WPS2.0, WAPI
- Supports 802.11w protectd managed frames
- QoS support of WFA WMM, WM PS
- 802.11 to 802.3 header translation iffload
- Per packet transmit power control



Section 3: Result Summary

3.1 Results Summary Table

Radiated Emissions

| Basic Standard | Test Details / Comments | Results |
|---|--|-------------|
| FCC15.209 Radiated Spurious and Harmonic Emissions RSS-Gen 6.13 Transmitter Spurious Emissions | FCC 15.209: The level of any unwanted emissions from an intentional radiator operating under these general provisions shall not exceed the level of the fundamental emission. Except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the table specified in the table in FCC§15.209(a). RSS-Gen: In measuring unwanted emissions, the spectrum shall be investigated from 30 MHz or the lowest radio frequency signal generated in the equipment, whichever is lower, without going below 9 kHz, up to at least the frequency given below: (a) If the equipment operates below 10 GHz: to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower. (b) If the equipment operates at or above 10 GHz: to the fifth harmonic of the highest fundamental frequency or to 100 GHz, whichever is lower. | Pass |
| FCC15.407(b) (1) TX Spurious Emission /Undesirable Emission RSS-210 A9.2 (1) Out of band Emissions | FCC 15.407: Undesirable emission limits. For transmitters operating in the 5.15-5.25 GHz, the maximum emissions outside of the frequency bands of operation shall be shall not exceed an e.i.r.p. of -27 dBm/MHz. RSS-210: Emissions outside of the band 5.15-5.25 GHz shall not exceed -27 dBm/MHz e.i.r.p. | Pass |
| FCC15.407(b)(7) FCC15.205 Restricted Bands RSS-Gen 8.10 | FCC 15.407: The provisions of §15.205 apply to intentional radiators operating under this section. FCC 15.205: Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands. (b) Except as provided in paragraphs (d) and (e) of this section, the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in §15.209. RSS-Gen: Unwanted emissions falling into restricted bands of Table 6 shall comply with the limits of Table 4 specified in RSS-Gen 8.9. | Pass |
| RSS-Gen 5.0 Receiver Spurious Emission | RSS-Gen: Spurious emissions from receivers shall not exceed the radiated limits shown in Table 2 of section 7.1.2 | Pass |

Conducted Emissions Summary Table

| Basic Standard | Test Details / Comments | Results |
|---|---|-------------|
| FCC15.207 Conducted Emissions RSS-Gen 8.8 AC Power Line Conducted Emissions | FCC 15.207: (a) Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 µH/50 ohms line impedance stabilization network (LISN). RSS-Gen: A radio apparatus that is designed to be connected to the public utility (AC) power line shall ensure that the radio frequency voltage, which is conducted back onto the AC power line on any frequency or frequencies within the band 0.15 MHz to 30 MHz shall not exceed the limits in Table 3 shown in this section. | Pass |

RF Conducted at Antenna Port



| Standard(s) | Test Details / Comments | Results |
|--|--|-------------|
| FCC15.407(a) (1) (ii) Max. Conducted Output power RSS-210 A9.2 (1) Transmitter Output Power and e.i.r.p. Requirements | FCC 15.407: For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi RSS-210: Band 5150-5250 MHz, the maximum e.i.r.p. shall not exceed 200 mW or $10 + 10 \log_{10} B$, dBm, whichever power is less. | Pass |
| FCC15.407 (a) (2) 26dB & 99% Bandwidth RSS-210 A9.2 / RSS-Gen 6.6 | FCC 15.407/RSS-210: For transmitters operating in the 5.15-5.25 GHz, the 26dB & 99% Bandwidth measurements are for references. | Pass |
| FCC15.407 (a) (1) (ii) Spectral Density RSS-210 A9.2 (1) | FCC 15.407: For the 5.15-5.25 GHz band, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. RSS-210: For the 5150 – 5250 MHz band, The e.i.r.p. spectral density shall not exceed 10 dBm in any 1.0 MHz band. | Pass |
| FCC15.407 (g) Frequency Stability RSS-Gen 6.11 | FCC 15.407/ RSS-Gen: Manufacturers of UNII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all condition as specified in the user manual. | Pass |

* DFS measurements & MPE calculation to report in separate reports



Section 4: Sample Details

4.1 Sample Details

Note: Each sample was evaluated to ensure that its condition was suitable to be used as a test sample prior to the commencement of testing. During preliminary testing, the slowest data rate and highest of each mode were evaluated. The “Worst Case” mode was determined to be 802.11a and 802.11ac with the slowest data rate. The “Worst Case” mode is the mode with highest emissions level.

| Sample Number | Equipment Details | Serial Number | Part Number |
|---------------|------------------------------|---------------|-------------|
| S01 | WRP-500-A-K9 Wireless router | CCQ17460S3U | 97908111 |

4.2 System Details

| System # | Description | Samples |
|----------|------------------------------------|-----------|
| 1 | Radio Test Sample and Power Supply | S01 & S02 |

4.3 Mode of Operation Details

The EUT supports the following modes of operation:

| Mode# | Description | Comments |
|-------|--|---|
| 1 | 802.11a | Up to 54 Mbps |
| 2 | 802.11n (HT20) MCS0 – MCS15 | Up to 144 Mbps |
| 3 | 802.11n (HT40) MCS0 – MCS15 | Up to 300 Mbps |
| 4 | 802.11ac (VTH20) MCS0 – MCS9 (VTH40) MCS0 – MCS9 (VTH80) MCS0 – MCS9 | Up to 87 Mbps Up to 200 Mbps Up to 433 Mbps |

4.4 Selected Test Mode, Modulation and Data Rate for testing

| Mode# | Test Mode | Modulation | Data Rate |
|-------|--|------------|---|
| 1* | 802.11a | BPSK | 6 Mbps |
| 2 | 802.11n (HT20) | BPSK | 6.5 Mbps (MCS0) |
| 3 | 802.11n (HT40) | BPSK | 13.5 Mbps (MCS0) |
| 4 | 802.11ac (VHT20) 802.11ac (VHT40) 802.11ac (VHT80) | BPSK | 6.5 Mbps (MCS0) 13.5 Mbps (MCS0) 29.3 Mbps (MCS0) |

Note1: Table above represents the worst case scenarios in all modulation and data rate combination for each mode.
 *: **Mode#1** was determined to be the worst case emissions of all modes and selected to perform radiated spurious emissions test.



4.5 Antenna Information

The following antennas were evaluated as part of this testing process. The antennas listed reflect the maximum gain allowed for each family type of antenna:

The following antennas were evaluated as part of this testing process. The antennas listed reflect the maximum gain allowed for each family type of antenna:

External Dual Band Antenna Gain:

| | Part number | Antenna Type | Antenna Gain (dBi) |
|----------------|-------------|------------------|--------------------|
| 2400-2483.5MHz | External | Omni-directional | 2.0 (Peak) |
| 4900 – 5825MHz | External | Omni-directional | 2.0 (Peak) |



Section 5: Modifications

5.1 Sample Modifications Performed During Assessment

No modifications were performed during assessment.

Section 6: Target Maximum Channel Power

The following table details the maximum supported Total Channel Power for all operating modes.

| Operating Mode | Maximum Channel Power (dBm) |
|-----------------------------------|-----------------------------|
| | Operating Bands |
| | UNII-1 |
| 802.11a (6 Mbps) | 17 |
| 802.11n HT20 (MCS0 – 6.5 Mbps) | 17 |
| 802.11n HT40 (MCS0 – 13.5 Mbps) | 12 |
| 802.11ac VHT20 (MCS0 – 6.5 Mbps) | 17 |
| 802.11ac VHT40 (MCS0 – 13.5 Mbps) | 12 |
| 802.11ac VHT80 (MCS0 – 29.3 Mbps) | 11 |



Appendix A: Test Cases

Frequency Stability

FCC 15.407 (g): Manufacturers of UNII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all condition as specified in the user manual.

Frequency Stability for 802.11a mode:

Center Frequencies 20MHz Occupied Channel BW

| Power Setting : 17 dBm <input type="checkbox"/> EIRP <input checked="" type="checkbox"/> Conducted | | | | | | | |
|--|----------|------------------|-----------------|-----------------|-------------|--------|---------|
| Data Rate: 6 Mbps | | | | | | | |
| DUT Frequency (MHz) | DUT Port | Temperature (°C) | Frequency (MHz) | Deviation (ppm) | Limit (ppm) | Result | Voltage |
| 5180.000000 | 1 | 21.000 | 5180.011467 | 2.155 | <= 20 | PASS | Vnom |
| 5240.000000 | 1 | 21.000 | 5240.013519 | 2.458 | <= 20 | PASS | Vnom |
| 5180.000000 | 1 | -20.000 | 5180.027439 | 5.158 | <= 20 | PASS | Vlow |
| 5240.000000 | 1 | -20.000 | 5240.028966 | 5.267 | <= 20 | PASS | Vlow |
| 5180.000000 | 1 | -20.000 | 5180.027469 | 5.163 | <= 20 | PASS | VHigh |
| 5240.000000 | 1 | -20.000 | 5240.028632 | 5.206 | <= 20 | PASS | VHigh |
| 5180.000000 | 1 | +50.000 | 5180.025331 | 4.761 | <= 20 | PASS | VLow |
| 5240.000000 | 1 | +50.000 | 5240.024080 | 4.378 | <= 20 | PASS | Vlow |
| 5180.000000 | 1 | +50.000 | 5180.022377 | 4.206 | <= 20 | PASS | VHigh |
| 5240.000000 | 1 | +50.000 | 5240.028175 | 5.123 | <= 20 | PASS | VHigh |

Center Frequencies 40MHz Occupied Channel BW

| Power Setting : 12 dBm <input type="checkbox"/> EIRP <input checked="" type="checkbox"/> Conducted | | | | | | | |
|--|----------|------------------|-----------------|-----------------|-------------|--------|---------|
| Data Rate: 13.5 Mbps | | | | | | | |
| DUT Frequency (MHz) | DUT Port | Temperature (°C) | Frequency (MHz) | Deviation (ppm) | Limit (ppm) | Result | Voltage |
| 5190.000000 | 1 | 21.000 | 5190.015148 | 2.853 | <= 20 | PASS | Vnom |
| 5230.000000 | 1 | 21.000 | 5230.018485 | 3.355 | <= 20 | PASS | Vnom |
| 5190.000000 | 1 | -20.000 | 5190.026375 | 4.967 | <= 20 | PASS | Vlow |
| 5230.000000 | 1 | -20.000 | 5230.029830 | 5.414 | <= 20 | PASS | Vlow |
| 5190.000000 | 1 | -20.000 | 5190.027461 | 5.172 | <= 20 | PASS | VHigh |
| 5230.000000 | 1 | -20.000 | 5230.034192 | 6.205 | <= 20 | PASS | VHigh |
| 5190.000000 | 1 | +50.000 | 5190.027280 | 5.137 | <= 20 | PASS | VLow |
| 5230.000000 | 1 | +50.000 | 5230.030658 | 5.564 | <= 20 | PASS | Vlow |
| 5190.000000 | 1 | +50.000 | 5190.022860 | 4.305 | <= 20 | PASS | VHigh |
| 5230.000000 | 1 | +50.000 | 5230.025057 | 4.548 | <= 20 | PASS | VHigh |



Center Frequencies 80MHz Occupied Channel BW

| Power Setting : 11 dBm <input type="checkbox"/> EIRP <input checked="" type="checkbox"/> Conducted | | | | | | | |
|--|----------|------------------|-----------------|-----------------|-------------|--------|---------|
| Data Rate: 29.3 Mbps | | | | | | | |
| DUT Frequency (MHz) | DUT Port | Temperature (°C) | Frequency (MHz) | Deviation (ppm) | Limit (ppm) | Result | Voltage |
| 5210.000000 | 1 | 21.000 | 5210.006898 | 1.304 | <= 20 | PASS | Vnom |
| 5210.000000 | 1 | -20.000 | 5210.013601 | 2.571 | <= 20 | PASS | Vlow |
| 5210.000000 | 1 | -20.000 | 5210.014101 | 2.666 | <= 20 | PASS | VHigh |
| 5210.000000 | 1 | +50.000 | 5210.009563 | 1.808 | <= 20 | PASS | VLow |
| 5210.000000 | 1 | +50.000 | 5210.014017 | 2.650 | <= 20 | PASS | VHigh |



99% and 26dB Bandwidth

FCC15.407 (a) (1) (ii) & RSS-Gen 6.6

The 99% occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5% of the total mean power of the given emission. There is no limit for 99% OBW.

The 26 dB emission is the width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 26 dB relative to the maximum level measured in the fundamental emission.

Test Procedure

Ref. KDB 789033 D02 General UNII Test Procedure New Rules v01 section C (1)
RSS-Gen issue 3 section 4.6.1

| |
|--|
| 99% BW and EBW (-6dB) |
| Test Procedure |
| 1. Set the radio in the continuous transmitting mode. 2. Allow the trace to stabilize. 3. Setting the x-dB bandwidth mode to -26dB and OBW power function to 99% within the measurement set up function. 4. Select the automatic OBW measurement function of an instrument to perform bandwidth measurement. 5. Capture graphs and record pertinent measurement data. |

Ref. KDB 789033 D02 General UNII Test Procedure New Rules v01 section C (1)
RSS-Gen issue 3 section 4.6.1

| |
|--|
| 99% BW and EBW (-6dB) |
| Test parameters |
| Span = 1.5 x to 5.0 times OBW RBW = approx. 1% to 5% of the OBW VBW \geq 3 x RBW Detector = Peak or where practical sample shall be used Trace = Max. Hold |



Recorded Test Data:

99% and 26dB Bandwidth for 802.a mode

| UNII-1 Band | | | | | | | |
|--------------------|---------------------|-------------------------------|--------------------------------|-------------------------------|--------------------------------|------------------------------------|--------|
| Frequency (MHz) | Data Rate (Mbps) | Ant. Port0 99% BW (MHz) | Ant. Port0 26dB BW (MHz) | Ant. Port1 99% BW (MHz) | Ant. Port1 26dB BW (MHz) | Limit 99% & 26dB BW (kHz) | Result |
| 5180 | 6 | 16.53 | 25.81 | 16.56 | 28.64 | None | Pass |
| 5200 | 6 | 16.41 | 19.13 | 16.49 | 24.65 | None | Pass |
| 5240 | 6 | 16.45 | 19.99 | 16.48 | 25.00 | None | Pass |

99% and 26dB Bandwidth for 802.11n (HT20) mode

| UNII-1 Band | | | | | | | |
|--------------------|---------------------|-------------------------------|--------------------------------|-------------------------------|-------------------------------|------------------------------------|--------|
| Frequency (MHz) | Data Rate (Mbps) | Ant. Port0 99% BW (MHz) | Ant. Port0 26dB BW (MHz) | Ant. Port1 99% BW (MHz) | Ant. Port1 6dB BW (MHz) | Limit 99% & 26dB BW (kHz) | Result |
| 5180 | MCS0 | 17.60 | 26.20 | 17.68 | 29.29 | None | Pass |
| 5200 | MCS0 | 17.60 | 20.85 | 17.65 | 28.77 | None | Pass |
| 5240 | MCS0 | 17.61 | 26.85 | 17.61 | 28.30 | None | Pass |

99% and 26dB Bandwidth for 802.n (HT40) mode

| UNII-1 Band | | | | | | | |
|--------------------|---------------------|-------------------------------|--------------------------------|-------------------------------|-------------------------------|------------------------------------|--------|
| Frequency (MHz) | Data Rate (Mbps) | Ant. Port0 99% BW (MHz) | Ant. Port0 26dB BW (MHz) | Ant. Port1 99% BW (MHz) | Ant. Port1 6dB BW (MHz) | Limit 99% & 26dB BW (kHz) | Result |
| 5190 | MCS0 | 35.79 | 39.27 | 35.94 | 38.70 | None | Pass |
| 5230 | MCS0 | 36.01 | 39.38 | 36.02 | 38.76 | None | Pass |



99% and 26dB Bandwidth for 802.ac mode

| UNII-1 Band | | | | | | | |
|-----------------|------------------|-------------------------|--------------------------|-------------------------|-------------------------|---------------------------|--------|
| Frequency (MHz) | Data Rate (Mbps) | Ant. Port0 99% BW (MHz) | Ant. Port0 26dB BW (MHz) | Ant. Port1 99% BW (MHz) | Ant. Port1 6dB BW (MHz) | Limit 99% & 26dB BW (kHz) | Result |
| 5180 | MCS0 | 17.55 | 19.76 | 17.60 | 19.12 | None | Pass |
| 5200 | MCS0 | 17.60 | 20.52 | 17.61 | 26.36 | None | Pass |
| 5240 | MCS0 | 17.61 | 27.61 | 17.58 | 25.17 | None | Pass |

99% and 26dB Bandwidth for 802.ac (VHT40) mode

| UNII-1 Band | | | | | | | |
|-----------------|------------------|-------------------------|--------------------------|-------------------------|-------------------------|---------------------------|--------|
| Frequency (MHz) | Data Rate (Mbps) | Ant. Port0 99% BW (MHz) | Ant. Port0 26dB BW (MHz) | Ant. Port1 99% BW (MHz) | Ant. Port1 6dB BW (MHz) | Limit 99% & 26dB BW (kHz) | Result |
| 5190 | MCS0 | 36.05 | 38.17 | 36.07 | 37.86 | None | Pass |
| 5230 | MCS0 | 37.03 | 41.73 | 35.94 | 38.73 | None | Pass |

99% and 26dB Bandwidth for 802.ac (VHT80) mode

| UNII-1 Band | | | | | | | |
|-----------------|------------------|-------------------------|--------------------------|-------------------------|-------------------------|---------------------------|--------|
| Frequency (MHz) | Data Rate (Mbps) | Ant. Port0 99% BW (MHz) | Ant. Port0 26dB BW (MHz) | Ant. Port1 99% BW (MHz) | Ant. Port1 6dB BW (MHz) | Limit 99% & 26dB BW (kHz) | Result |
| 5210 | MCS0 | 74.98 | 78.16 | 74.14 | 77.73 | None | Pass |



Graphical Test Results for 802.11a mode / UNII-1:

| 802.11a, 6Mbps | | 99% Bandwidth & 26 dB Bandwidth | |
|---|--|---|--|
| Ant.Port 0 | Ant.Port 1 | Ant.Port 0 | Ant.Port 1 |
| <p>Agilent 17:44:27 Oct 8, 2014</p> <p>Ch Freq 5.18 GHz</p> <p>Occupied Bandwidth</p> <p>20C, 5180MHz, 6Mbps, 802.11a M0 A0 index2631</p> <p>Ref 10.7 dBm *Atten 20 dB</p> <p>#Samp Log 10 dB/ Offst 0.7 dB</p> <p>Center 5.180 00 GHz Span 40 MHz</p> <p>#Res BW 200 kHz #VBW 620 kHz #Sweep 1 s (1000 pts)</p> <p>Occupied Bandwidth 16.5272 MHz</p> <p>Transmit Freq Error -2.332 kHz</p> <p>x dB Bandwidth 25.806 MHz*</p> | <p>Agilent 17:46:25 Oct 8, 2014</p> <p>Ch Freq 5.18 GHz</p> <p>Occupied Bandwidth</p> <p>20C, 5180MHz, 6Mbps, 802.11a M0 A1 index2631</p> <p>Ref 10.7 dBm *Atten 20 dB</p> <p>#Samp Log 10 dB/ Offst 0.7 dB</p> <p>Center 5.180 00 GHz Span 40 MHz</p> <p>#Res BW 200 kHz #VBW 620 kHz #Sweep 1 s (1000 pts)</p> <p>Occupied Bandwidth 16.5602 MHz</p> <p>Transmit Freq Error -10.876 kHz</p> <p>x dB Bandwidth 28.644 MHz*</p> | <p>Agilent 10:31:11 Oct 9, 2014</p> <p>Ch Freq 5.2 GHz</p> <p>Occupied Bandwidth</p> <p>20C, 5200MHz, 6Mbps, 802.11a M0 A0 index2631</p> <p>Ref 10.7 dBm *Atten 20 dB</p> <p>#Samp Log 10 dB/ Offst 0.7 dB</p> <p>Center 5.200 00 GHz Span 40 MHz</p> <p>#Res BW 200 kHz #VBW 620 kHz #Sweep 1 s (1000 pts)</p> <p>Occupied Bandwidth 16.4153 MHz</p> <p>Transmit Freq Error 3.662 kHz</p> <p>x dB Bandwidth 19.126 MHz*</p> | <p>Agilent 10:57:38 Oct 9, 2014</p> <p>Ch Freq 5.2 GHz</p> <p>Occupied Bandwidth</p> <p>20C, 5200MHz, 6Mbps, 802.11a M0 A1 index2631</p> <p>Ref 10.7 dBm *Atten 20 dB</p> <p>#Samp Log 10 dB/ Offst 0.7 dB</p> <p>Center 5.200 00 GHz Span 40 MHz</p> <p>#Res BW 200 kHz #VBW 620 kHz #Sweep 1 s (1000 pts)</p> <p>Occupied Bandwidth 16.4905 MHz</p> <p>Transmit Freq Error -1.344 kHz</p> <p>x dB Bandwidth 24.650 MHz*</p> |
| <p>Agilent 16:24:27 Nov 18, 2014</p> <p>Ch Freq 5.24 GHz</p> <p>Occupied Bandwidth</p> <p>20C, 5240MHz, 6Mbps, 802.11a M0 A0 x2631</p> <p>Ref 16.7 dBm *Atten 20 dB</p> <p>#Samp Log 10 dB/ Offst 6.7 dB</p> <p>Center 5.240 00 GHz Span 40 MHz</p> <p>#Res BW 200 kHz #VBW 620 kHz #Sweep 1 s (1000 pts)</p> <p>Occupied Bandwidth 16.4519 MHz</p> <p>Transmit Freq Error 4.666 kHz</p> <p>x dB Bandwidth 19.992 MHz*</p> | <p>Agilent 16:22:38 Nov 18, 2014</p> <p>Ch Freq 5.24 GHz</p> <p>Occupied Bandwidth</p> <p>20C, 5240MHz, 6Mbps, 802.11a M0 A1 x2631</p> <p>Ref 16.7 dBm *Atten 20 dB</p> <p>#Samp Log 10 dB/ Offst 6.7 dB</p> <p>Center 5.240 00 GHz Span 40 MHz</p> <p>#Res BW 200 kHz #VBW 620 kHz #Sweep 1 s (1000 pts)</p> <p>Occupied Bandwidth 16.4831 MHz</p> <p>Transmit Freq Error 18.847 kHz</p> <p>x dB Bandwidth 25.002 MHz*</p> | | |




Graphical Test Results for 802.11n (HT20) mode / UNII-1:

| 802.11n (HT20), MCS0 | | 99% Bandwidth & 6 dB Bandwidth | |
|---|--|---|--|
| Ant.Port 0 | | Ant.Port 1 | |
| * Agilent 13:38:43 Oct 10, 2014 | | * Agilent 13:41:13 Oct 10, 2014 | |
| Ch Freq 5.18 GHz Trig Free Occupied Bandwidth | | Ch Freq 5.18 GHz Trig Free Occupied Bandwidth | |
| 20C, 5180MHz, 6Mbps, 802.11a-n M0 A0 idx2631 Ref 10.7 dBm *Atten 20 dB | | 20C, 5180MHz, 6Mbps, 802.11a-n M0 A1 idx2631 Ref 10.7 dBm *Atten 20 dB | |
| | | | |
| Center 5.180 00 GHz Span 40 MHz #Res BW 200 kHz #VBW 620 kHz #Sweep 1 s (1000 pts) | | Center 5.180 00 GHz Span 40 MHz #Res BW 200 kHz #VBW 620 kHz #Sweep 1 s (1000 pts) | |
| Occupied Bandwidth Occ BW % Pwr 99.00 % 17.6045 MHz x dB -26.00 dB | | Occupied Bandwidth Occ BW % Pwr 99.00 % 17.6772 MHz x dB -26.00 dB | |
| Transmit Freq Error 33.409 kHz x dB Bandwidth 26.196 MHz* | | Transmit Freq Error 550.523 Hz x dB Bandwidth 29.287 MHz* | |
| Copyright 2000-2008 Agilent Technologies | | Copyright 2000-2008 Agilent Technologies | |
| * Agilent 15:29:23 Nov 17, 2014 | | * Agilent 15:31:11 Nov 17, 2014 | |
| Ch Freq 5.2 GHz Trig Free Occupied Bandwidth | | Ch Freq 5.2 GHz Trig Free Occupied Bandwidth | |
| 20C, 5200MHz, 6Mbps, 802.11a-n20 M0 A0 x2631 Ref 16.7 dBm *Atten 20 dB | | 20C, 5200MHz, 6Mbps, 802.11a-n20 M0 A1 x2631 Ref 16.7 dBm *Atten 20 dB | |
| | | | |
| Center 5.200 00 GHz Span 40 MHz #Res BW 200 kHz #VBW 620 kHz #Sweep 1 s (1000 pts) | | Center 5.200 00 GHz Span 40 MHz #Res BW 200 kHz #VBW 620 kHz #Sweep 1 s (1000 pts) | |
| Occupied Bandwidth Occ BW % Pwr 99.00 % 17.6030 MHz x dB -26.00 dB | | Occupied Bandwidth Occ BW % Pwr 99.00 % 17.6458 MHz x dB -26.00 dB | |
| Transmit Freq Error -7.505 kHz x dB Bandwidth 20.848 MHz* | | Transmit Freq Error -32.935 kHz x dB Bandwidth 28.771 MHz* | |
| Copyright 2000-2008 Agilent Technologies | | Copyright 2000-2008 Agilent Technologies | |
| * Agilent 14:47:56 Oct 10, 2014 | | * Agilent 14:51:15 Oct 10, 2014 | |
| Ch Freq 5.24 GHz Trig Free Occupied Bandwidth | | Ch Freq 5.24 GHz Trig Free Occupied Bandwidth | |
| 20C, 5240MHz, 6Mbps, 802.11a-n M0 A0 idx2831 Ref 10.7 dBm *Atten 20 dB | | 20C, 5240MHz, 6Mbps, 802.11a-n M0 A1 idx2831 Ref 10.7 dBm *Atten 20 dB | |
| | | | |
| Center 5.240 00 GHz Span 40 MHz #Res BW 200 kHz #VBW 620 kHz #Sweep 1 s (1000 pts) | | Center 5.240 00 GHz Span 40 MHz #Res BW 200 kHz #VBW 620 kHz #Sweep 1 s (1000 pts) | |
| Occupied Bandwidth Occ BW % Pwr 99.00 % 17.6069 MHz x dB -26.00 dB | | Occupied Bandwidth Occ BW % Pwr 99.00 % 17.6071 MHz x dB -26.00 dB | |
| Transmit Freq Error 12.271 kHz x dB Bandwidth 26.853 MHz* | | Transmit Freq Error 18.521 kHz x dB Bandwidth 28.301 MHz* | |
| Copyright 2000-2008 Agilent Technologies | | Copyright 2000-2008 Agilent Technologies | |



Graphical Test Results for 802.11n (HT40) mode / UNII-1:

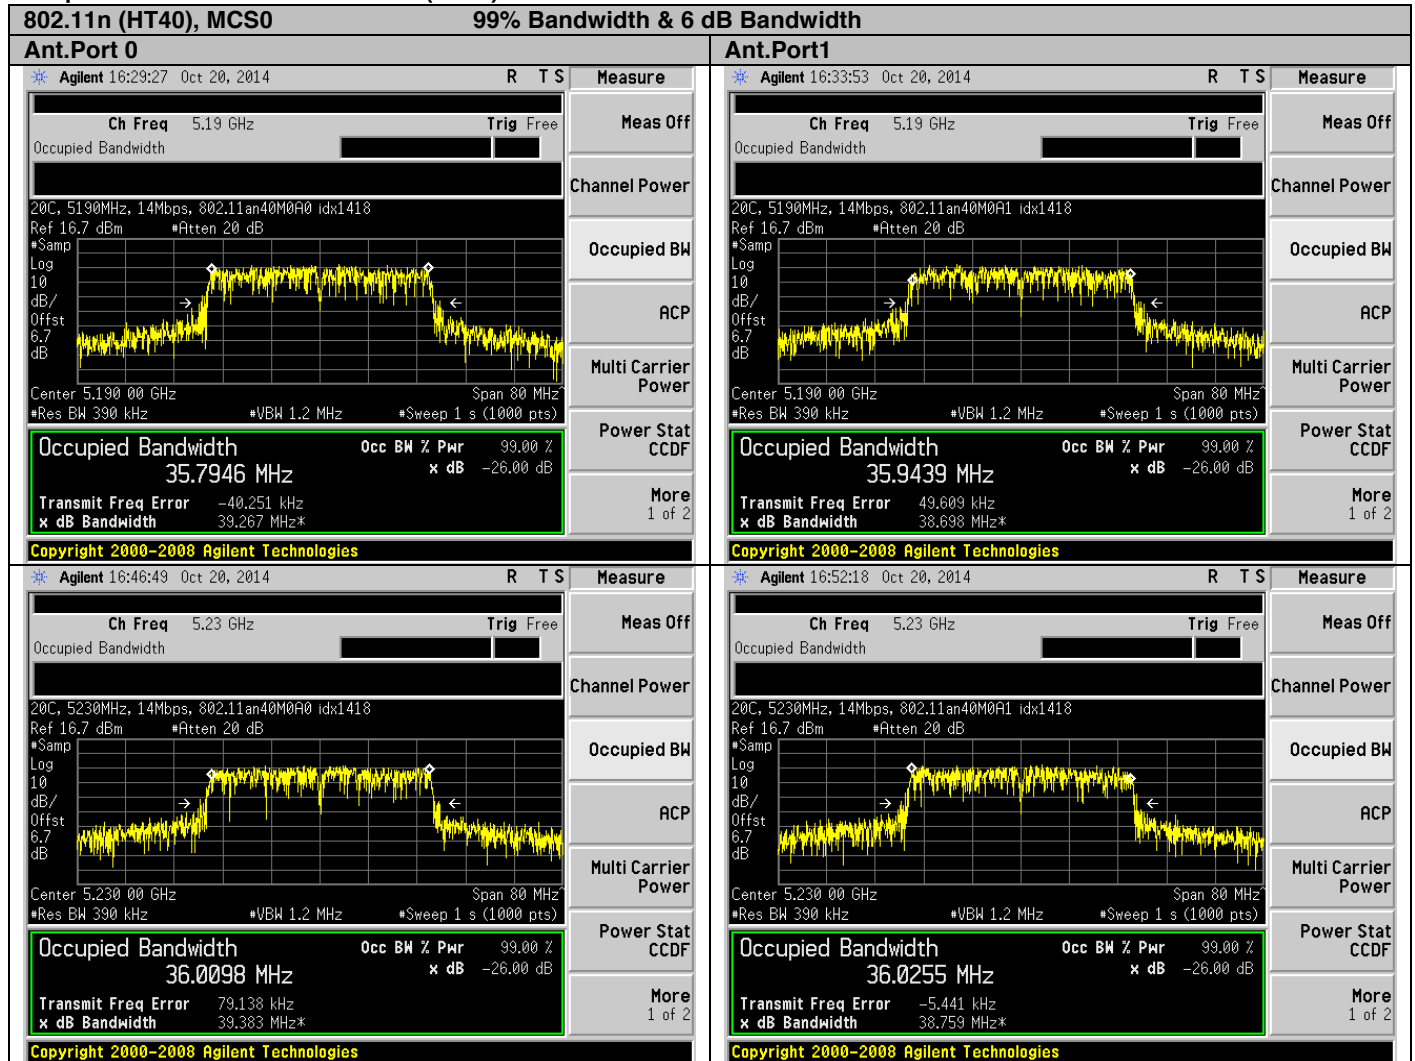







Graphical Test Results for 802.11ac mode / UNII-1:





| 802.11ac, MCS0 | | 99% Bandwidth & 6 dB Bandwidth | |
|---|--|---|---|
| Ant.Port 0 | Ant.Port 1 | Ant.Port 0 | Ant.Port 1 |
| <p>Agilent 16:23:20 Oct 23, 2014</p> <p>Ch Freq 5.18 GHz</p> <p>Occupied Bandwidth</p> <p>20C, 5180MHz, 6Mbps, 802.11ac20M0A0 id2630</p> <p>Ref 16.7 dBm *Atten 20 dB</p> <p>#Samp 10</p> <p>Log dB/Offst 6.7 dB</p> <p>Center 5.180 00 GHz Span 40 MHz</p> <p>#Res BW 200 kHz #VBW 620 kHz #Sweep 1 s (1000 pts)</p> <p>Occupied Bandwidth 17.5543 MHz</p> <p>Occ BW % Pwr 99.00 %</p> <p>x dB -26.00 dB</p> <p>Transmit Freq Error 2.695 kHz</p> <p>x dB Bandwidth 19.765 MHz*</p> | <p>Agilent 16:41:26 Oct 23, 2014</p> <p>Ch Freq 5.18 GHz</p> <p>Occupied Bandwidth</p> <p>20C, 5180MHz, 6Mbps, 802.11ac20M0A1 id2630</p> <p>Ref 16.7 dBm *Atten 20 dB</p> <p>#Samp 10</p> <p>Log dB/Offst 6.7 dB</p> <p>Center 5.180 00 GHz Span 40 MHz</p> <p>#Res BW 200 kHz #VBW 620 kHz #Sweep 1 s (1000 pts)</p> <p>Occupied Bandwidth 17.5984 MHz</p> <p>Occ BW % Pwr 99.00 %</p> <p>x dB -26.00 dB</p> <p>Transmit Freq Error 9.317 kHz</p> <p>x dB Bandwidth 19.123 MHz*</p> | <p>Agilent 16:20:30 Oct 23, 2014</p> <p>Ch Freq 5.2 GHz</p> <p>Occupied Bandwidth</p> <p>20C, 5200MHz, 6Mbps, 802.11ac20M0A0 id2630</p> <p>Ref 16.7 dBm *Atten 20 dB</p> <p>#Samp 10</p> <p>Log dB/Offst 6.7 dB</p> <p>Center 5.200 00 GHz Span 40 MHz</p> <p>#Res BW 200 kHz #VBW 620 kHz #Sweep 1 s (1000 pts)</p> <p>Occupied Bandwidth 17.5990 MHz</p> <p>Occ BW % Pwr 99.00 %</p> <p>x dB -26.00 dB</p> <p>Transmit Freq Error 31.849 kHz</p> <p>x dB Bandwidth 20.517 MHz*</p> | <p>Agilent 16:16:11 Oct 23, 2014</p> <p>Ch Freq 5.2 GHz</p> <p>Occupied Bandwidth</p> <p>20C, 5200MHz, 6Mbps, 802.11ac20M0A1 id2630</p> <p>Ref 16.7 dBm *Atten 20 dB</p> <p>#Samp 10</p> <p>Log dB/Offst 6.7 dB</p> <p>Center 5.200 00 GHz Span 40 MHz</p> <p>#Res BW 200 kHz #VBW 620 kHz #Sweep 1 s (1000 pts)</p> <p>Occupied Bandwidth 17.6140 MHz</p> <p>Occ BW % Pwr 99.00 %</p> <p>x dB -26.00 dB</p> <p>Transmit Freq Error 22.230 kHz</p> <p>x dB Bandwidth 26.365 MHz*</p> |
| <p>Agilent 17:27:58 Oct 23, 2014</p> <p>Ch Freq 5.24 GHz</p> <p>Occupied Bandwidth</p> <p>20C, 5240MHz, 6Mbps, 802.11ac20M0A0 id2630</p> <p>Ref 16.7 dBm *Atten 20 dB</p> <p>#Samp 10</p> <p>Log dB/Offst 6.7 dB</p> <p>Center 5.240 00 GHz Span 40 MHz</p> <p>#Res BW 200 kHz #VBW 620 kHz #Sweep 1 s (1000 pts)</p> <p>Occupied Bandwidth 17.6130 MHz</p> <p>Occ BW % Pwr 99.00 %</p> <p>x dB -26.00 dB</p> <p>Transmit Freq Error 9.494 kHz</p> <p>x dB Bandwidth 27.607 MHz*</p> | <p>Agilent 17:31:23 Oct 23, 2014</p> <p>Ch Freq 5.24 GHz</p> <p>Occupied Bandwidth</p> <p>20C, 5240MHz, 6Mbps, 802.11ac20M0A1 id2630</p> <p>Ref 16.7 dBm *Atten 20 dB</p> <p>#Samp 10</p> <p>Log dB/Offst 6.7 dB</p> <p>Center 5.240 00 GHz Span 40 MHz</p> <p>#Res BW 200 kHz #VBW 620 kHz #Sweep 1 s (1000 pts)</p> <p>Occupied Bandwidth 17.5809 MHz</p> <p>Occ BW % Pwr 99.00 %</p> <p>x dB -26.00 dB</p> <p>Transmit Freq Error -6.848 kHz</p> <p>x dB Bandwidth 25.168 MHz*</p> | | |



Graphical Test Results for 802.11ac (VHT40) mode / UNII-1:
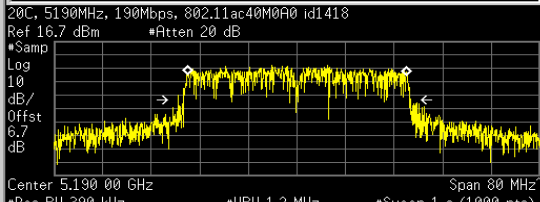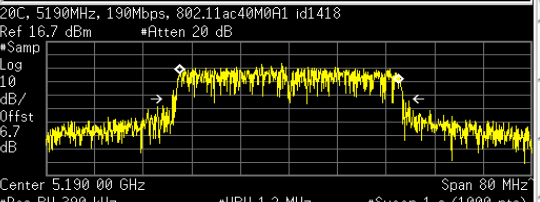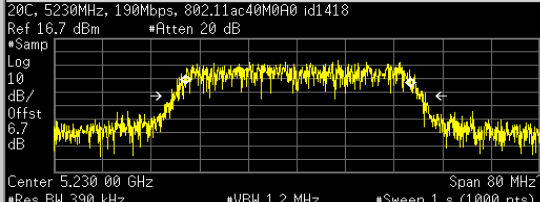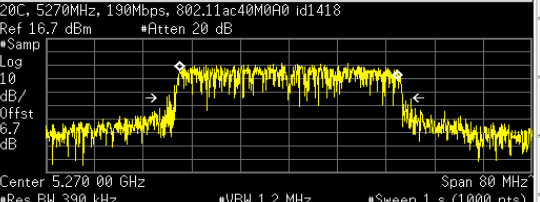
| 802.11ac40, MCS0 | | | | 99% Bandwidth & 6 dB Bandwidth | | | |
|---|--|--|--|--|--|---|--|
| Ant.Port 0 | | Ant.Port 1 | | Ant.Port 0 | | Ant.Port 1 | |
| * Agilent 14:15:55 Oct 27, 2014 Ch Freq 5.19 GHz Occupied Bandwidth 20C, 5190MHz, 190Mbps, 802.11ac40M0A0 id1418 Ref 16.7 dBm *Atten 20 dB  Center 5.190 00 GHz Span 80 MHz *Res BW 390 kHz *VBW 1.2 MHz *Sweep 1 s (1000 pts) | | * Agilent 14:21:16 Oct 27, 2014 Ch Freq 5.19 GHz Occupied Bandwidth 20C, 5190MHz, 190Mbps, 802.11ac40M0A1 id1418 Ref 16.7 dBm *Atten 20 dB  Center 5.190 00 GHz Span 80 MHz *Res BW 390 kHz *VBW 1.2 MHz *Sweep 1 s (1000 pts) | | * Agilent 14:26:53 Oct 27, 2014 Ch Freq 5.23 GHz Occupied Bandwidth 20C, 5230MHz, 190Mbps, 802.11ac40M0A0 id1418 Ref 16.7 dBm *Atten 20 dB  Center 5.230 00 GHz Span 80 MHz *Res BW 390 kHz *VBW 1.2 MHz *Sweep 1 s (1000 pts) | | * Agilent 14:33:31 Oct 27, 2014 Ch Freq 5.27 GHz Occupied Bandwidth 20C, 5270MHz, 190Mbps, 802.11ac40M0A0 id1418 Ref 16.7 dBm *Atten 20 dB  Center 5.270 00 GHz Span 80 MHz *Res BW 390 kHz *VBW 1.2 MHz *Sweep 1 s (1000 pts) | |
| Occupied Bandwidth 36.0548 MHz Occ BW % Pwr 99.00 % x dB -26.00 dB Transmit Freq Error 28.915 kHz x dB Bandwidth 38.175 MHz* | | Occupied Bandwidth 36.0719 MHz Occ BW % Pwr 99.00 % x dB -26.00 dB Transmit Freq Error -26.772 kHz x dB Bandwidth 37.864 MHz* | | Occupied Bandwidth 37.0323 MHz Occ BW % Pwr 99.00 % x dB -26.00 dB Transmit Freq Error 117.201 kHz x dB Bandwidth 41.730 MHz* | | Occupied Bandwidth 35.9427 MHz Occ BW % Pwr 99.00 % x dB -26.00 dB Transmit Freq Error -65.249 kHz x dB Bandwidth 38.732 MHz* | |
| Copyright 2000-2008 Agilent Technologies | | Copyright 2000-2008 Agilent Technologies | | Copyright 2000-2008 Agilent Technologies | | Copyright 2000-2008 Agilent Technologies | |

Graphical Test Results for 802.11ac (VHT80) mode / UNII-1:
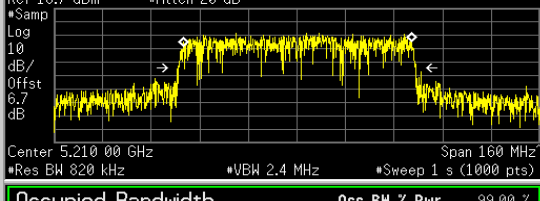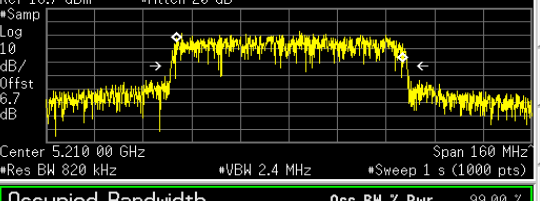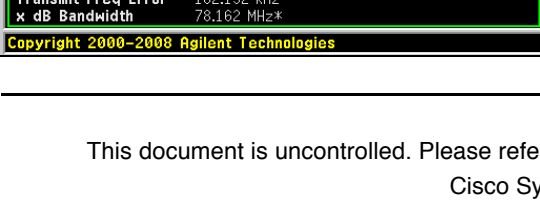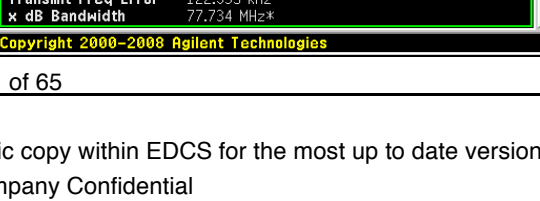
| 802.11ac80, MCS0 | | | | 99% Bandwidth & 6 dB Bandwidth | | | |
|---|--|--|--|---|--|--|--|
| Ant.Port 0 | | Ant.Port 1 | | Ant.Port 0 | | Ant.Port 1 | |
| * Agilent 08:52:50 Oct 27, 2014 Ch Freq 5.21 GHz Occupied Bandwidth 20C, 5210MHz, 29Mbps, 802.11ac80M0A0 id1014 Ref 16.7 dBm *Atten 20 dB  Center 5.210 00 GHz Span 160 MHz *Res BW 820 kHz *VBW 2.4 MHz *Sweep 1 s (1000 pts) | | * Agilent 08:55:29 Oct 27, 2014 Ch Freq 5.21 GHz Occupied Bandwidth 20C, 5210MHz, 29Mbps, 802.11ac80M0A1 id1014 Ref 16.7 dBm *Atten 20 dB  Center 5.210 00 GHz Span 160 MHz *Res BW 820 kHz *VBW 2.4 MHz *Sweep 1 s (1000 pts) | | * Agilent 08:52:50 Oct 27, 2014 Ch Freq 5.21 GHz Occupied Bandwidth 20C, 5210MHz, 29Mbps, 802.11ac80M0A0 id1014 Ref 16.7 dBm *Atten 20 dB  Center 5.210 00 GHz Span 160 MHz *Res BW 820 kHz *VBW 2.4 MHz *Sweep 1 s (1000 pts) | | * Agilent 08:55:29 Oct 27, 2014 Ch Freq 5.21 GHz Occupied Bandwidth 20C, 5210MHz, 29Mbps, 802.11ac80M0A1 id1014 Ref 16.7 dBm *Atten 20 dB  Center 5.210 00 GHz Span 160 MHz *Res BW 820 kHz *VBW 2.4 MHz *Sweep 1 s (1000 pts) | |
| Occupied Bandwidth 74.9816 MHz Occ BW % Pwr 99.00 % x dB -26.00 dB Transmit Freq Error 162.192 kHz x dB Bandwidth 78.162 MHz* | | Occupied Bandwidth 74.1433 MHz Occ BW % Pwr 99.00 % x dB -26.00 dB Transmit Freq Error 122.935 kHz x dB Bandwidth 77.734 MHz* | | Occupied Bandwidth 74.9816 MHz Occ BW % Pwr 99.00 % x dB -26.00 dB Transmit Freq Error 162.192 kHz x dB Bandwidth 78.162 MHz* | | Occupied Bandwidth 74.1433 MHz Occ BW % Pwr 99.00 % x dB -26.00 dB Transmit Freq Error 122.935 kHz x dB Bandwidth 77.734 MHz* | |
| Copyright 2000-2008 Agilent Technologies | | Copyright 2000-2008 Agilent Technologies | | Copyright 2000-2008 Agilent Technologies | | Copyright 2000-2008 Agilent Technologies | |



Maximum Conducted Output Power & EIRP

FCC 15.407(a) (1) (ii), (2)

For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi.

| FCC Maximum Conducted Output Power & EIRP Limits Table | | | | | | | | |
|--|-----------------------|--|----------------------------------|-------|---------------------------------|-------|----------------------|-------|
| UNII Band | Frequency Range (MHz) | 26dB Bandwidth (Smallest 26dB BW for all channels) (MHz) | Calculated Conducted Power Limit | | Constant Conducted Power Limits | | Constant EIRP Limits | |
| | | | (mW) | (dBm) | (mW) | (dBm) | (mW) | (dBm) |
| Mode: 802.11a | | | | | | | | |
| 1 | 5150-5250 | Not required | Not required | | 1000 | 30 | 4000 | 36 |
| Mode: 802.11n (HT20) | | | | | | | | |
| 1 | 5150-5250 | Not required | Not required | | 1000 | 30 | 4000 | 36 |
| Mode: 802.11n (HT40) | | | | | | | | |
| 1 | 5150-5250 | Not required | Not required | | 1000 | 30 | 4000 | 36 |
| Mode: 802.11ac | | | | | | | | |
| 1 | 5150-5250 | Not required | Not required | | 1000 | 30 | 4000 | 36 |
| Mode: 802.11ac (VHT40) | | | | | | | | |
| 1 | 5150-5250 | Not required | Not required | | 1000 | 30 | 4000 | 36 |
| Mode: 802.11ac (VHT80) | | | | | | | | |
| 1 | 5150-5250 | Not required | Not required | | 1000 | 30 | 4000 | 36 |



RSS-210 A9.2 (1), (2), (3)

Band 5150–5250 MHz

The maximum e.i.r.p. shall not exceed 200 mW (23 dBm) or $10 + 10 \log_{10} B$, dBm, whichever power is less. B is the 99% emission bandwidth in MHz.

The maximum conducted output power & EIRP limit shall be calculated by using the formula below:
 EIRP Limit = $10 \text{ dBm} + 10 * \log(\text{OBW})$ for UNII-1 Band; where OBW is the 99% BW

| RSS EIRP Limits Table | | | | | | | | | | |
|-------------------------------|------------------------------|--|---|--------------|--------------------------------------|--------------|-------------------------------|--------------|-----------------------------|--------------|
| UNII Band | Frequency Range (MHz) | 99% Bandwidth (Smallest 99% BW for all channels in UNII band) (MHz) | Calculated Max. Conducted Pwr Limits | | Constant Conducted Pwr Limits | | Calculated EIRP Limits | | Constant EIPR Limits | |
| | | | (mW) | (dBm) | (mW) | (dBm) | (mW) | (dBm) | (mW) | (dBm) |
| Mode: 802.11a | | | | | | | | | | |
| 1 | 5150-5250 | 16.41 | Nr | Nr | None | None | 164.1 | 22.15 | 200 | 23 |
| Mode: 802.11n (HT20) | | | | | | | | | | |
| 1 | 5150-5250 | 17.60 | Nr | Nr | None | None | 176.2 | 22.46 | 200 | 23 |
| Mode: 802.11n (HT40) | | | | | | | | | | |
| 1 | 5150-5250 | 35.79 | Nr | Nr | None | None | 358.1 | 25.54 | 200 | 23 |
| Mode: 802.11ac | | | | | | | | | | |
| 1 | 5150-5250 | 17.55 | Nr | Nr | None | None | 175.4 | 22.44 | 200 | 23 |
| Mode: 802.11ac (VHT40) | | | | | | | | | | |
| 1 | 5150-5250 | 35.94 | Nr | Nr | None | None | 359.7 | 25.56 | 200 | 23 |
| Mode: 802.11ac (VHT80) | | | | | | | | | | |
| 1 | 5150-5250 | 74.14 | Nr | Nr | None | None | 741.3 | 28.70 | 200 | 23 |

Note: In comparison between the calculated limit and the constant limit, the lower limit shall be used to determine compliance in accordance with the rule.

Test Procedure



Ref. KDB 789033 D02 General UNII Test Procedure New Rules v01 section E 2.b Method SA-1

Max. Conducted Output Power

Test Procedure

1. Set the radio in the continuous transmitting mode at full power
2. Compute power by integrating the spectrum across the EBW (or alternatively entire 99% OBW) of the signal using the instrument's band power measurement function. The integration shall be performed using the spectrum analyzer band-power measurement function with band limits set equal to the EBW or the OBW band edges.
3. Capture graphs and record pertinent measurement data.

Ref. KDB 789033 D02 General UNII Test Procedure New Rules v01 section E 2.b Method SA-1

Max. Conducted Output Power

Test parameters

Span \geq entire EBW (or alternatively the 99% OBW)
RBW = 1 MHz
VBW \geq 3 x RBW
Detector = RMS
Trace Average \geq 100
Sweep = Auto
Sweep Points \geq 2 x span/ RBW.



Recorded Test Data:

Max. Conducted Output Power for 802.11a mode

| Frequency (MHz) | Data Rate (Mbps) | Ant. Port0 Max. Conducted Output Power (dBm) | Ant. Port1 Max. Conducted Output Power (dBm) | Total Power Ant.P0+Ant.P1 (mW) / (dBm) | | Constant Conducted Output Pwr FCC Limits (dBm) | Calculated Conducted Output Pwr RSS Limits (dBm) | Result |
|--------------------|---------------------|---|---|---|-------|--|--|--------|
| UNII-1 Band | | | | | | | | |
| 5180 | 6 | 16.63 | 17.15 | 97.91 | 19.91 | 30 | None | Pass |
| 5200 | 6 | 16.54 | 16.95 | 94.63 | 19.76 | 30 | None | Pass |
| 5240 | 6 | 16.90 | 17.00 | 99.10 | 19.96 | 30 | None | Pass |

EIRP for 802.11a mode

| Frequency (MHz) | Data Rate (Mbps) | Total Power AP0 + AP1 (mW) / (dBm) | | Total EIRP = Total Power + Ant.G Ant. Gain = 2 dBi (dBm) | Constant EIRP Limits FCC (dBm) | Calculated EIRP Limits RSS (dBm) | Result |
|--------------------|---------------------|---|-------|--|---|---|--------|
| UNII-1 Band | | | | | | | |
| 5180 | 6 | 97.91 | 19.91 | 21.91 | 36 | 22.15 | Pass |
| 5200 | 6 | 94.63 | 19.76 | 21.76 | 36 | 22.15 | Pass |
| 5240 | 6 | 99.10 | 19.96 | 21.96 | 36 | 22.15 | Pass |

Max. Conducted Output Power for 802.11n (HT20) mode

| Frequency (MHz) | Data Rate (Mbps) | Ant. Port0 Max. Conducted Output Power (dBm) | Ant. Port1 Max. Conducted Output Power (dBm) | Total Power Ant.P0+Ant.P1 (mW) / (dBm) | | Constant Conducted Output Pwr FCC Limits (dBm) | Calculated Conducted Output Pwr RSS Limits (dBm) | Result |
|--------------------|---------------------|---|---|---|-------|--|--|--------|
| UNII-1 Band | | | | | | | | |
| 5180 | 6.5 | 17.04 | 17.08 | 106.0 | 20.25 | 30 | None | Pass |
| 5200 | 6.5 | 16.69 | 17.08 | 97.72 | 19.89 | 30 | None | Pass |
| 5240 | 6.5 | 17.57 | 17.15 | 109.0 | 20.37 | 30 | None | Pass |

EIRP for 802.11n (HT20) mode

| Frequency (MHz) | Data Rate (Mbps) | Total Power = Ant.P0+Ant.P1 (mW) / (dBm) | | Total EIRP = Total Power + Ant.G Ant. Gain = 2 dBi (dBm) | Constant EIRP FCC Limits (dBm) | Calculated EIRP RSS Limits (dBm) | Result |
|--------------------|---------------------|---|-------|--|---|---|--------|
| UNII-1 Band | | | | | | | |
| 5180 | 6.5 | 106.0 | 20.25 | 22.25 | 36 | 22.46 | Pass |
| 5200 | 6.5 | 97.72 | 19.89 | 21.89 | 36 | 22.46 | Pass |
| 5240 | 6.5 | 109.0 | 20.37 | 22.37 | 36 | 22.46 | Pass |



Max. Conducted Output Power for 802.11n (HT40) mode

| Frequency (MHz) | Data Rate (Mbps) | Ant. Port0 Max. Conducted Output Power (dBm) | Ant. Port1 Max. Conducted Output Power (dBm) | Total Power Ant.P0+Ant.P1 (mW) / (dBm) | | Calculated Conducted Output Pwr FCC Limits (dBm) | Calculated Conducted Output Pwr RSS Limits (dBm) | Result |
|--------------------|---------------------|---|---|---|-------|--|--|--------|
| UNII-1 Band | | | | | | | | |
| 5190 | 13.5 | 11.80 | 11.60 | 29.59 | 14.71 | 30 | None | Pass |
| 5230 | 13.5 | 12.11 | 12.03 | 32.21 | 15.08 | 30 | None | Pass |

EIRP for 802.11n (HT40) mode

| Frequency (MHz) | Data Rate (Mbps) | Total Power = Ant.P0+Ant.P1 (mW) / (dBm) | | Total EIRP = Total Power + Ant.G Ant. Gain = 2 dBi (dBm) | Constant EIRP Limits FCC (dBm) | Calculated EIRP Limits RSS (dBm) | Result |
|--------------------|---------------------|---|-------|--|---|---|--------|
| UNII-1 Band | | | | | | | |
| 5190 | 13.5 | 29.59 | 14.71 | 16.71 | 36 | 23 | Pass |
| 5230 | 13.5 | 32.21 | 15.08 | 17.08 | 36 | 23 | Pass |

Max. Conducted Output Power for 802.11ac mode

| Frequency (MHz) | Data Rate (Mbps) | Ant. Port0 Max. Conducted Output Power (dBm) | Ant. Port1 Max. Conducted Output Power (dBm) | Total Power Ant.P0+Ant.P1 (mW) / (dBm) | | Constant Conducted Output Pwr FCC Limits (dBm) | Calculated Conducted Output Pwr RSS Limits (dBm) | Result |
|--------------------|---------------------|---|---|---|-------|--|--|--------|
| UNII-1 Band | | | | | | | | |
| 5180 | 6.5 | 17.16 | 16.71 | 98.88 | 19.95 | 30 | None | Pass |
| 5200 | 6.5 | 16.99 | 16.90 | 98.98 | 19.96 | 30 | None | Pass |
| 5240 | 6.5 | 17.35 | 17.00 | 104.4 | 20.19 | 30 | None | Pass |

EIRP for 802.11ac mode

| Frequency (MHz) | Data Rate (Mbps) | Total Power AP0 + AP1 (mW) / (dBm) | | Total EIRP = Total Power + Ant.G Ant. Gain = 2 dBi (dBm) | Constant EIRP FCC Limits (dBm) | Calculated EIRP RSS Limits (dBm) | Result |
|--------------------|---------------------|---|-------|---|---|---|--------|
| UNII-1 Band | | | | | | | |
| 5180 | 6.5 | 98.88 | 19.95 | 21.95 | 36 | 22.44 | Pass |
| 5200 | 6.5 | 98.98 | 19.96 | 21.96 | 36 | 22.44 | Pass |
| 5240 | 6.5 | 104.4 | 20.19 | 22.19 | 36 | 22.44 | Pass |



Max. Conducted Output Power for 802.11ac (VHT40) mode

| Frequency (MHz) | Data Rate (Mbps) | Ant. Port0 Max. Conducted Output Power (dBm) | Ant. Port1 Max. Conducted Output Power (dBm) | Total Power Ant.P0+Ant.P1 (mW) / (dBm) | | Constant Conducted Pwr Limits FCC / RSS (dBm) | Constant Conducted Pwr Limits FCC / RSS (dBm) | Result |
|--------------------|---------------------|---|---|---|-------|---|--|--------|
| UNII-1 Band | | | | | | | | |
| 5190 | 13.5 | 11.82 | 11.69 | 29.96 | 14.76 | 30 | None | Pass |
| 5230 | 13.5 | 12.16 | 11.47 | 30.47 | 14.84 | 30 | None | Pass |

EIRP for 802.11ac (VHT40) mode

| Frequency (MHz) | Data Rate (Mbps) | Total Power = Ant.P0+Ant.P1 (mW) / (dBm) | | Total EIRP = Total Power + Ant.G Ant. Gain = 2 dBi (dBm) | Constant EIRP Limits FCC (dBm) | Constant EIRP Limits RSS (dBm) | Result |
|--------------------|---------------------|---|-------|--|---|---|--------|
| UNII-1 Band | | | | | | | |
| 5190 | 13.5 | 29.96 | 14.76 | 16.76 | 36 | 23 | Pass |
| 5230 | 13.5 | 30.47 | 14.84 | 16.84 | 36 | 23 | Pass |

Max. Conducted Output Power for 802.11ac (VHT80) mode

| Frequency (MHz) | Data Rate (Mbps) | Ant. Port0 Max. Conducted Output Power (dBm) | Ant. Port1 Max. Conducted Output Power (dBm) | Total Power Ant.P0+Ant.P1 (mW) / (dBm) | | Constant Conducted Pwr Limits FCC / RSS (dBm) | Constant Conducted Pwr Limits FCC / RSS (dBm) | Result |
|--------------------|---------------------|---|---|---|-------|---|--|--------|
| UNII-1 Band | | | | | | | | |
| 5210 | 29.3 | 10.76 | 10.87 | 24.13 | 13.83 | 30 | None | Pass |

EIRP for 802.11ac (VHT80) mode

| Frequency (MHz) | Data Rate (Mbps) | Total Power = Ant.P0+Ant.P1 (mW) / (dBm) | | Total EIRP = Total Power + Ant.G Ant. Gain = 2 dBi (dBm) | Constant EIRP Limits FCC (dBm) | Constant EIRP Limits RSS (dBm) | Result |
|--------------------|---------------------|---|-------|--|---|---|--------|
| UNII-1 Band | | | | | | | |
| 5210 | 29.3 | 24.13 | 13.83 | 15.83 | 36 | 23 | Pass |



Graphical Test Results for 802.11a mode / UNII-1:

| 802.11a, 6Mbps | | Maximum Conducted Output Power | |
|--|--|--|--|
| Ant.Port 0 | | Ant.Port 1 | |
| * Agilent 17:44:53 Oct 8, 2014 Ch Freq 5.18 GHz Trig Free Channel Power Averages: 100 20C, 5180MHz, 6Mbps, 802.11a M0 A0 index2631 Mkr1 5.181 06 GHz Ref 20.7 dBm *Atten 30 dB 5.93 dBm #Avg Log 10 dB/Offst 0.7 dB Center 5.180 00 GHz Span 40 MHz #Res BW 1 MHz #VBW 8 MHz #Sweep 100 ms (1000 pts) | | * Agilent 17:46:51 Oct 8, 2014 Ch Freq 5.18 GHz Trig Free Channel Power Averages: 100 20C, 5180MHz, 6Mbps, 802.11a M0 A1 index2631 Mkr1 5.178 78 GHz Ref 20.7 dBm *Atten 30 dB 6.39 dBm #Avg Log 10 dB/Offst 0.7 dB Center 5.180 00 GHz Span 40 MHz #Res BW 1 MHz #VBW 8 MHz #Sweep 100 ms (1000 pts) | |
| Channel Power 16.63 dBm /25.8059 MHz Power Spectral Density -57.49 dBm/Hz | | Channel Power 17.15 dBm /28.6440 MHz Power Spectral Density -57.42 dBm/Hz | |
| Copyright 2000-2008 Agilent Technologies | | Copyright 2000-2008 Agilent Technologies | |
| * Agilent 10:31:37 Oct 9, 2014 Ch Freq 5.2 GHz Trig Free Channel Power Averages: 100 20C, 5200MHz, 6Mbps, 802.11a M0 A0 index2631 Mkr1 5.200 98 GHz Ref 20.7 dBm *Atten 30 dB 5.70 dBm #Avg Log 10 dB/Offst 0.7 dB Center 5.200 00 GHz Span 40 MHz #Res BW 1 MHz #VBW 8 MHz #Sweep 100 ms (1000 pts) | | * Agilent 10:58:10 Oct 9, 2014 Ch Freq 5.2 GHz Trig Free Channel Power Averages: 100 20C, 5200MHz, 6Mbps, 802.11a M0 A1 index2631 Mkr1 5.198 82 GHz Ref 20.7 dBm *Atten 30 dB 6.21 dBm #Avg Log 10 dB/Offst 0.7 dB Center 5.200 00 GHz Span 40 MHz #Res BW 1 MHz #VBW 8 MHz #Sweep 100 ms (1000 pts) | |
| Channel Power 16.54 dBm /19.1259 MHz Power Spectral Density -56.28 dBm/Hz | | Channel Power 16.95 dBm /24.6498 MHz Power Spectral Density -56.97 dBm/Hz | |
| Copyright 2000-2008 Agilent Technologies | | Copyright 2000-2008 Agilent Technologies | |
| * Agilent 16:24:53 Nov 18, 2014 Ch Freq 5.24 GHz Trig Free Channel Power Averages: 100 20C, 5240MHz, 6Mbps, 802.11a M0 A0 x2631 Mkr1 5.238 94 GHz Ref 26.7 dBm *Atten 30 dB 6.11 dBm #Avg Log 10 dB/Offst 6.7 dB Center 5.240 00 GHz Span 40 MHz #Res BW 1 MHz #VBW 8 MHz #Sweep 100 ms (1000 pts) | | * Agilent 16:23:04 Nov 18, 2014 Ch Freq 5.24 GHz Trig Free Channel Power Averages: 100 20C, 5240MHz, 6Mbps, 802.11a M0 A1 x2631 Mkr1 5.240 86 GHz Ref 26.7 dBm *Atten 30 dB 6.28 dBm #Avg Log 10 dB/Offst 6.7 dB Center 5.240 00 GHz Span 40 MHz #Res BW 1 MHz #VBW 8 MHz #Sweep 100 ms (1000 pts) | |
| Channel Power 16.90 dBm /19.9923 MHz Power Spectral Density -56.11 dBm/Hz | | Channel Power 17.00 dBm /25.0023 MHz Power Spectral Density -56.98 dBm/Hz | |
| Copyright 2000-2008 Agilent Technologies | | Copyright 2000-2008 Agilent Technologies | |



Graphical Test Results for 802.11n (HT20) mode / UNII-1:

| 802.11n20, 6.5Mbps | | Maximum Conducted Output Power | |
|--|--|--|--|
| Ant.Port 0 | | Ant.Port 1 | |
| * Agilent 13:39:13 Oct 10, 2014 R T S Measure Ch Freq 5.18 GHz Trig Free Channel Power Averages: 100 20C, 5180MHz, 6Mbps, 802.11a-n M0 A0 idx2631 Mkr1 5.178 90 GHz Ref 20.7 dBm *Atten 30 dB 6.01 dBm #Avg Log 10 dB/ Offst 0.7 dB Center 5.180 00 GHz Span 40 MHz #Res BW 1 MHz #VBW 8 MHz #Sweep 100 ms (1000 pts) | | * Agilent 13:41:39 Oct 10, 2014 R T S Measure Ch Freq 5.18 GHz Trig Free Channel Power Averages: 100 20C, 5180MHz, 6Mbps, 802.11a-n M0 A1 idx2631 Mkr1 5.178 50 GHz Ref 20.7 dBm *Atten 30 dB 6.01 dBm #Avg Log 10 dB/ Offst 0.7 dB Center 5.180 00 GHz Span 40 MHz #Res BW 1 MHz #VBW 8 MHz #Sweep 100 ms (1000 pts) | |
| Channel Power 17.04 dBm /26.1964 MHz Power Spectral Density -57.14 dBm/Hz | | Channel Power 17.08 dBm /29.2874 MHz Power Spectral Density -57.59 dBm/Hz | |
| Copyright 2000-2008 Agilent Technologies | | Copyright 2000-2008 Agilent Technologies | |
| * Agilent 15:29:49 Nov 17, 2014 R T S Measure Ch Freq 5.2 GHz Trig Free Channel Power Averages: 100 20C, 5200MHz, 6Mbps, 802.11a-n20 M0 A0 x2631 Mkr1 5.200 82 GHz Ref 20.7 dBm *Atten 30 dB 5.70 dBm #Avg Log 10 dB/ Offst 6.7 dB Center 5.200 00 GHz Span 40 MHz #Res BW 1 MHz #VBW 8 MHz #Sweep 100 ms (1000 pts) | | * Agilent 15:31:37 Nov 17, 2014 R T S Measure Ch Freq 5.2 GHz Trig Free Channel Power Averages: 100 20C, 5200MHz, 6Mbps, 802.11a-n20 M0 A1 x2631 Mkr1 5.198 94 GHz Ref 20.7 dBm *Atten 30 dB 6.17 dBm #Avg Log 10 dB/ Offst 6.7 dB Center 5.200 00 GHz Span 40 MHz #Res BW 1 MHz #VBW 8 MHz #Sweep 100 ms (1000 pts) | |
| Channel Power 16.69 dBm /20.8481 MHz Power Spectral Density -56.50 dBm/Hz | | Channel Power 17.08 dBm /28.7706 MHz Power Spectral Density -57.51 dBm/Hz | |
| Copyright 2000-2008 Agilent Technologies | | Copyright 2000-2008 Agilent Technologies | |
| * Agilent 14:48:22 Oct 10, 2014 R T S Measure Ch Freq 5.24 GHz Trig Free Channel Power Averages: 100 20C, 5240MHz, 6Mbps, 802.11a-n M0 A0 idx2831 Mkr1 5.239 22 GHz Ref 20.7 dBm *Atten 30 dB 6.51 dBm #Avg Log 10 dB/ Offst 0.7 dB Center 5.240 00 GHz Span 40 MHz #Res BW 1 MHz #VBW 8 MHz #Sweep 100 ms (1000 pts) | | * Agilent 14:51:42 Oct 10, 2014 R T S Measure Ch Freq 5.24 GHz Trig Free Channel Power Averages: 100 20C, 5240MHz, 6Mbps, 802.11a-n M0 A1 idx2831 Mkr1 5.241 10 GHz Ref 20.7 dBm *Atten 30 dB 6.18 dBm #Avg Log 10 dB/ Offst 0.7 dB Center 5.240 00 GHz Span 40 MHz #Res BW 1 MHz #VBW 8 MHz #Sweep 100 ms (1000 pts) | |
| Channel Power 17.57 dBm /26.8526 MHz Power Spectral Density -56.72 dBm/Hz | | Channel Power 17.15 dBm /28.3005 MHz Power Spectral Density -57.37 dBm/Hz | |
| Copyright 2000-2008 Agilent Technologies | | Copyright 2000-2008 Agilent Technologies | |



Graphical Test Results for 802.11n (HT40) mode / UNII-1:

| 802.11n40, 13.5Mbps | | Maximum Conducted Output Power | |
|--|--|--|--|
| Ant.Port 0 * Agilent 16:29:53 Oct 20, 2014 R T S Measure Ch Freq 5.19 GHz Trig Free Channel Power Averages: 100 20C, 5190MHz, 14Mbps, 802.11an40M0A0 idx:1418 Mkr1 5.191 40 GHz Ref 26.7 dBm *Atten 30 dB -2.30 dBm #Avg Log 10 dB/Offst 6.7 dB Center 5.190 00 GHz Span 80 MHz #Res BW 1 MHz #VBW 8 MHz #Sweep 100 ms (1000 pts) Channel Power Power Spectral Density 11.80 dBm /39.2670 MHz -64.14 dBm/Hz Copyright 2000-2008 Agilent Technologies | | Ant.Port 1 * Agilent 16:34:19 Oct 20, 2014 R T S Measure Ch Freq 5.19 GHz Trig Free Channel Power Averages: 100 20C, 5190MHz, 14Mbps, 802.11an40M0A1 idx:1418 Mkr1 5.191 48 GHz Ref 26.7 dBm *Atten 30 dB -2.47 dBm #Avg Log 10 dB/Offst 6.7 dB Center 5.190 00 GHz Span 80 MHz #Res BW 1 MHz #VBW 8 MHz #Sweep 100 ms (1000 pts) Channel Power Power Spectral Density 11.60 dBm /38.6978 MHz -64.28 dBm/Hz Copyright 2000-2008 Agilent Technologies | |
| * Agilent 16:47:15 Oct 20, 2014 R T S Measure Ch Freq 5.23 GHz Trig Free Channel Power Averages: 100 20C, 5230MHz, 14Mbps, 802.11an40M0A0 idx:1418 Mkr1 5.228 04 GHz Ref 26.7 dBm *Atten 30 dB -1.99 dBm #Avg Log 10 dB/Offst 6.7 dB Center 5.230 00 GHz Span 80 MHz #Res BW 1 MHz #VBW 8 MHz #Sweep 100 ms (1000 pts) Channel Power Power Spectral Density 12.11 dBm /39.3835 MHz -63.84 dBm/Hz Copyright 2000-2008 Agilent Technologies | | * Agilent 16:52:48 Oct 20, 2014 R T S Measure Ch Freq 5.23 GHz Trig Free Channel Power Averages: 100 20C, 5230MHz, 14Mbps, 802.11an40M0A1 idx:1418 Mkr1 5.231 40 GHz Ref 26.7 dBm *Atten 30 dB -2.05 dBm #Avg Log 10 dB/Offst 6.7 dB Center 5.230 00 GHz Span 80 MHz #Res BW 1 MHz #VBW 8 MHz #Sweep 100 ms (1000 pts) Channel Power Power Spectral Density 12.03 dBm /38.7592 MHz -63.86 dBm/Hz Copyright 2000-2008 Agilent Technologies | |




Graphical Test Results for 802.11ac mode / UNII-1:


| 802.11ac, 6.5Mbps | | Maximum Conducted Output Power | |
|--|--|--|--|
| Ant.Port 0 | | Ant.Port 1 | |
| * Agilent 16:23:46 Oct 23, 2014 R T S Measure Ch Freq 5.18 GHz Trig Free Channel Power Averages: 100 20C, 5180MHz, 6Mbps, 802.11ac20M0A0 id2630 Mkr1 5.179 18 GHz Ref 26.7 dBm *Atten 30 dB 6.16 dBm #Avg Log 10 dB/ Offst 6.7 dB Center 5.180 00 GHz Span 40 MHz #Res BW 1 MHz #VBW 8 MHz #Sweep 100 ms (1000 pts) | | * Agilent 16:41:59 Oct 23, 2014 R T S Measure Ch Freq 5.18 GHz Trig Free Channel Power Averages: 100 20C, 5180MHz, 6Mbps, 802.11ac20M0A1 id2630 Mkr1 5.181 06 GHz Ref 26.7 dBm *Atten 30 dB 5.71 dBm #Avg Log 10 dB/ Offst 6.7 dB Center 5.180 00 GHz Span 40 MHz #Res BW 1 MHz #VBW 8 MHz #Sweep 100 ms (1000 pts) | |
| Channel Power 17.16 dBm /19.7650 MHz Power Spectral Density -55.80 dBm/Hz | | Channel Power 16.71 dBm /19.1227 MHz Power Spectral Density -56.11 dBm/Hz | |
| Copyright 2000-2008 Agilent Technologies | | Copyright 2000-2008 Agilent Technologies | |
| * Agilent 16:20:56 Oct 23, 2014 R T S Measure Ch Freq 5.2 GHz Trig Free Channel Power Averages: 100 20C, 5200MHz, 6Mbps, 802.11ac20M0A0 id2630 Mkr1 5.199 02 GHz Ref 26.7 dBm *Atten 30 dB 5.91 dBm #Avg Log 10 dB/ Offst 6.7 dB Center 5.200 00 GHz Span 40 MHz #Res BW 1 MHz #VBW 8 MHz #Sweep 100 ms (1000 pts) | | * Agilent 16:16:37 Oct 23, 2014 R T S Measure Ch Freq 5.2 GHz Trig Free Channel Power Averages: 100 20C, 5200MHz, 6Mbps, 802.11ac20M0A1 id2630 Mkr1 5.201 10 GHz Ref 26.7 dBm *Atten 30 dB 5.93 dBm #Avg Log 10 dB/ Offst 6.7 dB Center 5.200 00 GHz Span 40 MHz #Res BW 1 MHz #VBW 8 MHz #Sweep 100 ms (1000 pts) | |
| Channel Power 16.99 dBm /20.5167 MHz Power Spectral Density -56.13 dBm/Hz | | Channel Power 16.90 dBm /26.3654 MHz Power Spectral Density -57.31 dBm/Hz | |
| Copyright 2000-2008 Agilent Technologies | | Copyright 2000-2008 Agilent Technologies | |
| * Agilent 17:28:31 Oct 23, 2014 R T S Measure Ch Freq 5.24 GHz Trig Free Channel Power Averages: 100 20C, 5240MHz, 6Mbps, 802.11ac20M0A0 id2630 Mkr1 5.241 10 GHz Ref 26.7 dBm *Atten 30 dB 6.27 dBm #Avg Log 10 dB/ Offst 6.7 dB Center 5.240 00 GHz Span 40 MHz #Res BW 1 MHz #VBW 8 MHz #Sweep 100 ms (1000 pts) | | * Agilent 17:31:49 Oct 23, 2014 R T S Measure Ch Freq 5.24 GHz Trig Free Channel Power Averages: 100 20C, 5240MHz, 6Mbps, 802.11ac20M0A1 id2630 Mkr1 5.240 90 GHz Ref 26.7 dBm *Atten 30 dB 5.93 dBm #Avg Log 10 dB/ Offst 6.7 dB Center 5.240 00 GHz Span 40 MHz #Res BW 1 MHz #VBW 8 MHz #Sweep 100 ms (1000 pts) | |
| Channel Power 17.35 dBm /27.6070 MHz Power Spectral Density -57.06 dBm/Hz | | Channel Power 17.00 dBm /25.1679 MHz Power Spectral Density -57.01 dBm/Hz | |
| Copyright 2000-2008 Agilent Technologies | | Copyright 2000-2008 Agilent Technologies | |



Graphical Test Results for 802.11ac (VHT40) mode / UNII-1:

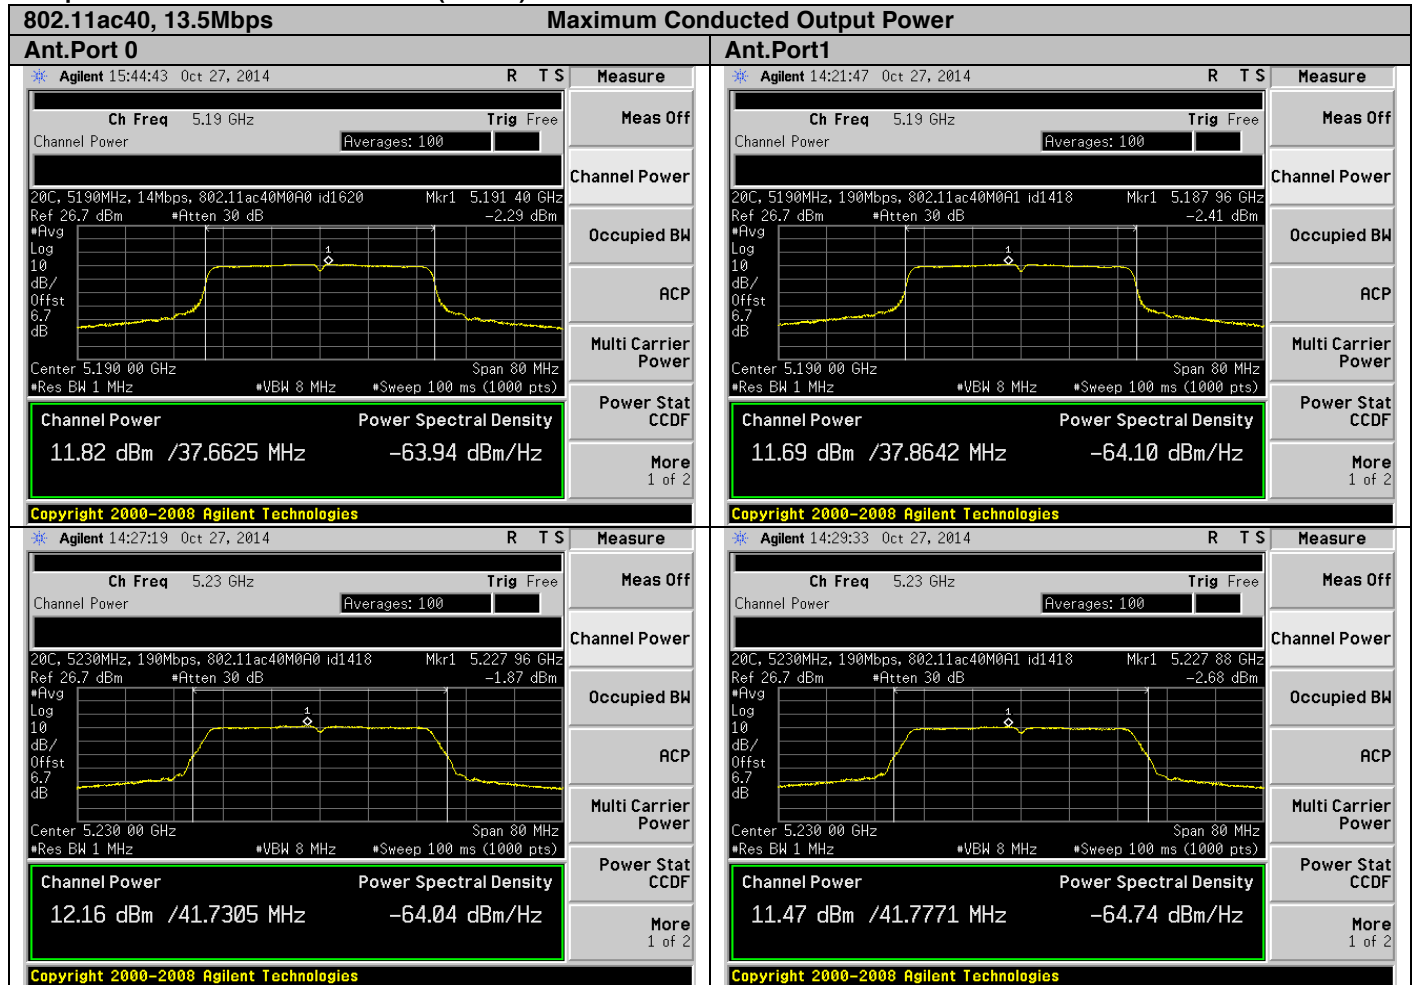

Graphical Test Results for 802.11ac (VHT80) mode / UNII-1

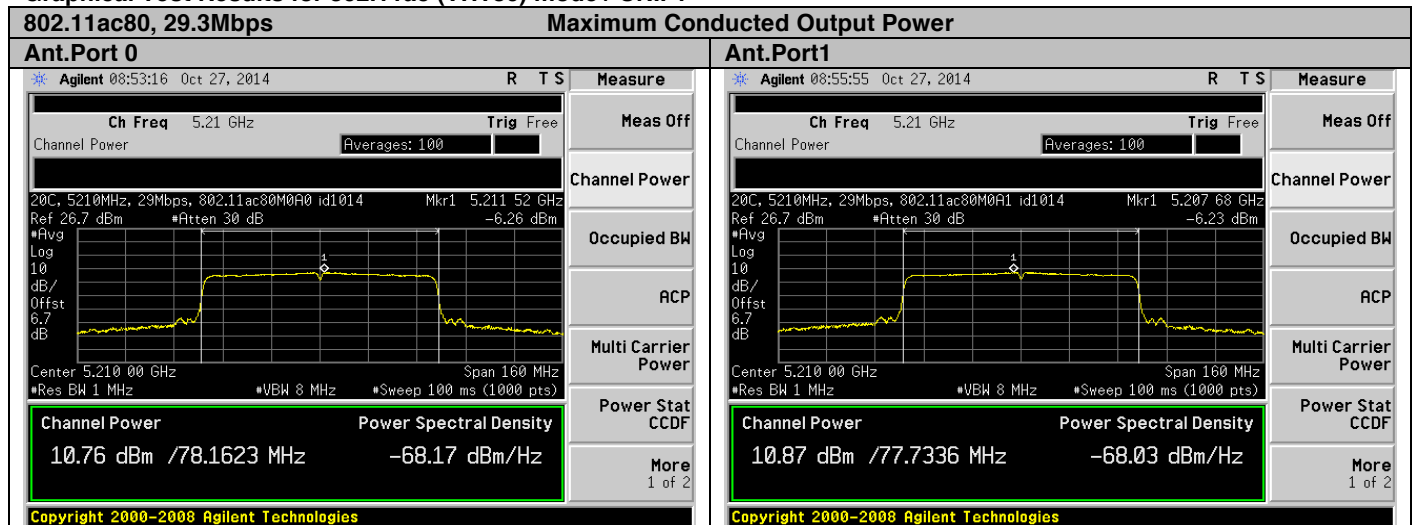



Power Spectral Density

FCC 15.407(a) (1) (ii), (2);

For an indoor access point operating in the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1MHz band.

RSS-210 A9.2 (1), (2), (3)

For the 5150 – 5250 MHz band,
The e.i.r.p. spectral density shall not exceed 10 dBm in any 1.0 MHz band.

Test Procedure

Ref. KDB 789033 D02 General UNII Test Procedure New Rules v01 section F

| |
|--|
| Max. Conducted Output Power Test Procedure |
| 1. Set the radio in the continuous transmitting mode at full power 2. Use peak search function to find the peak value 3. Capture graphs and record pertinent measurement data. |

Ref. KDB 789033 D02 General UNII Test Procedure New Rules v01 section E 2.b **Method SA-1**

| |
|--|
| Max. Conducted Output Power Test parameters |
| Span \geq entire EBW (or alternatively the 99% OBW) RBW = 1 MHz VBW \geq 3 x RBW Detector = RMS Trace Average \geq 100 Sweep = Auto Sweep Points \geq 2 x span/ RBW. |



Max. Power Spectral Density Recorded Test Data:

Max. Power Spectral Density for 802.11a mode

| Frequency (MHz) | Data Rate (Mbps) | Ant. Port0 Max. PSD (dBm) | Ant. Port1 Max. PSD (dBm) | Total PSD Ant.P0+Ant.P1 (mW) / (dBm) | | Constant Conducted PSD FCC Limits (dBm) | Calculated Conducted PSD RSS Limits (dBm) | Result |
|--------------------|---------------------|---------------------------------|---------------------------------|---|------|---|---|--------|
| UNII-1 Band | | | | | | | | |
| 5180 | 6 | 4.97 | 4.87 | 6.21 | 7.93 | 17 | None | Pass |
| 5200 | 6 | 4.73 | 4.77 | 5.97 | 7.76 | 17 | None | Pass |
| 5240 | 6 | 4.93 | 4.85 | 6.17 | 7.90 | 17 | None | Pass |

EIRP Spectral Density for 802.11a mode

| Frequency (MHz) | Data Rate (Mbps) | Total PSD AP0 + AP1 (mW) / (dBm) | | Total EIRP PSD = Total Power + Ant.G Ant. Gain = 2 dBi (dBm) | Constant EIRP Limits FCC (dBm) | Calculated EIRP Limits RSS (dBm) | Result |
|--------------------|---------------------|---|------|--|---|---|--------|
| UNII-1 Band | | | | | | | |
| 5180 | 6 | 6.21 | 7.93 | 9.93 | None | 10 | Pass |
| 5200 | 6 | 5.97 | 7.76 | 9.76 | None | 10 | Pass |
| 5240 | 6 | 6.17 | 7.90 | 9.90 | None | 10 | Pass |

Max. PSD for 802.11n (HT20) mode

| Frequency (MHz) | Data Rate (Mbps) | Ant. Port0 Max. PSD (dBm) | Ant. Port1 Max. PSD (dBm) | Total PSD Ant.P0+Ant.P1 (mW) / (dBm) | | Constant Conducted PSD FCC Limits (dBm) | Calculated Conducted PSD RSS Limits (dBm) | Result |
|--------------------|---------------------|---------------------------------|---------------------------------|---|------|---|---|--------|
| UNII-1 Band | | | | | | | | |
| 5180 | 6.5 | 4.75 | 4.67 | 5.92 | 7.72 | 17 | None | Pass |
| 5200 | 6.5 | 4.62 | 4.60 | 5.78 | 7.62 | 17 | None | Pass |
| 5240 | 6.5 | 4.49 | 4.61 | 5.70 | 7.56 | 17 | None | Pass |

EIRP Spectral Density for 802.11n (HT20) mode

| Frequency (MHz) | Data Rate (Mbps) | Total PSD AP0 + AP1 (mW) / (dBm) | | Total EIRP SD = Total Power + Ant.G Ant. Gain = 2 dBi (dBm) | Constant EIRP Limits FCC (dBm) | Calculated EIRP Limits RSS (dBm) | Result |
|--------------------|---------------------|---|------|---|---|---|--------|
| UNII-1 Band | | | | | | | |
| 5180 | 6.5 | 5.92 | 7.72 | 9.72 | None | 10 | Pass |
| 5200 | 6.5 | 5.78 | 7.62 | 9.62 | None | 10 | Pass |
| 5240 | 6.5 | 5.70 | 7.56 | 9.56 | None | 10 | Pass |



Max. Power Spectral Density for 802.11n (HT40) mode

| Frequency (MHz) | Data Rate (Mbps) | Ant. Port0 Max. Conducted Output Power (dBm) | Ant. Port1 Max. Conducted Output Power (dBm) | Total PSD Ant.P0+Ant.P1 (mW) / (dBm) | | Calculated Conducted Output Pwr FCC Limits (dBm) | Calculated Conducted Output Pwr RSS Limits (dBm) | Result |
|--------------------|---------------------|---|---|---|------|--|--|--------|
| UNII-1 Band | | | | | | | | |
| 5190 | 13.5 | -2.42 | -2.61 | 1.12 | 0.50 | 17 | None | Pass |
| 5230 | 13.5 | -2.11 | -2.16 | 1.22 | 0.87 | 17 | None | Pass |

EIRP Spectral Density for 802.11n (HT40) mode

| Frequency (MHz) | Data Rate (Mbps) | Total PSD AP0 + AP1 (mW) / (dBm) | | Total EIRP SD = Total Power + Ant.G Ant. Gain = 2 dBi (dBm) | Constant EIRP Limits FCC (dBm) | Calculated EIRP Limits RSS (dBm) | Result |
|--------------------|---------------------|---|------|---|---|---|--------|
| UNII-1 Band | | | | | | | |
| 5190 | 13.5 | 1.12 | 0.50 | 2.50 | None | 10 | Pass |
| 5230 | 13.5 | 1.22 | 0.87 | 2.87 | None | 10 | Pass |

Max. Power Spectral Density for 802.11ac mode

| Frequency (MHz) | Data Rate (Mbps) | Ant. Port0 Max. PSD (dBm) | Ant. Port1 Max. PSD (dBm) | Total PSD Ant.P0+Ant.P1 (mW) / (dBm) | | Constant Conducted PSD FCC Limits (dBm) | Calculated Conducted PSD RSS Limits (dBm) | Result |
|--------------------|---------------------|---------------------------------|---------------------------------|---|------|---|---|--------|
| UNII-1 Band | | | | | | | | |
| 5180 | 6.5 | 4.71 | 4.58 | 5.83 | 7.66 | 17 | None | Pass |
| 5200 | 6.5 | 4.94 | 4.44 | 5.90 | 7.71 | 17 | None | Pass |
| 5240 | 6.5 | 4.74 | 4.83 | 6.02 | 7.79 | 17 | None | Pass |

EIRP Spectral Density for 802.11ac mode

| Frequency (MHz) | Data Rate (Mbps) | Total PSD AP0 + AP1 (mW) / (dBm) | | Total EIRP SD = Total Power + Ant.G Ant. Gain = 2 dBi (dBm) | Constant EIRP Limits FCC (dBm) | Calculated EIRP Limits RSS (dBm) | Result |
|--------------------|---------------------|---|------|---|---|---|--------|
| UNII-1 Band | | | | | | | |
| 5180 | 6.5 | 5.83 | 7.66 | 9.66 | None | 10 | Pass |
| 5200 | 6.5 | 5.90 | 7.71 | 9.71 | None | 10 | Pass |
| 5240 | 6.5 | 6.02 | 7.79 | 9.79 | None | 10 | Pass |



Max. Power Spectral Density for 802.11ac (VHT40) mode

| Frequency (MHz) | Data Rate (Mbps) | Ant. Port0 Max. PSD (dBm) | Ant. Port1 Max. PSD (dBm) | Total PSD Ant.P0+Ant.P1 (mW) / (dBm) | | Constant Conducted PSD FCC Limits (dBm) | Calculated Conducted PSD RSS Limits (dBm) | Result |
|--------------------|---------------------|---------------------------------|---------------------------------|---|------|---|---|--------|
| UNII-1 Band | | | | | | | | |
| 5190 | 13.5 | -2.40 | -2.51 | 1.14 | 0.56 | 17 | None | Pass |
| 5230 | 13.5 | -1.91 | -2.69 | 1.18 | 0.73 | 17 | None | Pass |

EIRP Spectral Density for 802.11ac (VHT40) mode

| Frequency (MHz) | Data Rate (Mbps) | Total PSD = Ant.P0+Ant.P1 (mW) / (dBm) | | Total EIRP SD = Total Power + Ant.G Ant. Gain = 2 dBi (dBm) | Constant EIRP Limits FCC (dBm) | Calculated EIRP Limits RSS (dBm) | Result |
|--------------------|---------------------|---|------|---|---|---|--------|
| UNII-1 Band | | | | | | | |
| 5190 | 13.5 | 1.14 | 0.56 | 2.56 | None | 10 | Pass |
| 5230 | 13.5 | 1.18 | 0.73 | 2.73 | None | 10 | Pass |

Max. Power Spectral Density for 802.11ac (VHT80) mode


| Frequency (MHz) | Data Rate (Mbps) | Ant. Port0 Max. PSD (dBm) | Ant. Port1 Max. PSD (dBm) | Total PSD Ant.P0+Ant.P1 (mW) / (dBm) | | Constant Conducted PSD FCC Limits (dBm) | Calculated Conducted PSD RSS Limits (dBm) | Result |
|--------------------|---------------------|---------------------------------|---------------------------------|---|-------|---|--|--------|
| UNII-1 Band | | | | | | | | |
| 5210 | 29.3 | -6.50 | -6.42 | 0.45 | -3.45 | 17 | None | Pass |

EIRP Spectral Density for 802.11ac (VHT80) mode

| Frequency (MHz) | Data Rate (Mbps) | Total PSD = Ant.P0+Ant.P1 (mW) / (dBm) | | Total EIRP SP = Total Power + Ant.G Ant. Gain = 2 dBi (dBm) | Constant EIRP Limits FCC (dBm) | Constant EIRP Limits RSS (dBm) | Result |
|--------------------|---------------------|---|-------|---|---|---|--------|
| UNII-1 Band | | | | | | | |
| 5210 | 29.3 | 0.45 | -3.45 | -1.45 | None | 10 | Pass |




Graphical Test Results for 802.11a mode / UNII-1:

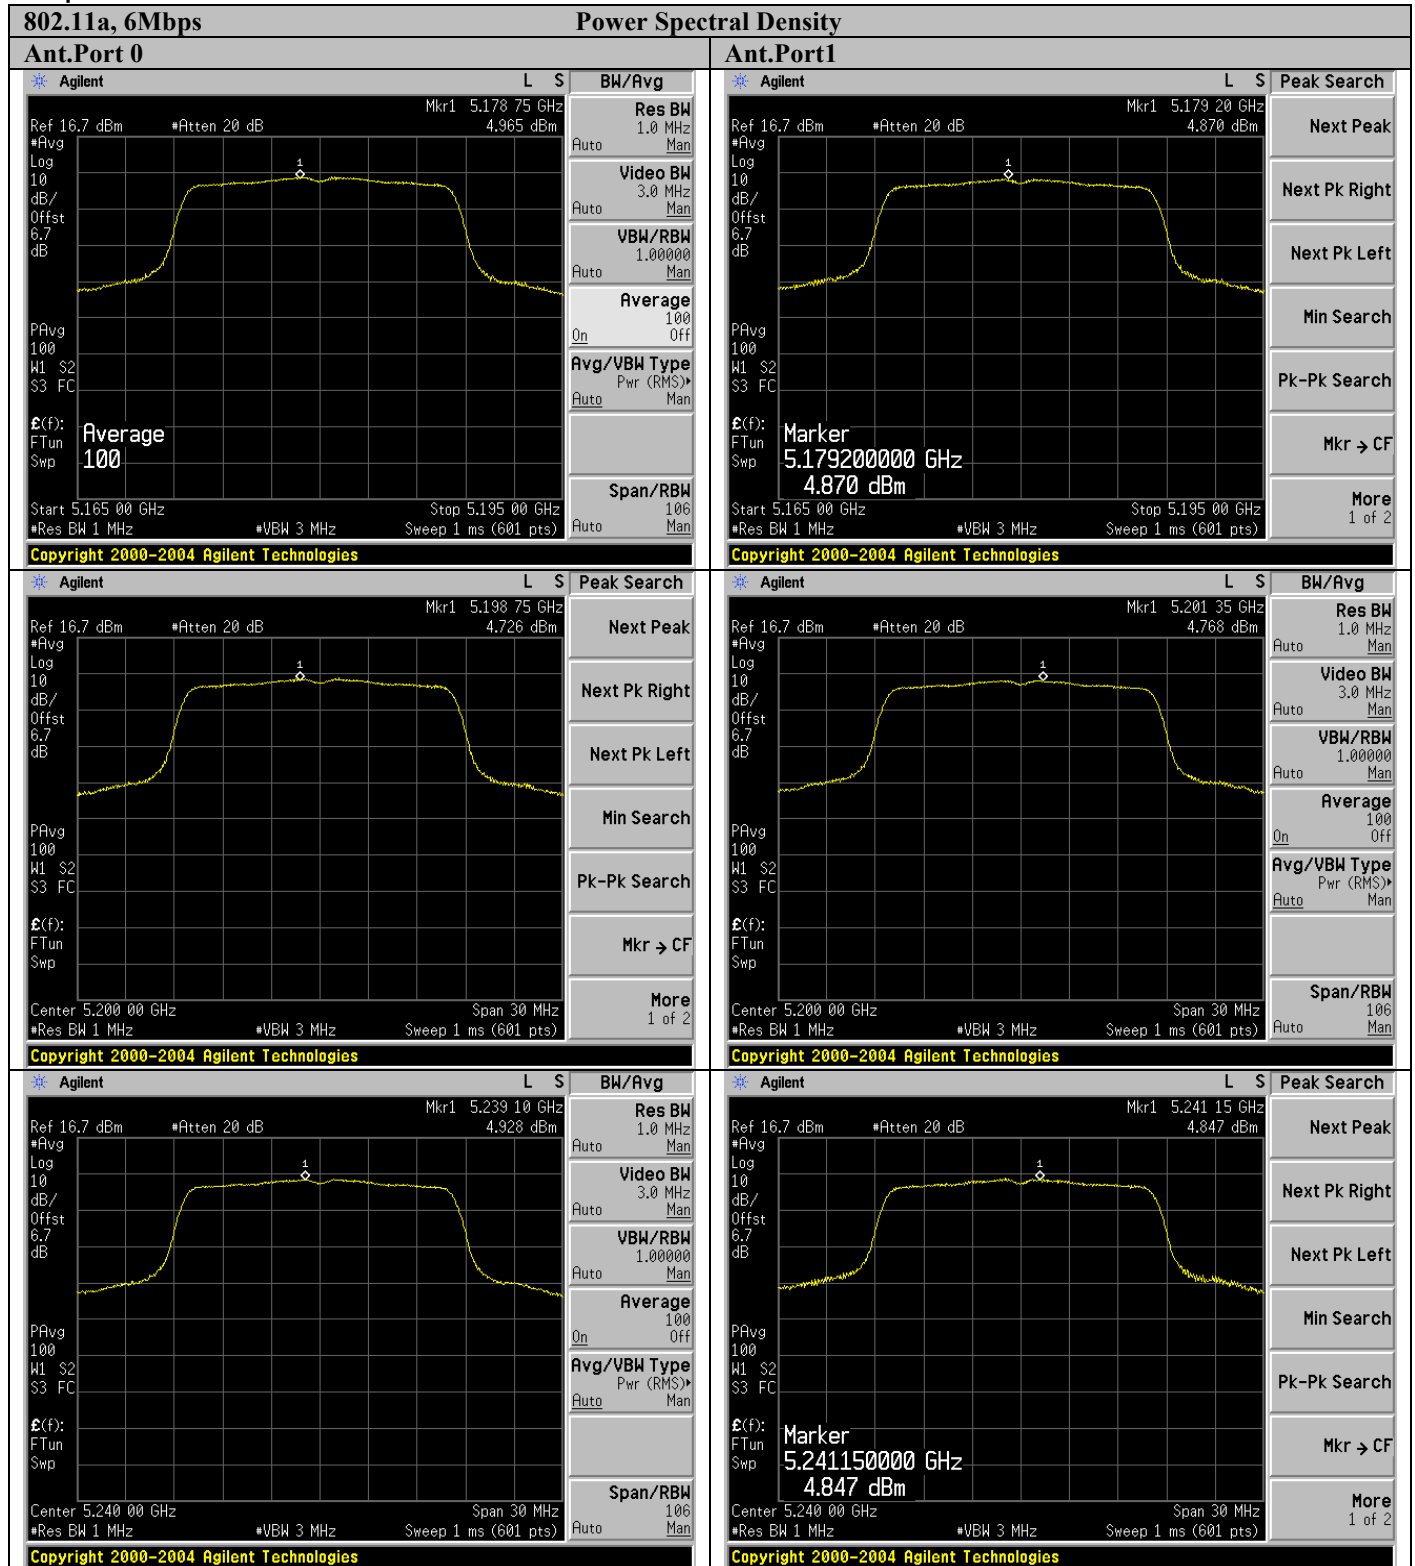




Graphical Test Results for 802.11a mode / UNII-2:

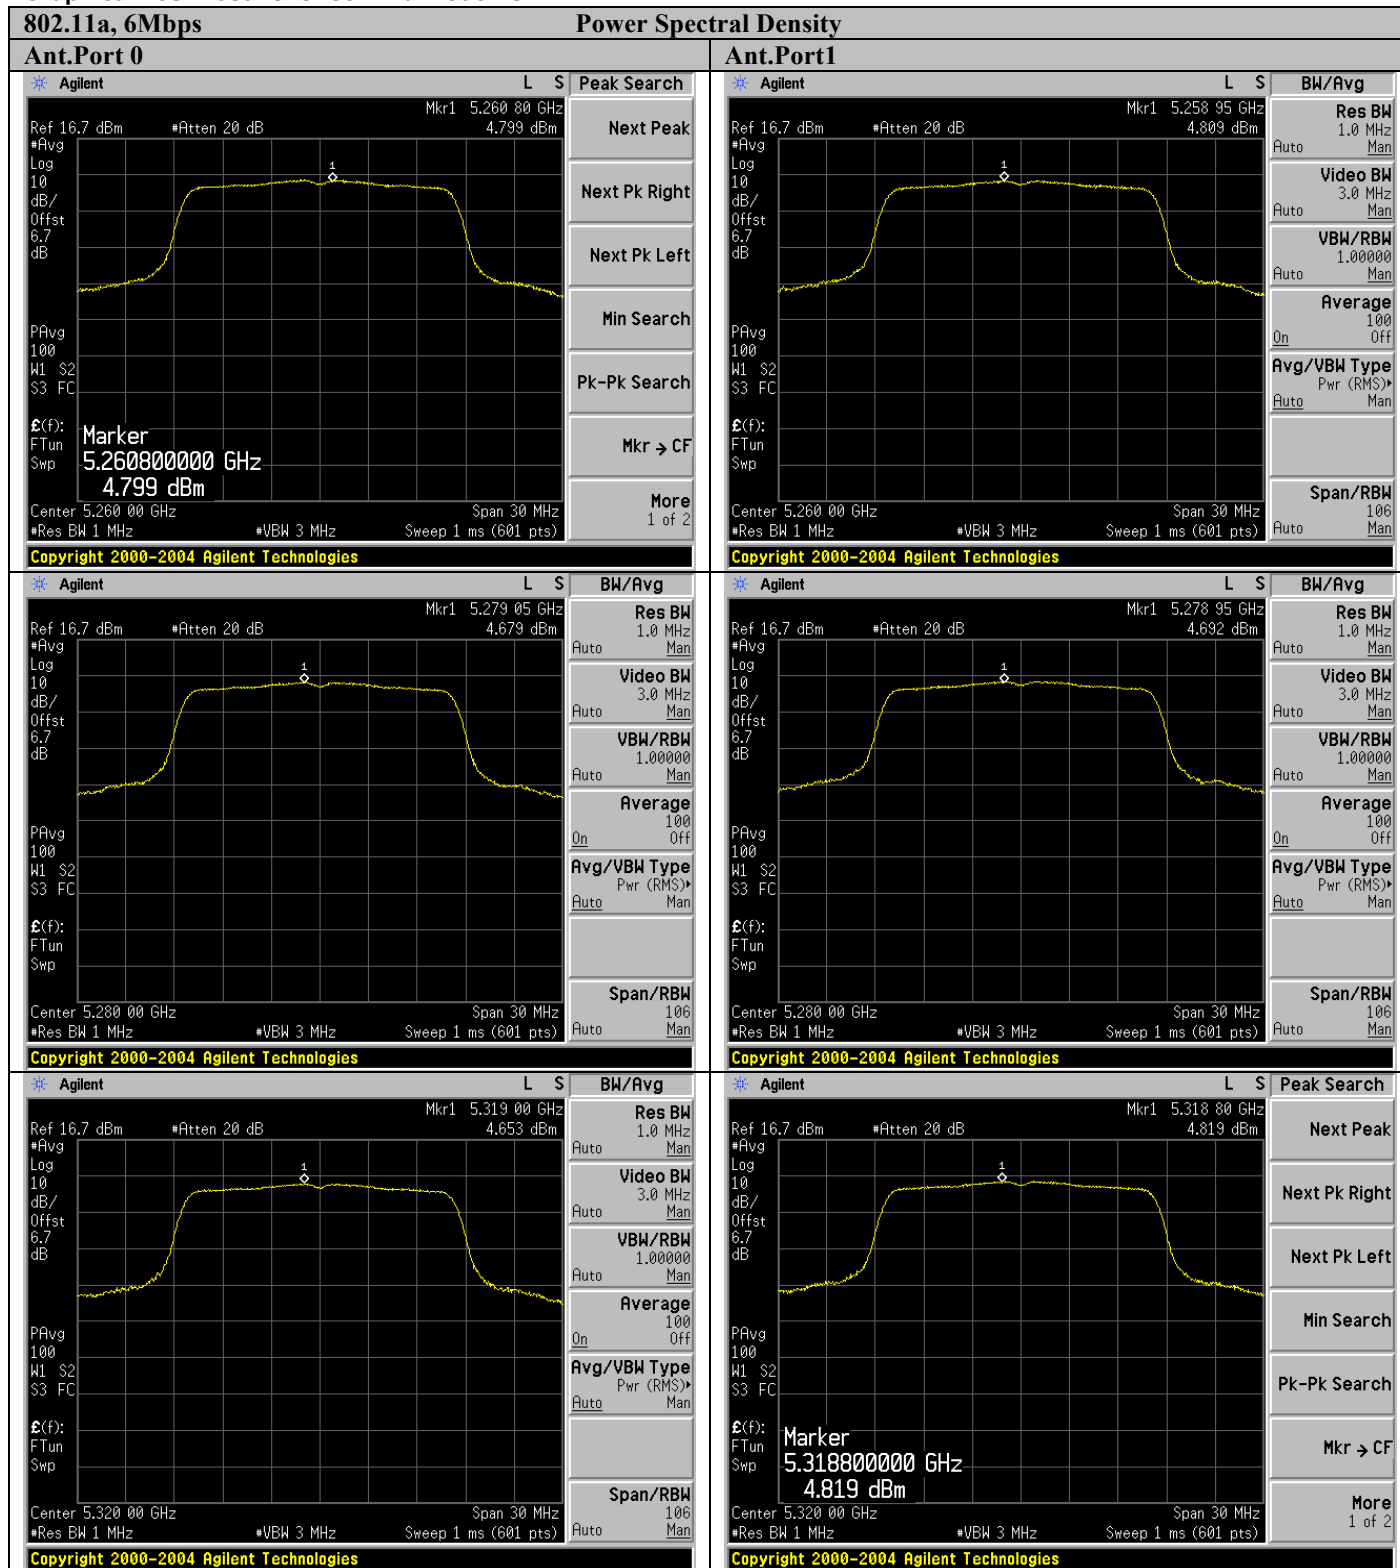




Graphical Test Results for 802.11a mode / UNII-3:

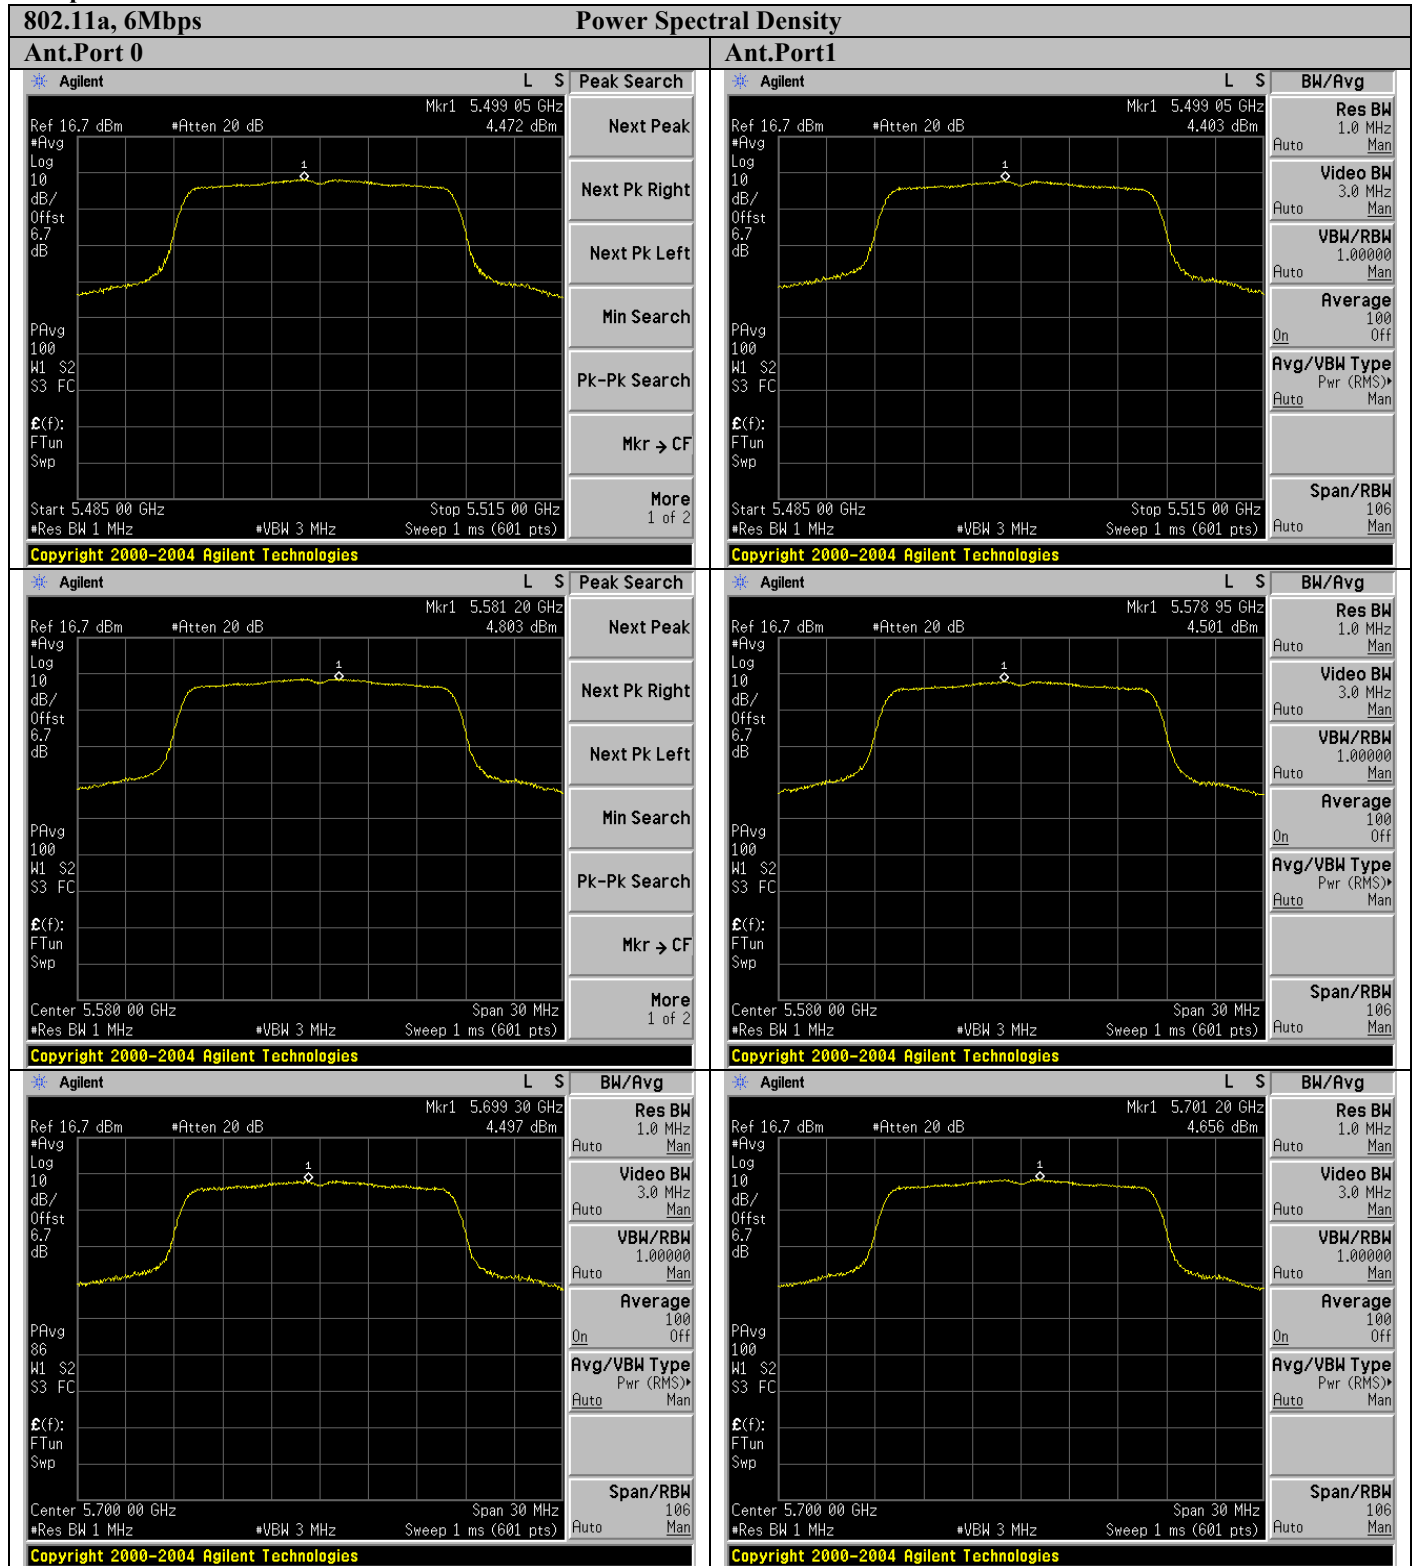




Graphical Test Results for 802.11n (HT20) mode / UNII-1:

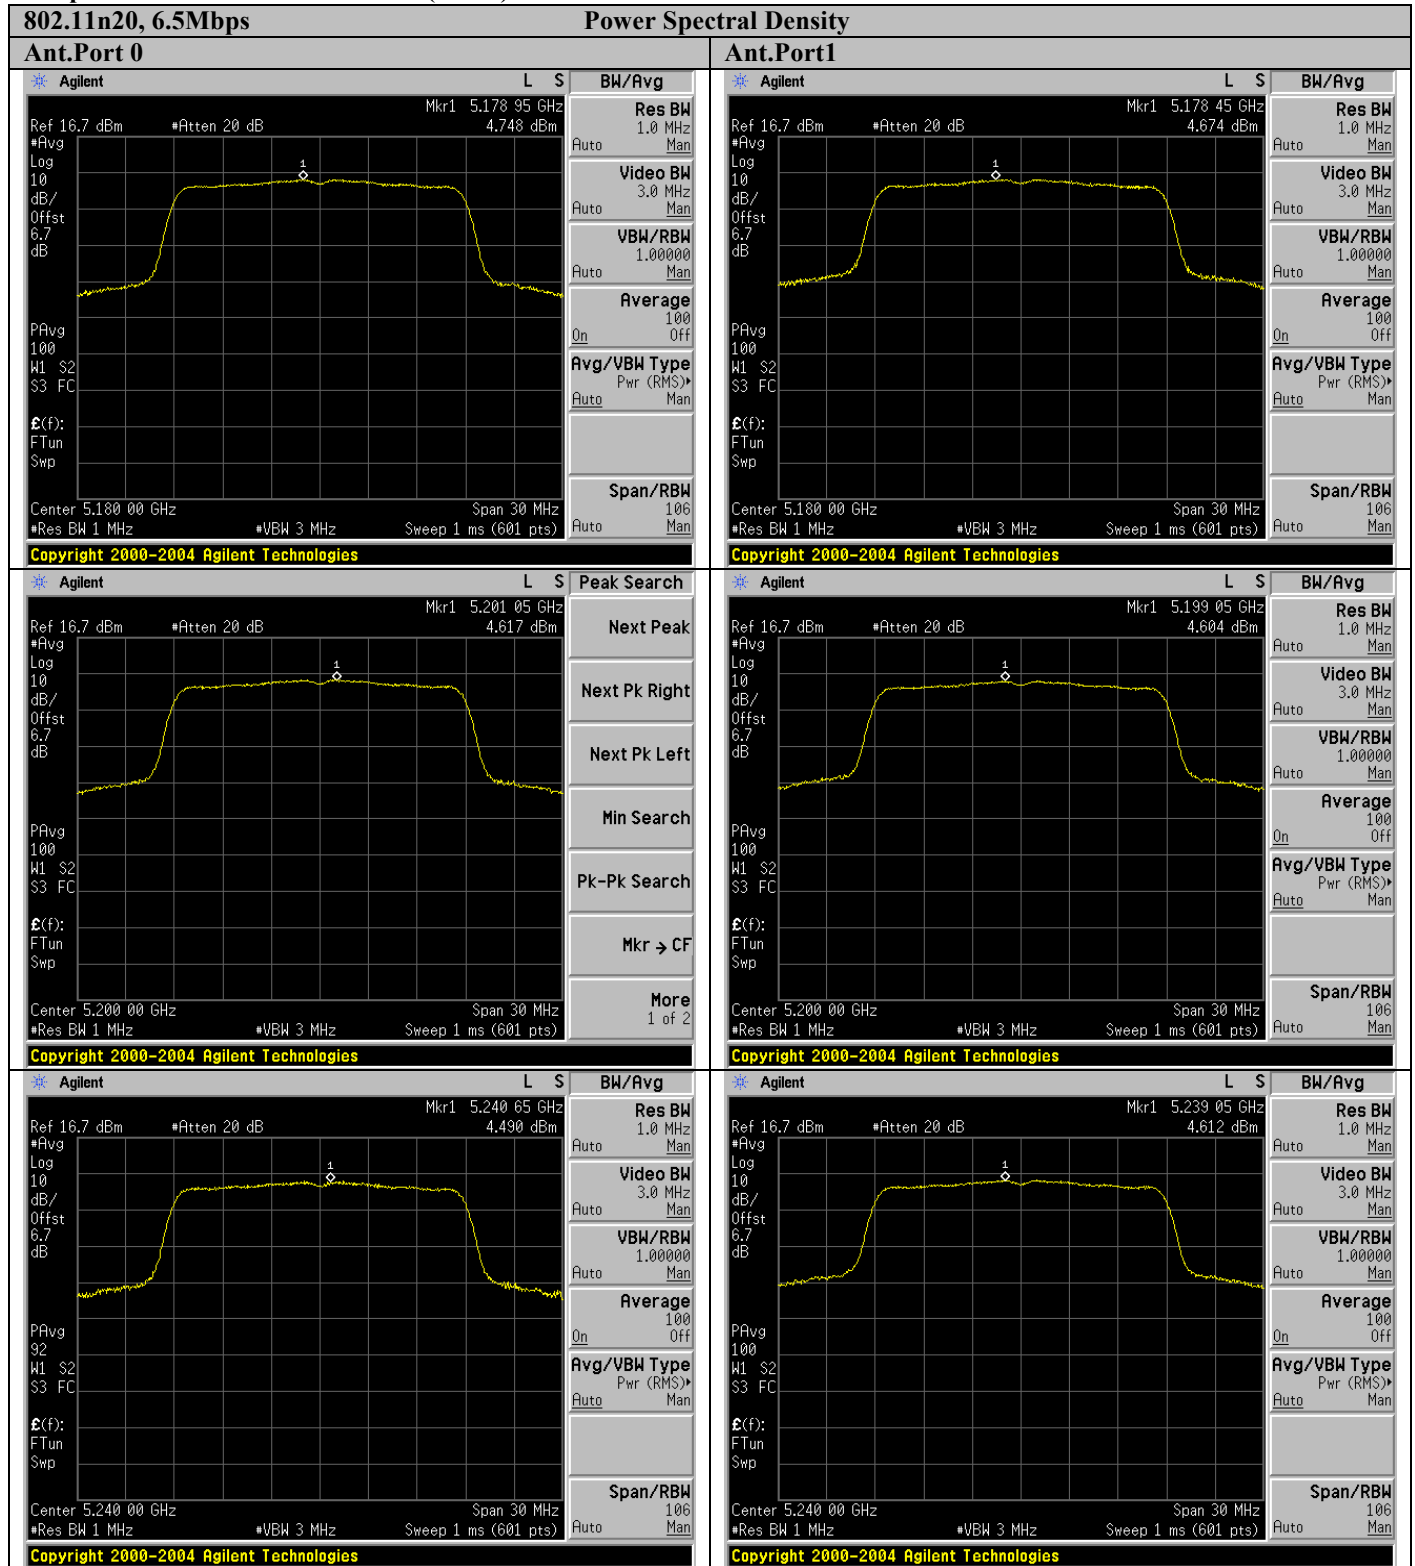




Graphical Test Results for 802.11n (HT40) mode / UNII-1:

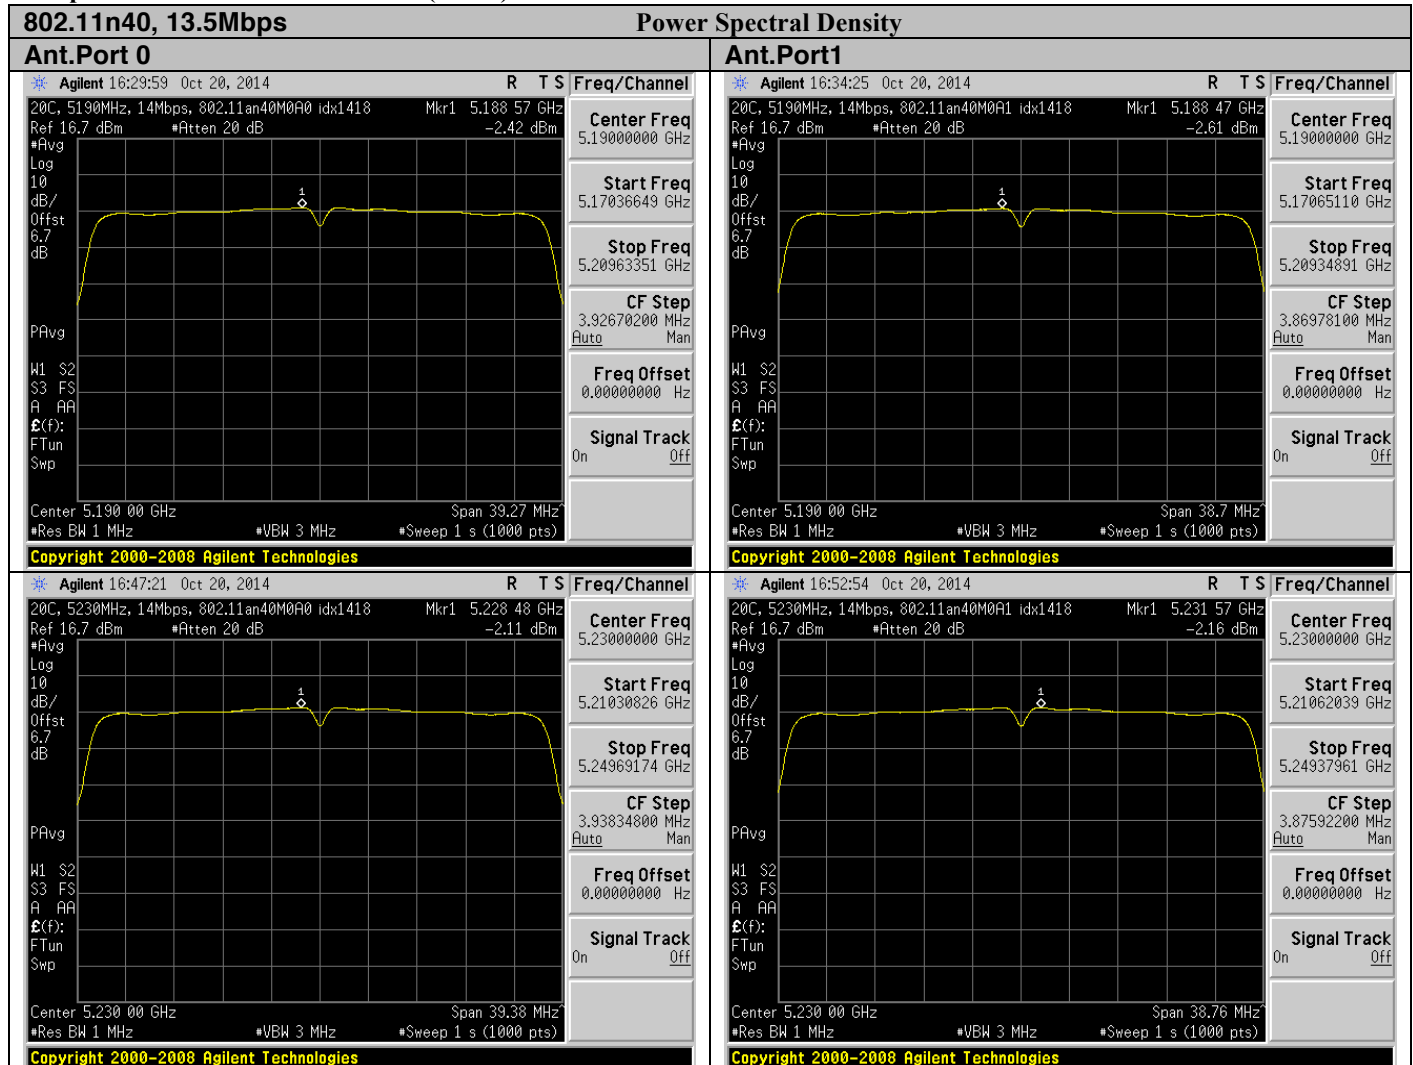




Graphical Test Results for 802.11ac mode / UNII-1:

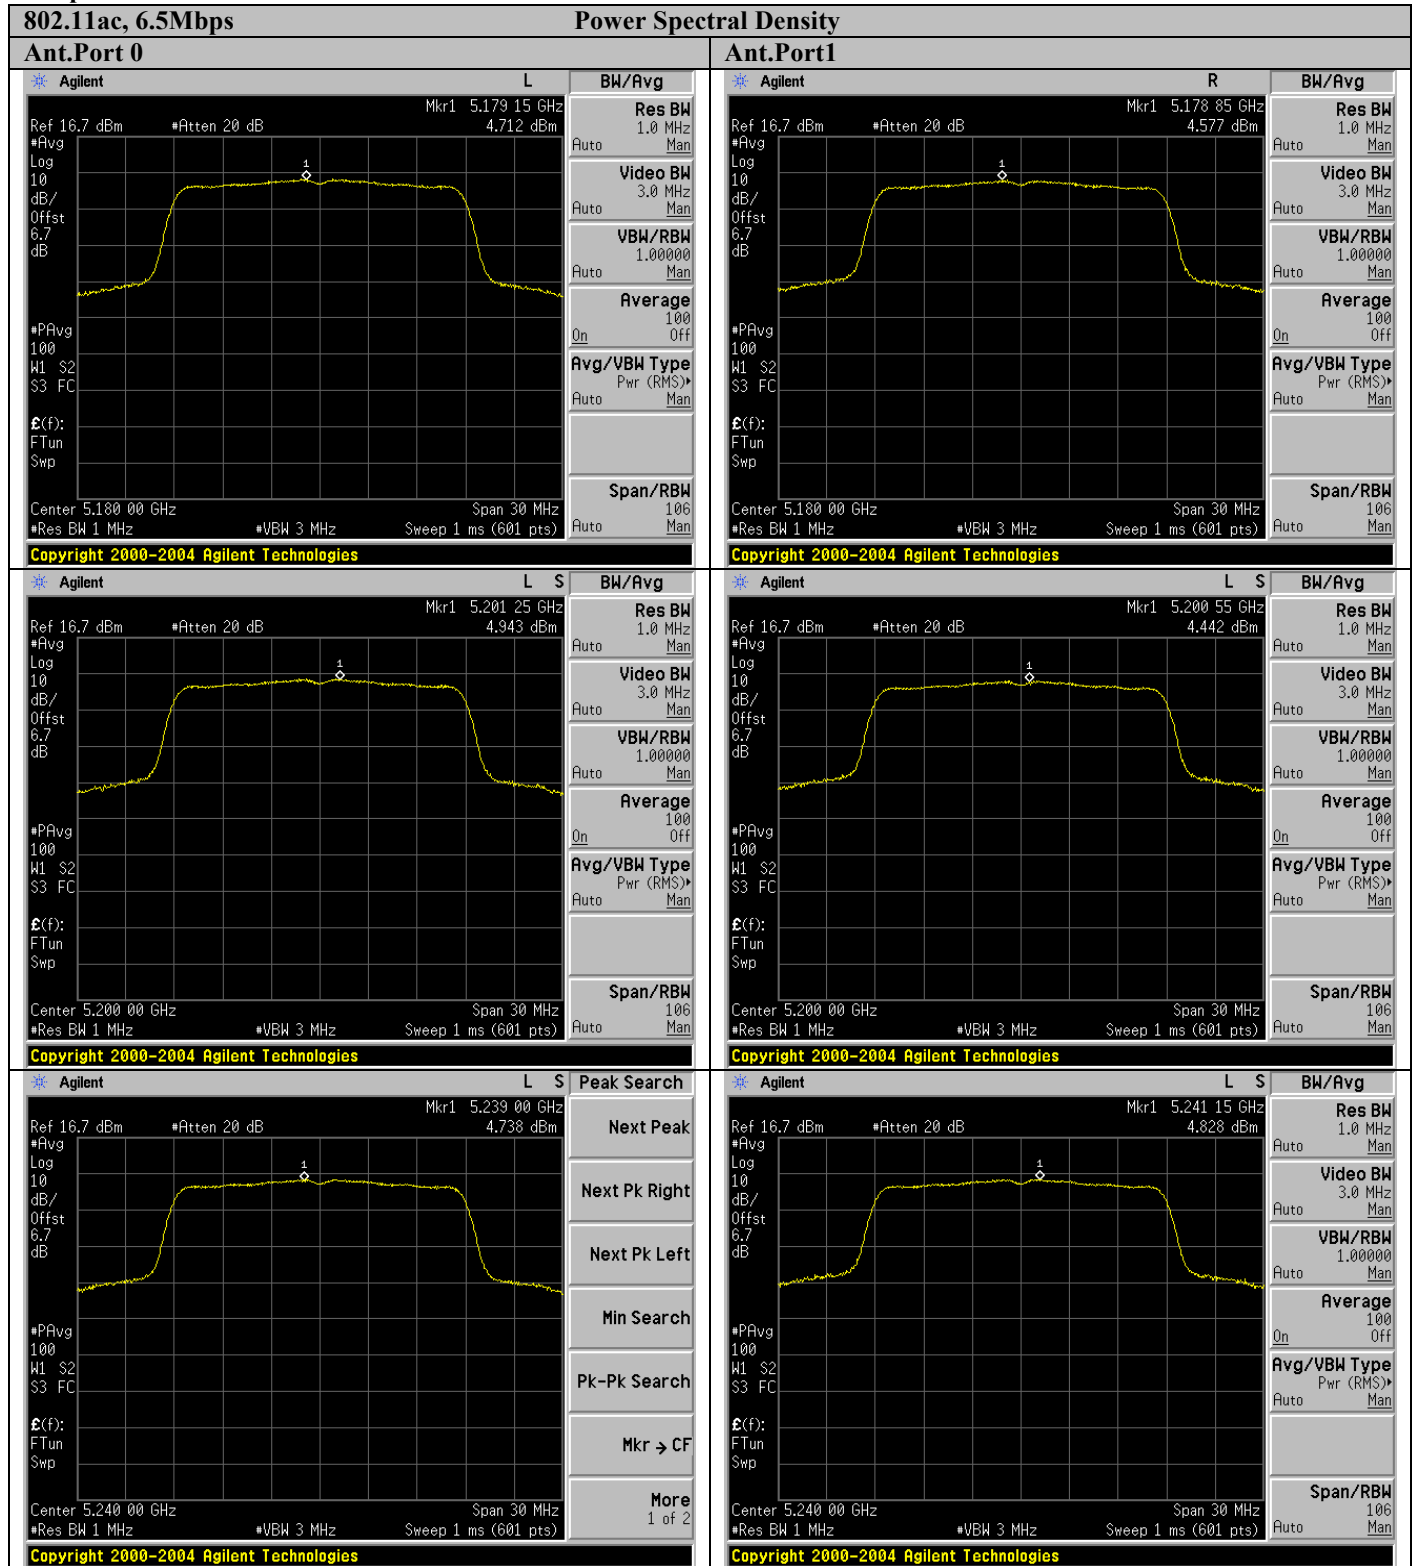




Graphical Test Results for 802.11ac (VHT40) mode / UNII-1:

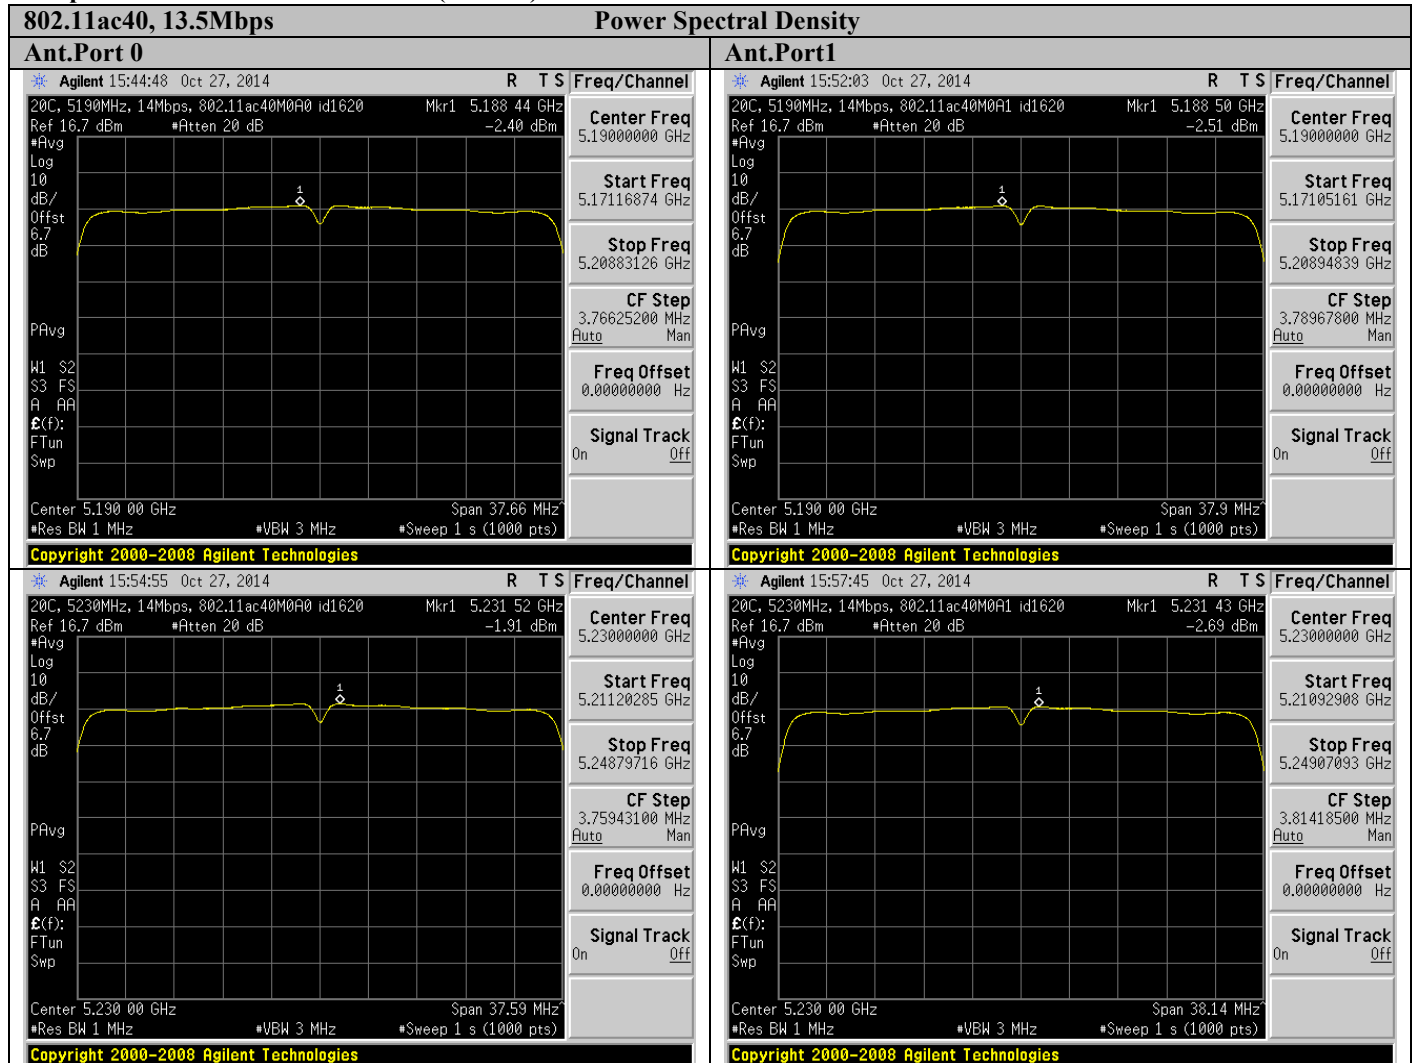



Graphical Test Results for 802.11ac (VHT80) mode / UNII-1

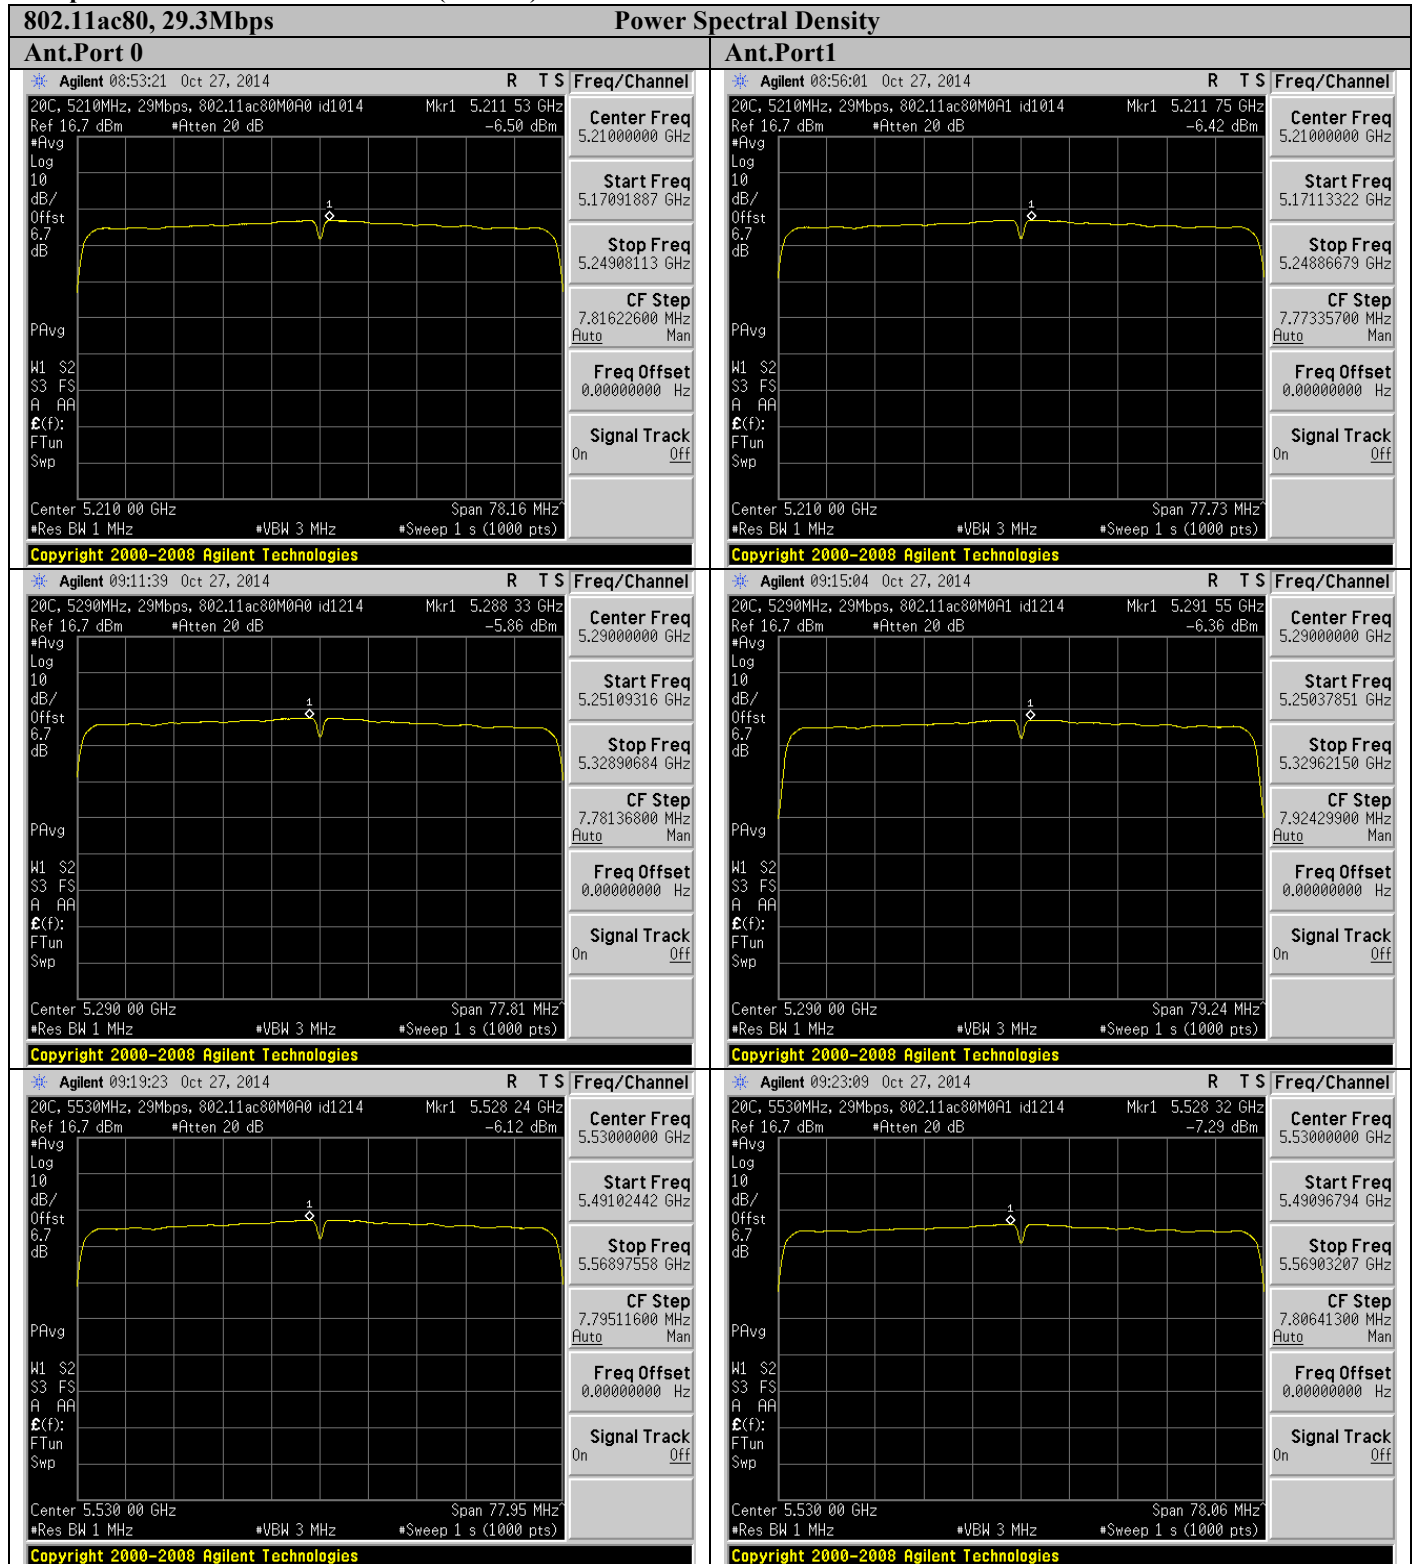



Transmitter Spurious Emissions (Undesirable Emissions) / Out-of-band Emissions and Restricted Bands

FCC 15.407 (b) (1) (6)/ RSS-210 A9.2: Undesirable emission limits. Except as shown in paragraph (b) (7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

(1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(6) Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in §15.209.

FCC 15.209: The level of any unwanted emissions from an intentional radiator operating under these general provisions shall not exceed the level of the fundamental emission. Except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the table specified in the table in FCC§15.209(a).

RSS-Gen 6.13: In measuring unwanted emissions, the spectrum shall be investigated from 30 MHz or the lowest radio frequency signal generated in the equipment, whichever is lower, without going below 9 kHz, up to at least the frequency given below:

(a) If the equipment operates below 10 GHz: to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.

(b) If the equipment operates at or above 10 GHz: to the fifth harmonic of the highest fundamental frequency or to 100 GHz, whichever is lower.

RSS-Gen 8.9: Except when the requirements applicable to a given device state otherwise, emissions from licence-exempt transmitters shall comply with the field strength limits shown in Table 4 or Table 5 below. Additionally, the level of any transmitter emission shall not exceed the level of the transmitter's fundamental emission.

FCC15.407 (b) (7): The provision of §15.205 apply to intentional radiators operating under this section.

FCC 15.205: Radiated emissions which fall in the restricted bands, as defined in FCC Section 15.205(a), must also comply with the radiated emission limits specified in FCC Section 15.209(a)

RSS-Gen 8.10: Except where otherwise indicated, the following restrictions apply:

(a) Fundamental components of modulation of licence-exempt radio apparatus shall not fall within the restricted bands of Table 6 except for apparatus complying under RSS-287;

(b) Unwanted emissions that fall into restricted bands of Table 6 shall comply with the limits specified in RSS-Gen; and

(c) Unwanted emissions that do not fall within the restricted frequency bands of Table 6 shall comply either with the limits specified in the applicable RSS or with those specified in this RSS-Gen.

15.209 (a)/RSS Gen 8.9: Except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:



| Frequency (MHz) | Field strength (uV/meter) | Field strength (dBuV/meter) | Measurement distance (meters) |
|-----------------|---------------------------|-----------------------------|-------------------------------|
| 30-88 | 100** | 40 Qp | 3 |
| 88-216 | 150** | 43.5 Qp | 3 |
| 216-960 | 200** | 46 Qp | 3 |
| Above 960 | 500 | 54 Av / 74 Pk | 3 |

**Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz.

The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.

Limit Conversion

When the DUT power is measured using a radiated test configuration, the EIRP can be directly determined using the power (logarithmic) approach as follows:

$$eirp = p_t \times g_t = (E \times d)^2/30$$

where: p_t = transmitter output power in watts,
 g_t = numeric gain of the transmitting antenna (unit less),
 E = electric field strength in V/m,
 d = measurement distance in meters (m).

Based on the equation above, unit conversion from log => linear

(1) Conversion from dBm to Watt

$$W = 10 \text{ EXP } (-27\text{dBm} - 30 / 10)$$

$$W = 10 \text{ EXP } (-5.7) = 2 \text{ E-6}$$

(2) E Field Strength can be derived by inverse calculation.

$$E = \text{SQRT } (p_t \times g_t \times 30) / d$$

$$E = \text{SQRT } (2\text{E-6} \times 1.0 \times 30) / 3 = 0.0026 \text{ V/m}$$

(3) Conversion from Linear to Log, using the following formula

$$\text{Volts to dBuV} = 20 \log (\text{Volts}) + 120$$

$$E \text{ (in dBuV)} = 20 \text{ Log } (0.0026) + 120 = \mathbf{68.23/m @ 3 \text{ meter}}$$

Test Procedure

Ref. C63.10-2009 section 6.5 & 6.6



Test Procedure

1. Using Vasona software, configure the spectrum analyzer as shown below (be sure to enter all losses between the transmitter output and the spectrum analyzer).
2. Place the radio in continuous transmit mode. Maximize Turntable (find worst case table angle) and maximize Antenna (find worst case height).
3. Use the peak marker function to determine the maximum amplitude level.
4. Center marker frequency and perform final measurement in Quasi-peak ($\leq 1\text{GHz}$) and Average (above 1 GHz)
4. Record at least 6 highest readings for the worst case operating mode.

Ref. C63.10-2009 section 4 / CISPR16-1-1

Test Parameters

Span = Entire frequency range or segment if necessary.
Reference Level = 80 dBuV
RBW = 100 kHz (less than or equal to 1 GHz); 1 MHz (above 1 GHz)
VBW $\geq 3 \times$ RBW
Detector = Peak & Quasi-Peak (frequency range 30 MHz to 1 GHz);
 Peak & Average (frequency range above 1 GHz); Change VBW to 10 Hz for average measurement
Sweep Time = Couple

- . The system was evaluated up to 26 GHz but there were no measurable emissions above 18 GHz.
- . These data represent the worst case mode data for all supported operating modes and antennas.
 - For emissions below 1000 MHz, measurements shall be performed using a CISPR quasi-peak detector and the related measurement bandwidth. As an alternative to CISPR quasi-peak measurement, compliance with the emission limit can be demonstrated using measuring equipment employing a peak detector function properly adjusted for factors such as pulse desensitization as required, with an equal or greater measurement bandwidth relative to the applicable CISPR quasi-peak bandwidth.
 - Above 1000 MHz, measurements shall be performed using an average detector with a minimum resolution bandwidth of 1 MHz.

Note1: A Notch Filter was used during formal testing from 1 – 18GHz to help prevent the front end of the analyzer from over loading. The Notch filters used are designed to suppress TX fundamental frequency but do not effect harmonics of the fundamental frequency from being measured

Note2: The data displayed on the plots detailed in the graphical test results section were measured using a 'Peak Detector'. Please refer to the results table for the detectors used during formal measurements.



Recorded Test Data:

TX Radiated Spurious Emissions Test Result Tables for 802.11a (Ch40 / Qp)

| Subtest Date: | | 07-Nov-2014 | | | | | | | | | | |
|---|-------------------|-------------------------------------|----------------|---------------------|-----------------|-----------------|--------------------|------------------|---------------------|--------------------|----------------------------|-----------------|
| Engineer | | Jose Aguirre | | | | | | | | | | |
| Lab Information | | Building P, 5m Anechoic | | | | | | | | | | |
| Subtest Title | | Transmitter Spurious Emissions | | | | | | | | | | |
| Frequency Range | | 30.0 MHz - 1.0 GHz | | | | | | | | | | |
| Comments on the above Test Results | | TX Channel 40 (5200 MHz) – 6.0 Mbps | | | | | | | | | | |
| Frequency (MHz) | Raw (dBuV) | Cab Loss (dB) | AF (dB) | Level (dBuV) | Detector | Polarity | Height (cm) | Azt (Deg) | Limit (dBuV) | Margin (dB) | Results Pass / Fail | Comments |
| 375.005 | 20.3 | 1.8 | 15.1 | 37.2 | Quasi-Pk | V | 195 | 17 | 47.5 | -10.3 | Pass | TX / Ch40 |
| 45.742 | 20.2 | 0.6 | 9.9 | 30.8 | Quasi-Pk | V | 151 | 76 | 40.5 | -9.7 | Pass | TX / Ch40 |
| 199.988 | 12.2 | 1.3 | 12.6 | 26.1 | Quasi-Pk | H | 128 | 83 | 40.5 | -14.4 | Pass | TX / Ch40 |
| 71.605 | 20 | 0.8 | 8.1 | 28.8 | Quasi-Pk | V | 136 | 226 | 40.5 | -11.7 | Pass | Tx / Ch40 |
| 32.101 | 5.1 | 0.5 | 18.9 | 24.5 | Quasi-Pk | V | 216 | 338 | 40.5 | -16 | Pass | TX / Ch40 |
| 249.954 | 14.4 | 1.5 | 11.5 | 27.3 | Quasi-Pk | V | 171 | 338 | 47.5 | -20.2 | Pass | TX / Ch40 |



TX Radiated Spurious Emissions Test Result Tables for 802.11a mode/ UNII-1

| | |
|---|--------------------------------|
| Subtest Date: | 07-Nov-2014 |
| Engineer | Jose Aguirre |
| Lab Information | Building P, 5m Anechoic |
| Subtest Title | Transmitter Spurious Emissions |
| Frequency Range | 1.0 GHz - 18.0 GHz |
| Comments on the above Test Results | 802.11a / 6.0 Mbps |

Band of Operating Frequency: UNII-1 (Ch Low)

| Frequency (MHz) | Raw (dBuV) | Cab Loss (dB) | AF (dB) | Level (dBuV) | Detector | Polarity | Height (cm) | Azt (Deg) | Limit (dBuV) | Margin (dB) | Results Pass /Fail | Comments |
|------------------|------------|---------------|---------|--------------|----------|----------|-------------|-----------|--------------|-------------|--------------------|-----------|
| 5178.415 | 65.06 | 4.43 | -3.58 | 65.91 | Peak | V | 100 | 0 | 68.23 | -2.32 | Pass | TX / Ch36 |
| 10360 | 39.8 | 6.2 | 5.1 | 51.2 | Peak | H | 100 | 210 | 68.23 | -17.03 | Pass | TX / Ch36 |
| 15540 | 42.9 | 7.9 | 2.3 | 53.1 | Peak | H | 101 | 210 | 74 | -20.9 | Pass | TX / Ch36 |
| 10360 | 40.2 | 6.2 | 5.1 | 51.6 | Peak | V | 111 | 166 | 68.23 | -16.63 | Pass | TX / Ch36 |
| 15540 | 42.4 | 7.9 | 2.3 | 52.6 | Peak | V | 111 | 166 | 74 | -21.4 | Pass | TX / Ch36 |
| 15539.26 | 33.4 | 7.9 | 2.3 | 43.6 | Average | V | 123 | 231 | 54 | -10.4 | Pass | TX / Ch36 |
| 15539.556 | 33.3 | 7.9 | 2.3 | 43.5 | Average | H | 101 | 98 | 54 | -10.5 | Pass | TX / Ch36 |

Band of Operating Frequency: UNII-1 (Ch Mid)

| Frequency (MHz) | Raw (dBuV) | Cab Loss (dB) | AF (dB) | Level (dBuV) | Detector | Polarity | Height (cm) | Azt (Deg) | Limit (dBuV) | Margin (dB) | Results Pass /Fail | Comments |
|------------------|------------|---------------|---------|--------------|----------|----------|-------------|-----------|--------------|-------------|--------------------|-----------|
| 5189.021 | 58.4 | 4.42 | -3.56 | 59.27 | Peak | V | 100 | 0 | 68.23 | -8.96 | Pass | TX / Ch40 |
| 10401.39 | 39.8 | 6.2 | 5.2 | 51.24 | Peak | V | 111 | 166 | 68.23 | -16.99 | Pass | TX / Ch40 |
| 15598.56 | 41.8 | 7.9 | 2.1 | 51.84 | Peak | V | 111 | 166 | 74 | -22.16 | Pass | TX / Ch40 |
| 10401.32* | 40 | 6.2 | 5.2 | 51.42 | Peak | H | 101 | 210 | 68.23 | -16.81 | Pass | TX / Ch40 |
| 15599.92 | 42.1 | 7.9 | 2.1 | 52.14 | Peak | H | 101 | 210 | 74 | -21.86 | Pass | TX / Ch40 |
| 15600.541 | 33.5 | 7.9 | 2.1 | 43.5 | Average | H | 104 | 221 | 54 | -10.5 | Pass | TX / Ch40 |
| 15599.469 | 33.9 | 7.9 | 2.1 | 43.9 | Average | V | 104 | 163 | 54 | -10.1 | Pass | TX / Ch40 |

Band of Operating Frequency: UNII-1 (Ch High)


| Frequency (MHz) | Raw (dBuV) | Cab Loss (dB) | AF (dB) | Level (dBuV) | Detector | Polarity | Height (cm) | Azt (Deg) | Limit (dBuV) | Margin (dB) | Results Pass /Fail | Comments |
|-----------------|------------|---------------|---------|--------------|----------|----------|-------------|-----------|--------------|-------------|--------------------|-----------|
| 10479.28 | 40.8 | 6.3 | 5.4 | 52.48 | Peak | V | 101 | 171 | 68.23 | -15.75 | Pass | TX / Ch48 |
| 15721.19 | 42.3 | 8 | 1.4 | 51.68 | Peak | V | 101 | 171 | 74 | -22.32 | Pass | TX / Ch48 |
| 10480.59 | 40.4 | 6.3 | 5.4 | 52.1 | Peak | H | 111 | 224 | 68.23 | -16.13 | Pass | TX / Ch48 |
| 15718.81 | 42.2 | 8 | 1.4 | 51.53 | Peak | H | 111 | 224 | 74 | -22.47 | Pass | TX / Ch48 |
| 15719.11 | 33.2 | 7.98 | 1.37 | 42.55 | Average | V | 101 | 171 | 54 | -11.45 | Pass | TX / Ch48 |
| 15719.35 | 33.14 | 7.98 | 1.37 | 42.49 | Average | H | 111 | 224 | 54 | -11.51 | Pass | TX / Ch48 |

Note1: 68.23 dBuV/m field strength limit @3m distance was converted from the specified 27 dBm/Mhz limit in FCC15.407 (b). Refer to limit conversion section for more detail.



Note2: The frequencies in bolt type represent frequencies inside the restricted bands.







Graphical Test Results for TX 802.11a mode:

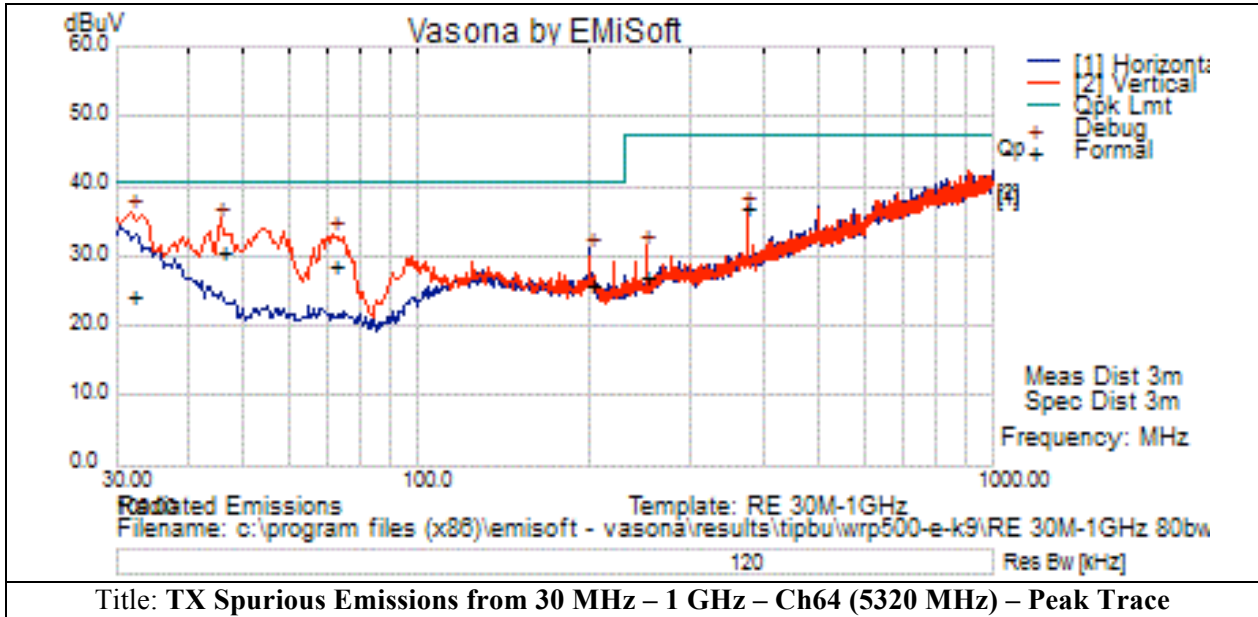

Note: The data displayed on the plots detailed in the graphical test results section were measured using a 'Peak Detector'. Please refer to the results table for the detectors used during formal measurements.

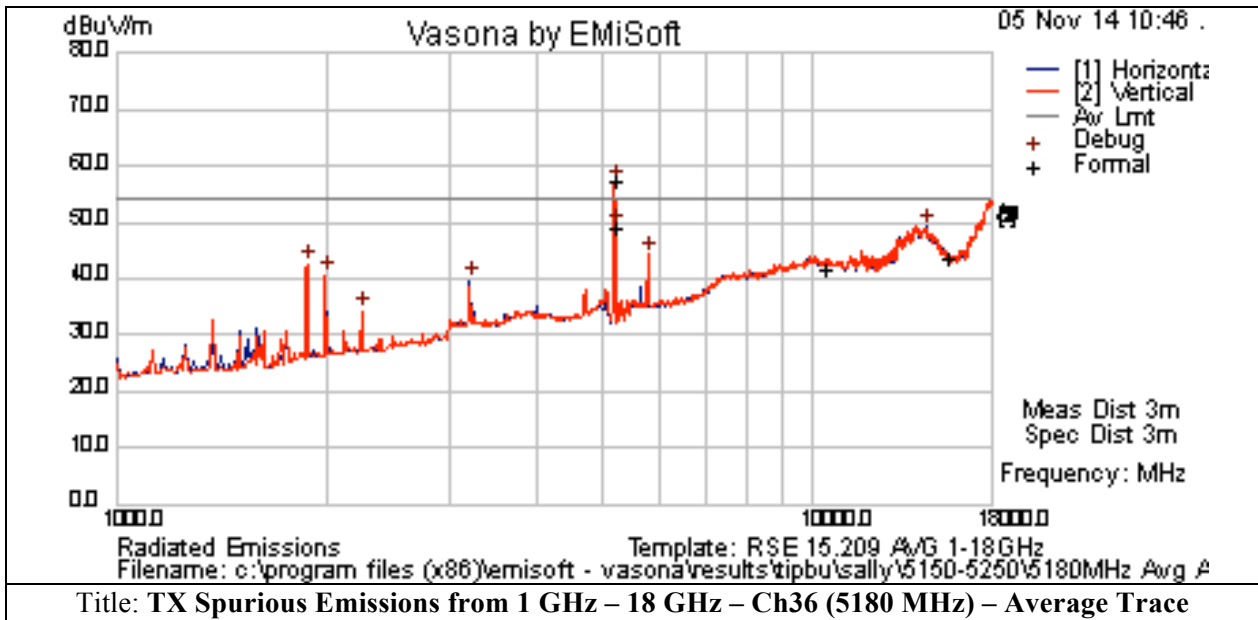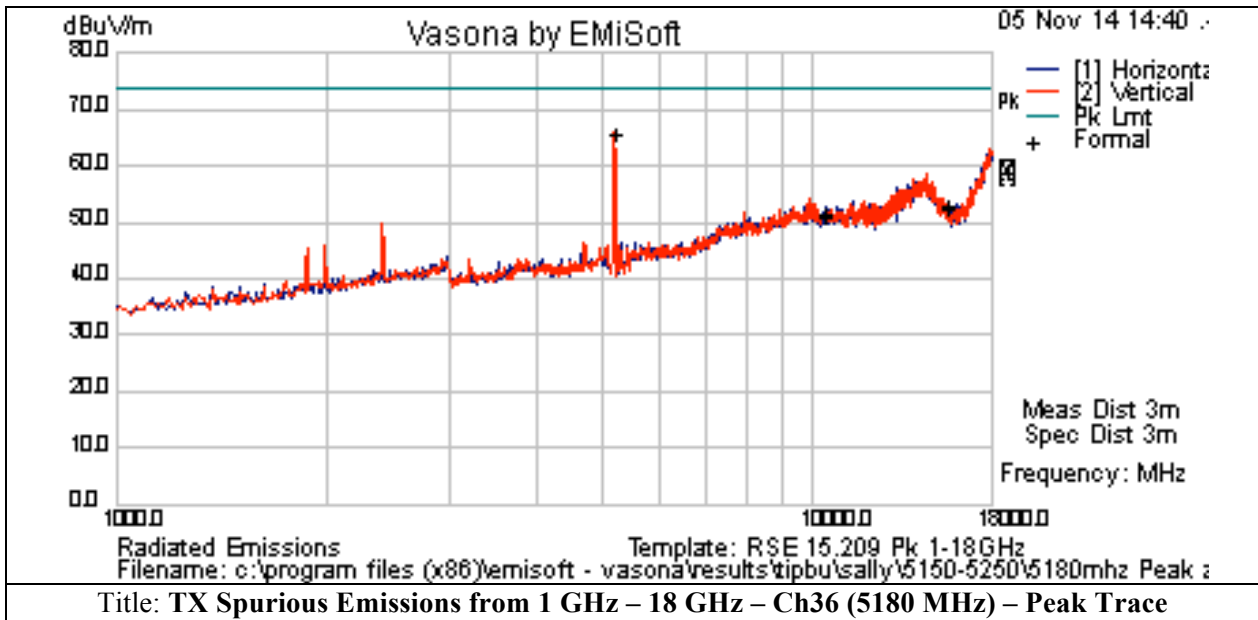

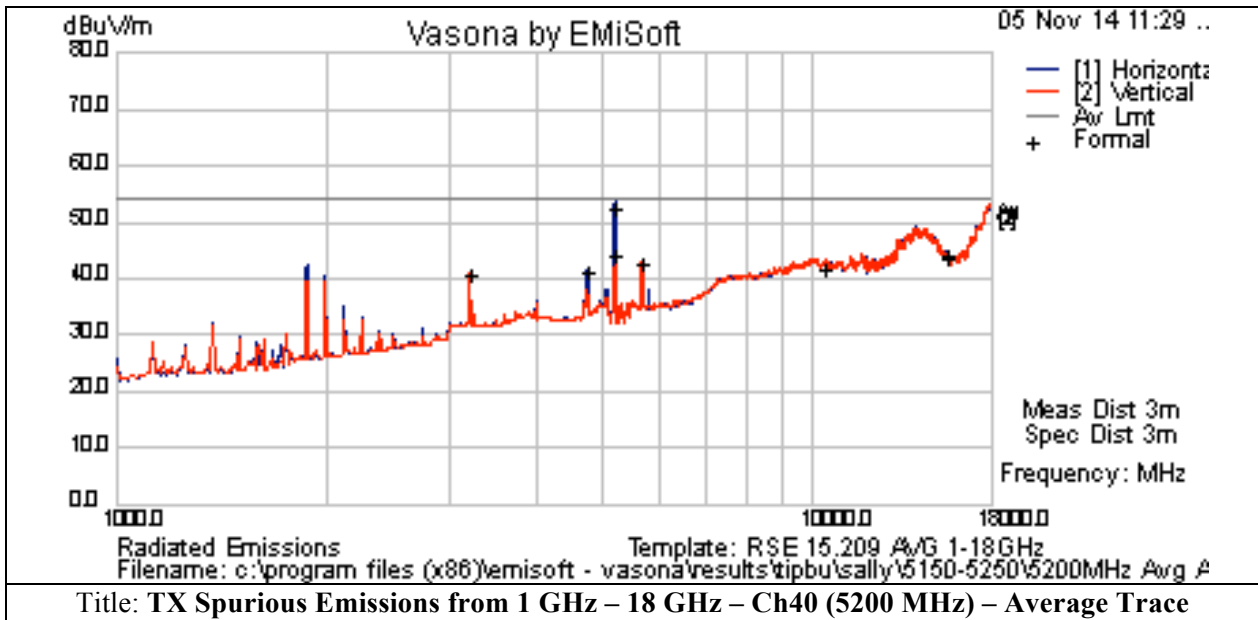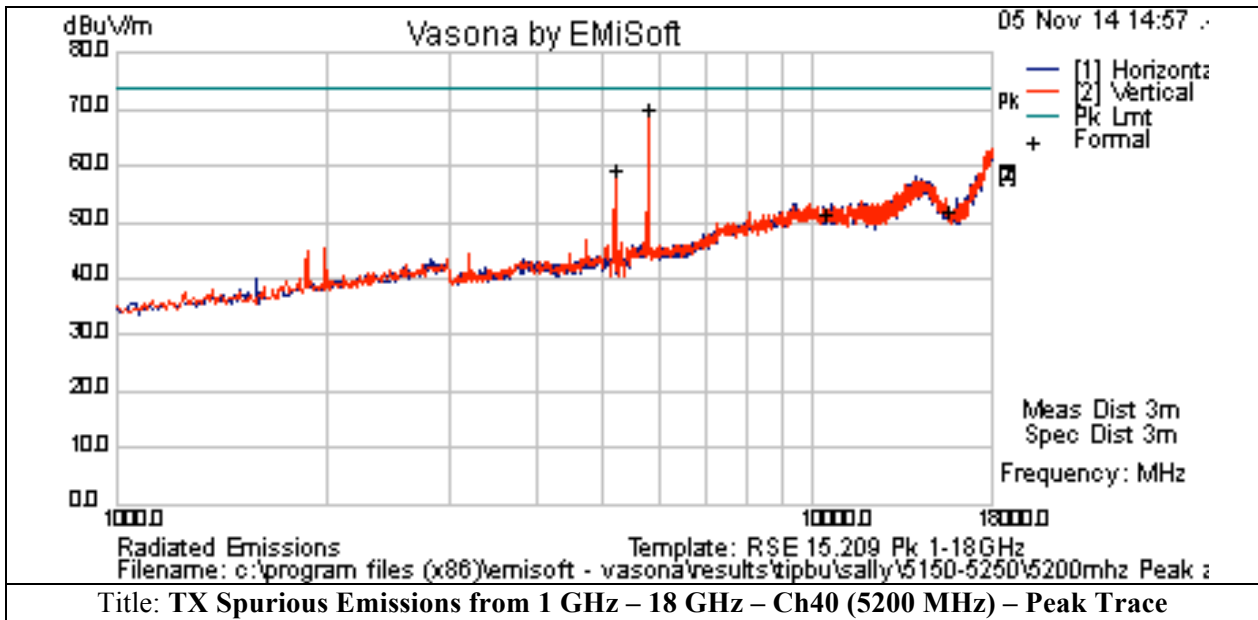

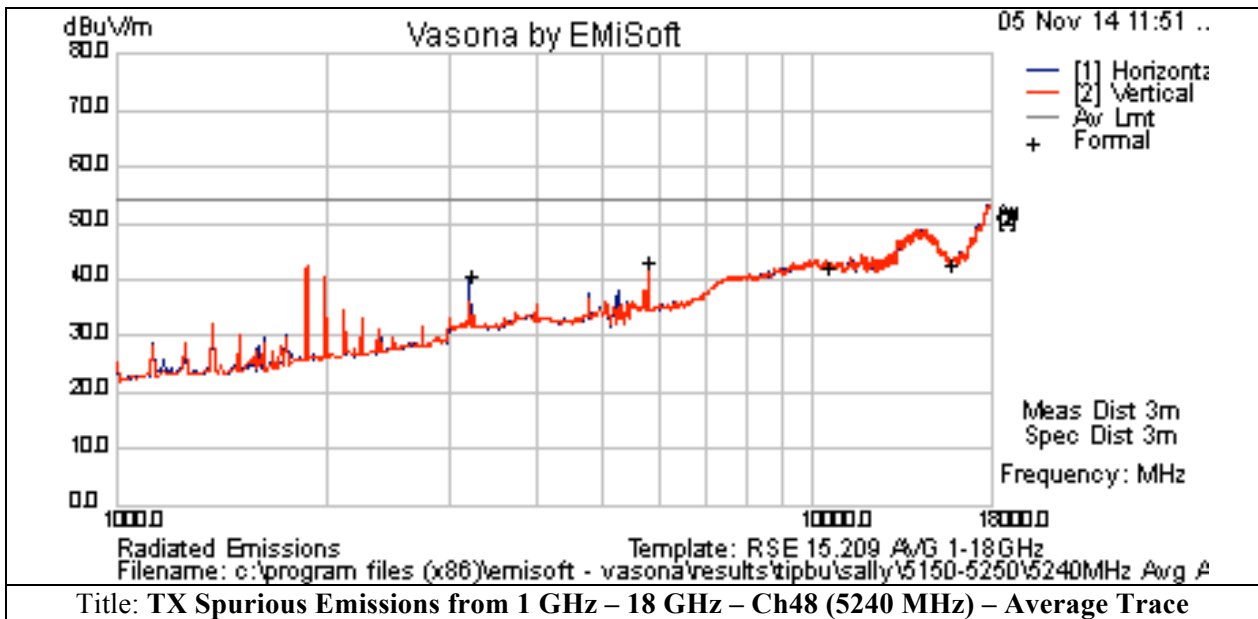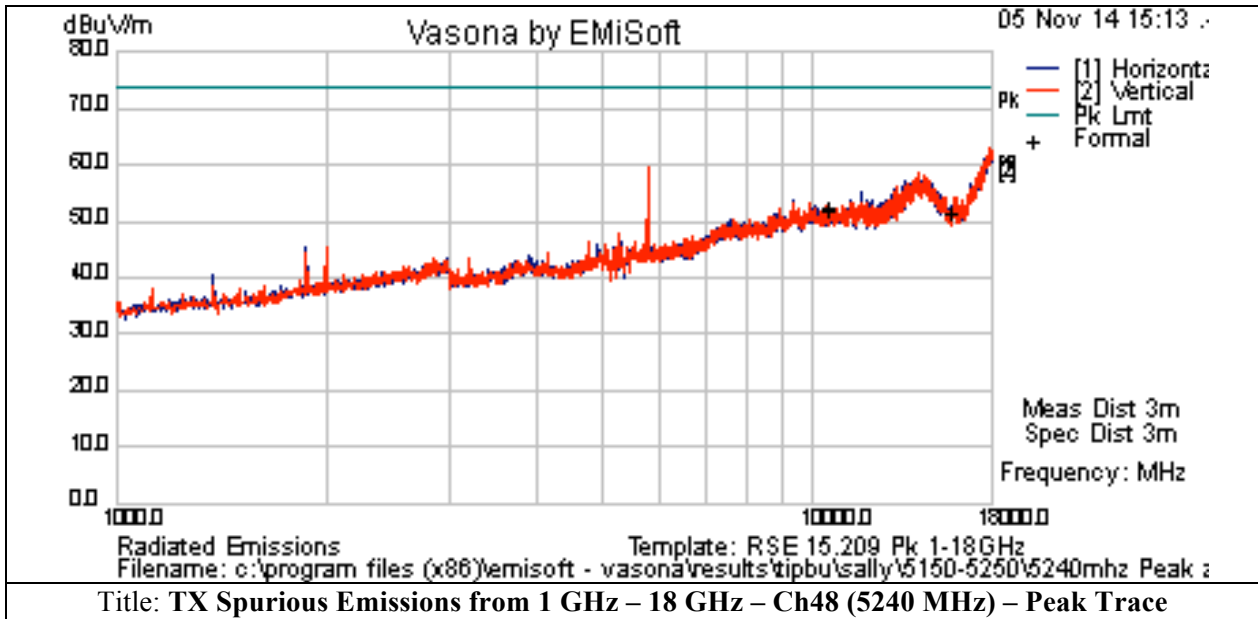



Receiver Radiated Spurious Emissions

RSS-Gen 5.0 / 7.1: The receiver shall be operated in the normal receive mode near the mid-point of the band in which the receiver is designed to operate. And spurious emissions from the receivers shall not exceed the radiated limits shown in the table 2 in section 7.1.2 of RSS-Gen.

For either method, the search for spurious emissions shall be from the lowest frequency internally generated or used in the receiver (e.g. local oscillator frequency, intermediate or carrier frequency), or 30 MHz, whichever is higher, to at least 3 times the highest turntable or local oscillator frequency whichever is higher, without exceeding 40 GHz.

For emissions below 1000 MHz, measurements shall be performed using a CISPR quasi-peak detector and the related measurement bandwidth. Above 1000 MHz, measurements shall be performed using an average detector with a minimum resolution bandwidth of 1 MHz.

As an alternative to CISPR quasi-peak measurement, compliance with the emission limit can be demonstrated using measuring equipment employing a peak detector function properly adjusted for factors such as pulse desensitization as required, with an equal or greater than the applicable CISPR quasi-peak bandwidth or 1 MHz bandwidth, respectively.

Table 2: Radiated Limits of Receiver Spurious Emissions

| Frequency (MHz) | Field strength (uV/meter)* | Field strength (dBuV/meter) | Measurement distance (meters) |
|-----------------|----------------------------|-----------------------------|-------------------------------|
| 30-88 | 100 | 40 Qp | 3 |
| 88-216 | 150 | 43.5 Qp | 3 |
| 216-960 | 200 | 46 Qp | 3 |
| Above 960 | 500 | 54 Av / 74 Pk | 3 |

*Measurements for compliance with limits in the above table may be performed at distances other than 3 metres, in accordance with Section 6.5.

Test Procedure



Ref. C63.10-2009/2009 section 6.5 & 6.6

Test Procedure

1. Using Vasona software, configure the spectrum analyzer as shown below (be sure to enter all losses between the transmitter output and the spectrum analyzer).
2. Place the radio in continuous Receiver mode. Maximize Turntable (find worst case table angle) and maximize Antenna (find worst case height).
3. Use the peak marker function to determine the maximum amplitude level.
4. Center marker frequency and perform final measurement in Quasi-peak ($\leq 1\text{GHz}$) and Average (above 1GHz)
5. Record at least 6 highest readings.

Ref. C63.10-2009/2009 section 4 / CISPR16-1-1

Test Parameters

Span = Entire frequency range or segment if necessary.
Reference Level = 80 dBuV
RBW = 100 kHz (less than or equal to 1 GHz); 1 MHz (above 1 GHz)
VBW $\geq 3 \times$ RBW
Detector = Peak & Quasi-Peak (frequency range 30 MHz to 1 GHz);
 Peak & Average (frequency range above 1 GHz);
 Changing VBW to 10 Hz for average measurement
Sweep Time = Couple





Recorded Test Data:

RX Spurious Emissions Test Result Tables for 802.11a / UNII-1

| Subtest Date: | | 06-Nov-2014 | | | | | | | | | | |
|---|------------|--------------------------------|---------|--------------|----------|----------|-------------|-----------|--------------|-------------|--------------------|------------|
| Engineer | | Jose Aguirre | | | | | | | | | | |
| Lab Information | | Building P, 5m Anechoic | | | | | | | | | | |
| Subtest Title | | Transmitter Spurious Emissions | | | | | | | | | | |
| Frequency Range | | 1 GHz - 18 GHz | | | | | | | | | | |
| Comments on the above Test Results | | RX Mode | | | | | | | | | | |
| Band of Operating Frequency: UNII-1 (Ch40 / RX mode) | | | | | | | | | | | | |
| Frequency (MHz) | Raw (dBuV) | Cab Loss (dB) | AF (dB) | Level (dBuV) | Detector | Polarity | Height (cm) | Azt (Deg) | Limit (dBuV) | Margin (dB) | Results Pass /Fail | Comments |
| 1874.543 | 49.14 | 2.47 | -6.2 | 45.42 | Peak | V | 100 | 1 | 74 | -28.58 | Pass | RX / Ch 40 |
| 2124.349 | 46.12 | 2.65 | -6.09 | 42.68 | Peak | V | 100 | 1 | 74 | -31.32 | Pass | RX / Ch 40 |
| 2002.227 | 51.31 | 2.6 | -6.21 | 47.69 | Peak | V | 100 | 1 | 74 | -26.31 | Pass | RX / Ch 40 |
| 3216.453 | 44.51 | 3.31 | -4.22 | 43.61 | Peak | V | 100 | 1 | 74 | -30.39 | Pass | RX / Ch 40 |
| 1874.922 | 46.51 | 2.47 | -6.2 | 42.79 | Average | V | 100 | 171 | 54 | -11.21 | Pass | RX / Ch 40 |
| 2002.183 | 44.54 | 2.6 | -6.21 | 40.92 | Average | V | 100 | 350 | 54 | -13.08 | Pass | RX / Ch 40 |
| 2251.404 | 37.47 | 2.74 | -5.87 | 34.34 | Average | V | 100 | 262 | 54 | -19.66 | Pass | RX / Ch 40 |
| 3216.624 | 36.21 | 3.31 | -4.22 | 35.31 | Average | V | 100 | 0 | 54 | -18.69 | Pass | RX / Ch 40 |
| 4001.3 | 35.59 | 3.77 | -3.33 | 36.03 | Average | H | 100 | 0 | 54 | -17.97 | Pass | RX / Ch 40 |
| 5783.124 | 37.62 | 4.7 | -4.13 | 38.19 | Average | V | 100 | 0 | 54 | -15.81 | Pass | RX / Ch 40 |



Graphical Test Results for 802.11a RX Mode:

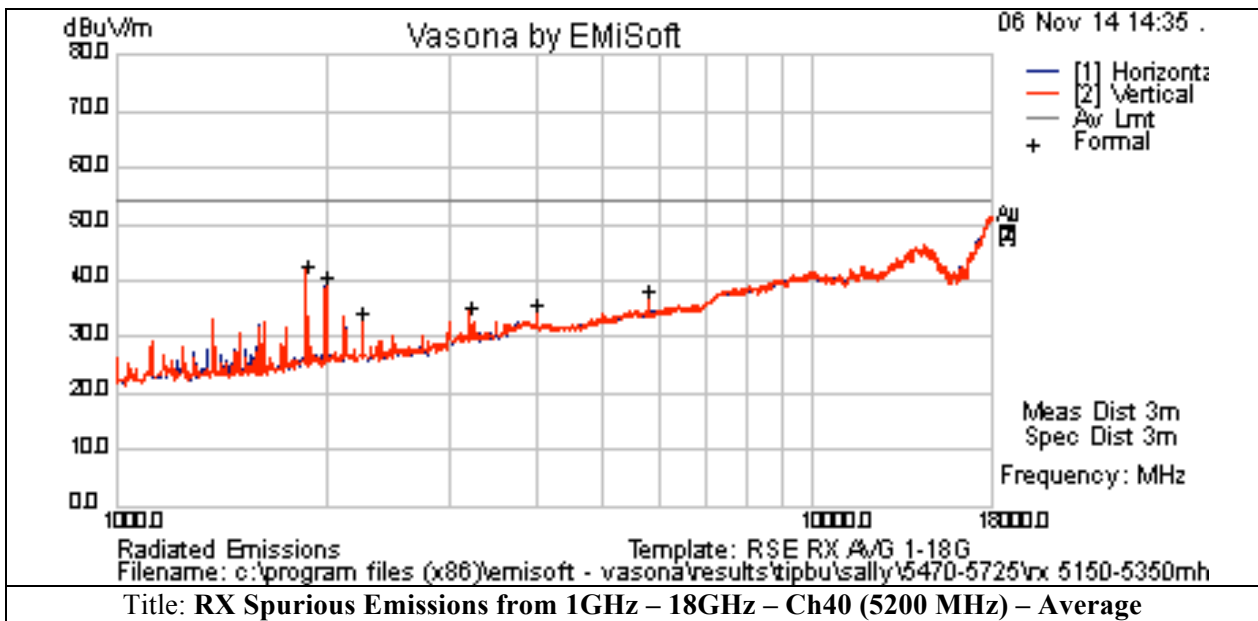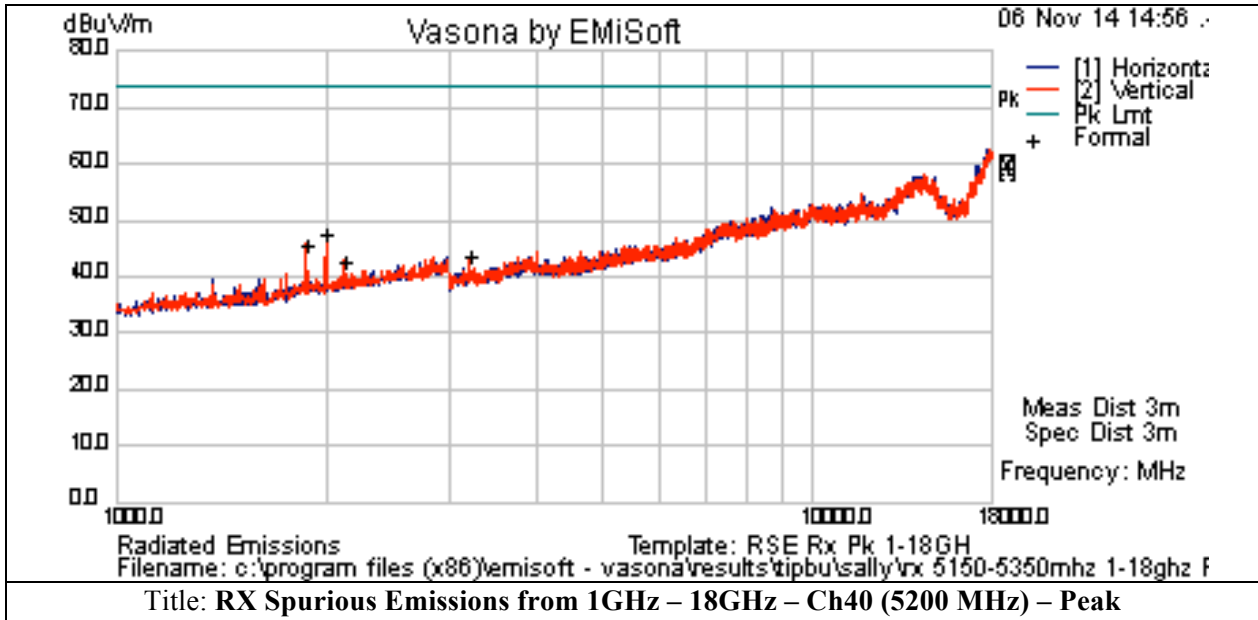

AC Power Line Conducted Emissions

FCC 15.207: (a) Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN).

RSS-Gen 8.8 : A radio apparatus that is designed to be connected to the public utility (AC) power line shall ensure that the radio frequency voltage, which is conducted back onto the AC power line on any frequency or frequencies within the band 0.15 MHz to 30 MHz shall not exceed the limits in Table 3 shown in this section.

Test Procedure

C63.10:2009

Section 6.2.2 Measurement requirements

Measured levels of ac power-line conducted emission shall be the emission voltages from the voltage probe or across the 50 Ω LISN port (to which the EUT is connected), where permitted, terminated into a 50 Ω measuring instrument, or where permitted or required, the emission currents on the power line sensed by a current probe. All emission voltage and current measurements shall be made on each current-carrying conductor at the plug end of the EUT power cord by the use of mating plugs and receptacles on the LISN, if used. Equipment shall be tested with power cords that are normally supplied or recommended by the manufacturer, and that have electrical and shielding characteristics that are the same as those cords normally supplied or recommended by the manufacturer. For those measurements, using a LISN, the 50 Ω measuring port is terminated by a measuring instrument having a 50 Ω input impedance. All other ports are terminated in 50 Ω loads. Figure 5, Figure 6, and Figure 7 show typical test setups for ac power-line conducted emissions testing (see 6.13). For information about the use of a RF-shielded (screen) room, vertical conducting plane and voltage probe, see ANSI C63.4.

Tabletop devices shall be placed on a platform of nominal size, 1 m by 1.5 m, raised 80 cm above the reference ground plane. The vertical conducting plane or wall of an RF-shielded (screen) room shall be located 40 cm to the rear of the EUT. Floor-standing devices shall be placed either directly on the reference ground-plane or on insulating material as described in ANSI C63.4. All other surfaces of tabletop or floor standing EUTs shall be at least 80 cm from any other grounded conducting surface, including the case or cases of one or more LISNs.

6.2.5 Final ac power-line conducted emission measurements

Based on the exploratory tests of the EUT performed in 6.2.4, the one EUT cable configuration and arrangement and mode of operation that produced the emission with the highest amplitude relative to the limit is selected for the final measurement, while applying the appropriate modulating signal to the EUT. If the EUT is relocated from an exploratory test site to a final test site, the highest emissions shall be re-maximized at the final test location before final ac power-line conducted emission measurements are performed. The final test on all current-carrying conductors of all of the power cords to the equipment that comprises the EUT (but not the cords associated with other non-EUT equipment in the system) is then performed for the full frequency range for which the EUT is being tested for compliance without further variation of the EUT arrangement, cable positions, or EUT mode of operation. If the EUT is comprised of equipment units that have their own separate ac power connections, e.g., floor-standing equipment with independent power cords for each shelf that are able to connect directly to the ac power network, each current-carrying conductor of one unit is measured while the other units are connected to a second (or more) LISN(s). All units shall be separately measured. If a power strip is provided by the manufacturer, to supply all of the units making up the EUT, only the conductors in the power cord of the power strip shall be measured.



Record the six highest EUT emissions relative to the limit of each of the current-carrying conductors of the power cords of the equipment that comprises the EUT over the frequency range specified by the procuring or regulatory agency.

Ref. C63.10-2009 section 6.2

Test Procedure

1. Using Vasona software, configure the spectrum analyzer as shown above (be sure to enter all losses between the transmitter output and the spectrum analyzer).
2. Set the radio in continuous transmit mode.
3. Connect cable end to LISN Hot port and other cable end to the spectrum Analyzer/EMC receiver RF input port. Terminate the LISN neutral port with a 50 Ω impedance terminator.
4. Sweep the frequency range from 150 kHz to 30 MHz (segment if necessary)
5. Use the peak marker function to determine the maximum amplitude level.
6. Center marker frequency and perform final measurement using applicable detector (Quasi-Pk/Average).
7. Record at least 6 highest reading for the worst case operating modes in Quasi-peak/Average.
8. Repeat the test on Neutral lead.
9. Repeat step 3 – 7 with the radio sets in the Receiver mode.
10. Record at least 6 highest reading in Quasi-peak/Average

Ref. C63.10-2009 section 4 / CISPR16-1-1

Test Parameters

Span = Entire frequency range or segment if necessary.
Reference Level = 70 dBuV
RBW = 9 kHz
VBW \geq 3 x RBW
Sweep Time = Couple
Detector = Quasi-Peak & Average



Recorded Test Data for 802.11a mode:

Conducted Emissions Test Result Tables for 802.11a (TX Ch40/ Quasi-Peak & Average)

| Subtest Date: | | | | 12-Nov-2014 | | | | | | |
|---|------------|---------------|--------------|-----------------------------|------------|----------------------|--------------|-------------|---------------------|------------|
| Engineer | | | | Danh Le | | | | | | |
| Lab Information | | | | Building B, 3m Anechoic | | | | | | |
| Subtest Title | | | | Conducted Emissions | | | | | | |
| Frequency Range | | | | 150 kHz - 30 MHz | | | | | | |
| Comments on the above Test Results | | | | TX Ch40 (5200 MHz) – 6 Mbps | | | | | | |
| Frequency (MHz) | Raw (dBuV) | Cab Loss (dB) | Factors (dB) | Level (dBuV) | Detector | Lines (Live/Neutral) | Limit (dBuV) | Margin (dB) | Results Pass / Fail | Comments |
| 0.1715 | 31.6 | 20.98 | 0.03 | 52.61 | Quasi Peak | Live | 64.89 | -12.28 | Pass | TX / Ch 40 |
| 0.2418 | 25.04 | 20.65 | 0.02 | 45.71 | Quasi Peak | Live | 62.03 | -16.33 | Pass | TX / Ch 40 |
| 0.2418 | 14.42 | 20.65 | 0.02 | 35.09 | Average | Live | 52.03 | -16.95 | Pass | TX / Ch 40 |
| 3.9266 | 9 | 20 | 0.04 | 29.04 | Average | Live | 46 | -16.96 | Pass | TX / Ch 40 |
| 0.5285 | 18.5 | 20.03 | 0.03 | 38.56 | Quasi Peak | Neutral | 56 | -17.44 | Pass | TX / Ch 40 |
| 0.2284 | 24.07 | 20.7 | 0.03 | 44.81 | Quasi Peak | Neutral | 62.51 | -17.7 | Pass | TX / Ch 40 |
| 3.9266 | 18.12 | 20 | 0.04 | 38.16 | Quasi Peak | Live | 56 | -17.84 | Pass | TX / Ch 40 |
| 0.3557 | 20.58 | 20.27 | 0.02 | 40.88 | Quasi Peak | Neutral | 58.83 | -17.95 | Pass | TX / Ch 40 |
| 0.2284 | 12.5 | 20.7 | 0.03 | 33.24 | Average | Neutral | 52.51 | -19.27 | Pass | TX / Ch 40 |
| 0.3557 | 9.22 | 20.27 | 0.02 | 29.52 | Average | Neutral | 48.83 | -19.31 | Pass | TX / Ch 40 |
| 0.8067 | 16.65 | 20.01 | 0.03 | 36.68 | Quasi Peak | Neutral | 56 | -19.32 | Pass | TX / Ch 40 |
| 0.2986 | 20.47 | 20.44 | 0.02 | 40.94 | Quasi Peak | Live | 60.28 | -19.34 | Pass | TX / Ch 40 |
| 1.1028 | 16.53 | 19.99 | 0.06 | 36.58 | Quasi Peak | Neutral | 56 | -19.42 | Pass | TX / Ch 40 |
| 0.1715 | 14.12 | 20.98 | 0.03 | 35.13 | Average | Live | 54.89 | -19.76 | Pass | TX / Ch 40 |
| 0.9061 | 16.09 | 20 | 0.02 | 36.1 | Quasi Peak | Live | 56 | -19.9 | Pass | TX / Ch 40 |
| 0.5285 | 6.03 | 20.03 | 0.03 | 26.09 | Average | Neutral | 46 | -19.91 | Pass | TX / Ch 40 |
| 0.3754 | 18.2 | 20.22 | 0.03 | 38.45 | Quasi Peak | Live | 58.38 | -19.93 | Pass | TX / Ch 40 |
| 0.8067 | 5.43 | 20.01 | 0.03 | 25.47 | Average | Neutral | 46 | -20.53 | Pass | TX / Ch 40 |
| 1.1028 | 5.08 | 19.99 | 0.06 | 25.13 | Average | Neutral | 46 | -20.87 | Pass | TX / Ch 40 |
| 0.2986 | 8.37 | 20.44 | 0.02 | 28.84 | Average | Live | 50.28 | -21.44 | Pass | TX / Ch 40 |
| 0.3754 | 6.49 | 20.22 | 0.03 | 26.74 | Average | Live | 48.38 | -21.64 | Pass | TX / Ch 40 |
| 4.189 | 4.23 | 20.01 | 0.03 | 24.27 | Average | Live | 46 | -21.73 | Pass | TX / Ch 40 |
| 0.9061 | 3.12 | 20 | 0.02 | 23.14 | Average | Live | 46 | -22.86 | Pass | TX / Ch 40 |
| 4.189 | 12.81 | 20.01 | 0.03 | 32.85 | Quasi Peak | Live | 56 | -23.15 | Pass | TX / Ch 40 |
| 0.7049 | 9.99 | 20.02 | 0.03 | 30.04 | Quasi Peak | Neutral | 56 | -25.96 | Pass | TX / Ch 40 |
| 0.7049 | -2.55 | 20.02 | 0.03 | 17.5 | Average | Neutral | 46 | -28.5 | Pass | TX / Ch 40 |





| Subtest Date: | | | | 12-Nov-2014 | | | | | | |
|---|------------|---------------|--------------|-------------------------|------------|----------------------|--------------|-------------|---------------------|------------|
| Engineer | | | | Danh Le | | | | | | |
| Lab Information | | | | Building B, 3m Anechoic | | | | | | |
| Subtest Title | | | | Conducted Emissions | | | | | | |
| Frequency Range | | | | 150 kHz - 30 MHz | | | | | | |
| Comments on the above Test Results | | | | RX Ch40 (5200 MHz) | | | | | | |
| Frequency (MHz) | Raw (dBuV) | Cab Loss (dB) | Factors (dB) | Level (dBuV) | Detector | Lines (Live/Neutral) | Limit (dBuV) | Margin (dB) | Results Pass / Fail | Comments |
| 0.1735 | 31.68 | 20.97 | 0.05 | 52.7 | Quasi Peak | Live | 64.79 | -12.1 | Pass | RX / Ch 40 |
| 0.1713 | 30.51 | 20.98 | 0.03 | 51.53 | Quasi Peak | Neutral | 64.9 | -13.37 | Pass | RX / Ch 40 |
| 0.3024 | 14.41 | 20.43 | 0.02 | 34.86 | Average | Neutral | 50.18 | -15.31 | Pass | RX / Ch 40 |
| 0.1735 | 17.61 | 20.97 | 0.05 | 38.63 | Average | Live | 54.79 | -16.16 | Pass | RX / Ch 40 |
| 0.3003 | 12.43 | 20.44 | 0.03 | 32.91 | Average | Live | 50.23 | -17.33 | Pass | RX / Ch 40 |
| 0.3003 | 22.1 | 20.44 | 0.03 | 42.57 | Quasi Peak | Live | 60.23 | -17.66 | Pass | RX / Ch 40 |
| 0.1713 | 15.43 | 20.98 | 0.03 | 36.44 | Average | Neutral | 54.9 | -18.45 | Pass | RX / Ch 40 |
| 0.2291 | 22.95 | 20.7 | 0.03 | 43.69 | Quasi Peak | Neutral | 62.48 | -18.79 | Pass | RX / Ch 40 |
| 1.3649 | 16.54 | 19.98 | 0.04 | 36.56 | Quasi Peak | Neutral | 56 | -19.44 | Pass | RX / Ch 40 |
| 3.6494 | 5.91 | 20 | 0.05 | 25.95 | Average | Live | 46 | -20.05 | Pass | RX / Ch 40 |
| 0.3623 | 8.31 | 20.26 | 0.03 | 28.59 | Average | Live | 48.68 | -20.08 | Pass | RX / Ch 40 |
| 3.7308 | 5.8 | 20 | 0.04 | 25.84 | Average | Live | 46 | -20.16 | Pass | RX / Ch 40 |
| 0.2291 | 10.92 | 20.7 | 0.03 | 31.65 | Average | Neutral | 52.48 | -20.83 | Pass | RX / Ch 40 |
| 0.7047 | 14.9 | 20.02 | 0.03 | 34.95 | Quasi Peak | Neutral | 56 | -21.05 | Pass | RX / Ch 40 |
| 1.3649 | 4.93 | 19.98 | 0.04 | 24.95 | Average | Neutral | 46 | -21.05 | Pass | RX / Ch 40 |
| 3.6494 | 14.83 | 20 | 0.05 | 34.87 | Quasi Peak | Live | 56 | -21.13 | Pass | RX / Ch 40 |
| 3.7308 | 14.82 | 20 | 0.04 | 34.86 | Quasi Peak | Live | 56 | -21.14 | Pass | RX / Ch 40 |
| 0.7047 | 2.49 | 20.02 | 0.03 | 22.54 | Average | Neutral | 46 | -23.46 | Pass | RX / Ch 40 |
| 4.1444 | 12.32 | 20.01 | 0.04 | 32.37 | Quasi Peak | Live | 56 | -23.63 | Pass | RX / Ch 40 |
| 4.1444 | 2.19 | 20.01 | 0.04 | 22.24 | Average | Live | 46 | -23.76 | Pass | RX / Ch 40 |
| 0.3623 | 14.58 | 20.26 | 0.03 | 34.87 | Quasi Peak | Live | 58.68 | -23.81 | Pass | RX / Ch 40 |
| 2.7089 | 1.55 | 19.97 | 0.03 | 21.55 | Average | Neutral | 46 | -24.45 | Pass | RX / Ch 40 |
| 3.9794 | 1.33 | 20 | 0.04 | 21.38 | Average | Neutral | 46 | -24.62 | Pass | RX / Ch 40 |
| 0.3024 | 14.5 | 20.43 | 0.02 | 34.95 | Quasi Peak | Neutral | 60.18 | -25.23 | Pass | RX / Ch 40 |
| 2.7089 | 10.68 | 19.97 | 0.03 | 30.67 | Quasi Peak | Neutral | 56 | -25.33 | Pass | RX / Ch 40 |
| 3.9794 | 10.34 | 20 | 0.04 | 30.38 | Quasi Peak | Neutral | 56 | -25.62 | Pass | RX / Ch 40 |



Graphical Test Results for 802.11a Mode:

Note: The data displayed on the plots detailed in this section were measured using a 'Peak Detector'.
Please refer to the results table for the detectors used during final measurements.

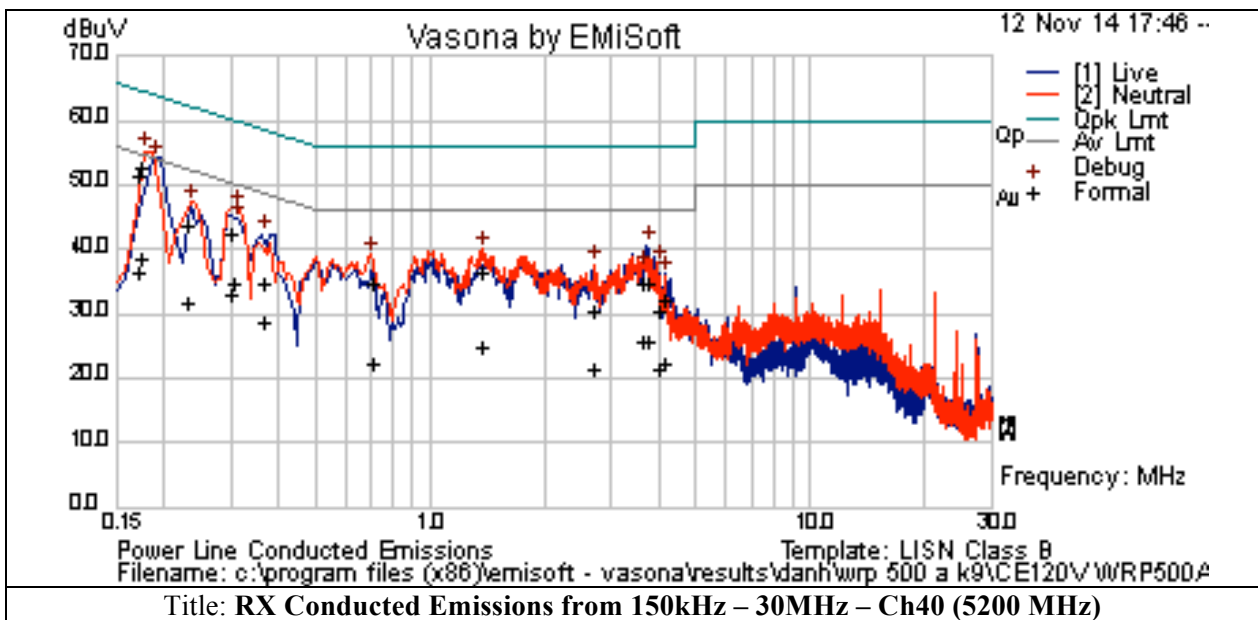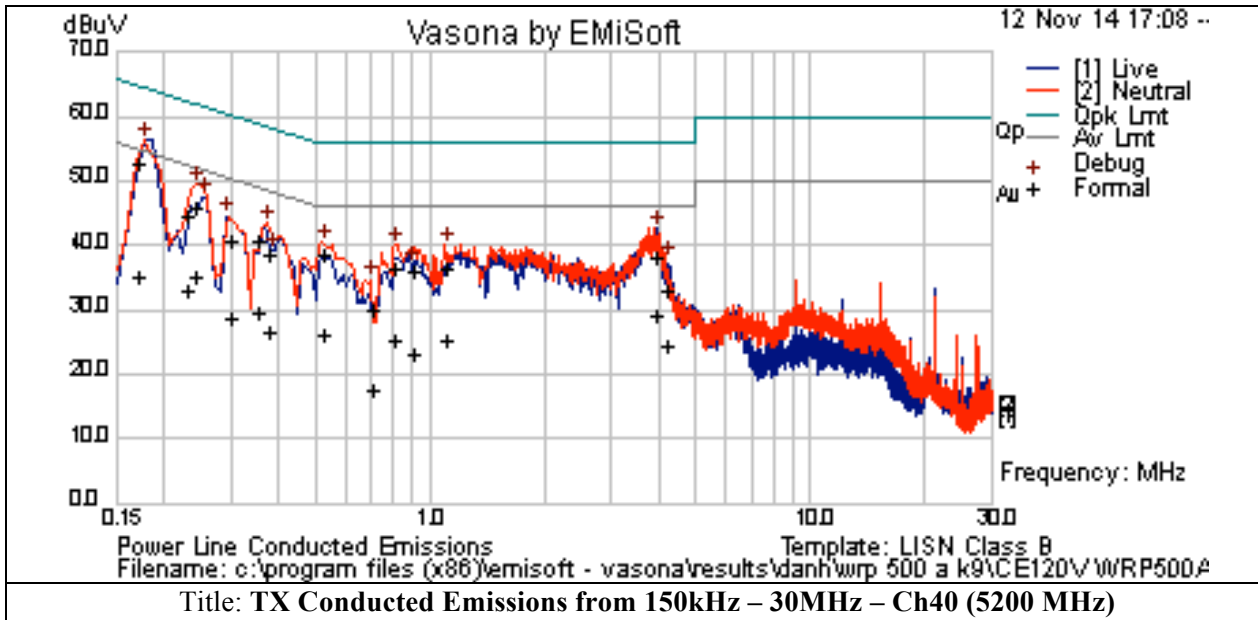



Appendix B: Photographs of Test Setups

Setup photos are in a separate document.



Appendix C: Test Equipment/Software Used to perform the test

| Test Equipment List | | | | | |
|----------------------------|---------------------|-----------------------|--|-----------------|--------------------------|
| Equipment # | Manufacturer | Model | Description | Last Cal | Next Cal Due Date |
| CIS005691 | Miteq | NSP1800-25-S1 | Broadband Preamplifier (1-18GHz) | 27-JAN-14 | 27-JAN-15 |
| CIS008448 | Cisco | NSA 5m Chamber | NSA 5m Chamber | 07-OCT-14 | 07-OCT-15 |
| CIS021117 | Micro-Coax | UFB311A-0-2484-520520 | RF Coaxial Cable, to 18GHz, 248.4 in | 25-AUG-14 | 25-AUG-15 |
| CIS025655 | Micro-Coax | UFB311A-1-0840-504504 | RF Coaxial Cable, to 18GHz, 84 in | 27-FEB-14 | 27-FEB-15 |
| CIS025658 | Micro-Coax | UFB311A-1-0840-504504 | RF Coaxial Cable, to 18GHz, 84 in | 14-FEB-14 | 14-FEB-15 |
| CIS032806 | Sunol Sciences | JB1 | Combination Antenna | 20-MAR-14 | 20-MAR-15 |
| CIS037581 | ETS-Lindgren | 3117 | Double Ridged Waveguide Horn Antenna | 16-SEP-14 | 16-SEP-15 |
| CIS040597 | Cisco | Above 1GHz Site Cal | Above 1GHz Cisp Site Verification | 28-MAY-14 | 28-MAY-15 |
| CIS042013 | ETS-Lindgren | 3117 | Double Ridged Waveguide Horn Antenna | 09-APR-14 | 09-APR-15 |
| CIS040641 | Rohde & Schwarz | ESU26 | EMI Test Receiver | 29-JUL-14 | 29-JUL-15 |
| CIS041935 | Newport | iBTHP-5-DB9 | 5 inch Temp/RH/Press Sensor w/20ft cable | 01-APR-14 | 01-APR-15 |
| CIS049563 | Huber + Suhner | Sucoflex 106A | N Type Cable 18GHz | 25-AUG-14 | 25-AUG-15 |
| CIS030666 | Micro-Tronics | BRM50702-02 | Band Reject Filter, Stop Band=2.4-2.5GHz | 03-JUN-14 | 03-JUN-2015 |
| CIS051741 | Rohde & Schwarz | NRP-Z81 | Power Meter | 08-Jan-14 | 08-Jan-15 |
| CIS040503 | Agilent | E4440A | Spectrum Analyzer | 06-Jun-14 | 06-Jun-15 |
| CIS041995 | Mini-Circuits | BW-S6W2+ | SMA 6 dB Attenuator | 21-MAR-14 | 21-Mar-15 |
| CIS07036 | Agilent | E7401A | EMC Analyzer | 11-Sep-14 | 11-Sep-15 |
| CIS08197 | TTL, Inc | H613-150K-50-21378 | HP-Filter | 17-Apr-14 | 17-Apr-15 |
| CIS08192 | Fisher Custom Com | 53779 | Pulse Limiter | 30-Jul-14 | 30-Jul-15 |
| CIS046010 | Fisher Custom Com | F-090527-1009-1 | LISN | 20-Jun-14 | 20-Jun-15 |
| CIS035619 | TestEquity | 105A | Half Cube Temperature Chamber | 17-APR-2014 | 17-APR-2015 |



| |
|----------------------------------|
| Software Used for Testing |
|----------------------------------|

- | |
|--|
| <ol style="list-style-type: none">1. Vasona File version 5.073, 5.0892. Winsoft Radio Automation Software version 1.2 |
|--|