


EC LEVEL: 021244	BY: S. SMIEJA	DATE: 4-MAR-03	PART NO. 4827-100
---------------------	------------------	-------------------	----------------------

NOTES:

- MATERIAL: 10 MIL. POLYCARBONATE WITH VELVET/MATTE TEXTURE.
ADHESIVE: 3M 467MP, 2 MIL.
- ENVIRONMENTAL CONDITIONS/TESTING:
 - OPERATING TEMPERATURE RANGE: 0° TO 125°F.
 - STORAGE TEMPERATURE RANGE: -40° TO 150°F.
 - THERMAL SHOCK: 150°F TO ROOM, ROOM TO -40°F (3 CYCLES).
 - HUMIDITY: 95% @ 95°F FOR 21 DAYS.
 - ESD: MAXIMUM AIR GAP DISCHARGE 20kV.
 - CHEMICAL: RESISTANCE TO WATER, ALCOHOL (METHYL, ETHYL AND ISOPROPYL) AND MILD DETERGENT.
- COLORS:
 - INSPECT PER CUSTOMER APPROVED SAMPLE.**
 - BACKGROUND: MEDTRONIC MEDIUM GRAY, P/N 186034-001.
 - TEXT & SYMBOLS: MEDTRONIC DARK BLUE, P/N 186031-001.
- ARTWORK SHOWN FOR REFERENCE ONLY, REFER TO ELECTRONIC VERSION.
- BOLD ITEMS INDICATE PLEXUS INSPECTION REQUIREMENTS.

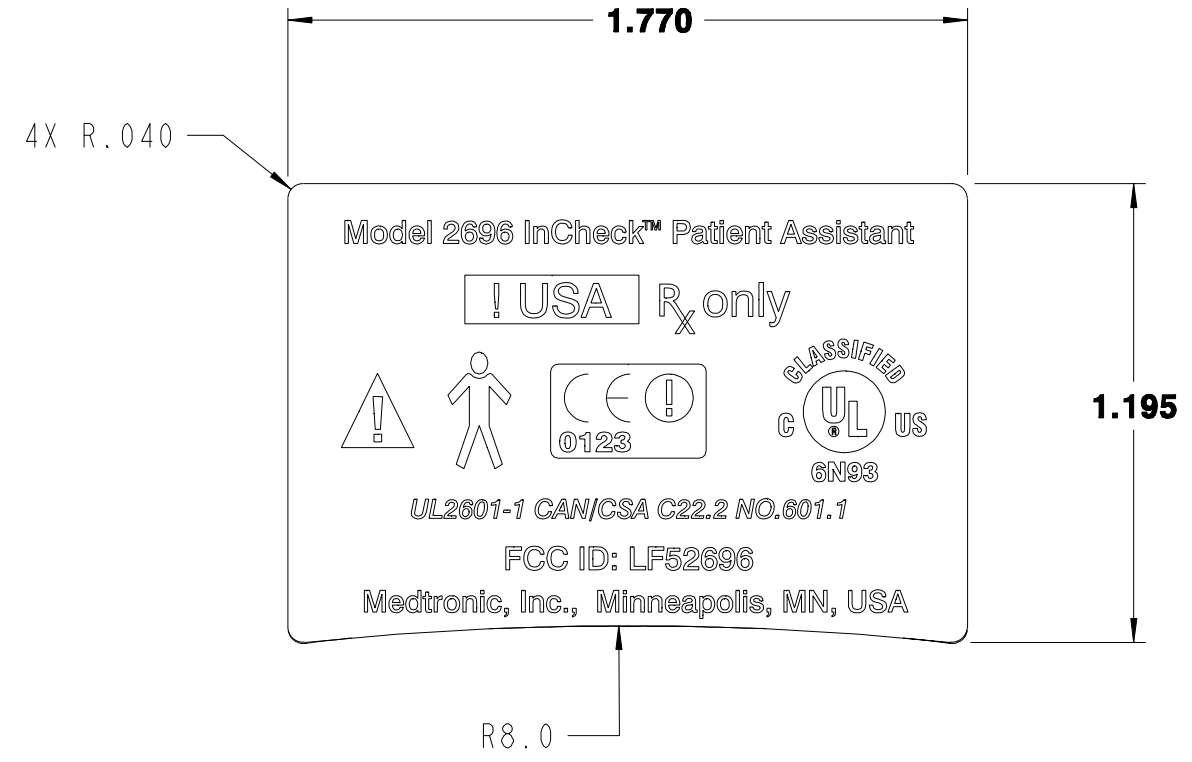

PART NO. 4827-100	DATE: 4-MAR-03	BY: S. SMIEJA	EC LEVEL: 021244
----------------------	-------------------	------------------	---------------------

SCALE 2:1	DIMENSIONS IN INCHES
TOLERANCES UNLESS NOTED	LINEAR X.X ± 0.1 X.XX ± 0.02 X.XXX ± 0.010 ANGLES ± 0.5°
DO NOT SCALE DRAWING	
FILE NAME: 4827-100_LABEL_MAIN-PRODUCTION	

	TITLE: LABEL, MAIN-PRODUCTION
	PROJECT: PATIENT ASSISTANT
CONFIDENTIAL ALL INFORMATION CONTAINED IN THIS DRAWING MAY NOT BE USED WITHOUT THE WRITTEN CONSENT OF PLEXUS TECHNOLOGY GROUP	DESIGNER: S. SMIEJA
	DATE: 19-Dec-02
VIEW CONVENTION THIRD ANGLE 	DWG SIZE B SHEET: 1 OF 1 PART NO. 4827-100

PLEXUS-TG RELEASED
 03/07/03