



**FCC CFR47 PART 15 SUBPART C  
INDUSTRY CANADA RSS-210 ISSUE 7**

**CERTIFICATION TEST REPORT**

**FOR**

**BLUETOOTH TRANSCEIVER MODULE**

**MODEL NUMBER: BCM92070MD\_REF**

**FCC ID: QDS-BRCM1043**

**IC: 4324A-BRCM1043**

**REPORT NUMBER: 08U12247-11**

**ISSUE DATE: JANUARY 19, 2009**

*Prepared for*

**BROADCOM CORPORATION  
190 MATHILDA PLACE  
SUNNYVALE, CA 94086, U.S.A.**

*Prepared by*

**COMPLIANCE CERTIFICATION SERVICES  
47173 BENICIA STREET  
FREMONT, CA 94538, U.S.A.  
TEL: (510) 771-1000  
FAX: (510) 661-0888**



**NVLAP LAB CODE 200065-0**

Revision History

<u>Rev.</u>	<u>Issue Date</u>	<u>Revisions</u>	<u>Revised By</u>
---	01/19/09	Initial Issue	T. Chan

## TABLE OF CONTENTS

<b>1. ATTESTATION OF TEST RESULTS</b> .....	<b>4</b>
<b>2. TEST METHODOLOGY</b> .....	<b>5</b>
<b>3. FACILITIES AND ACCREDITATION</b> .....	<b>5</b>
<b>4. CALIBRATION AND UNCERTAINTY</b> .....	<b>5</b>
4.1. <i>MEASURING INSTRUMENT CALIBRATION</i> .....	5
4.2. <i>MEASUREMENT UNCERTAINTY</i> .....	5
<b>5. EQUIPMENT UNDER TEST</b> .....	<b>6</b>
5.1. <i>DESCRIPTION OF EUT</i> .....	6
5.2. <i>MAXIMUM OUTPUT POWER</i> .....	6
5.3. <i>DESCRIPTION OF AVAILABLE ANTENNAS</i> .....	6
5.4. <i>SOFTWARE AND FIRMWARE</i> .....	6
5.5. <i>WORST-CASE CONFIGURATION AND MODE</i> .....	6
5.6. <i>DESCRIPTION OF TEST SETUP</i> .....	7
<b>6. TEST AND MEASUREMENT EQUIPMENT</b> .....	<b>9</b>
<b>7. ANTENNA PORT TEST RESULTS</b> .....	<b>10</b>
7.1.1. 20 dB AND 99% BANDWIDTH.....	10
7.1.2. HOPPING FREQUENCY SEPARATION .....	17
7.1.3. NUMBER OF HOPPING CHANNELS.....	19
7.1.4. AVERAGE TIME OF OCCUPANCY.....	24
7.1.5. OUTPUT POWER .....	31
7.1.6. CONDUCTED SPURIOUS EMISSIONS.....	36
<b>8. RADIATED TEST RESULTS</b> .....	<b>45</b>
8.1. <i>TRANSMITTER ABOVE 1 GHz</i> .....	46
8.1.1. GFSK MODE.....	46
8.1.2. 8PSK MODULATION .....	51
8.2. <i>RECEIVER ABOVE 1 GHz</i> .....	56
8.3. <i>WORST-CASE BELOW 1 GHz</i> .....	57
<b>9. AC POWER LINE CONDUCTED EMISSIONS</b> .....	<b>59</b>
<b>10. MAXIMUM PERMISSIBLE EXPOSURE</b> .....	<b>62</b>
<b>11. SETUP PHOTOS</b> .....	<b>65</b>

# 1. ATTESTATION OF TEST RESULTS

**COMPANY NAME:** BROADCOM CORPORATION  
190 MATHILDA PLACE  
SUNNYVALE, CA 94086, U.S.A.

**EUT DESCRIPTION:** BLUETOOTH TRANSCEIVER MODULE

**MODEL:** BCM92070MD\_REF

**SERIAL NUMBER:** 0000P2 (Radiated), 0000P1 (Conducted)

**DATE TESTED:** JANUARY 8 - 13, 2009

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 Part 15 Subpart C	Pass
INDUSTRY CANADA RSS-210 Issue 7 Annex 8	Pass
INDUSTRY CANADA RSS-GEN Issue 2	Pass

Compliance Certification Services, Inc. (CCS) tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by CCS based on interpretations and/or observations of test results. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.


**Note:** The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by CCS and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by CCS will constitute fraud and shall nullify the document. No part of this report may be used to claim product certification, approval, or endorsement by NVLAP, NIST, or any government agency.

Approved & Released For CCS By:



THU CHAN  
EMC MANAGER  
COMPLIANCE CERTIFICATION SERVICES

Tested By:

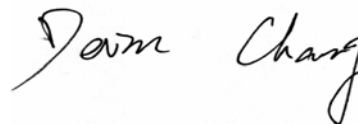

DEVIN CHANG  
EMC ENGINEER  
COMPLIANCE CERTIFICATION SERVICES

## 2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.4-2003, FCC CFR 47 Part 2, FCC CFR 47 Part 15, RSS-GEN Issue 2, and RSS-210 Issue 7 Annex 8

## 3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 Benicia Street, Fremont, California, USA.

CCS is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://www.ccsemc.com>.

## 4. CALIBRATION AND UNCERTAINTY

### 4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

### 4.2. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Power Line Conducted Emission	+/- 2.3 dB
Radiated Emission	+/- 3.4 dB

Uncertainty figures are valid to a confidence level of 95%.

## 5. EQUIPMENT UNDER TEST

### 5.1. DESCRIPTION OF EUT

The EUT is a Bluetooth transceiver module.

The radio module is manufactured by Broadcom Corp.

### 5.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum peak conducted output power as follows:

Frequency Range (MHz)	Mode	Output Power (dBm)	Output Power (mW)
2402 - 2480	Basic GFSK	2.08	1.61
2402 - 2480	Enhanced 8PSK	4.27	2.67

### 5.3. DESCRIPTION OF AVAILABLE ANTENNAS

The radio utilizes a build-in antenna, with a maximum gain of 1.87 dBi.

### 5.4. SOFTWARE AND FIRMWARE

The EUT driver software installed in the host support equipment during testing was Broadcom, 2070 Bluetooth rev.5.1.0.1400.

The test utility software used during testing was Broadcom Blue Tool, rev. 1.1.2.7

### 5.5. WORST-CASE CONFIGURATION AND MODE

For Radiated test, the EUT has been evaluated at X, Y, and Z-axis. The highest measured output power was at X-Axis.

The worst-case Bluetooth channel is determined as the channel with the highest output power.

## 5.6. DESCRIPTION OF TEST SETUP

### SUPPORT EQUIPMENT

PERIPHERAL SUPPORT EQUIPMENT LIST				
Description	Manufacturer	Model	Serial Number	FCC ID
Laptop	DELL	INSPIRON	300866347 1FM6U7U0WI0	DoC
AC Adapter	DELL	LA65NS0-00	CN-CDF623-71615-775-605A	N/A
Adapter Board	Broadcom	BCM9USB323V	1238291	N/A
Adapter Board	Broadcom	BCM9USB323V	1238301	N/A


### I/O CABLES

I/O CABLE LIST						
Cable No.	Port	# of Identica Ports	Connector Type	Cable Type	Cable Length	Remarks
1	AC	1	US115V	Unshielded	1m	N/A
2	DC	1	DC	Unshielded	1.8m	N/A
3	Ribbon	1	Ribbon Cable	Unshielded	.3m	EUT / Adapter Board
4	USB	1	USB	UnShielded	.8m	N/A

### TEST SETUP

The EUT is connected to a host laptop computer via a 5 VDC adapter board during the tests. Test software exercised the radio card.

**SETUP DIAGRAM FOR TESTS**

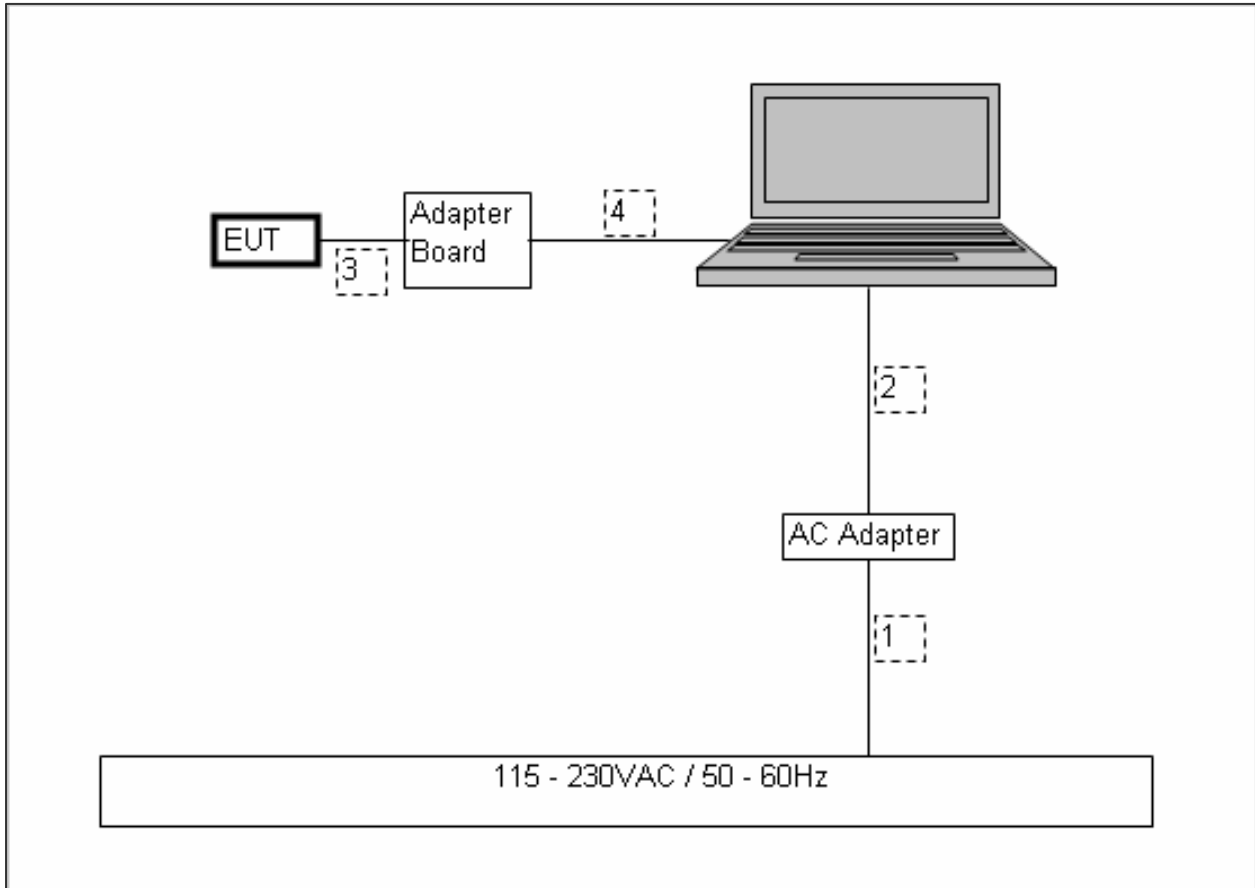



## 6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

TEST EQUIPMENT LIST				
Description	Manufacturer	Model	Asset	Cal Due
Spectrum Analyzer, 44 GHz	Agilent / HP	E4446A	C01012	08/07/09
Bilog Antenna	Sunol Sciences	JB1	C01016	10/13/09
Preamplifier, 26.5 GHz	Agilent / HP	8449B	C00749	09/27/09
Preamplifier, 1300 MHz	Agilent / HP	8447D	C01064	05/09/09
RF Filter Section, 2.9 GHz	Agilent / HP	85420E	C00958	06/12/09
Peak Power Meter	Agilent / HP	E4416A	C00963	12/04/09
Peak / Average Power Sensor	Agilent	E9327A	C00964	12/07/09
EMI Test Receiver, 30 MHz	R & S	ESHS 20	N02396	01/27/09
LISN, 10 kHz ~ 30 MHz	Solar	8012-50-R-24-BNC	N02481	09/15/09
LISN, 30 MHz	FCC	LISN-50/250-25-2	N02625	09/15/09
Antenna, Horn, 18 GHz	ETS	3117	C01005	04/15/09

## 7. ANTENNA PORT TEST RESULTS

### 7.1.1. 20 dB AND 99% BANDWIDTH

#### LIMIT

None; for reporting purposes only.

#### TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The RBW is set to  $\geq 1\%$  of the 20 dB bandwidth. The VBW is set to  $\geq$  RBW. The sweep time is coupled.

#### RESULTS



##### GFSK MODE


Channel	Frequency (MHz)	20 dB Bandwidth (kHz)	99% Bandwidth (kHz)
0	2402	919.334	886.625
39	2441	920.029	870.229
78	2480	919.484	871.794

##### 8PSK MODE


Channel	Frequency (MHz)	20 dB Bandwidth (MHz)	99% Bandwidth (MHz)
0	2402	1.343	1.199
39	2441	1.346	1.208
78	2480	1.348	1.204



**GFSK MODE - 20 dB BANDWIDTH**

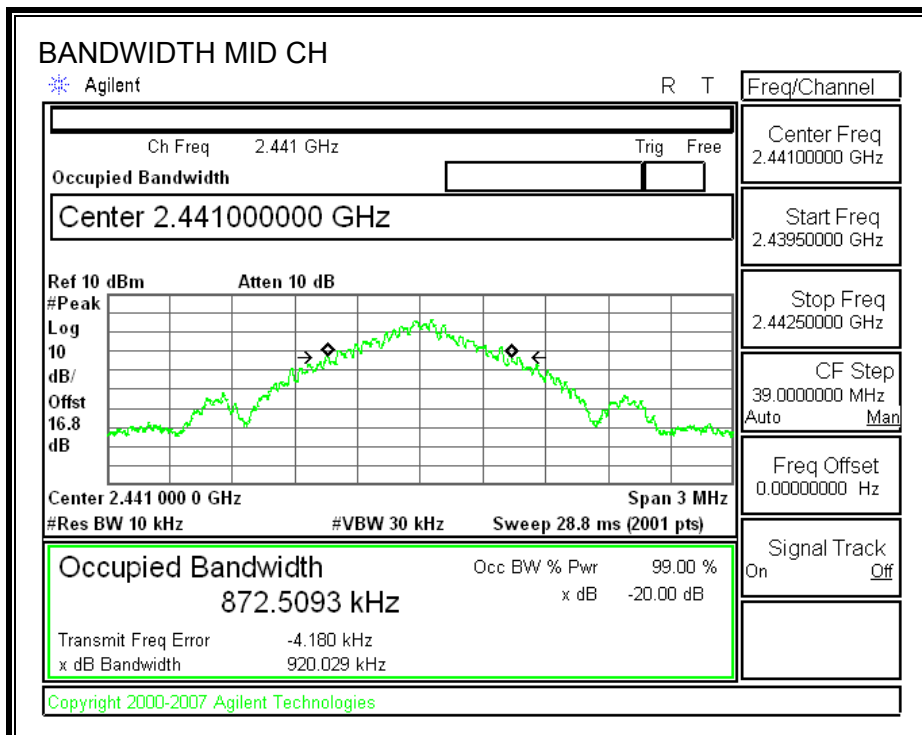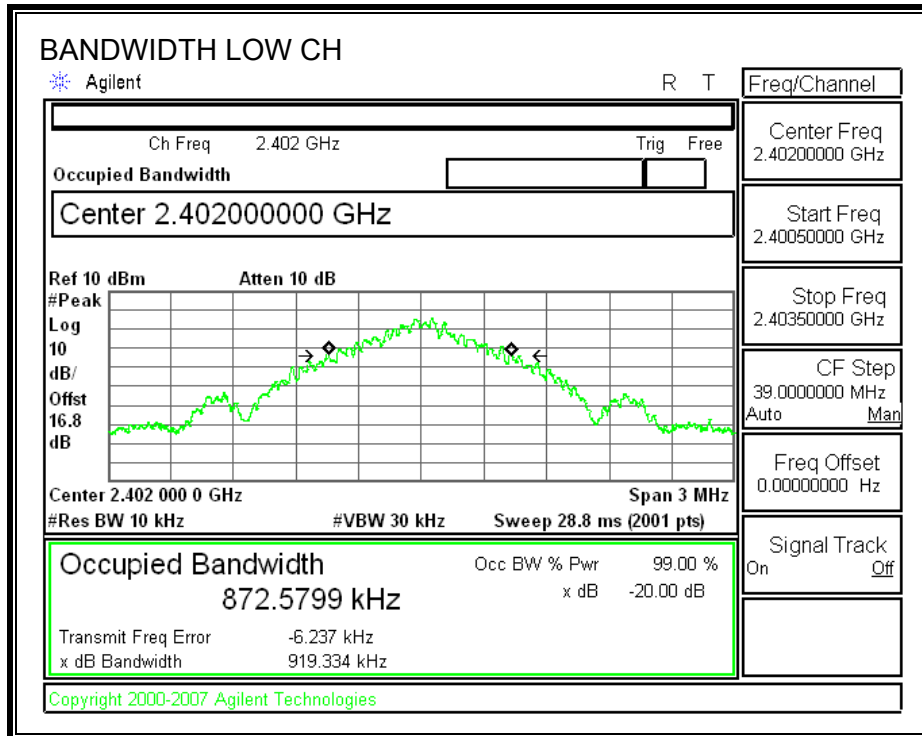


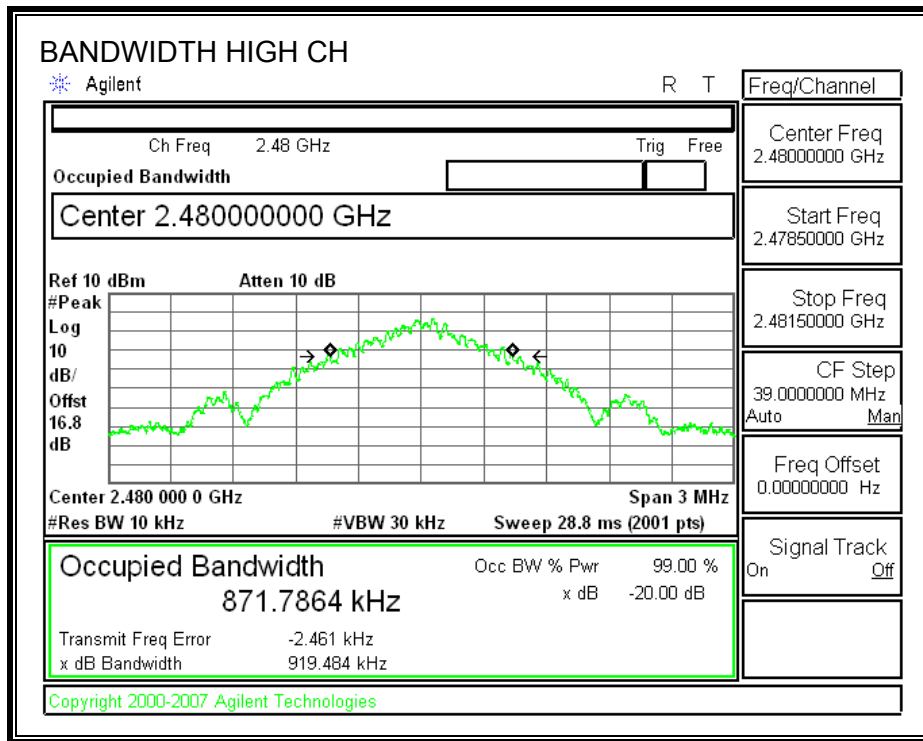



**99% BANDWIDTH**

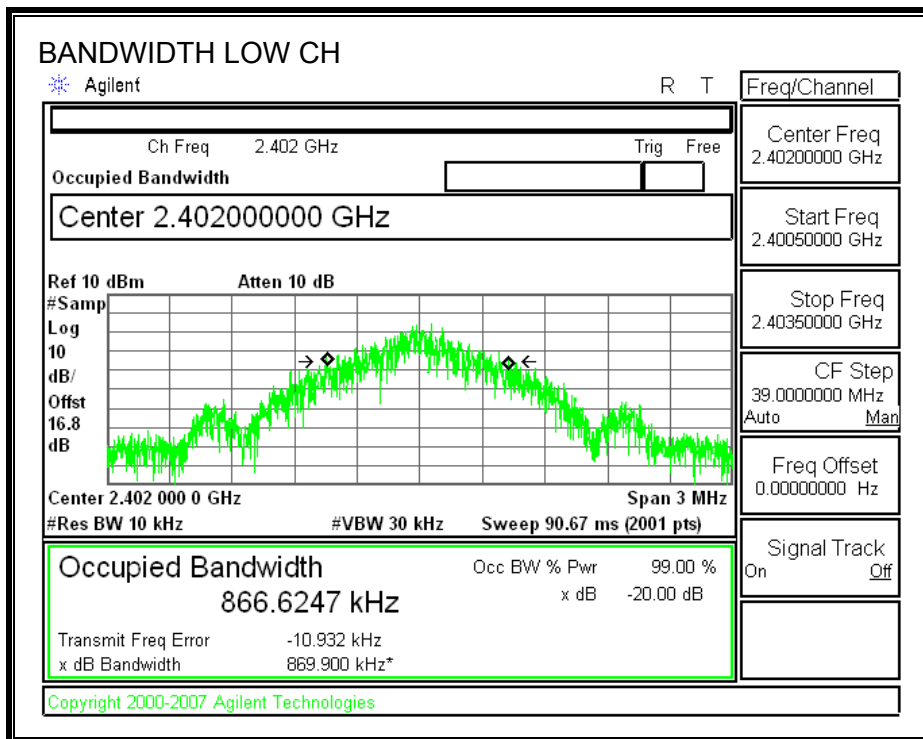

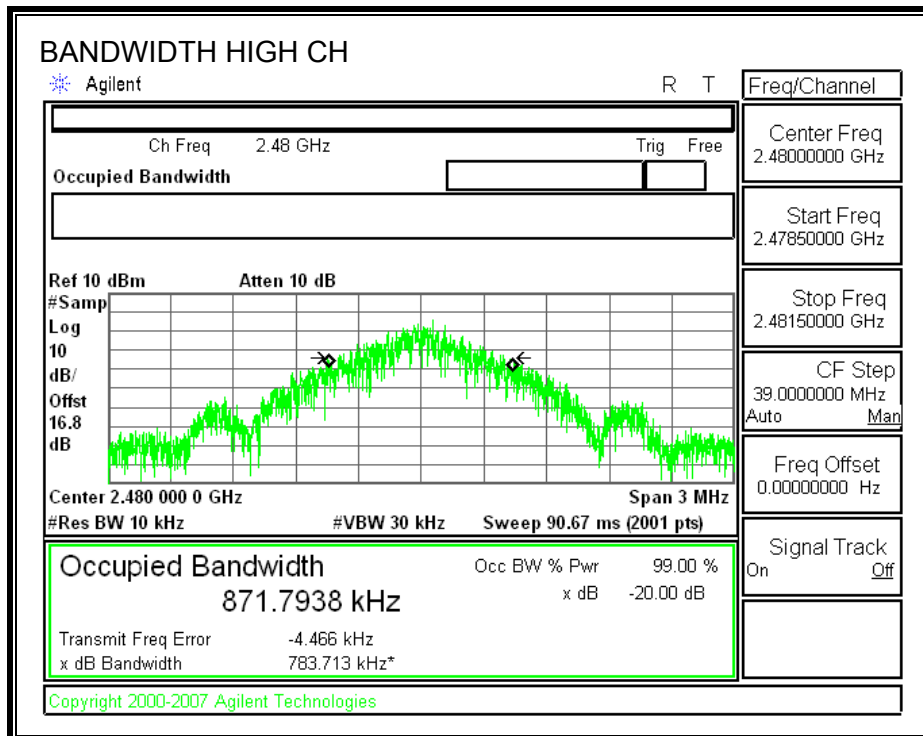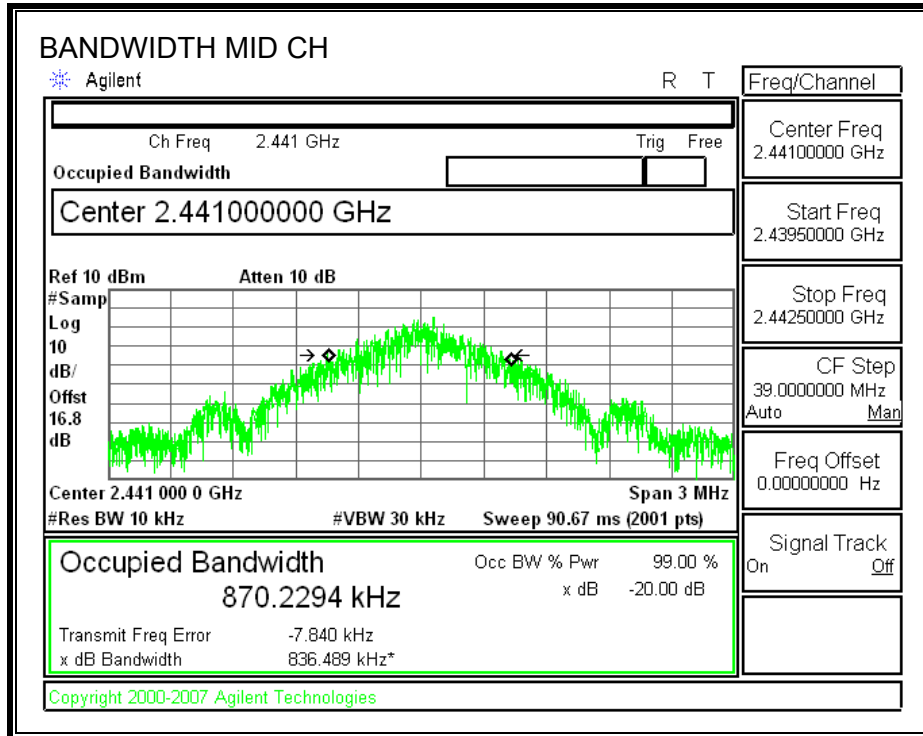




**8PSK MODE - 20 dB BANDWIDTH**

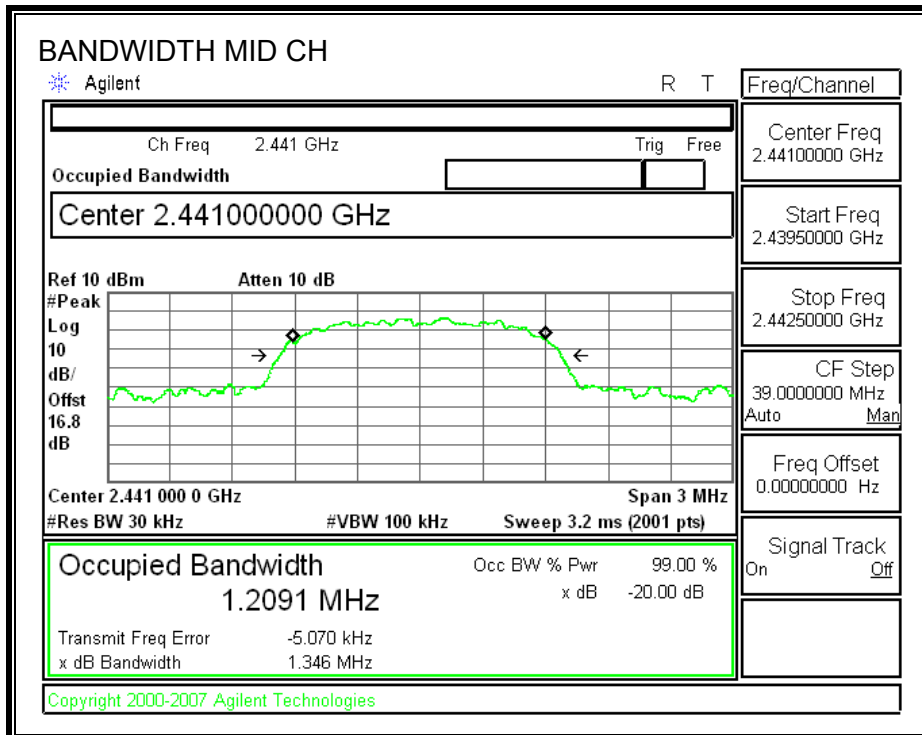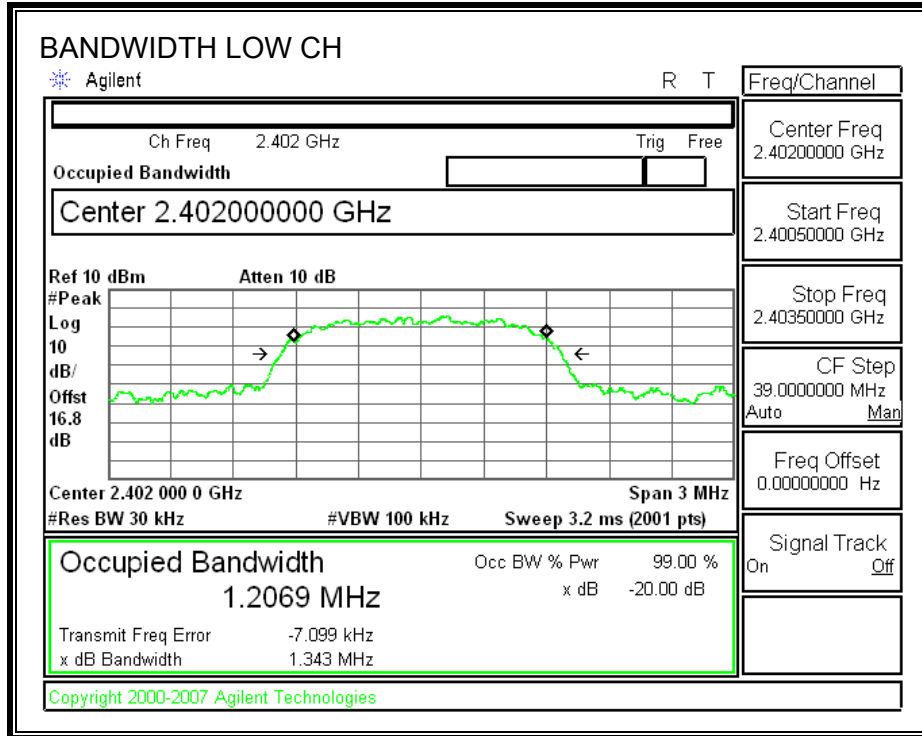

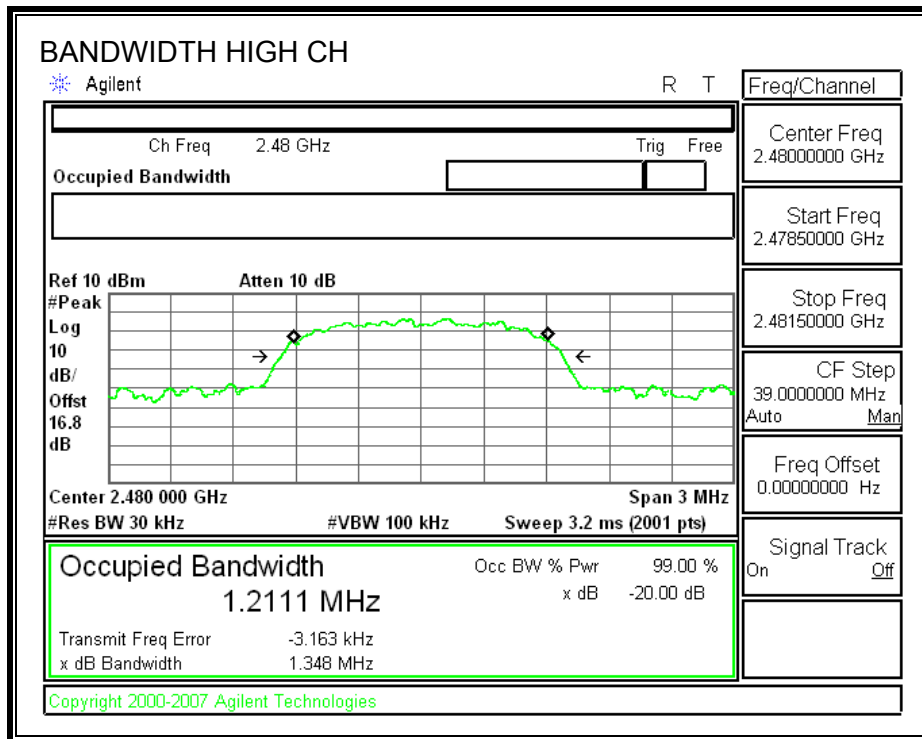

**99% BANDWIDTH**

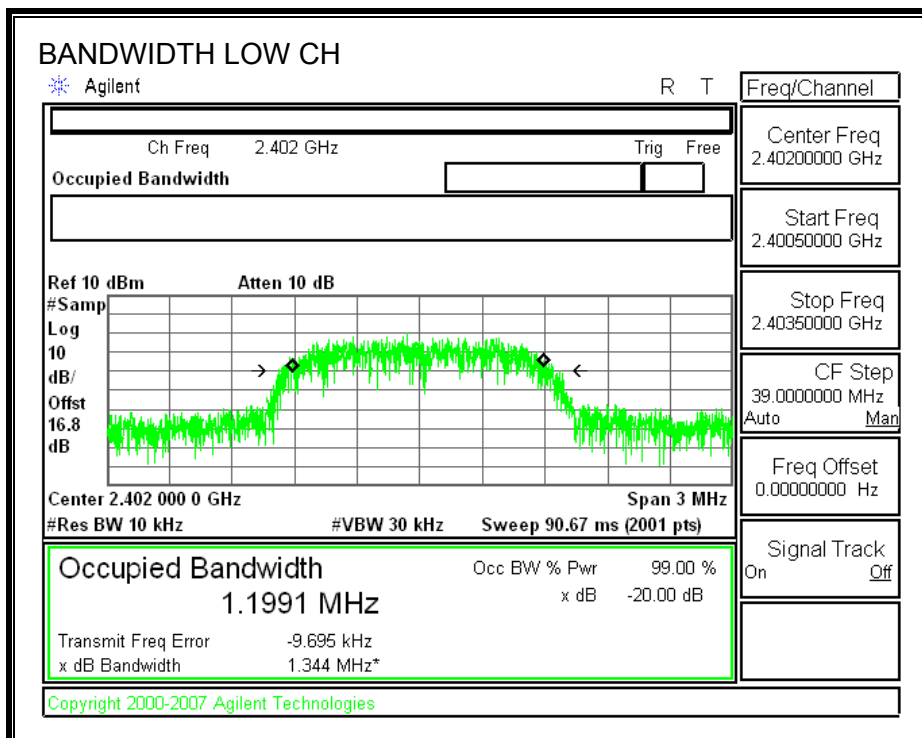

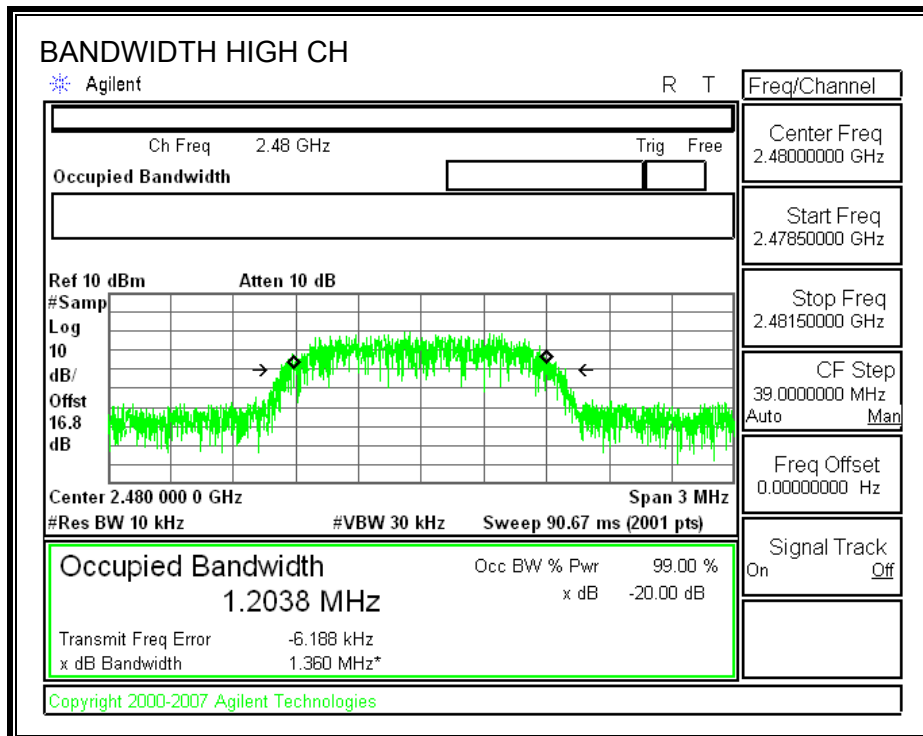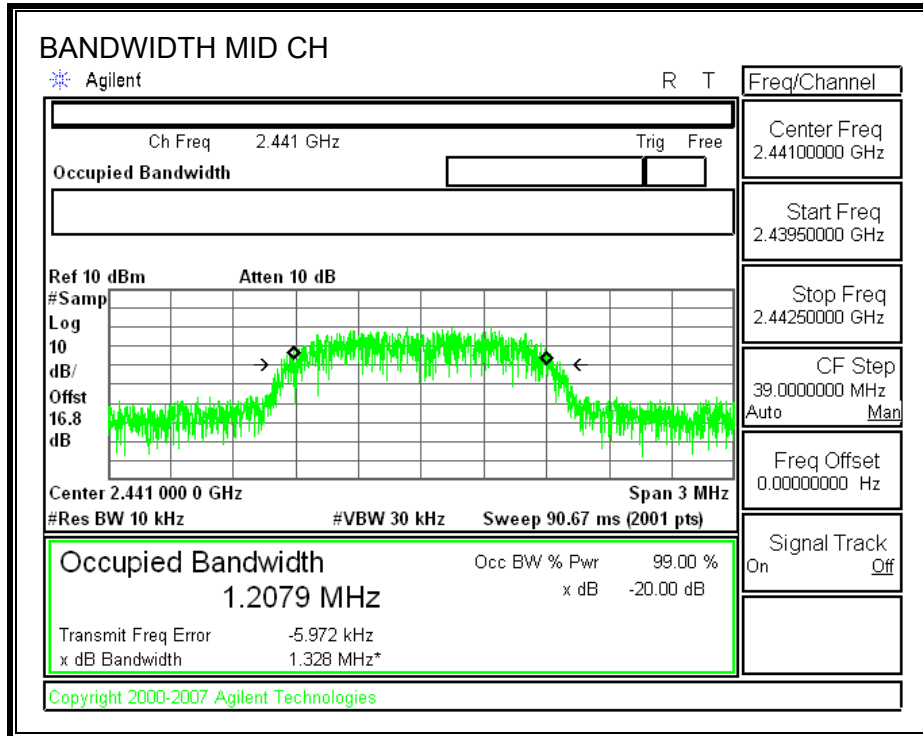



### 7.1.2. HOPPING FREQUENCY SEPARATION

#### LIMIT

FCC §15.247 (a) (1)

IC RSS-210 A8.1 (b)

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

#### TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The RBW is set to 100 kHz and the VBW is set to 300 kHz. The sweep time is coupled.

#### RESULTS


##### GFSK MODE

Channel	Frequency (MHz)	20 dB Bandwidth (kHz)	Freq. Separation (kHz)
39	2441	920.029	1000


##### 8PSK MODE

Channel	Frequency (MHz)	20 dB Bandwidth (kHz)	2/3 of 20dB BW (KHz)	Freq. Separation (KHz)
39	2441	1346.0	897	1000

**HOPPING FREQUENCY SEPARATION – GFSK MODE**

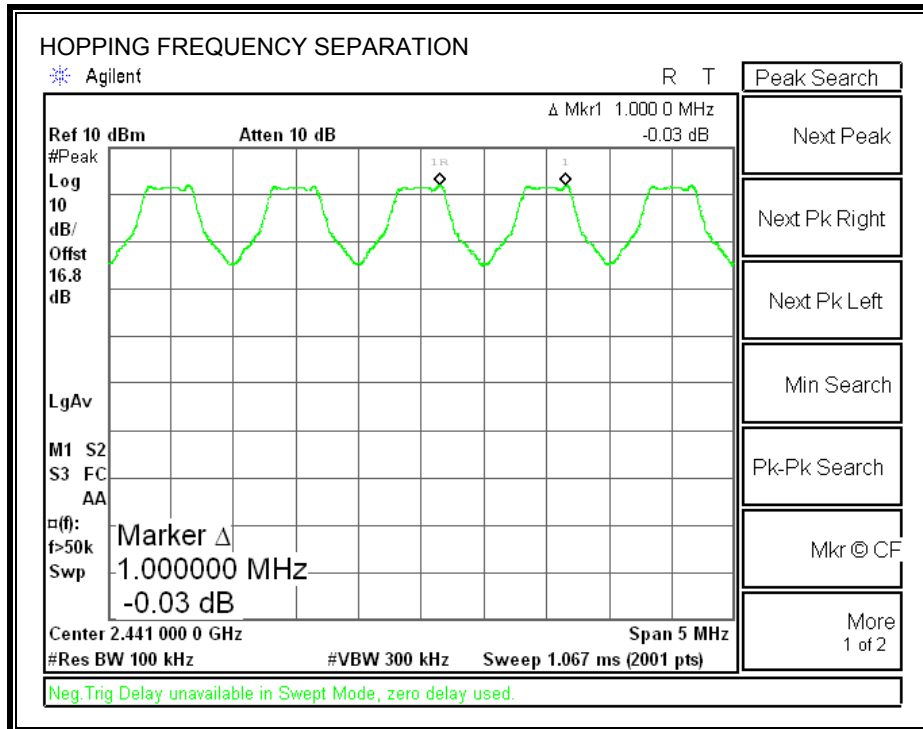

**HOPPING FREQUENCY SEPARATION – 8PSK MODE**

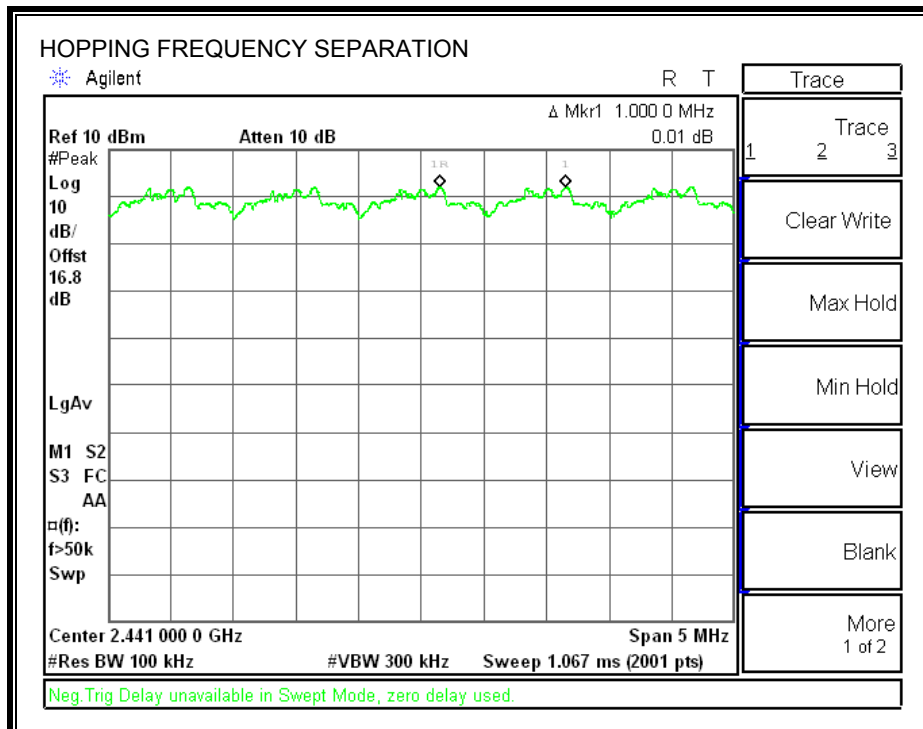

### **7.1.3. NUMBER OF HOPPING CHANNELS**

#### **LIMIT**

FCC §15.247 (a) (1) (iii)

IC RSS-210 A8.1 (d)

Frequency hopping systems in the 2400 – 2483.5 MHz band shall use at least 15 non-overlapping channels.



#### **TEST PROCEDURE**



The transmitter output is connected to a spectrum analyzer. The span is set to cover the entire authorized band, in either a single sweep or in multiple contiguous sweeps. The RBW is set to a maximum of 1 % of the span. The analyzer is set to Max Hold.

#### **RESULTS**



79 Channels observed.



**NUMBER OF HOPPING CHANNELS – GFSK MODE**

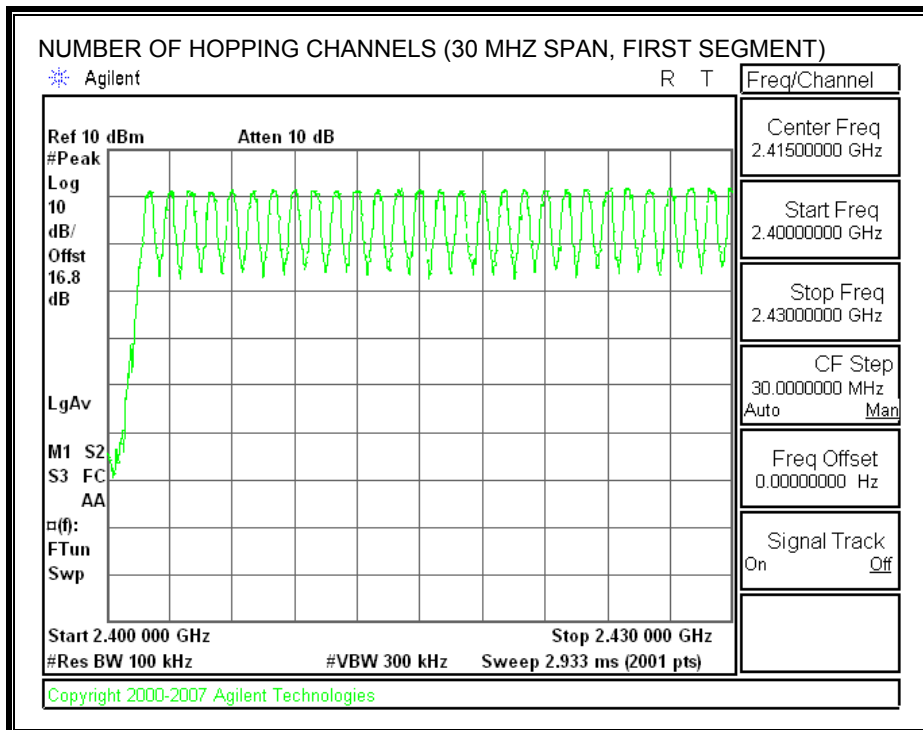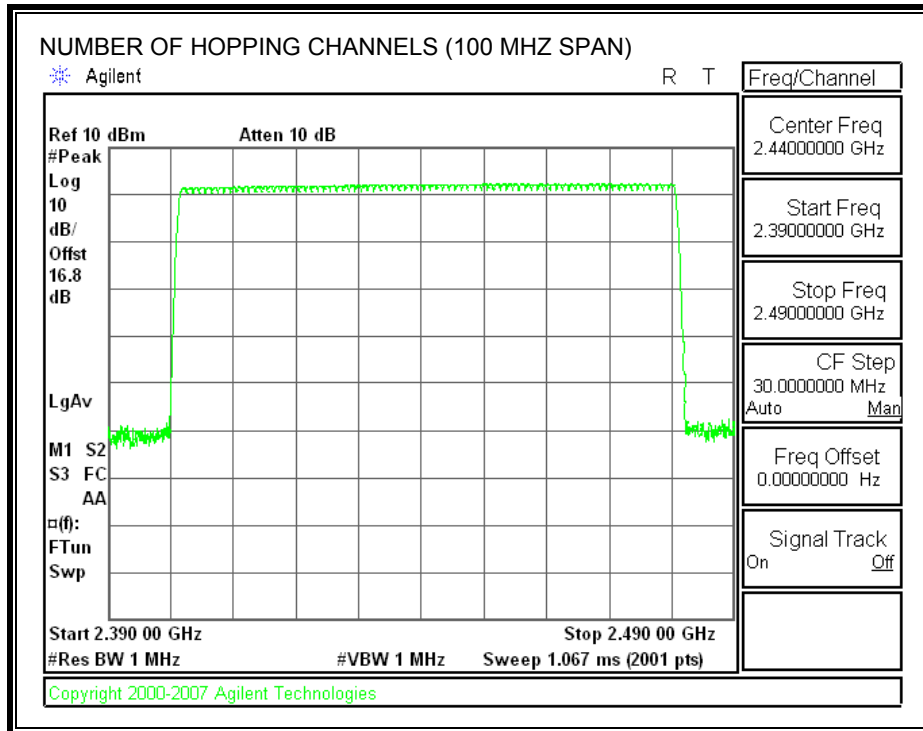

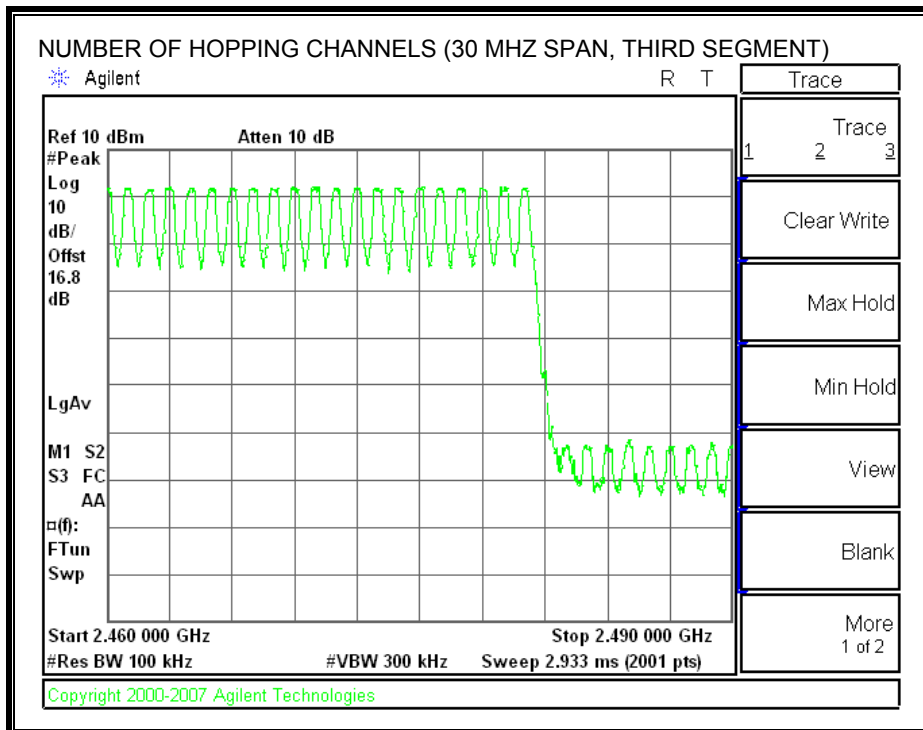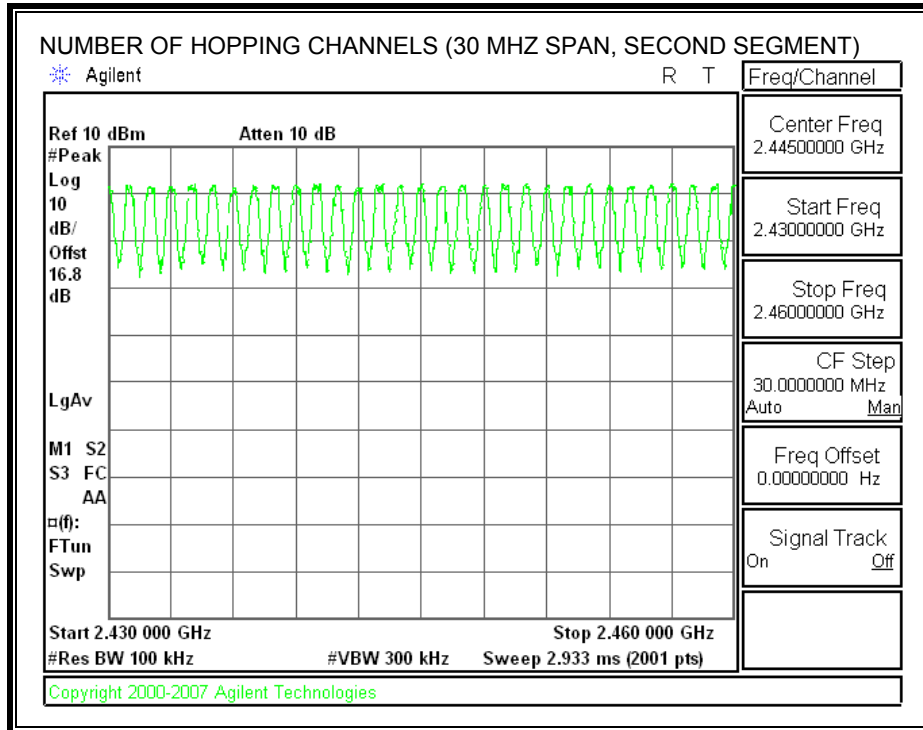

**NUMBER OF HOPPING CHANNELS – 8PSK MODE**

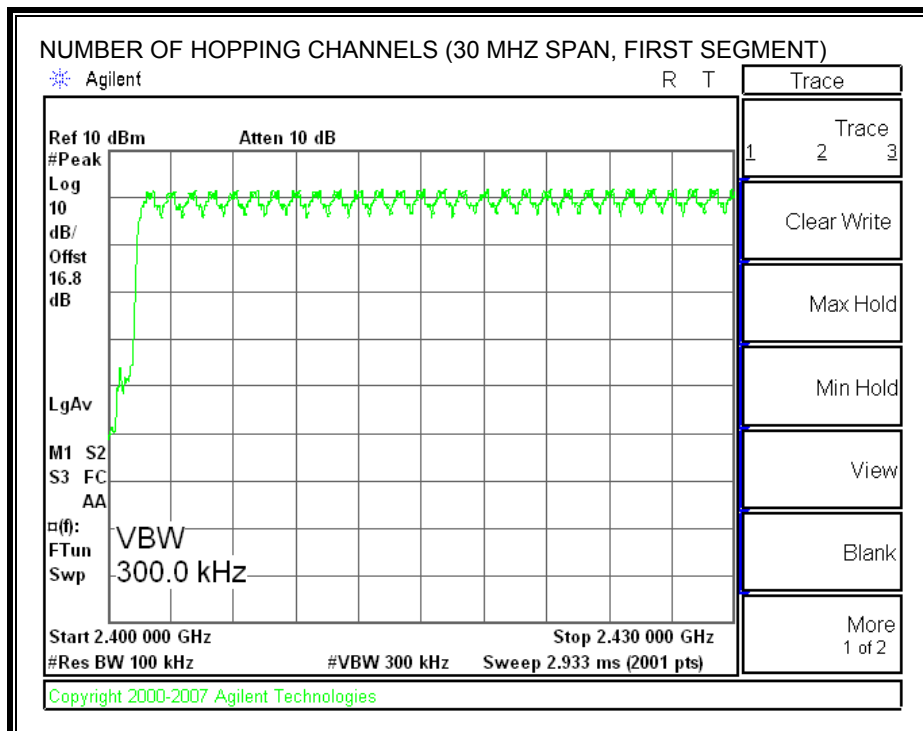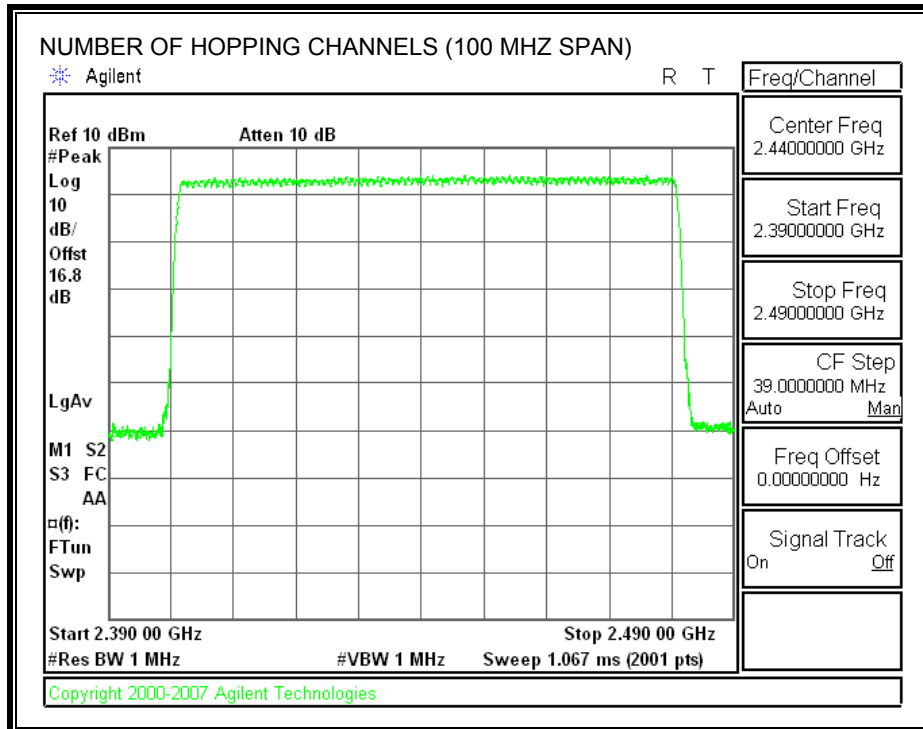

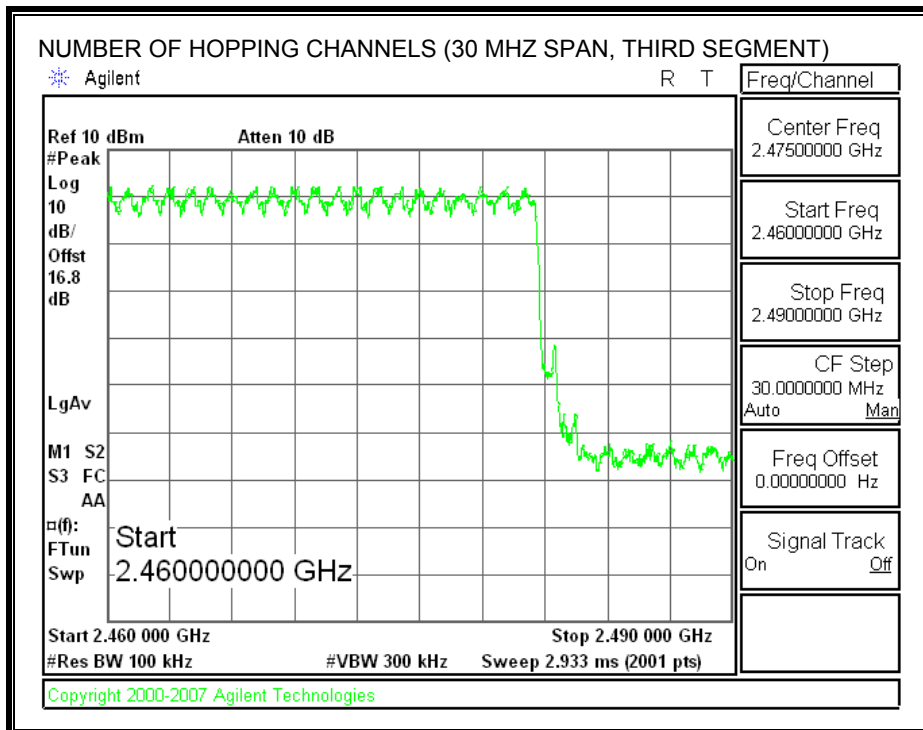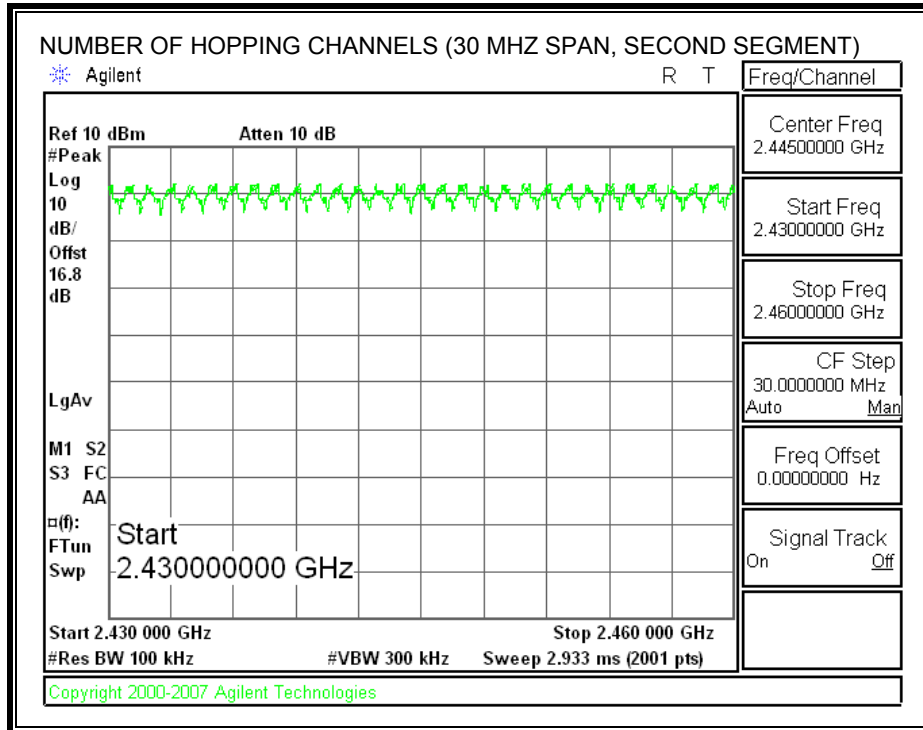

**7.1.4. AVERAGE TIME OF OCCUPANCY**

**LIMIT**

FCC §15.247 (a) (1) (iii)

IC RSS-210 A8.1 (d)

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

**TEST PROCEDURE**

The transmitter output is connected to a spectrum analyzer. The span is set to 0 Hz, centered on a single, selected hopping channel. The width of a single pulse is measured in a fast scan. The number of pulses is measured in a 3.16 second scan, to enable resolution of each occurrence.

The average time of occupancy in the specified 31.6 second period (79 channels \* 0.4 s) is equal to 10 \* (# of pulses in 3.16 s) \* pulse width.

**RESULTS**

**GFSK Mode**


DH Packet	Pulse Width (msec)	Number of Pulses in 3.16 seconds	Average Time of Occupancy (sec)	Limit (sec)	Margin (sec)
DH1	0.380	32	0.122	0.4	-0.278
DH3	1.637	17	0.278	0.4	-0.122
DH5	2.885	13	0.375	0.4	-0.025

**8PSK Mode**


DH Packet	Pulse Width (msec)	Number of Pulses in 3.16 seconds	Average Time of Occupancy (sec)	Limit (sec)	Margin (sec)
DH1	0.388	35	0.136	0.4	-0.264
DH3	1.639	18	0.295	0.4	-0.105
DH5	2.883	11	0.317	0.4	-0.083




**GFSK MODE - FREQUENCY PACKET DH1**

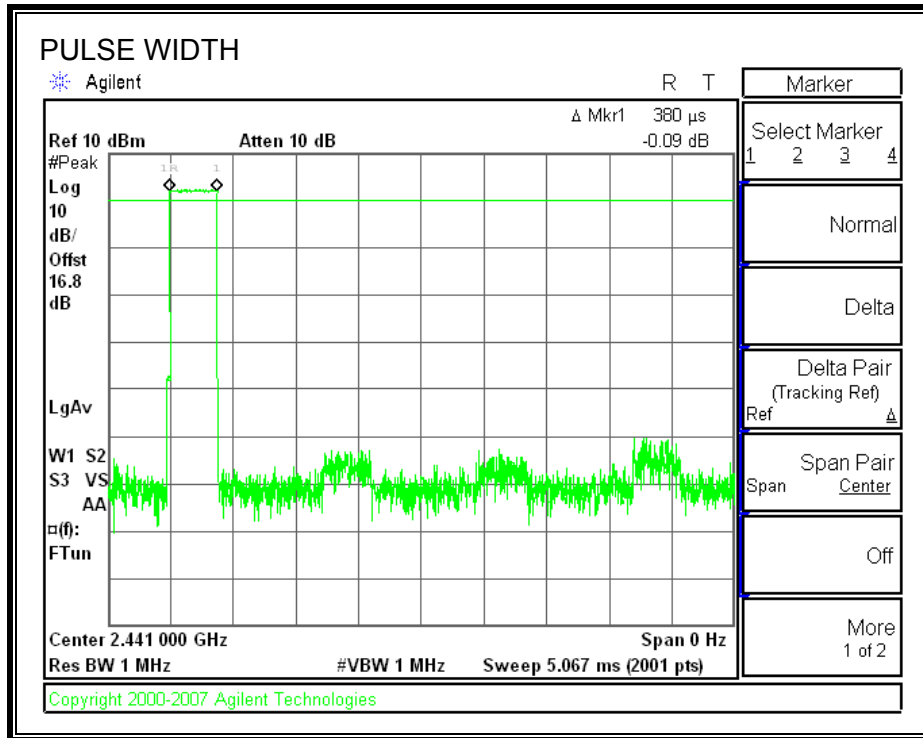


**NUMBER OF PULSES IN 3.16 SECOND OBSERVATION PERIOD**

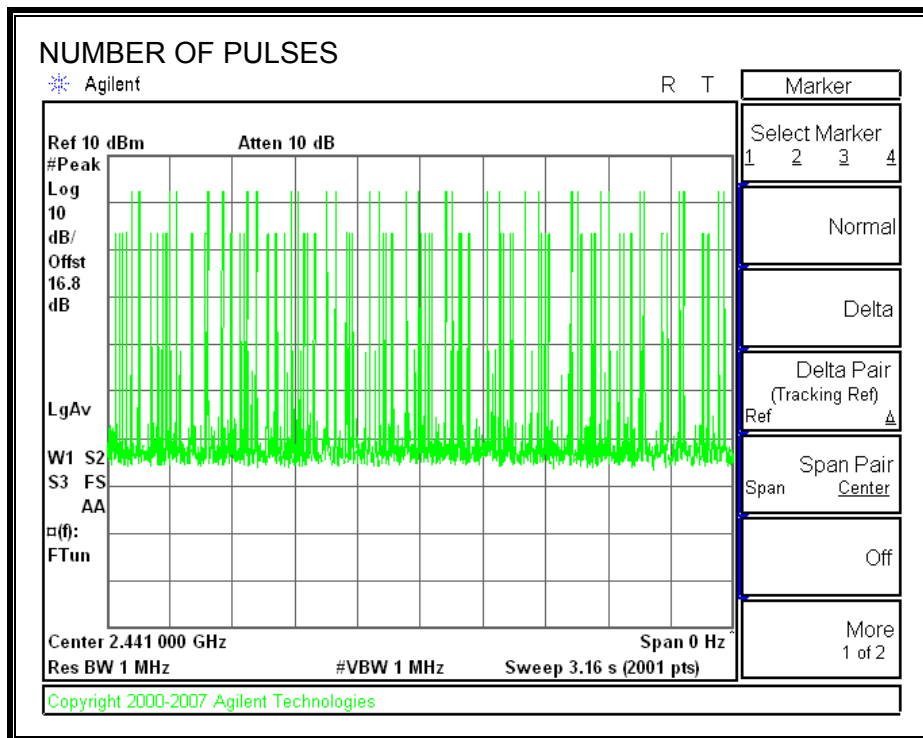


**GFSK MODE - FREQUENCY PACKET DH3**

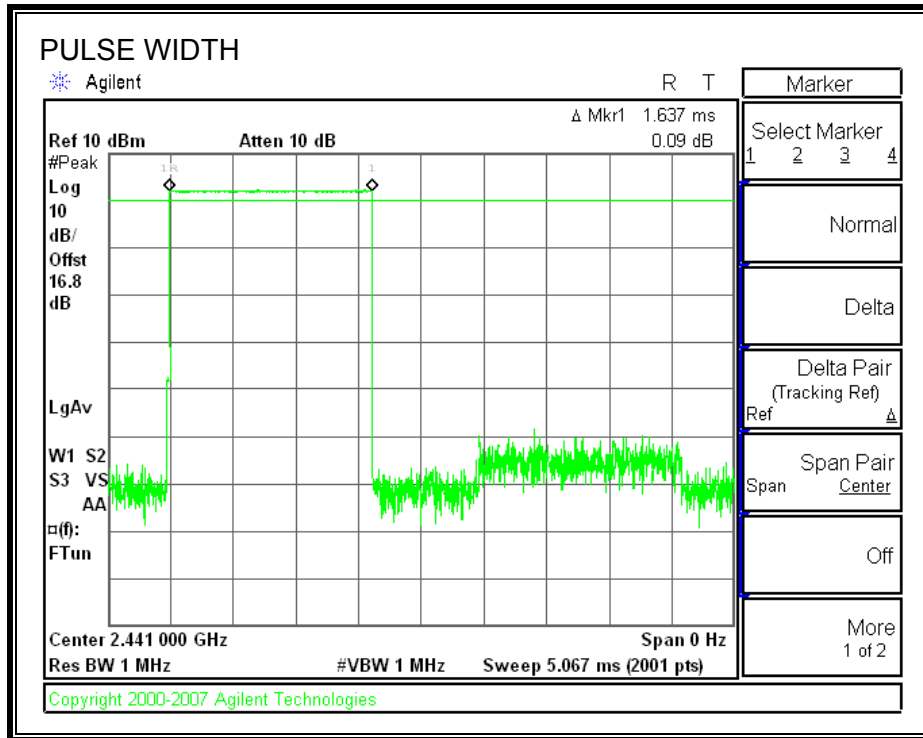


**NUMBER OF PULSES IN 3.16 SECOND OBSERVATION PERIOD**

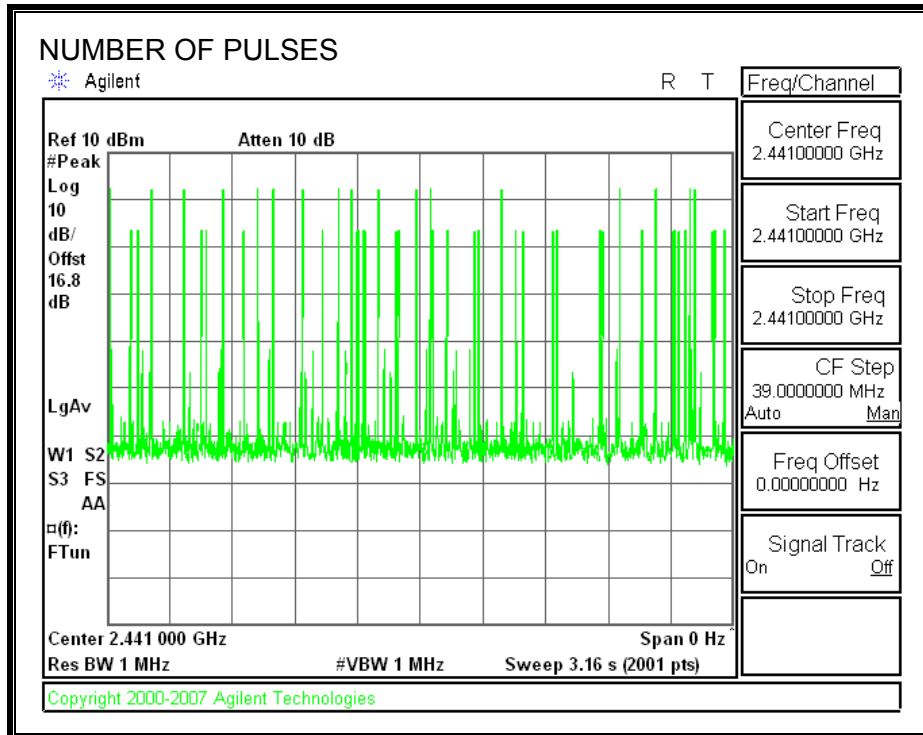


**GFSK MODE - FREQUENCY PACKET DH5**

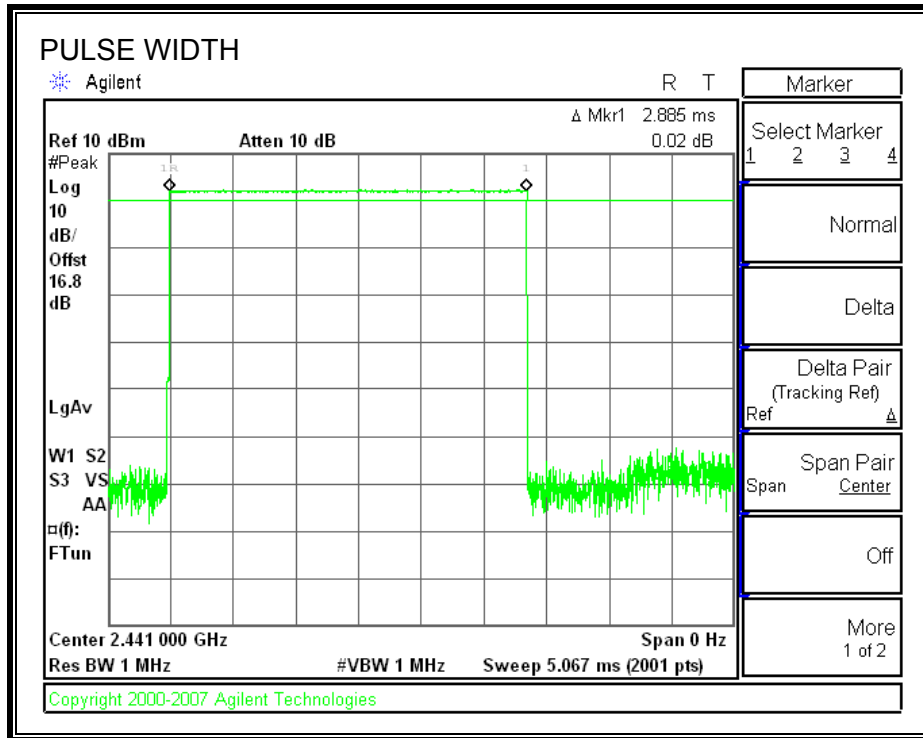


**NUMBER OF PULSES IN 3.16 SECOND OBSERVATION PERIOD**

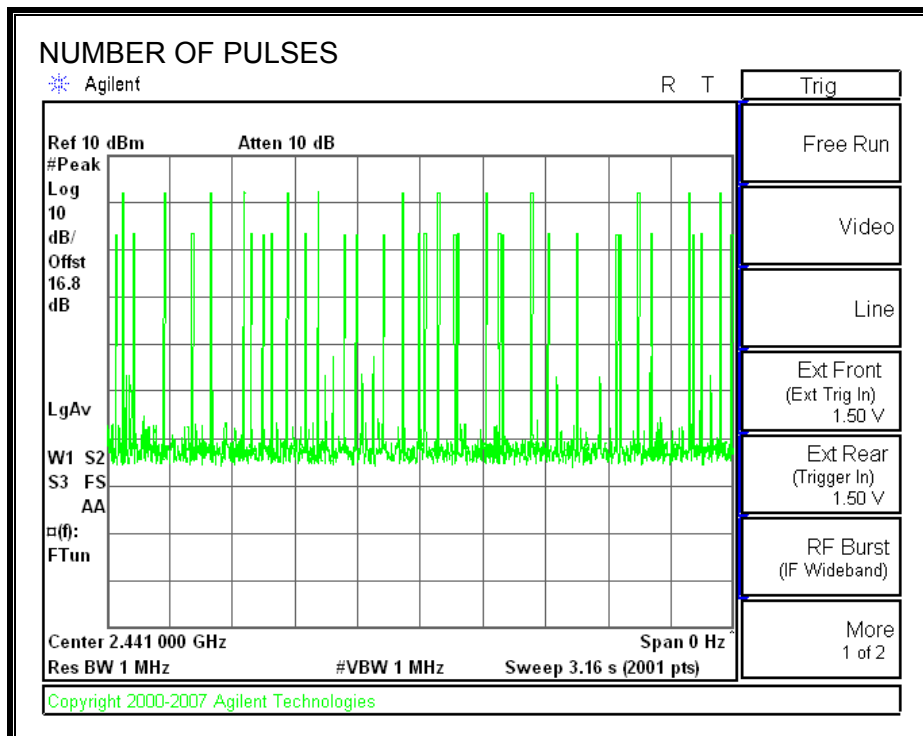


**8PSK MODE - FREQUENCY PACKET DH1**

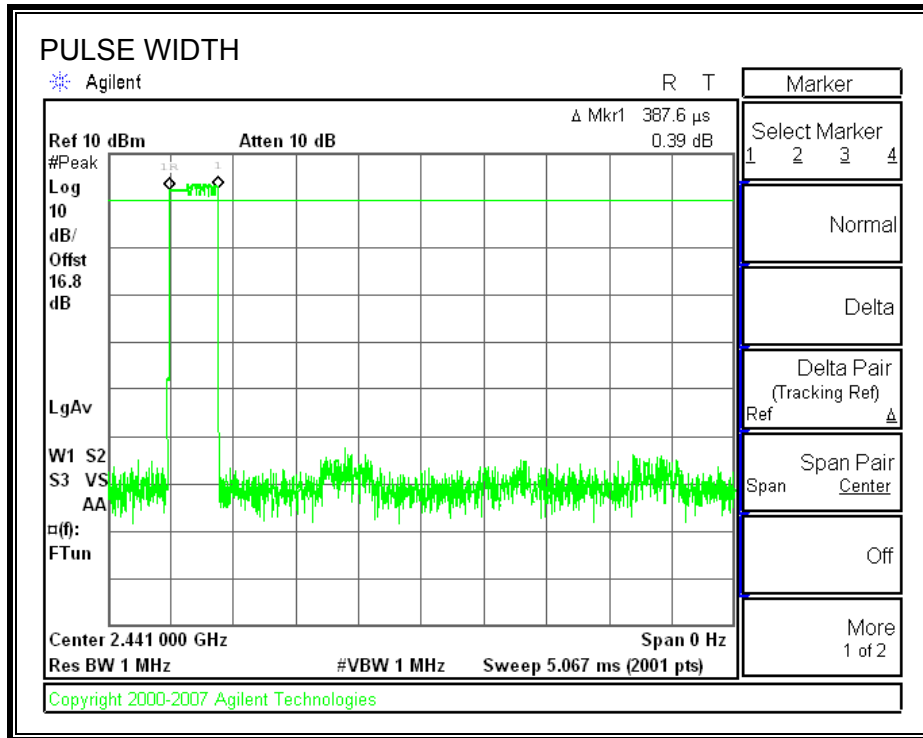


**NUMBER OF PULSES IN 3.16 SECOND OBSERVATION PERIOD**

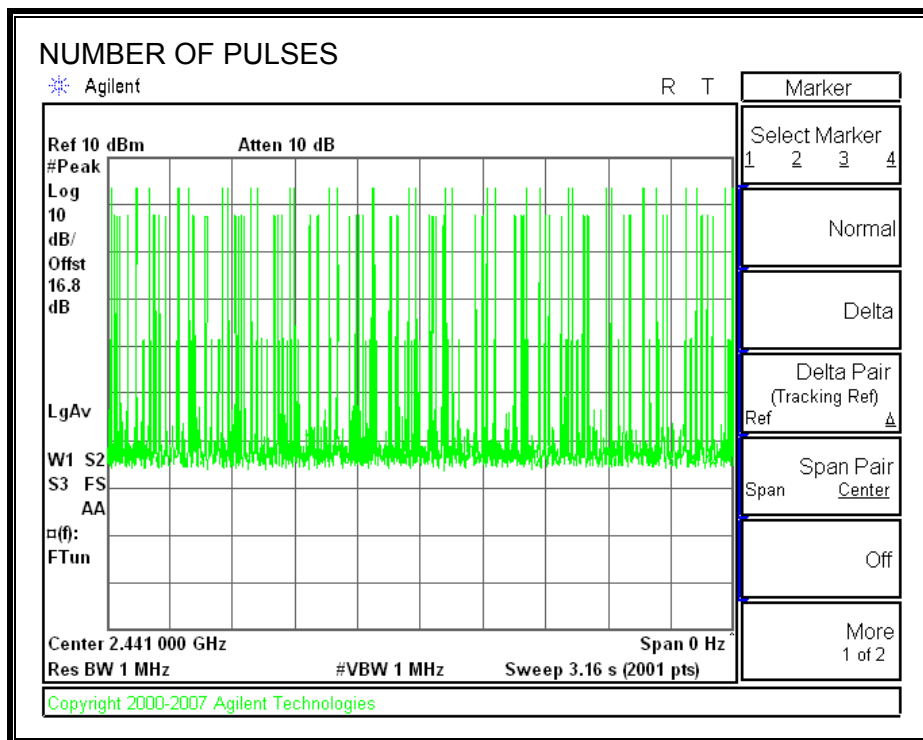


**8PSK MODE - FREQUENCY PACKET DH3**

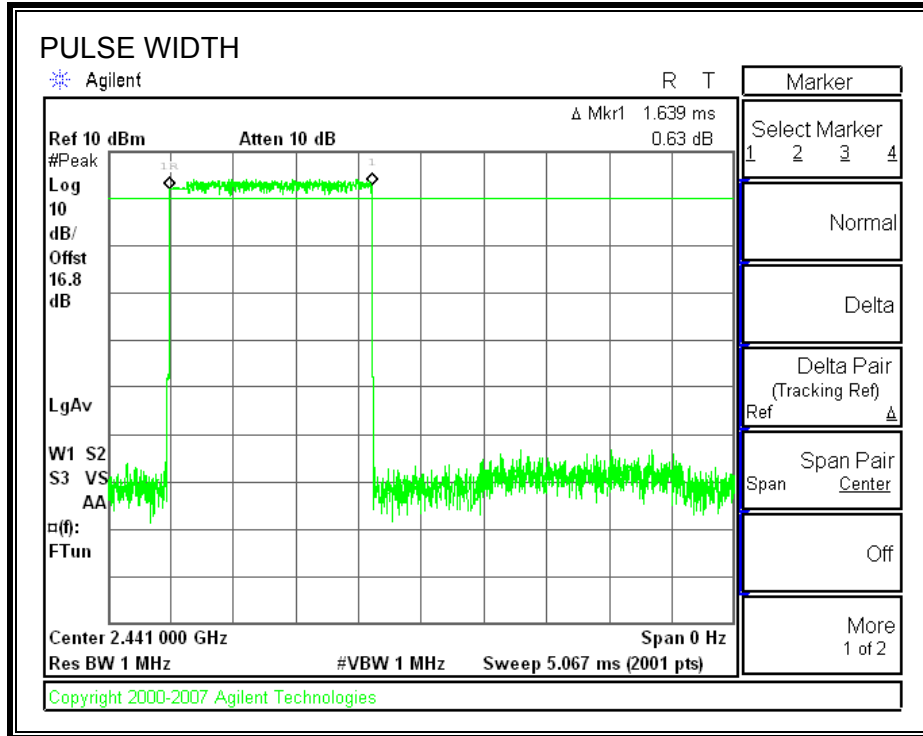


**NUMBER OF PULSES IN 3.16 SECOND OBSERVATION PERIOD**

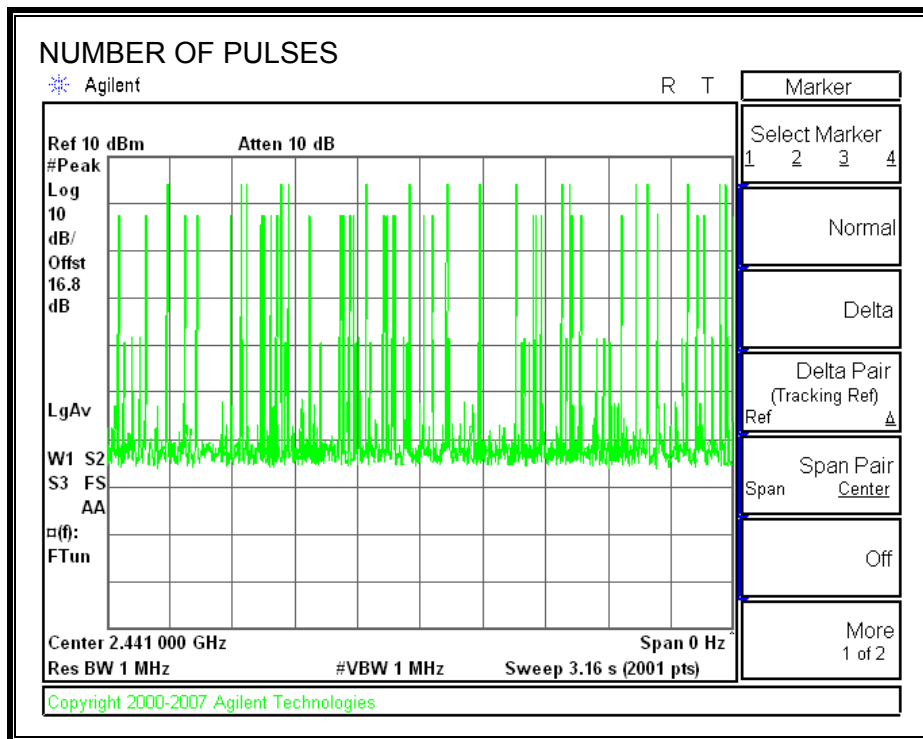

**8PSK MODE - FREQUENCY PACKET DH5**

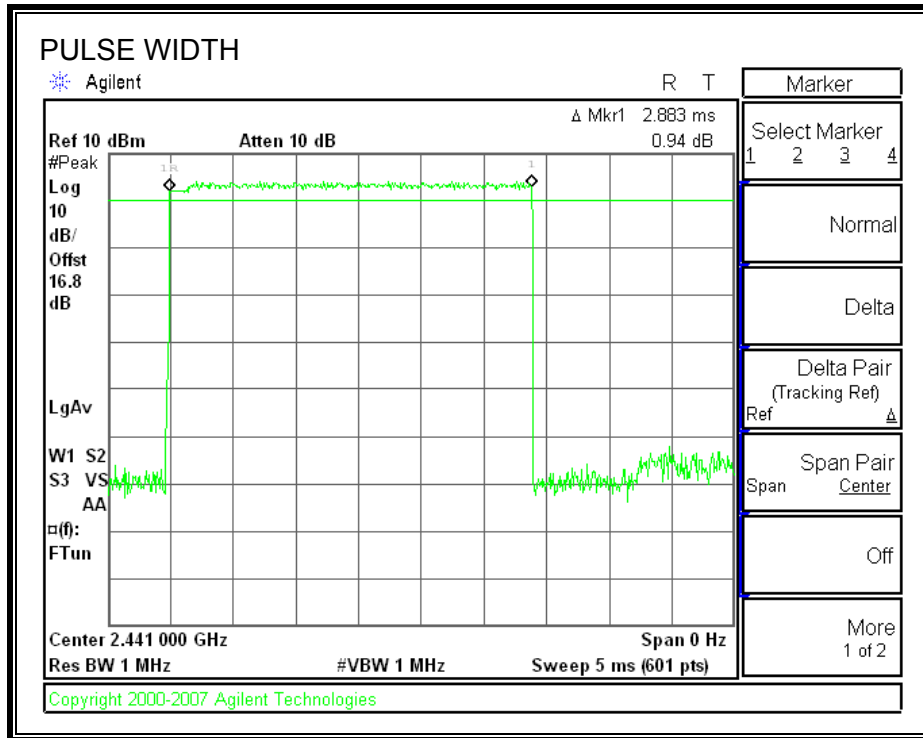

**NUMBER OF PULSES IN 3.16 SECOND OBSERVATION PERIOD**

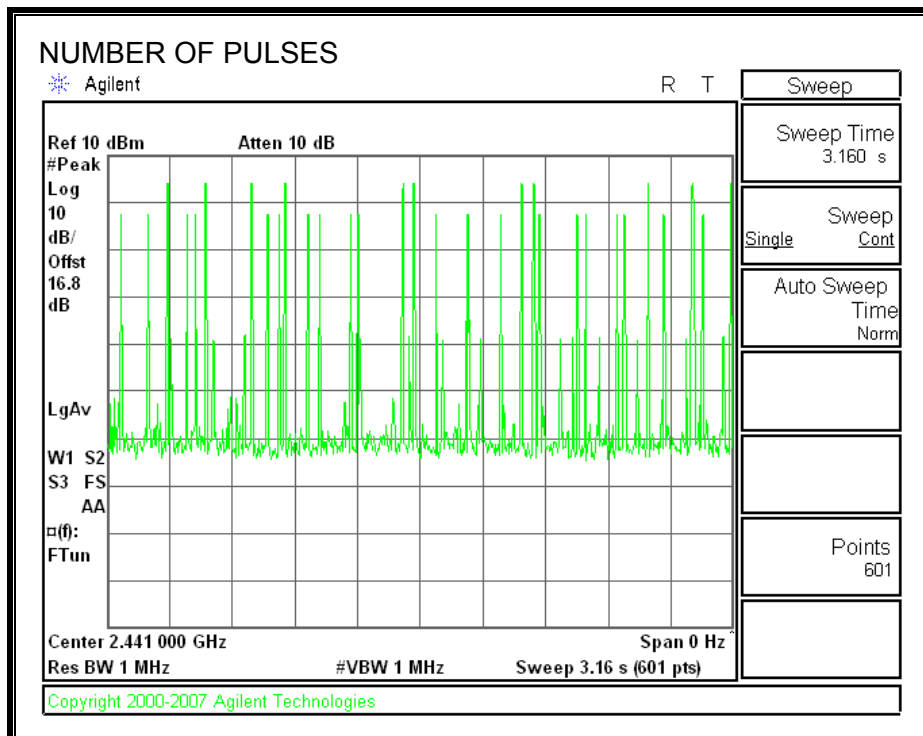

### 7.1.5. OUTPUT POWER

#### LIMIT

§15.247 (b) (1)

RSS-210 Issue 7 Clause A8.4

The maximum antenna gain is less than 6 dBi, therefore the limit is 30dBm.

Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

#### TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer the analyzer bandwidth is set to a value greater than the 20 dB bandwidth of the EUT.

#### RESULTS



##### GFSK MODE

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Margin (dB)
0	2402	1.25	30	-28.75
39	2441	2.03	30	-27.97
78	2480	2.08	30	-27.92


##### 8PSK MODE

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Margin (dB)
0	2402	3.62	21	-17.35
39	2441	4.27	21	-16.70
78	2480	4.24	21	-16.73



**OUTPUT POWER - GFSK**

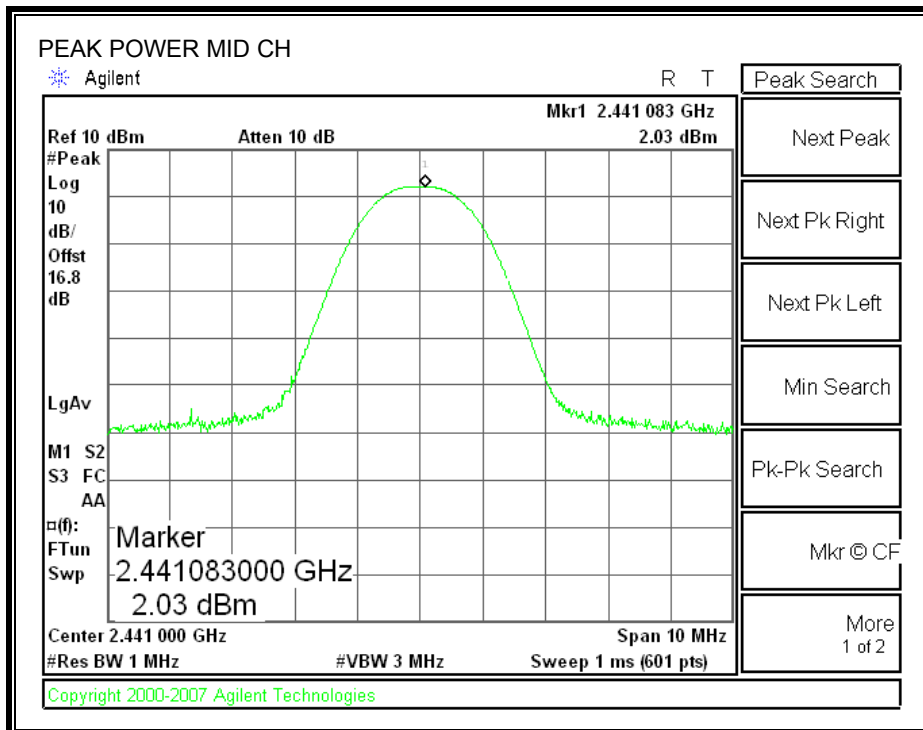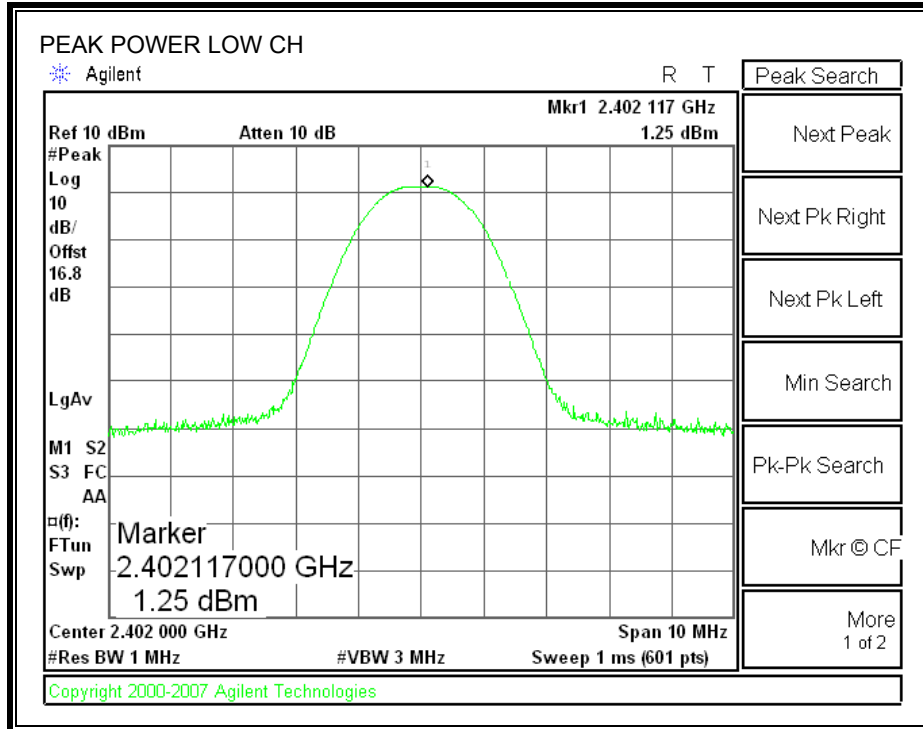




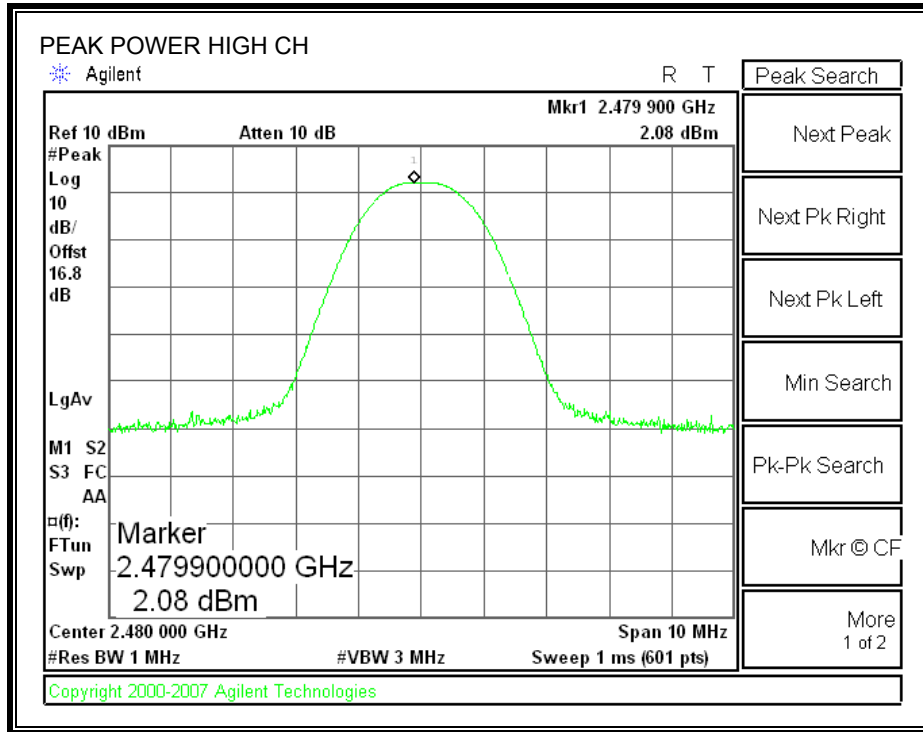

**OUTPUT POWER – 8PSK**

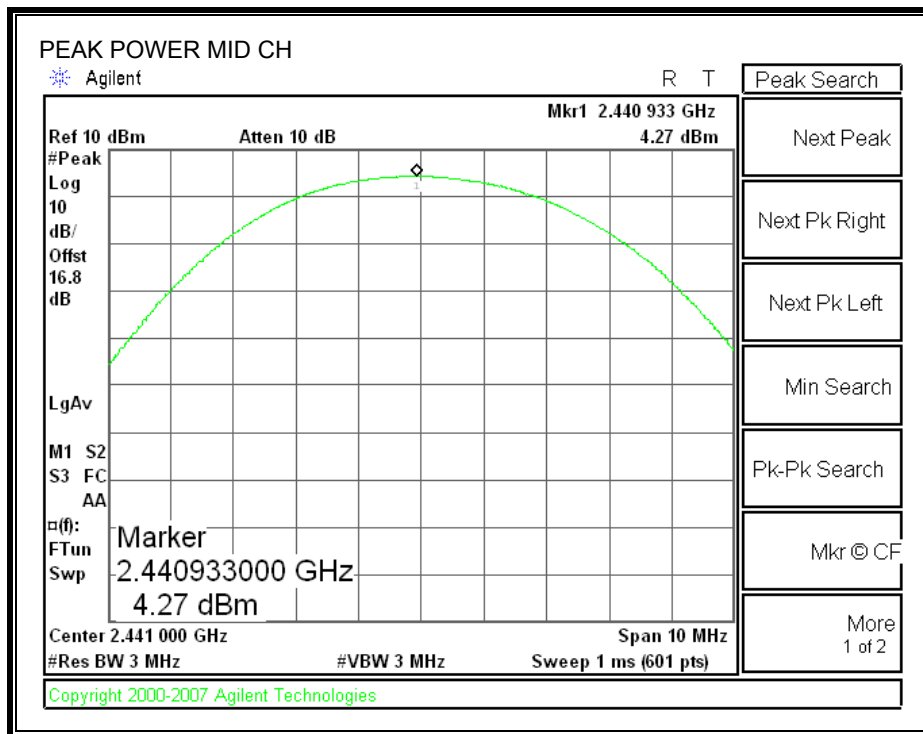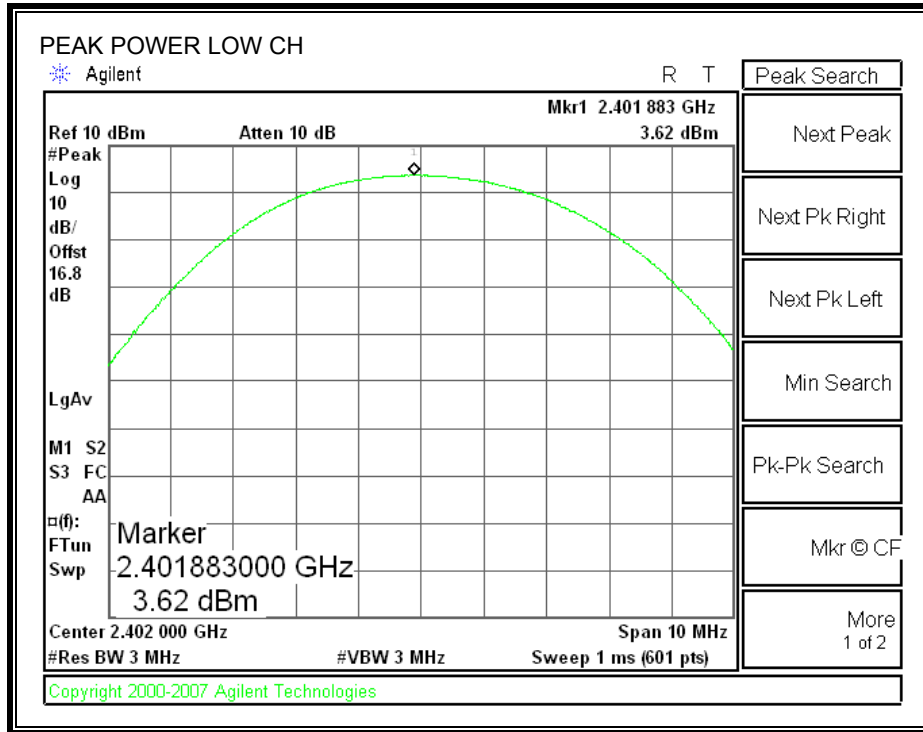

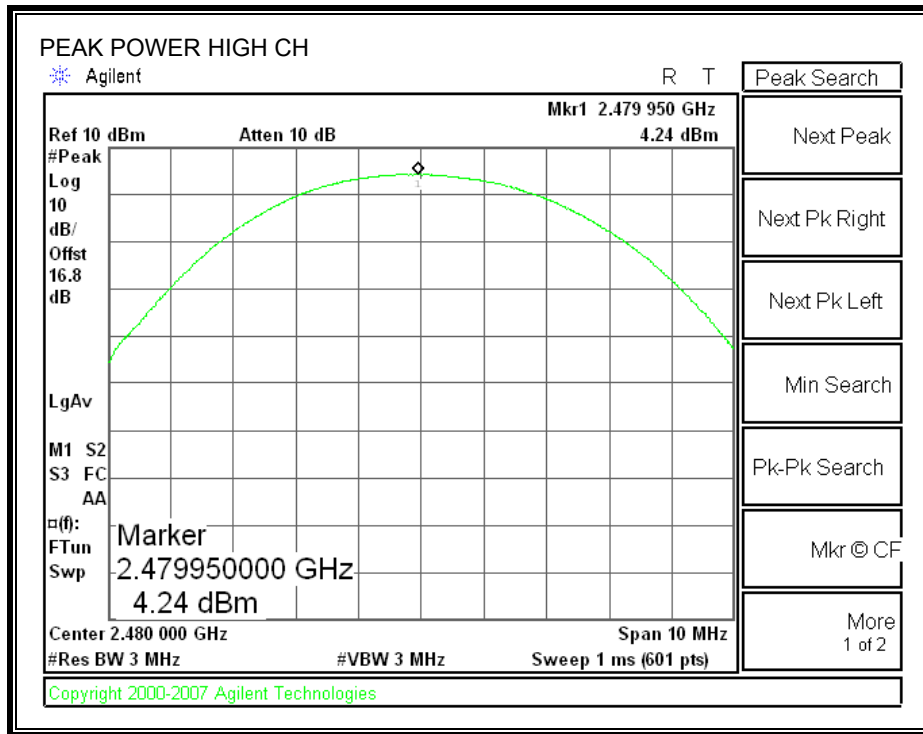

## **7.1.6. CONDUCTED SPURIOUS EMISSIONS**

### **LIMITS**

FCC §15.247 (d)

IC RSS-210 A8.5

Limit = -20 dBc

### **TEST PROCEDURE**



The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz.

The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels.



The band edges at 2.4 and 2.4835 GHz are investigated with the transmitter set to the normal hopping mode.

### **RESULTS**



**SPURIOUS EMISSIONS, LOW CHANNEL – GFSK MODE**

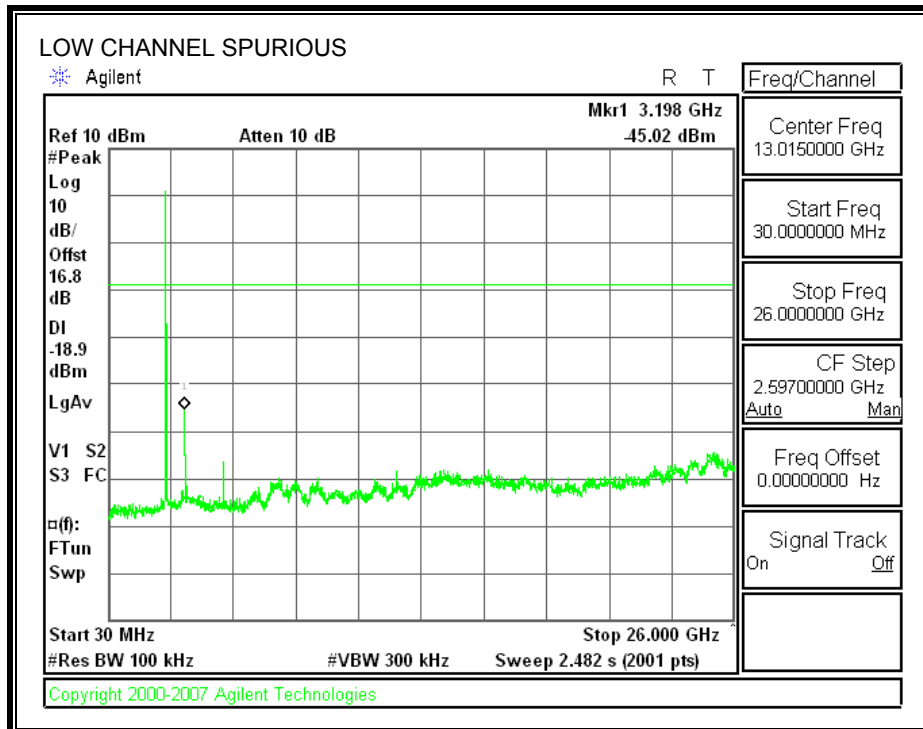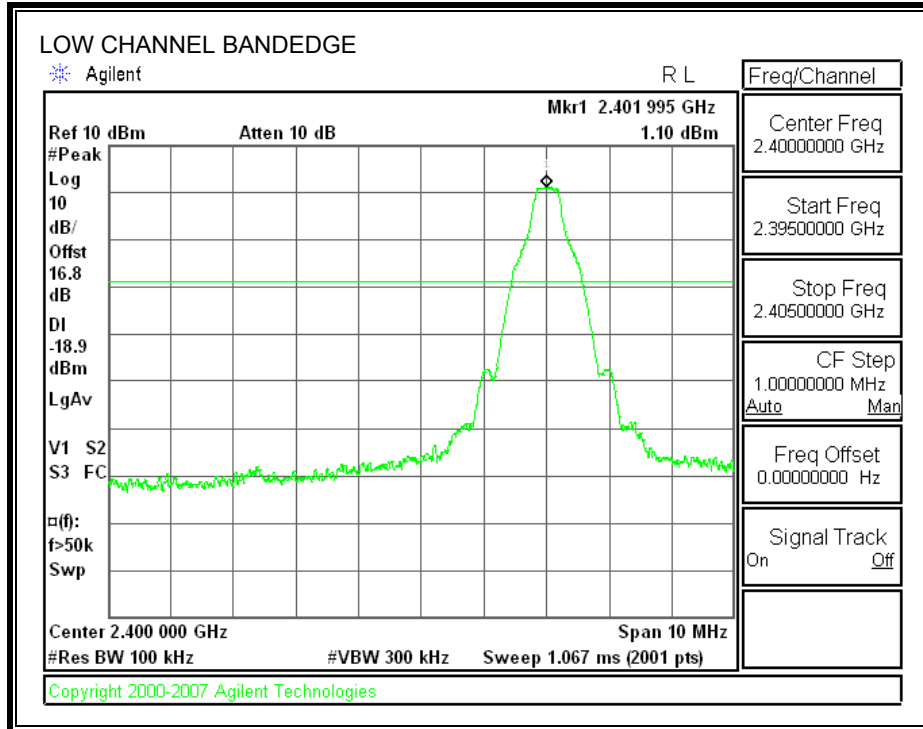



**SPURIOUS EMISSIONS, MID CHANNEL – GFSK MODE**

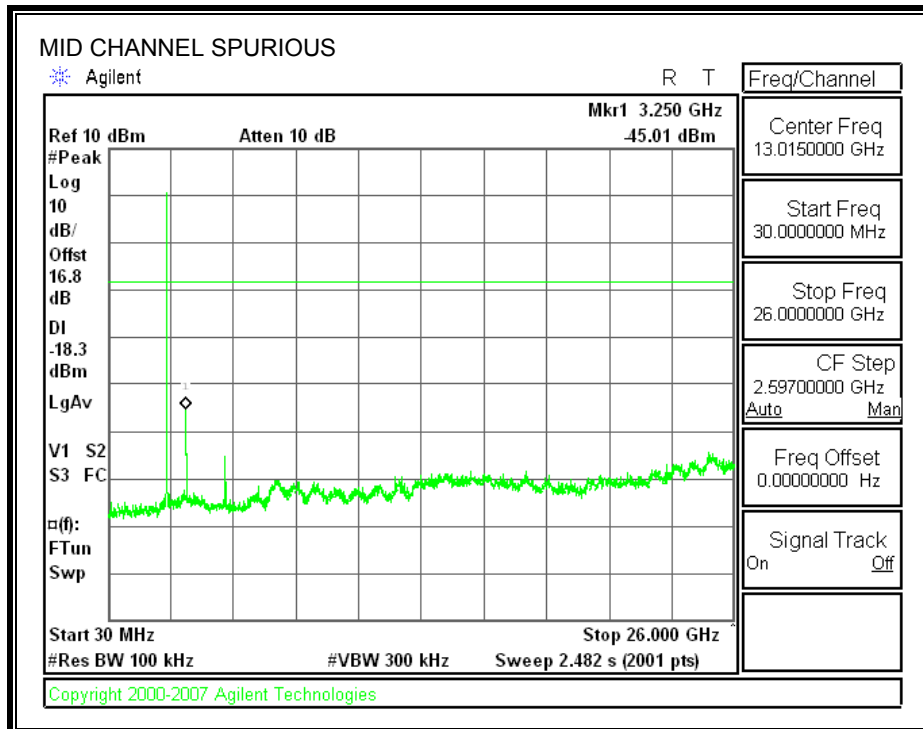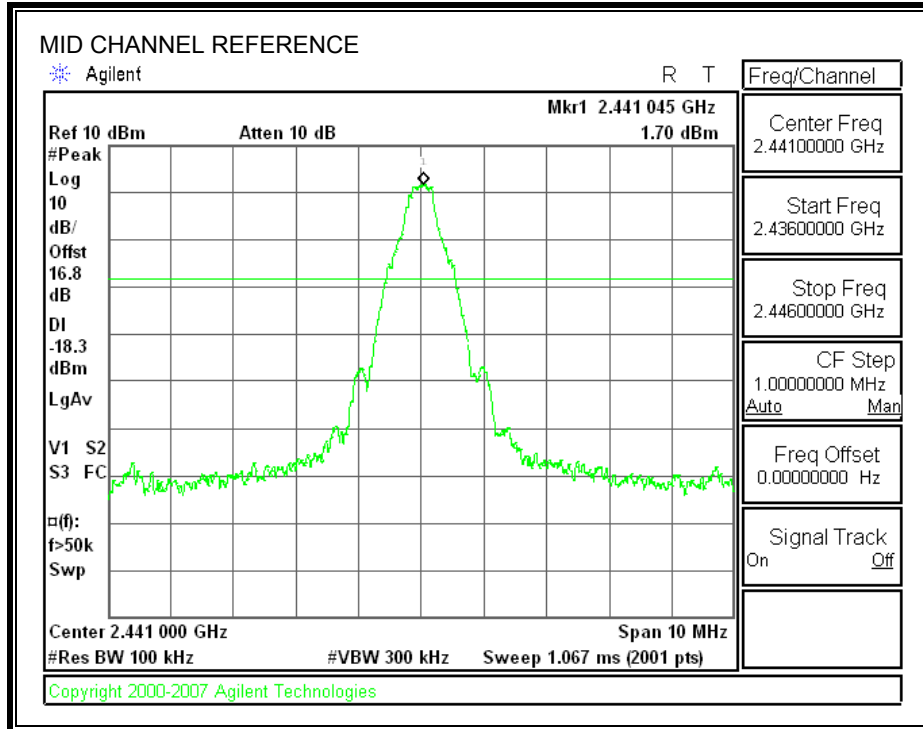

**SPURIOUS EMISSIONS, HIGH CHANNEL – GFSK MODE**

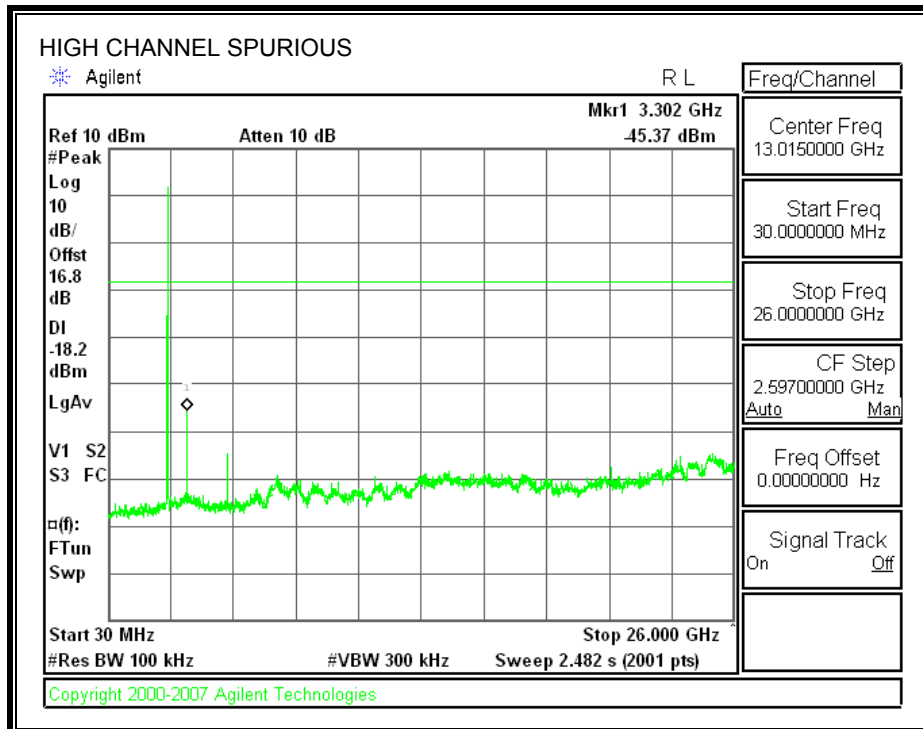
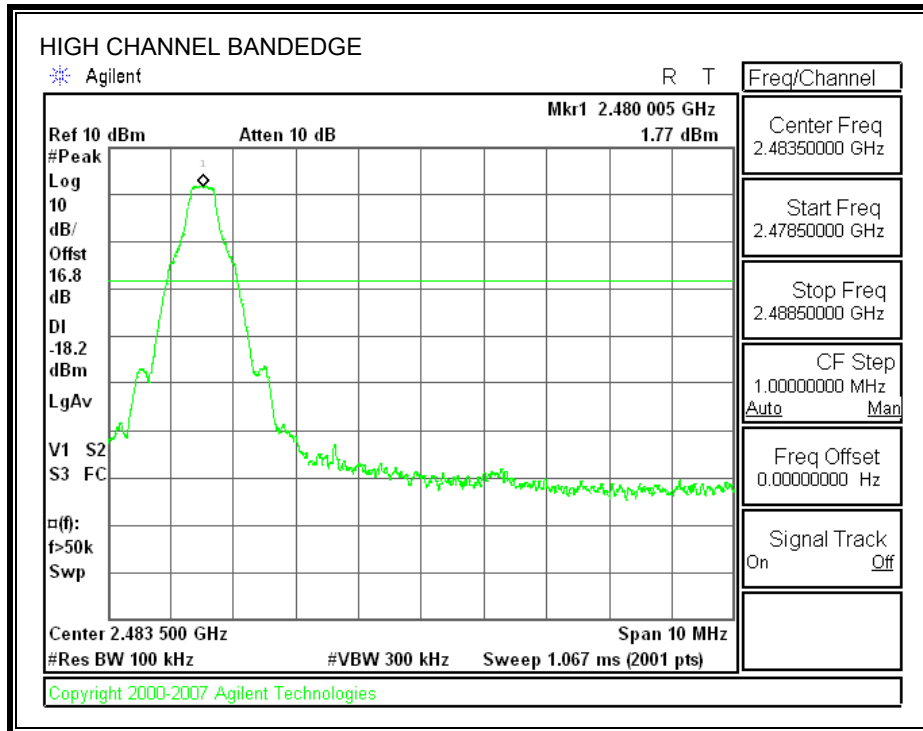


**SPURIOUS BANDEDGE EMISSIONS WITH HOPPING ON – GFSK MODE**

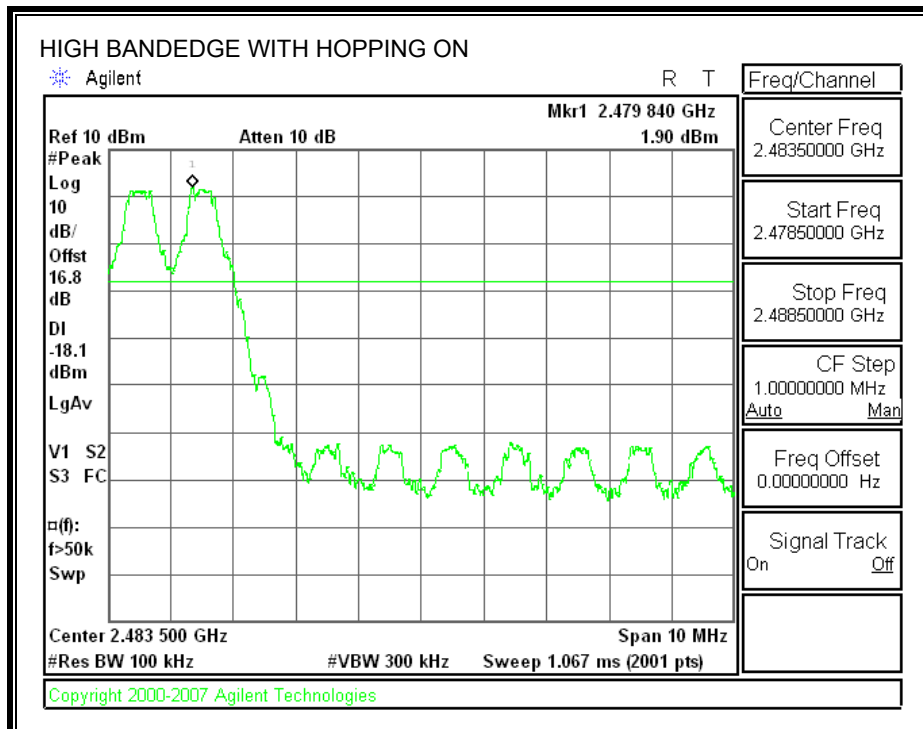
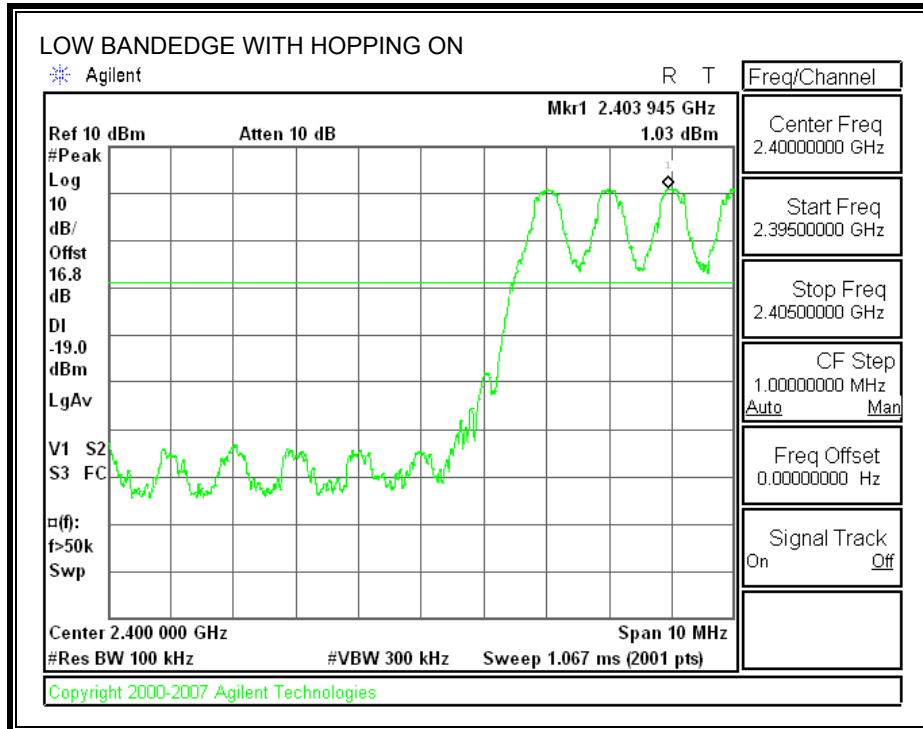






**SPURIOUS EMISSIONS, LOW CHANNEL – 8PSK MODE**

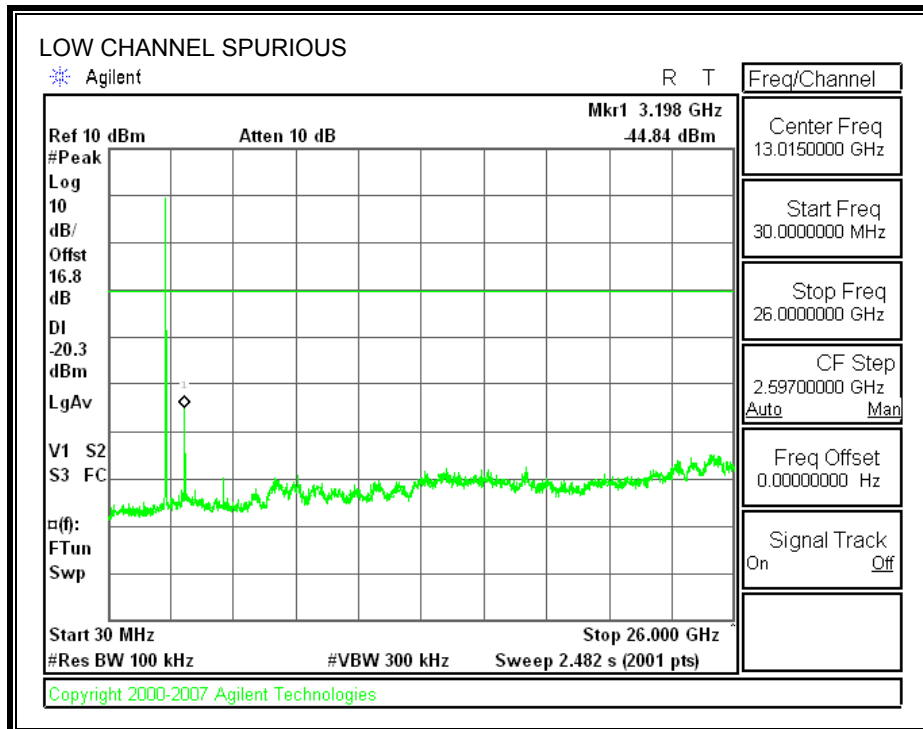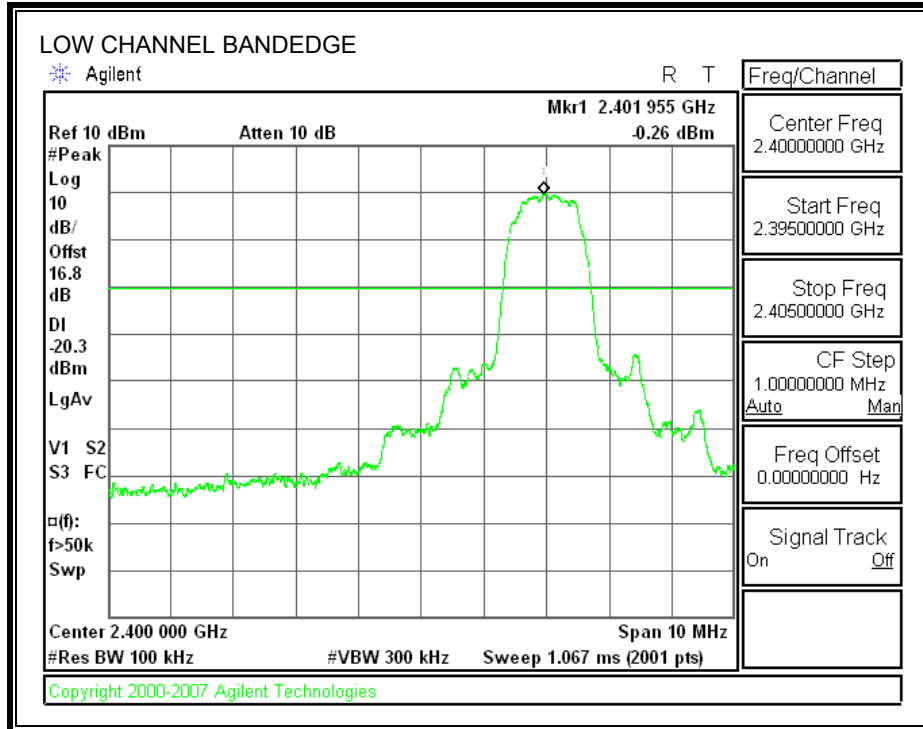



**SPURIOUS EMISSIONS, MID CHANNEL – 8PSK MODE**

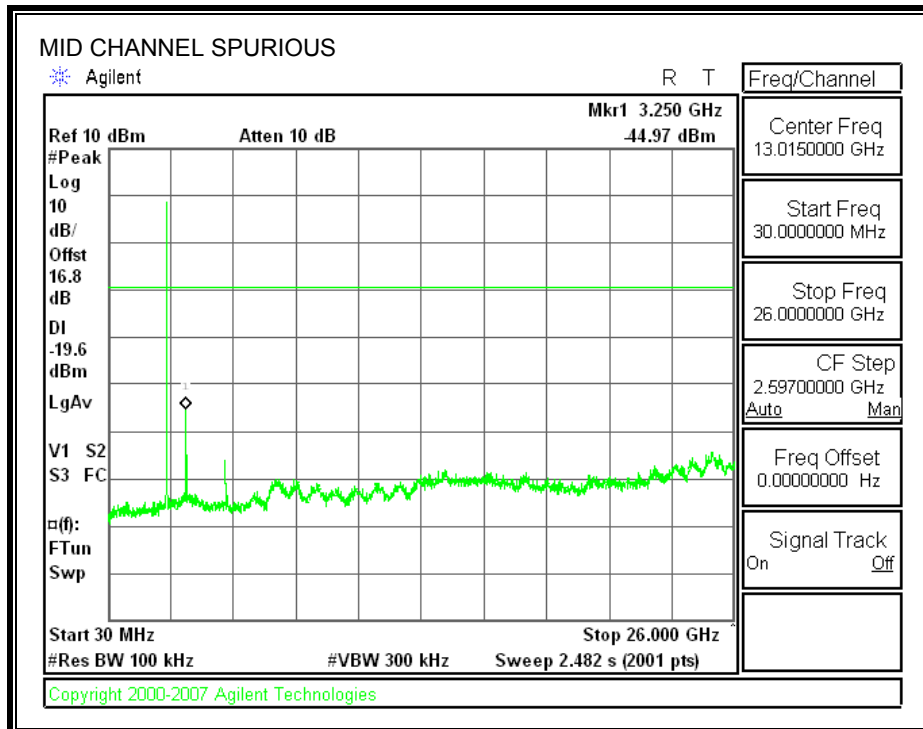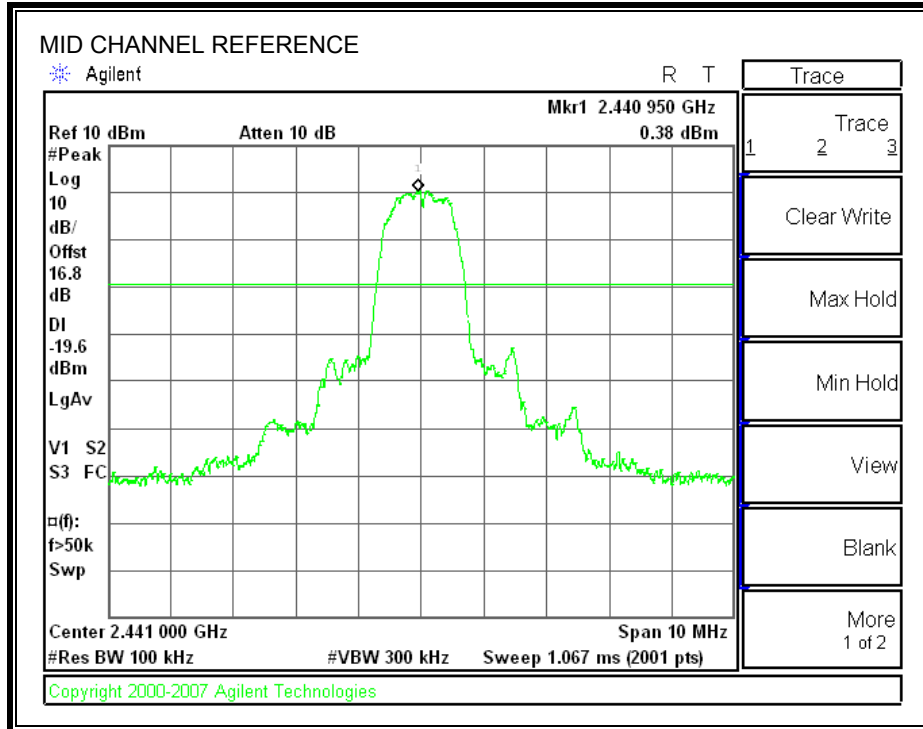

**SPURIOUS EMISSIONS, HIGH CHANNEL – 8PSK MODE**

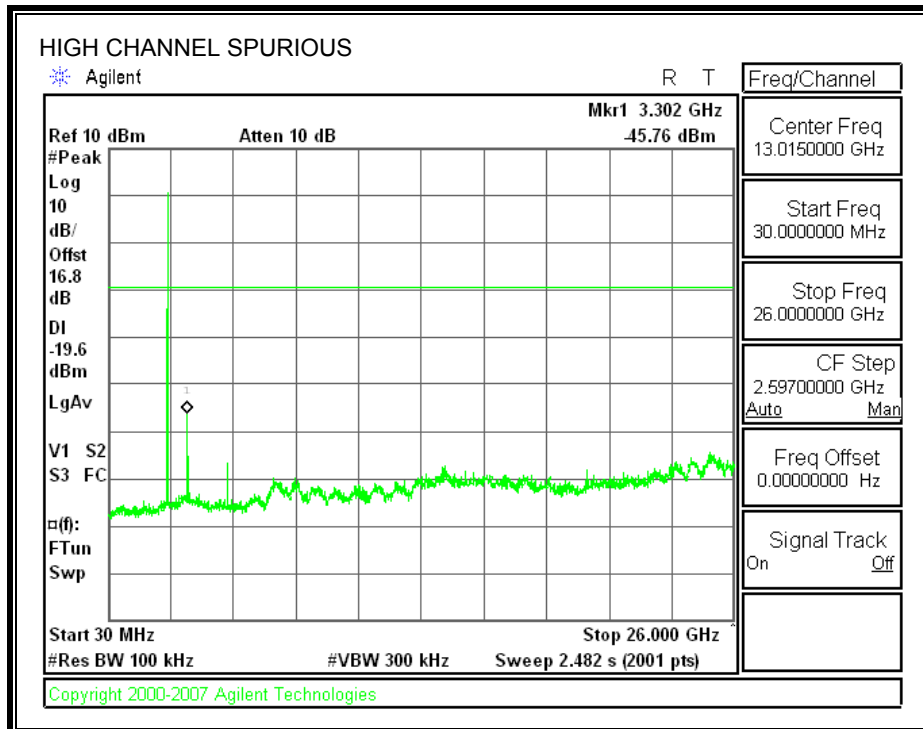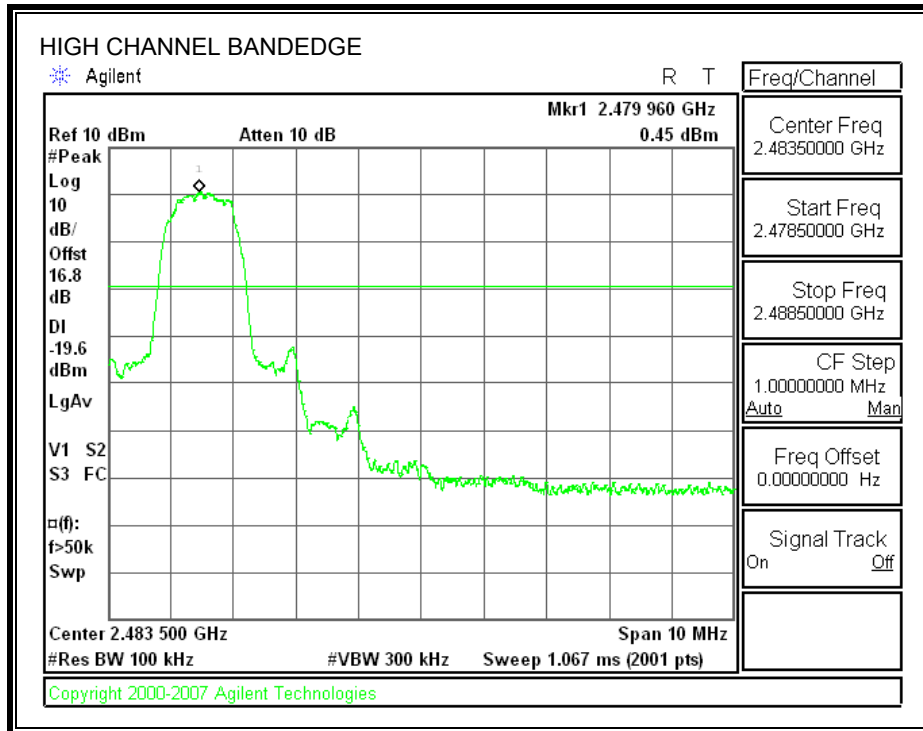

**SPURIOUS BANDEDGE EMISSIONS WITH HOPPING ON – 8PSK MODE**

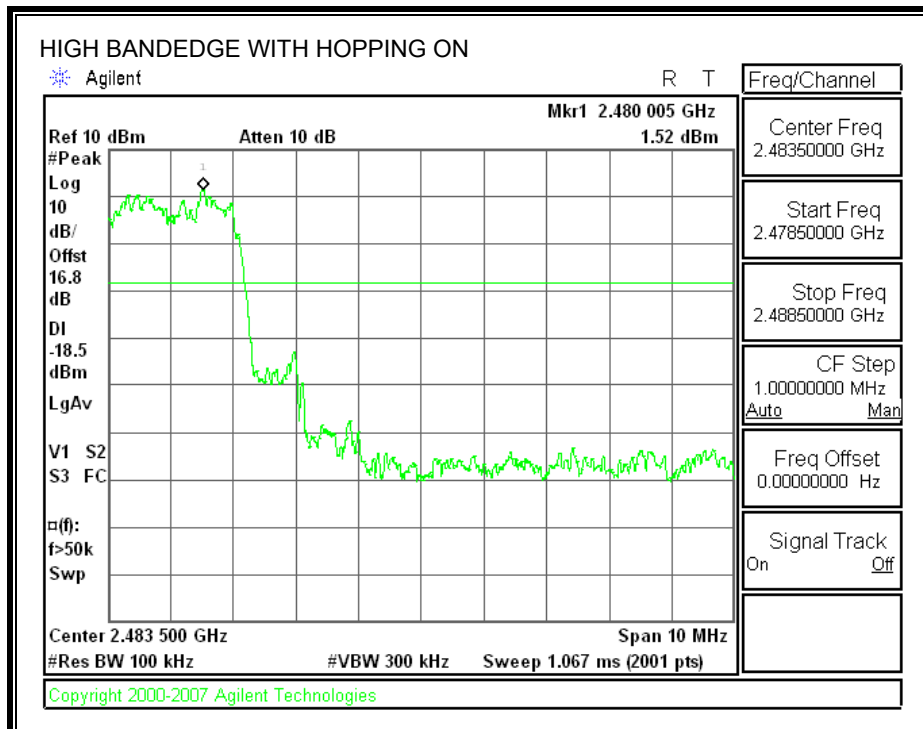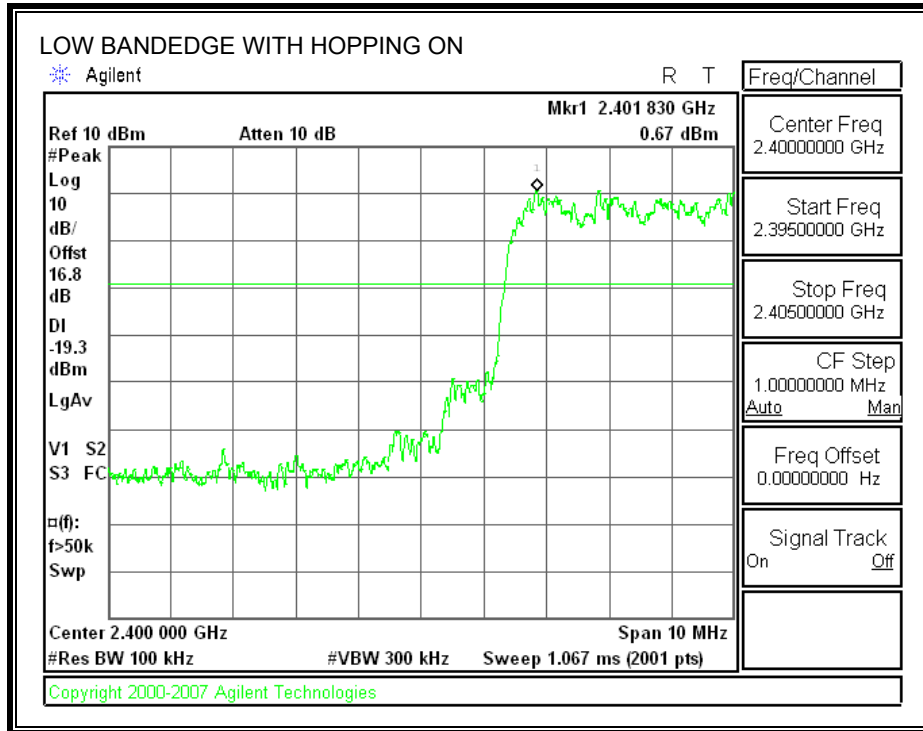

## 8. RADIATED TEST RESULTS

### LIMITS

FCC §15.205 and §15.209

IC RSS-210 Clause 2.6 (Transmitter)

IC RSS-GEN Clause 6 (Receiver)

Frequency Range (MHz)	Field Strength Limit (uV/m) at 3 m	Field Strength Limit (dBuV/m) at 3 m
30 - 88	100	40
88 - 216	150	43.5
216 - 960	200	46
Above 960	500	54

### TEST PROCEDURE

The EUT is placed on a non-conducting table 80 cm above the ground plane. The antenna to EUT distance is 3 meters. The EUT is configured in accordance with ANSI C63.4. The EUT is set to transmit in a continuous mode.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 1 MHz for peak measurements and 10 Hz for average measurements.



The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in the 2.4 GHz band.

The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.



## 8.1. TRANSMITTER ABOVE 1 GHz

### 8.1.1. GFSK MODE



#### RESTRICTED BANDEDGE (LOW CHANNEL, HORIZONTAL)

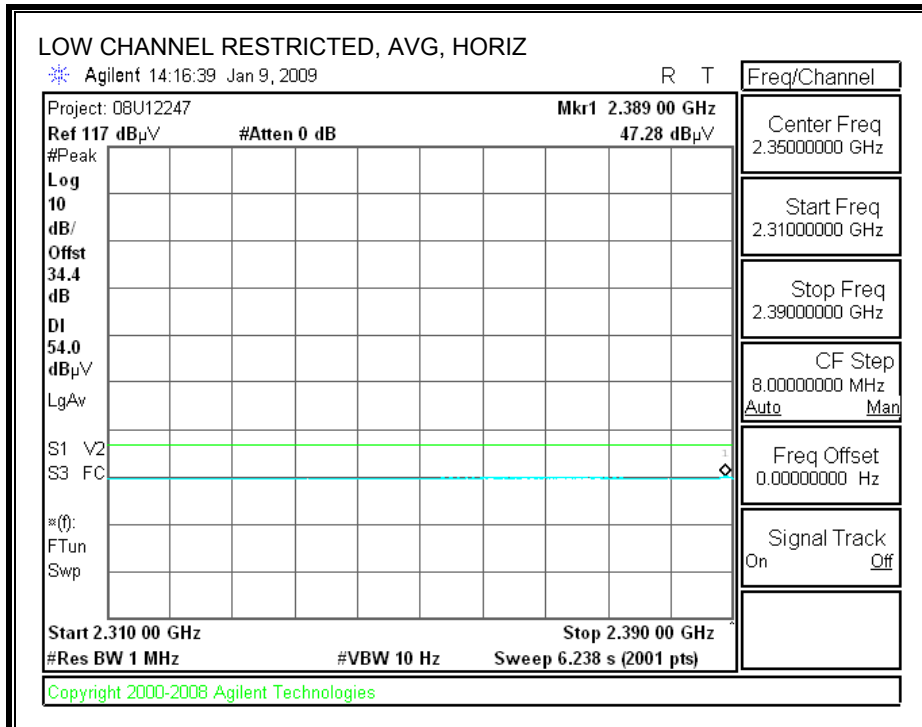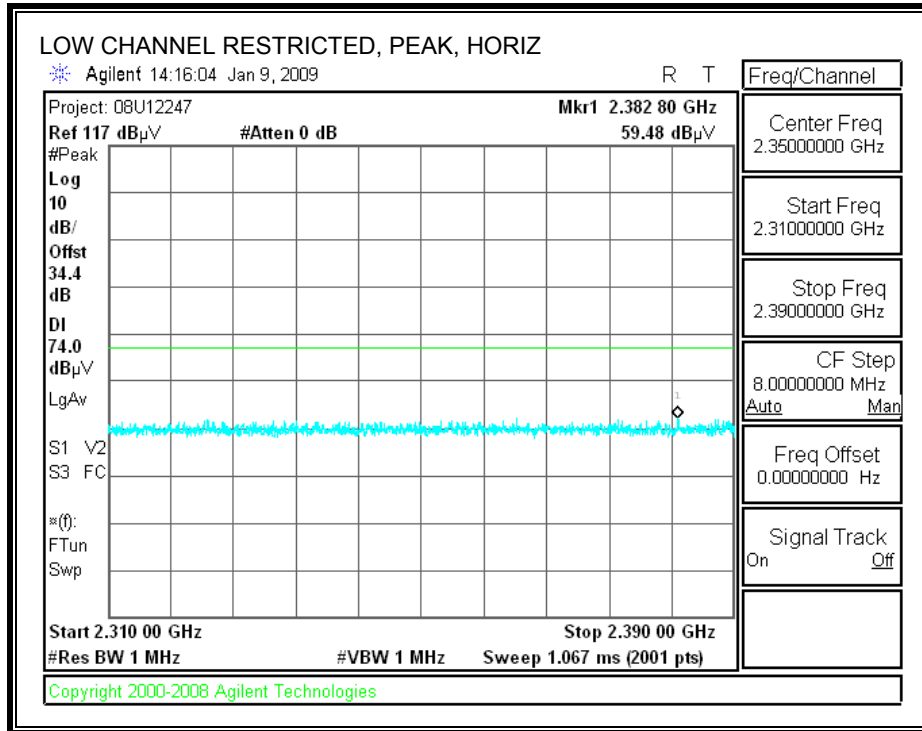

**RESTRICTED BANDEDGE (LOW CHANNEL, VERTICAL)**

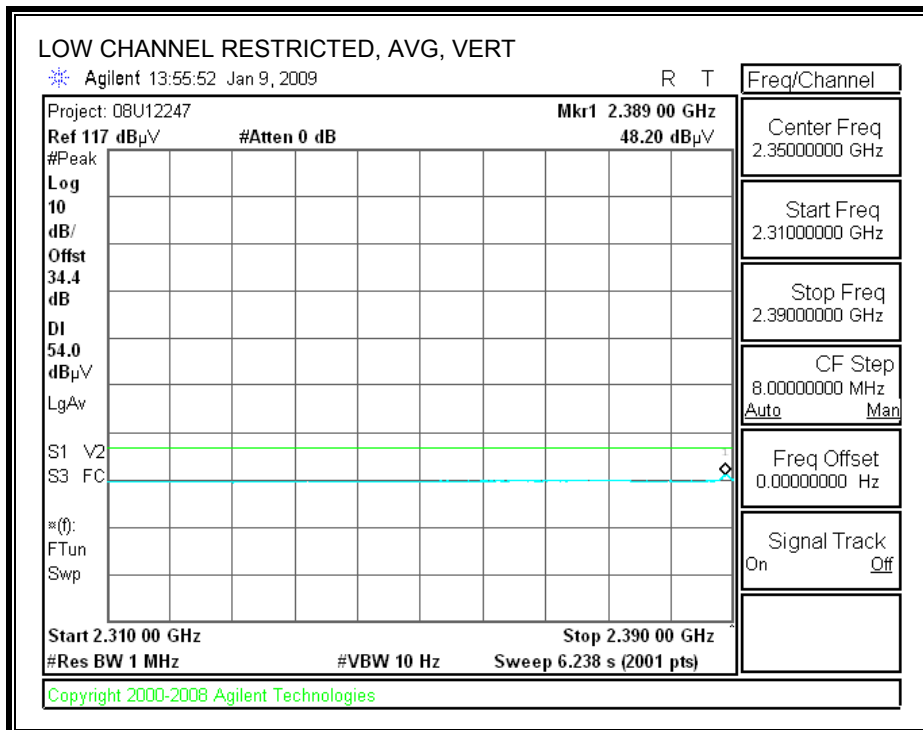
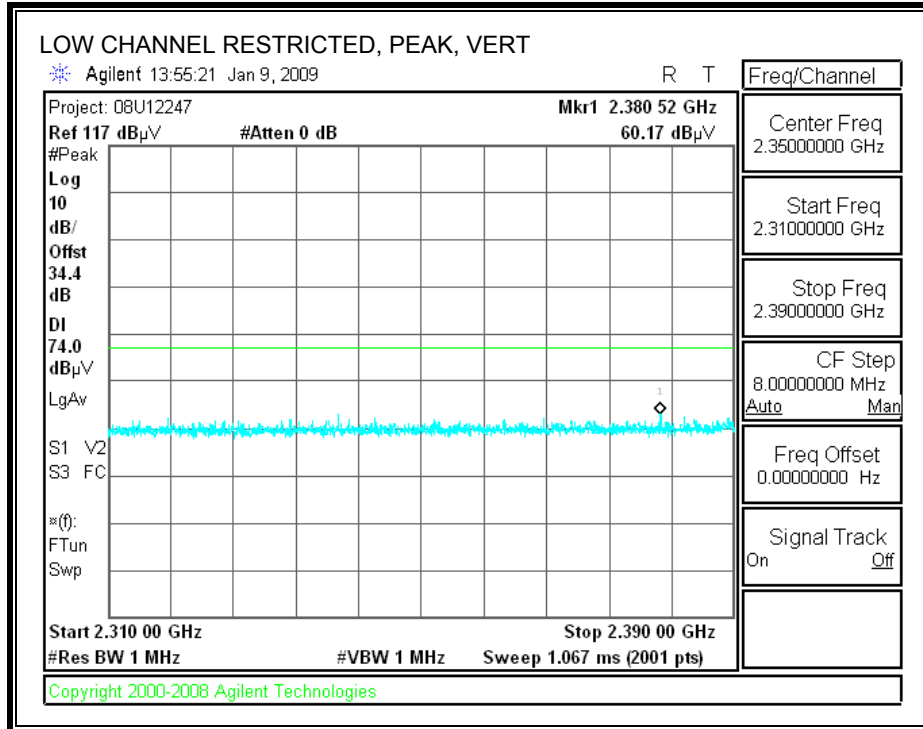


**RESTRICTED BANDEDGE (HIGH CHANNEL, HORIZONTAL)**

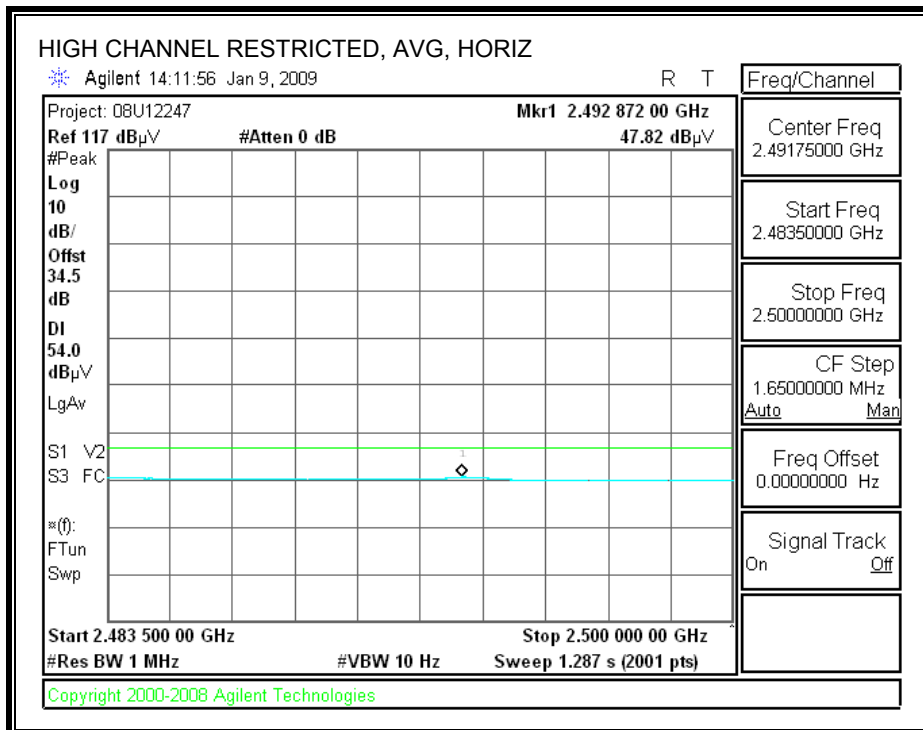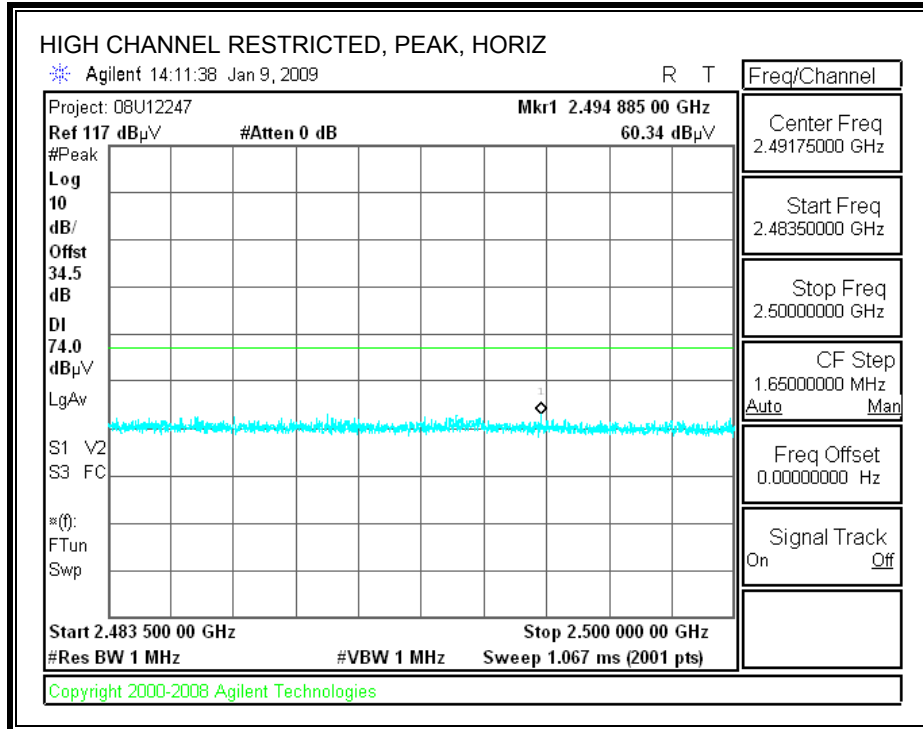





**RESTRICTED BANDEDGE (HIGH CHANNEL, VERTICAL)**

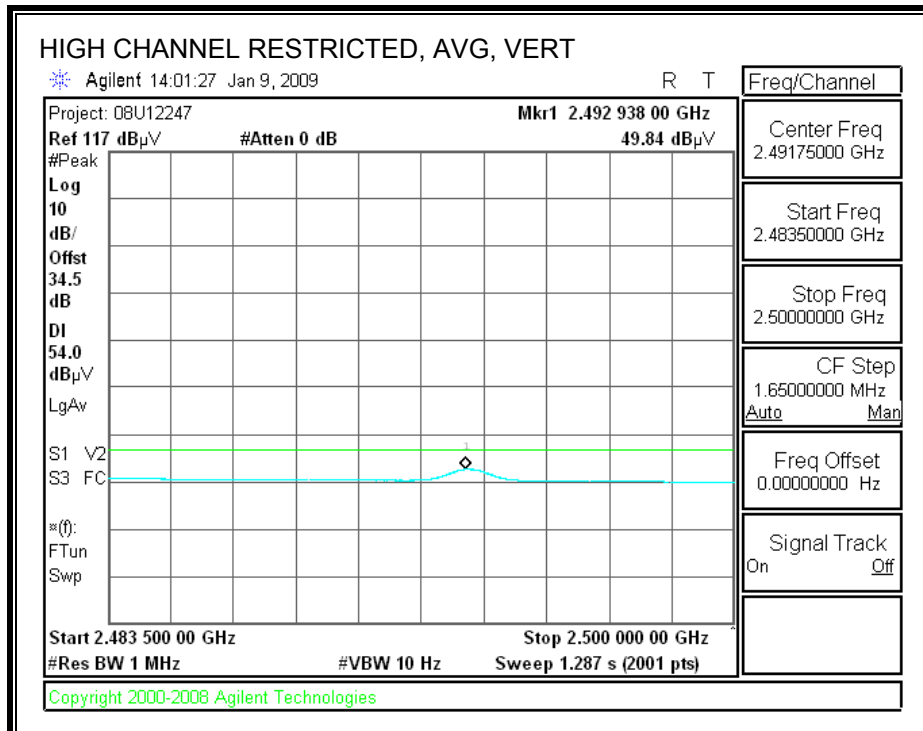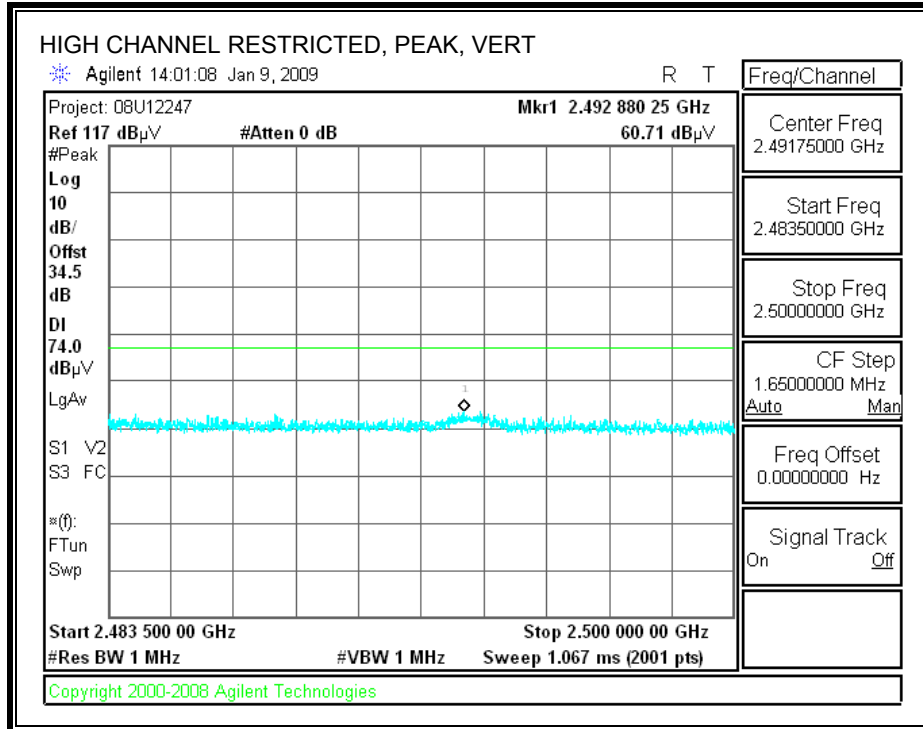



**HARMONICS AND SPURIOUS EMISSIONS – GFSK MODE**

High Frequency Measurement																			
Compliance Certification Services, Fremont 5m Chamber																			
Company:		Broadcom																	
Project #:		08U12247																	
Date:		01/09/08																	
Test Engineer:		Vien Tran																	
Configuration:		EUT / Laptop																	
Mode:		Tx Bluetooth GFSK																	
<b>Test Equipment:</b>																			
Horn 1-18GHz				Pre-amplifier 1-26GHz				Pre-amplifier 26-40GHz				Horn > 18GHz				Limit			
T119; S/N: 29301 @3m				T34 HP 8449B												FCC 15.209			
<b>Hi Frequency Cables</b>																			
3' cable 22807700				12' cable 22807600				20' cable 22807500				HPF				Reject Filter			
3' cable 22807700				12' cable 22807600				20' cable 22807500				HPF_4.0GHz							
<b>Peak Measurements</b> RBW=VBW=1MHz <b>Average Measurements</b> RBW=1MHz ; VBW=10Hz																			
f GHz	Dist (m)	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Fitr dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)				
<b>LOW CHANNEL, 2402MHz</b>																			
4804	3.0	45.7	40.5	33.5	5.8	-34.8	0.0	0.6	50.8	45.6	74	54	-23.2	-8.4	Y				
4804	3.0	41.9	31.2	33.5	5.8	-34.8	0.0	0.6	46.9	36.3	74	54	-27.1	-17.7	H				
<b>MID CHANNEL, 2441MHz</b>																			
4882	3.0	45.2	39.5	33.6	5.8	-34.8	0.0	0.6	50.5	44.8	74	54	-23.5	-9.2	Y				
4882	3.0	41.4	30.9	33.6	5.8	-34.8	0.0	0.6	46.7	36.2	74	54	-27.3	-17.8	H				
<b>HIGH CHANNEL, 2480MHz</b>																			
4960	3.0	45.0	39.4	33.7	5.9	-34.8	0.0	0.6	50.5	44.9	74	54	-23.5	-9.1	V				
4960	3.0	41.1	30.8	33.7	5.9	-34.8	0.0	0.6	46.6	36.3	74	54	-27.4	-17.7	H				
No other emissions were detected above system noise floor																			
Rev. 10.15.08																			
f	Measurement Frequency	Amp	Preamp Gain	Avg Lim	Average Field Strength Limit														
Dist	Distance to Antenna	D Corr	Distance Correct to 3 meters	Pk Lim	Peak Field Strength Limit														
Read	Analyzer Reading	Avg	Average Field Strength @ 3 m	Avg Mar	Margin vs. Average Limit														
AF	Antenna Factor	Peak	Calculated Peak Field Strength	Pk Mar	Margin vs. Peak Limit														
CL	Cable Loss	HPF	High Pass Filter																



**8.1.2. 8PSK MODULATION**  
**RESTRICTED BANDEDGE (LOW CHANNEL, HORIZONTAL)**

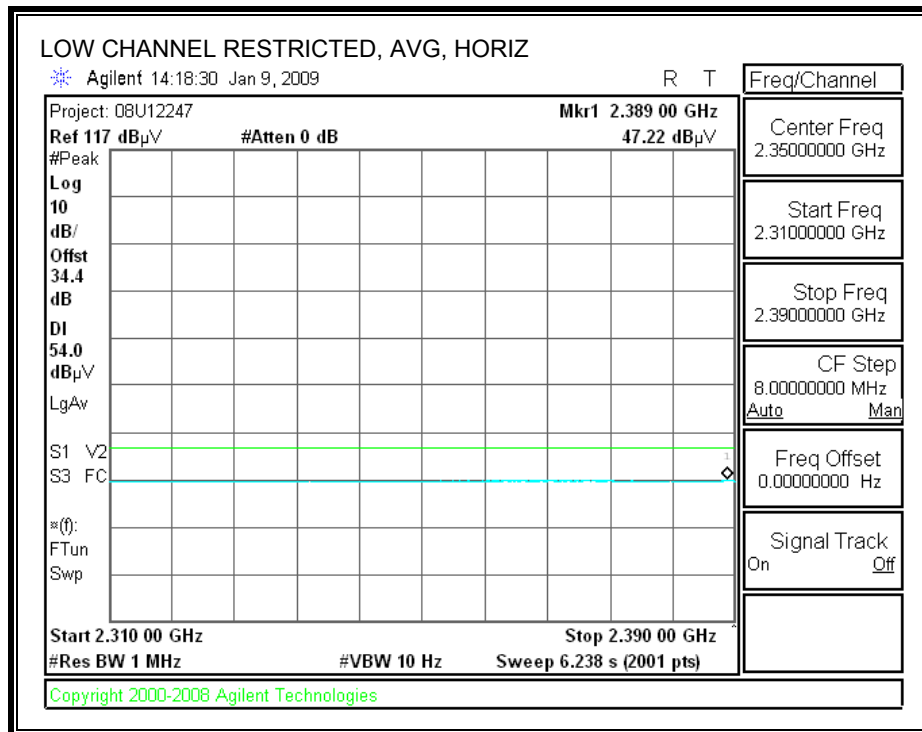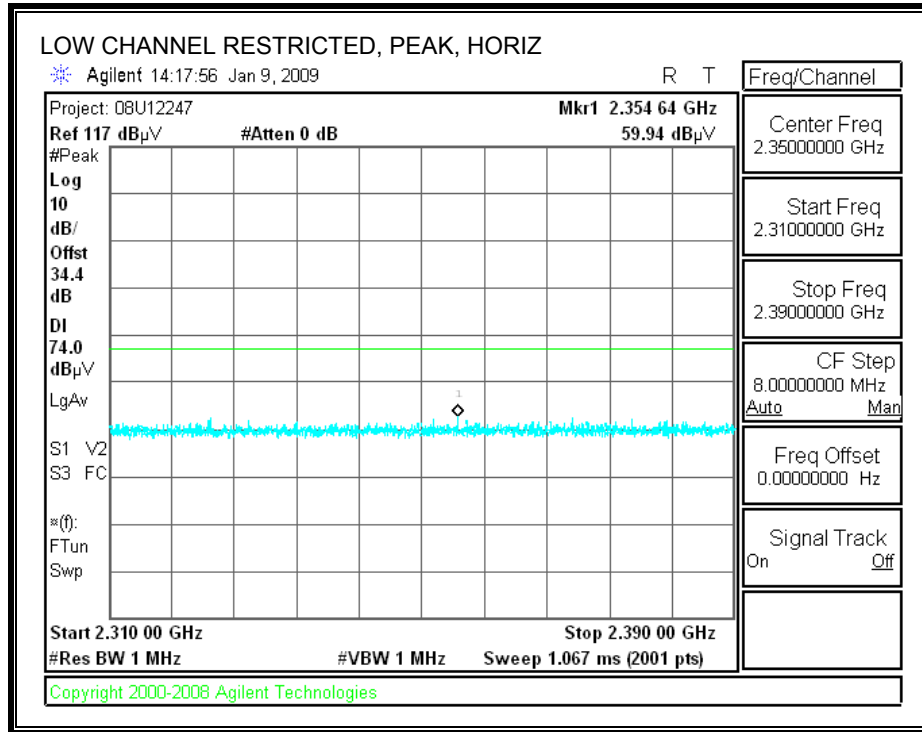



**RESTRICTED BANDEDGE (LOW CHANNEL, VERTICAL)**

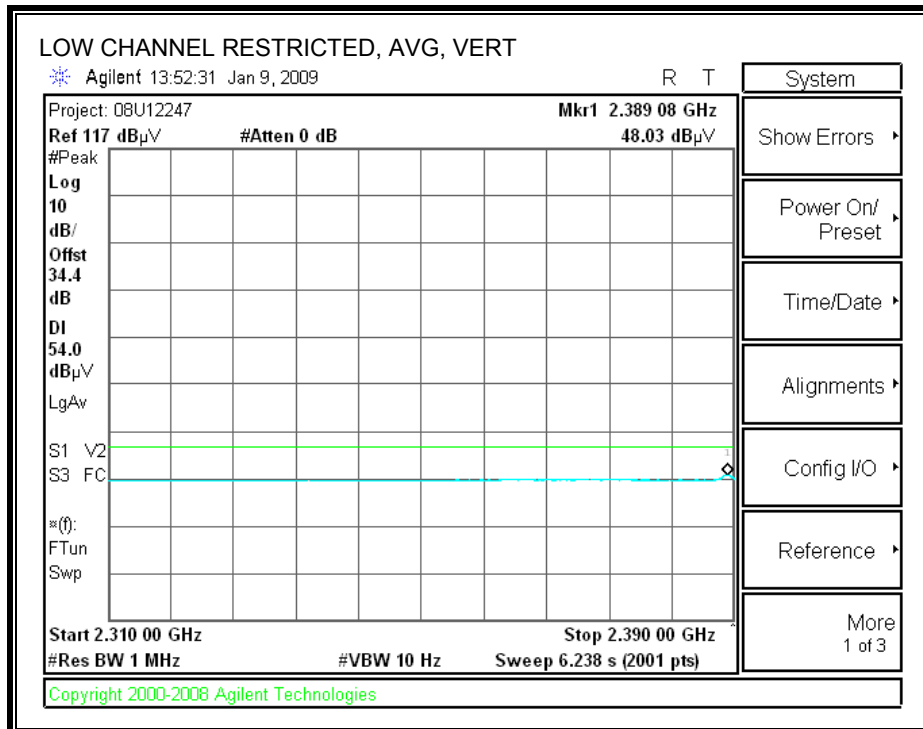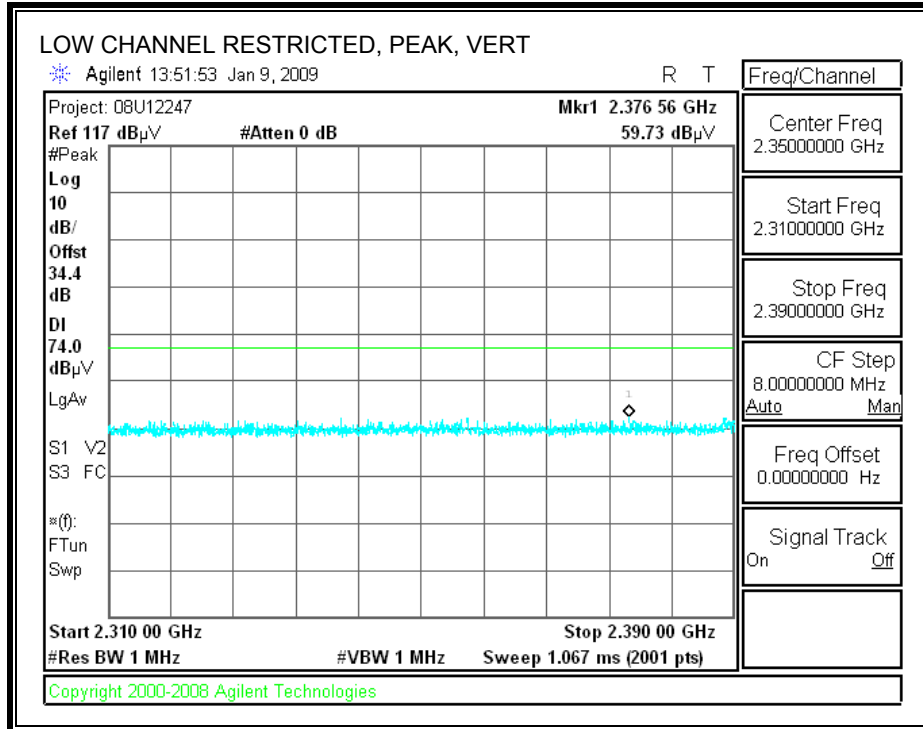

**RESTRICTED BANDEDGE (HIGH CHANNEL, HORIZONTAL)**

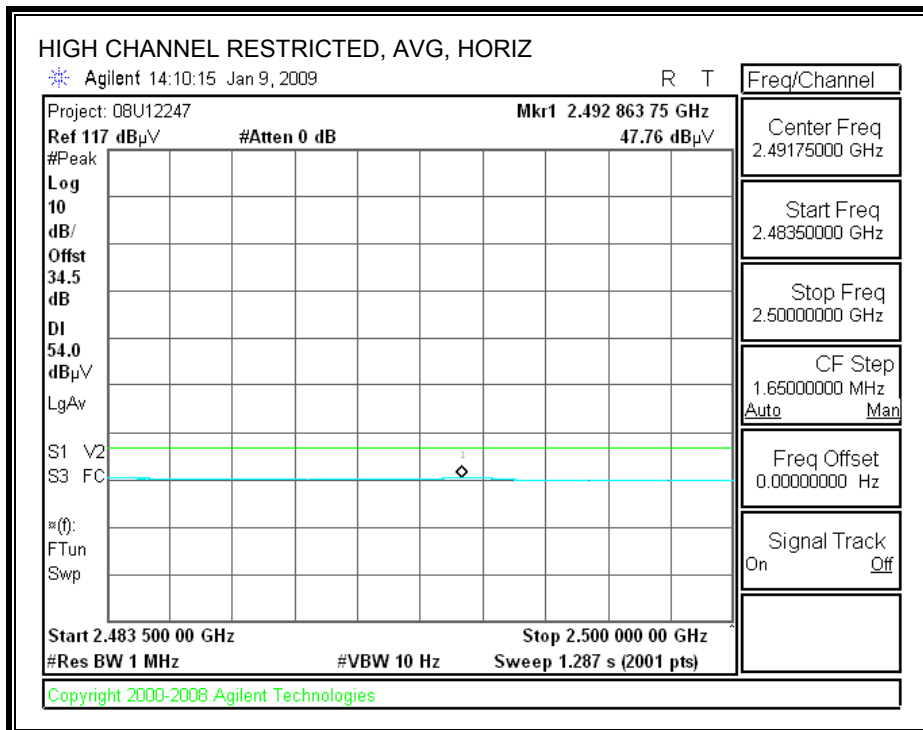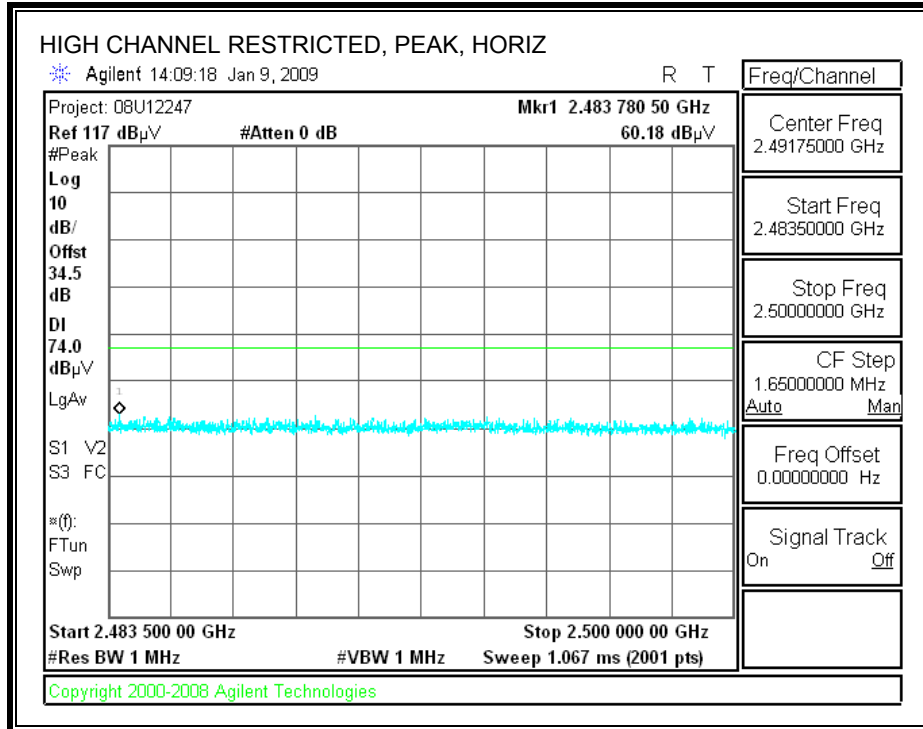

**RESTRICTED BANDEDGE (HIGH CHANNEL, VERTICAL)**

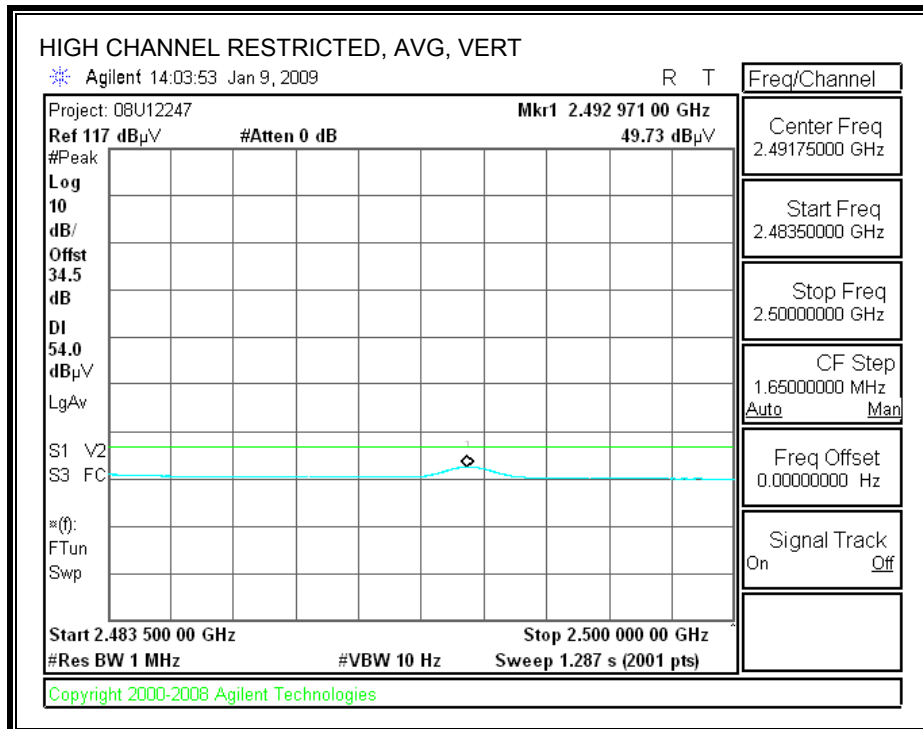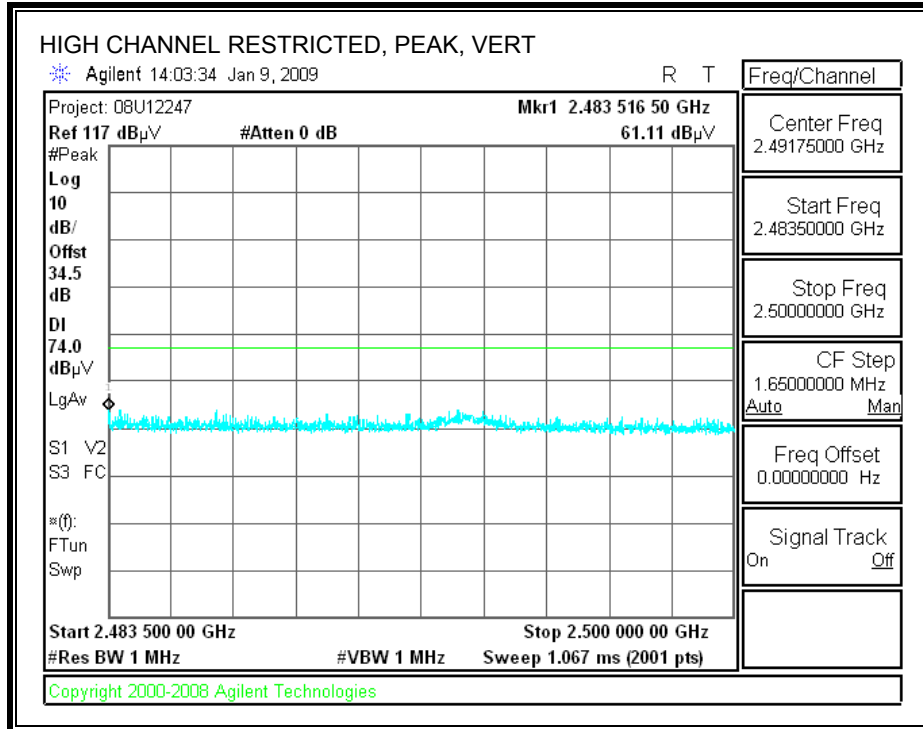

**HARMONICS AND SPURIOUS EMISSIONS – 8PSK MODE**

<b>High Frequency Measurement</b> Compliance Certification Services, Fremont 5m Chamber																			
Company:		Broadcom																	
Project #:		08U12247																	
Date:		01/09/08																	
Test Engineer:		Vien Tran																	
Configuration:		EUT / Laptop																	
Mode:		Tx Bluetooth 8PSK																	
<b>Test Equipment:</b>																			
Horn 1-18GHz				Pre-amplifier 1-26GHz				Pre-amplifier 26-40GHz				Horn > 18GHz				Limit			
T119; S/N: 29301 @3m				T34 HP 8449B												FCC 15.209			
<b>Hi Frequency Cables</b>																			
3' cable 22807700				12' cable 22807600				20' cable 22807500				HPF		Reject Filter		<b>Peak Measurements</b> RBW=VBW=1MHz <b>Average Measurements</b> RBW=1MHz ; VBW=10Hz			
3' cable 22807700				12' cable 22807600				20' cable 22807500				HPF_4.0GHz							
f GHz	Dist (m)	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Filtr dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)				
<b>LOW CHANNEL, 2402MHz</b>																			
4.804	3.0	46.3	39.1	33.5	5.8	-34.8	0.0	0.6	51.4	44.2	74	54	-22.6	-9.8	Y				
4.804	3.0	41.7	31.2	33.5	5.8	-34.8	0.0	0.6	46.8	36.3	74	54	-27.2	-17.7	H				
<b>MID CHANNEL, 2441MHz</b>																			
4.882	3.0	46.5	39.6	33.6	5.8	-34.8	0.0	0.6	51.8	44.9	74	54	-22.2	-9.1	Y				
4.882	3.0	41.9	31.4	33.6	5.8	-34.8	0.0	0.6	47.2	36.7	74	54	-26.8	-17.3	H				
<b>HIGH CHANNEL, 2480MHz</b>																			
4.960	3.0	46.1	38.9	33.7	5.9	-34.8	0.0	0.6	51.6	44.4	74	54	-22.4	-9.6	Y				
4.960	3.0	41.6	31.1	33.7	5.9	-34.8	0.0	0.6	47.1	36.6	74	54	-26.9	-17.4	H				
No other emissions were detected above system noise floor																			
Rev. 10.15.08																			
f	Measurement Frequency	Amp	Preamp Gain	Avg Lim	Average Field Strength Limit														
Dist	Distance to Antenna	D Corr	Distance Correct to 3 meters	Pk Lim	Peak Field Strength Limit														
Read	Analyzer Reading	Avg	Average Field Strength @ 3 m	Avg Mar	Margin vs. Average Limit														
AF	Antenna Factor	Peak	Calculated Peak Field Strength	Pk Mar	Margin vs. Peak Limit														
CL	Cable Loss	HPF	High Pass Filter																

## 8.2. RECEIVER ABOVE 1 GHz

High Frequency Measurement																			
Compliance Certification Services, Fremont 5m Chamber																			
Company:		Broadcom																	
Project #:		08U12247																	
Date:		01/12/09																	
Test Engineer:		Devin Chang																	
Configuration:		EUT / Laptop																	
Mode:		Rx Mode																	
Test Equipment:																			
Horn 1-18GHz				Pre-amplifer 1-26GHz				Pre-amplifer 26-40GHz				Horn > 18GHz				Limit			
T60; S/N: 2238 @3m				T145 Agilent 3008A0050												RX RSS 210			
Hi Frequency Cables																			
3' cable 22807700				12' cable 22807600				20' cable 22807500				HPF				Reject Filter			
3' cable 22807700				12' cable 22807600				20' cable 22807500											
Peak Measurements RBW=VBW=1MHz Average Measurements RBW=1MHz ; VBW=10Hz																			
f GHz	Dist (m)	Read Pk dBuV	Read Avg dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Fltr dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)				
1.205	3.0	54.3	40.0	27.0	2.6	-36.0	0.0	0.0	47.9	33.6	74	54	-26.1	-20.4	V				
1.607	3.0	63.0	41.4	28.0	3.1	-35.7	0.0	0.0	58.4	36.8	74	54	-15.6	-17.2	V				
2.411	3.0	58.6	45.3	29.5	3.8	-35.1	0.0	0.0	56.9	43.6	74	54	-17.1	-10.4	V				
1.205	3.0	53.7	43.6	27.0	2.6	-36.0	0.0	0.0	47.3	37.2	74	54	-26.7	-16.8	H				
1.607	3.0	57.4	45.6	28.0	3.1	-35.7	0.0	0.0	52.8	41.0	74	54	-21.2	-13.0	H				
2.411	3.0	55.0	39.0	29.5	3.8	-35.1	0.0	0.0	53.3	37.3	74	54	-20.7	-16.7					
No other emissions were detected above system noise floor																			
Rev. 10.15.08																			
f	Measurement Frequency					Amp	Preamp Gain					Avg Lim	Average Field Strength Limit						
Dist	Distance to Antenna					D Corr	Distance Correct to 3 meters					Pk Lim	Peak Field Strength Limit						
Read	Analyzer Reading					Avg	Average Field Strength @ 3 m					Avg Mar	Margin vs. Average Limit						
AF	Antenna Factor					Peak	Calculated Peak Field Strength					Pk Mar	Margin vs. Peak Limit						
CL	Cable Loss					HPF	High Pass Filter												




### 8.3. WORST-CASE BELOW 1 GHz

#### SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, HORIZONTAL)



Compliance Certification Services  
 47173 Benicia Street  
 Fremont, CA 94538  
 Tel: (510) 771-1000  
 Fax: (510) 661-0888

Data#: 11 File#: 08u12247.EMI Date: 01-12-2009 Time: 11:34:32

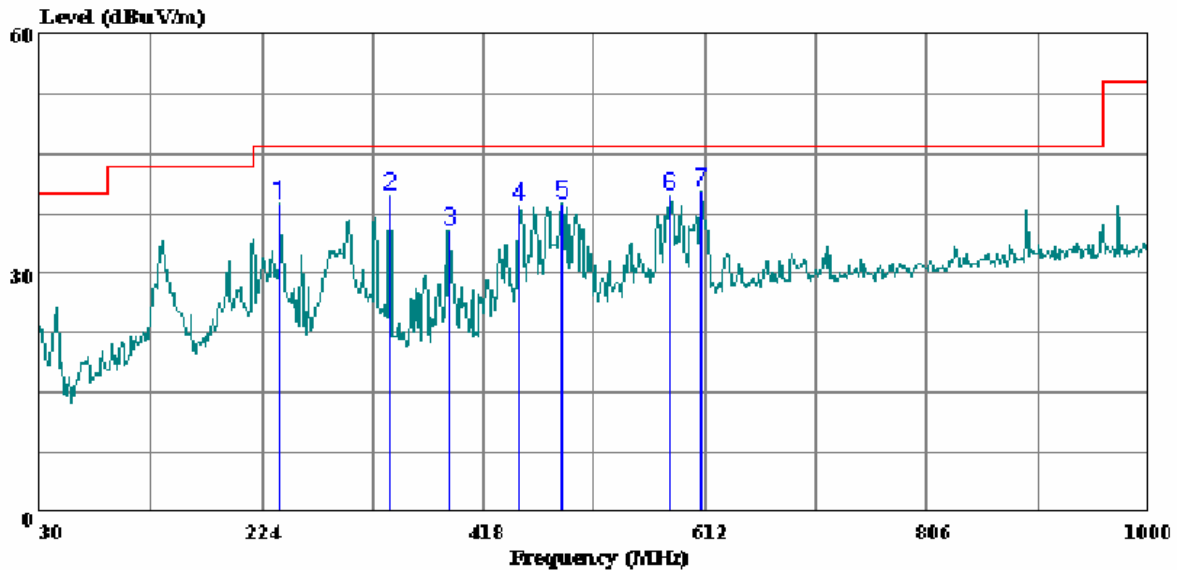

Trace: 10

Ref Trace:

Condition: FCC CLASS-B HORIZONTAL  
 Test Operator:: Devin Chang  
 Project #: 08U12247  
 Company: Broadcom  
 Configuration:: EUT with NB  
 Mode : worst case  
 Target: FCC CLASS B

Page: 1


	Read Freq	Read Level	Factor	Level	Limit	Over	Remark
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	
1	239.520	51.83	-13.21	38.63	46.00	-7.37	Peak
2	336.520	49.67	-10.00	39.67	46.00	-6.33	Peak
3	387.930	43.83	-8.53	35.30	46.00	-10.70	Peak
4	450.010	44.83	-6.45	38.39	46.00	-7.61	Peak
5	485.900	43.83	-5.20	38.63	46.00	-7.37	Peak
6	581.930	42.83	-3.17	39.66	46.00	-6.34	Peak
7	608.120	43.00	-2.64	40.36	46.00	-5.64	Peak

**SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, VERTICAL)**



Compliance Certification Services  
 47173 Benicia Street  
 Fremont, CA 94538  
 Tel: (510) 771-1000  
 Fax: (510) 661-0888

Data#: 17 File#: 08u12247.EMI Date: 01-12-2009 Time: 12:03:01

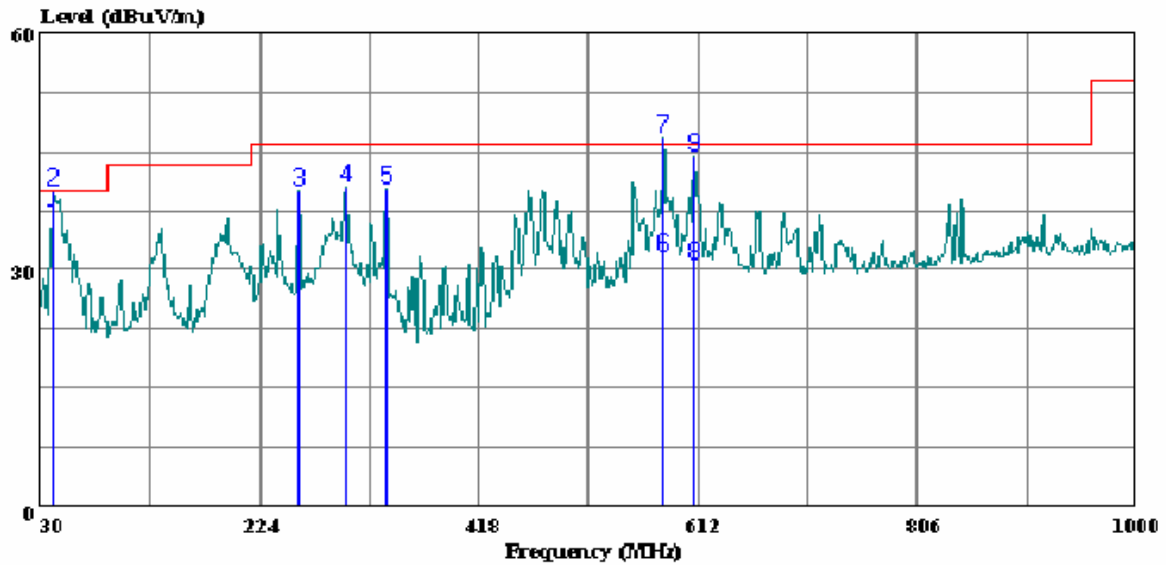

Trace: 14

Ref Trace:

Condition: FCC CLASS-B VERTICAL  
 Test Operator:: Devin Chang  
 Project #: : 08U12247  
 Company: : Broadcom  
 Configuration:: EUT with NB  
 Mode : : worst case  
 Target: : FCC CLASS B

Page: 1

	Read Freq	Level	Factor	Level	Limit	Over	Remark
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	
1	40.670	49.43	-13.72	35.71	40.00	-4.29	QP
2 *	40.670	52.95	-12.83	40.11	40.00	0.11	Peak
3	258.920	52.83	-12.87	39.97	46.00	-6.03	Peak
4	299.660	51.50	-11.04	40.46	46.00	-5.54	Peak
5	336.520	50.33	-10.00	40.33	46.00	-5.67	Peak
6	581.930	34.88	-3.17	31.71	46.00	-14.29	QP
7 *	581.930	50.00	-3.17	46.83	46.00	0.83	Peak
8	608.120	33.23	-2.64	30.59	46.00	-15.41	QP
9	608.120	47.00	-2.64	44.36	46.00	-1.64	Peak

## 9. AC POWER LINE CONDUCTED EMISSIONS

### LIMITS

FCC §15.207 (a)

RSS-Gen 7.2.2

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency.

### TEST PROCEDURE

The EUT is placed on a non-conducting table 40 cm from the vertical ground plane and 80 cm above the horizontal ground plane. The EUT is configured in accordance with ANSI C63.4.

The receiver is set to a resolution bandwidth of 9 kHz. Peak detection is used unless otherwise noted as quasi-peak or average.

Line conducted data is recorded for both NEUTRAL and HOT lines.

### RESULTS

#### 6 WORST EMISSIONS


CONDUCTED EMISSIONS DATA (115VAC 60Hz)										
Freq. (MHz)	Reading			Closs (dB)	Limit QP	EN B		Margin		Remark L1 / L2
	PK (dBuV)	QP (dBuV)	AV (dBuV)			AV	QP (dB)	AV (dB)		
0.18	52.72	--	39.14	0.00	64.67	54.67	-11.95	-15.53	L1	
0.23	45.92	--	35.19	0.00	62.31	52.31	-16.39	-17.12	L1	
2.04	35.63	--	28.84	0.00	56.00	46.00	-20.37	-17.16	L1	
0.18	53.11	--	40.88	0.00	64.67	54.67	-11.56	-13.79	L2	
0.23	44.58	--	34.33	0.00	62.31	52.31	-17.73	-17.98	L2	
3.68	41.78	--	26.08	0.00	56.00	46.00	-14.22	-19.92	L2	
6 Worst Data										

**LINE 1 RESULTS**



Compliance Certification Services  
47173 Benicia Street  
Fremont, CA 94538  
Tel: (510) 771-1000  
Fax: (510) 661-0888

Data#: 7 File#: 08U12247.EMI Date: 01-13-2009 Time: 13:34:54

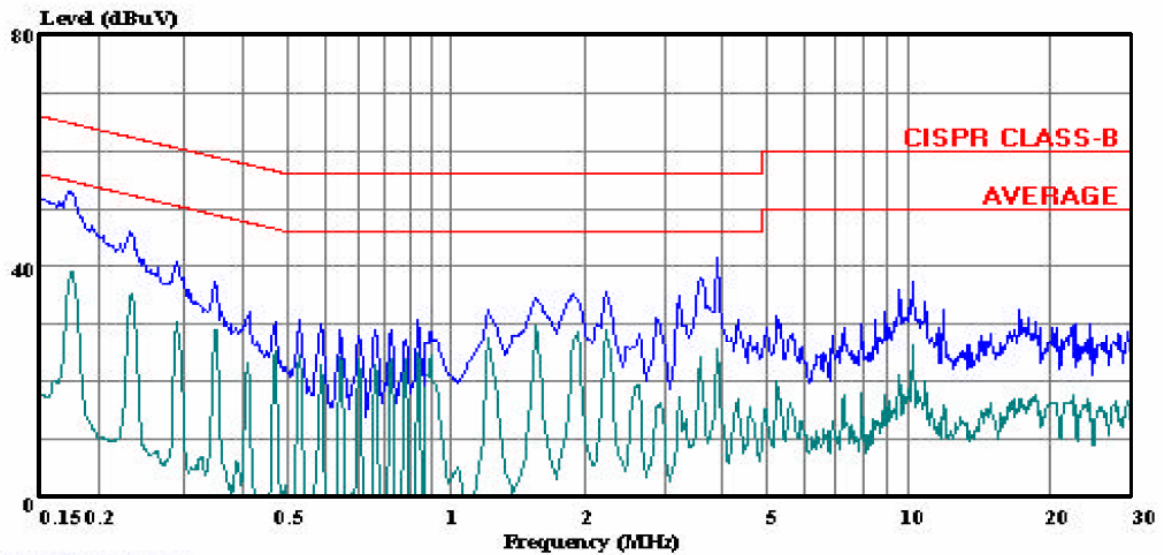

(Line Conduction)

Trace: 5

Ref Trace:


Condition: CISPR CLASS-B  
Test Operator:: Devin Chang  
Project #: : 08U12247  
Company: : Broadcom  
Configuration:: EUT with Laptop  
Mode: : Charging Mode  
Target: : FCC Class B  
Voltage: : 115VAC / 60Hz  
: I.1: Peak (Blue). Average (Green)

**LINE 2 RESULTS**



Compliance Certification Services  
47173 Benicia Street  
Fremont, CA 94538  
Tel: (510) 771-1000  
Fax: (510) 661-0888

Data#: 14 File#: 08U12247.EMI Date: 01-13-2009 Time: 13:53:10

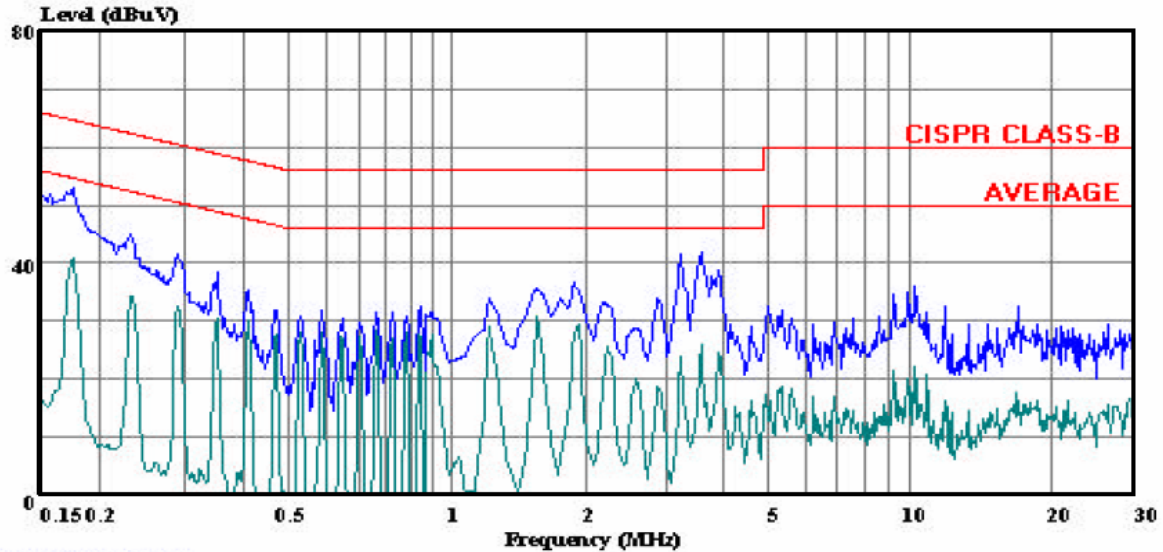

(Line Conduction)

Trace: 12

Ref Trace:

Condition: CISPR CLASS-B  
Test Operator:: Devin Chang  
Project #: : 08U12247  
Company: : Broadcom  
Configuration:: EUT with Laptop  
Mode: : Charging Mode  
Target: : FCC Class B  
Voltage: : 115VAC / 60Hz  
: L2: Peak (Blue), Average (Green)

## 10. MAXIMUM PERMISSIBLE EXPOSURE

### FCC RULES

§1.1310 The criteria listed in Table 1 shall be used to evaluate the environmental impact of human exposure to radio-frequency (RF) radiation as specified in §1.1307(b), except in the case of portable devices which shall be evaluated according to the provisions of §2.1093 of this chapter.

TABLE 1—LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm <sup>2</sup> )	Averaging time (minutes)
(A) Limits for Occupational/Controlled Exposures				
0.3–3.0 .....	614	1.63	*(100)	6
3.0–30 .....	1842/f	4.89/f	*(900/f <sup>2</sup> )	6
30–300 .....	61.4	0.163	1.0	6
300–1500 .....	.....	.....	f/300	6
1500–100,000 .....	.....	.....	5	6
(B) Limits for General Population/Uncontrolled Exposure				
0.3–1.34 .....	614	1.63	*(100)	30
1.34–30 .....	824/f	2.19/f	*(180/f <sup>2</sup> )	30

TABLE 1—LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)—Continued

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm <sup>2</sup> )	Averaging time (minutes)
30–300 .....	27.5	0.073	0.2	30
300–1500 .....	.....	.....	f/1500	30
1500–100,000 .....	.....	.....	1.0	30

f = frequency in MHz

\* = Plane-wave equivalent power density

NOTE 1 TO TABLE 1: Occupational/controlled limits apply in situations in which persons are exposed as a consequence of their employment provided those persons are fully aware of the potential for exposure and can exercise control over their exposure. Limits for occupational/controlled exposure also apply in situations when an individual is transient through a location where occupational/controlled limits apply provided he or she is made aware of the potential for exposure.

NOTE 2 TO TABLE 1: General population/uncontrolled exposures apply in situations in which the general public may be exposed, or in which persons that are exposed as a consequence of their employment may not be fully aware of the potential for exposure or can not exercise control over their exposure.

**IC RULES**

IC Safety Code 6, Section 2.2.1 (a) A person other than an RF and microwave exposed worker shall not be exposed to electromagnetic radiation in a frequency band listed in Column 1 of Table 5, if the field strength exceeds the value given in Column 2 or 3 of Table 5, when averaged spatially and over time, or if the power density exceeds the value given in Column 4 of Table 5, when averaged spatially and over time.

**Table 5  
 Exposure Limits for Persons Not Classed As RF and Microwave Exposed Workers (Including the General Public)**

1 Frequency (MHz)	2 Electric Field Strength; rms (V/m)	3 Magnetic Field Strength; rms (A/m)	4 Power Density (W/m <sup>2</sup> )	5 Averaging Time (min)
0.003–1	280	2.19		6
1–10	280/ <i>f</i>	2.19/ <i>f</i>		6
10–30	28	2.19/ <i>f</i>		6
30–300	28	0.073	2*	6
300–1 500	1.585 <i>f</i> <sup>0.5</sup>	0.0042 <i>f</i> <sup>0.5</sup>	<i>f</i> /150	6
1 500–15 000	61.4	0.163	10	6
15 000–150 000	61.4	0.163	10	616 000 / <i>f</i> <sup>1.2</sup>
150 000–300 000	0.158 <i>f</i> <sup>0.5</sup>	4.21 x 10 <sup>-4</sup> <i>f</i> <sup>0.5</sup>	6.67 x 10 <sup>-5</sup> <i>f</i>	616 000 / <i>f</i> <sup>1.2</sup>

\* Power density limit is applicable at frequencies greater than 100 MHz.

- Notes:**
1. Frequency, *f*, is in MHz.
  2. A power density of 10 W/m<sup>2</sup> is equivalent to 1 mW/cm<sup>2</sup>.
  3. A magnetic field strength of 1 A/m corresponds to 1.257 microtesla (μT) or 12.57 milligauss (mG).

**CALCULATIONS**

Given

$$E = \sqrt{(30 * P * G) / d}$$

and

$$S = E^2 / 3770$$

where

- E = Field Strength in Volts/meter
- P = Power in Watts
- G = Numeric antenna gain
- d = Distance in meters
- S = Power Density in milliwatts/square centimeter

Combining equations, rearranging the terms to express the distance as a function of the remaining variables, changing to units of Power to mW and Distance to cm, and substituting the logarithmic form of power and gain yields:

$$d = 0.282 * 10^{((P + G) / 20)} / \sqrt{S}$$

where

- d = MPE distance in cm
- P = Power in dBm
- G = Antenna Gain in dBi
- S = Power Density Limit in mW/cm<sup>2</sup>

Rearranging terms to calculate the power density at a specific distance yields

$$S = 0.0795 * 10^{((P + G) / 10)} / (d^2)$$

The power density in units of mW/cm<sup>2</sup> is converted to units of W/m<sup>2</sup> by multiplying by a factor of 10.

**LIMITS**

From FCC §1.1310 Table 1 (B), the maximum value of S = 1.0 mW/cm<sup>2</sup>

From IC Safety Code 6, Section 2.2 Table 5 Column 4, S = 10 W/m<sup>2</sup>

**RESULTS**


(MPE distance equals 20 cm)

Mode	Band	MPE Distance (cm)	Output Power (dBm)	Antenna Gain (dBi)	FCC Power Density (mW/cm <sup>2</sup> )	IC Power Density (W/m <sup>2</sup> )
GFSK	2.4 GHz	20.0	2.08	1.87	0.0005	0.005
8PSK	2.4 GHz	20.0	4.27	1.87	0.0008	0.008




## 11. SETUP PHOTOS


### ANTENNA PORT CONDUCTED RF MEASUREMENT SETUP

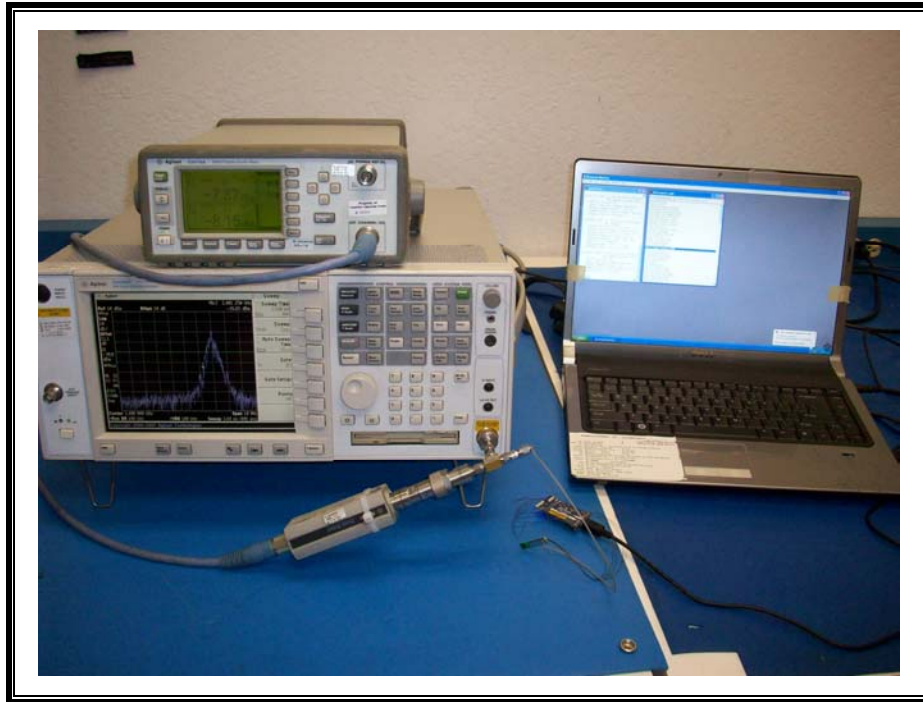


**RADIATED RF MEASUREMENT SETUP FOR PORTABLE CONFIGURATION**

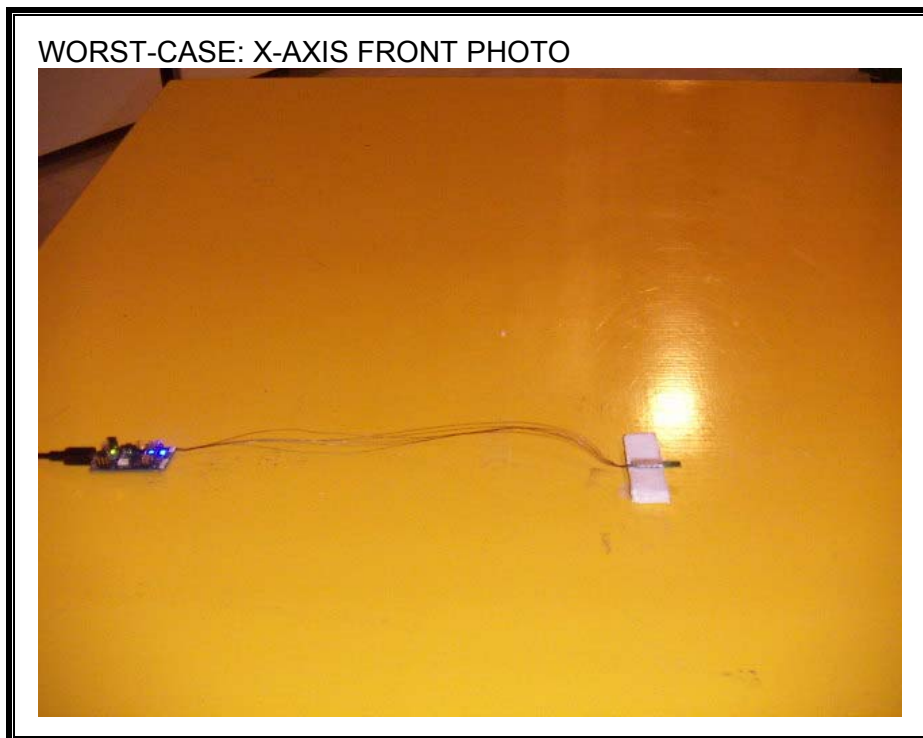


Y-AXIS PHOTO

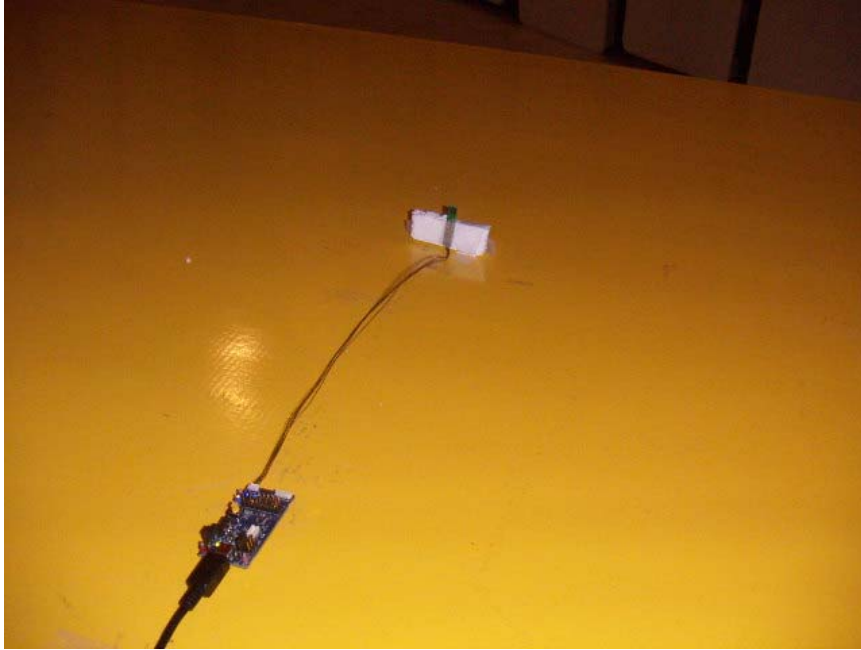

Z-PHOTO

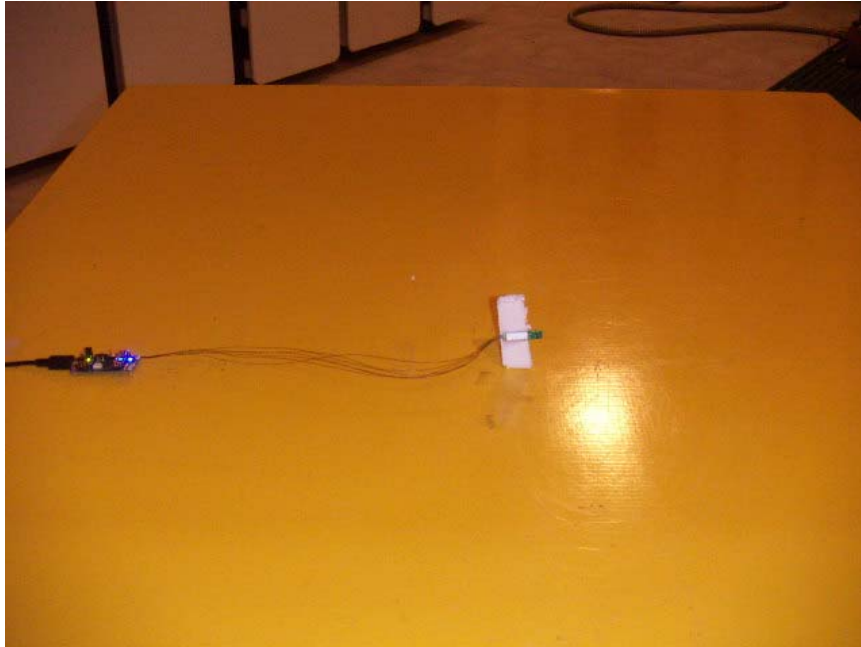

**WORST-CASE - RADIATED RF MEASUREMENT SETUP**

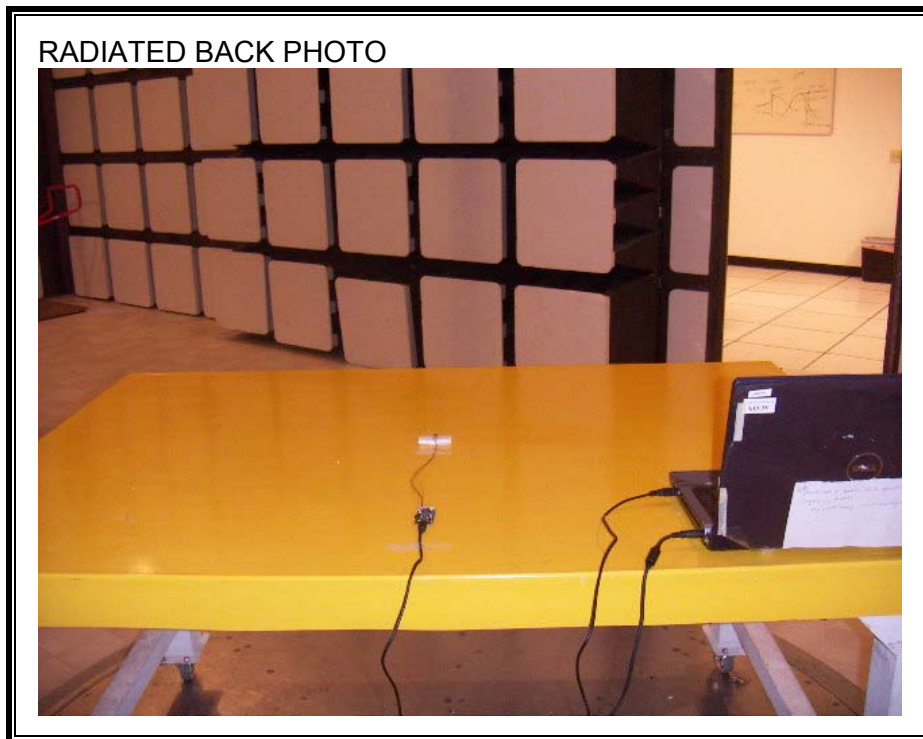

**POWERLINE CONDUCTED EMISSIONS MEASUREMENT SETUP**

LINE CONDUCTED FRONT PHOTO



LINE CONDUCTED BACK PHOTO



**END OF REPORT**