



# RF Test Reports



Report No.: FCC\_RF\_SL17121901-MED-023 (37601)  
Supersede Report No.: N/A

Applicant	Medtronic, Inc.
Product Name	Activa PC
Model No.	37601
Test Standard	47 CFR 15.209
Test Method	ANSI C63.10: 2013
Date of test	02/27/2018
Issue Date	03/01/2018
Test Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail
Equipment complied with the test standard equipment	[ x ]
Equipment did not comply with the test standard equipment	[ ]
This Test Report is Issued Under the Authority of:	
	
Cipher	Chen Ge
Test Engineer	Engineer Reviewer
This test report may be reproduced in full only Test result presented in this test report is applicable to the tested sample only	

Issued By:  
SIEMIC Laboratories  
775 Montague Expressway, Milpitas, CA 95035



775 Montague Expressway, Milpitas, CA 95035, USA • Phone: (+1) 408 526 1188 • Facsimile (+1) 408 526 1088

Visit us at: [www.siemic.com](http://www.siemic.com); Follow us at:    

## Laboratory Introduction

SIEMIC, headquartered in the heart of Silicon Valley, with superior facilities in US and Asia, is one of the leading independent testing and certification facilities providing customers with one-stop shop services for Compliance Testing and Global Certifications.



In addition to testing and certification, SIEMIC provides initial design reviews and compliance management throughout a project. Our extensive experience with China, Asia Pacific, North America, European, and International compliance requirements, assures the fastest, most cost effective way to attain regulatory compliance for the global markets.

### Accreditations for Conformity Assessment

Country/Region	Accreditation Body	Scope
USA	FCC, A2LA	EMC, RF/Wireless, Telecom
Canada	IC, A2LA, NIST	EMC, RF/Wireless, Telecom
Taiwan	BSMI, NCC, NIST	EMC, RF, Telecom, Safety
Hong Kong	OFTA, NIST	RF/Wireless, Telecom
Australia	NATA, NIST	EMC, RF, Telecom, Safety
Korea	KCC/RRA, NIST	EMI, EMS, RF, Telecom, Safety
Japan	VCCI, JATE, TELEC, RFT	EMI, RF/Wireless, Telecom
Mexico	NOM, COFETEL, Caniety	EMC, RF/Wireless, Telecom, Safety
Europe	A2LA, NIST	EMC, RF, Telecom, Safety
Israel	MOC, NIST	EMC, RF, Telecom, Safety

### Accreditations for Product Certifications

Country	Accreditation Body	Scope
USA	FCC TCB, NIST	EMC, RF, Telecom
Canada	IC FCB, NIST	EMC, RF, Telecom
Singapore	iDA, NIST	EMC, RF, Telecom
EU	NB	EMC & R&TTE Directive
Japan	MIC (RCB 208)	RF, Telecom
Hong Kong	OFTA (US002)	RF, Telecom

## **CONTENTS**

<b>1</b>	<b>REPORT REVISION HISTORY .....</b>	<b>4</b>
<b>2</b>	<b>EXECUTIVE SUMMARY.....</b>	<b>5</b>
<b>3</b>	<b>CUSTOMER INFORMATION .....</b>	<b>5</b>
<b>4</b>	<b>TEST SITE INFORMATION .....</b>	<b>5</b>
<b>5</b>	<b>EQUIPMENT UNDER TEST (EUT) INFORMATION .....</b>	<b>5</b>
5.1	EUT Description .....	5
5.2	Radio Description .....	6
<b>6</b>	<b>SUPPORTING EQUIPMENT/SOFTWARE AND CABLING DESCRIPTION.....</b>	<b>7</b>
6.1	Supporting Equipment .....	7
6.2	I/O Ports.....	7
6.3	Test Software Description .....	7
<b>7</b>	<b>TEST SUMMARY.....</b>	<b>8</b>
<b>8</b>	<b>MEASUREMENT UNCERTAINTY .....</b>	<b>9</b>
8.1	Radiated Emissions (9kHz to 30MHz).....	9
8.2	Radiated Emissions (30MHz to 1GHz).....	9
8.3	Radiated Emissions (1GHz to 40GHz).....	10
8.4	RF conducted measurement .....	10
<b>9</b>	<b>MEASUREMENTS, EXAMINATION AND DERIVED RESULTS .....</b>	<b>11</b>
9.1	Antenna Requirement.....	11
9.2	Radiated Spurious Emissions below 30MHz .....	12
	<b>ANNEX A. TEST INSTRUMENT &amp; METHOD .....</b>	<b>15</b>
	<b>ANNEX B. SIEMIC ACCREDITATION .....</b>	<b>16</b>

## 1 Report Revision History

Report No.	Report Version	Description	Issue Date
FCC_RF_SL17121901-MED-023 (37601)	None	Original Report	03/01/2018

## 2 Executive Summary

The purpose of this test program was to demonstrate compliance of following product

Company: Medtronic, Inc.  
Product: Activa PC  
Model: 37601

against the current Stipulated Standards. The specified model product stated above has demonstrated compliance with the Stipulated Standard listed on 1<sup>st</sup> page.

## 3 Customer information

Applicant Name	Medtronic, Inc.
Applicant Address	710 Medtronic Parkway N.E., Minneapolis, MN 55432
Manufacturer Name	Medtronic, Inc.
Manufacturer Address	710 Medtronic Parkway N.E., Minneapolis, MN 55432

## 4 Test site information

Lab performing tests	SIEMIC Laboratories
Lab Address	775 Montague Expressway, Milpitas, CA 95035
FCC Test Site No.	881796
IC Test Site No.	4842D-2
VCCI Test Site No.	A0133

## 5 Equipment Under Test (EUT) Information

### 5.1 EUT Description

Product Name	Activa PC
Model No.	37601
Trade Name	Medtronic
Serial No.	NKM735107H
Input Power	Battery Power 3.0V
Date of EUT received	12/21/2017
Equipment Class/ Category	ULP-AMI-P, Class 3

## 5.2 Radio Description

### Radio Parameters

Operating Frequency	175 KHz
Modulation	OOK burst
Channel Spacing	Single Channel Operation
Antenna Type	Integral loop antenna/External antenna
Antenna Gain	None

### Channel List

Type	Channel No.	Frequency (KHz)
ULP-AMI	1	175

## 6 Supporting Equipment/Software and cabling Description

### 6.1 Supporting Equipment

Item	Supporting Equipment Description	Model	Serial Number	Manufacturer	Note
1	InterStim ICon	3037	N/A	Medtronic	N/A

### 6.2 I/O Ports

Item	Connection Start		Connection Stop		Length / shielding Info		Note
	From	I/O Port	To	I/O Port	Length (m)	Shielding	
N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A

### 6.3 Test Software Description

Test Item	Software	Description
RF Testing	N/A	Provided by manufacturer to set EUT in continuous mode

## 7 Test Summary

Test Item	Test standard		Test Method/Procedure		Pass / Fail
Antenna Requirement	FCC	47 CFR 15.203	FCC	ANSI C63.10 – 2013	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> N/A
Radiated Spurious Emissions	FCC	47 CFR 15.209	FCC	ANSI C63.10: 2013	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> N/A
AC Conducted Emissions	FCC	47 CFR 15.207	FCC	ANSI C63.10: 2013	<input type="checkbox"/> Pass <input checked="" type="checkbox"/> N/A
Remark	<ol style="list-style-type: none"> <li>All measurement uncertainties are not taken into consideration for all presented test result.</li> <li>The applicant shall ensure frequency stability by showing that an emission is maintained within the band of operation under all normal operating conditions as specified in the user's manual.</li> <li>EUT is a DC powered device.</li> </ol>				



## 8 Measurement Uncertainty

### 8.1 Radiated Emissions (9kHz to 30MHz)

The test is to measure the radiated emissions of the EUT.

Some error sources that can contribute to the total uncertainty:

- Uncertainty of the receiver
- Uncertainty of the antenna
- Uncertainty of cables
- Uncertainty due to the mismatches

Source of Uncertainty	Value (dB)	Probability Distribution	Division	Sensitivity Coefficient	Expanded Uncertainty
Receiver Reading	0.10	Rectangular	1.732	1	0.069284
Cable Insertion Loss	0.21	Normal	2	1	0.105
Antenna Factor	0.65	Normal	2	1	0.325
Receiver CW accuracy	0.45	Rectangular	1.732	1	0.2598152
Mismatch	0.25	U-Shape	1.414	1	0.1768033
Combined Standard Uncertainty					0.935
<b>Expanded Uncertainty (K=2)</b>					<b>1.87</b>

The total derived measurement uncertainty is +/- 1.87 dB.

### 8.2 Radiated Emissions (30MHz to 1GHz)

The test is to measure the radiated emissions of the EUT.

Some error sources that can contribute to the total uncertainty:

- Uncertainty of the receiver
- Uncertainty of the antenna
- Uncertainty of cables
- Uncertainty due to the mismatches
- NSA Calibration
- Etc., details see the below table

Source of Uncertainty	Value (dB)	Probability Distribution	Division	Sensitivity Coefficient	Expanded Uncertainty
Receiver Reading	0.12	Rectangular	1.732	1	0.069284
Cable Insertion Loss	0.21	Normal	2	1	0.105
Filter Insertion Loss	0.25	Normal	2	1	0.125
Antenna Factor	0.65	Normal	2	1	0.325
Receiver CW accuracy	0.5	Rectangular	1.732	1	0.2886836
Pulse Amplitude Response	1.5	Rectangular	1.732	1	0.86605081
PRF Response	1.5	Rectangular	1.732	1	0.86605081
Mismatch Filter - Receiver	0.25	U-Shape	1.414	1	0.1768033
NSA Calibration	4.0	U-Shape	1.414	1	2.8288543
Combined Standard Uncertainty					3.0059131
<b>Expanded Uncertainty (K=2)</b>					<b>6.0118262</b>

The total derived measurement uncertainty is +/- 6.00 dB.

### 8.3 Radiated Emissions (1GHz to 40GHz)

The test is to measure the radiated emissions of the EUT.

Some error sources that can contribute to the total uncertainty:

- Uncertainty of the receiver
- Uncertainty of the antenna
- Uncertainty of cables
- Uncertainty due to the mismatches
- VSWR Calibration
- Etc., details see the below table

Source of Uncertainty	Value (dB)	Probability Distribution	Division	Sensitivity Coefficient	Expanded Uncertainty
Receiver Reading	0.12	Rectangular	1.732	1	0.0692840
Cable Insertion Loss	0.21	Normal	2	1	0.1050000
Filter Insertion Loss	0.25	Normal	2	1	0.1250000
Antenna Factor	0.65	Normal	2	1	0.3250000
Receiver CW accuracy	0.5	Rectangular	1.732	1	0.2886836
Pulse Amplitude Response	1.5	Rectangular	1.732	1	0.8660508
PRF Response	1.5	Rectangular	1.732	1	0.8660508
Mismatch Filter - Receiver	0.25	U-Shape	1.414	1	0.1768033
VSWR Calibration	2.0	U-Shape	1.414	1	1.4144272
Combined Standard Uncertainty					4.2363
<b>Expanded Uncertainty (K=2)</b>					<b>8.4726</b>

The total derived measurement uncertainty is +/- 8.47 dB.

### 8.4 RF conducted measurement

The test is to measure the RF output power from the EUT.

Some error sources that can contribute to the total uncertainty:

- Uncertainty of the Reference Level Uncertainty
- Uncertainty of variable attenuators
- Uncertainty of cables
- Uncertainty due to the mismatches

Source of Uncertainty	Value (dB)	Probability Distribution	Division	Sensitivity Coefficient	Expanded Uncertainty
Reference Level	0.12	Rectangular	1.732	1	0.069284
Cable Insertion Loss	0.21	Normal	2	1	0.105
Attenuator	0.25	Normal	2	1	0.125
Mismatch	0.25	U-Shape	1.414	1	0.1768033
Combined Standard Uncertainty					0.476087
<b>Expanded Uncertainty (K=2)</b>					<b>0.952174</b>

The total derived measurement uncertainty is +/- 0.95 dB.

## 9 Measurements, Examination and Derived Results

### 9.1 Antenna Requirement

Spec	Requirement	Applicable
§15.203	<p>An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.</p> <p>Antenna requirement must meet at least one of the following:</p> <p>a) Antenna must be permanently attached to the device.  b) The antenna must use a unique type of connector to attach to the device.  c) Device must be professionally installed. The installer shall be responsible for ensuring that the correct antenna is employed by the device.</p>	☒
Remark	The EUT has an integrated antenna which meets the requirement.	
Result	☒ PASS      ☐ FAIL	

## 9.2 Radiated Spurious Emissions below 30MHz

Requirement(s):


	Item	Requirement	Applicable												
FCC 15.209	1	<p>Except higher limit as specified elsewhere in other section, the emissions from the low-power radio-frequency devices shall not exceed the field strength levels specified in the following table and the level of any unwanted emissions shall not exceed the level of the fundamental emission. The tighter limit applies at the band edges</p> <table border="1"> <thead> <tr> <th>Frequency range (MHz)</th> <th>Field Strength (uV/m)</th> <th>Measurement distance (meters)</th> </tr> </thead> <tbody> <tr> <td>0.009-0.490</td> <td>2400/F(kHz)</td> <td>300</td> </tr> <tr> <td>0.490-1.705</td> <td>24000/F(kHz)</td> <td>30</td> </tr> <tr> <td>1.705-30.0</td> <td>30</td> <td>30</td> </tr> </tbody> </table>	Frequency range (MHz)	Field Strength (uV/m)	Measurement distance (meters)	0.009-0.490	2400/F(kHz)	300	0.490-1.705	24000/F(kHz)	30	1.705-30.0	30	30	<input checked="" type="checkbox"/>
Frequency range (MHz)	Field Strength (uV/m)	Measurement distance (meters)													
0.009-0.490	2400/F(kHz)	300													
0.490-1.705	24000/F(kHz)	30													
1.705-30.0	30	30													
Procedure	<ol style="list-style-type: none"> <li>1. The EUT was switched on and allowed to warm up to its normal operating condition.</li> <li>2. The test was carried out at the selected frequency points obtained from the EUT characterisation. Maximization of the emissions, was carried out by rotating the EUT, changing the antenna polarization, and adjusting the antenna height in the following manner:               <ol style="list-style-type: none"> <li>a. Vertical or horizontal polarisation (whichever gave the higher emission level over a full rotation of the EUT) was chosen.</li> <li>b. The EUT was then rotated to the direction that gave the maximum emission.</li> <li>c. Finally, the antenna height was adjusted to the height that gave the maximum emission.</li> </ol> </li> <li>3. A Quasi-peak measurement was then made for that frequency point.</li> <li>4. Steps 2 and 3 were repeated for the next frequency point, until all selected frequency points were measured.</li> </ol>														
Test Date	02/27/2018	Environmental condition	Temperature 21°C Relative Humidity 42% Atmospheric Pressure 1015mbar												
Remark	N/A														
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail														

Test Data     Yes                       N/A

Test Plot     Yes (See below)       N/A

Test was done by Shuo Zhang at 10m chamber.


Test specification:	Radiated Spurious Emissions		
Mains Power:	3VDC		Result: <input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail
Tested by:	Shuo Zhang		
Test Date:	02/27/2018		
Remarks:	f= 100kHz – 30MHz plot, and loop antenna at 0 degree		

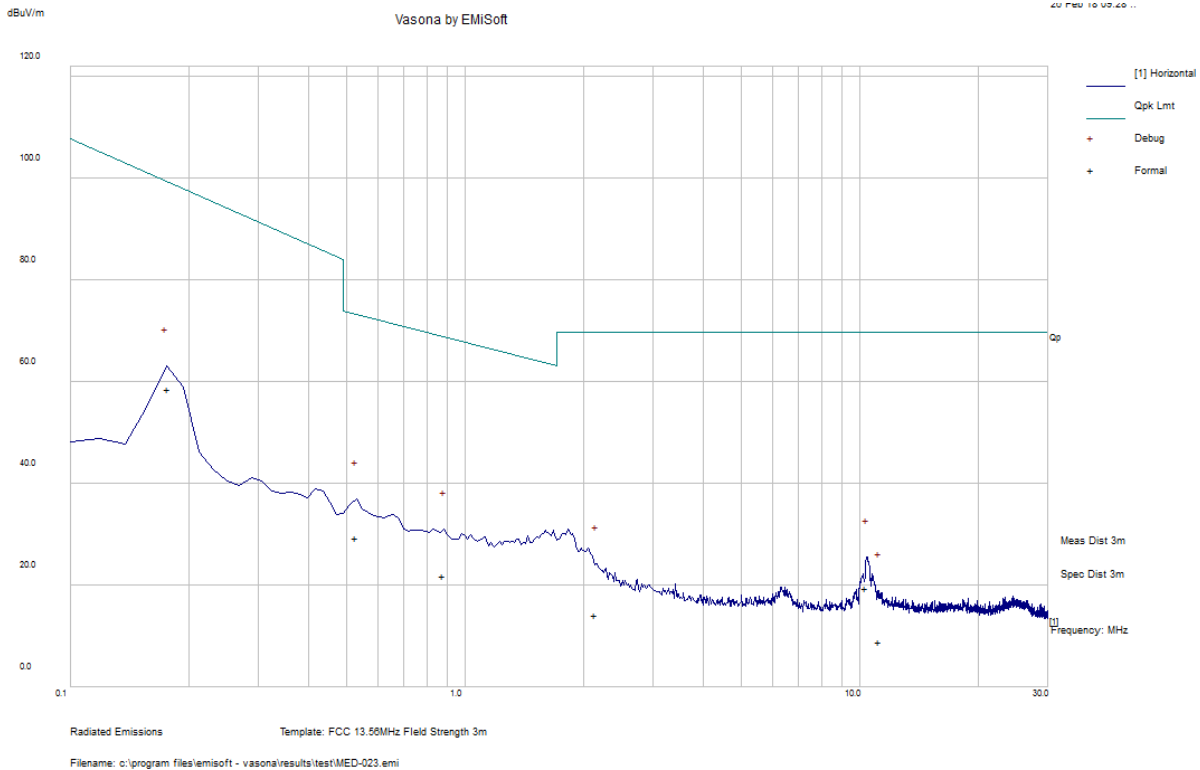

### Quasi Max Measurement

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol (0/90)	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail
0.18	31.02	0.28	27.19	58.49	Quasi Max	0	100	148	99.09	-40.6	Pass
0.53	11.03	0.38	17.93	29.35	Quasi Max	0	100	123	73.13	-43.79	Pass
0.88	7.72	0.43	13.74	21.89	Quasi Max	0	100	145	68.69	-46.81	Pass
10.38	17.19	0.66	1.56	19.4	Quasi Max	0	100	339	69.54	-50.14	Pass
2.14	6.69	0.51	7	14.2	Quasi Max	0	100	199	69.54	-55.34	Pass
11.17	6.68	0.66	1.58	8.93	Quasi Max	0	100	111	69.54	-60.61	Pass

Test specification:	Radiated Spurious Emissions		
Mains Power:	3VDC		Result: <input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail
Tested by:	Shuo Zhang		
Test Date:	02/27/2018		
Remarks:	f= 100kHz – 30MHz plot, and loop antenna at 90 degree		

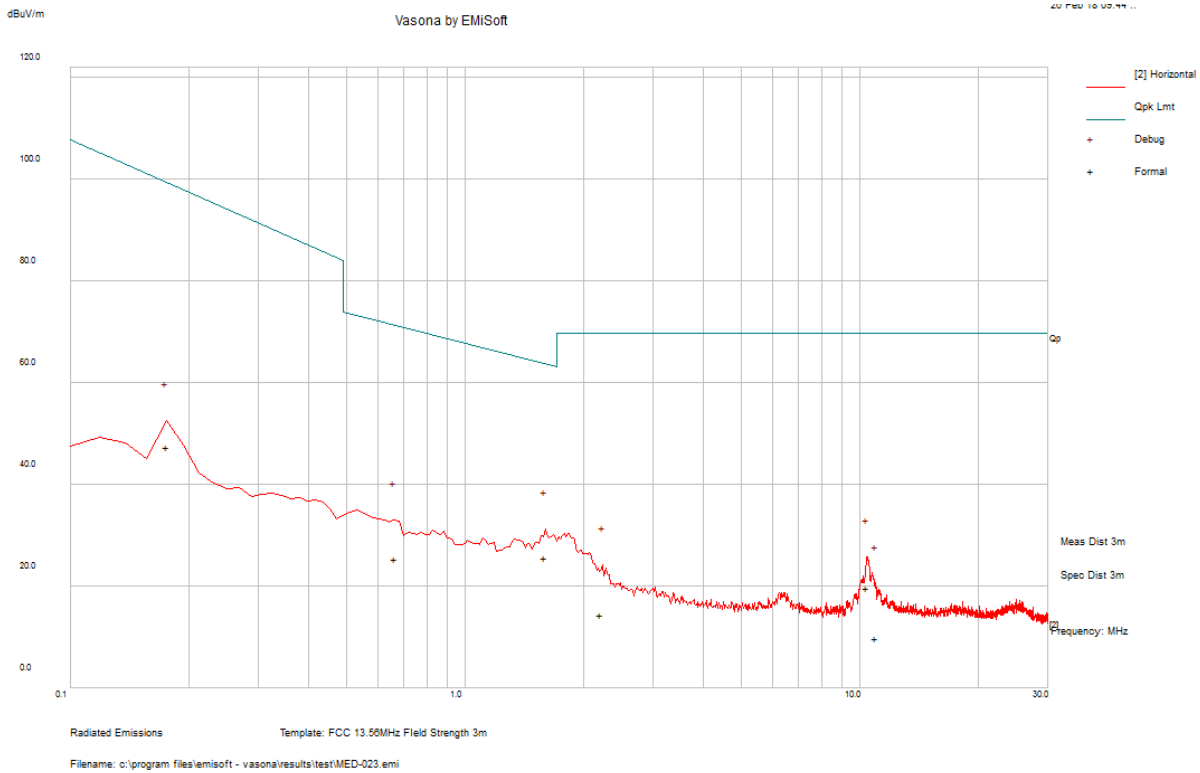

















### Quasi Max Measurement

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol (0/90)	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail
1.59	15.89	0.48	9.25	25.62	Quasi Max	90	100	54	63.57	-37.94	Pass
0.66	8.74	0.4	16.11	25.26	Quasi Max	90	100	53	71.16	-45.9	Pass
10.40	17.49	0.66	1.57	19.72	Quasi Max	90	100	357	69.54	-49.82	Pass
2.21	7.12	0.51	6.77	14.41	Quasi Max	90	100	311	69.54	-55.13	Pass
0.18	19.92	0.28	27.2	47.41	Quasi Max	90	100	226	99.12	-51.71	Pass
10.96	7.41	0.66	1.58	9.66	Quasi Max	90	100	58	69.54	-59.88	Pass








## Annex A. TEST INSTRUMENT & METHOD

Instrument	Model	Serial #	Cal Cycle	Cal Due	In use
<b>SPURIOUS EMISSIONS</b>					
Keysight Signal Analyzer	N9030B	MY57140374	1 Year	05/24/2018	<input checked="" type="checkbox"/>
Loop Antenna	6512	49120	1 Year	08/20/2018	<input checked="" type="checkbox"/>
Pre-Amplifier	8449B	3008A00715	1 Year	02/12/2019	<input checked="" type="checkbox"/>

## Annex B. SIEMIC Accreditation

Accreditations	Document	Scope / Remark
ISO 17025 (A2LA)		Please see the documents for the detailed scope
ISO Guide 65 (A2LA)		Please see the documents for the detailed scope
TCB Designation		A1, A2, A3, A4, B1, B2, B3, B4, C
FCC DoC Accreditation		FCC Declaration of Conformity Accreditation
FCC Site Registration		3 meter site
FCC Site Registration		3 meter site
IC Site Registration		3 meter site
IC Site Registration		3 meter site
EU NB		<b>Radio &amp; Telecommunications Terminal Equipment:</b> EN45001 – EN ISO/IEC 17025
		<b>Electromagnetic Compatibility:</b> EN45001 – EN ISO/IEC 17025
Singapore iDA CB(Certification Body)	 	Phase I, Phase II
Vietnam MIC CAB Accreditation		Please see the document for the detailed scope
Hong Kong OFCA		<b>(Phase II)</b> OFCA Foreign Certification Body for Radio and Telecom
		<b>(Phase I)</b> Conformity Assessment Body for Radio and Telecom
Industry Canada CAB		<b>Radio:</b> Scope A – All Radio Standard Specification in Category I
		<b>Telecom:</b> CS-03 Part I, II, V, VI, VII, VIII



Japan Recognized Certification Body Designation		<p><b>Radio:</b> A1. Terminal equipment for purpose of calling</p> <p><b>Telecom:</b> B1. Specified radio equipment specified in Article 38-2, Paragraph 1, Item 1 of the Radio Law</p>
Korea CAB Accreditation		<p><b>EMI:</b> KCC Notice 2008-39, RRL Notice 2008-3: CA Procedures for EMI KN22: Test Method for EMI</p> <p><b>EMS:</b> KCC Notice 2008-38, RRL Notice 2008-4: CA Procedures for EMS KN24, KN61000-4-2, -4-3, -4-4, -4-5, -4-6, -4-8, -4-11: Test Method for EMS</p>
		<p><b>Radio:</b> RRL Notice 2008-26, RRL Notice 2008-2, RRL Notice 2008-10, RRL Notice 2007-49, RRL Notice 2007-20, RRL Notice 2007-21, RRL Notice 2007-80, RRL Notice 2004-68</p>
		<p><b>Telecom:</b> President Notice 20664, RRL Notice 2007-30, RRL Notice 2008-7 with attachments 1, 3, 5, 6; President Notice 20664, RRL Notice 2008-7 with attachment 4</p>
Taiwan NCC CAB Recognition		LP0002, PSTN01, ADSL01, ID0002, IS6100, CNS14336, PLMN07, PLMN01, PLMN08
Taiwan BSMI CAB Recognition		CNS 13438
Japan VCCI		R-3083: Radiation 3 meter site
		C-3421: Main Ports Conducted Interference Measurement
		T-1597: Telecommunication Ports Conducted Interference Measurement
Australia CAB Recognition		<p><b>EMC:</b> AS/NZS CISPR 11, AS/NZS CISPR 14.1, AS/NZS CISPR22, AS/NZS 61000.6.3, AS/NZS 61000.6.4</p>
		<p><b>Radio communications:</b> AS/NZS 4281, AS/NZS 4268, AS/NZS 4280.1, AS/NZS 4280.2, AS/NZS 4295, AS/NZS 4582, AS/NZS 4583, AS/NZS 4769.1, AS/NZS 4769.2, AS/NZS 4770, AS/NZS 4771</p>
		<p><b>Telecommunications:</b> AS/ACIF S002:05, AS/ACIF S003:06, AS/ACIF S004:06 AS/ACIF S006:01, AS/ACIF S016:01, AS/ACIF S031:01, AS/ACIF S038:01, AS/ACIF S040:01, AS/ACIF S041:05, AS/ACIF S043.2:06, AS/ACIF S60950.1</p>
Australia NATA Recognition		AS/ACIF S002, AS/ACIF S003, AS/ACIF S004, AS/ACIF S006, AS/ACIF S016, AS/ACIF S031, AS/ACIF S038, AS/ACIF S040, AS/ACIF S041, AS/ACIF S043.2