

***RADIATED EMISSIONS***

***DATA SHEETS***

## RADIATED EMISSIONS (FCC SECTION 15.209 AND 15.247)

COMPANY	O'NEIL PRODUCT DEVELOPMENT	DATE	3/4/2004
EUT	BLUETOOTH MODULE	DUTY CYCLE	<10 %
MODEL	BT260146	PEAK TO AVG	20 dB
S/N	N/A	TEST DIST.	3 Meters
TEST ENGINEER	KYLE FUJIMOTO	LAB	A

Frequency MHz	Peak Reading (dBuV)	Average (A) or Quasi- Peak (QP)	Antenna Polar. (V or H)	Antenna Height (meters)	EUT Azimuth (degrees)	EUT Axis (X,Y,Z)	EUT Tx Channel	Antenna Factor (dB)	Cable Loss (dB)	Amplifier Gain (dB)	Distance Factor (dB)	Mixer Factor (dB)	*Corrected Reading (dBuV/m)	Delta ** (dB)	Spec Limit (dBuV/m)	Comments
2402.0000	53.9	A	H	1.0	225	X	LOW	31.5	4.6	0.0	0.0	0.0	90.0			
2402.0000	56.2	A	H	2.0	225	Y	LOW	31.5	4.6	0.0	0.0	0.0	92.3			
2402.0000	57.5	A	H	3.5	180	Z	LOW	31.5	4.6	0.0	0.0	0.0	93.6			
2402.0000	59.1	A	V	1.0	180	X	LOW	31.5	4.6	0.0	0.0	0.0	95.2			
2402.0000	58.7	A	V	1.0	180	Y	LOW	31.5	4.6	0.0	0.0	0.0	94.8			
2402.0000	61.3	A	V	2.0	225	Z	LOW	31.5	4.6	0.0	0.0	0.0	97.4			
2441.0000	56.3	A	H	2.0	225	X	MID	31.5	4.6	0.0	0.0	0.0	92.4			
2441.0000	60.3	A	H	3.0	135	Y	MID	31.5	4.6	0.0	0.0	0.0	96.4			
2441.0000	57.5	A	H	2.0	135	Z	MID	31.5	4.6	0.0	0.0	0.0	93.6			
2441.0000	57.0	A	V	1.5	90	X	MID	31.5	4.6	0.0	0.0	0.0	93.1			
2441.0000	61.4	A	V	1.5	90	Y	MID	31.5	4.6	0.0	0.0	0.0	97.5			
2441.0000	63.4	A	V	3.0	270	Z	MID	31.5	4.6	0.0	0.0	0.0	99.5			
2480.0000	51.3	A	H	3.0	90	X	HIGH	31.6	4.7	0.0	0.0	0.0	87.6			
2480.0000	55.5	A	H	2.0	90	Y	HIGH	31.6	4.7	0.0	0.0	0.0	91.8			
2480.0000	59.8	A	H	2.0	135	Z	HIGH	31.6	4.7	0.0	0.0	0.0	96.1			
2480.0000	51.5	A	V	2.0	225	X	HIGH	31.6	4.7	0.0	0.0	0.0	87.8			
2480.0000	58.4	A	V	2.0	90	Y	HIGH	31.6	4.7	0.0	0.0	0.0	94.7			
2480.0000	58.2	A	V	2.5	225	Z	HIGH	31.6	4.7	0.0	0.0	0.0	94.5			

\* CORRECTED READING = METER READING + ANTENNA FACTOR + CABLE LOSS - AMPLIFIER GAIN  
 \*\* DELTA = SPEC LIMIT - CORRECTED READING

## RADIATED EMISSIONS (FCC SECTION 15.209 AND 15.247)

COMPANY	O'NEIL PRODUCT DEVELOPMENT	DATE	3/4/2004
EUT	BLUETOOTH MODULE	DUTY CYCLE	<10 %
MODEL	BT260146	PEAK TO AVG	20 dB
S/N	N/A	TEST DIST.	3 Meters
TEST ENGINEER	KYLE FUJIMOTO	LAB	A

Frequency MHz	Peak Reading (dBuV)	Average (A) or Quasi- Peak (QP)	Antenna Polar. (V or H)	Antenna Height (meters)	EUT Azimuth (degrees)	EUT Axis (X,Y,Z)	EUT Tx Channel	Antenna Factor (dB)	Cable Loss (dB)	Amplifier Gain (dB)	Distance Factor (dB)	Mixer Factor (dB)	*Corrected Reading (dBuV/m)	Delta ** (dB)	Spec Limit (dBuV/m)	Comments	
4804.0000	38.7	18.7	A	H	2.0	90	X	LOW	35.4	6.9	28.3	0.0	0.0	32.7	-21.3	54.0	The Duty Cycle is less than 10%, however only a maximum of 20 dB below the peak may be used for the Average reading.
4804.0000	41.9	21.9	A	H	3.0	225	Y	LOW	35.4	6.9	28.3	0.0	0.0	35.9	-18.1	54.0	
4804.0000	41.1	21.1	A	H	2.0	225	Z	LOW	35.4	6.9	28.3	0.0	0.0	35.1	-18.9	54.0	
4804.0000	39.0	19.0	A	V	2.0	225	X	LOW	35.4	6.9	28.3	0.0	0.0	33.0	-21.0	54.0	
4804.0000	38.8	18.8	A	V	2.0	225	Y	LOW	35.4	6.9	28.3	0.0	0.0	32.8	-21.2	54.0	
4804.0000	39.5	19.5	A	V	2.0	225	Z	LOW	35.4	6.9	28.3	0.0	0.0	33.5	-20.5	54.0	
4882.0000	34.6	14.6	A	H	1.5	0	X	MID	35.4	7.0	28.3	0.0	0.0	28.7	-25.3	54.0	The Average Readings will reflect this (being 20 dB below the peak)
4882.0000	33.6	16.6	A	H	2.0	180	Y	MID	35.4	7.0	28.3	0.0	0.0	30.7	-23.3	54.0	
4882.0000	33.1	13.1	A	H	2.0	224	Z	MID	35.4	7.0	28.3	0.0	0.0	27.2	-26.8	54.0	
4882.0000	33.2	13.2	A	V	2.0	90	X	MID	35.4	7.0	28.3	0.0	0.0	27.3	-26.7	54.0	
4882.0000	34.0	14.0	A	V	2.0	225	Y	MID	35.4	7.0	28.3	0.0	0.0	28.1	-25.9	54.0	
4882.0000	34.0	14.0	A	V	2.5	270	Z	MID	35.4	7.0	28.3	0.0	0.0	28.1	-25.9	54.0	
4960.0000	36.2	16.2	A	H	2.5	180	X	HIGH	35.5	7.1	28.3	0.0	0.0	30.5	-23.5	54.0	
4960.0000	34.8	14.9	A	H	2.0	0	Y	HIGH	35.5	7.1	28.3	0.0	0.0	29.2	-24.8	54.0	
4960.0000	34.3	14.3	A	H	2.0	0	Z	HIGH	35.5	7.1	28.3	0.0	0.0	28.6	-25.4	54.0	
4960.0000	35.5	15.5	A	V	2.0	150	X	HIGH	35.5	7.1	28.3	0.0	0.0	29.8	-24.2	54.0	
4960.0000	35.7	15.7	A	V	2.0	0	Y	HIGH	35.5	7.1	28.3	0.0	0.0	30.0	-24.0	54.0	
4960.0000	38.0	18.0	A	V	2.0	225	Z	HIGH	35.5	7.1	28.3	0.0	0.0	32.3	-21.7	54.0	

\* CORRECTED READING = METER READING + ANTENNA FACTOR + CABLE LOSS - AMPLIFIER GAIN  
 \*\* DELTA = SPEC LIMIT - CORRECTED READING

## RADIATED EMISSIONS (FCC SECTION 15.209 AND 15.247)

COMPANY	O'NEIL PRODUCT DEVELOPMENT	DATE	3/4/2004
EUT	BLUETOOTH MODULE	DUTY CYCLE	<10 %
MODEL	BT260146	PEAK TO AVG	20 dB
S/N	N/A	TEST DIST.	3 Meters
TEST ENGINEER	KYLE FUJIMOTO	LAB	A

Frequency MHz	Peak Reading (dBuV)	Average (A) or Quasi- Peak (QP)	Antenna Polar. (V or H)	Antenna Height (meters)	EUT Azimuth (degrees)	EUT Axis (X,Y,Z)	EUT Tx Channel	Antenna Factor (dB)	Cable Loss (dB)	Amplifier Gain (dB)	Distance Factor (dB)	Mixer Factor (dB)	*Corrected Reading (dBuV/m)	Delta ** (dB)	Spec Limit (dBuV/m)	Comments	
7206.0000	37.8	17.8	A	H	1.0	90	X	LOW	39.6	7.7	29.7	0.0	0.0	35.4	-18.6	54.0	The Duty Cycle is less than 10%, however only a maximum of 20 dB below the peak may be used for the Average reading.
7206.0000	38.1	18.1	A	H	1.0	225	Y	LOW	39.6	7.7	29.7	0.0	0.0	35.7	-18.3	54.0	
7206.0000	38.3	18.3	A	H	2.0	90	Z	LOW	39.6	7.7	29.7	0.0	0.0	35.9	-18.1	54.0	
7206.0000	38.9	18.9	A	V	2.0	90	X	LOW	39.6	7.7	29.7	0.0	0.0	36.5	-17.5	54.0	
7206.0000	39.2	19.2	A	V	2.0	225	Y	LOW	39.6	7.7	29.7	0.0	0.0	36.8	-17.2	54.0	
7206.0000	39.5	19.5	A	V	2.0	225	Z	LOW	39.6	7.7	29.7	0.0	0.0	37.1	-16.9	54.0	
7323.0000	32.8	12.8	A	H	2.0	225	X	MED.	40.1	8.2	29.7	0.0	0.0	31.4	-22.6	54.0	The Average Readings will reflect this (being 20 dB below the peak)
7323.0000	38.1	18.1	A	H	2.0	225	Y	MED.	40.1	8.2	29.7	0.0	0.0	36.7	-17.3	54.0	
7323.0000	34.3	14.3	A	H	2.0	225	Z	MED.	40.1	8.2	29.7	0.0	0.0	32.9	-21.1	54.0	
7323.0000	38.5	18.5	A	V	2.0	0	X	MED.	40.1	8.2	29.7	0.0	0.0	37.1	-16.9	54.0	No Harmonics nor Emissions
7323.0000	38.9	18.9	A	V	1.0	225	Y	MED.	40.1	8.2	29.7	0.0	0.0	37.5	-16.5	54.0	
7323.0000	34.6	14.6	A	V	2.0	225	Z	MED.	40.1	8.2	29.7	0.0	0.0	33.2	-20.8	54.0	
7440.0000	39.1	19.1	A	H	1.5	180	X	HIGH	40.6	8.9	29.8	0.0	0.0	38.8	-15.2	54.0	Found beyond the 3rd Harmonic
7440.0000	39.2	19.2	A	H	1.0	180	Y	HIGH	40.6	8.9	29.8	0.0	0.0	38.9	-15.1	54.0	
7440.0000	39.3	19.3	A	H	1.0	0	Z	HIGH	40.6	8.9	29.8	0.0	0.0	39.0	-15.0	54.0	
7440.0000	38.7	18.7	A	V	1.0	90	X	HIGH	40.6	8.9	29.8	0.0	0.0	38.4	-15.6	54.0	
7440.0000	38.8	18.8	A	V	1.0	180	Y	HIGH	40.6	8.9	29.8	0.0	0.0	38.5	-15.5	54.0	
7440.0000	38.6	18.6	A	V	1.0	200	Z	HIGH	40.6	8.9	29.8	0.0	0.0	38.3	-15.7	54.0	

\* CORRECTED READING = METER READING + ANTENNA FACTOR + CABLE LOSS - AMPLIFIER GAIN  
 \*\* DELTA = SPEC LIMIT - CORRECTED READING

Test Location : Compatible Electronics Page : 1/2  
 Customer : O' Neil Product Development Date : 3/01/2004  
 Manufacturer : O' Neil Product Development Time : 9:12:39  
 Eut name : Bluetooth Module Lab : A  
 Model : BT260146 Test Distance : 3.0 Meters  
 Serial # : N/A  
 Specification : FCC Class B  
 Distance correction factor (20 \* log(test/spec)) : 0.00  
 Test Mode : Spurious Emissions 10 kHz - 25000 MHz  
 Vertical and Horizontal Polarization  
 Temperature 67 Degrees F., Relative Humidity 74%  
 Tested By: Kyle Fujimoto

Pol	Freq MHz	Rdng dBuV	Cable loss dB	Ant factor dB	Amp gain dB	Cor'd rdg = R dBuV	Li mi t = L dBuV/m	Delta R-L dB
1V	39.180	46.80	1.09	10.23	33.60	24.52	40.00	-15.48
2V	52.640	46.50	1.23	10.82	33.60	24.95	40.00	-15.05
3V	65.020	44.90	1.35	8.45	33.55	21.16	40.00	-18.84
4V	77.793	45.50	1.48	6.37	33.50	19.85	40.00	-20.15
5V	104.040	43.30	1.64	11.22	33.60	22.55	43.50	-20.95
6V	156.230	37.90	2.13	11.28	33.43	17.88	43.50	-25.62
7V	207.970	34.80	2.53	16.65	33.37	20.62	43.50	-22.88
8V	260.040	35.60	2.74	16.66	33.24	21.76	46.00	-24.24
9V	286.083	37.30	2.85	20.26	33.30	27.10	46.00	-18.90
10V	312.263	35.90	2.98	13.11	33.30	18.69	46.00	-27.31
11V	389.963	34.50	3.44	14.27	33.14	19.07	46.00	-26.93
12V	416.203	35.10	3.57	14.93	33.07	20.53	46.00	-25.47
13V	442.153	35.00	3.67	15.75	33.01	21.40	46.00	-24.60
14V	468.003	32.60	3.77	16.51	32.96	19.92	46.00	-26.08
15V	494.253	34.80	3.88	17.24	32.91	23.01	46.00	-22.99
16V	520.160	42.30	3.98	17.73	32.94	31.07	46.00	-14.93
17V	546.210	31.40	4.09	18.13	32.99	20.62	46.00	-25.38
18V	572.013	40.20	4.15	18.51	32.91	29.94	46.00	-16.06
19V	598.191	44.20	4.20	18.88	32.81	34.46	46.00	-11.54
20V	624.031	33.20	4.40	19.08	32.70	23.97	46.00	-22.03
21V	650.191	31.60	4.60	19.26	32.60	22.86	46.00	-23.14
22V	676.255	42.60	4.60	19.44	32.65	33.99	46.00	-12.01
23V	702.241	33.30	4.61	19.65	32.69	24.88	46.00	-21.12
24V	728.201	34.80	4.71	20.25	32.53	27.24	46.00	-18.76
25H	39.191	34.10	1.09	10.23	33.60	11.82	40.00	-28.18
26H	52.651	39.30	1.23	10.82	33.60	17.75	40.00	-22.25
27H	65.031	38.50	1.35	8.45	33.55	14.76	40.00	-25.24
28H	77.804	46.00	1.48	6.37	33.50	20.35	40.00	-19.65
29H	104.051	45.50	1.64	11.22	33.60	24.75	43.50	-18.75
30H	156.241	37.50	2.13	11.28	33.43	17.48	43.50	-26.02
31H	207.981	33.10	2.53	16.65	33.37	18.92	43.50	-24.58
32H	260.051	36.60	2.74	16.66	33.24	22.76	46.00	-23.24
33H	286.122	43.30	2.85	20.26	33.30	33.11	46.00	-12.89
34H	312.302	35.00	2.98	13.11	33.30	17.79	46.00	-28.21
35H	390.002	33.50	3.44	14.27	33.14	18.07	46.00	-27.93

Test Location : Compatible Electronics Page : 2/2  
 Customer : O' Neil Product Development Date : 3/01/2004  
 Manufacturer : O' Neil Product Development Time : 9:12:39  
 Eut name : Bluetooth Module Lab : A  
 Model : BT260146 Test Distance : 3.0 Meters  
 Serial # : N/A  
 Specification : FCC Class B  
 Distance correction factor ( $20 * \log(\text{test}/\text{spec})$ ) : 0.00  
 Test Mode : Spurious Emissions 10 kHz - 25000 MHz  
 Vertical and Horizontal Polarization  
 Temperature 67 Degrees F., Relative Humidity 74%  
 Tested By: Kyle Fujimoto

Pol	Freq MHz	Rdng dBuV	Cable loss dB	Ant factor dB	Amp gain dB	Cor' d rdg = R dBuV	Li mi t = L dBuV/m	Del ta R-L dB
36H	416.242	33.20	3.57	14.94	33.07	18.64	46.00	-27.36
37H	442.192	32.70	3.67	15.75	33.01	19.10	46.00	-26.90
38H	468.042	33.10	3.77	16.51	32.96	20.42	46.00	-25.58
39H	494.292	35.00	3.88	17.25	32.91	23.21	46.00	-22.79
40H	520.090	33.50	3.98	17.72	32.94	22.27	46.00	-23.73
41H	546.140	35.20	4.09	18.13	32.99	24.42	46.00	-21.58
42H	571.932	42.50	4.14	18.51	32.91	32.24	46.00	-13.76
43H	598.190	44.30	4.20	18.88	32.81	34.56	46.00	-11.44
44H	624.040	41.70	4.40	19.08	32.70	32.47	46.00	-13.53
45H	650.190	32.10	4.60	19.26	32.60	23.36	46.00	-22.64
46H	676.240	42.00	4.60	19.44	32.65	33.39	46.00	-12.61
47H	702.240	34.30	4.61	19.65	32.69	25.88	46.00	-20.12
48H	728.200	33.90	4.71	20.25	32.53	26.34	46.00	-19.66

***CONDUCTED EMISSIONS***

***DATA SHEETS***




EMISSION LEVEL [dBuV] PEAK  
Graph for Peak & Average

3/01/2004 10:59:36



COMPATIBLE  
ELECTRONICS

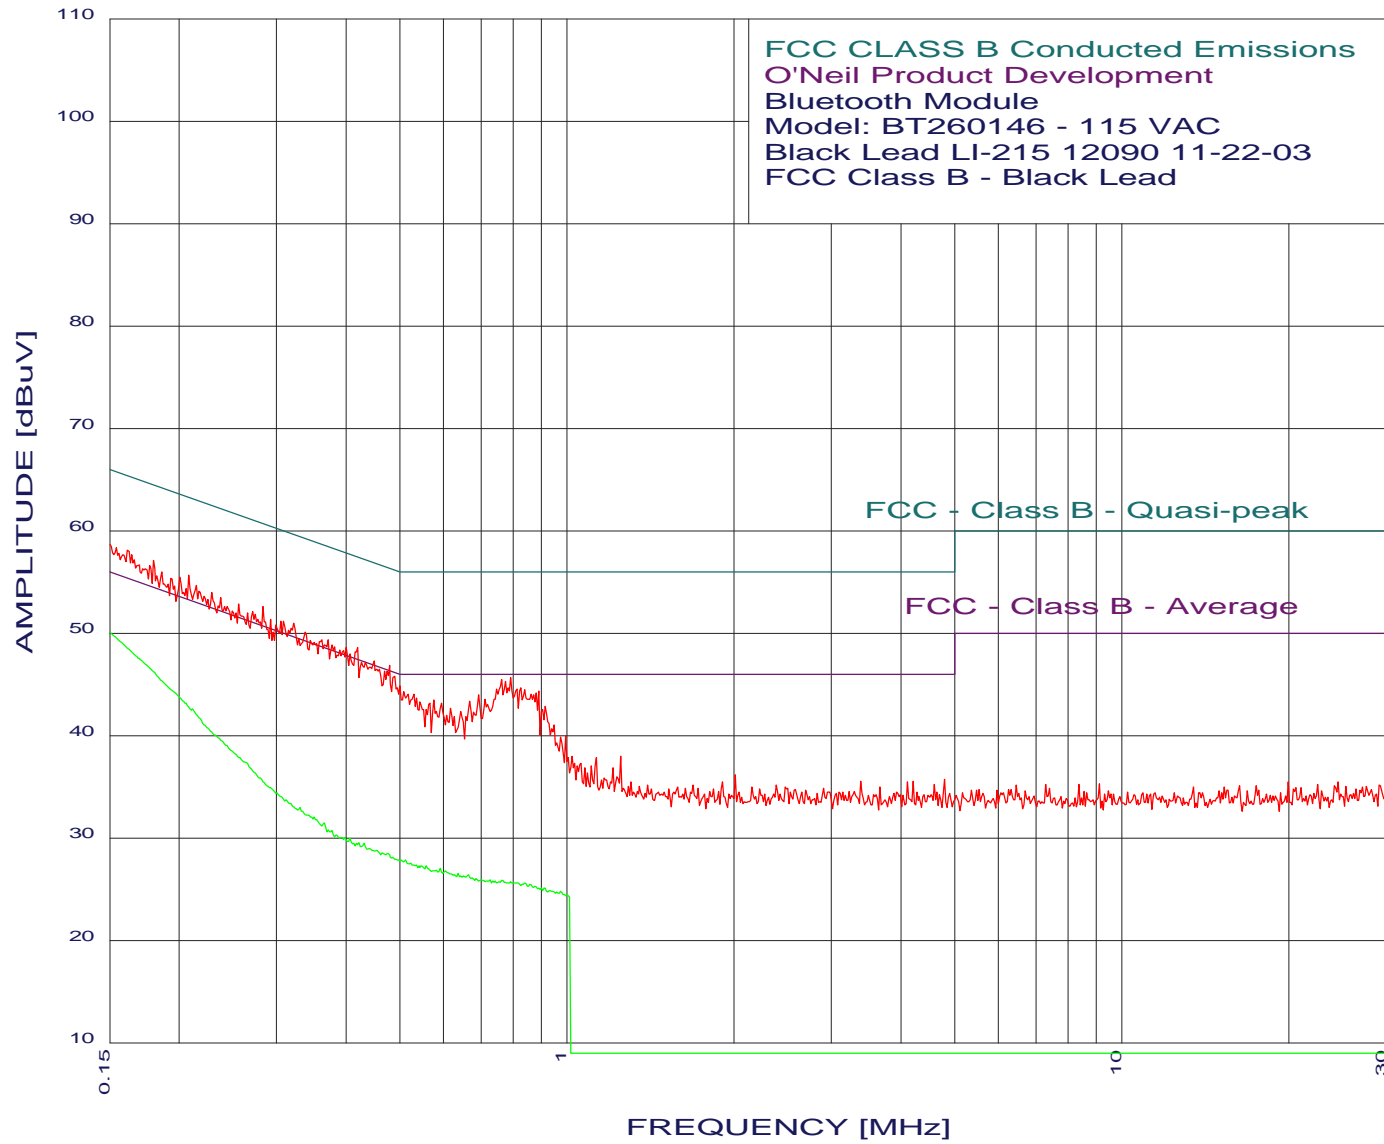



O'Neil Product Development  
Bluetooth Module  
Model: BT260146 - 115 VAC  
FCC Class B - Black Lead  
TEST ENGINEER : Kyle Fujimoto

-----  
42 highest peaks above -50.00 dB of FCC - Class B - Average limit line  
Peak criteria : 1.00 dB, Curve : Peak

Peak#	Freq(MHz)	Amp(dBuV)	limit(dB)	Delta(dB)
1	0.162	58.07	55.38	2.69*
2	0.150	58.67	56.00	2.67*
3	0.180	57.07	54.50	2.57*
4	0.208	55.67	53.27	2.40*
5	0.177	56.57	54.63	1.94*
6	0.201	55.47	53.58	1.89*
7	0.283	52.57	50.72	1.85*
8	0.186	55.97	54.19	1.77*
9	0.215	54.67	53.00	1.66*
10	0.229	53.97	52.48	1.49*
11	0.194	55.37	53.88	1.48*
12	0.256	52.87	51.55	1.31*
13	0.322	50.96	49.66	1.30*
14	0.238	53.47	52.17	1.30*
15	0.309	51.17	50.01	1.15*
16	0.419	48.56	47.46	1.10*
17	0.305	51.17	50.10	1.07*
18	0.272	52.07	51.07	1.00*
19	0.293	51.37	50.45	0.91*
20	0.338	50.06	49.26	0.80*
21	0.266	51.97	51.24	0.72*
22	0.362	49.36	48.69	0.67*
23	0.377	48.86	48.34	0.53*
24	0.479	46.86	46.36	0.50*
25	0.449	47.26	46.89	0.37*
26	0.406	47.96	47.72	0.24*
27	0.792	45.66	46.00	-0.34*
28	0.489	45.76	46.18	-0.42*
29	0.763	45.46	46.00	-0.54*
30	0.775	45.26	46.00	-0.74*
31	0.826	44.66	46.00	-1.34*
32	0.890	44.36	46.00	-1.64*
33	0.694	43.96	46.00	-2.04*
34	0.713	43.56	46.00	-2.44*
35	0.577	43.46	46.00	-2.54*
36	0.669	43.36	46.00	-2.64*
37	0.567	43.16	46.00	-2.84*
38	0.595	43.16	46.00	-2.84*
39	0.914	42.86	46.00	-3.14*
40	0.618	42.66	46.00	-3.34*
41	0.904	42.56	46.00	-3.44*
42	0.644	42.36	46.00	-3.64*

-----  
\* Please See the Average Readings on the Next Page and on the Plot



O'Neil Product Development  
Bluetooth Module  
Model: BT260146 - 115 VAC  
FCC Class B - Black Lead  
TEST ENGINEER : Kyle Fujimoto


-----  
40 highest peaks above -50.00 dB of FCC - Class B - Average limit line  
Peak criteria : 0.10 dB, Curve : Average

Peak#	Freq(MHz)	Amp(dBuV)	limit(dB)	Delta(dB)
1	0.150	50.11	56.00	-5.89
2	0.212	42.61	53.14	-10.53
3	0.331	32.94	49.44	-16.49
4	0.350	32.02	48.95	-16.93
5	0.365	31.47	48.61	-17.13
6	0.377	30.69	48.34	-17.64
7	0.371	30.75	48.47	-17.72
8	0.406	29.98	47.72	-17.74
9	0.431	29.47	47.24	-17.77
10	0.398	30.05	47.90	-17.85
11	0.421	29.51	47.42	-17.91
12	0.383	30.29	48.21	-17.91
13	0.474	28.48	46.45	-17.97
14	0.417	29.47	47.50	-18.03
15	0.464	28.52	46.62	-18.10
16	0.502	27.87	46.00	-18.13
17	0.513	27.83	46.00	-18.17
18	0.558	27.31	46.00	-18.69
19	0.541	27.26	46.00	-18.74
20	0.547	27.26	46.00	-18.74
21	0.592	27.02	46.00	-18.98
22	0.605	26.77	46.00	-19.23
23	0.637	26.56	46.00	-19.44
24	0.665	26.40	46.00	-19.60
25	0.651	26.30	46.00	-19.70
26	0.686	26.02	46.00	-19.98
27	0.701	25.91	46.00	-20.09
28	0.728	25.91	46.00	-20.09
29	0.763	25.85	46.00	-20.15
30	0.735	25.80	46.00	-20.20
31	0.743	25.80	46.00	-20.20
32	0.792	25.74	46.00	-20.26
33	0.839	25.57	46.00	-20.43
34	0.858	25.45	46.00	-20.55
35	0.876	25.27	46.00	-20.73
36	0.899	25.08	46.00	-20.92
37	0.909	25.08	46.00	-20.92
38	0.929	24.83	46.00	-21.17
39	0.974	24.77	46.00	-21.23
40	0.958	24.70	46.00	-21.30

-----

EMISSION LEVEL [dBuV] PEAK  
Graph for Peak & Average

3/01/2004 11:24:22

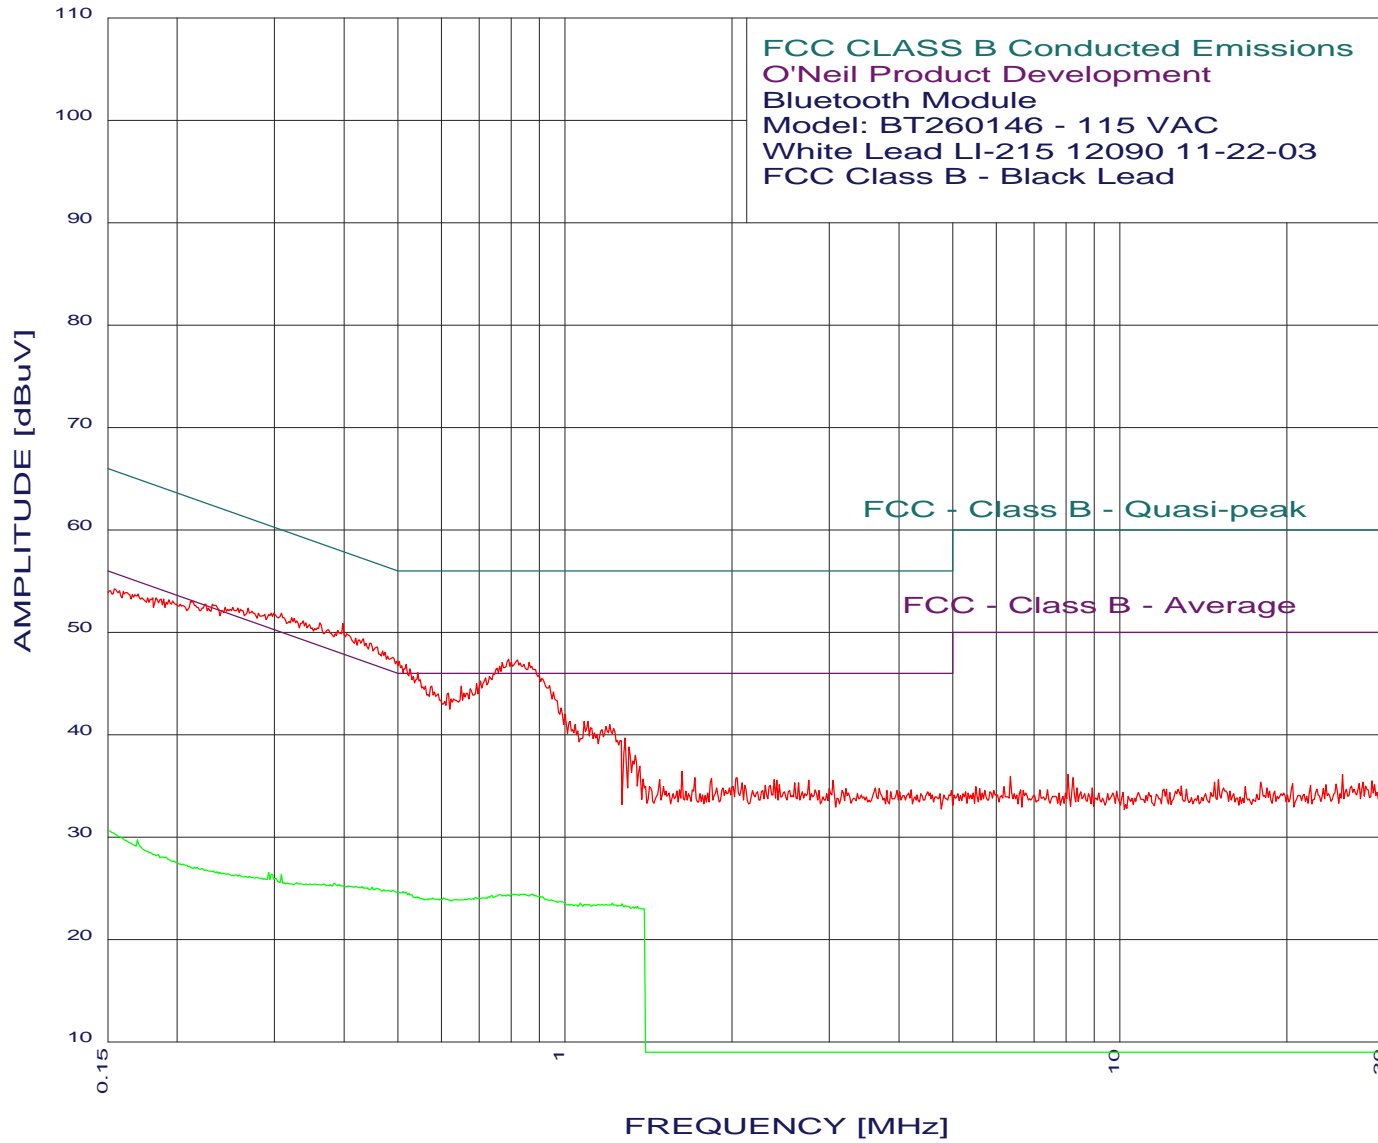

COMPATIBLE  
ELECTRONICS



O'Neil Product Development  
 Bluetooth Module  
 Model: BT260146 - 115 VAC  
 FCC Class B - Black Lead  
 TEST ENGINEER : Kyle Fujimoto

-----  
 42 highest peaks above -50.00 dB of FCC - Class B - Average limit line

Peak criteria : 1.00 dB, Curve : Peak

Peak#	Freq(MHz)	Amp(dBuV)	limit(dB)	Delta(dB)
1	0.398	50.83	47.90	2.93*
2	0.792	47.35	46.00	1.35*
3	0.544	46.04	46.00	0.04*
4	0.651	44.74	46.00	-1.26*
5	0.577	44.74	46.00	-1.26*
6	0.618	44.04	46.00	-1.96*
7	0.150	53.85	56.00	-2.15*
8	1.000	41.97	46.00	-4.03*
9	1.100	41.27	46.00	-4.73*
10	1.021	41.27	46.00	-4.73*
11	1.204	40.97	46.00	-5.03*
12	1.283	39.68	46.00	-6.32*
13	1.304	38.78	46.00	-7.22*
14	1.338	37.98	46.00	-8.02*
15	1.367	36.88	46.00	-9.12*
16	1.629	36.39	46.00	-9.61*
17	2.044	35.81	46.00	-10.19*
18	1.717	35.80	46.00	-10.20*
19	1.840	35.70	46.00	-10.30*
20	1.382	35.68	46.00	-10.32*
21	2.384	35.60	46.00	-10.40*
22	1.480	35.59	46.00	-10.41*
23	2.410	35.50	46.00	-10.50*
24	2.751	35.50	46.00	-10.50*
25	3.043	35.50	46.00	-10.50*
26	2.089	35.31	46.00	-10.69*
27	2.596	35.30	46.00	-10.70*
28	2.637	35.30	46.00	-10.70*
29	2.436	35.10	46.00	-10.90*
30	2.111	35.01	46.00	-10.99*
31	2.298	35.00	46.00	-11.00*
32	2.002	34.91	46.00	-11.09*
33	1.504	34.89	46.00	-11.11*
34	1.419	34.88	46.00	-11.12*
35	1.879	34.81	46.00	-11.19*
36	3.624	34.80	46.00	-11.20*
37	3.209	34.70	46.00	-11.30*
38	4.204	34.60	46.00	-11.40*
39	3.158	34.50	46.00	-11.50*
40	3.800	34.50	46.00	-11.50*
41	4.980	34.50	46.00	-11.50*
42	1.594	34.49	46.00	-11.51*

-----  
 \* Please See the Average Readings on the Next Page and on the Plot



O'Neil Product Development  
Bluetooth Module  
Model: BT260146 - 115 VAC  
FCC Class B - Black Lead  
TEST ENGINEER : Kyle Fujimoto

-----  
41 highest peaks above -50.00 dB of FCC - Class B - Average limit line  
Peak criteria : 0.10 dB, Curve : Average

Peak#	Freq(MHz)	Amp(dBuV)	limit(dB)	Delta(dB)
1	0.510	24.64	46.00	-21.36
2	0.489	24.76	46.18	-21.42
3	0.524	24.44	46.00	-21.56
4	0.876	24.41	46.00	-21.59
5	0.849	24.41	46.00	-21.59
6	0.814	24.40	46.00	-21.60
7	0.471	24.83	46.49	-21.66
8	0.788	24.33	46.00	-21.67
9	0.767	24.33	46.00	-21.67
10	0.739	24.26	46.00	-21.74
11	0.459	24.95	46.71	-21.76
12	0.449	25.08	46.89	-21.81
13	0.541	24.18	46.00	-21.82
14	0.690	24.11	46.00	-21.89
15	0.605	24.05	46.00	-21.95
16	0.580	24.05	46.00	-21.95
17	0.431	25.14	47.24	-22.10
18	1.217	23.52	46.00	-22.48
19	1.066	23.51	46.00	-22.49
20	0.406	25.20	47.72	-22.53
21	1.269	23.44	46.00	-22.56
22	1.106	23.43	46.00	-22.57
23	1.283	23.29	46.00	-22.71
24	0.391	25.32	48.03	-22.72
25	0.383	25.49	48.21	-22.72
26	1.352	23.22	46.00	-22.78
27	0.377	25.31	48.34	-23.02
28	0.367	25.43	48.56	-23.13
29	0.354	25.43	48.87	-23.43
30	0.309	26.32	50.01	-23.69
31	0.293	26.53	50.45	-23.92
32	0.329	25.54	49.48	-23.94
33	0.297	26.37	50.32	-23.95
34	0.300	25.99	50.23	-24.24
35	0.279	26.05	50.85	-24.80
36	0.270	26.16	51.11	-24.95
37	0.259	26.26	51.47	-25.21
38	0.170	29.74	54.98	-25.24
39	0.150	30.68	56.00	-25.32
40	0.247	26.42	51.86	-25.44
41	0.239	26.53	52.12	-25.60


-----

***-20 dB BANDWIDTH***

***DATA SHEETS***



Ref Lvl	11.1 dBm	Marker 1 [T2 ndB]	ndB	20.00 dB	RBW	50 kHz	RF Att	40 dB
			BW	797.59519038 kHz	VBW	50 kHz	SWT	5 ms
					Unit			dBm

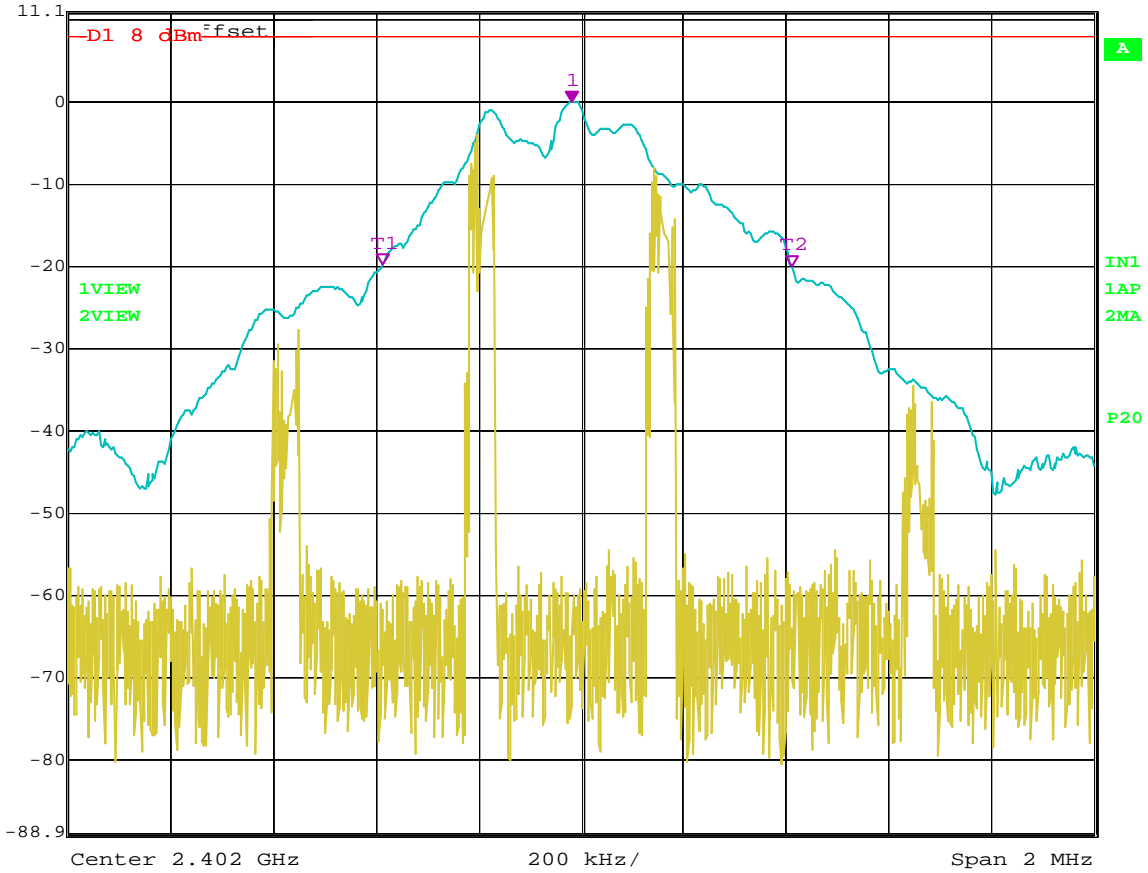


Date: 3.MAR.2004 00:45:44

-20 dB Bandwidth – Low Channel





Ref Lvl	11.1 dBm	Marker 1 [T2 ndB]	ndB	20.00 dB	RBW	50 kHz	RF Att	40 dB
			BW	809.61923848 kHz	VBW	50 kHz	Unit	dBm
					SWT	5 ms		

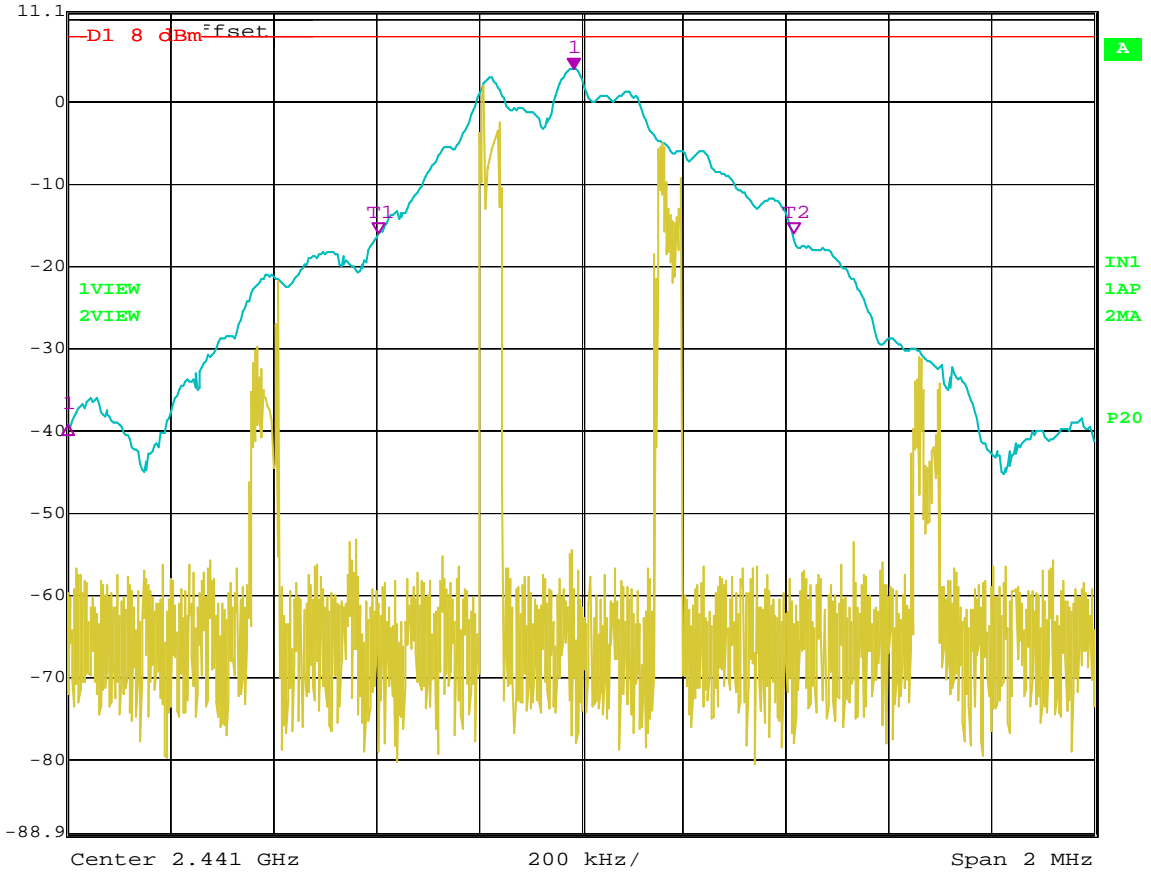


Date: 3.MAR.2004 00:48:46

-20 dB Bandwidth – Middle Channel



Ref Lvl 11.1 dBm  
Marker 1 [T2 ndB] 20.00 dB  
RBW 50 kHz RF Att 40 dB  
BW 785.57114228 kHz  
VBW 50 kHz  
SWT 5 ms Unit dBm

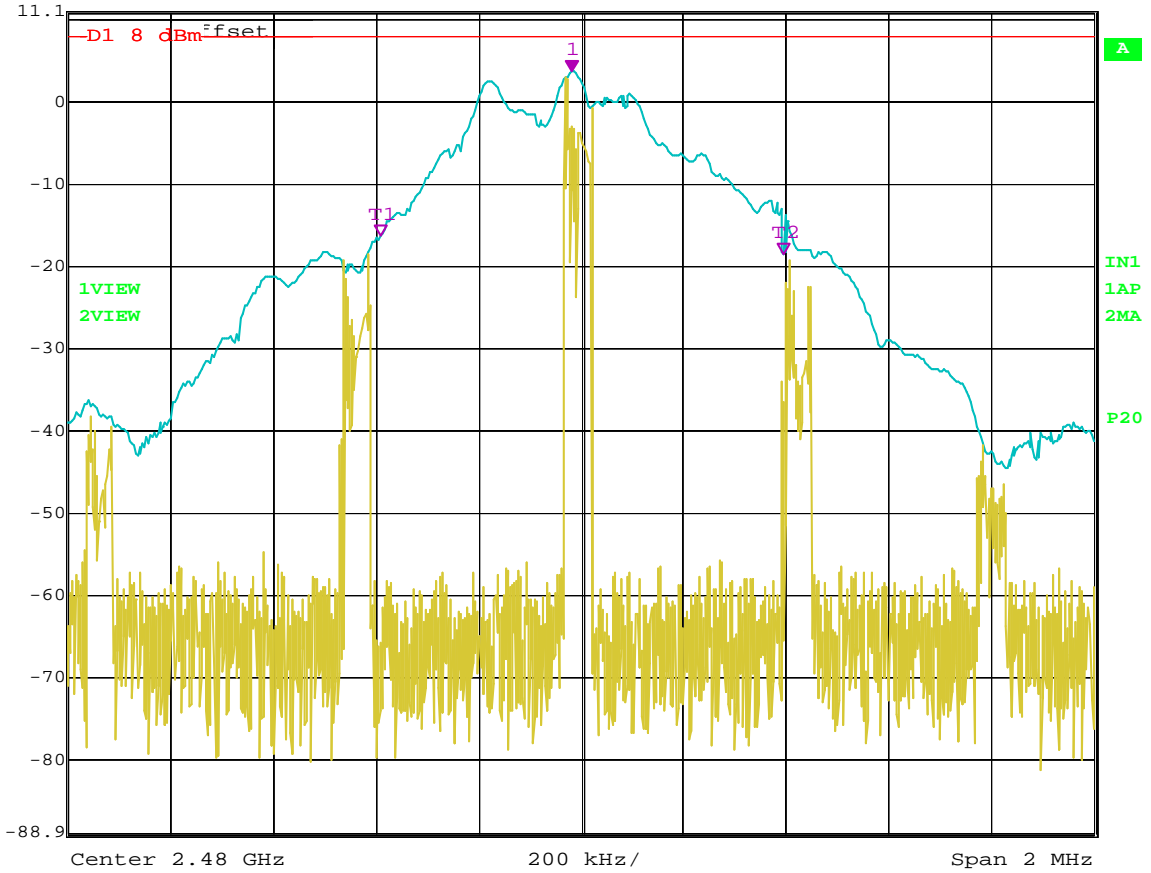

Date: 3.MAR.2004 00:50:17

-20 dB Bandwidth – High Channel

***PEAK POWER OUTPUT***

***DATA SHEETS***

**PEAK OUTPUT POWER**  
**O' NEIL PRODUCT DEVELOPMENT**  
**BLUETOOTH MODULE**  
**MODEL: BT260146**


<b>CHANNEL</b>	<b>PEAK POWER OUTPUT (dBm)</b>
LOW (2402 MHz)	1.7 dBm
MIDDLE (2441 MHz)	3.0 dBm
HIGH (2480 MHz)	1.5 dBm

***RF CONDUCTED ANTENNA TEST***

***DATA SHEETS***



Marker 1 [T1] RBW 100 kHz RF Att 40 dB  
Ref Lvl -38.76 dBm VBW 300 kHz  
11.1 dBm 1.97597595 GHz SWT 700 ms Unit dBm

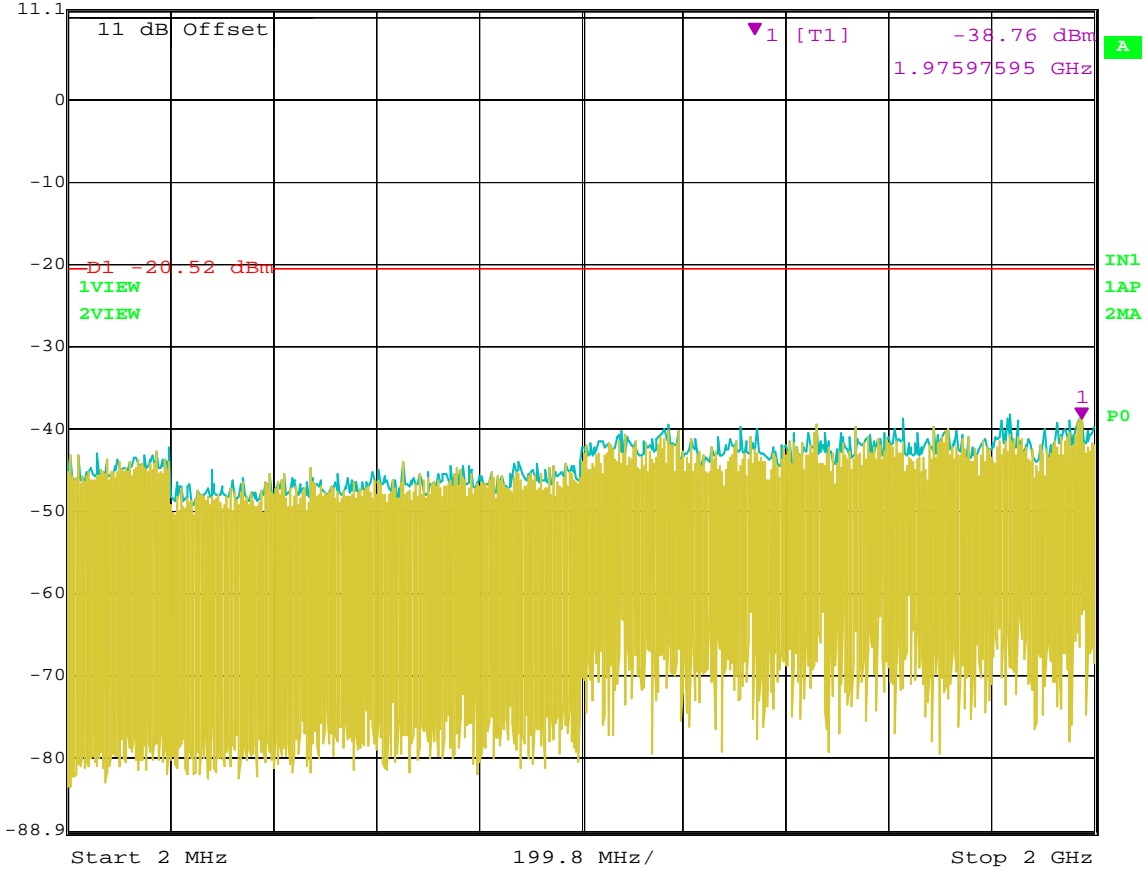


Date: 2.MAR.2004 23:20:39

RF Antenna Conducted – Low Channel – 2 MHz to 2 GHz



Ref Lvl 11.1 dBm  
Marker 1 [T1] -0.52 dBm  
RBW 100 kHz RF Att 40 dB  
VBW 300 kHz  
SWT 250 ms Unit dBm

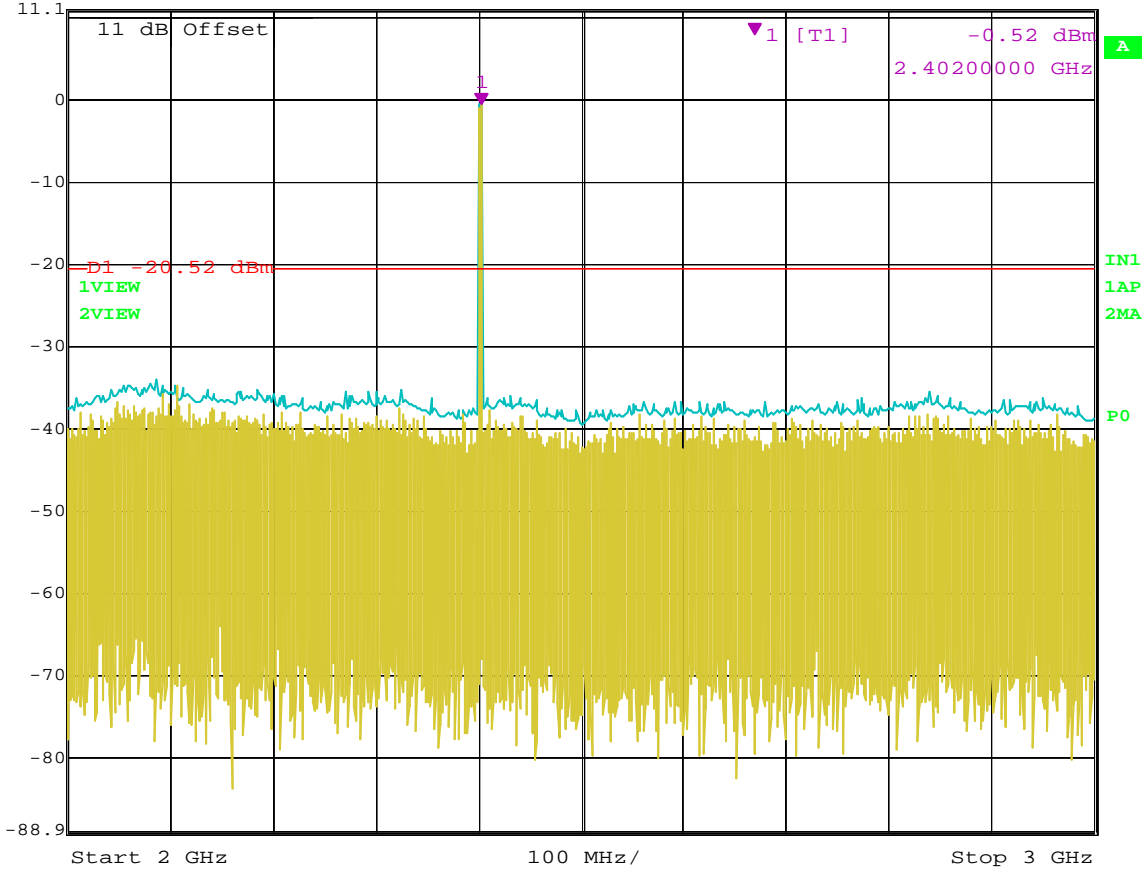


Date: 2.MAR.2004 23:19:57

### RF Antenna Conducted Test – Low Channel – 2 GHz to 3 GHz



Ref Lvl 11.1 dBm  
Marker 1 [T1] -30.51 dBm  
RBW 100 kHz RF Att 40 dB  
VBW 300 kHz  
SWT 1.75 s Unit dBm

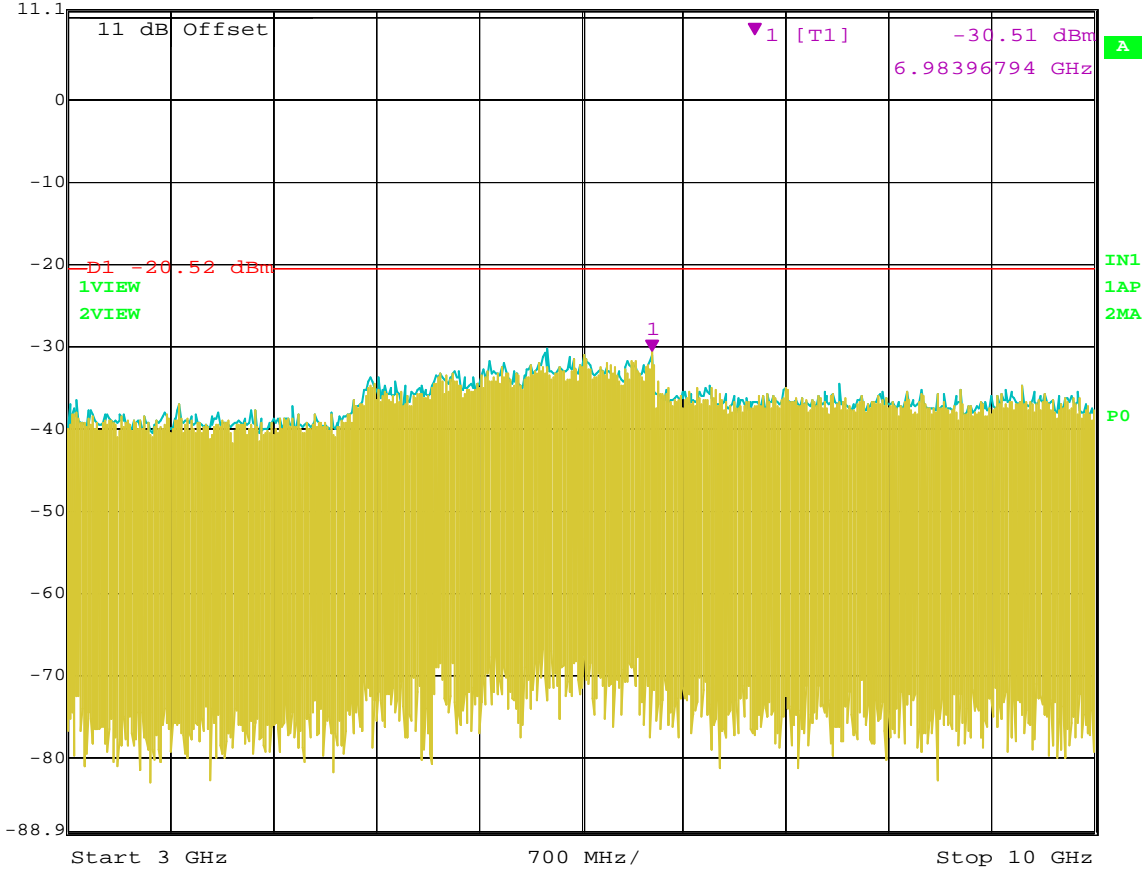


Date: 2.MAR.2004 23:21:32

### RF Antenna Conducted Test – Low Channel – 3 GHz to 10 GHz





Ref Lvl 11.1 dBm  
Marker 1 [T1] -32.95 dBm  
21.90380762 GHz  
RBW 100 kHz RF Att 40 dB  
VBW 300 kHz  
SWT 3.8 s Unit dBm

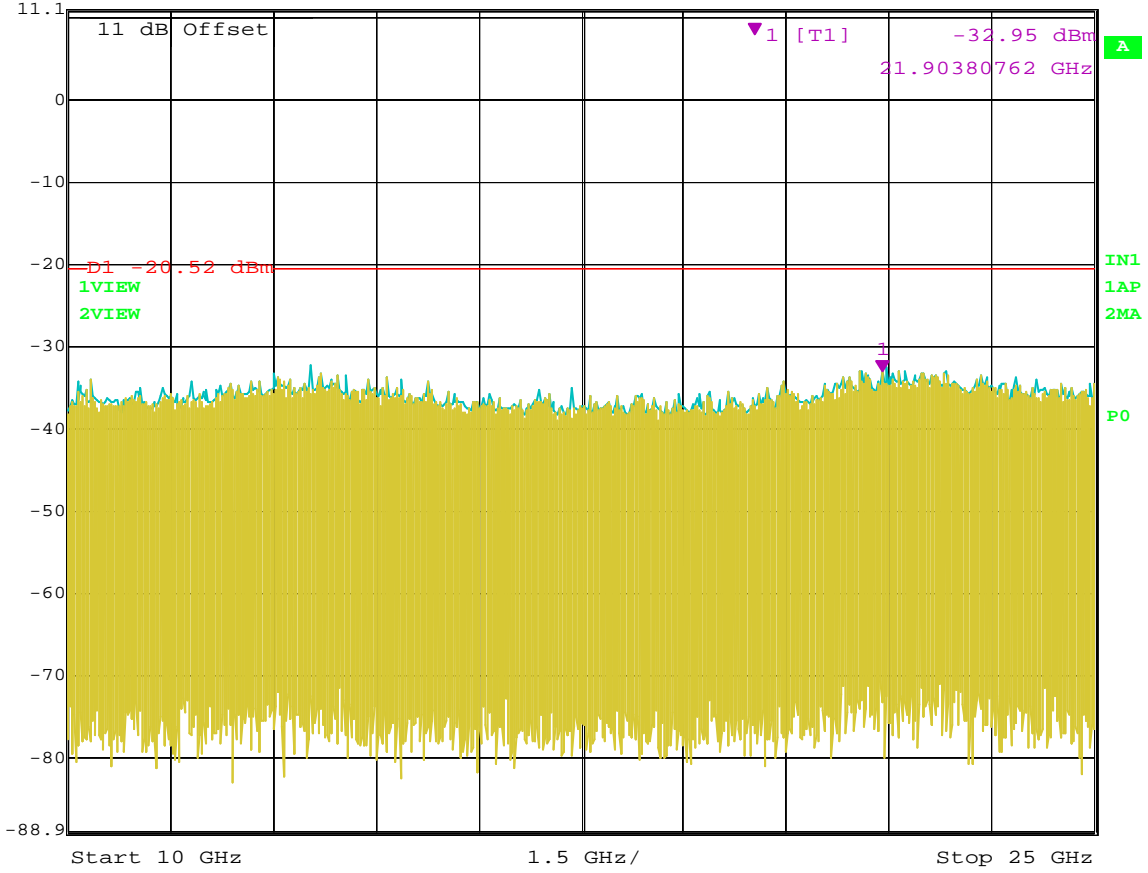


Date: 2.MAR.2004 23:22:18

RF Antenna Conducted Test – Low Channel – 10 GHz to 25 GHz



Ref Lvl 11.1 dBm  
Marker 1 [T1] -38.89 dBm  
RBW 100 kHz RF Att 40 dB  
VBW 300 kHz  
SWT 700 ms Unit dBm

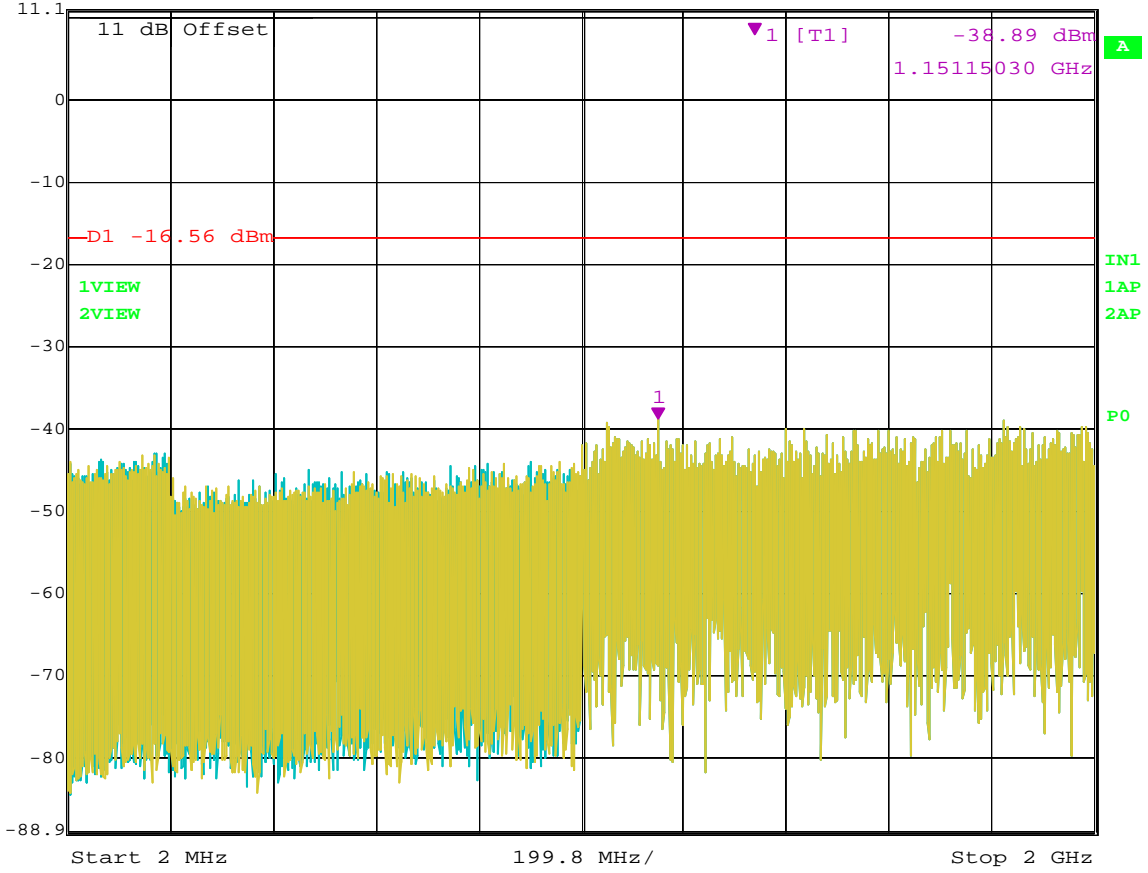


Date: 2.MAR.2004 23:24:17

### RF Antenna Conducted Test – Middle Channel – 2 MHz to 2 GHz



Ref Lvl 11.1 dBm  
Marker 1 [T1] 3.44 dBm  
2.44100000 GHz  
RBW 100 kHz RF Att 40 dB  
VBW 300 kHz  
SWT 250 ms Unit dBm

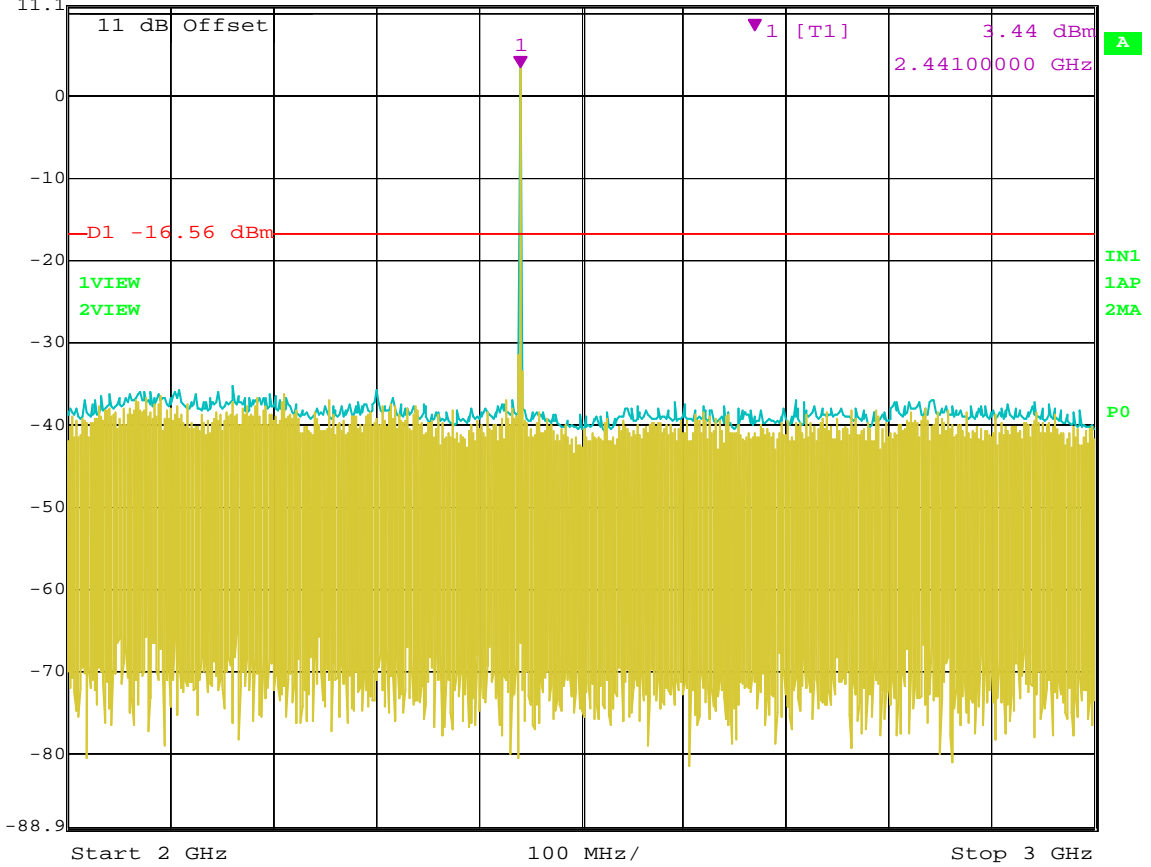


Date: 2.MAR.2004 23:23:35

### RF Antenna Conducted Test – Middle Channel – 2 GHz to 3 GHz



Ref Lvl 11.1 dBm  
Marker 1 [T2] -28.39 dBm  
6.87174349 GHz  
RBW 100 kHz RF Att 40 dB  
VBW 300 kHz  
SWT 1.75 s Unit dBm

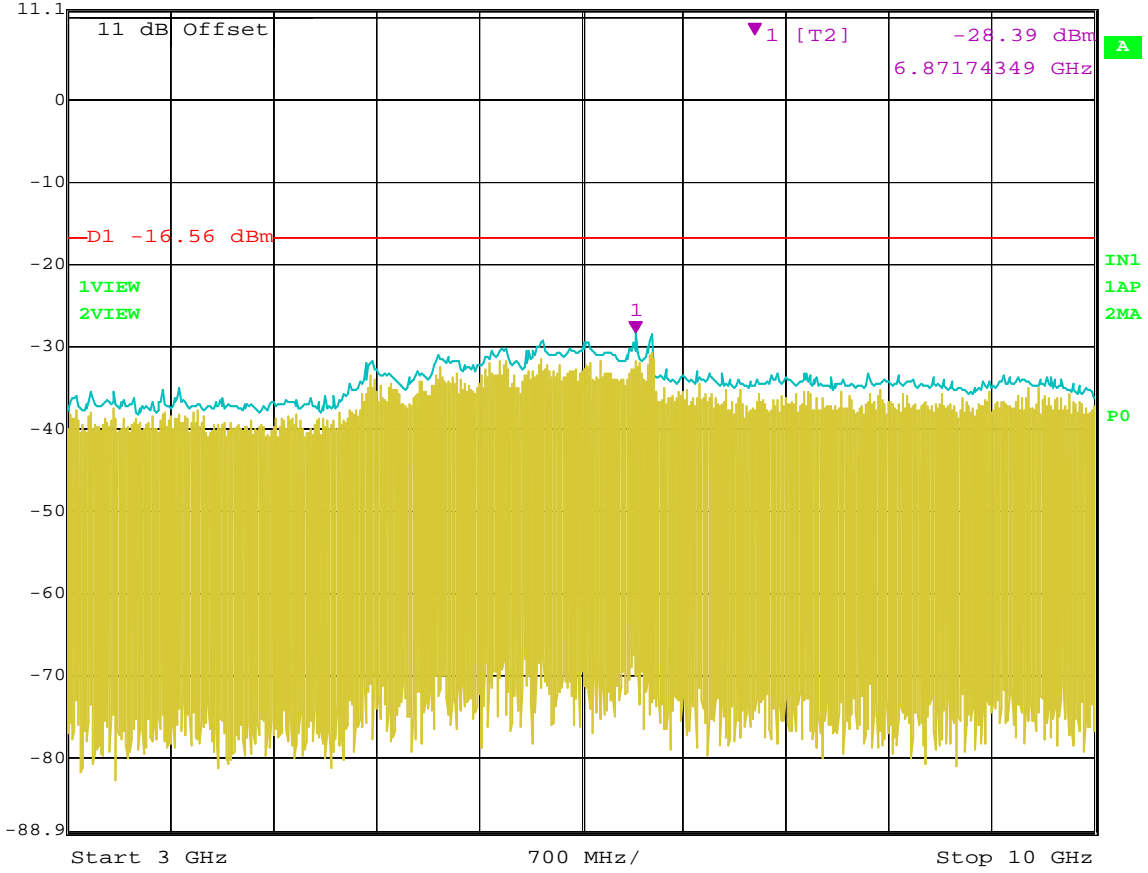


Date: 2.MAR.2004 23:38:55

RF Antenna Conducted Test – Middle Channel – 3 GHz to 10 GHz



Ref Lvl 11.1 dBm  
Marker 1 [T2] -32.72 dBm  
22.7755110 GHz  
RBW 100 kHz RF Att 40 dB  
VBW 300 kHz  
SWT 3.8 s Unit dBm

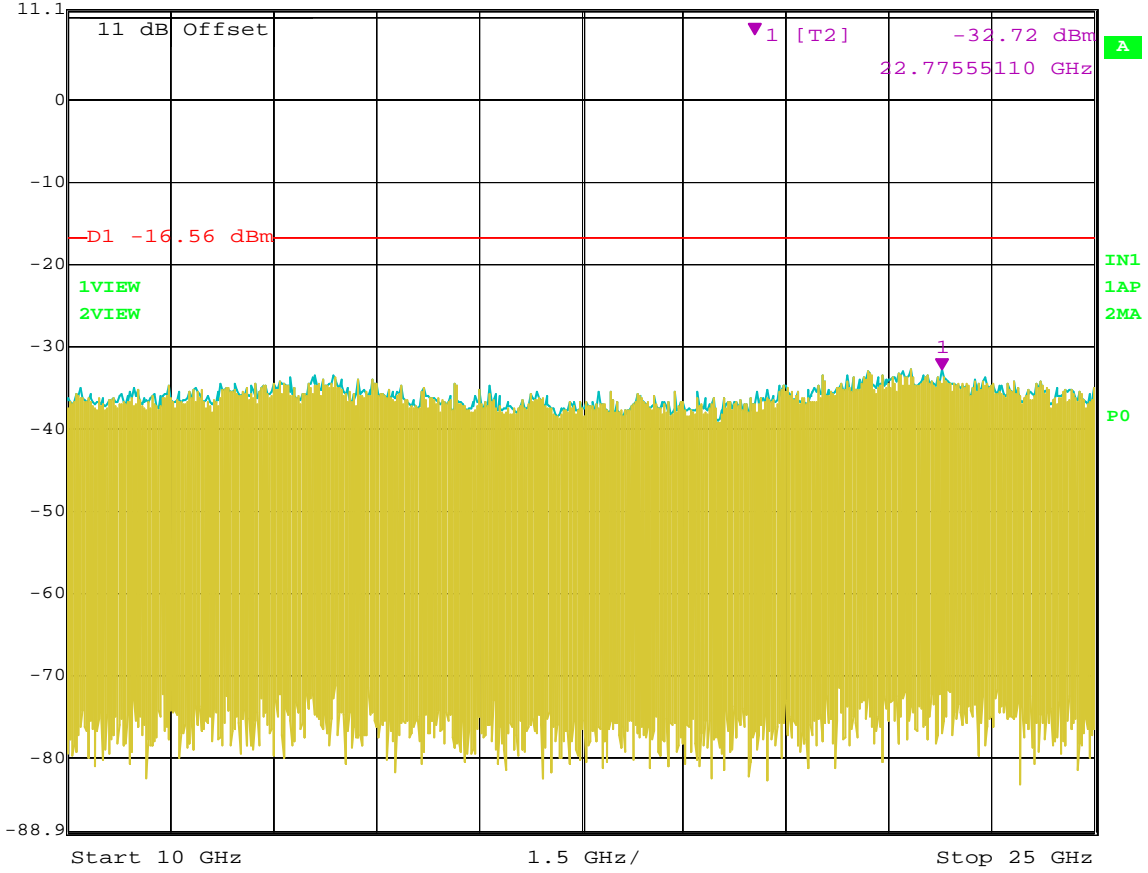


Date: 2.MAR.2004 23:39:40

### RF Antenna Conducted Test – Middle Channel – 10 GHz to 25 GHz



Ref Lvl 11.1 dBm  
Marker 1 [T2] -38.31 dBm  
1.72372345 GHz  
RBW 100 kHz RF Att 40 dB  
VBW 300 kHz  
SWT 700 ms Unit dBm

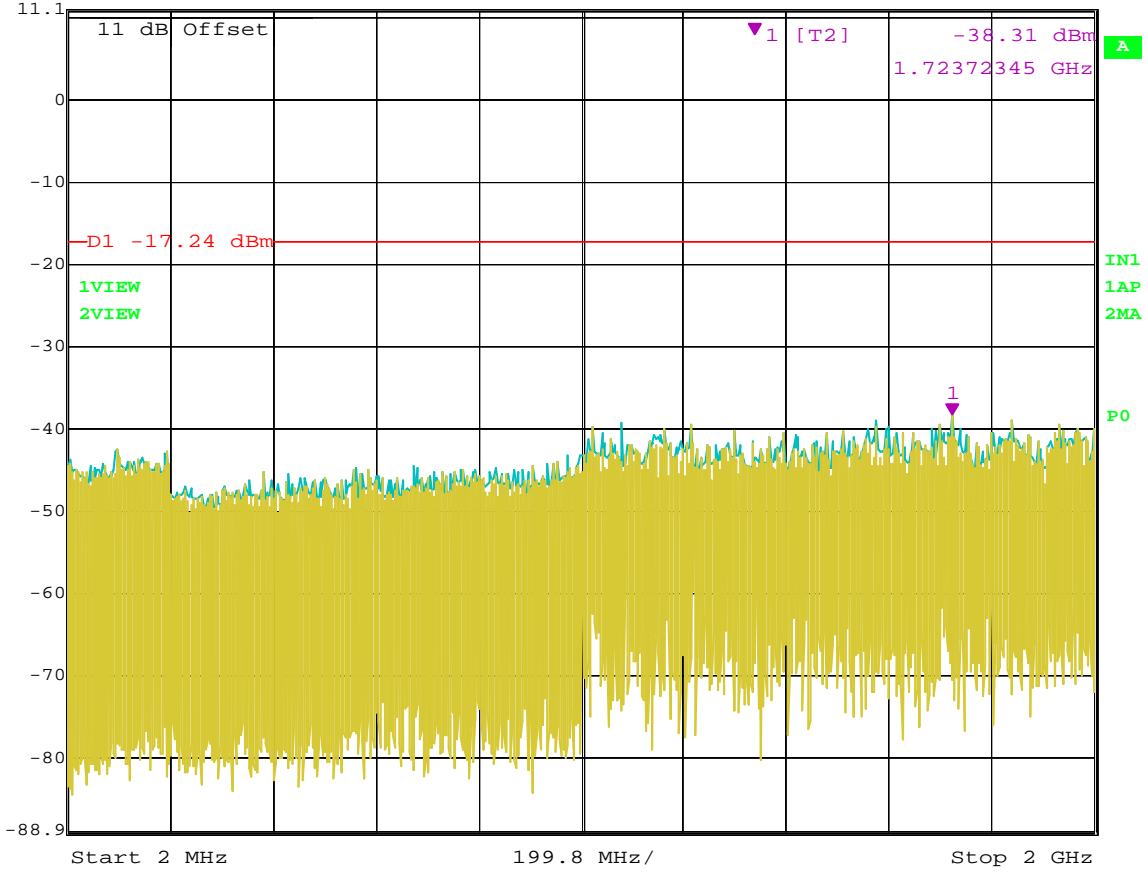


Date: 2.MAR.2004 23:41:46

### RF Antenna Conducted Test – High Channel – 2 MHz to 2 GHz



Marker 1 [T2] RBW 100 kHz RF Att 40 dB  
Ref Lvl 2.76 dBm VBW 300 kHz  
11.1 dBm 2.48000000 GHz SWT 250 ms Unit dBm

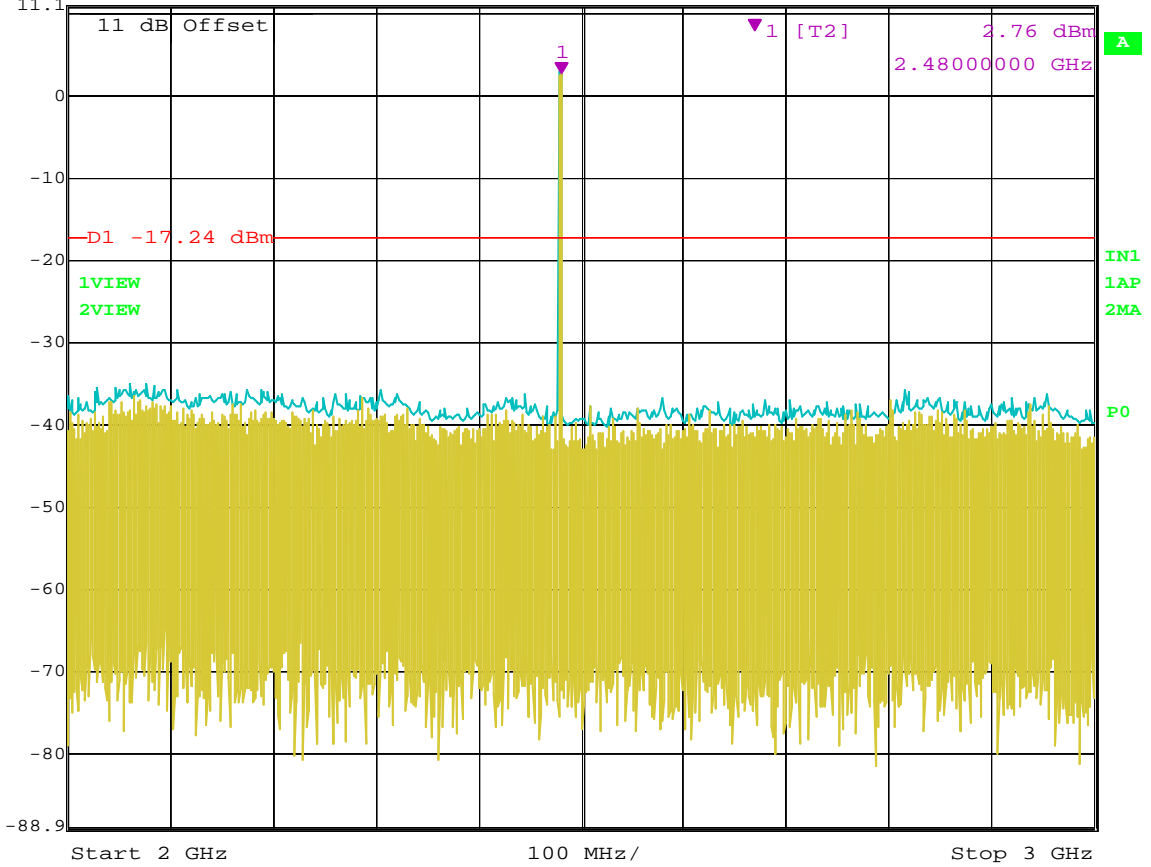


Date: 2.MAR.2004 23:40:44

### RF Antenna Conducted Test – High Channel – 2 GHz to 3 GHz



Ref Lvl 11.1 dBm  
Marker 1 [T2] -30.49 dBm  
6.31062124 GHz  
RBW 100 kHz RF Att 40 dB  
VBW 300 kHz  
SWT 1.75 s Unit dBm

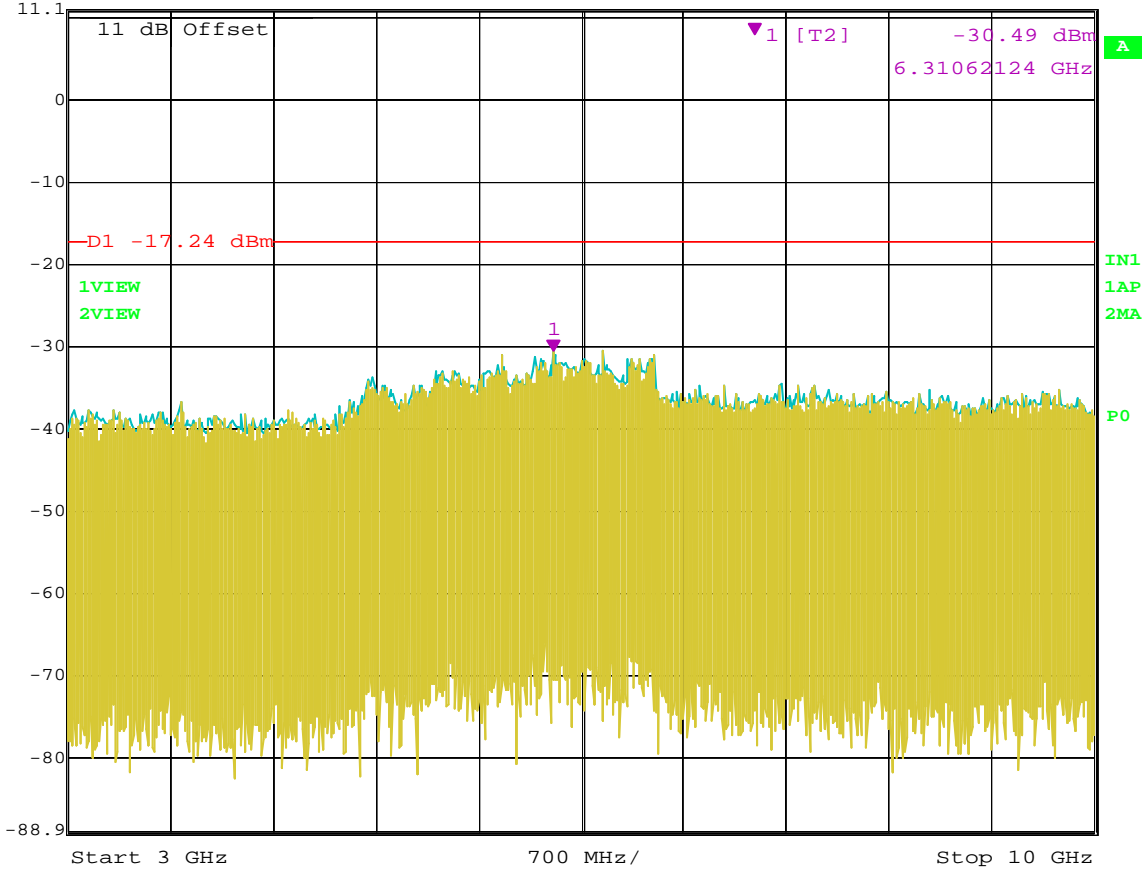


Date: 2.MAR.2004 23:42:28

### RF Antenna Conducted Test – High Channel – 3 GHz to 10 GHz





Ref Lvl 11.1 dBm  
Marker 1 [T2] -32.44 dBm  
21.69338677 GHz  
RBW 100 kHz RF Att 40 dB  
VBW 300 kHz  
SWT 3.8 s Unit dBm

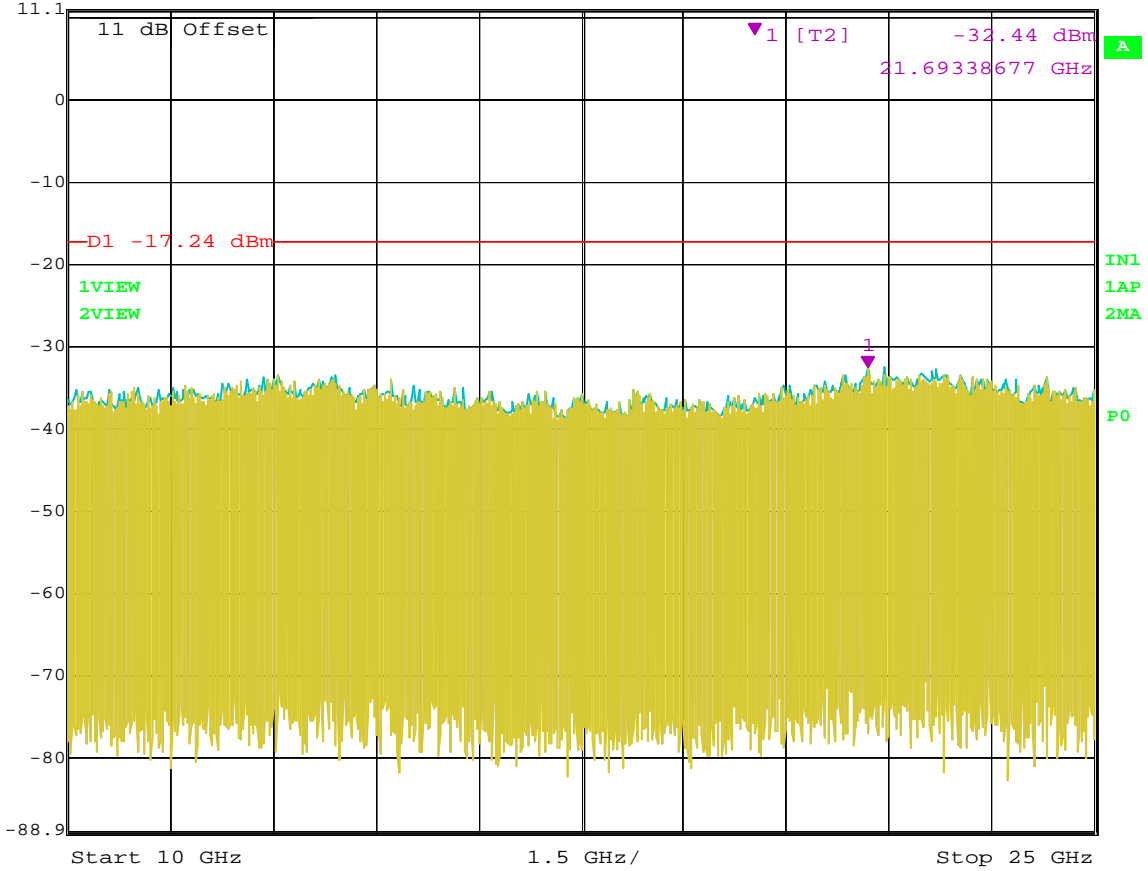

Date: 2.MAR.2004 23:43:14


### RF Antenna Conducted Test – High Channel – 10 GHz to 25 GHz

***CHANNEL HOPPING SEPARATION***

***DATA SHEET***



Marker 3 [T2] RBW 100 kHz RF Att 40 dB  
Ref Lvl 3.62 dBm VBW 1 MHz  
11.1 dBm 2.44300000 GHz SWT 20 ms Unit dBm

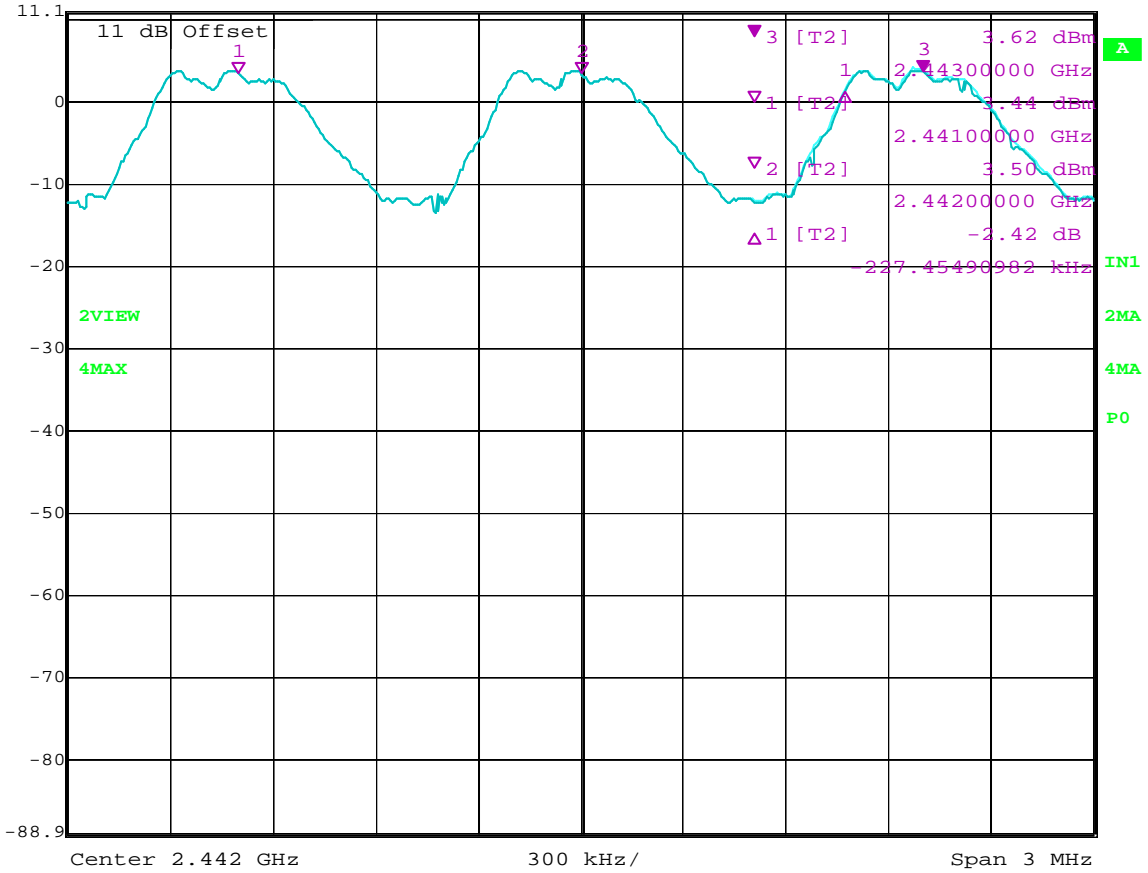

Date: 2.MAR.2004 20:18:39


### Channel Hopping Separation Test

***AVERAGE TIME OF OCCUPANCY***

***DATA SHEETS***



Delta 1 [T2] RBW 100 kHz RF Att 40 dB  
Ref Lvl 11.1 dBm 12.79 dB VBW 100 kHz  
11.1 dBm 480.961924  $\mu$ s SWT 20 ms Unit dBm

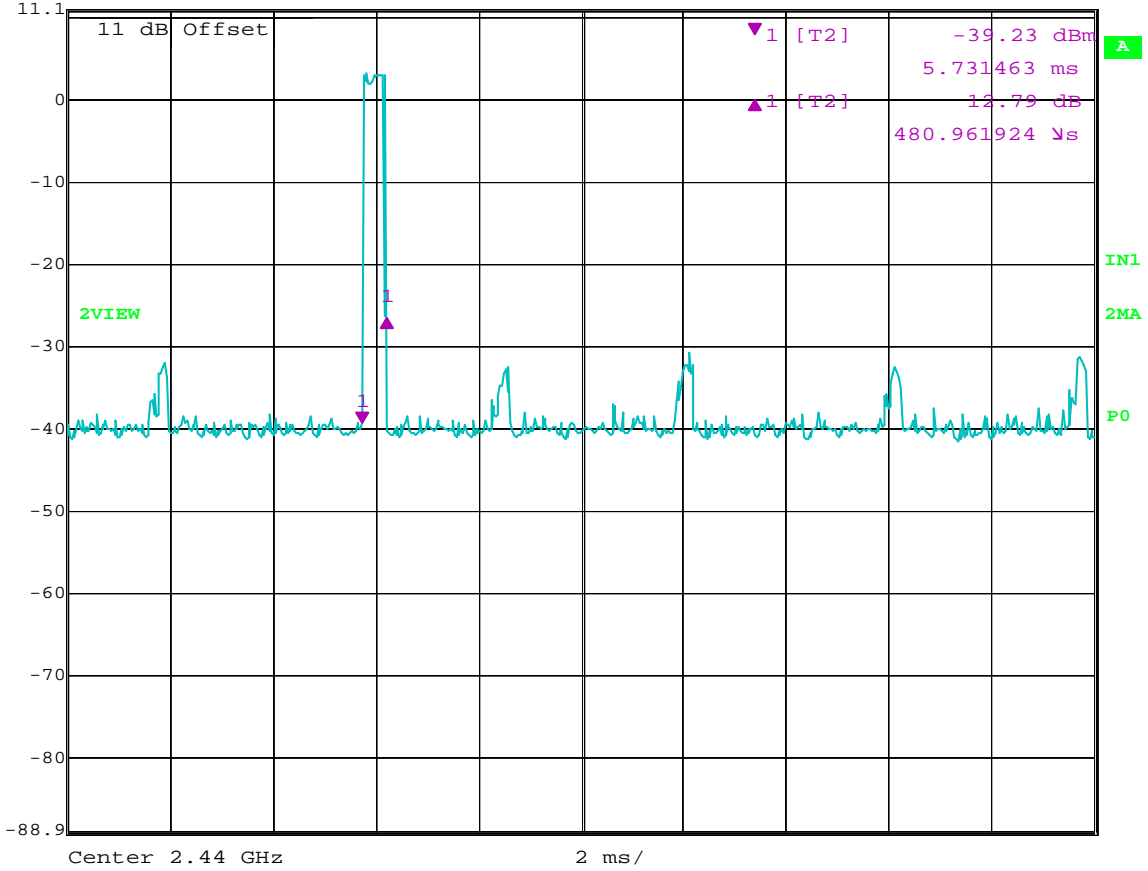


Date: 2.MAR.2004 20:40:13

Time of One DH1 Pulse = 480.96  $\mu$ s



Delta 1 [T2] RBW 100 kHz RF Att 40 dB  
Ref Lvl 0.00 dB VBW 100 kHz  
11.1 dBm 480.961924  $\mu$ s SWT 11 s Unit dBm

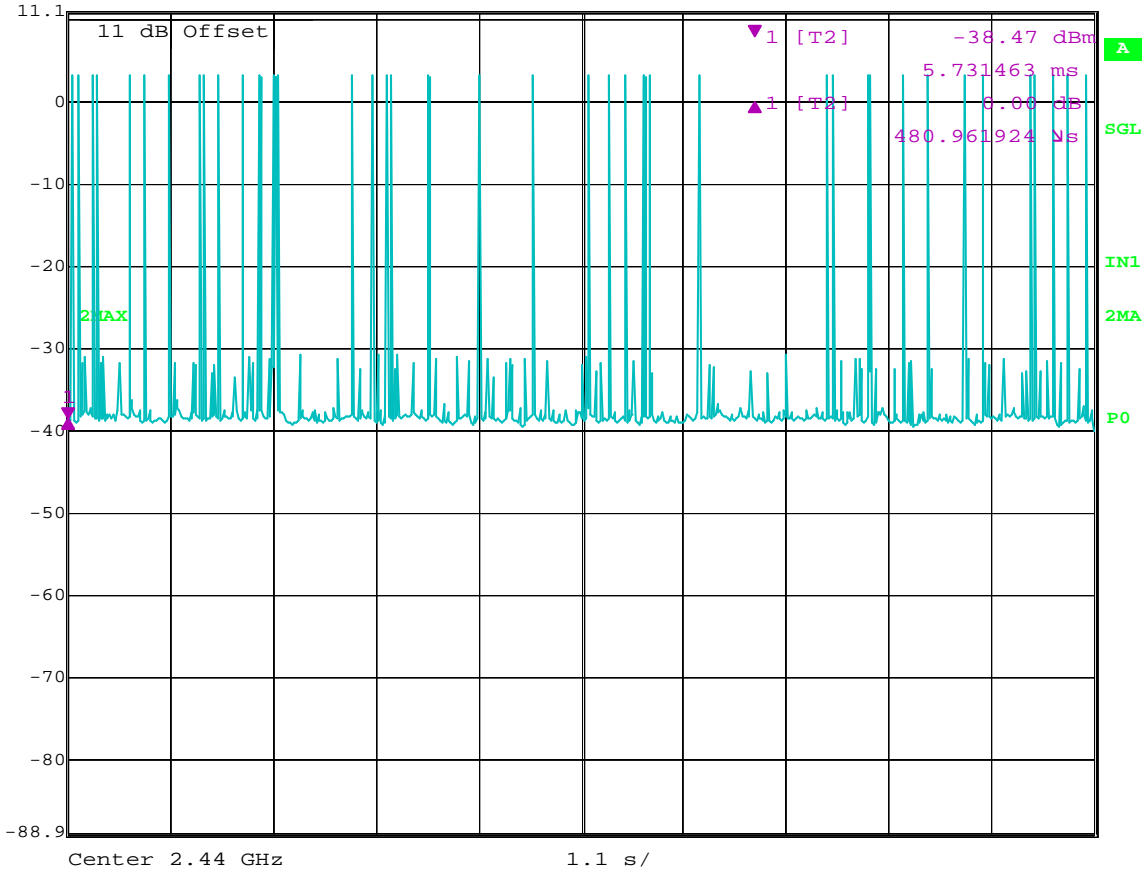


Date: 2.MAR.2004 20:50:56

Number of Pulses in 11 seconds = 43  
Number of Pulses in 31.6 seconds = 43 \* 2.8727 = 123.527 Pulses  
123.527 Pulses \* 480.96  $\mu$ s = **59.41 mS / 31.6 seconds**  
Limit = 400 mS / 31.6 seconds



Delta 1 [T2] RBW 100 kHz RF Att 40 dB  
Ref Lvl 30.03 dB VBW 100 kHz  
11.1 dBm 1.723447 ms SWT 20 ms Unit dBm

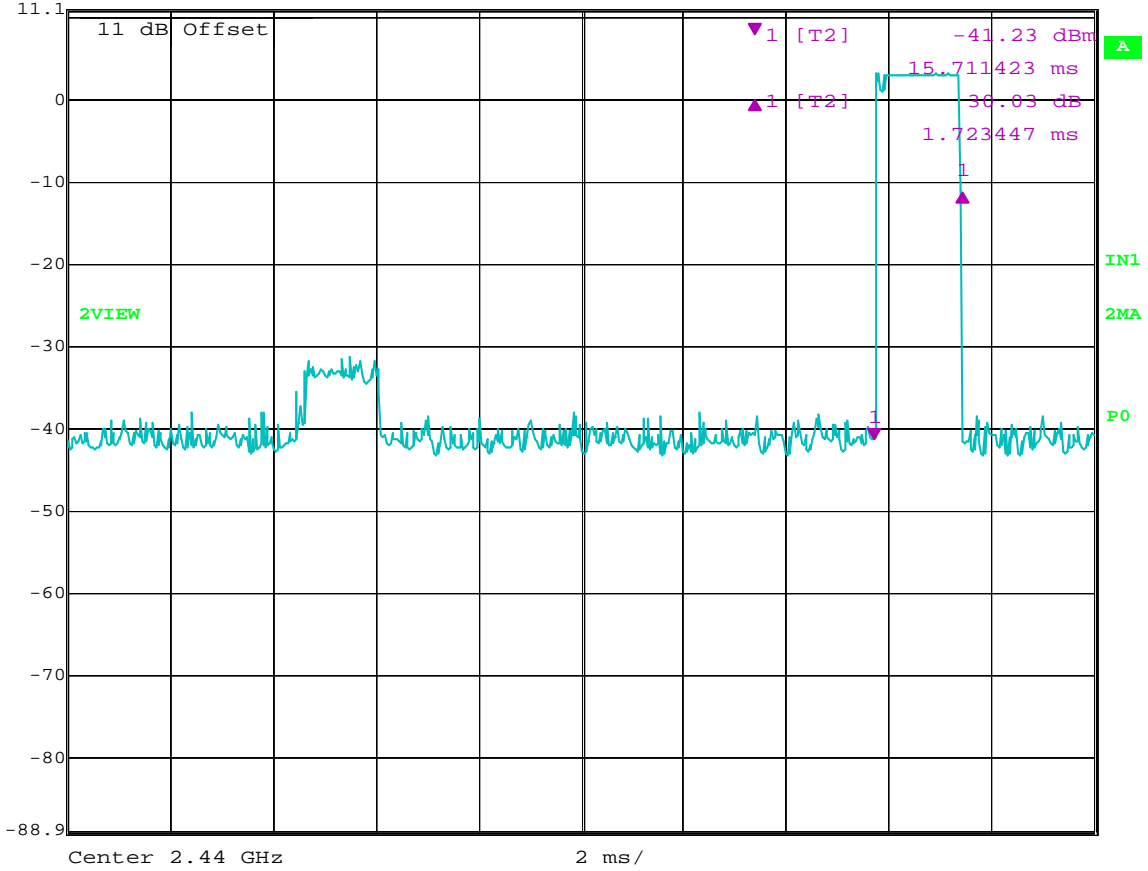


Date: 2.MAR.2004 22:21:24

Time of One DH3 Pulse = 1.723447 mS



Delta 1 [T2]      RBW 100 kHz    RF Att 40 dB  
 Ref Lvl            0.00 dB        VBW 100 kHz  
 11.1 dBm           1.723447 ms    SWT 11 s        Unit dBm

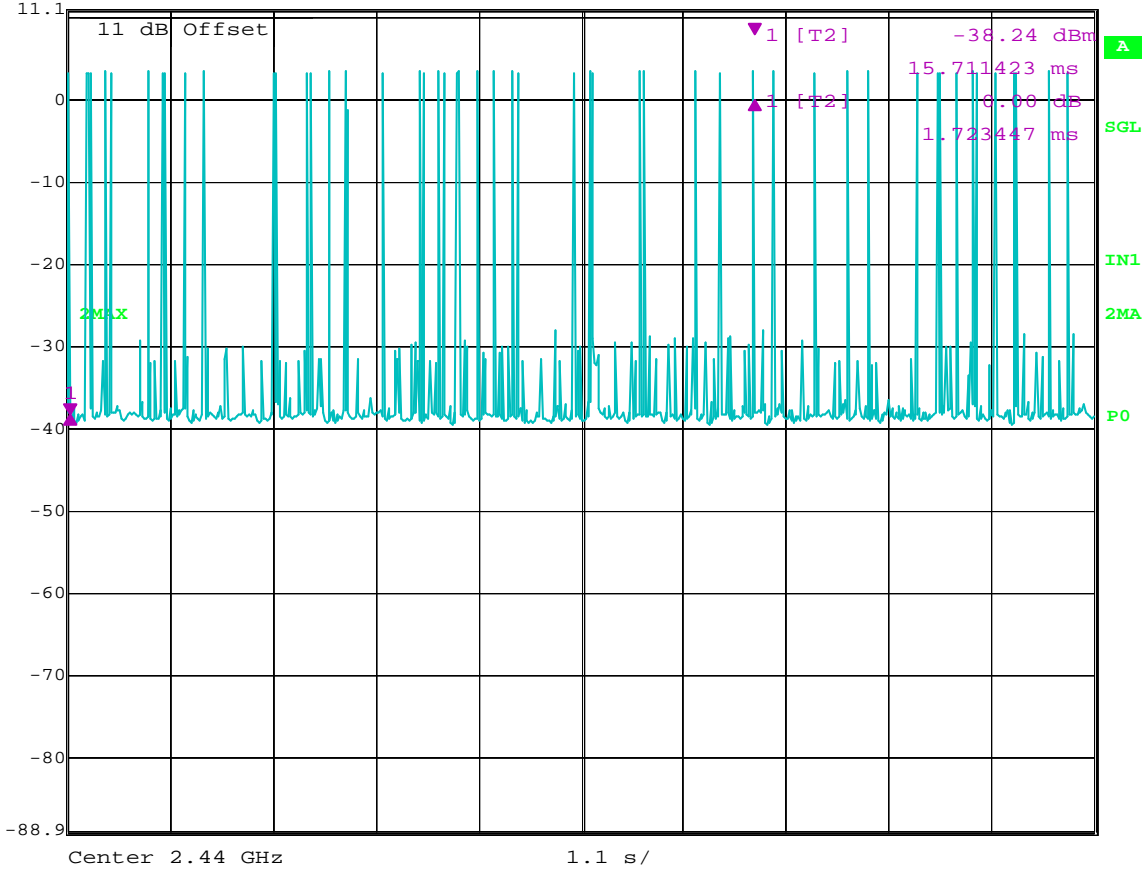


Date: 2.MAR.2004 22:23:27

Number of Pulses in 11 seconds = 50  
 Number of Pulses in 31.6 seconds = 50 \* 2.8727 = 143.635 Pulses  
 143.635 Pulses \* 1.723447 mS = **247.547 mS / 31.6 seconds**  
 Limit = 400 mS / 31.6 seconds





Delta 1 [T2] RBW 100 kHz RF Att 40 dB  
Ref Lvl -24.67 dB VBW 100 kHz  
11.1 dBm 3.006012 ms SWT 20 ms Unit dBm

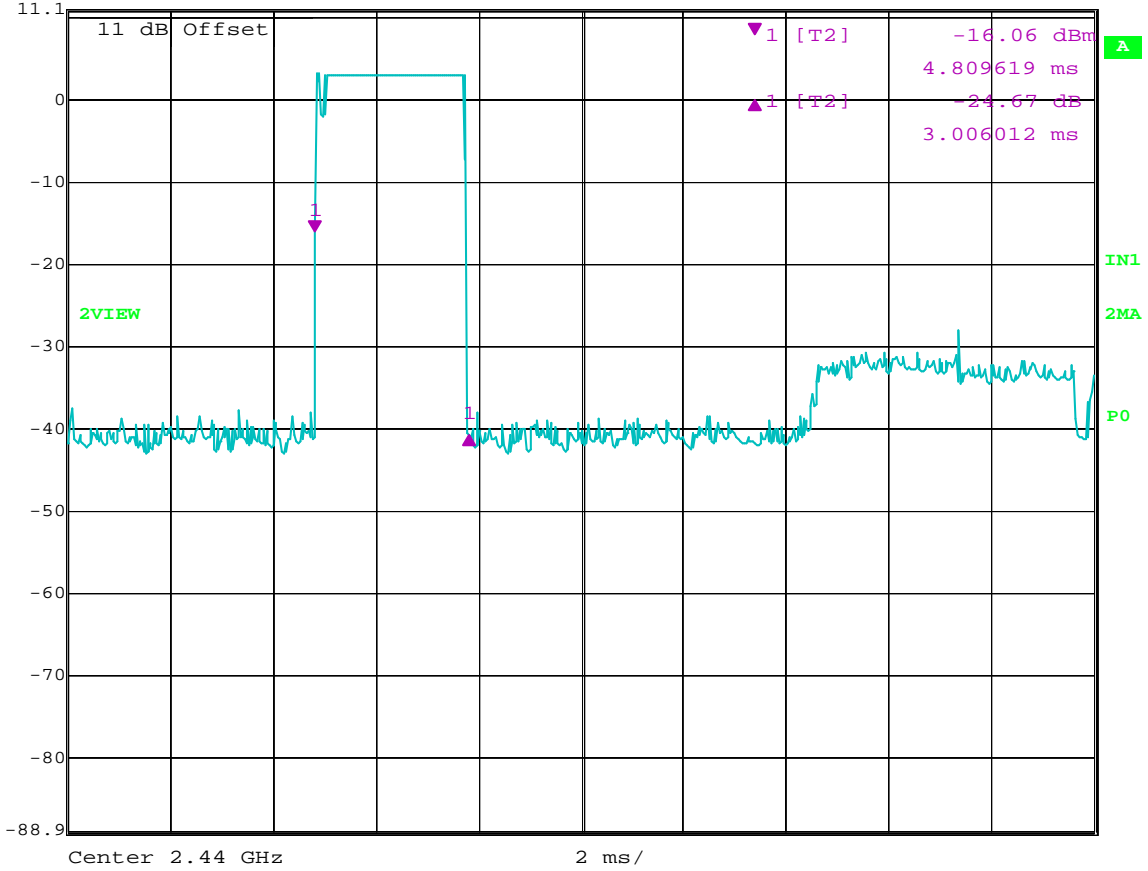


Date: 2.MAR.2004 22:45:04

Time of One DH5 Pulse = 3.006012 mS



Delta 1 [T2] RBW 100 kHz RF Att 40 dB  
Ref Lvl 0.00 dB VBW 100 kHz  
11.1 dBm 3.006012 ms SWT 11 s Unit dBm

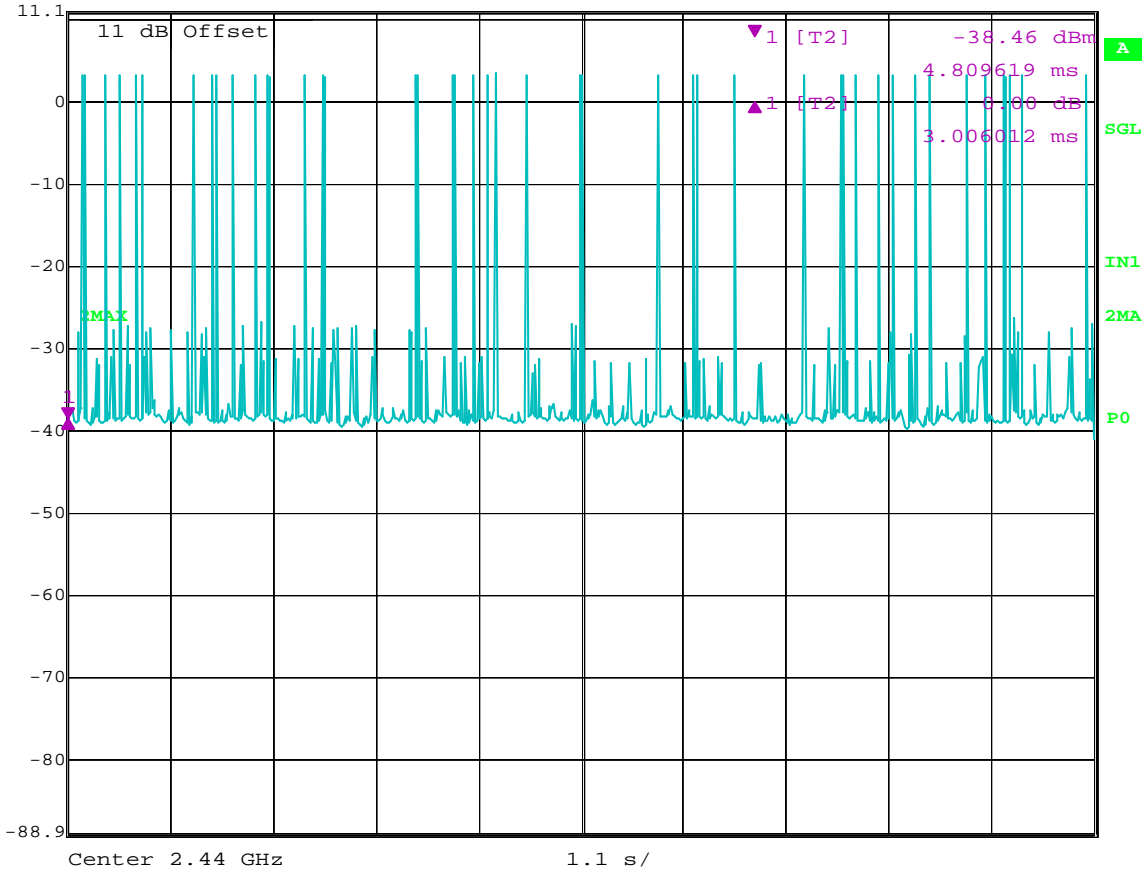

Date: 2.MAR.2004 22:50:22


Number of Pulses in 11 seconds = 42  
Number of Pulses in 31.6 seconds = 42 \* 2.8727 = 120.6534  
120.6534 Pulses \* 3.006012 mS = **362.685568 mS / 31.6 seconds**  
Limit = 400 mS / 31.6 seconds

***SPECTRAL DENSITY OUTPUT***

***DATA SHEETS***



Ref Lvl 11.1 dBm  
Marker 1 [T2] 2.40200200 GHz -0.67 dBm  
RBW 3 kHz RF Att 40 dB  
VBW 10 kHz  
SWT 680 s Unit dBm

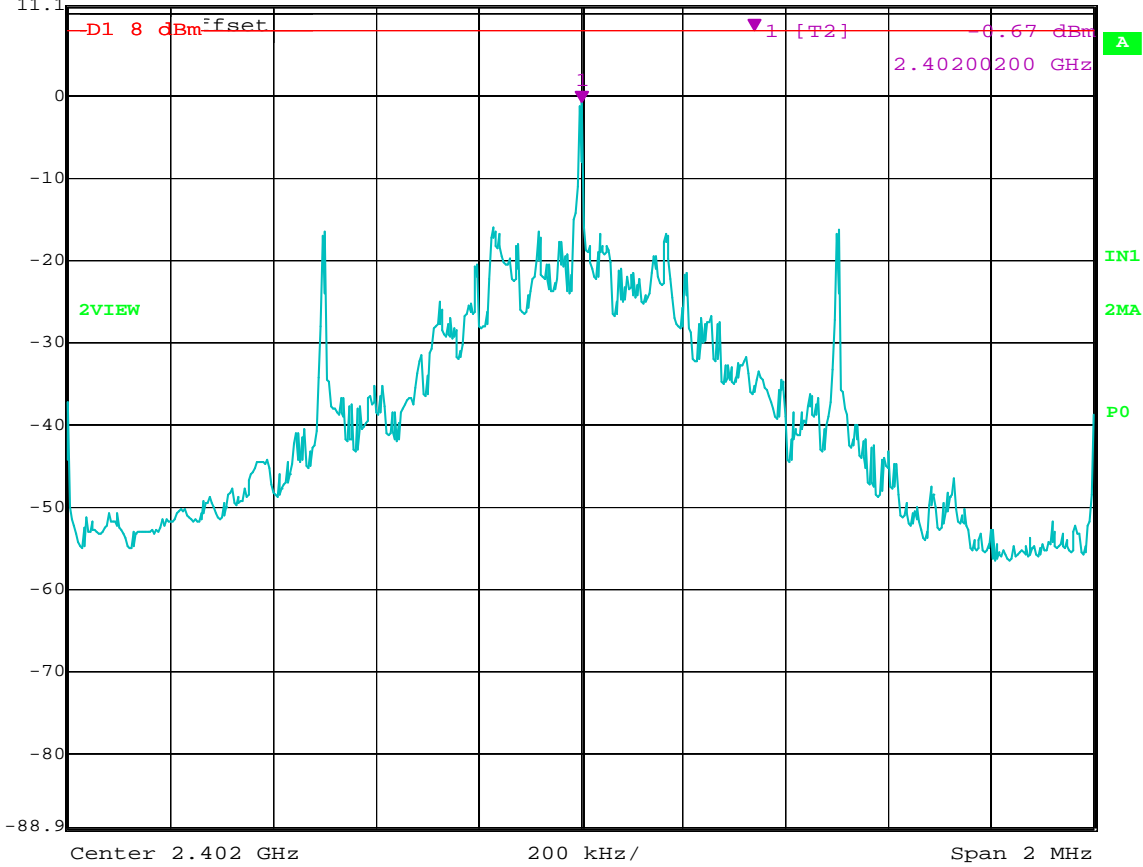


Date: 3.MAR.2004 00:28:19

Spectral Density Output – Low Channel



Ref Lvl 11.1 dBm  
Marker 1 [T2] 3.30 dBm  
2.44100200 GHz  
RBW 3 kHz RF Att 40 dB  
VBW 10 kHz  
SWT 680 s Unit dBm

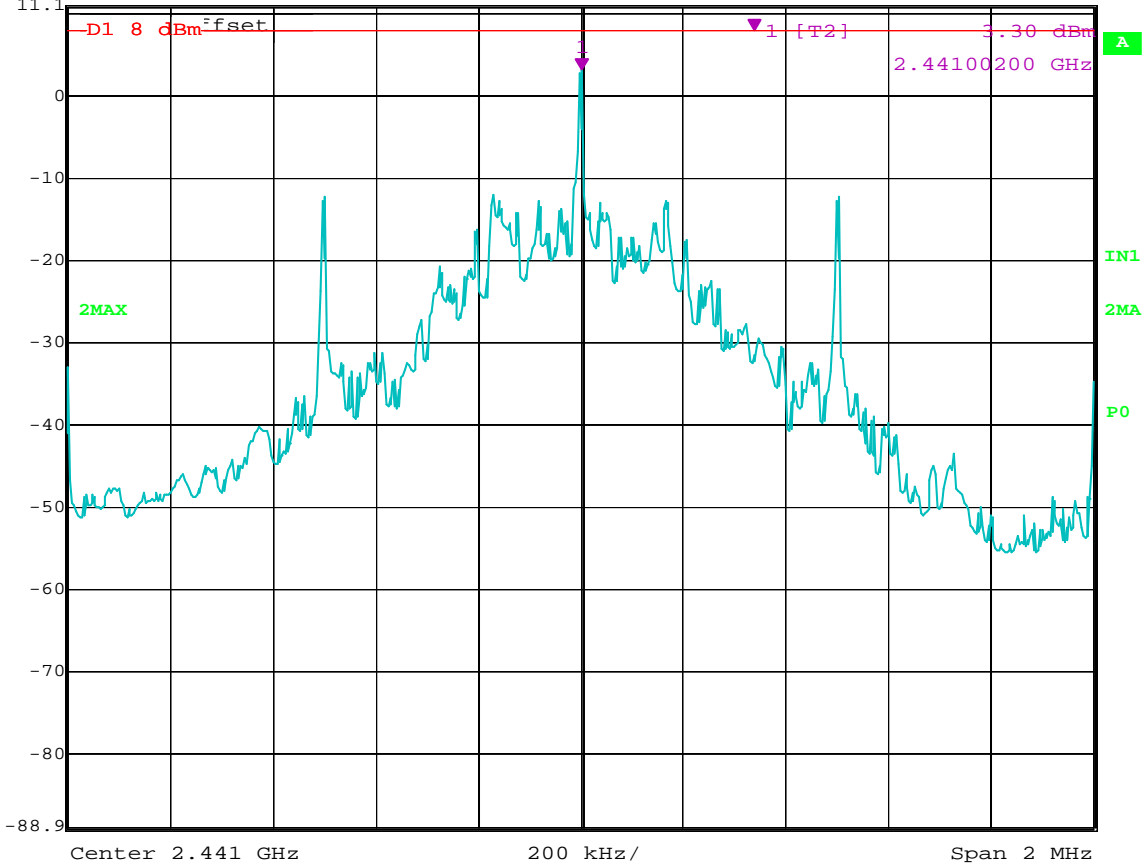


Date: 3.MAR.2004 00:16:19

Spectral Density Output – Middle Channel



Ref Lvl 11.1 dBm  
Marker 1 [T2] 3.02 dBm  
2.48000200 GHz  
RBW 3 kHz RF Att 40 dB  
VBW 10 kHz  
SWT 680 s Unit dBm

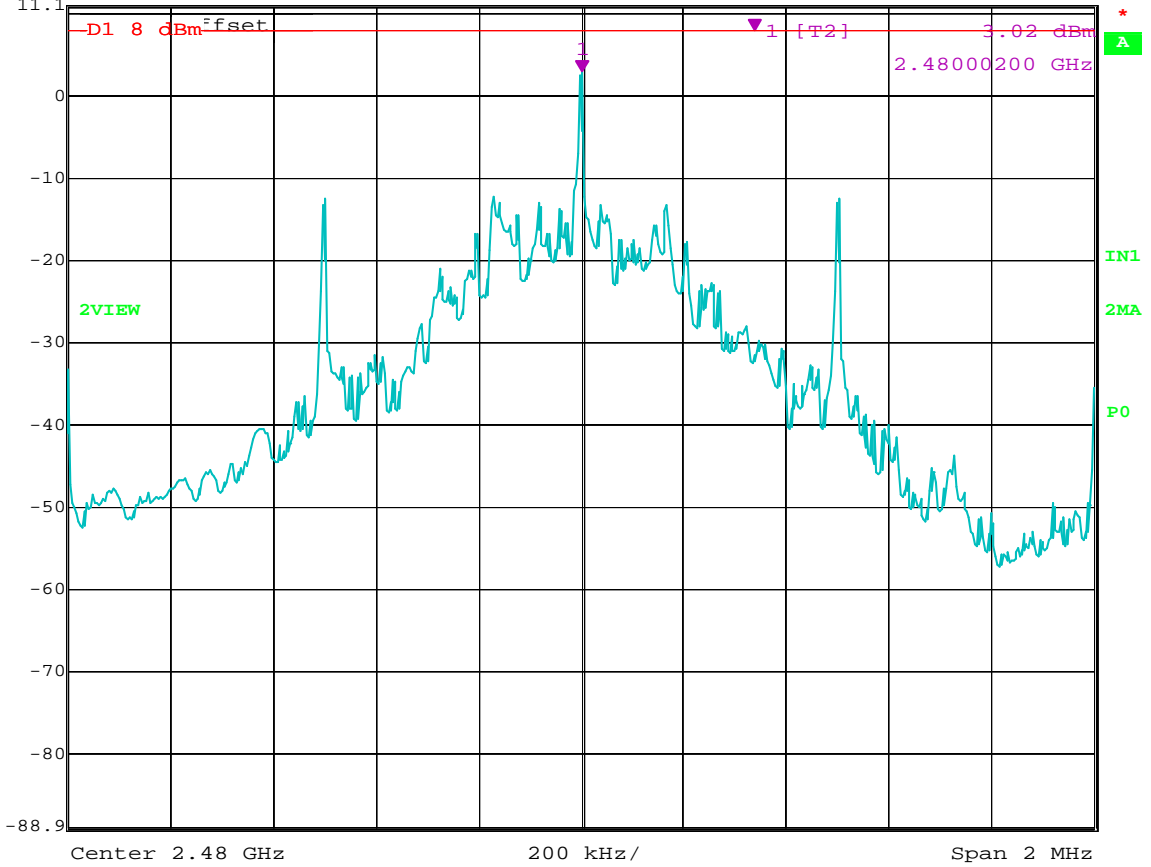

Date: 2.MAR.2004 23:59:04

### Spectral Density Output – High Channel


***NUMBER OF HOPPING FREQUENCIES***

***DATA SHEET***



Ref Lvl  
11.1 dBm


RBW 1 MHz RF Att 40 dB  
VBW 1 MHz  
SWT 20 ms Unit dBm

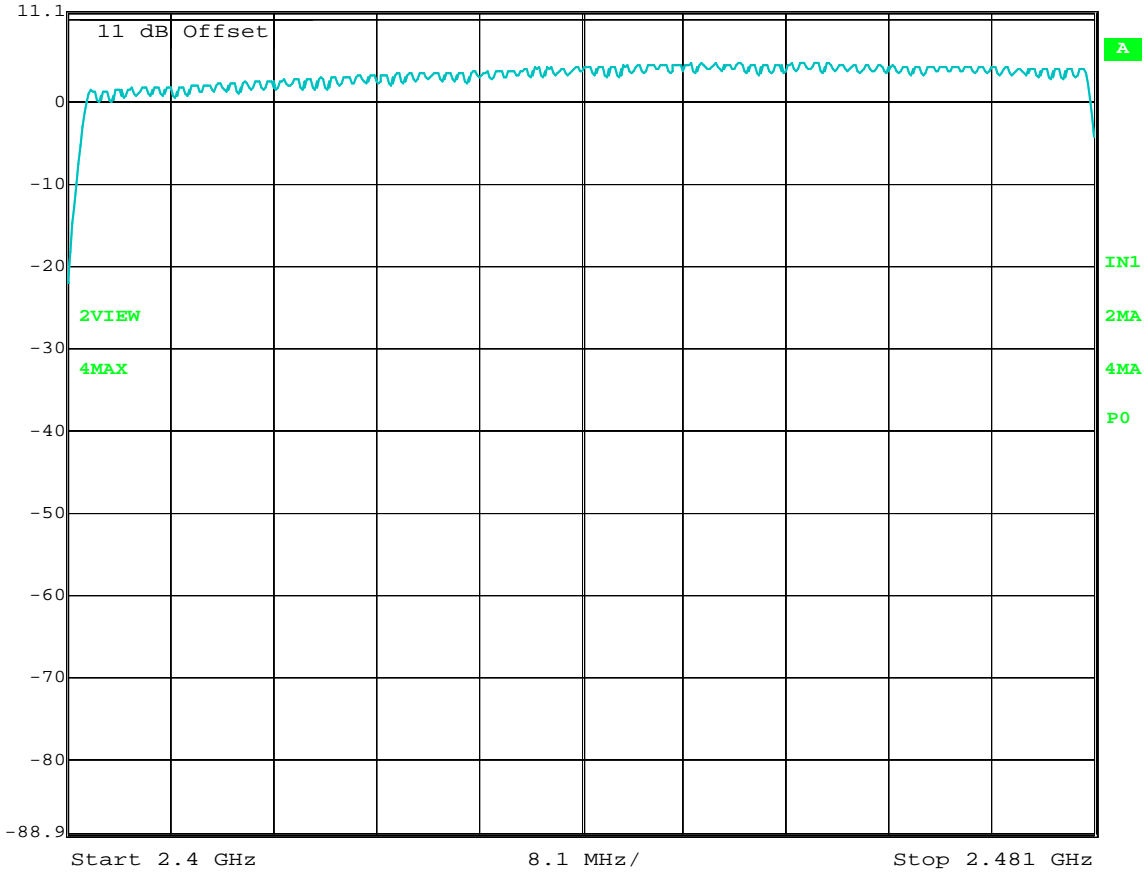

Date: 2.MAR.2004 20:32:38

Number of Frequencies (79 Total)



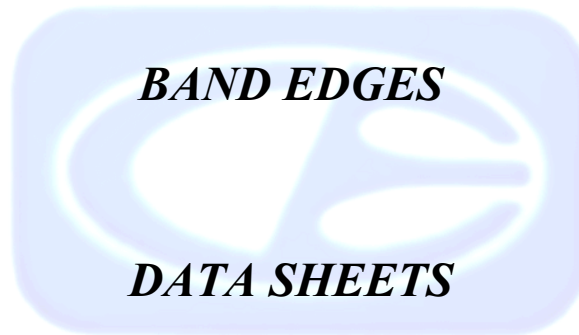


## RADIATED EMISSIONS (FCC SECTION 15.209 AND 15.247)

COMPANY	O'NEIL PRODUCT DEVELOPMENT	DATE	3/4/2004
EUT	BLUETOOTH MODULE	DUTY CYCLE	<10 %
MODEL	BT260146	PEAK TO AVG	20 dB
S/N	N/A	TEST DIST.	3 Meters
TEST ENGINEER	KYLE FUJIMOTO	LAB	A


Frequency MHz	Peak Reading (dBuV)	Average (A) or Quasi- Peak (QP)	Antenna Polar. (V or H)	Antenna Height (meters)	EUT Azimuth (degrees)	EUT Axis (X,Y,Z)	EUT Tx Channel	Antenna Factor (dB)	Cable Loss (dB)	Amplifier Gain (dB)	Distance Factor (dB)	Mixer Factor (dB)	*Corrected Reading (dBuV/m)	Delta ** (dB)	Spec Limit (dBuV/m)	Comments
2390.0000	39.5	19.5 A	V	2.0	225	Z	LOW	31.5	4.6	30.0	0.0	0.0	25.6	-28.4	54.0	Band Edge Lower Channel
																Worst Case Polar. & Axis
2483.5000	50.1	30.1 A	V	2.0	90	Y	HIGH	31.6	4.7	30.0	0.0	0.0	36.4	-17.6	54.0	Band Edge High Channel
																Worst Case Polar. & Axis

\* CORRECTED READING = METER READING + ANTENNA FACTOR + CABLE LOSS - AMPLIFIER GAIN  
 \*\* DELTA = SPEC LIMIT - CORRECTED READING

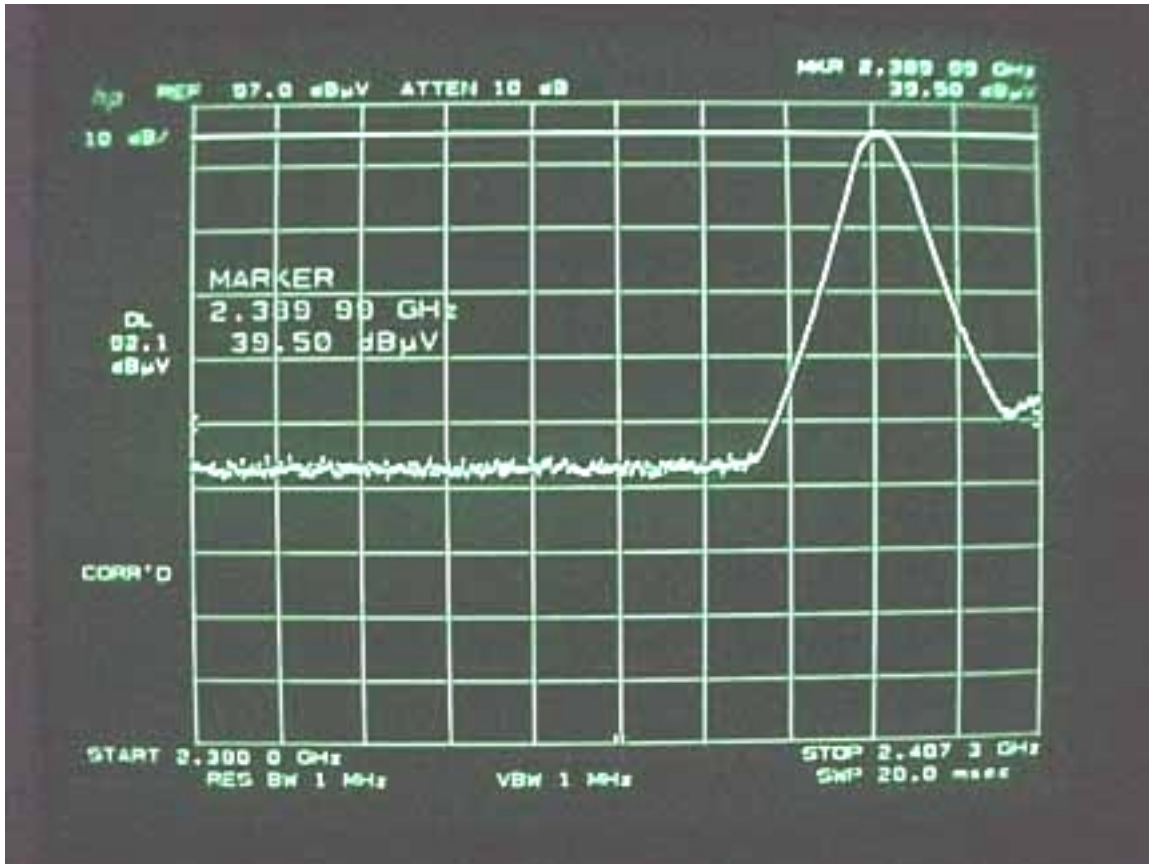


O'NEIL PRODUCT DEVELOPMENT  
BLUETOOTH MODULE  
MODEL: BT260146  
FCC SUBPART C – BAND EDGE – LOW CHANNEL – 03-04-04

**PHOTOGRAPH SHOWING THE LOWER  
BAND EDGE AT 2390 MHz**

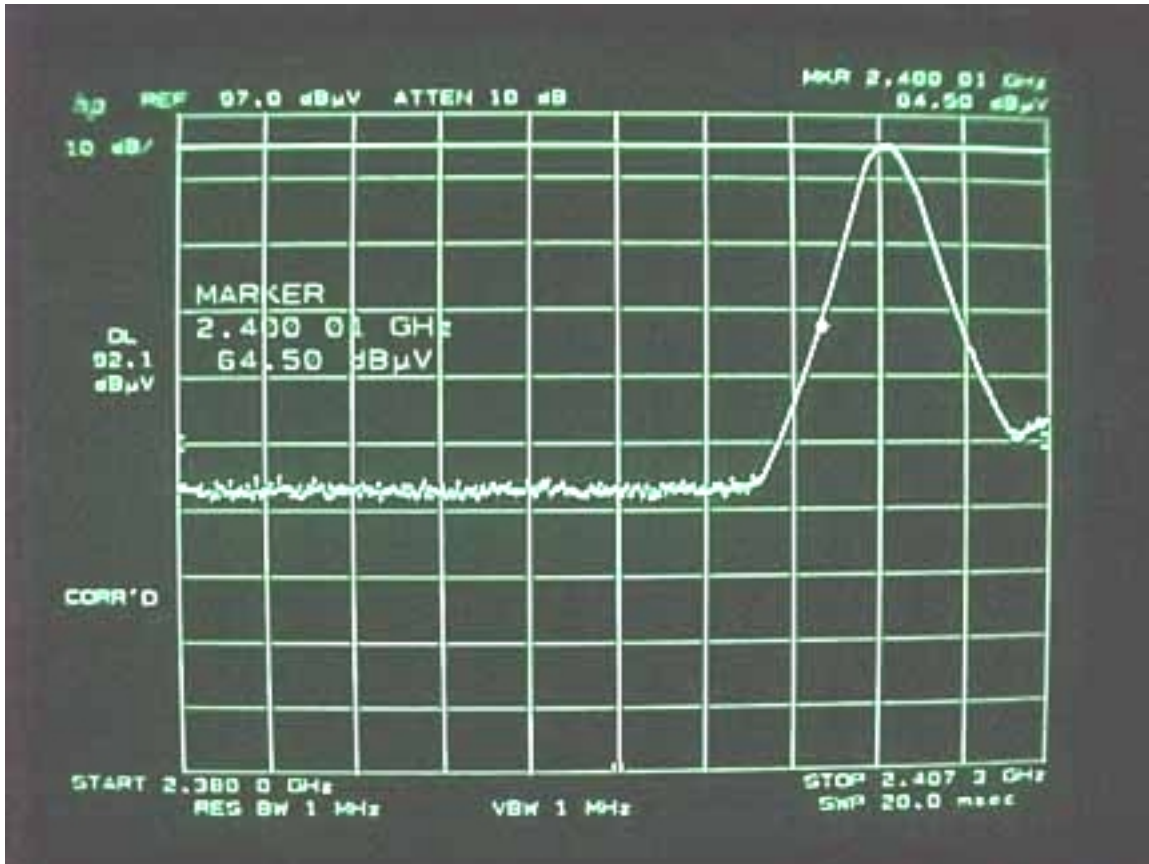

O'NEIL PRODUCT DEVELOPMENT  
BLUETOOTH MODULE  
MODEL: BT260146  
FCC SUBPART C – BAND EDGE – LOW CHANNEL – 03-04-04

**PHOTOGRAPH SHOWING THE LOWER  
BAND EDGE AT 2400 MHz**

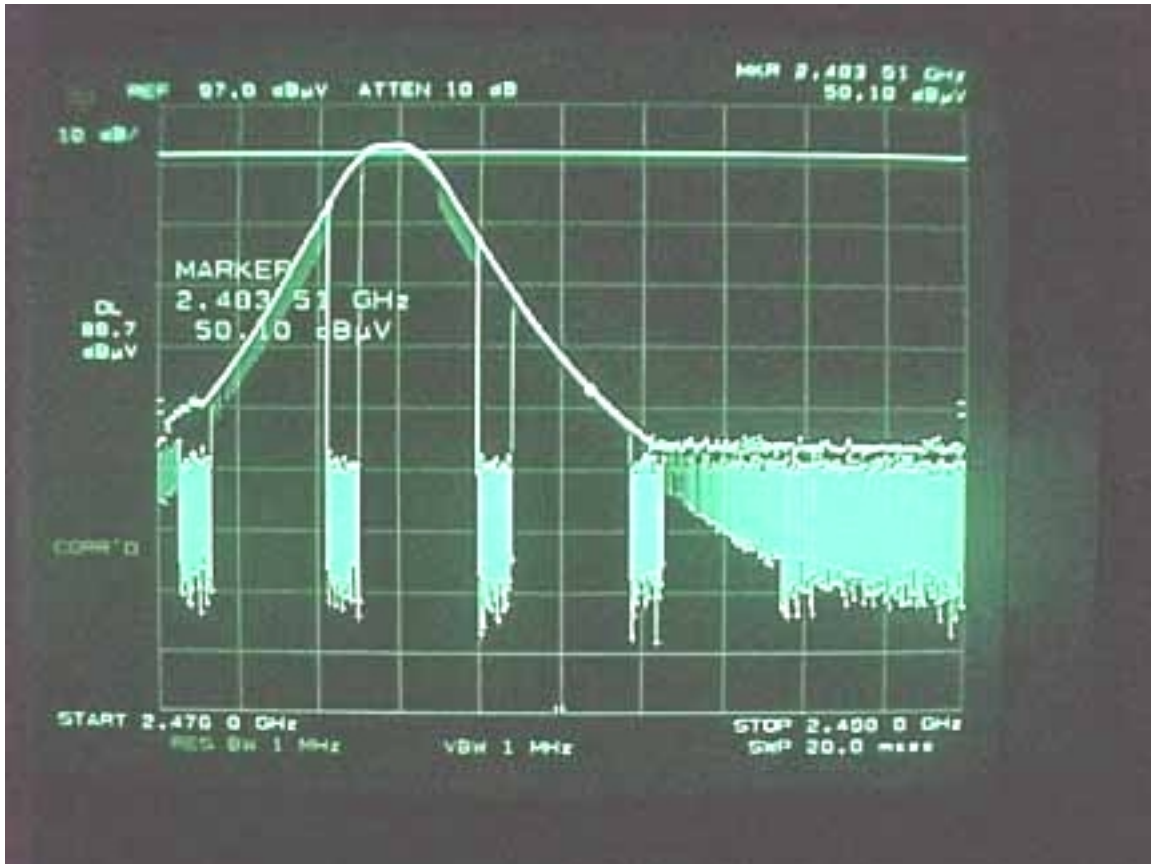

O'NEIL PRODUCT DEVELOPMENT  
BLUETOOTH MODULE  
MODEL: BT260146  
FCC SUBPART C – BAND EDGE – HIGH CHANNEL – 03-04-04

**PHOTOGRAPH SHOWING THE UPPER  
BAND EDGE AT 2483.5 MHz**