

*FCC PART 15, SUBPART B and C  
TEST REPORT**for***RADIO 802.11 b/g PHASER****MODEL: WL261176**

Prepared for

O' NEIL PRODUCT DEVELOPMENT  
8 MASON  
IRVINE, CALIFORNIA 92618-2705Prepared by: *Kyle Fujimoto*

KYLE FUJIMOTO

Approved by: *Michael Christensen*

MICHAEL CHRISTENSEN

COMPATIBLE ELECTRONICS INC.  
114 OLINDA DRIVE  
BREA, CALIFORNIA 92823  
(714) 579-0500

DATE: NOVEMBER 27, 2006

|       | REPORT<br>BODY | APPENDICES |          |          |          |          | TOTAL      |
|-------|----------------|------------|----------|----------|----------|----------|------------|
|       |                | <i>A</i>   | <i>B</i> | <i>C</i> | <i>D</i> | <i>E</i> |            |
| PAGES | 21             | 2          | 2        | 2        | 35       | 243      | <b>305</b> |

This report shall not be reproduced except in full, without the written approval of Compatible Electronics.

---

**TABLE OF CONTENTS**

---

| <b>Section / Title</b>                                 | <b>PAGE</b> |
|--|-------------|
| <b>GENERAL REPORT SUMMARY</b>                          | <b>4</b>    |
| <b>SUMMARY OF TEST RESULTS</b>                         | <b>5</b>    |
| <b>1. PURPOSE</b>                                      | <b>6</b>    |
| <b>2. ADMINISTRATIVE DATA</b>                          | <b>7</b>    |
| 2.1 Location of Testing                                | 7           |
| 2.2 Traceability Statement                             | 7           |
| 2.3 Cognizant Personnel                                | 7           |
| 2.4 Date Test Sample was Received                      | 7           |
| 2.5 Disposition of the Test Sample                     | 7           |
| 2.6 Abbreviations and Acronyms                         | 7           |
| <b>3. APPLICABLE DOCUMENTS</b>                         | <b>8</b>    |
| <b>4. DESCRIPTION OF TEST CONFIGURATION</b>            | <b>9</b>    |
| 4.1 Description of Test Configuration - EMI            | 9           |
| 4.1.1 Cable Construction and Termination               | 10          |
| <b>5. LISTS OF EUT, ACCESSORIES AND TEST EQUIPMENT</b> | <b>11</b>   |
| 5.1 EUT and Accessory List                             | 11          |
| 5.2 EMI Test Equipment for Brea Facility – Part 1      | 12          |
| 5.3 EMI Test Equipment for Brea Facility – Part 2      | 13          |
| <b>6. TEST SITE DESCRIPTION</b>                        | <b>14</b>   |
| 6.1 Test Facility Description                          | 14          |
| 6.2 EUT Mounting, Bonding and Grounding                | 14          |
| <b>7. CHARACTERISTICS OF THE TRANSMITTER</b>           | <b>15</b>   |
| 7.1 Antenna Gain                                       | 15          |
| <b>8. TEST PROCEDURES</b>                              | <b>16</b>   |
| 8.1 RF Emissions                                       | 16          |
| 8.1.1 Conducted Emissions Test                         | 16          |
| 8.1.2 Radiated Emissions (Spurious and Harmonics) Test | 17          |
| 8.2 6 dB Bandwidth                                     | 19          |
| 8.3 Peak Output Power                                  | 19          |
| 8.4 RF Antenna Conducted Test                          | 19          |
| 8.5 Spectral Density Output                            | 20          |
| 8.6 RF Band Edges                                      | 20          |
| <b>9. CONCLUSIONS</b>                                  | <b>21</b>   |

**LIST OF APPENDICES**

| <b>APPENDIX</b> | <b>TITLE</b>  |
|-----------------|---|
| A               | Laboratory Recognitions   |
| B               | Modifications to the EUT  |
| C               | Additional Models Covered Under This Report   |
| D               | Diagrams, Charts, and Photos <ul style="list-style-type: none"><li>• Test Setup Diagrams</li><li>• Radiated and Conducted Emissions Photos</li><li>• Antenna and Effective Gain Factors</li></ul> |
| E               | Data Sheets   |

**LIST OF FIGURES**

| <b>FIGURE</b> | <b>TITLE</b>                                 |
|---------------|--|
| 1             | Conducted Emissions Test Setup               |
| 2             | Plot Map and Layout of 3 Meter Radiated Site |

## GENERAL REPORT SUMMARY

This electromagnetic emission test report is generated by Compatible Electronics Inc., which is an independent testing and consulting firm. The test report is based on testing performed by Compatible Electronics personnel according to the measurement procedures described in the test specifications given below and in the "Test Procedures" section of this report.

The measurement data and conclusions appearing herein relate only to the sample tested and this report may not be reproduced without the written permission of Compatible Electronics, unless done so in full.

This report must not be used to claim product endorsement by NVLAP, NIST, or any other agency of the U.S. Government.

Device Tested: Radio 802.11 b/g Phaser  
Model: WL261176  
S/N: N/A

Product Description: See Expository Statement.

Modifications: The EUT was not modified during the testing.

Manufacturer: O' Neil Product Development  
8 Mason  
Irvine, California 92618-2705

Test Dates: November 6, 7, 8, 9, 11, and 15, 2006

Test Specifications: EMI requirements  
Limits: CFR Title 47, Part 15, Subpart B; and Subpart C, sections 15.205, 15.207, 15.209, and 15.247

Test Procedure: ANSI C63.4

Test Deviations: The test procedure was not deviated from during the testing.

---

**SUMMARY OF TEST RESULTS**

| <b>TEST</b> | <b>DESCRIPTION</b>  | <b>RESULTS</b>   |
|-------------|---|--|
| 1           | Conducted RF Emissions, 150 kHz – 30 MHz  | Complies with the <b>Class B</b> limits of CFR Title 47, Part 15 Subpart B; and the limits of CFR Title 47, Part 15, Subpart C, section 15.207 |
| 2           | Spurious Radiated RF Emissions, 10 kHz - 25000 MHz  | Complies with the <b>Class B</b> limits of CFR Title 47, Part 15, Subpart B; and CFR Title 47, Part 15, Subpart C, section 15.247(d)           |
| 3           | Fundamental and Emissions produced by the intentional radiator in non-restricted bands, 10 kHz – 40 GHz | Complies with the relevant requirements of CFR Title 47, Part 15, Subpart C, section 15.247(d)   |
| 4           | Emissions produced by the intentional radiator in restricted bands, 10 kHz – 40 GHz                     | Complies with the relevant requirements of CFR Title 47, Part 15, Subpart C, section 15.205, 15.209(a), and section 15.247 (d)                 |
| 5           | 6 dB Bandwidth  | Complies with the relevant requirements of CFR Title 47, Part 15, Subpart C, section 15.247(a)(2)  |
| 6           | Peak Power Output   | Complies with the relevant requirements of CFR Title 47, Part 15, Subpart C, section 15.247(b)(3)  |
| 7           | RF Conducted Antenna Test   | Complies with the relevant requirements of CFR Title 47, Part 15, Subpart C, section 15.247(d)   |
| 8           | Peak Power Spectral Density Conducted from the Intentional Radiator to the Antenna                      | Complies with the relevant requirements of CFR Title 47, Part 15, Subpart C, section 15.247 (e)  |

**1. PURPOSE**

This document is a qualification test report based on the Electromagnetic Interference (EMI) tests performed on the Radio 802.11 b/g Phaser Model: WL261176. The EMI measurements were performed according to the measurement procedure described in ANSI C63.4. The tests were performed in order to determine whether the electromagnetic emissions from the equipment under test, referred to as EUT hereafter, are within the specification limits defined by CFR Title 47, Part 15, Subpart B; and Subpart C, sections 15.205, 15.207, 15.209, and 15.247.



## 2. ADMINISTRATIVE DATA

### 2.1 Location of Testing

The EMI tests of the testing described herein were performed at the test facility of Compatible Electronics at 114 Olinda Drive, Brea, California 92823.

### 2.2 Traceability Statement

The calibration certificates of all test equipment used during the test are on file at the location of the test. The calibration is traceable to the National Institute of Standards and Technology (NIST).

### 2.3 Cognizant Personnel

O' Neil Product Development

Ken Carlson                      Director of Electrical Engineering  
Jonathan Mack                 Electrical Design Engineer

Compatible Electronics, Inc.

Kyle Fujimoto                 Test Engineer  
Michael Christensen         Lab Manager

### 2.4 Date Test Sample was Received

The test sample was received on November 6, 2006.

### 2.5 Disposition of the Test Sample

The sample has been returned to O' Neil Product Development as of November 27, 2006.

### 2.6 Abbreviations and Acronyms

The following abbreviations and acronyms may be used in this document.

|      |                                      |
|------|--------------------------------------|
| RF   | Radio Frequency                      |
| EMI  | Electromagnetic Interference         |
| EUT  | Equipment Under Test                 |
| P/N  | Part Number                          |
| S/N  | Serial Number                        |
| HP   | Hewlett Packard                      |
| ITE  | Information Technology Equipment     |
| CML  | Corrected Meter Limit                |
| LISN | Line Impedance Stabilization Network |
| USB  | Universal Serial Bus                 |
| B/N  | Board Number                         |

**3. APPLICABLE DOCUMENTS**

The following documents are referenced or used in the preparation of this EMI Test Report.

| <b>SPEC</b>                           | <b>TITLE</b>  |
|---------------------------------------|---|
| FCC Title 47,<br>Part 15<br>Subpart C | FCC Rules - Radio frequency devices (including digital devices) –<br>Intentional Radiators  |
| ANSI C63.4<br>2003                    | American National Standard for Methods of Measurement of Radio-Noise<br>Emissions from Low-Voltage Electrical and Electronic Equipment in the<br>Range of 9 kHz to 40 GHz |
| FCC Title 47,<br>Part 15<br>Subpart B | FCC Rules - Radio frequency devices (including digital devices) –<br>Unintentional Radiators  |



#### 4. DESCRIPTION OF TEST CONFIGURATION

##### 4.1 Description of Test Configuration - EMI

Setup and operation of the equipment under test.

Specifics of the EUT and Peripherals Tested

**Transmitter and Receiver Harmonics:** The EUT was installed inside the printer. The printer was connected to a PCMCIA extender card. The PCMCIA extender card was directly connected to the laptop's PCMCIA slot. The laptop was also connected to an AC Adapter, printer, and modem via its power, parallel, and serial ports, respectively. The printer was also connected to an AC Adapter via its power port. The EUT was controlled by a program on the laptop that locked one channel at a time so that the low, middle, and high channels could be tested. This program also allowed the EUT to either be in transmit or receive mode.

**All Other Tests:** The EUT was installed inside the printer. The printer was also connected to an AC Adapter via its power port. An access point, laptop, and their respective AC Adapters were placed fifty feet away from the test site. The printer was pinging the laptop via 802.11 b or 802.11 g connection through the access point on a continuous basis.

Note: The EUT was installed in a total of four printers. The printers that the EUT will be used with are the LP3-L, MF2t-L, MF4t-L, and OC2-L.

Four antennas (one for each printer) were tested. Please see section 5.1 for the part numbers for each antenna.

The final radiated as well as the conducted data was taken in the mode above for each printer. Please see Appendix E for the data sheets.

#### **4.1.1 Cable Construction and Termination**

**Cable 1** (Only Connected for Tx and Rx Harmonics)

This is a 50 centimeter unshielded cable connecting the printer to the PCMCIA Extender Board. The cable has an IDS-26 connector at each end.

**Cable 2** This is a 2 meter unshielded cable connecting the O'Neil Product Development Printer to the AC Adapter. The cable has a 1/8 inch power connector at the O'Neil Product Development Printer end and is hard wired into the AC Adapter. The cable was bundled to a length of 1 meter.

**Cable 3** (Only Connected for Tx and Rx Harmonics)

This is a 2 meter braid and shielded cable connecting the printer to the laptop. The cable has a Centronics metallic type connector at the printer end and a D-25 pin metallic connector at the laptop end. The shield of the cable was grounded to the chassis via the connectors.

**Cable 4** (Only Connected for Tx and Rx Harmonics)

This is a 2 meter braid and shielded cable connecting the modem to the laptop. The cable has a D-25 pin metallic connector at the modem end and a D-9 pin metallic connector at the laptop end. The cable was bundled to a length of 1 meter. The shield of the cable was grounded to the chassis via the connectors.

**Cable 5** (Only Connected for Tx and Rx Harmonics)

This is a 2 meter unshielded cable connecting the laptop to the AC Adapter. The cable has a 1/8 inch power connector at the laptop end and is hard wired into the AC Adapter. The cable was bundled to a length of 1 meter.

**Cable 6** (Only Connected for all other tests)

This is a 2 meter unshielded cable connecting the access point to the AC Adapter. The cable has a 1/8 inch power connector at the access point end and is hard wired into the AC Adapter.

**Cable 7** (Only Connected for all other tests)

This is a 2 meter unshielded cable connecting the laptop to the AC Adapter. The cable has a 1/8 inch power connector at the laptop end and is hard wired into the AC Adapter.

## 5. LISTS OF EUT, ACCESSORIES AND TEST EQUIPMENT

### 5.1 EUT and Accessory List

| EQUIPMENT                     | MANUFACTURER                        | MODEL NUMBER         | SERIAL NUMBER                    | FCC ID              |
|-------------------------------|-------------------------------------|----------------------|----------------------------------|---------------------|
| RADIO 802.11 b/g PHASER (EUT) | O' NEIL PRODUCT DEVELOPMENT         | WL261176             | N/A                              | <b>LGYWL261176</b>  |
| AC ADAPTER FOR EUT            | FAIRWAY ELECTRONICS COMPANY LIMITED | VE20-120             | 2K                               | N/A                 |
| MODEM                         | HAYES                               | 231AA                | A05631003823                     | <b>BFJ9D9231AA</b>  |
| PRINTER                       | CITIZEN                             | LSP-10               | 1184398-7Z                       | <b>DLK66TLSP-10</b> |
| ACCESS POINT                  | LINKSYS                             | WRT54GS VER. 6       | CGN91F960529                     | N/A                 |
| AC ADAPTER FOR ACCESS POINT   | LINKSYS                             | AD 12 / 0.5C         | N/A                              | N/A                 |
| LAPTOP                        | DELL                                | PP11L                | CN0D4571-48643-589-0382          | <b>DoC</b>          |
| AC ADAPTER FOR LAPTOP         | DELL                                | ADP-65JB B           | CN-0F8834-48661-56A-2ROA         | N/A                 |
| PCMCIA EXTENDER CARD          | KAITEK ENGINEERING                  | PCMCIA EXTENDER CARD | B/N's: 21-0193104 and 34-0193100 | N/A                 |
| ANTENNA FOR LP3-L             | O'NEIL PRODUCT DEVELOPMENT          | ANTENNA_LEG-B        | N/A                              | N/A                 |
| ANTENNA FOR MF2t-L            | O'NEIL PRODUCT DEVELOPMENT          | ANTENNA_LEG-C2       | N/A                              | N/A                 |
| ANTENNA FOR MF4t-L            | O'NEIL PRODUCT DEVELOPMENT          | ANTENNA_LEG-C2       | N/A                              | N/A                 |
| ANTENNA FOR OC2-L             | O'NEIL PRODUCT DEVELOPMENT          | ANTENNA_LEG-E        | N/A                              | N/A                 |
| THERMAL PRINTER               | O'NEIL PRODUCT DEVELOPMENT          | LP3-L                | N/A                              | <b>DoC</b>          |
| THERMAL PRINTER               | O'NEIL PRODUCT DEVELOPMENT          | MF2t-L               | N/A                              | <b>DoC</b>          |
| THERMAL PRINTER               | O'NEIL PRODUCT DEVELOPMENT          | MF4t-L               | N/A                              | <b>DoC</b>          |
| THERMAL PRINTER               | O'NEIL PRODUCT DEVELOPMENT          | OC2-L                | N/A                              | <b>DoC</b>          |

**5.2 EMI Test Equipment for Brea Facility – Part 1**

| <b>EQUIPMENT TYPE</b>   | <b>MANU-FACTURER</b>   | <b>MODEL NUMBER</b> | <b>SERIAL NUMBER</b> | <b>CALIBRATION DATE</b> | <b>CALIBRATION DUE DATE</b> |
|---|------------------------|---------------------|----------------------|-------------------------|-----------------------------|
| <b>GENERAL TEST EQUIPMENT USED FOR ALL RF EMISSIONS TESTS</b> |                        |                     |                      |                         |                             |
| EMI Receiver  | Rohde & Schwarz        | ESIB40              | 100194               | November 18, 2005       | Nov. 18, 2007               |
| Computer  | Hewlett Packard        | 4530                | US91912319           | N/A                     | N/A                         |
| Monitor   | Hewlett Packard        | D5258A              | TW74500641           | N/A                     | N/A                         |
| <b>RF RADIATED EMISSIONS TEST EQUIPMENT BELOW 1 GHz</b>       |                        |                     |                      |                         |                             |
| Radiated Emissions Data Capture Program                       | Compatible Electronics | 2.0                 | N/A                  | N/A                     | N/A                         |
| Loop Antenna  | Com-Power              | AL-130              | 17089                | September 21, 2005      | Sept. 21, 2007              |
| Biconical Antenna   | Com-Power              | AB-900              | 15227                | March 9, 2006           | March 9, 2007               |
| Log Periodic Antenna  | Com-Power              | AL-100              | 16060                | July 17, 2006           | July 17, 2007               |
| Preamplifier  | Com-Power              | PA-102              | 1017                 | January 19, 2006        | Jan. 19, 2007               |
| <b>RF CONDUCTED EMISSIONS TEST EQUIPMENT</b>                  |                        |                     |                      |                         |                             |
| Emissions Program   | Compatible Electronics | 2.3 (SR19)          | N/A                  | N/A                     | N/A                         |
| LISN  | Com Power              | LI-215              | 12090                | September 21, 2006      | Sept. 21, 2007              |
| LISN  | Com Power              | LI-215              | 12076                | September 21, 2006      | Sept. 21, 2007              |
| Transient Limiter   | Seaward                | 252A910             | K39-0220             | September 15, 2006      | Sept. 15, 2007              |

**5.3 EMI Test Equipment for Brea Facility – Part 2**

| <b>EQUIPMENT TYPE</b>                                   | <b>MANU-FACTURER</b>      | <b>MODEL NUMBER</b> | <b>SERIAL NUMBER</b> | <b>CALIBRATION DATE</b> | <b>CALIBRATION CYCLE</b> |
|---|---------------------------|---------------------|----------------------|-------------------------|--------------------------|
| <b>RF RADIATED EMISSIONS TEST EQUIPMENT ABOVE 1 GHz</b> |                           |                     |                      |                         |                          |
| Horn Antenna  | Antenna Research          | DRG-118/A           | 1053                 | March 6, 2006           | March 6, 2007            |
| Microwave Preamplifier                                  | Com-Power                 | PA-122              | 181917               | January 20, 2006        | Jan. 20, 2007            |
| Microwave Preamplifier                                  | Com-Power                 | PA-840              | 711919               | January 20, 2006        | Jan. 20, 2007            |
| Horn Antenna  | Com-Power                 | AH826               | 71957                | December 12, 2005       | Dec. 12, 2007            |
| Antenna Mast  | EMCO                      | 2070                | N/A                  | N/A                     | N/A                      |
| Multi-Device Controller                                 | EMCO                      | 2090                | 9609-1176            | N/A                     | N/A                      |
| <b>POWER MEASUREMENT TEST EQUIPMENT</b>                 |                           |                     |                      |                         |                          |
| RF Peak Power Meter / Analyzer                          | Boonton Electronics Corp. | 4500A-01-30         | 1282                 | May 4, 2006             | May 4, 2007              |
| Peak Power Sensor                                       | Boonton Electronics Corp. | 57318               | 3723                 | May 8, 2006             | May 8, 2007              |


**6. TEST SITE DESCRIPTION****6.1 Test Facility Description**

Please refer to section 2.1 and 7.1 of this report for EMI test location.

**6.2 EUT Mounting, Bonding and Grounding**

The EUT was mounted on a 1.0 by 1.5 meter non-conductive table 0.8 meters above the ground plane.

The EUT was not grounded.

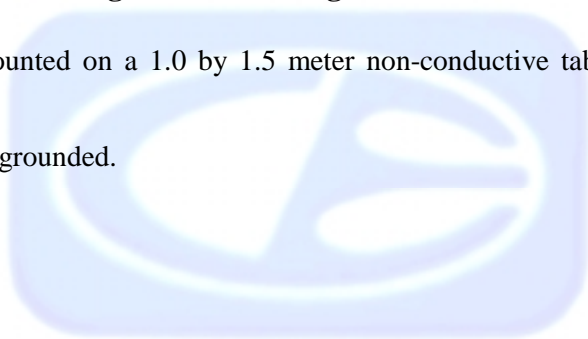

**7. CHARACTERISTICS OF THE TRANSMITTER****7.1 Antenna Gain**

The antenna LEG-B has a gain of 3 dBi  
The antenna LEG-C2 has a gain of 2.4 dBi  
The antenna LEG-E has a gain of 0 dBi



## 8. TEST PROCEDURES

The following sections describe the test methods and the specifications for the tests. Test results are also included in this section.

### 8.1 RF Emissions

#### 8.1.1 Conducted Emissions Test

The EMI Receiver was used as a measuring meter. The data was collected with the spectrum analyzer in the peak detect mode with the "Max Hold" feature activated. The quasi-peak was used only where indicated in the data sheets. A transient limiter was used for the protection of the spectrum analyzer input stage, and the offset was adjusted accordingly to read the actual data measured. The LISN output was measured using the EMI Receiver. The output of the second LISN was terminated by a 50 ohm termination. The effective measurement bandwidth used for this test was 9 kHz.

Please see section 6.2 of this report for mounting, bonding and grounding of the EUT. The EUT was powered through the LISN, which was bonded to the ground plane. The LISN power was filtered and the filter was bonded to the ground plane. The EUT was set up with the minimum distances from any conductive surfaces as specified in ANSI C63.4. The excess power cord was wrapped in a figure eight pattern to form a bundle not exceeding 0.4 meters in length.

The conducted emissions from the EUT were maximized for operating mode as well as cable placement. The final data was collected under program control by the Compatible Electronics conducted emissions software in several overlapping sweeps by running the EMI Receiver at a minimum scan rate of 10 seconds per octave. The final qualification data is located in Appendix E.

#### **Test Results:**

The EUT complies with the **Class B** limits of CFR Title 47, Part 15 Subpart B; and the limits of CFR Title 47, Part 15, Subpart C, Section 15.207 for conducted emissions.



### 8.1.2 Radiated Emissions (Spurious and Harmonics) Test

The spectrum analyzer and EMI Receiver were used as a measuring meter along with the quasi-peak adapter. Amplifiers were used to increase the sensitivity of the instrument. The Com Power Preamplifiers Model: PA-102 and PA-103 were used for frequencies from 30 MHz to 1 GHz, the Com-Power Microwave Preamplifier Model: PA-122 was used for frequencies from 1 GHz to 18 GHz, and the Com Power Microwave Preamplifier Model: PA-840 was used for frequencies from 18 GHz to 25 GHz. The spectrum analyzer and EMI Receiver were used in the peak detect mode with the "Max Hold" feature activated. In this mode, the spectrum analyzer and/or EMI Receiver records the highest measured reading over all the sweeps.

The quasi-peak adapter was used only for those readings which are marked accordingly on the data sheets.

The frequencies above 1 GHz were averaged manually by narrowing the video filter down to 10 Hz and putting the sweep time on AUTO on the spectrum analyzer to keep the amplitude reading calibrated.

The measurement bandwidths and transducers used for the radiated emissions test were:

| <b>FREQUENCY RANGE</b> | <b>EFFECTIVE MEASUREMENT BANDWIDTH</b> | <b>TRANSDUCER</b>    |
|------------------------|--|----------------------|
| 10 kHz to 150 kHz      | 200 Hz                                 | Active Loop Antenna  |
| 150 kHz to 30 MHz      | 9 kHz                                  | Active Loop Antenna  |
| 30 MHz to 300 MHz      | 120 kHz                                | Biconical Antenna    |
| 300 MHz to 1 GHz       | 120 kHz                                | Log Periodic Antenna |
| 1 GHz to 25 GHz        | 1 MHz                                  | Horn Antenna         |


The open field test site of Compatible Electronics, Inc. was used for radiated emission testing. This test site is set up according to ANSI C63.4. Please see section 6.2 of this report for mounting, bonding and grounding of the EUT. The turntable supporting the EUT is remote controlled using a motor. The turntable permits EUT rotation of 360 degrees in order to maximize emissions. Also, the antenna mast allows height variation of the antenna from 1 meter to 4 meters. Data was collected in the worst case (highest emission) configuration of the EUT by the Radiated Emission Manual Test software. At each reading, the EUT was rotated 360 degrees and the antenna height was varied from 1 to 4 meters (for E field radiated field strength). The gunsight method was used when measuring with the horn antenna in order to ensure accurate results.

**Radiated Emissions (Spurious and Harmonics) Test (con't)**

The presence of ambient signals was verified by turning the EUT off. In case an ambient signal was detected, the measurement bandwidth was reduced temporarily and verification was made that an additional adjacent peak did not exist. This ensures that the ambient signal does not hide any emissions from the EUT. The EUT was tested at a 3 meter test distance to obtain the final data.

**Test Results:**

The EUT complies with the **Class B** limits of CFR Title 47, Part 15, Subpart B; and Subpart C, sections 15.205, 15.209, and 15.247 (d). Please see the data sheets located in Appendix E.

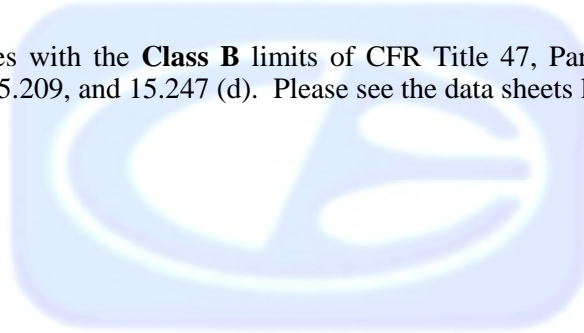

## 8.2 6 dB Bandwidth

The 6 dB bandwidth was measured using the EMI Receiver. The bandwidth was measured using a direct connection from the RF out on the EUT. The resolution bandwidth was 100 kHz and the video bandwidth was 300 kHz.

### **Test Results:**

This test complies with the relevant requirements of CFR Title 47, Part 15, Subpart C section 15.247 (a)(2).

## 8.3 Peak Output Power

The Peak Output Power was taken using the power meter and power sensor. The EUT was directly connected to the power sensor, which was directly connected to the power meter. The Peak Output Power was then taken.

### **Test Results:**

This test complies with the relevant requirements of CFR Title 47, Part 15, Subpart C section 15.247 (b)(3).

## 8.4 RF Antenna Conducted Test

The RF antenna conducted test was taken using the EMI Receiver. The RF antenna conducted test was measured using a direct connection from the RF out on the EUT into the input of the analyzer. The resolution bandwidth was 100 kHz, and the video bandwidth 300 kHz. The spans were wide enough to include all the harmonics and emissions that were produced by the intentional radiator.

### **Test Results:**

This test complies with the relevant requirements of CFR Title 47, Part 15, Subpart C section 15.247 (d).

## 8.5 Spectral Density Output

The spectral density output was measured using the EMI Receiver. The spectral density output was measured using a direct connection from the RF out on the EUT into the input of the EMI Receiver. The resolution bandwidth was 3 kHz, and the video bandwidth was 10 kHz. The highest 1.5 MHz of the signal was used as the frequency span with the sweep rate being 1 second for every 3 kHz of span.

### Test Results:

This test complies with the relevant requirements of CFR Title 47, Part 15, Subpart C section 15.247 (e).

## 8.6 RF Band Edges

The RF band edges were taken at the start of the restricted bands (2390 MHz and 2483.5 MHz). The readings taken were also averaged by the EMI Receiver. Data sheets are included in Appendix E, which compares the reading from the EMI Receiver to the spec limit.

### Test Results:

The EUT complies with the relevant requirements of FCC Title 47, Part 15, Subpart C section 15.247 (d). The RF power at the restricted bands closest to the band edges at 2390 MHz and 2483.5 MHz meet the limits of section 15.209. Please see the data sheets located in Appendix E.

**9. CONCLUSIONS**

The Radio 802.11 b/g Phaser Model: WL261176 meets all of the specification limits defined in FCC Title 47, Part 15, Subpart B; and Subpart C, sections 15.205, 15.209, and 15.247.





**APPENDIX A**

***LABORATORY RECOGNITIONS***

---

**Brea Division**  
114 Olinda Drive  
Brea, CA 92823  
(714) 579-0500

**Agoura Division**  
2337 Troutdale Drive  
Agoura, CA 91301  
(818) 597-0600

**Silverado Division**  
19121 El Toro Road  
Silverado, CA 92676  
(949) 589-0700

**Lake Forest Division**  
20621 Pascal Way  
Lake Forest, CA 92630  
(949) 587-0400

---

## ***LABORATORY RECOGNITIONS***

### **Compatible Electronics has the following agency accreditations:**

National Voluntary Laboratory Accreditation Program - Lab Code: 200528-0

Voluntary Control Council for Interference - Registration Numbers: R-983, C-1026, R-984 and C-1027

Bureau of Standards and Metrology Inspection - Reference Number: SL2-IN-E-1031


Conformity Assessment Body for the EMC Directive Under the US/EU MRA Appointed by NIST

### **Compatible Electronics is recognized or on file with the following agencies:**

Federal Communications Commission

Industry Canada

Radio-Frequency Technologies (Competent Body)

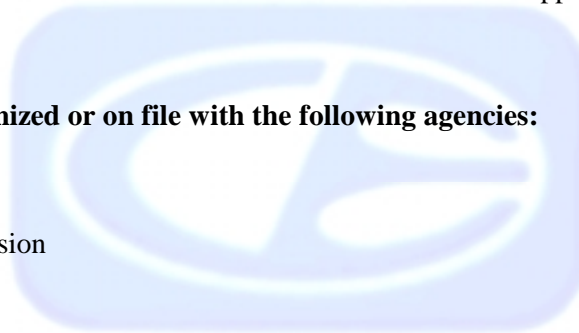

**APPENDIX B**

***MODIFICATIONS TO THE EUT***




---

## **MODIFICATIONS TO THE EUT**

The modifications listed below were made to the EUT to pass FCC Subpart B and Subpart C specifications.

All the rework described below was implemented during the test in a method that could be reproduced in all the units by the manufacturer.

No modifications were made to the EUT during the testing.

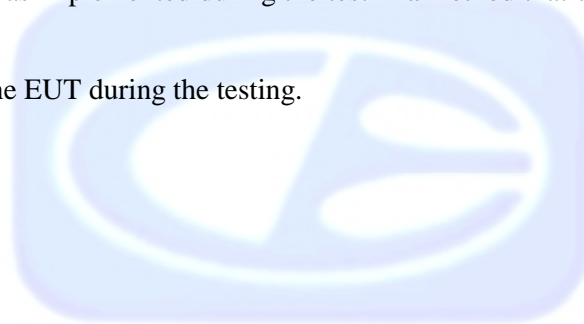

  
**APPENDIX C*****ADDITIONAL MODELS COVERED  
UNDER THIS REPORT***

---

**Brea Division**  
114 Olinda Drive  
Brea, CA 92823  
(714) 579-0500

**Agoura Division**  
2337 Troutdale Drive  
Agoura, CA 91301  
(818) 597-0600

**Silverado Division**  
19121 El Toro Road  
Silverado, CA 92676  
(949) 589-0700

**Lake Forest Division**  
20621 Pascal Way  
Lake Forest, CA 92630  
(949) 587-0400

## **ADDITIONAL MODELS COVERED UNDER THIS REPORT**

USED FOR THE PRIMARY TEST

Radio 802.11 b/g Phaser  
Model: WL261176  
S/N: N/A

There were no additional models covered under this report.






**APPENDIX D**


***DIAGRAMS, CHARTS, AND PHOTOS***

**FIGURE 1: CONDUCTED EMISSIONS TEST SETUP**

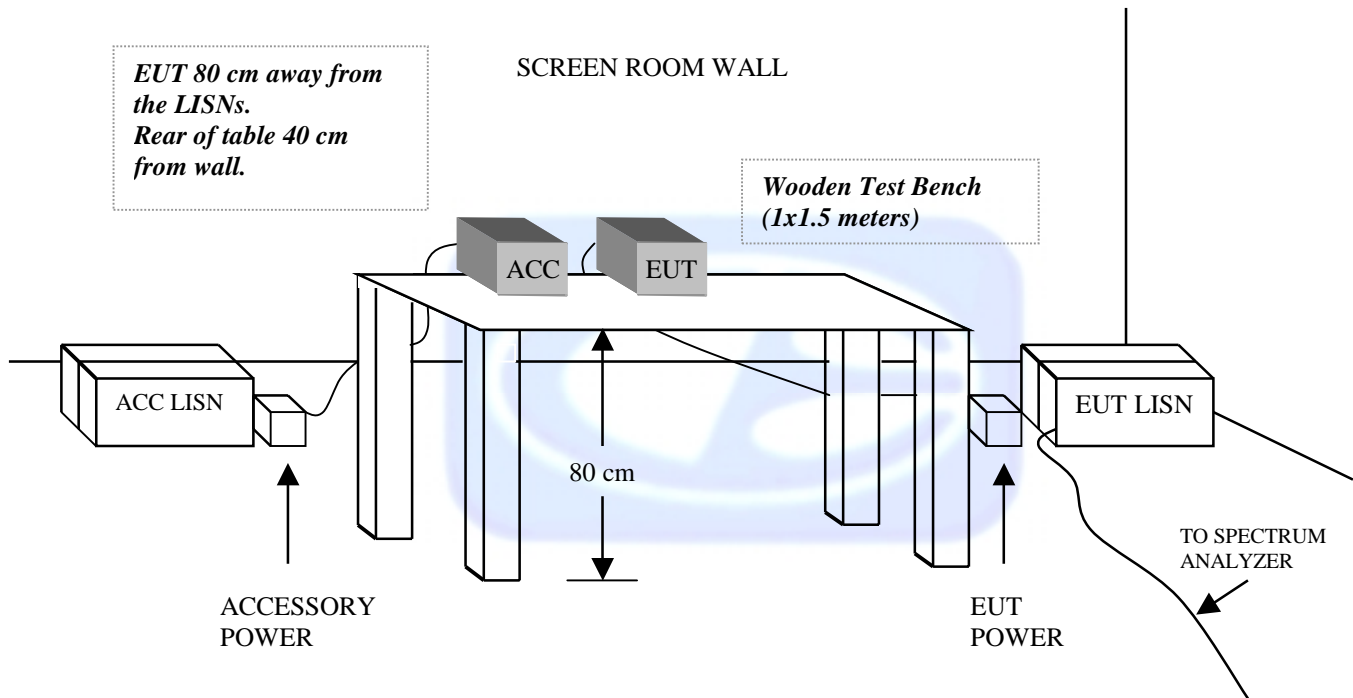

**FIGURE 2: PLOT MAP AND LAYOUT OF 3 METER RADIATED SITE**

**OPEN LAND > 15 METERS**

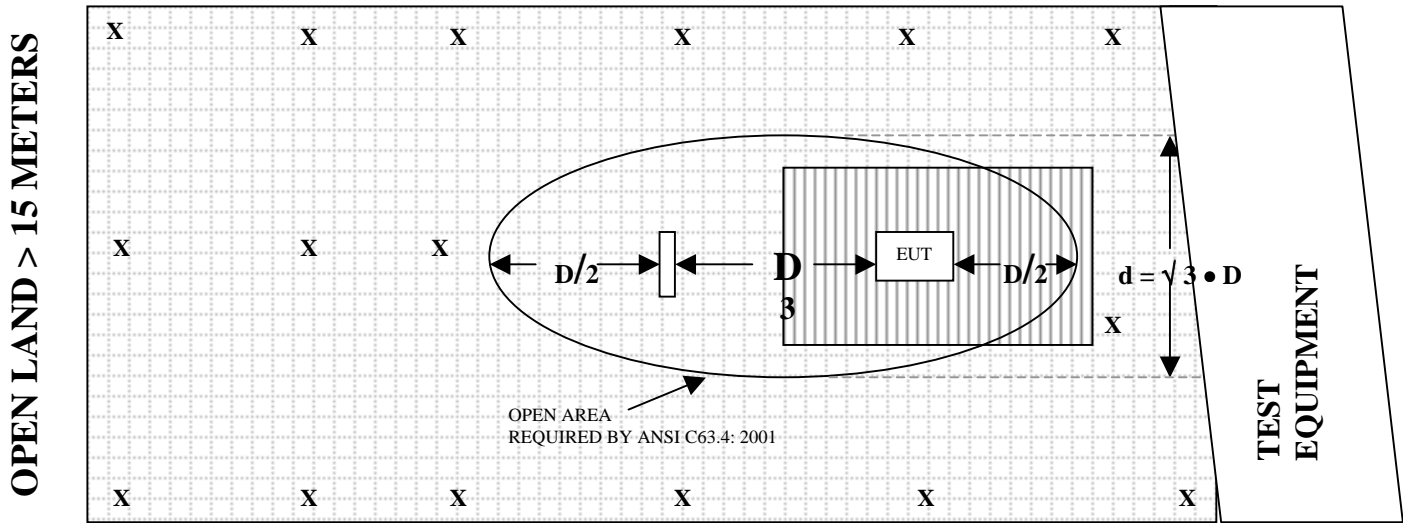

**OPEN LAND > 15 METERS**

- |          |                          |  |                 |
|----------|--------------------------|--|-----------------|
| <b>X</b> | = GROUND RODS            |  | = GROUND SCREEN |
| <b>D</b> | = TEST DISTANCE (meters) |  | = WOOD COVER    |



**FRONT VIEW**

O' NEIL PRODUCT DEVELOPMENT  
RADIO 802.11 b/g PHASER  
MODEL: WL261176

FCC SUBPART B and C – RADIATED EMISSIONS – LAB B – IN THE LP3-L PRINTER

**PHOTOGRAPH SHOWING THE EUT CONFIGURATION  
FOR MAXIMUM EMISSIONS**

**Brea Division**  
114 Olinda Drive  
Brea, CA 92823  
(714) 579-0500

**Agoura Division**  
2337 Troutdale Drive  
Agoura, CA 91301  
(818) 597-0600

**Silverado Division**  
19121 El Toro Road  
Silverado, CA 92676  
(949) 589-0700

**Lake Forest Division**  
20621 Pascal Way  
Lake Forest, CA 92630  
(949) 587-0400





**REAR VIEW**

O' NEIL PRODUCT DEVELOPMENT  
RADIO 802.11 b/g PHASER  
MODEL: WL261176

FCC SUBPART B and C – RADIATED EMISSIONS – LAB B – IN THE LP3-L PRINTER

**PHOTOGRAPH SHOWING THE EUT CONFIGURATION  
FOR MAXIMUM EMISSIONS**

**Brea Division**  
114 Olinda Drive  
Brea, CA 92823  
(714) 579-0500

**Agoura Division**  
2337 Troutdale Drive  
Agoura, CA 91301  
(818) 597-0600

**Silverado Division**  
19121 El Toro Road  
Silverado, CA 92676  
(949) 589-0700

**Lake Forest Division**  
20621 Pascal Way  
Lake Forest, CA 92630  
(949) 587-0400





**FRONT VIEW**

O' NEIL PRODUCT DEVELOPMENT  
RADIO 802.11 b/g PHASER  
MODEL: WL261176

FCC SUBPART B and C – RADIATED EMISSIONS – LAB D – IN THE LP3-L PRINTER

**PHOTOGRAPH SHOWING THE EUT CONFIGURATION  
FOR MAXIMUM EMISSIONS**



**REAR VIEW**

O' NEIL PRODUCT DEVELOPMENT  
RADIO 802.11 b/g PHASER  
MODEL: WL261176

FCC SUBPART B and C – RADIATED EMISSIONS – LAB D – IN THE LP3-L PRINTER

**PHOTOGRAPH SHOWING THE EUT CONFIGURATION  
FOR MAXIMUM EMISSIONS**

Brea Division  
114 Olinda Drive  
Brea, CA 92823  
(714) 579-0500

Agoura Division  
2337 Troutdale Drive  
Agoura, CA 91301  
(818) 597-0600

Silverado Division  
19121 El Toro Road  
Silverado, CA 92676  
(949) 589-0700

Lake Forest Division  
20621 Pascal Way  
Lake Forest, CA 92630  
(949) 587-0400



**FRONT VIEW**

O' NEIL PRODUCT DEVELOPMENT  
RADIO 802.11 b/g PHASER  
MODEL: WL261176

FCC SUBPART B and C – RADIATED EMISSIONS – LAB B – IN THE MF2t-L PRINTER

**PHOTOGRAPH SHOWING THE EUT CONFIGURATION  
FOR MAXIMUM EMISSIONS**

Brea Division  
114 Olinda Drive  
Brea, CA 92823  
(714) 579-0500

Agoura Division  
2337 Troutdale Drive  
Agoura, CA 91301  
(818) 597-0600

Silverado Division  
19121 El Toro Road  
Silverado, CA 92676  
(949) 589-0700

Lake Forest Division  
20621 Pascal Way  
Lake Forest, CA 92630  
(949) 587-0400





**REAR VIEW**

O' NEIL PRODUCT DEVELOPMENT  
RADIO 802.11 b/g PHASER  
MODEL: WL261176

FCC SUBPART B and C – RADIATED EMISSIONS – LAB B – IN THE MF2t-L PRINTER

**PHOTOGRAPH SHOWING THE EUT CONFIGURATION  
FOR MAXIMUM EMISSIONS**

Brea Division  
114 Olinda Drive  
Brea, CA 92823  
(714) 579-0500

Agoura Division  
2337 Troutdale Drive  
Agoura, CA 91301  
(818) 597-0600

Silverado Division  
19121 El Toro Road  
Silverado, CA 92676  
(949) 589-0700

Lake Forest Division  
20621 Pascal Way  
Lake Forest, CA 92630  
(949) 587-0400



**FRONT VIEW**

O' NEIL PRODUCT DEVELOPMENT  
RADIO 802.11 b/g PHASER  
MODEL: WL261176

FCC SUBPART B and C – RADIATED EMISSIONS – LAB D – IN THE MF2t-L PRINTER

**PHOTOGRAPH SHOWING THE EUT CONFIGURATION  
FOR MAXIMUM EMISSIONS**

**Brea Division**  
114 Olinda Drive  
Brea, CA 92823  
(714) 579-0500

**Agoura Division**  
2337 Troutdale Drive  
Agoura, CA 91301  
(818) 597-0600

**Silverado Division**  
19121 El Toro Road  
Silverado, CA 92676  
(949) 589-0700

**Lake Forest Division**  
20621 Pascal Way  
Lake Forest, CA 92630  
(949) 587-0400



**REAR VIEW**

O' NEIL PRODUCT DEVELOPMENT  
RADIO 802.11 b/g PHASER  
MODEL: WL261176

FCC SUBPART B and C – RADIATED EMISSIONS – LAB D – IN THE MF2t-L PRINTER

**PHOTOGRAPH SHOWING THE EUT CONFIGURATION  
FOR MAXIMUM EMISSIONS**

**Brea Division**  
114 Olinda Drive  
Brea, CA 92823  
(714) 579-0500

**Agoura Division**  
2337 Troutdale Drive  
Agoura, CA 91301  
(818) 597-0600

**Silverado Division**  
19121 El Toro Road  
Silverado, CA 92676  
(949) 589-0700

**Lake Forest Division**  
20621 Pascal Way  
Lake Forest, CA 92630  
(949) 587-0400





**FRONT VIEW**

O' NEIL PRODUCT DEVELOPMENT  
RADIO 802.11 b/g PHASER  
MODEL: WL261176

FCC SUBPART B and C – RADIATED EMISSIONS – LAB B – IN THE MF4t-L PRINTER

**PHOTOGRAPH SHOWING THE EUT CONFIGURATION  
FOR MAXIMUM EMISSIONS**



**REAR VIEW**

**O' NEIL PRODUCT DEVELOPMENT**

**RADIO 802.11 b/g PHASER**

**MODEL: WL261176**

**FCC SUBPART B and C – RADIATED EMISSIONS – LAB B – IN THE MF4t-L PRINTER**

**PHOTOGRAPH SHOWING THE EUT CONFIGURATION  
FOR MAXIMUM EMISSIONS**

**Brea Division**  
114 Olinda Drive  
Brea, CA 92823  
(714) 579-0500

**Agoura Division**  
2337 Troutdale Drive  
Agoura, CA 91301  
(818) 597-0600

**Silverado Division**  
19121 El Toro Road  
Silverado, CA 92676  
(949) 589-0700

**Lake Forest Division**  
20621 Pascal Way  
Lake Forest, CA 92630  
(949) 587-0400





**FRONT VIEW**

O' NEIL PRODUCT DEVELOPMENT  
RADIO 802.11 b/g PHASER  
MODEL: WL261176

FCC SUBPART B and C – RADIATED EMISSIONS – LAB D – IN THE MF4t-L PRINTER

**PHOTOGRAPH SHOWING THE EUT CONFIGURATION  
FOR MAXIMUM EMISSIONS**

**Brea Division**  
114 Olinda Drive  
Brea, CA 92823  
(714) 579-0500

**Agoura Division**  
2337 Troutdale Drive  
Agoura, CA 91301  
(818) 597-0600

**Silverado Division**  
19121 El Toro Road  
Silverado, CA 92676  
(949) 589-0700

**Lake Forest Division**  
20621 Pascal Way  
Lake Forest, CA 92630  
(949) 587-0400



**REAR VIEW**

O' NEIL PRODUCT DEVELOPMENT  
RADIO 802.11 b/g PHASER  
MODEL: WL261176

FCC SUBPART B and C – RADIATED EMISSIONS – LAB D – IN THE MF4t-L PRINTER

**PHOTOGRAPH SHOWING THE EUT CONFIGURATION  
FOR MAXIMUM EMISSIONS**

**Brea Division**  
114 Olinda Drive  
Brea, CA 92823  
(714) 579-0500

**Agoura Division**  
2337 Troutdale Drive  
Agoura, CA 91301  
(818) 597-0600

**Silverado Division**  
19121 El Toro Road  
Silverado, CA 92676  
(949) 589-0700

**Lake Forest Division**  
20621 Pascal Way  
Lake Forest, CA 92630  
(949) 587-0400



**FRONT VIEW**

O' NEIL PRODUCT DEVELOPMENT  
RADIO 802.11 b/g PHASER  
MODEL: WL261176

FCC SUBPART B and C – RADIATED EMISSIONS – LAB B – IN THE OC2-L PRINTER

**PHOTOGRAPH SHOWING THE EUT CONFIGURATION  
FOR MAXIMUM EMISSIONS**





**REAR VIEW**

O' NEIL PRODUCT DEVELOPMENT  
RADIO 802.11 b/g PHASER  
MODEL: WL261176

FCC SUBPART B and C – RADIATED EMISSIONS – LAB B – IN THE OC2-L PRINTER

**PHOTOGRAPH SHOWING THE EUT CONFIGURATION  
FOR MAXIMUM EMISSIONS**

**Brea Division**  
114 Olinda Drive  
Brea, CA 92823  
(714) 579-0500

**Agoura Division**  
2337 Troutdale Drive  
Agoura, CA 91301  
(818) 597-0600

**Silverado Division**  
19121 El Toro Road  
Silverado, CA 92676  
(949) 589-0700

**Lake Forest Division**  
20621 Pascal Way  
Lake Forest, CA 92630  
(949) 587-0400



**FRONT VIEW**

O' NEIL PRODUCT DEVELOPMENT  
RADIO 802.11 b/g PHASER  
MODEL: WL261176

FCC SUBPART B and C – RADIATED EMISSIONS – LAB D – IN THE OC2-L PRINTER

**PHOTOGRAPH SHOWING THE EUT CONFIGURATION  
FOR MAXIMUM EMISSIONS**

Brea Division  
114 Olinda Drive  
Brea, CA 92823  
(714) 579-0500

Agoura Division  
2337 Troutdale Drive  
Agoura, CA 91301  
(818) 597-0600

Silverado Division  
19121 El Toro Road  
Silverado, CA 92676  
(949) 589-0700

Lake Forest Division  
20621 Pascal Way  
Lake Forest, CA 92630  
(949) 587-0400



**REAR VIEW**

O' NEIL PRODUCT DEVELOPMENT  
RADIO 802.11 b/g PHASER  
MODEL: WL261176

FCC SUBPART B and C – RADIATED EMISSIONS – LAB D – IN THE OC2-L PRINTER

**PHOTOGRAPH SHOWING THE EUT CONFIGURATION  
FOR MAXIMUM EMISSIONS**

**Brea Division**  
114 Olinda Drive  
Brea, CA 92823  
(714) 579-0500

**Agoura Division**  
2337 Troutdale Drive  
Agoura, CA 91301  
(818) 597-0600

**Silverado Division**  
19121 El Toro Road  
Silverado, CA 92676  
(949) 589-0700

**Lake Forest Division**  
20621 Pascal Way  
Lake Forest, CA 92630  
(949) 587-0400





**FRONT VIEW**

**O' NEIL PRODUCT DEVELOPMENT**

**RADIO 802.11 b/g PHASER**

**MODEL: WL261176**

**FCC SUBPART B and C – CONDUCTED EMISSIONS – LAB D – IN THE LP3-L PRINTER**

**PHOTOGRAPH SHOWING THE EUT CONFIGURATION  
FOR MAXIMUM EMISSIONS**

**Brea Division**  
114 Olinda Drive  
Brea, CA 92823  
(714) 579-0500

**Agoura Division**  
2337 Troutdale Drive  
Agoura, CA 91301  
(818) 597-0600

**Silverado Division**  
19121 El Toro Road  
Silverado, CA 92676  
(949) 589-0700

**Lake Forest Division**  
20621 Pascal Way  
Lake Forest, CA 92630  
(949) 587-0400



**REAR VIEW**

**O' NEIL PRODUCT DEVELOPMENT**

**RADIO 802.11 b/g PHASER**

**MODEL: WL261176**

**FCC SUBPART B and C – CONDUCTED EMISSIONS – LAB D – IN THE LP3-L PRINTER**

**PHOTOGRAPH SHOWING THE EUT CONFIGURATION  
FOR MAXIMUM EMISSIONS**

**Brea Division**  
114 Olinda Drive  
Brea, CA 92823  
(714) 579-0500

**Agoura Division**  
2337 Troutdale Drive  
Agoura, CA 91301  
(818) 597-0600

**Silverado Division**  
19121 El Toro Road  
Silverado, CA 92676  
(949) 589-0700

**Lake Forest Division**  
20621 Pascal Way  
Lake Forest, CA 92630  
(949) 587-0400





**FRONT VIEW**

O' NEIL PRODUCT DEVELOPMENT  
RADIO 802.11 b/g PHASER  
MODEL: WL261176

FCC SUBPART B and C – CONDUCTED EMISSIONS – LAB D – IN THE MF2t-L PRINTER

**PHOTOGRAPH SHOWING THE EUT CONFIGURATION  
FOR MAXIMUM EMISSIONS**

**Brea Division**  
114 Olinda Drive  
Brea, CA 92823  
(714) 579-0500

**Agoura Division**  
2337 Troutdale Drive  
Agoura, CA 91301  
(818) 597-0600

**Silverado Division**  
19121 El Toro Road  
Silverado, CA 92676  
(949) 589-0700

**Lake Forest Division**  
20621 Pascal Way  
Lake Forest, CA 92630  
(949) 587-0400



**REAR VIEW**

**O' NEIL PRODUCT DEVELOPMENT**

**RADIO 802.11 b/g PHASER**

**MODEL: WL261176**

**FCC SUBPART B and C – CONDUCTED EMISSIONS – LAB D – IN THE MF2t-L PRINTER**

**PHOTOGRAPH SHOWING THE EUT CONFIGURATION  
FOR MAXIMUM EMISSIONS**

**Brea Division**  
114 Olinda Drive  
Brea, CA 92823  
(714) 579-0500

**Agoura Division**  
2337 Troutdale Drive  
Agoura, CA 91301  
(818) 597-0600

**Silverado Division**  
19121 El Toro Road  
Silverado, CA 92676  
(949) 589-0700

**Lake Forest Division**  
20621 Pascal Way  
Lake Forest, CA 92630  
(949) 587-0400



**FRONT VIEW**

O' NEIL PRODUCT DEVELOPMENT  
RADIO 802.11 b/g PHASER

MODEL: WL261176

FCC SUBPART B and C – CONDUCTED EMISSIONS – LAB D – IN THE MF4t-L PRINTER

**PHOTOGRAPH SHOWING THE EUT CONFIGURATION  
FOR MAXIMUM EMISSIONS**

**Brea Division**  
114 Olinda Drive  
Brea, CA 92823  
(714) 579-0500

**Agoura Division**  
2337 Troutdale Drive  
Agoura, CA 91301  
(818) 597-0600

**Silverado Division**  
19121 El Toro Road  
Silverado, CA 92676  
(949) 589-0700

**Lake Forest Division**  
20621 Pascal Way  
Lake Forest, CA 92630  
(949) 587-0400





**REAR VIEW**

O' NEIL PRODUCT DEVELOPMENT  
RADIO 802.11 b/g PHASER  
MODEL: WL261176

FCC SUBPART B and C – CONDUCTED EMISSIONS – LAB D – IN THE MF4t-L PRINTER

**PHOTOGRAPH SHOWING THE EUT CONFIGURATION  
FOR MAXIMUM EMISSIONS**



**FRONT VIEW**

O' NEIL PRODUCT DEVELOPMENT  
RADIO 802.11 b/g PHASER

MODEL: WL261176

FCC SUBPART B and C – CONDUCTED EMISSIONS – LAB D – IN THE OC2-L PRINTER

**PHOTOGRAPH SHOWING THE EUT CONFIGURATION  
FOR MAXIMUM EMISSIONS**

---

**Brea Division**  
114 Olinda Drive  
Brea, CA 92823  
(714) 579-0500

**Agoura Division**  
2337 Troutdale Drive  
Agoura, CA 91301  
(818) 597-0600

**Silverado Division**  
19121 El Toro Road  
Silverado, CA 92676  
(949) 589-0700

**Lake Forest Division**  
20621 Pascal Way  
Lake Forest, CA 92630  
(949) 587-0400



**REAR VIEW**

**O' NEIL PRODUCT DEVELOPMENT**

**RADIO 802.11 b/g PHASER**

**MODEL: WL261176**

**FCC SUBPART B and C – CONDUCTED EMISSIONS – LAB D – IN THE OC2-L PRINTER**

**PHOTOGRAPH SHOWING THE EUT CONFIGURATION  
FOR MAXIMUM EMISSIONS**

**Brea Division**  
114 Olinda Drive  
Brea, CA 92823  
(714) 579-0500

**Agoura Division**  
2337 Troutdale Drive  
Agoura, CA 91301  
(818) 597-0600

**Silverado Division**  
19121 El Toro Road  
Silverado, CA 92676  
(949) 589-0700

**Lake Forest Division**  
20621 Pascal Way  
Lake Forest, CA 92630  
(949) 587-0400

**COM-POWER AB-900****BICONICAL ANTENNA**

S/N: 15227

CALIBRATION DATE: MARCH 9, 2006

| <b>FREQUENCY<br/>(MHz)</b> | <b>FACTOR<br/>(dB)</b> | <b>FREQUENCY<br/>(MHz)</b> | <b>FACTOR<br/>(dB)</b> |
|----------------------------|------------------------|----------------------------|------------------------|
| 30                         | 11.12                  | 120                        | 13.50                  |
| 35                         | 10.17                  | 125                        | 12.63                  |
| 40                         | 9.75                   | 140                        | 12.20                  |
| 45                         | 12.22                  | 150                        | 11.85                  |
| 50                         | 13.28                  | 160                        | 13.25                  |
| 60                         | 11.36                  | 175                        | 15.74                  |
| 70                         | 7.95                   | 180                        | 16.23                  |
| 80                         | 5.95                   | 200                        | 16.79                  |
| 90                         | 7.62                   | 250                        | 16.47                  |
| 100                        | 10.89                  | 300                        | 17.49                  |

**COM-POWER AL-100****LOG PERIODIC ANTENNA**

S/N: 16060

CALIBRATION DATE: JULY 17, 2006

| <b>FREQUENCY<br/>(MHz)</b> | <b>FACTOR<br/>(dB)</b> | <b>FREQUENCY<br/>(MHz)</b> | <b>FACTOR<br/>(dB)</b> |
|----------------------------|------------------------|----------------------------|------------------------|
| 300                        | 13.58                  | 700                        | 20.49                  |
| 400                        | 14.53                  | 800                        | 20.13                  |
| 500                        | 15.36                  | 900                        | 22.15                  |
| 600                        | 18.29                  | 1000                       | 22.76                  |



**COM-POWER PA-102****PREAMPLIFIER**

S/N: 1017

CALIBRATION DATE: JANUARY 19, 2006

| <b>FREQUENCY<br/>(MHz)</b> | <b>FACTOR<br/>(dB)</b> | <b>FREQUENCY<br/>(MHz)</b> | <b>FACTOR<br/>(dB)</b> |
|----------------------------|------------------------|----------------------------|------------------------|
| 30                         | 38.3                   | 300                        | 38.4                   |
| 40                         | 38.4                   | 350                        | 38.4                   |
| 50                         | 38.3                   | 400                        | 38.0                   |
| 60                         | 38.4                   | 450                        | 38.1                   |
| 70                         | 38.5                   | 500                        | 37.5                   |
| 80                         | 38.4                   | 550                        | 38.0                   |
| 90                         | 38.4                   | 600                        | 38.0                   |
| 100                        | 38.4                   | 650                        | 37.7                   |
| 125                        | 38.1                   | 700                        | 37.7                   |
| 150                        | 38.5                   | 750                        | 37.7                   |
| 175                        | 38.4                   | 800                        | 37.0                   |
| 200                        | 38.3                   | 850                        | 37.2                   |
| 225                        | 38.3                   | 900                        | 36.6                   |
| 250                        | 38.1                   | 950                        | 36.3                   |
| 275                        | 38.3                   | 1000                       | 36.3                   |

**COM-POWER PA-122****PREAMPLIFIER**

S/N: 181917

CALIBRATION DATE: JANUARY 20, 2006

| <b>FREQUENCY<br/>(GHz)</b> | <b>FACTOR<br/>(dB)</b> | <b>FREQUENCY<br/>(GHz)</b> | <b>FACTOR<br/>(dB)</b> |
|----------------------------|------------------------|----------------------------|------------------------|
| 1.0                        | 34.697                 | 10.0                       | 36.558                 |
| 1.5                        | 33.817                 | 10.5                       | 35.048                 |
| 2.0                        | 33.587                 | 11.0                       | 33.258                 |
| 2.5                        | 33.804                 | 11.5                       | 32.960                 |
| 3.0                        | 33.850                 | 12.0                       | 33.312                 |
| 3.5                        | 33.943                 | 12.5                       | 33.836                 |
| 4.0                        | 34.399                 | 13.0                       | 34.178                 |
| 4.5                        | 34.847                 | 13.5                       | 34.197                 |
| 5.0                        | 35.172                 | 14.0                       | 33.769                 |
| 5.5                        | 35.383                 | 14.5                       | 33.392                 |
| 6.0                        | 35.539                 | 15.0                       | 33.387                 |
| 6.5                        | 34.802                 | 15.5                       | 34.038                 |
| 7.0                        | 33.793                 | 16.0                       | 34.884                 |
| 7.5                        | 33.511                 | 16.5                       | 35.740                 |
| 8.0                        | 33.910                 | 17.0                       | 35.341                 |
| 8.5                        | 34.907                 | 17.5                       | 34.729                 |
| 9.0                        | 36.036                 | 18.0                       | 33.760                 |
| 9.5                        | 36.661                 |                            |                        |

**ANTENNA RESEARCH DRG-118/A****HORN ANTENNA**

S/N: 1053

CALIBRATION DATE: MARCH 6, 2006

| <b>FREQUENCY<br/>(GHz)</b> | <b>FACTOR<br/>(dB)</b> | <b>FREQUENCY<br/>(GHz)</b> | <b>FACTOR<br/>(dB)</b> |
|----------------------------|------------------------|----------------------------|------------------------|
| 1.0                        | 24.46                  | 10.0                       | 39.55                  |
| 1.5                        | 25.05                  | 10.5                       | 39.86                  |
| 2.0                        | 28.42                  | 11.0                       | 38.49                  |
| 2.5                        | 29.91                  | 11.5                       | 40.71                  |
| 3.0                        | 31.46                  | 12.0                       | 40.59                  |
| 3.5                        | 31.91                  | 12.5                       | 40.17                  |
| 4.0                        | 31.55                  | 13.0                       | 39.70                  |
| 4.5                        | 31.94                  | 13.5                       | 40.84                  |
| 5.0                        | 32.90                  | 14.0                       | 41.58                  |
| 5.5                        | 34.07                  | 14.5                       | 45.14                  |
| 6.0                        | 35.69                  | 15.0                       | 42.20                  |
| 6.5                        | 33.11                  | 15.5                       | 39.42                  |
| 7.0                        | 36.51                  | 16.0                       | 38.80                  |
| 7.5                        | 37.27                  | 16.5                       | 41.08                  |
| 8.0                        | 37.21                  | 17.0                       | 44.11                  |
| 8.5                        | 37.16                  | 17.5                       | 46.29                  |
| 9.0                        | 38.27                  | 18.0                       | 41.61                  |
| 9.5                        | 39.73                  |                            |                        |

**COM-POWER PA-840****MICROWAVE PREAMPLIFIER**

S/N: 711919

CALIBRATION DATE: JANUARY 20, 2006

| <b>FREQUENCY (GHz)</b> | <b>FACTOR (dB)</b> | <b>FREQUENCY (GHz)</b> | <b>FACTOR (dB)</b> |
|------------------------|--------------------|------------------------|--------------------|
| 18.0                   | 27.932             | 29.5                   | 27.310             |
| 18.5                   | 28.277             | 30.0                   | 26.860             |
| 19.0                   | 28.500             | 30.5                   | 27.450             |
| 19.5                   | 28.397             | 31.0                   | 27.448             |
| 20.0                   | 28.570             | 31.5                   | 27.868             |
| 20.5                   | 28.183             | 32.0                   | 27.922             |
| 21.0                   | 28.007             | 32.5                   | 27.866             |
| 21.5                   | 27.823             | 33.0                   | 27.314             |
| 22.0                   | 27.747             | 33.5                   | 27.403             |
| 22.5                   | 27.290             | 34.0                   | 26.687             |
| 23.0                   | 27.406             | 34.5                   | 26.390             |
| 23.5                   | 26.508             | 35.0                   | 26.365             |
| 24.0                   | 26.657             | 35.5                   | 26.347             |
| 24.5                   | 27.102             | 36.0                   | 26.138             |
| 25.0                   | 27.742             | 36.5                   | 26.481             |
| 25.5                   | 27.646             | 37.0                   | 26.236             |
| 26.0                   | 27.934             | 37.5                   | 27.029             |
| 26.5                   | 27.976             | 38.0                   | 27.883             |
| 27.0                   | 26.984             | 38.5                   | 29.021             |
| 27.5                   | 26.745             | 39.0                   | 29.408             |
| 28.0                   | 27.075             | 39.5                   | 28.429             |
| 28.5                   | 27.015             | 39.75                  | 27.704             |
| 29.0                   | 27.169             | 40.0                   | 26.441             |

**COM-POWER AH826****HORN ANTENNA**

S/N: 71957

CALIBRATION DATE: DECEMBER 12, 2005

| <b>FREQUENCY (GHz)</b> | <b>FACTOR (dB)</b> | <b>FREQUENCY (GHz)</b> | <b>FACTOR (dB)</b> |
|------------------------|--------------------|------------------------|--------------------|
| 18.0                   | 32.4               | 22.5                   | 32.0               |
| 18.5                   | 31.4               | 23.0                   | 32.2               |
| 19.0                   | 31.5               | 23.5                   | 31.2               |
| 19.5                   | 30.9               | 24.0                   | 33.1               |
| 20.0                   | 33.1               | 24.5                   | 33.1               |
| 20.5                   | 33.4               | 25.0                   | 33.4               |
| 21.0                   | 32.1               | 25.5                   | 33.4               |
| 21.5                   | 32.5               | 26.0                   | 32.9               |
| 22.0                   | 32.3               | 26.5                   | 33.6               |

**COM-POWER AL-130****LOOP ANTENNA**

S/N: 17089

CALIBRATION DATE: SEPTEMBER 21, 2005

| <b>FREQUENCY<br/>(MHz)</b> | <b>MAGNETIC<br/>(dB/m)</b> | <b>ELECTRIC<br/>(dB/m)</b> |
|----------------------------|----------------------------|----------------------------|
| 0.009                      | -42.84                     | 8.66                       |
| 0.01                       | -41.93                     | 9.57                       |
| 0.02                       | -41.29                     | 10.21                      |
| 0.05                       | -42.37                     | 9.13                       |
| 0.07                       | -41.8                      | 9.7                        |
| 0.1                        | -41.83                     | 9.67                       |
| 0.2                        | -44.13                     | 7.37                       |
| 0.3                        | -41.73                     | 9.77                       |
| 0.5                        | -41.8                      | 9.7                        |
| 0.7                        | -41.53                     | 9.97                       |
| 1                          | -41.46                     | 10.04                      |
| 2                          | -41.14                     | 10.36                      |
| 3                          | -41.26                     | 10.24                      |
| 4                          | -41.46                     | 10.04                      |
| 5                          | -41.10                     | 10.40                      |
| 10                         | -40.83                     | 10.67                      |
| 15                         | -41.47                     | 10.03                      |
| 20                         | -35.44                     | 16.06                      |
| 25                         | -42.37                     | 9.13                       |
| 30                         | -42.94                     | 8.56                       |