


CONDUCTED EMISSIONS

DATA SHEETS



3/02/2010 14:46:52

EMISSION LEVEL [dBuV] PEAK
Graph for Peak & Average

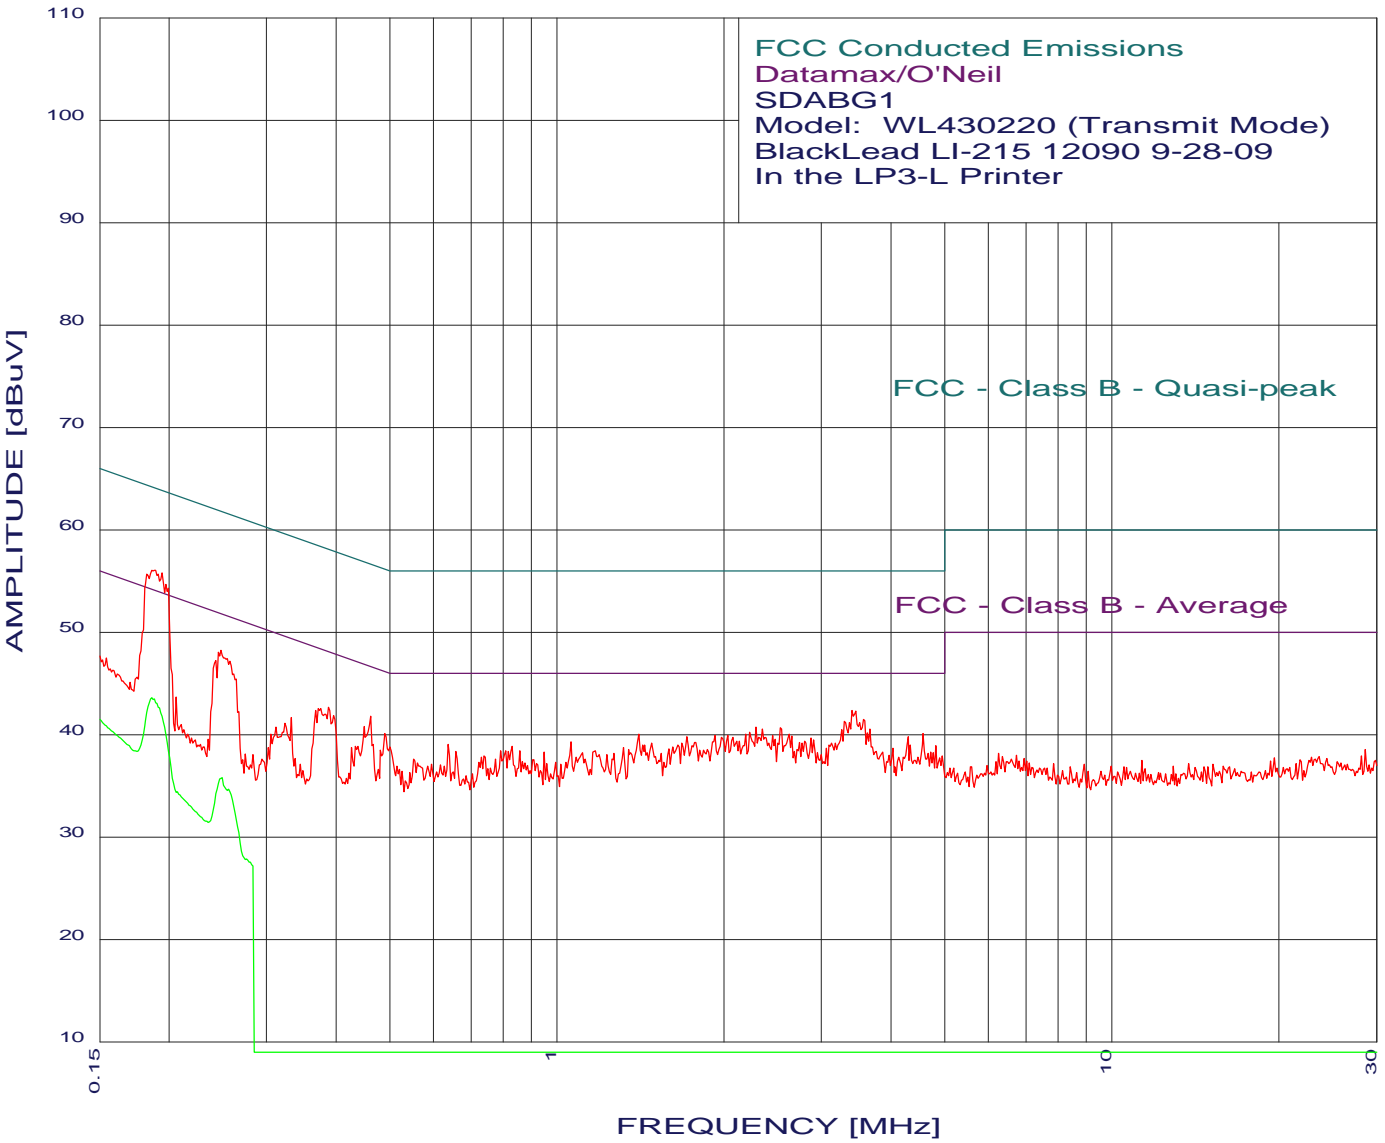

Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Agoura Division
2337 Troutdale Drive
Agoura, CA 91301
(818) 597-0600

Silverado Division
19121 El Toro Road
Silverado, CA 92676
(949) 589-0700

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

Datamax/O'Neil
SDABG1
Model: WL430220 (Transmit Mode) - In the LP3-L Printer
Black Lead - 120 VAC, 60 Hz
TEST ENGINEER : Kyle Fujimoto

47 highest peaks above -50.00 dB of FCC - Class B - Average limit line

Peak criteria : 1.00 dB, Curve : Peak

Peak#	Freq(MHz)	Amp(dBuV)	Limit(dB)	Delta(dB)
1	0.189	56.05	54.06	1.99*
2	0.248	48.24	51.82	-3.57*
3	3.401	42.35	46.00	-3.65
4	3.565	41.46	46.00	-4.54
5	3.294	41.25	46.00	-4.75
6	0.243	47.24	52.00	-4.75*
7	0.461	41.80	46.67	-4.86
8	2.286	40.72	46.00	-5.28
9	2.527	40.63	46.00	-5.37
10	3.663	40.56	46.00	-5.44
11	0.387	42.65	48.12	-5.47
12	2.346	40.53	46.00	-5.47
13	3.260	40.45	46.00	-5.55
14	2.226	40.22	46.00	-5.78
15	0.371	42.56	48.47	-5.91
16	4.576	40.08	46.00	-5.92
17	1.404	40.04	46.00	-5.96
18	2.624	40.03	46.00	-5.97
19	2.190	40.02	46.00	-5.98
20	2.449	39.93	46.00	-6.07
21	0.449	40.81	46.89	-6.08
22	2.034	39.92	46.00	-6.08
23	1.929	39.91	46.00	-6.09
24	0.489	40.09	46.18	-6.10
25	2.651	39.83	46.00	-6.17
26	0.367	42.36	48.56	-6.20
27	1.717	39.78	46.00	-6.22
28	4.294	39.78	46.00	-6.22
29	2.077	39.72	46.00	-6.28
30	1.981	39.72	46.00	-6.28
31	2.870	39.64	46.00	-6.36
32	2.900	39.44	46.00	-6.56
33	2.796	39.34	46.00	-6.66
34	1.060	39.30	46.00	-6.70
35	2.736	39.24	46.00	-6.76
36	1.781	39.19	46.00	-6.81
37	1.680	39.18	46.00	-6.82
38	1.480	39.15	46.00	-6.85
39	0.637	39.04	46.00	-6.96
40	4.339	38.98	46.00	-7.02
41	1.654	38.97	46.00	-7.03
42	1.441	38.95	46.00	-7.05
43	4.825	38.89	46.00	-7.11
44	0.831	38.82	46.00	-7.18
45	1.318	38.73	46.00	-7.27
46	4.029	38.67	46.00	-7.33
47	3.059	38.64	46.00	-7.36

*Please See the Average Readings on the Next Page and on the Plot

Datamax/O'Neil
SDABG1
Model: WL430220 (Transmit Mode) - In the LP3-L Printer
Black Lead - 120 VAC, 60 Hz
TEST ENGINEER : Kyle Fujimoto


7 highest peaks above -50.00 dB of FCC - Class B - Average limit line
Peak criteria : 0.00 dB, Curve : Average

Peak#	Freq(MHz)	Amp(dBuV)	Limit(dB)	Delta(dB)
1	0.186	43.56	54.19	-10.63
2	0.188	43.44	54.10	-10.67
3	0.250	35.81	51.77	-15.96
4	0.256	34.64	51.55	-16.91
5	0.207	34.43	53.31	-18.89
6	0.276	27.82	50.94	-23.11
7	0.280	27.55	50.81	-23.26



3/02/2010 13:58:53

EMISSION LEVEL [dBuV] PEAK
Graph for Peak & Average

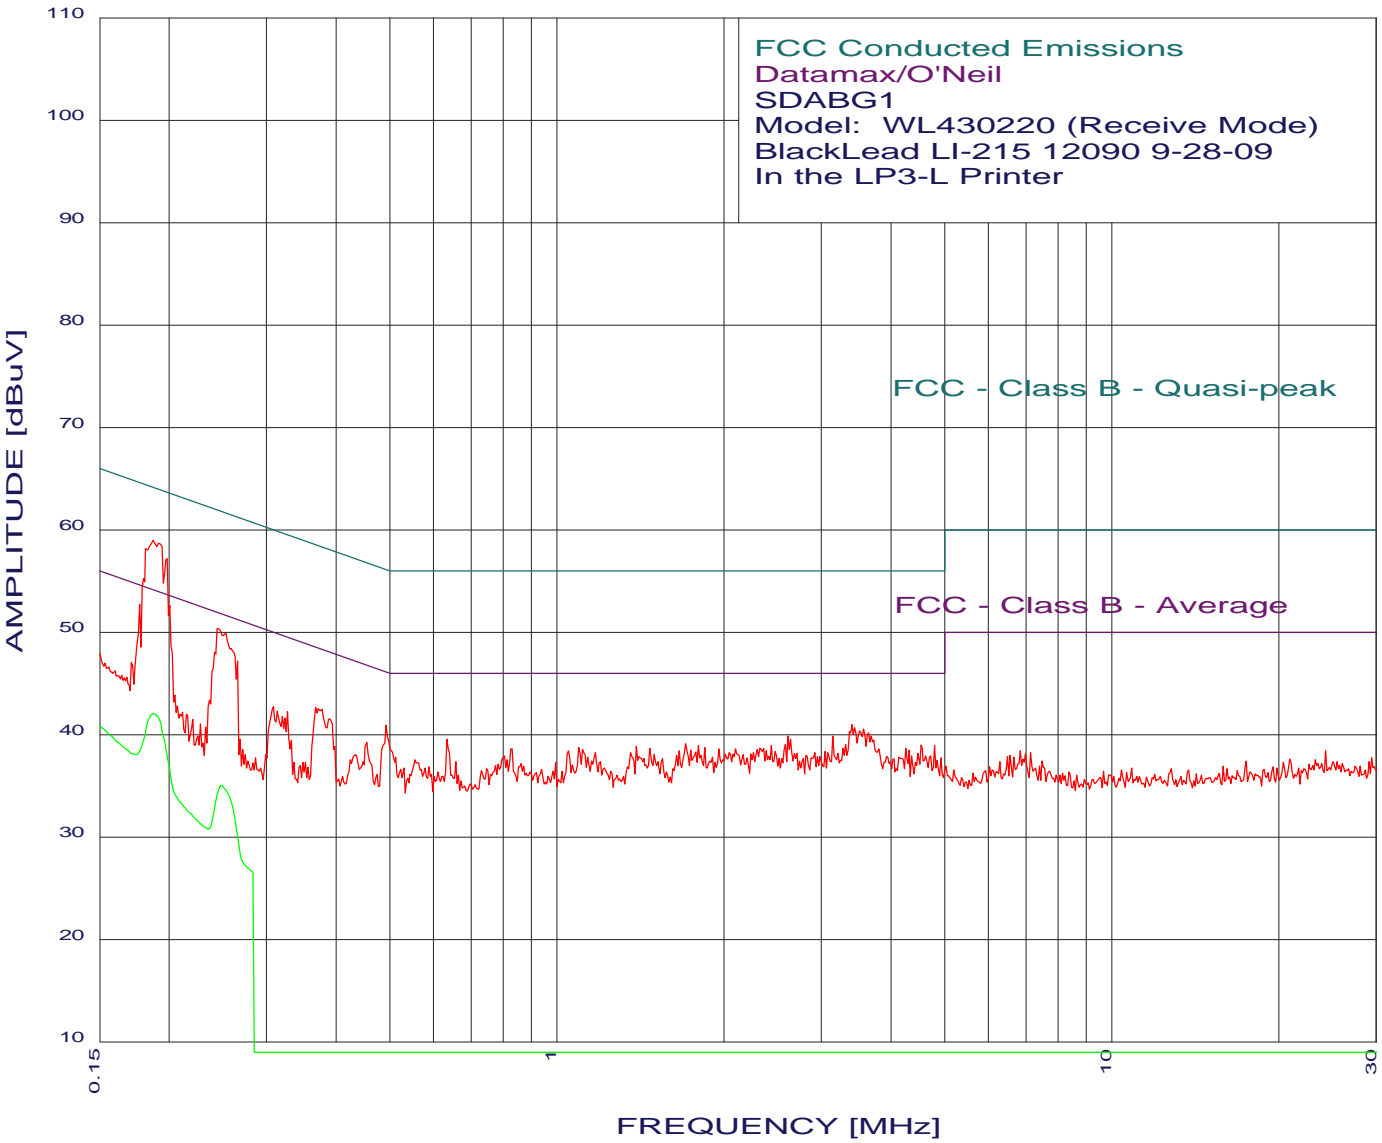

Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Agoura Division
2337 Troutdale Drive
Agoura, CA 91301
(818) 597-0600

Silverado Division
19121 El Toro Road
Silverado, CA 92676
(949) 589-0700

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

Datamax/O'Neil
SDABG1
Model: WL430220 (Receive Mode) - In the LP3-L Printer
Black Lead - 120 VAC, 60 Hz
TEST ENGINEER : Kyle Fujimoto

47 highest peaks above -50.00 dB of FCC - Class B - Average limit line

Peak criteria : 1.00 dB, Curve : Peak

Peak#	Freq(MHz)	Amp(dBuV)	Limit(dB)	Delta(dB)
1	0.187	58.95	54.15	4.80*
2	0.199	57.17	53.67	3.50*
3	0.244	50.34	51.95	-1.61*
4	0.177	52.72	54.63	-1.91*
5	0.266	47.13	51.24	-4.11
6	3.401	40.95	46.00	-5.05
7	0.492	40.88	46.14	-5.25
8	3.565	40.56	46.00	-5.44
9	3.644	40.16	46.00	-5.84
10	0.367	42.66	48.56	-5.90
11	3.141	39.85	46.00	-6.15
12	2.610	39.83	46.00	-6.17
13	0.634	39.54	46.00	-6.46
14	2.637	39.53	46.00	-6.47
15	1.708	39.08	46.00	-6.92
16	3.311	39.05	46.00	-6.95
17	2.582	39.03	46.00	-6.97
18	4.528	38.98	46.00	-7.02
19	2.436	38.93	46.00	-7.07
20	1.800	38.89	46.00	-7.11
21	4.799	38.89	46.00	-7.11
22	1.389	38.84	46.00	-7.16
23	1.094	38.70	46.00	-7.30
24	1.849	38.70	46.00	-7.30
25	0.309	42.70	50.01	-7.31
26	4.249	38.68	46.00	-7.32
27	0.327	42.19	49.53	-7.34
28	1.472	38.65	46.00	-7.35
29	2.358	38.63	46.00	-7.37
30	2.100	38.62	46.00	-7.38
31	0.831	38.62	46.00	-7.38
32	1.960	38.61	46.00	-7.39
33	1.112	38.51	46.00	-7.49
34	1.745	38.49	46.00	-7.51
35	4.316	38.48	46.00	-7.52
36	0.313	42.30	49.88	-7.58
37	0.454	39.21	46.80	-7.59
38	1.049	38.40	46.00	-7.60
39	1.663	38.38	46.00	-7.62
40	3.043	38.34	46.00	-7.66
41	2.475	38.33	46.00	-7.67
42	2.916	38.24	46.00	-7.76
43	1.359	38.24	46.00	-7.76
44	1.172	38.21	46.00	-7.79
45	4.480	38.18	46.00	-7.82
46	0.171	47.01	54.90	-7.89
47	1.496	38.05	46.00	-7.95

*Please See the Average Readings on the Next Page and on the Plot


Datamax/O'Neil
SDABG1
Model: WL430220 (Receive Mode) - In the LP3-L Printer
Black Lead - 120 VAC, 60 Hz
TEST ENGINEER : Kyle Fujimoto

2 highest peaks above -50.00 dB of FCC - Class B - Average limit line
Peak criteria : 0.00 dB, Curve : Average
Peak# Freq(MHz) Amp(dBuV) Limit(dB) Delta(dB)
1 0.187 42.03 54.15 -12.12
2 0.248 35.03 51.82 -16.78



3/02/2010 14:40:25

EMISSION LEVEL [dBuV] PEAK
Graph for Peak & Average

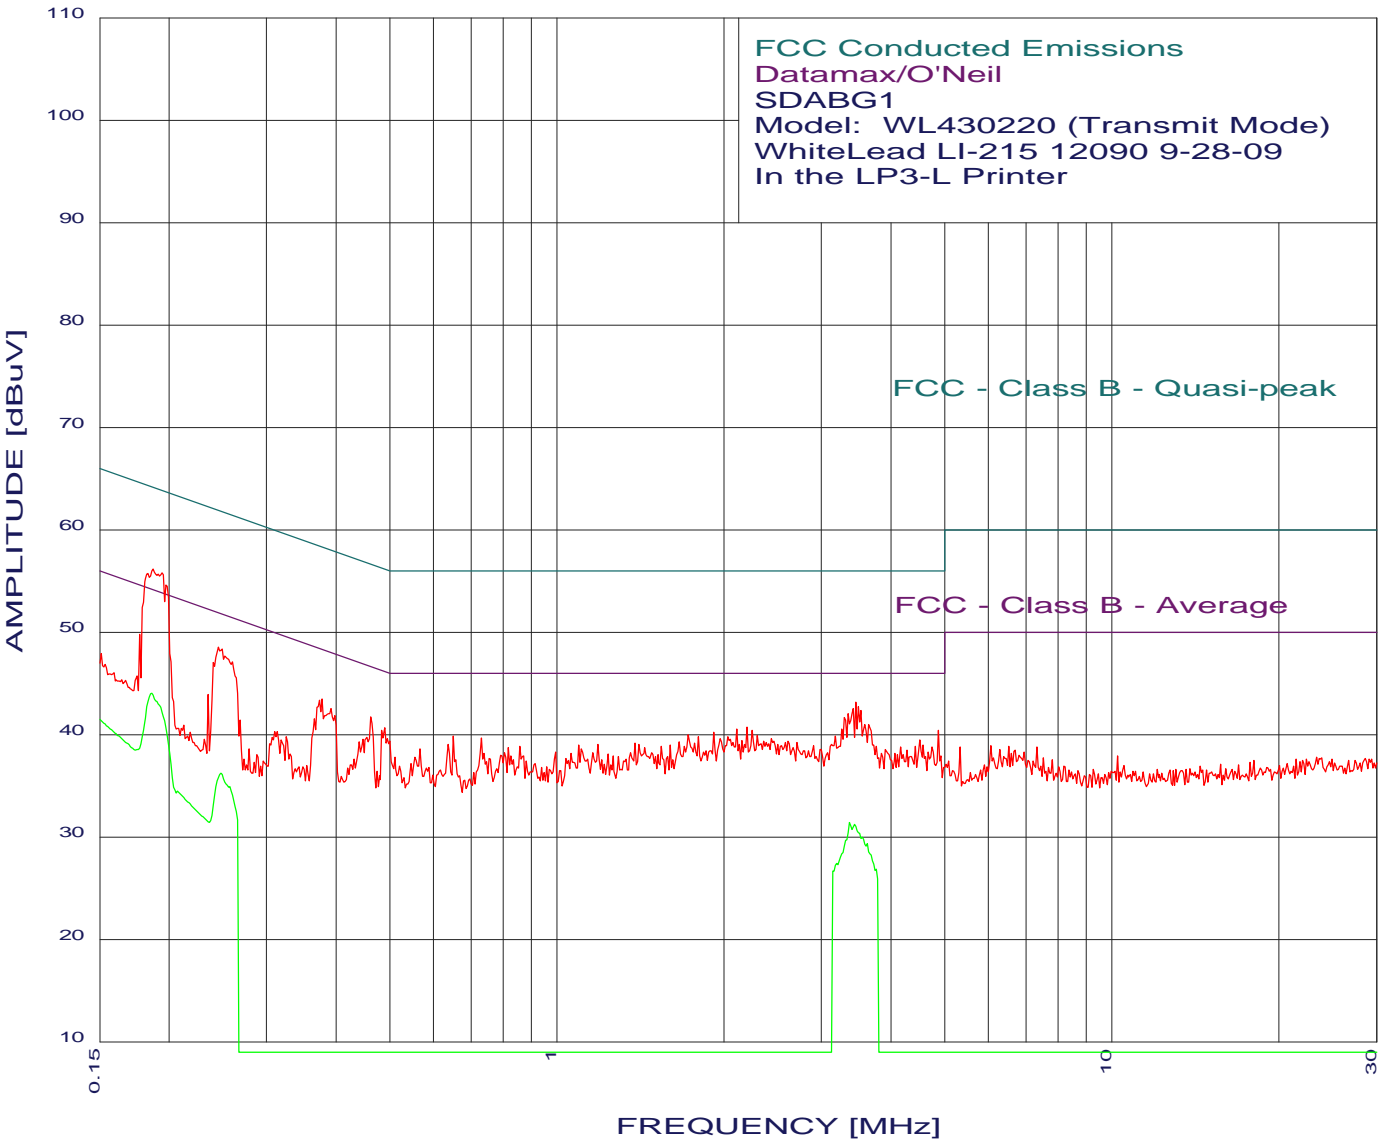

Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Agoura Division
2337 Troutdale Drive
Agoura, CA 91301
(818) 597-0600

Silverado Division
19121 El Toro Road
Silverado, CA 92676
(949) 589-0700

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

Datamax/O'Neil
SDABG1
Model: WL430220 (Transmit Mode) - In the LP3-L Printer
White Lead - 120 VAC, 60 Hz
TEST ENGINEER : Kyle Fujimoto

47 highest peaks above -50.00 dB of FCC - Class B - Average limit line

Peak criteria : 1.00 dB, Curve : Peak
Peak# Freq(MHz) Amp(dBuV) Limit(dB) Delta(dB)

Peak#	Freq(MHz)	Amp(dBuV)	Limit(dB)	Delta(dB)
1	0.187	56.15	54.15	2.00*
2	0.198	54.59	53.71	0.88*
3	3.456	43.14	46.00	-2.86*
4	3.492	42.74	46.00	-3.26*
5	0.246	48.53	51.90	-3.37*
6	3.419	42.54	46.00	-3.46*
7	3.529	42.34	46.00	-3.66*
8	3.294	41.64	46.00	-4.36*
9	0.177	49.81	54.63	-4.82*
10	0.377	43.45	48.34	-4.89
11	0.461	41.69	46.67	-4.97
12	3.644	40.95	46.00	-5.05*
13	3.585	40.94	46.00	-5.06*
14	0.373	43.35	48.43	-5.08
15	2.201	40.71	46.00	-5.29
16	2.111	40.51	46.00	-5.49
17	0.489	40.67	46.18	-5.51
18	2.250	40.41	46.00	-5.59
19	4.877	40.38	46.00	-5.62
20	1.918	40.19	46.00	-5.81
21	1.726	39.97	46.00	-6.03
22	2.298	39.91	46.00	-6.09
23	3.175	39.83	46.00	-6.17
24	0.651	39.83	46.00	-6.17
25	1.800	39.78	46.00	-6.22
26	0.731	39.67	46.00	-6.33
27	2.436	39.61	46.00	-6.39
28	1.971	39.60	46.00	-6.40
29	4.504	39.47	46.00	-6.53
30	2.156	39.41	46.00	-6.59
31	2.610	39.32	46.00	-6.68
32	1.663	39.26	46.00	-6.74
33	2.707	39.22	46.00	-6.78
34	1.382	39.13	46.00	-6.87
35	1.404	39.03	46.00	-6.97
36	0.637	39.03	46.00	-6.97
37	1.184	39.00	46.00	-7.00
38	1.094	38.99	46.00	-7.01
39	4.576	38.97	46.00	-7.03
40	1.603	38.95	46.00	-7.05
41	0.365	41.55	48.61	-7.05
42	2.900	38.93	46.00	-7.07
43	4.432	38.86	46.00	-7.14
44	1.544	38.85	46.00	-7.15
45	0.858	38.82	46.00	-7.18
46	4.748	38.77	46.00	-7.23
47	4.159	38.76	46.00	-7.24

*Please See the Average Readings on the Next Page and on the Plot

Datamax/O'Neil
SDABG1
Model: WL430220 (Transmit Mode) - In the LP3-L Printer
White Lead - 120 VAC, 60 Hz
TEST ENGINEER : Kyle Fujimoto


10 highest peaks above -50.00 dB of FCC - Class B - Average limit line
Peak criteria : 0.00 dB, Curve : Average

Peak#	Freq(MHz)	Amp(dBuV)	Limit(dB)	Delta(dB)
1	0.186	44.05	54.19	-10.15
2	3.365	31.38	46.00	-14.62
3	3.438	31.22	46.00	-14.78
4	0.248	36.24	51.82	-15.58
5	3.547	29.94	46.00	-16.06
6	0.258	34.89	51.51	-16.62
7	3.624	29.31	46.00	-16.69
8	3.192	27.43	46.00	-18.57
9	0.207	34.49	53.31	-18.82
10	3.761	26.86	46.00	-19.14



3/02/2010 14:20:59

EMISSION LEVEL [dBuV] PEAK
Graph for Peak & Average

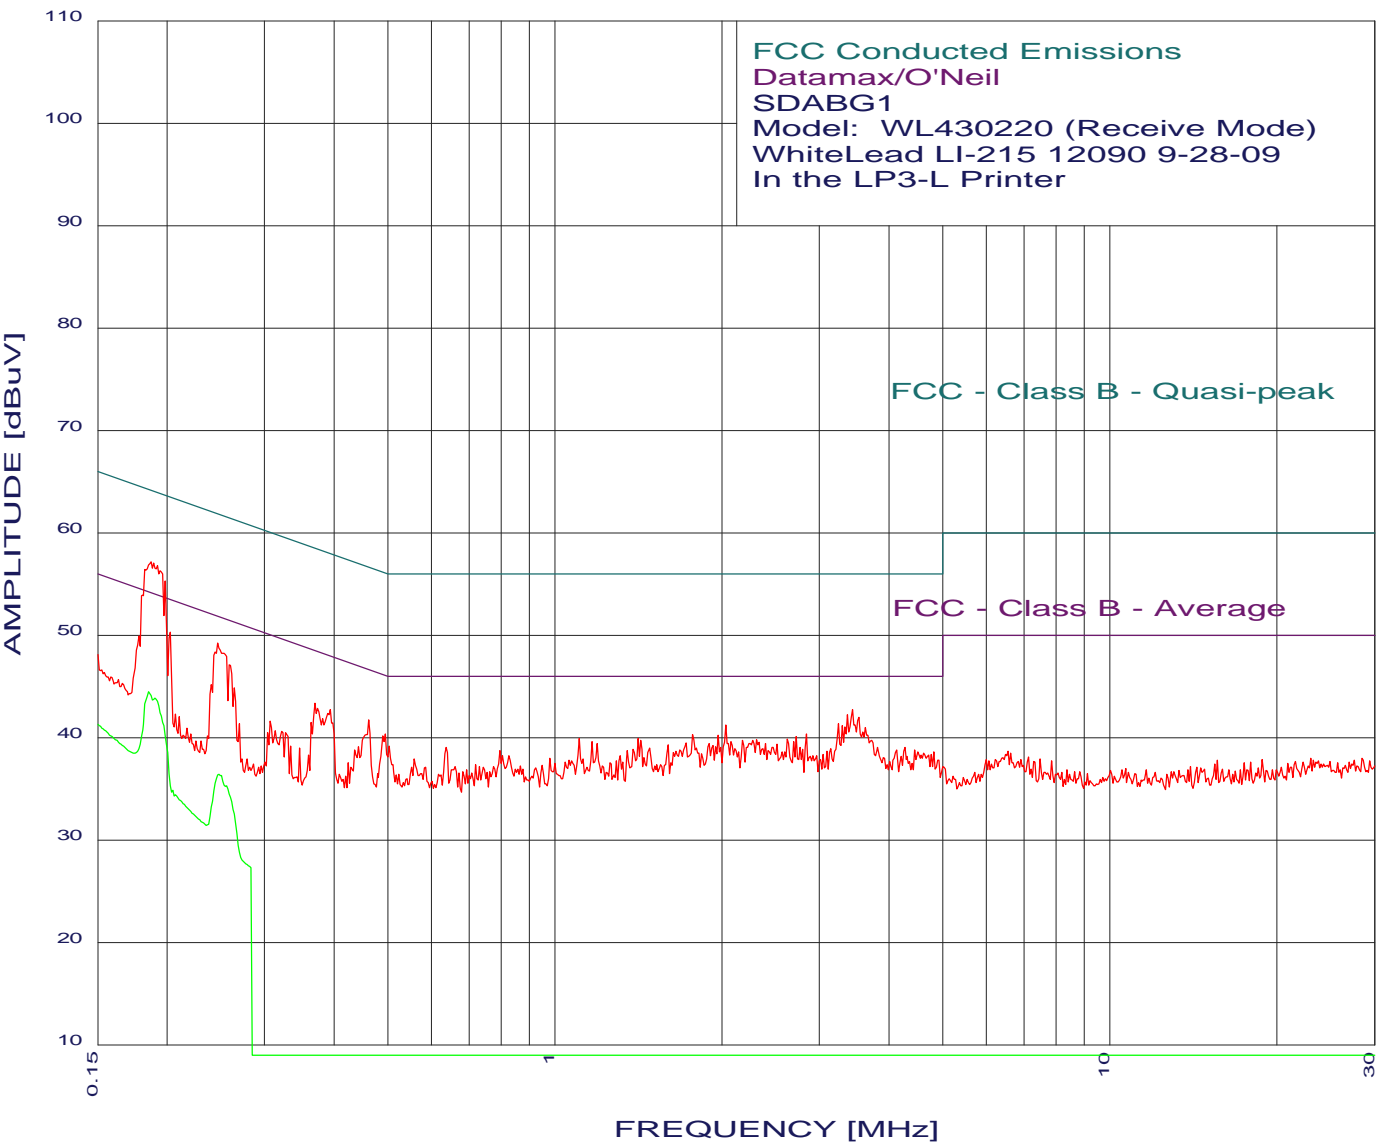

Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Agoura Division
2337 Troutdale Drive
Agoura, CA 91301
(818) 597-0600

Silverado Division
19121 El Toro Road
Silverado, CA 92676
(949) 589-0700

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

Datamax/O'Neil
SDABG1
Model: WL430220 (Receive Mode) - In the LP3-L Printer
White Lead - 120 VAC, 60 Hz
TEST ENGINEER : Kyle Fujimoto

47 highest peaks above -50.00 dB of FCC - Class B - Average limit line

Peak criteria : 1.00 dB, Curve : Peak

Peak#	Freq(MHz)	Amp(dBuV)	Limit(dB)	Delta(dB)
1	0.187	57.15	54.15	3.00*
2	0.199	55.29	53.67	1.63*
3	0.247	49.23	51.86	-2.63*
4	0.203	50.30	53.49	-3.18*
5	3.438	42.74	46.00	-3.26
6	3.365	42.24	46.00	-3.76
7	3.529	41.94	46.00	-4.06
8	0.259	47.12	51.47	-4.34*
9	3.243	41.34	46.00	-4.66
10	2.034	41.20	46.00	-4.80
11	3.294	41.14	46.00	-4.86
12	0.461	41.69	46.67	-4.97
13	0.369	43.35	48.52	-5.17
14	0.393	42.74	47.99	-5.26
15	2.840	40.33	46.00	-5.67
16	0.494	40.37	46.09	-5.72
17	1.772	40.28	46.00	-5.72
18	1.971	40.20	46.00	-5.80
19	2.722	40.12	46.00	-5.88
20	1.412	39.93	46.00	-6.07
21	1.106	39.89	46.00	-6.11
22	2.624	39.82	46.00	-6.18
23	2.310	39.81	46.00	-6.19
24	1.426	39.73	46.00	-6.27
25	2.274	39.71	46.00	-6.29
26	2.179	39.71	46.00	-6.29
27	2.693	39.62	46.00	-6.38
28	2.077	39.61	46.00	-6.39
29	1.166	39.60	46.00	-6.40
30	0.265	44.82	51.29	-6.47
31	1.726	39.47	46.00	-6.53
32	2.397	39.41	46.00	-6.59
33	1.191	39.40	46.00	-6.60
34	1.899	39.39	46.00	-6.61
35	2.514	39.32	46.00	-6.68
36	1.603	39.25	46.00	-6.75
37	1.929	39.20	46.00	-6.80
38	0.502	39.17	46.00	-6.83
39	4.272	39.06	46.00	-6.94
40	0.637	39.03	46.00	-6.97
41	2.766	39.02	46.00	-6.98
42	1.480	38.94	46.00	-7.06
43	3.141	38.93	46.00	-7.07
44	1.382	38.83	46.00	-7.17
45	2.796	38.82	46.00	-7.18
46	0.363	41.45	48.65	-7.19
47	4.456	38.77	46.00	-7.23

*Please See the Average Readings on the Next Page and on the Plot

Datamax/O'Neil
SDABG1
Model: WL430220 (Receive Mode) - In the LP3-L Printer
White Lead - 120 VAC, 60 Hz
TEST ENGINEER : Kyle Fujimoto


6 highest peaks above -50.00 dB of FCC - Class B - Average limit line
Peak criteria : 0.00 dB, Curve : Average

Peak#	Freq(MHz)	Amp(dBuV)	Limit(dB)	Delta(dB)
1	0.185	44.46	54.24	-9.78
2	0.190	43.85	54.01	-10.16
3	0.248	36.43	51.82	-15.39
4	0.256	35.28	51.55	-16.27
5	0.205	34.82	53.40	-18.58
6	0.207	34.39	53.31	-18.92



3/02/2010 15:55:39

EMISSION LEVEL [dBuV] PEAK
Graph for **Peak**

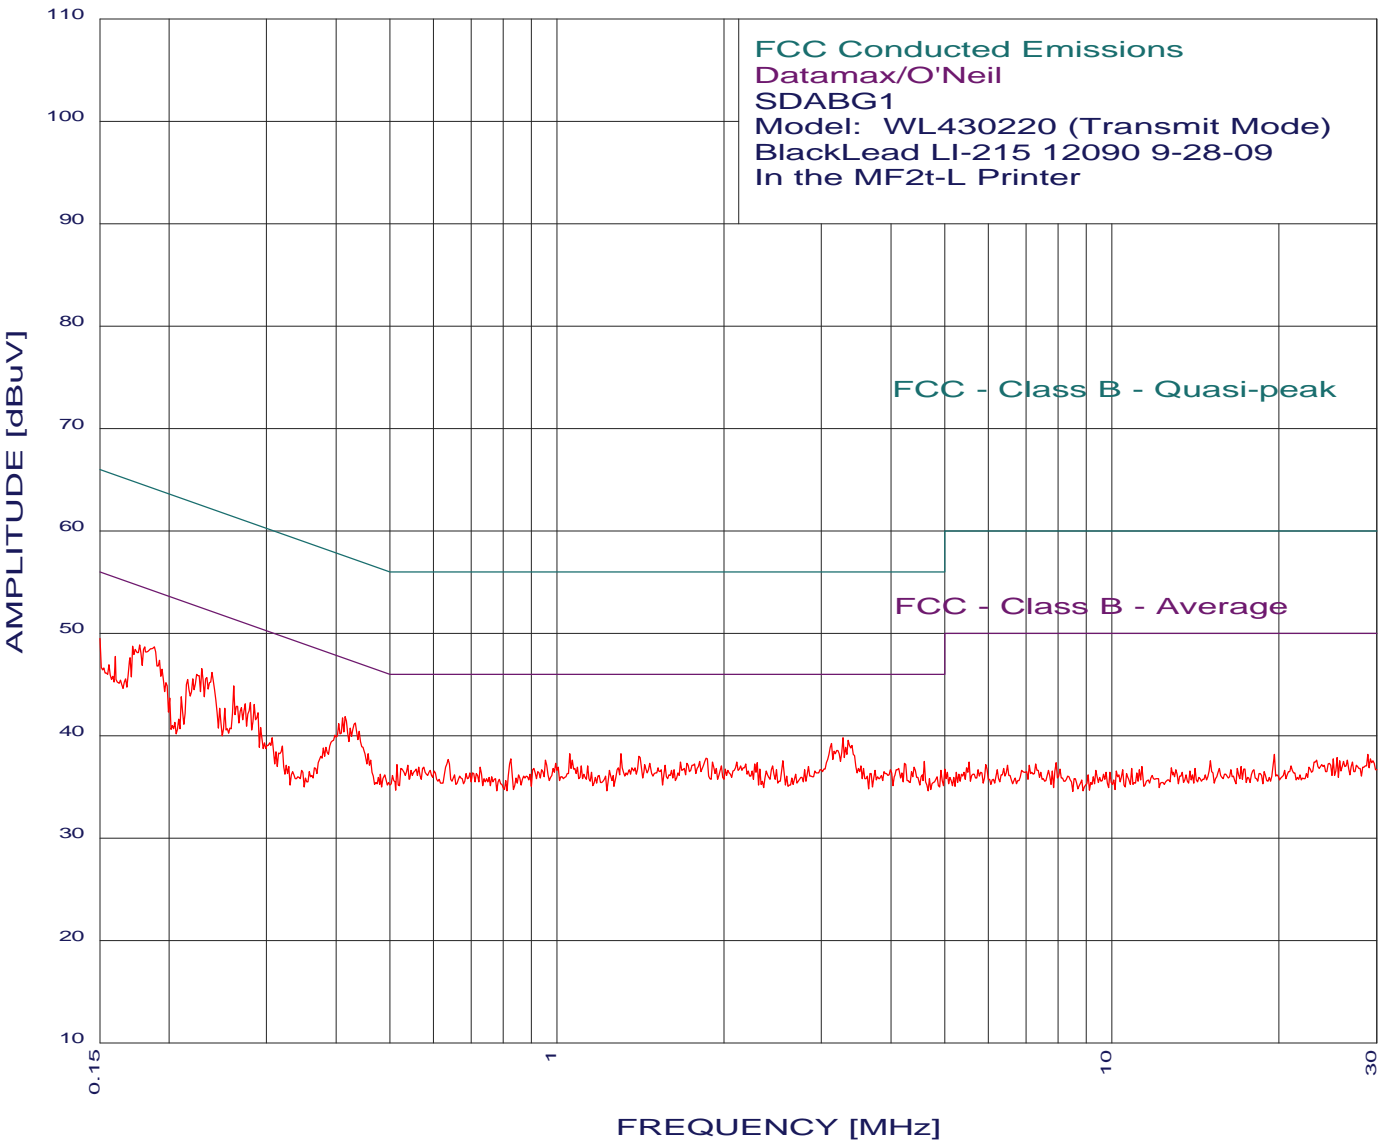

Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Agoura Division
2337 Troutdale Drive
Agoura, CA 91301
(818) 597-0600

Silverado Division
19121 El Toro Road
Silverado, CA 92676
(949) 589-0700

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

Datamax/O'Neil
SDABG1
Model: WL430220 (Transmit Mode) - In the MF2t-L Printer
Black Lead - 120 VAC, 60 Hz
TEST ENGINEER : Kyle Fujimoto

48 highest peaks above -50.00 dB of FCC - Class B - Average limit line


Peak criteria : 1.00 dB, Curve : Peak
Peak# Freq(MHz) Amp(dBuV) Limit(dB) Delta(dB)

1	0.188	48.65	54.10	-5.46
2	0.415	41.83	47.55	-5.71
3	0.177	48.82	54.63	-5.81
4	0.411	41.74	47.63	-5.90
5	0.229	46.55	52.48	-5.92
6	0.433	41.22	47.19	-5.97
7	0.239	46.15	52.12	-5.98
8	3.277	39.75	46.00	-6.25
9	3.346	39.55	46.00	-6.45
10	0.262	44.83	51.38	-6.55
11	0.404	41.14	47.77	-6.63
12	0.234	45.65	52.30	-6.65
13	0.224	45.96	52.65	-6.70
14	3.124	39.25	46.00	-6.75
15	0.221	45.56	52.78	-7.23
16	0.170	47.61	54.94	-7.33
17	0.216	45.46	52.96	-7.50
18	0.280	43.22	50.81	-7.59
19	0.285	43.02	50.67	-7.65
20	1.304	38.23	46.00	-7.77
21	0.160	47.69	55.47	-7.78
22	1.055	38.20	46.00	-7.80
23	0.275	43.12	50.98	-7.86
24	1.404	37.94	46.00	-8.06
25	1.859	37.80	46.00	-8.20
26	0.826	37.72	46.00	-8.28
27	0.637	37.64	46.00	-8.36
28	0.270	42.73	51.11	-8.38
29	0.953	37.57	46.00	-8.43
30	2.554	37.53	46.00	-8.47
31	4.600	37.48	46.00	-8.52
32	2.111	37.42	46.00	-8.58
33	1.908	37.41	46.00	-8.59
34	1.671	37.38	46.00	-8.62
35	2.298	37.33	46.00	-8.67
36	0.995	37.29	46.00	-8.71
37	4.227	37.28	46.00	-8.72
38	1.472	37.25	46.00	-8.75
39	0.516	37.19	46.00	-8.81
40	0.538	37.10	46.00	-8.90
41	1.569	37.06	46.00	-8.94
42	2.449	37.03	46.00	-8.97
43	1.981	37.02	46.00	-8.98
44	1.136	37.01	46.00	-8.99
45	1.106	37.01	46.00	-8.99
46	0.252	42.64	51.68	-9.04
47	0.577	36.91	46.00	-9.09
48	0.564	36.91	46.00	-9.09



3/02/2010 16:15:07

EMISSION LEVEL [dBuV] PEAK
Graph for **Peak**

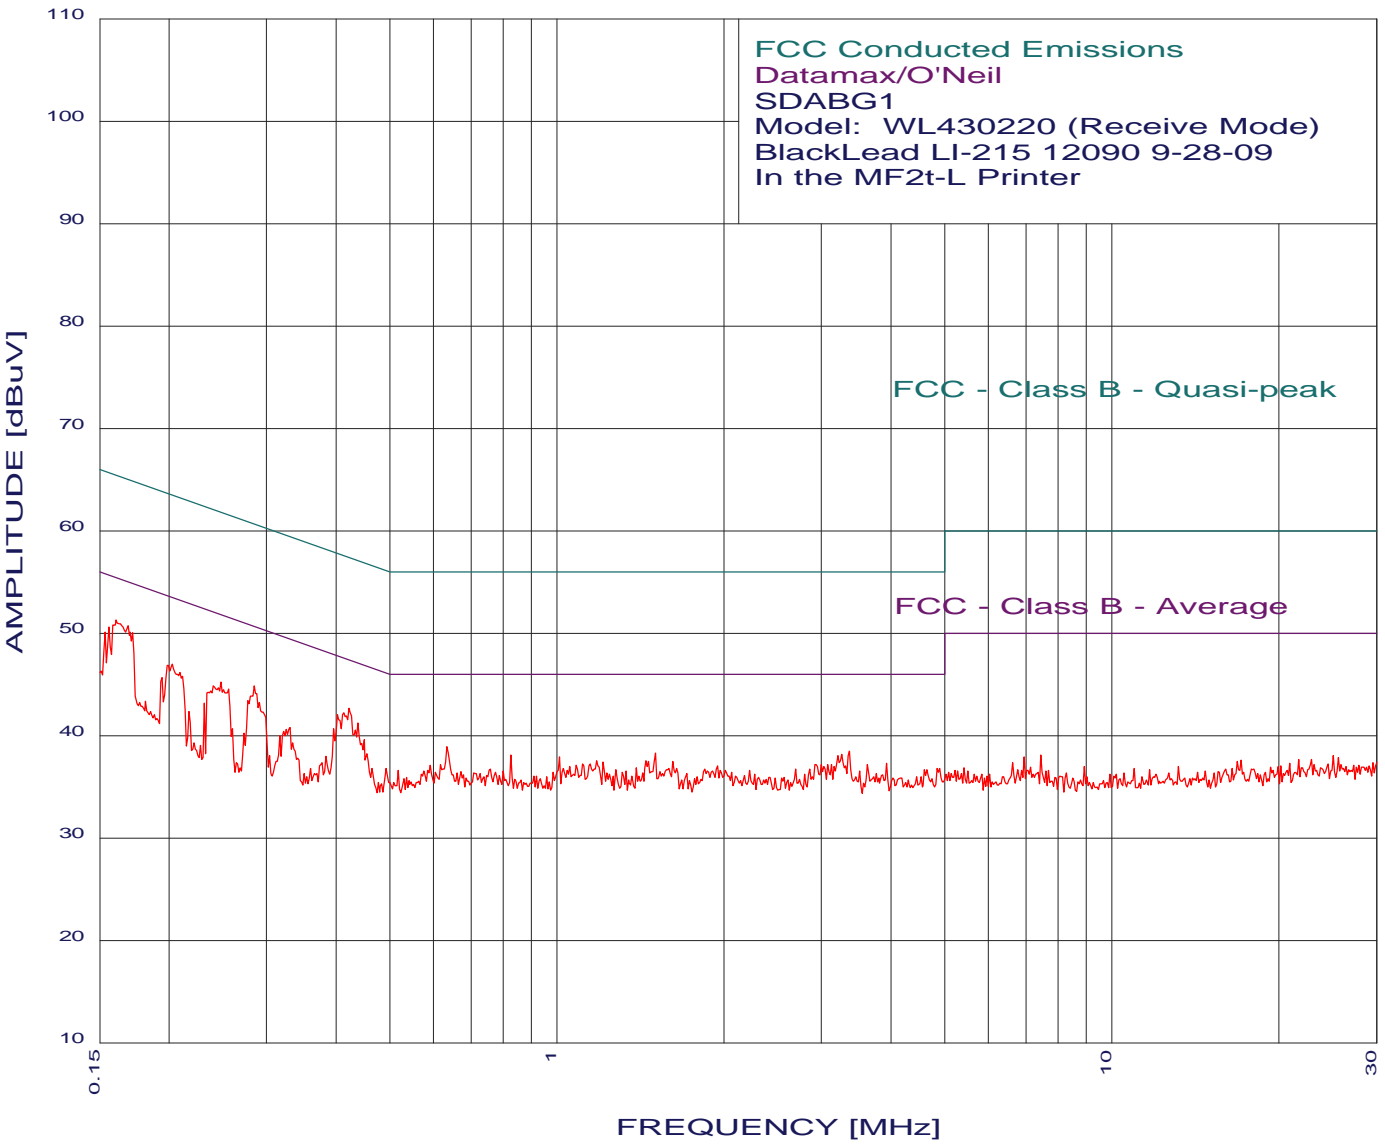

Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Agoura Division
2337 Troutdale Drive
Agoura, CA 91301
(818) 597-0600

Silverado Division
19121 El Toro Road
Silverado, CA 92676
(949) 589-0700

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

Datamax/O'Neil
SDABG1
Model: WL430220 (Receive Mode) - In the MF2t-L Printer
Black Lead - 120 VAC, 60 Hz
TEST ENGINEER : Kyle Fujimoto

48 highest peaks above -50.00 dB of FCC - Class B - Average limit line


Peak criteria : 1.00 dB, Curve : Peak

Peak#	Freq(MHz)	Amp(dBuV)	Limit(dB)	Delta(dB)
1	0.161	51.29	55.43	-4.14
2	0.421	42.63	47.42	-4.79
3	0.156	50.59	55.69	-5.10
4	0.153	50.08	55.82	-5.74
5	0.402	42.04	47.81	-5.77
6	0.285	44.82	50.67	-5.85
7	0.438	41.22	47.11	-5.89
8	0.203	46.97	53.49	-6.52
9	0.248	45.24	51.82	-6.57
10	0.634	38.94	46.00	-7.06
11	0.396	40.65	47.95	-7.30
12	3.365	38.45	46.00	-7.55
13	1.504	38.26	46.00	-7.74
14	3.260	38.15	46.00	-7.85
15	0.826	38.12	46.00	-7.88
16	1.011	37.89	46.00	-8.11
17	0.195	45.66	53.84	-8.18
18	1.449	37.55	46.00	-8.45
19	1.178	37.51	46.00	-8.49
20	1.620	37.47	46.00	-8.53
21	1.210	37.42	46.00	-8.58
22	0.331	40.79	49.44	-8.65
23	3.924	37.27	46.00	-8.73
24	1.112	37.21	46.00	-8.79
25	3.624	37.16	46.00	-8.84
26	3.124	37.15	46.00	-8.85
27	2.995	37.14	46.00	-8.86
28	0.592	37.12	46.00	-8.88
29	1.083	37.10	46.00	-8.90
30	1.950	37.01	46.00	-8.99
31	1.389	36.84	46.00	-9.16
32	4.902	36.79	46.00	-9.21
33	0.232	43.15	52.39	-9.24
34	2.693	36.74	46.00	-9.26
35	0.759	36.69	46.00	-9.31
36	4.648	36.69	46.00	-9.31
37	0.492	36.78	46.14	-9.35
38	1.276	36.63	46.00	-9.37
39	2.226	36.62	46.00	-9.38
40	0.518	36.59	46.00	-9.41
41	3.511	36.56	46.00	-9.44
42	1.331	36.53	46.00	-9.47
43	0.801	36.51	46.00	-9.49
44	0.672	36.45	46.00	-9.55
45	1.311	36.43	46.00	-9.57
46	0.709	36.37	46.00	-9.63
47	1.717	36.28	46.00	-9.72
48	2.796	36.24	46.00	-9.76



3/02/2010 16:02:14

EMISSION LEVEL [dBuV] PEAK
Graph for **Peak**

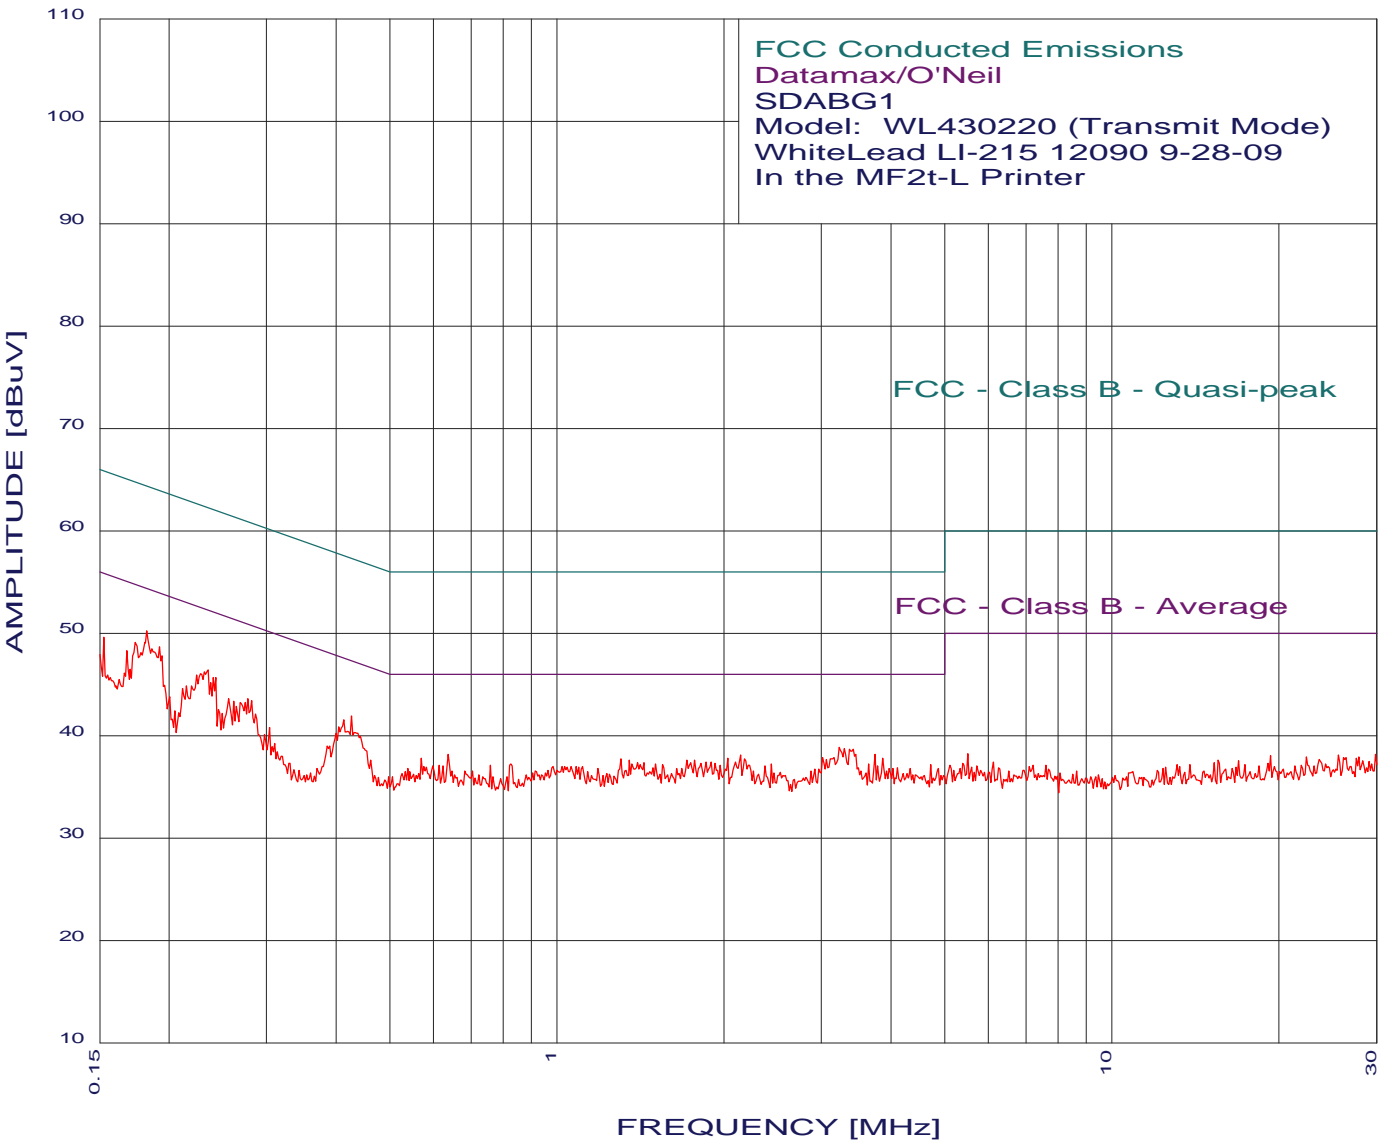

Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Agoura Division
2337 Troutdale Drive
Agoura, CA 91301
(818) 597-0600

Silverado Division
19121 El Toro Road
Silverado, CA 92676
(949) 589-0700

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

Datamax/O'Neil
SDABG1
Model: WL430220 (Transmit Mode) - In the MF2t-L Printer
White Lead - 120 VAC, 60 Hz
TEST ENGINEER : Kyle Fujimoto

48 highest peaks above -50.00 dB of FCC - Class B - Average limit line


Peak criteria : 1.00 dB, Curve : Peak

Peak#	Freq(MHz)	Amp(dBuV)	Limit(dB)	Delta(dB)
1	0.183	50.23	54.37	-4.14
2	0.193	48.67	53.93	-5.26
3	0.426	41.91	47.33	-5.41
4	0.174	49.10	54.77	-5.67
5	0.235	46.44	52.25	-5.82
6	0.413	41.52	47.59	-6.07
7	0.152	49.61	55.86	-6.25
8	0.243	45.63	52.00	-6.36
9	0.240	45.63	52.08	-6.45
10	0.168	48.27	55.07	-6.80
11	0.238	45.13	52.17	-7.03
12	3.226	38.83	46.00	-7.17
13	0.277	43.61	50.89	-7.28
14	0.282	43.41	50.76	-7.35
15	3.419	38.64	46.00	-7.36
16	3.741	38.15	46.00	-7.85
17	0.637	38.13	46.00	-7.87
18	2.145	38.11	46.00	-7.89
19	0.256	43.62	51.55	-7.93
20	0.269	43.22	51.15	-7.94
21	0.262	43.32	51.38	-8.06
22	3.011	37.83	46.00	-8.17
23	0.215	44.82	53.00	-8.18
24	2.034	37.80	46.00	-8.20
25	0.570	37.80	46.00	-8.20
26	3.862	37.75	46.00	-8.25
27	1.304	37.72	46.00	-8.28
28	2.179	37.71	46.00	-8.29
29	1.352	37.62	46.00	-8.38
30	1.772	37.58	46.00	-8.42
31	1.717	37.57	46.00	-8.43
32	0.265	42.82	51.29	-8.47
33	0.212	44.62	53.14	-8.52
34	1.899	37.39	46.00	-8.61
35	1.434	37.33	46.00	-8.67
36	1.929	37.30	46.00	-8.70
37	1.820	37.28	46.00	-8.72
38	3.644	37.25	46.00	-8.75
39	1.504	37.24	46.00	-8.76
40	2.436	37.21	46.00	-8.79
41	0.826	37.21	46.00	-8.79
42	4.722	37.17	46.00	-8.83
43	1.552	37.15	46.00	-8.85
44	0.614	37.12	46.00	-8.88
45	1.971	37.10	46.00	-8.90
46	0.759	37.08	46.00	-8.92
47	3.781	37.05	46.00	-8.95
48	0.624	37.02	46.00	-8.98



3/02/2010 16:10:43

EMISSION LEVEL [dBuV] PEAK
Graph for Peak

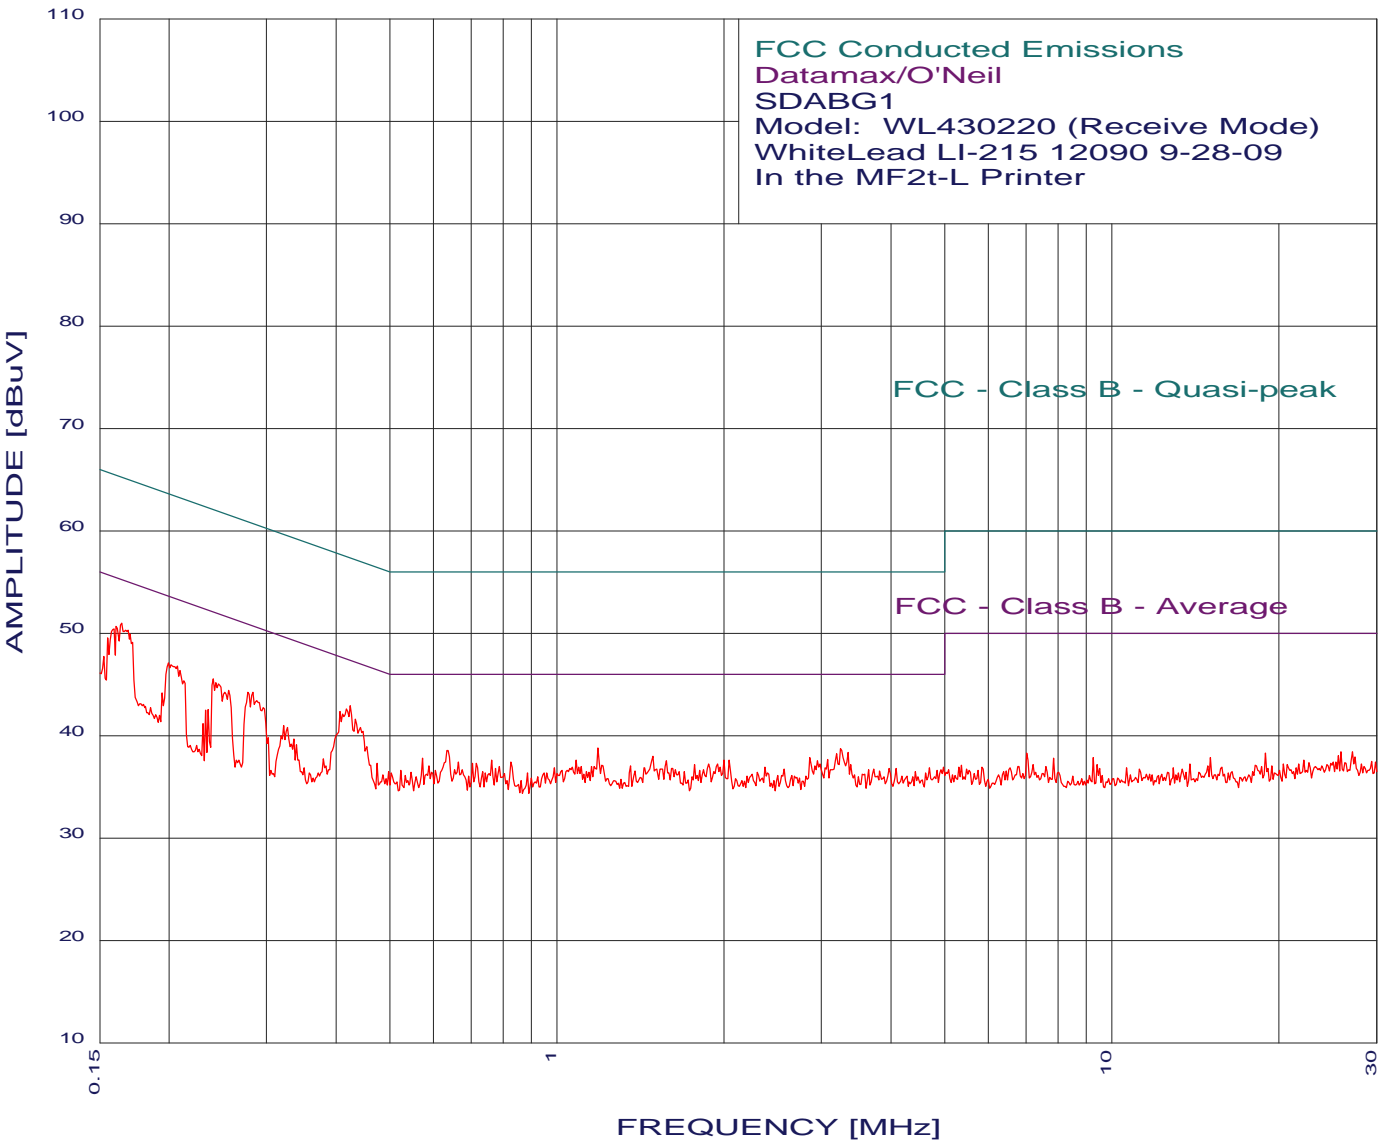

Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Agoura Division
2337 Troutdale Drive
Agoura, CA 91301
(818) 597-0600

Silverado Division
19121 El Toro Road
Silverado, CA 92676
(949) 589-0700

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

Datamax/O'Neil
SDABG1
Model: WL430220 (Receive Mode) - In the MF2t-L Printer
White Lead - 120 VAC, 60 Hz
TEST ENGINEER : Kyle Fujimoto

48 highest peaks above -50.00 dB of FCC - Class B - Average limit line


Peak criteria : 1.00 dB, Curve : Peak

Peak#	Freq(MHz)	Amp(dBuV)	Limit(dB)	Delta(dB)
1	0.164	50.96	55.25	-4.29
2	0.424	42.92	47.37	-4.46
3	0.161	50.64	55.43	-4.79
4	0.159	50.44	55.51	-5.08
5	0.406	42.33	47.72	-5.39
6	0.433	41.61	47.19	-5.58
7	0.155	49.52	55.73	-6.21
8	0.283	44.21	50.72	-6.51
9	0.200	47.10	53.62	-6.52
10	0.240	45.53	52.08	-6.55
11	0.277	44.21	50.89	-6.68
12	0.256	44.42	51.55	-7.13
13	1.184	38.80	46.00	-7.20
14	3.243	38.74	46.00	-7.26
15	0.637	38.53	46.00	-7.47
16	3.346	38.34	46.00	-7.66
17	3.192	38.23	46.00	-7.77
18	1.488	37.94	46.00	-8.06
19	0.152	47.71	55.86	-8.15
20	2.855	37.83	46.00	-8.17
21	0.573	37.80	46.00	-8.20
22	3.075	37.63	46.00	-8.37
23	2.044	37.61	46.00	-8.39
24	2.002	37.60	46.00	-8.40
25	1.083	37.59	46.00	-8.41
26	0.763	37.58	46.00	-8.42
27	1.577	37.55	46.00	-8.45
28	2.948	37.53	46.00	-8.47
29	0.665	37.44	46.00	-8.56
30	0.826	37.41	46.00	-8.59
31	0.322	40.98	49.66	-8.68
32	0.716	37.26	46.00	-8.74
33	0.705	37.25	46.00	-8.75
34	0.327	40.78	49.53	-8.75
35	1.950	37.20	46.00	-8.80
36	1.879	37.19	46.00	-8.81
37	1.772	37.18	46.00	-8.82
38	1.359	37.02	46.00	-8.98
39	0.589	37.00	46.00	-9.00
40	0.788	36.99	46.00	-9.01
41	2.371	36.91	46.00	-9.09
42	4.980	36.88	46.00	-9.12
43	0.990	36.87	46.00	-9.13
44	4.696	36.87	46.00	-9.13
45	0.474	37.28	46.45	-9.16
46	0.775	36.78	46.00	-9.22
47	1.620	36.76	46.00	-9.24
48	4.092	36.76	46.00	-9.24



3/02/2010 15:02:11

EMISSION LEVEL [dBuV] PEAK
Graph for Peak & Average

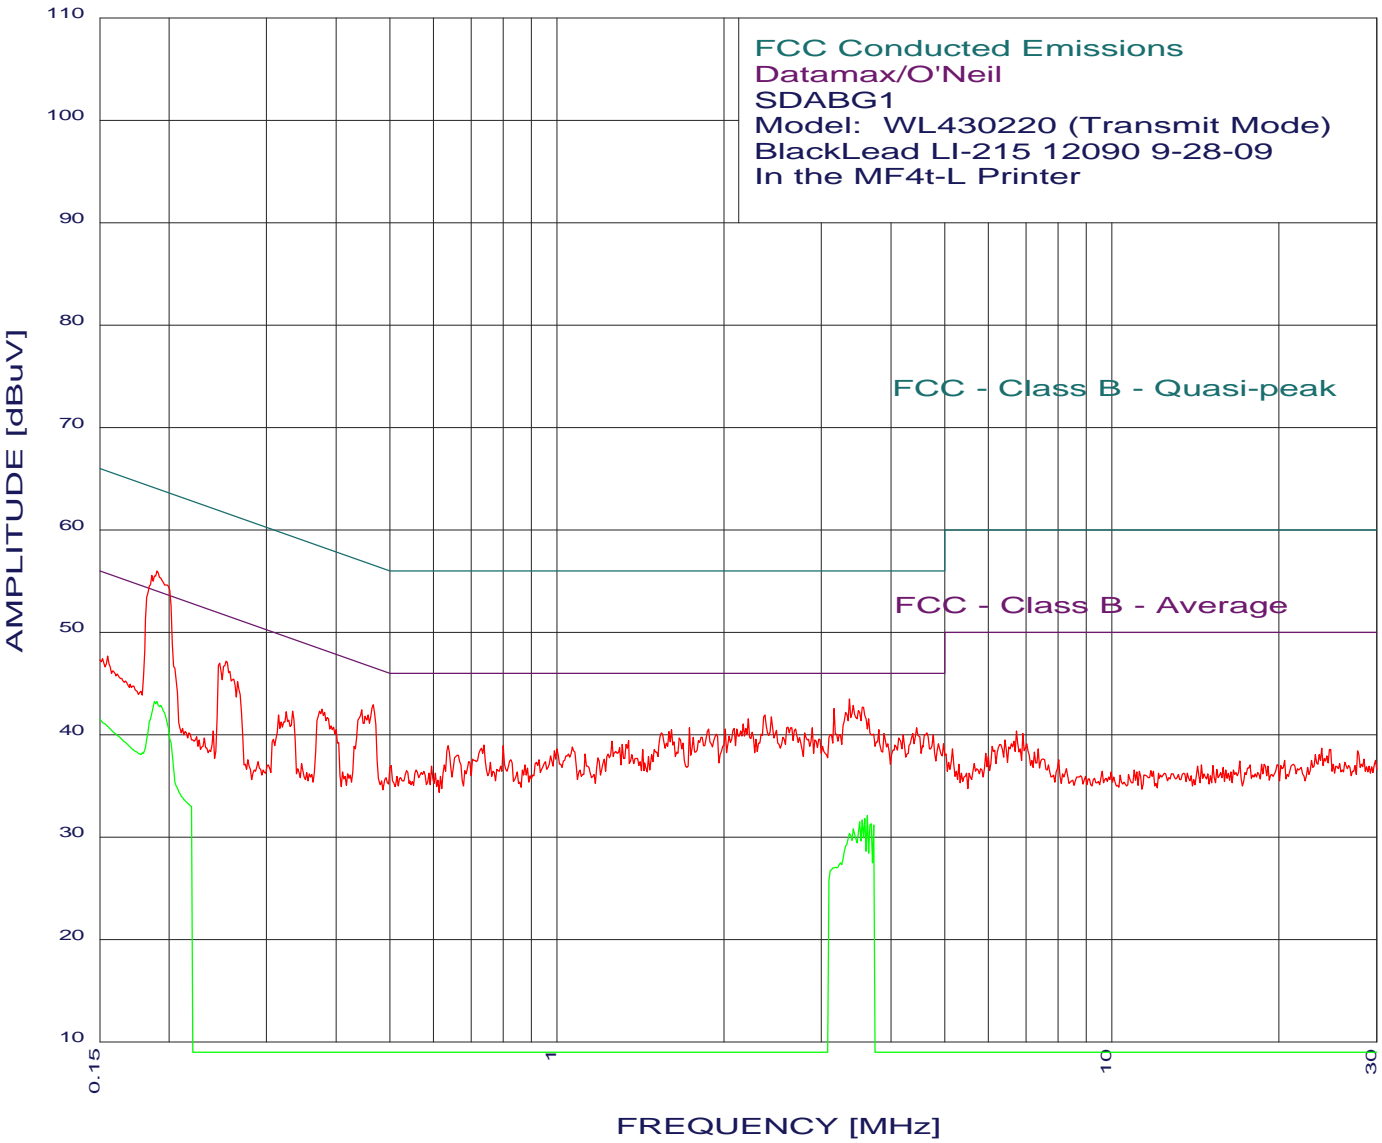

Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Agoura Division
2337 Troutdale Drive
Agoura, CA 91301
(818) 597-0600

Silverado Division
19121 El Toro Road
Silverado, CA 92676
(949) 589-0700

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

Datamax/O'Neil
SDABG1
Model: WL430220 (Transmit Mode) - In the MF4t-L Printer
Black Lead - 120 VAC, 60 Hz
TEST ENGINEER : Kyle Fujimoto

47 highest peaks above -50.00 dB of FCC - Class B - Average limit line

Peak criteria : 1.00 dB, Curve : Peak

Peak#	Freq(MHz)	Amp(dBuV)	Limit(dB)	Delta(dB)
1	0.190	55.95	54.01	1.94*
2	3.365	43.45	46.00	-2.55*
3	3.419	42.85	46.00	-3.15*
4	3.565	42.66	46.00	-3.34*
5	3.158	42.55	46.00	-3.45*
6	0.466	42.90	46.58	-3.68
7	2.371	41.93	46.00	-4.07
8	2.436	41.73	46.00	-4.27
9	3.644	41.56	46.00	-4.44
10	2.214	41.52	46.00	-4.48
11	0.254	47.14	51.64	-4.50
12	0.445	42.41	46.98	-4.56
13	0.247	46.94	51.86	-4.92
14	2.168	41.02	46.00	-4.98
15	2.610	40.73	46.00	-5.27
16	1.735	40.68	46.00	-5.32
17	4.456	40.68	46.00	-5.32
18	2.885	40.64	46.00	-5.36
19	2.089	40.62	46.00	-5.38
20	2.693	40.54	46.00	-5.46
21	2.013	40.52	46.00	-5.48
22	1.879	40.50	46.00	-5.50
23	1.611	40.47	46.00	-5.53
24	3.800	40.46	46.00	-5.54
25	4.648	40.19	46.00	-5.81
26	1.544	40.16	46.00	-5.84
27	2.796	40.14	46.00	-5.86
28	0.377	42.46	48.34	-5.88
29	3.882	40.07	46.00	-5.93
30	1.939	40.01	46.00	-5.99
31	4.774	39.99	46.00	-6.01
32	4.204	39.97	46.00	-6.03
33	0.266	45.13	51.24	-6.11
34	1.763	39.69	46.00	-6.31
35	1.663	39.68	46.00	-6.32
36	4.137	39.67	46.00	-6.33
37	2.979	39.54	46.00	-6.46
38	2.286	39.52	46.00	-6.48
39	1.345	39.44	46.00	-6.56
40	1.256	39.32	46.00	-6.68
41	4.980	39.09	46.00	-6.91
42	4.877	39.09	46.00	-6.91
43	1.311	39.03	46.00	-6.97
44	0.739	38.98	46.00	-7.02
45	0.637	38.94	46.00	-7.06
46	0.334	42.29	49.35	-7.07
47	0.801	38.91	46.00	-7.09

*Please See the Average Readings on the Next Page and on the Plot

Datamax/O'Neil
SDABG1
Model: WL430220 (Transmit Mode) - In the MF4t-L Printer
Black Lead - 120 VAC, 60 Hz
TEST ENGINEER : Kyle Fujimoto


14 highest peaks above -50.00 dB of FCC - Class B - Average limit line
Peak criteria : 0.00 dB, Curve : Average

Peak#	Freq(MHz)	Amp(dBuV)	Limit(dB)	Delta(dB)
1	0.190	43.19	54.01	-10.82
2	0.188	43.19	54.10	-10.92
3	0.194	42.84	53.88	-11.05
4	3.624	32.09	46.00	-13.91
5	3.585	31.77	46.00	-14.23
6	3.547	31.63	46.00	-14.37
7	3.511	31.45	46.00	-14.55
8	3.683	31.26	46.00	-14.74
9	3.722	31.17	46.00	-14.83
10	3.419	30.75	46.00	-15.25
11	3.365	30.31	46.00	-15.69
12	0.179	38.22	54.54	-16.32
13	3.243	27.45	46.00	-18.55
14	3.175	27.06	46.00	-18.94



3/02/2010 15:47:03

EMISSION LEVEL [dBuV] PEAK
Graph for Peak & Average

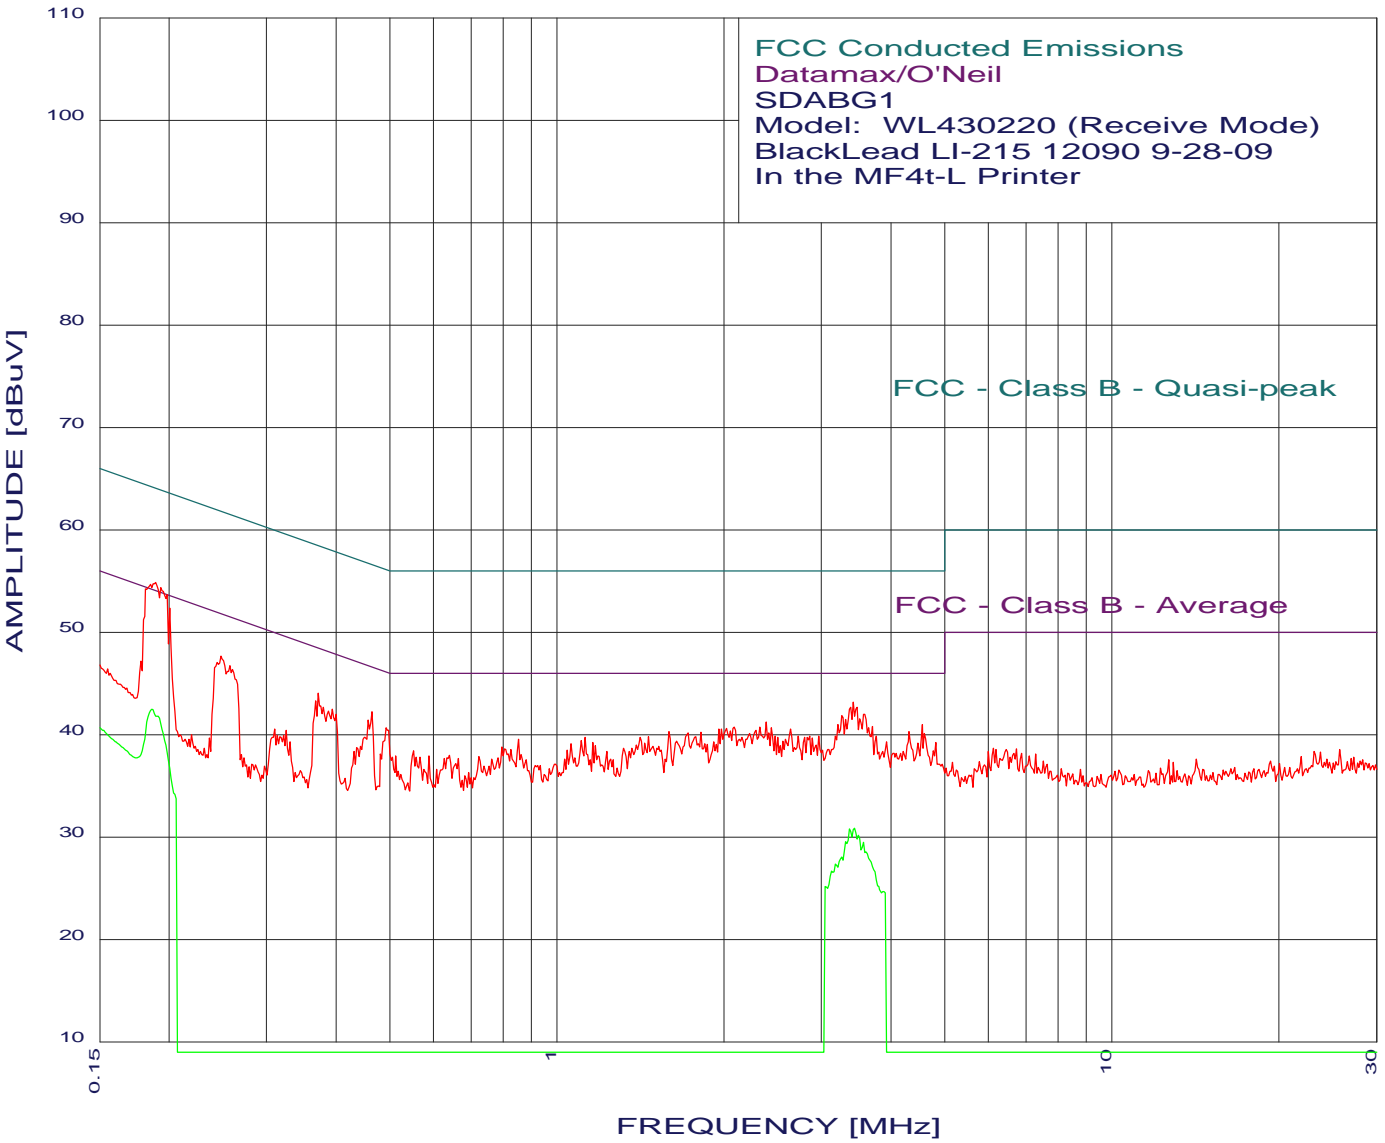

Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Agoura Division
2337 Troutdale Drive
Agoura, CA 91301
(818) 597-0600

Silverado Division
19121 El Toro Road
Silverado, CA 92676
(949) 589-0700

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

Datamax/O'Neil
SDABG1
Model: WL430220 (Receive Mode) - In the MF4t-L Printer
Black Lead - 120 VAC, 60 Hz
TEST ENGINEER : Kyle Fujimoto

47 highest peaks above -50.00 dB of FCC - Class B - Average limit line

Peak criteria : 1.00 dB, Curve : Peak

Peak#	Freq(MHz)	Amp(dBuV)	Limit(dB)	Delta(dB)
1	0.189	54.85	54.06	0.79*
2	0.194	54.36	53.88	0.47*
3	0.201	52.37	53.58	-1.21*
4	3.419	43.15	46.00	-2.85*
5	3.383	42.65	46.00	-3.35*
6	3.585	41.96	46.00	-4.04*
7	3.260	41.85	46.00	-4.15*
8	0.248	47.64	51.82	-4.17
9	0.371	44.06	48.47	-4.41
10	0.464	42.20	46.62	-4.42
11	2.384	41.23	46.00	-4.77
12	4.552	40.98	46.00	-5.02
13	3.702	40.76	46.00	-5.24*
14	2.322	40.73	46.00	-5.27
15	2.089	40.72	46.00	-5.28
16	0.367	43.26	48.56	-5.30
17	2.436	40.63	46.00	-5.37
18	2.023	40.62	46.00	-5.38
19	0.492	40.68	46.14	-5.45
20	2.637	40.53	46.00	-5.47
21	1.960	40.51	46.00	-5.49
22	0.393	42.45	47.99	-5.54
23	4.316	40.28	46.00	-5.72
24	1.594	40.27	46.00	-5.73
25	1.820	40.19	46.00	-5.81
26	1.726	40.18	46.00	-5.82
27	4.600	40.08	46.00	-5.92
28	3.761	39.86	46.00	-6.14*
29	2.963	39.84	46.00	-6.16
30	2.855	39.84	46.00	-6.16
31	2.722	39.84	46.00	-6.16
32	2.475	39.83	46.00	-6.17
33	1.464	39.75	46.00	-6.25
34	1.412	39.74	46.00	-6.26
35	2.796	39.74	46.00	-6.26
36	2.501	39.73	46.00	-6.27
37	1.124	39.71	46.00	-6.29
38	2.885	39.64	46.00	-6.36
39	0.853	39.53	46.00	-6.47
40	1.106	39.40	46.00	-6.60
41	1.646	39.37	46.00	-6.63
42	3.924	39.27	46.00	-6.73
43	1.160	39.21	46.00	-6.79
44	4.825	39.19	46.00	-6.81
45	4.480	39.18	46.00	-6.82
46	1.060	39.10	46.00	-6.90
47	1.172	38.91	46.00	-7.09

*Please See the Average Readings on the Next Page and on the Plot

Datamax/O'Neil
SDABG1
Model: WL430220 (Receive Mode) - In the MF4t-L Printer
Black Lead - 120 VAC, 60 Hz
TEST ENGINEER : Kyle Fujimoto


12 highest peaks above -50.00 dB of FCC - Class B - Average limit line
Peak criteria : 0.00 dB, Curve : Average

Peak#	Freq(MHz)	Amp(dBuV)	Limit(dB)	Delta(dB)
1	0.186	42.46	54.19	-11.73
2	3.438	30.81	46.00	-15.19
3	3.365	30.78	46.00	-15.22
4	3.492	30.18	46.00	-15.82
5	3.311	29.56	46.00	-16.44
6	3.565	29.46	46.00	-16.54
7	3.605	28.54	46.00	-17.46
8	3.260	28.05	46.00	-17.95
9	3.175	27.35	46.00	-18.65
10	3.124	26.65	46.00	-19.35
11	3.043	25.16	46.00	-20.84
12	3.882	24.68	46.00	-21.32



3/02/2010 15:29:16

EMISSION LEVEL [dBuV] PEAK
Graph for Peak & Average

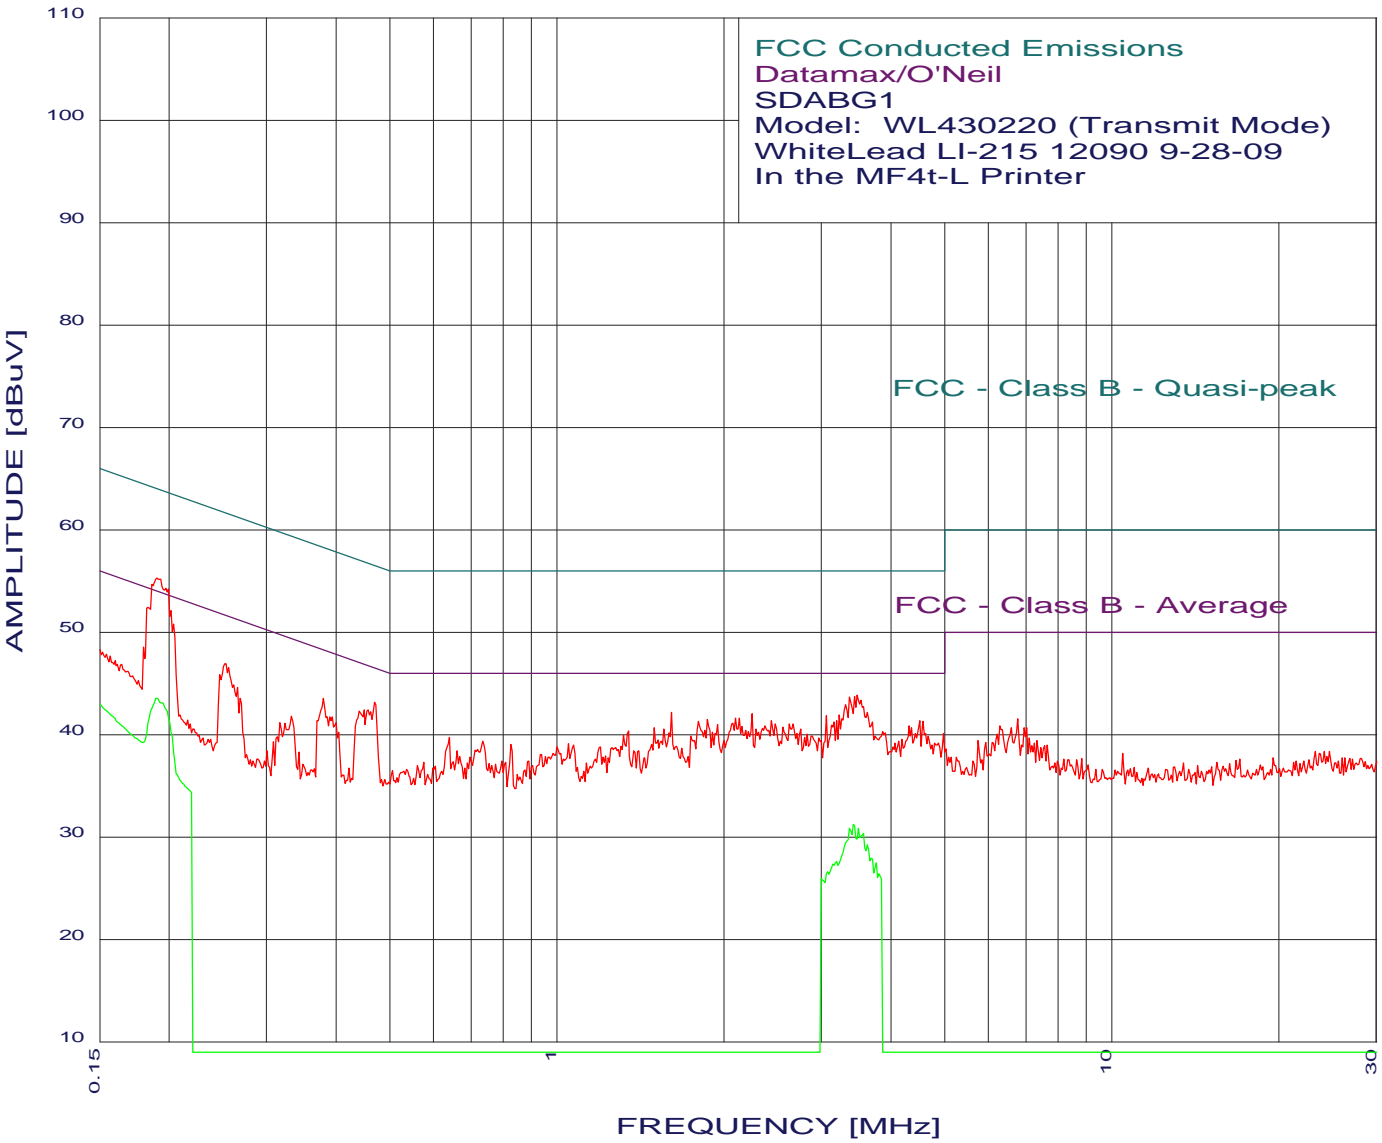

Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Agoura Division
2337 Troutdale Drive
Agoura, CA 91301
(818) 597-0600

Silverado Division
19121 El Toro Road
Silverado, CA 92676
(949) 589-0700

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

Datamax/O'Neil
SDABG1
Model: WL430220 (Transmit Mode) - In the MF4t-L Printer
White Lead - 120 VAC, 60 Hz
TEST ENGINEER : Kyle Fujimoto

47 highest peaks above -50.00 dB of FCC - Class B - Average limit line

Peak criteria : 1.00 dB, Curve : Peak

Peak#	Freq(MHz)	Amp(dBuV)	Limit(dB)	Delta(dB)
1	0.190	55.26	54.01	1.25*
2	3.474	43.84	46.00	-2.16*
3	3.438	43.74	46.00	-2.26*
4	3.365	43.64	46.00	-2.36*
5	3.311	42.94	46.00	-3.06*
6	0.469	43.19	46.53	-3.35
7	1.611	42.16	46.00	-3.84
8	2.250	42.01	46.00	-3.99
9	3.226	41.93	46.00	-4.07*
10	3.059	41.83	46.00	-4.17*
11	2.134	41.61	46.00	-4.39
12	2.100	41.61	46.00	-4.39
13	0.449	42.40	46.89	-4.49
14	1.869	41.49	46.00	-4.51
15	4.504	41.37	46.00	-4.63
16	3.192	41.33	46.00	-4.67*
17	2.436	41.31	46.00	-4.69
18	1.800	41.28	46.00	-4.72
19	4.576	41.27	46.00	-4.73
20	0.379	43.54	48.29	-4.75
21	0.252	46.93	51.68	-4.76
22	3.158	41.23	46.00	-4.77*
23	2.665	41.02	46.00	-4.98
24	2.475	41.02	46.00	-4.98
25	1.950	41.00	46.00	-5.00
26	4.316	40.86	46.00	-5.14
27	2.554	40.72	46.00	-5.28
28	1.496	40.64	46.00	-5.36
29	1.560	40.55	46.00	-5.45
30	2.751	40.52	46.00	-5.48
31	1.345	40.32	46.00	-5.68
32	1.908	40.19	46.00	-5.81
33	4.980	40.08	46.00	-5.92
34	2.826	40.02	46.00	-5.98
35	0.180	48.52	54.50	-5.98
36	1.318	39.92	46.00	-6.08
37	1.745	39.87	46.00	-6.13
38	2.885	39.83	46.00	-6.17
39	0.641	39.73	46.00	-6.27
40	2.963	39.63	46.00	-6.37
41	0.735	39.37	46.00	-6.63
42	4.137	39.36	46.00	-6.64
43	4.877	39.18	46.00	-6.82
44	1.049	39.09	46.00	-6.91
45	0.826	39.01	46.00	-6.99
46	1.072	38.99	46.00	-7.01
47	1.197	38.80	46.00	-7.20

*Please See the Average Readings on the Next Page and on the Plot

Datamax/O'Neil
SDABG1
Model: WL430220 (Transmit Mode) - In the MF4t-L Printer
White Lead - 120 VAC, 60 Hz
TEST ENGINEER : Kyle Fujimoto


13 highest peaks above -50.00 dB of FCC - Class B - Average limit line
Peak criteria : 0.00 dB, Curve : Average

Peak#	Freq(MHz)	Amp(dBuV)	Limit(dB)	Delta(dB)
1	0.189	43.55	54.06	-10.51
2	3.419	31.25	46.00	-14.75
3	3.365	30.87	46.00	-15.13
4	3.492	30.84	46.00	-15.16
5	3.565	30.37	46.00	-15.63
6	3.624	29.19	46.00	-16.81
7	3.683	27.88	46.00	-18.12
8	3.192	27.58	46.00	-18.42
9	3.761	27.50	46.00	-18.50
10	3.141	27.34	46.00	-18.66
11	3.075	26.57	46.00	-19.43
12	3.800	26.38	46.00	-19.62
13	2.995	25.97	46.00	-20.03



3/02/2010 15:39:03

EMISSION LEVEL [dBuV] PEAK
Graph for **Peak** & **Average**

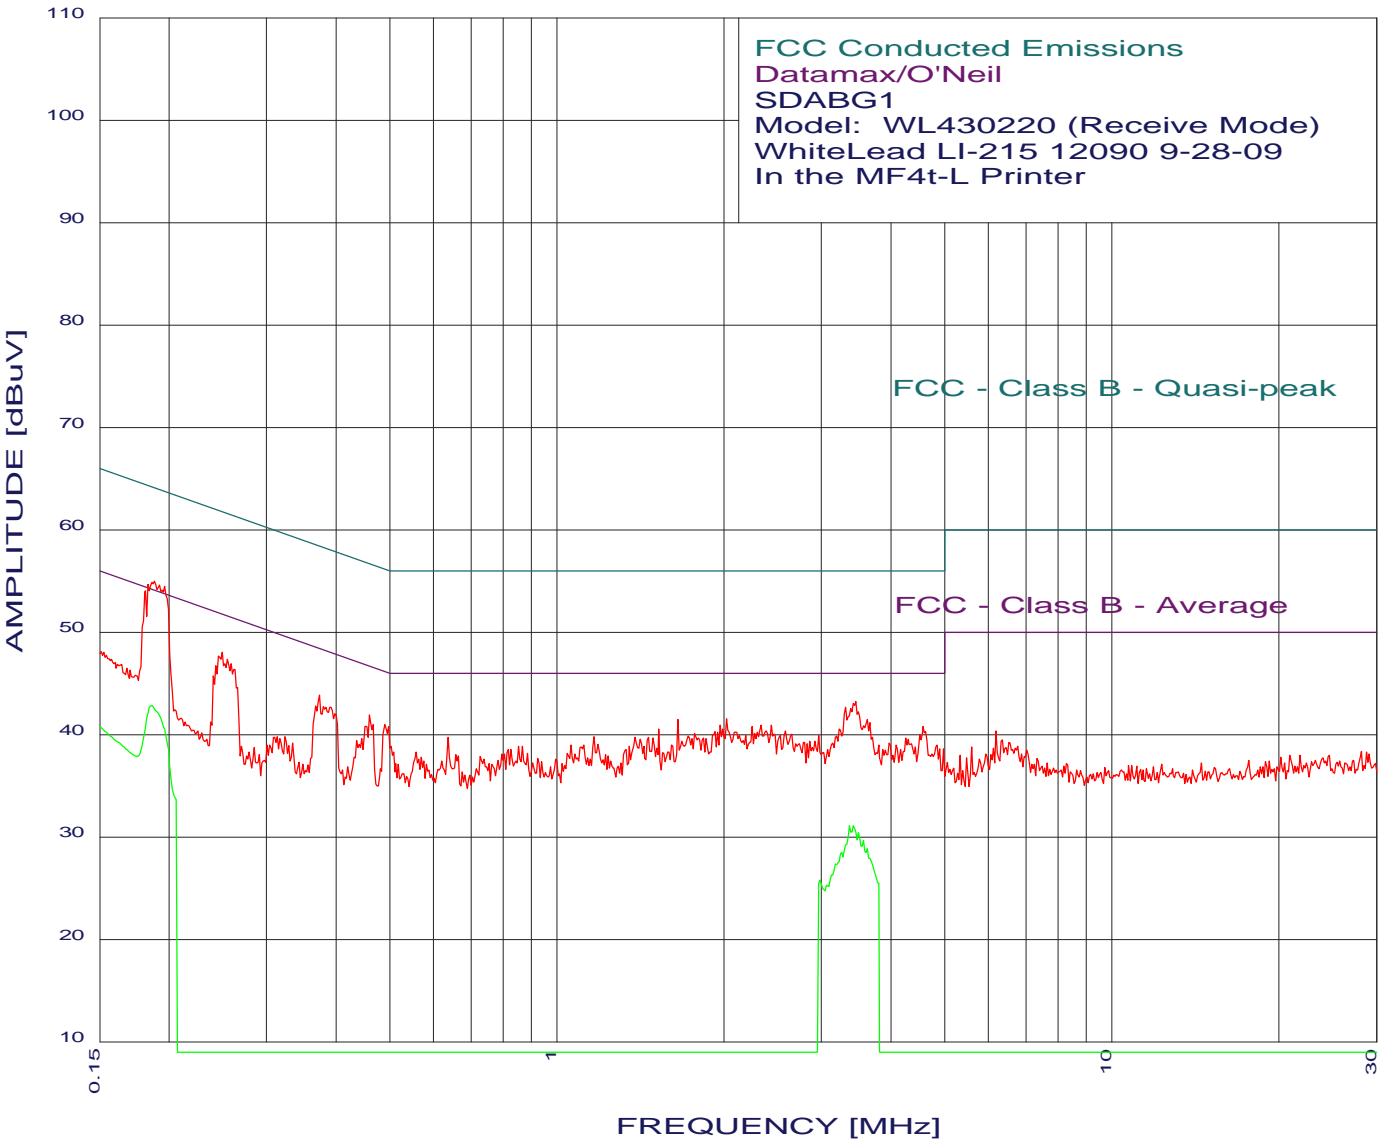

Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Agoura Division
2337 Troutdale Drive
Agoura, CA 91301
(818) 597-0600

Silverado Division
19121 El Toro Road
Silverado, CA 92676
(949) 589-0700

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

Datamax/O'Neil
SDABG1
Model: WL430220 (Receive Mode) - In the MF4t-L Printer
White Lead - 120 VAC, 60 Hz
TEST ENGINEER : Kyle Fujimoto

47 highest peaks above -50.00 dB of FCC - Class B - Average limit line

Peak criteria : 1.00 dB, Curve : Peak

Peak#	Freq(MHz)	Amp(dBuV)	Limit(dB)	Delta(dB)
1	0.188	54.95	54.10	0.85*
2	0.182	54.03	54.41	-0.39*
3	3.456	43.24	46.00	-2.76*
4	3.311	42.64	46.00	-3.36*
5	0.250	48.03	51.77	-3.74
6	2.023	41.50	46.00	-4.50
7	1.654	41.46	46.00	-4.54
8	3.624	41.44	46.00	-4.56*
9	0.373	43.85	48.43	-4.58
10	0.459	41.89	46.71	-4.82
11	2.436	40.91	46.00	-5.09
12	2.334	40.91	46.00	-5.09
13	1.971	40.90	46.00	-5.10
14	2.250	40.81	46.00	-5.19
15	0.489	40.97	46.18	-5.21
16	4.576	40.77	46.00	-5.23
17	1.528	40.55	46.00	-5.45
18	2.582	40.32	46.00	-5.68
19	1.929	40.30	46.00	-5.70
20	2.111	40.21	46.00	-5.79
21	1.950	40.20	46.00	-5.80
22	1.772	40.08	46.00	-5.92
23	2.651	40.02	46.00	-5.98
24	0.452	40.80	46.85	-6.05
25	2.963	39.93	46.00	-6.07
26	2.527	39.92	46.00	-6.08
27	1.726	39.87	46.00	-6.13
28	1.166	39.80	46.00	-6.20
29	1.464	39.74	46.00	-6.26
30	1.382	39.73	46.00	-6.27
31	0.637	39.73	46.00	-6.27
32	1.840	39.68	46.00	-6.32
33	4.249	39.66	46.00	-6.34
34	1.488	39.64	46.00	-6.36
35	1.859	39.59	46.00	-6.41
36	2.796	39.22	46.00	-6.78
37	3.966	39.15	46.00	-6.85
38	2.826	39.12	46.00	-6.88
39	1.118	38.99	46.00	-7.01
40	1.060	38.99	46.00	-7.01
41	4.851	38.98	46.00	-7.02
42	4.092	38.96	46.00	-7.04
43	1.611	38.96	46.00	-7.04
44	1.352	38.82	46.00	-7.18
45	0.867	38.82	46.00	-7.18
46	0.853	38.82	46.00	-7.18
47	0.445	39.60	46.98	-7.37

*Please See the Average Reading on the Next Page and on the Plot

Datamax/O'Neil
SDABG1
Model: WL430220 (Receive Mode) - In the MF4t-L Printer
White Lead - 120 VAC, 60 Hz
TEST ENGINEER : Kyle Fujimoto


11 highest peaks above -50.00 dB of FCC - Class B - Average limit line
Peak criteria : 0.00 dB, Curve : Average

Peak#	Freq(MHz)	Amp(dBuV)	Limit(dB)	Delta(dB)
1	0.186	42.87	54.19	-11.33
2	3.419	31.09	46.00	-14.91
3	3.365	31.09	46.00	-14.91
4	3.492	30.40	46.00	-15.60
5	3.565	29.65	46.00	-16.35
6	3.624	28.83	46.00	-17.17
7	3.260	28.45	46.00	-17.55
8	3.663	27.92	46.00	-18.08
9	3.175	27.34	46.00	-18.66
10	2.979	25.79	46.00	-20.21
11	3.059	25.25	46.00	-20.75



2/26/2010 13:46:06

EMISSION LEVEL [dBuV] PEAK
Graph for Peak & Average

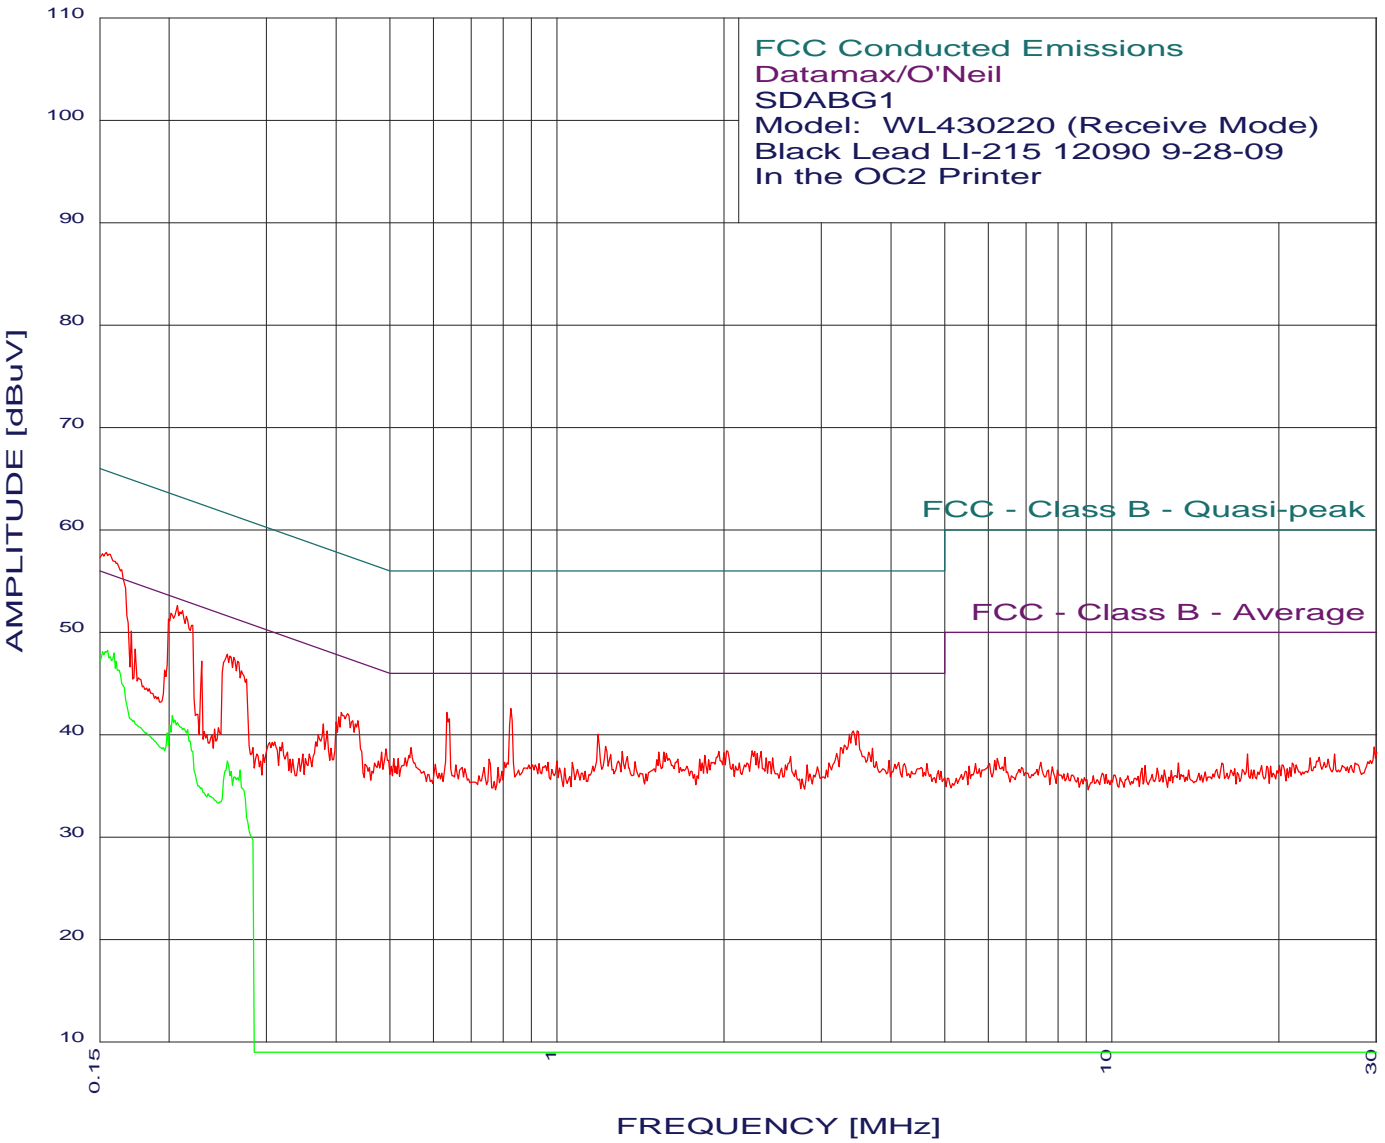

Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Agoura Division
2337 Troutdale Drive
Agoura, CA 91301
(818) 597-0600

Silverado Division
19121 El Toro Road
Silverado, CA 92676
(949) 589-0700

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

Datamax/O'Neil
SDABG1
Model: WL430220 (Receive Mode) - In the OC2 Printer
Black Lead - 120 VAC, 60 Hz
Test Engineer: James Ross

49 highest peaks above -50.00 dB of FCC - Class B - Average limit line

Peak criteria : 1.00 dB, Curve : Peak

Peak#	Freq(MHz)	Amp(dBuV)	Limit(dB)	Delta(dB)
1	0.150	57.28	56.00	1.28**
2	0.207	52.57	53.31	-0.75**
3	0.826	42.52	46.00	-3.48
4	0.255	47.84	51.60	-3.76**
5	0.634	42.14	46.00	-3.86
6	0.171	50.11	54.90	-4.79**
7	0.229	47.15	52.48	-5.32**
8	0.409	42.14	47.68	-5.54
9	3.474	40.36	46.00	-5.64
10	3.419	40.35	46.00	-5.65
11	0.438	41.32	47.11	-5.79
12	1.184	40.01	46.00	-5.99
13	0.404	41.74	47.77	-6.03
14	0.174	48.32	54.77	-6.45**
15	0.400	41.24	47.86	-6.61
16	1.223	38.82	46.00	-7.18
17	0.379	41.06	48.29	-7.24
18	0.547	38.70	46.00	-7.30
19	3.702	38.66	46.00	-7.34
20	0.492	38.58	46.14	-7.55
21	2.250	38.42	46.00	-7.58
22	2.023	38.42	46.00	-7.58
23	1.311	38.33	46.00	-7.67
24	2.334	38.33	46.00	-7.67
25	1.960	38.31	46.00	-7.69
26	1.560	38.26	46.00	-7.74
27	1.528	38.26	46.00	-7.74
28	2.002	38.22	46.00	-7.78
29	0.385	40.35	48.16	-7.81
30	3.192	38.15	46.00	-7.85
31	2.298	38.13	46.00	-7.87
32	1.249	38.02	46.00	-7.98
33	0.484	38.29	46.27	-7.99
34	1.849	38.00	46.00	-8.00
35	1.338	37.83	46.00	-8.17
36	2.637	37.83	46.00	-8.17
37	2.449	37.73	46.00	-8.27
38	2.384	37.73	46.00	-8.27
39	0.518	37.69	46.00	-8.31
40	0.508	37.68	46.00	-8.32
41	1.810	37.59	46.00	-8.41
42	0.755	37.59	46.00	-8.41
43	3.966	37.47	46.00	-8.53
44	1.290	37.43	46.00	-8.57
45	1.000	37.39	46.00	-8.61
46	1.382	37.34	46.00	-8.66
47	2.423	37.33	46.00	-8.67
48	1.066	37.30	46.00	-8.70
49	0.963	37.28	46.00	-8.72

Datamax/O'Neil
SDABG1
Model: WL430220 (Receive Mode) - In the OC2 Printer
Black Lead - 120 VAC, 60 Hz
Test Engineer: James Ross

6 highest peaks above -50.00 dB of FCC - Class B - Average limit line


Peak criteria : 1.00 dB, Curve : Average

Peak#	Freq(MHz)	Amp(dBuV)	Limit(dB)	Delta(dB)
1	0.155	48.22	55.73	-7.52
2	0.150	47.20	56.00	-8.80
3	0.203	41.86	53.49	-11.63
4	0.199	40.17	53.67	-13.50
5	0.255	37.41	51.60	-14.19
6	0.269	36.52	51.15	-14.64



2/26/2010 13:15:32

EMISSION LEVEL [dBuV] PEAK
Graph for Peak & Average

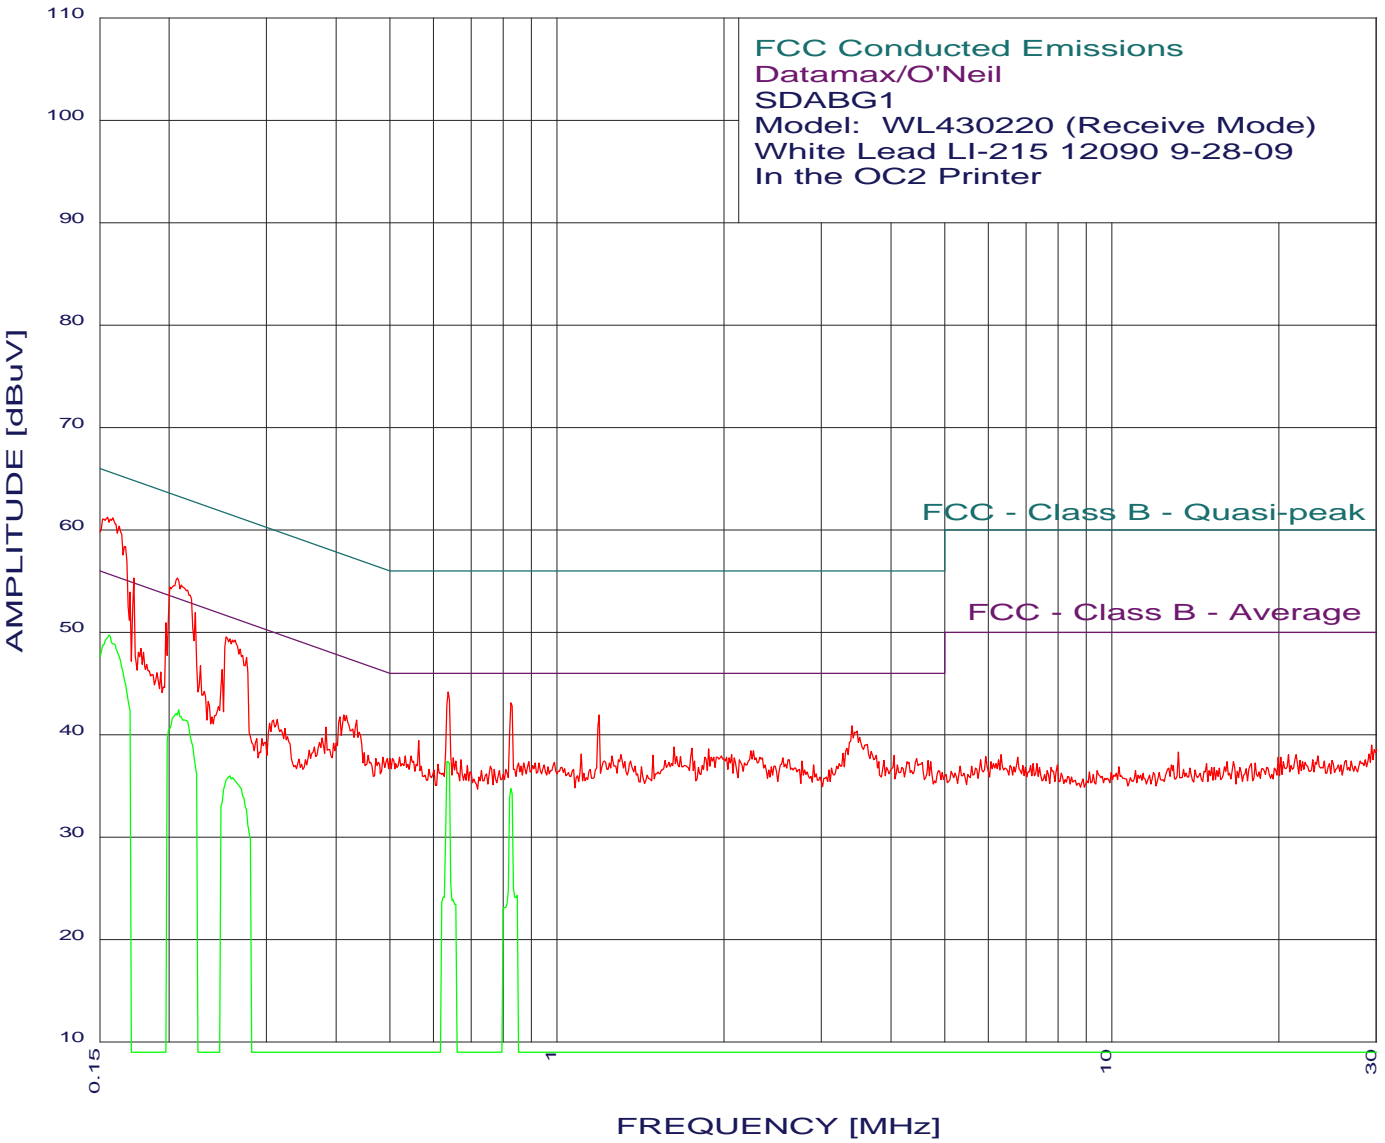

Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Agoura Division
2337 Troutdale Drive
Agoura, CA 91301
(818) 597-0600

Silverado Division
19121 El Toro Road
Silverado, CA 92676
(949) 589-0700

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

Datamax/O'Neil
 SDABG1
 Model: WL430220 (Receive Mode) - In the OC2 Printer
 White Lead - 120 VAC, 60 Hz
 Test Engineer: James Ross

 49 highest peaks above -50.00 dB of FCC - Class B - Average limit line

Peak criteria : 1.00 dB, Curve : Peak
 Peak# Freq(MHz) Amp(dBuV) Limit(dB) Delta(dB)

Peak#	Freq(MHz)	Amp(dBuV)	Limit(dB)	Delta(dB)
1	0.155	61.22	55.73	5.49**
2	0.207	55.31	53.31	2.00**
3	0.173	55.29	54.81	0.48**
4	0.223	51.93	52.70	-0.76**
5	0.170	53.88	54.94	-1.06**
6	0.637	44.13	46.00	-1.87**
7	0.254	49.52	51.64	-2.11**
8	0.198	50.89	53.71	-2.82**
9	0.826	43.11	46.00	-2.89**
10	1.191	41.90	46.00	-4.10
11	3.401	40.84	46.00	-5.16
12	0.250	46.33	51.77	-5.44
13	0.413	41.92	47.59	-5.67
14	0.435	41.41	47.15	-5.74
15	0.228	46.74	52.52	-5.78
16	0.406	41.73	47.72	-5.99
17	0.178	48.41	54.59	-6.18
18	0.180	48.02	54.50	-6.48
19	0.564	39.39	46.00	-6.61
20	1.629	38.76	46.00	-7.24
21	1.754	38.67	46.00	-7.33
22	1.879	38.59	46.00	-7.41
23	0.383	40.74	48.21	-7.46
24	2.262	38.41	46.00	-7.59
25	0.194	46.07	53.88	-7.81
26	3.277	38.14	46.00	-7.86
27	1.106	38.09	46.00	-7.91
28	0.190	46.06	54.01	-7.95
29	1.304	38.02	46.00	-7.98
30	2.066	38.01	46.00	-7.99
31	4.050	37.96	46.00	-8.04
32	1.488	37.94	46.00	-8.06
33	1.256	37.91	46.00	-8.09
34	1.981	37.90	46.00	-8.10
35	0.547	37.89	46.00	-8.11
36	0.532	37.88	46.00	-8.12
37	1.671	37.86	46.00	-8.14
38	1.849	37.79	46.00	-8.21
39	0.651	37.73	46.00	-8.27
40	2.554	37.72	46.00	-8.28
41	2.089	37.71	46.00	-8.29
42	4.456	37.67	46.00	-8.33
43	0.313	41.49	49.88	-8.39
44	0.486	37.78	46.23	-8.45
45	0.672	37.54	46.00	-8.46
46	2.134	37.51	46.00	-8.49
47	4.672	37.47	46.00	-8.53
48	3.882	37.45	46.00	-8.55
49	1.359	37.42	46.00	-8.58

Datamax/O'Neil
SDABG1
Model: WL430220 (Receive Mode) - In the OC2 Printer
White Lead - 120 VAC, 60 Hz
Test Engineer: James Ross

5 highest peaks above -50.00 dB of FCC - Class B - Average limit line


Peak criteria : 1.00 dB, Curve : Average

Peak#	Freq(MHz)	Amp(dBuV)	Limit(dB)	Delta(dB)
1	0.156	49.71	55.69	-5.97
2	0.637	37.36	46.00	-8.64
3	0.208	42.38	53.27	-10.89
4	0.826	34.74	46.00	-11.26
5	0.258	35.96	51.51	-15.55



2/26/2010 14:05:44

EMISSION LEVEL [dBuV] PEAK
Graph for Peak & Average

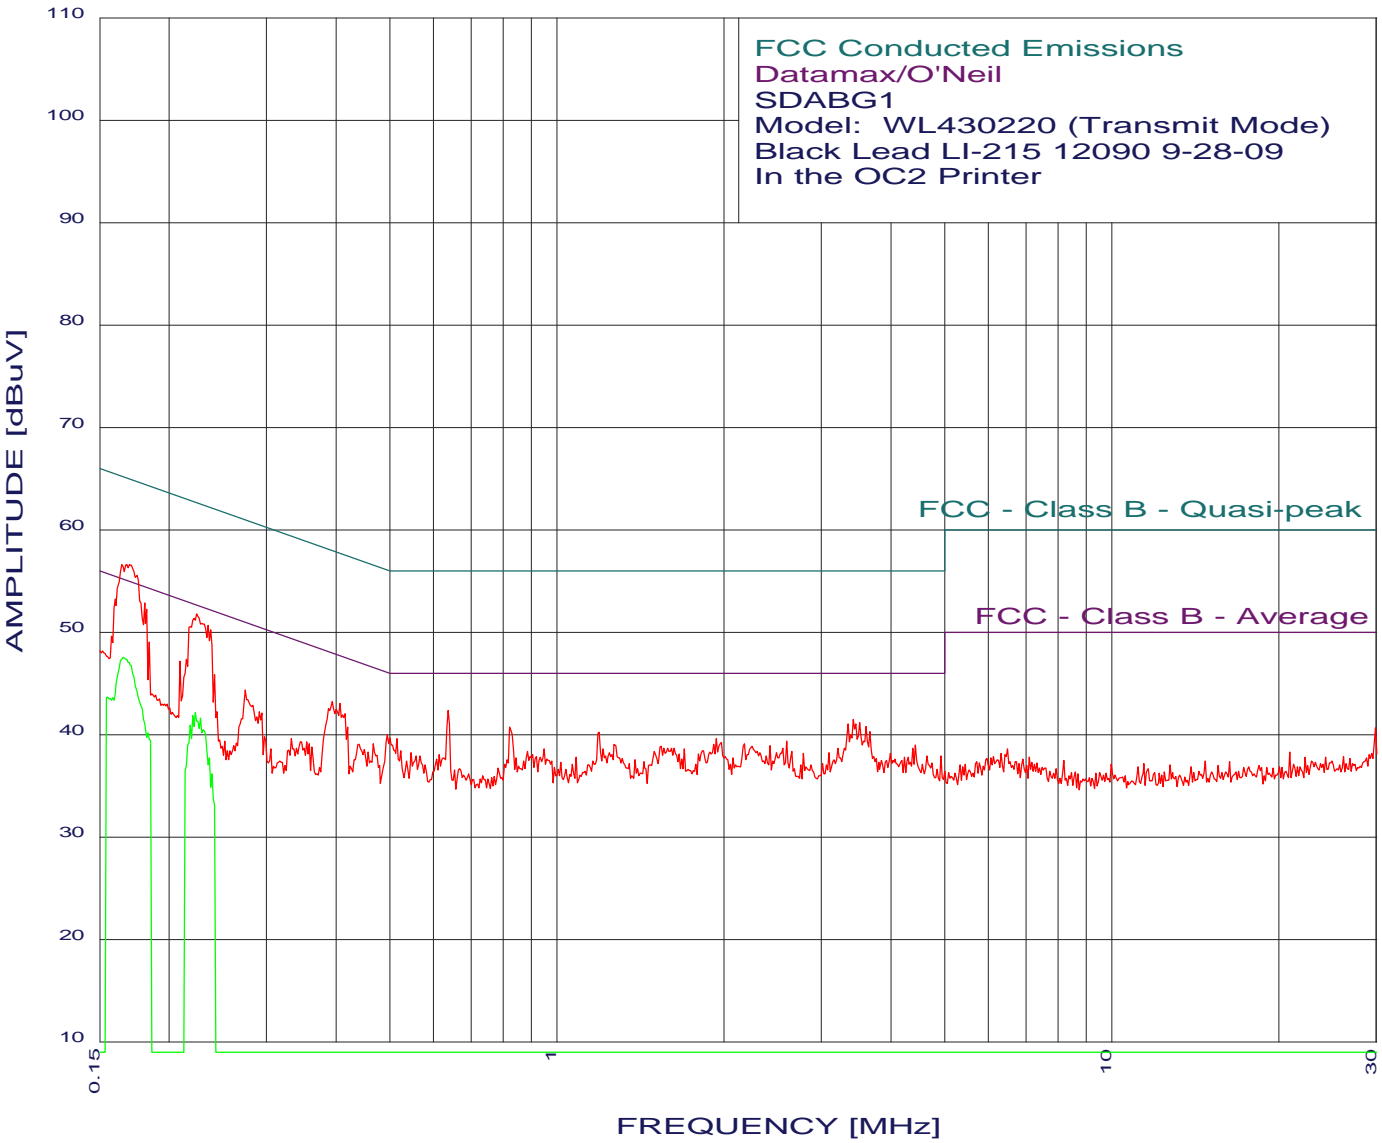

Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Agoura Division
2337 Troutdale Drive
Agoura, CA 91301
(818) 597-0600

Silverado Division
19121 El Toro Road
Silverado, CA 92676
(949) 589-0700

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

Datamax/O'Neil
SDABG1
Model: WL430220 (Transmit Mode) - In the OC2 Printer
Black Lead - 120 VAC, 60 Hz
Test Engineer: James Ross

49 highest peaks above -50.00 dB of FCC - Class B - Average limit line

Peak criteria : 1.00 dB, Curve : Peak

Peak#	Freq(MHz)	Amp(dBuV)	Limit(dB)	Delta(dB)
1	0.170	56.61	54.98	1.62**
2	0.224	51.76	52.65	-0.90**
3	0.235	50.65	52.25	-1.61**
4	0.181	52.83	54.46	-1.62**
5	0.238	50.25	52.17	-1.92**
6	0.183	52.24	54.37	-2.13**
7	0.637	42.34	46.00	-3.66
8	3.419	41.45	46.00	-4.55
9	0.406	43.04	47.72	-4.68
10	0.393	43.25	47.99	-4.74
11	3.511	41.16	46.00	-4.84
12	3.346	41.05	46.00	-4.95
13	3.605	40.76	46.00	-5.24
14	0.184	49.04	54.28	-5.24
15	0.822	40.72	46.00	-5.28
16	3.663	40.26	46.00	-5.74
17	1.191	40.22	46.00	-5.78
18	0.210	47.16	53.23	-6.06
19	0.494	39.98	46.09	-6.11
20	0.242	45.84	52.04	-6.19
21	1.939	39.61	46.00	-6.39
22	0.516	39.59	46.00	-6.41
23	0.275	44.32	50.98	-6.66
24	2.596	39.33	46.00	-6.67
25	0.419	40.73	47.46	-6.73
26	2.179	39.12	46.00	-6.88
27	1.269	39.03	46.00	-6.97
28	4.432	38.98	46.00	-7.02
29	2.423	38.93	46.00	-7.07
30	1.544	38.86	46.00	-7.14
31	2.250	38.82	46.00	-7.18
32	4.384	38.68	46.00	-7.32
33	3.209	38.65	46.00	-7.35
34	2.554	38.63	46.00	-7.37
35	1.210	38.62	46.00	-7.38
36	1.699	38.58	46.00	-7.42
37	0.948	38.57	46.00	-7.43
38	0.466	39.10	46.58	-7.48
39	1.840	38.40	46.00	-7.60
40	0.524	38.39	46.00	-7.61
41	1.496	38.35	46.00	-7.65
42	0.885	38.34	46.00	-7.66
43	2.651	38.33	46.00	-7.67
44	3.091	38.25	46.00	-7.75
45	0.547	38.20	46.00	-7.80
46	0.150	48.18	56.00	-7.82
47	3.987	38.17	46.00	-7.83
48	2.781	38.14	46.00	-7.86
49	0.614	38.03	46.00	-7.97

Datamax/O'Neil
SDABG1
Model: WL430220 (Transmit Mode) - In the OC2 Printer
Black Lead - 120 VAC, 60 Hz
Test Engineer: James Ross

5 highest peaks above -50.00 dB of FCC - Class B - Average limit line


Peak criteria : 1.00 dB, Curve : Average

Peak#	Freq(MHz)	Amp(dBuV)	Limit(dB)	Delta(dB)
1	0.165	47.55	55.20	-7.65
2	0.223	42.13	52.70	-10.57
3	0.221	41.86	52.78	-10.93
4	0.219	40.88	52.87	-11.99
5	0.239	36.13	52.12	-16.00



2/26/2010 14:19:15

EMISSION LEVEL [dBuV] PEAK
Graph for Peak & Average

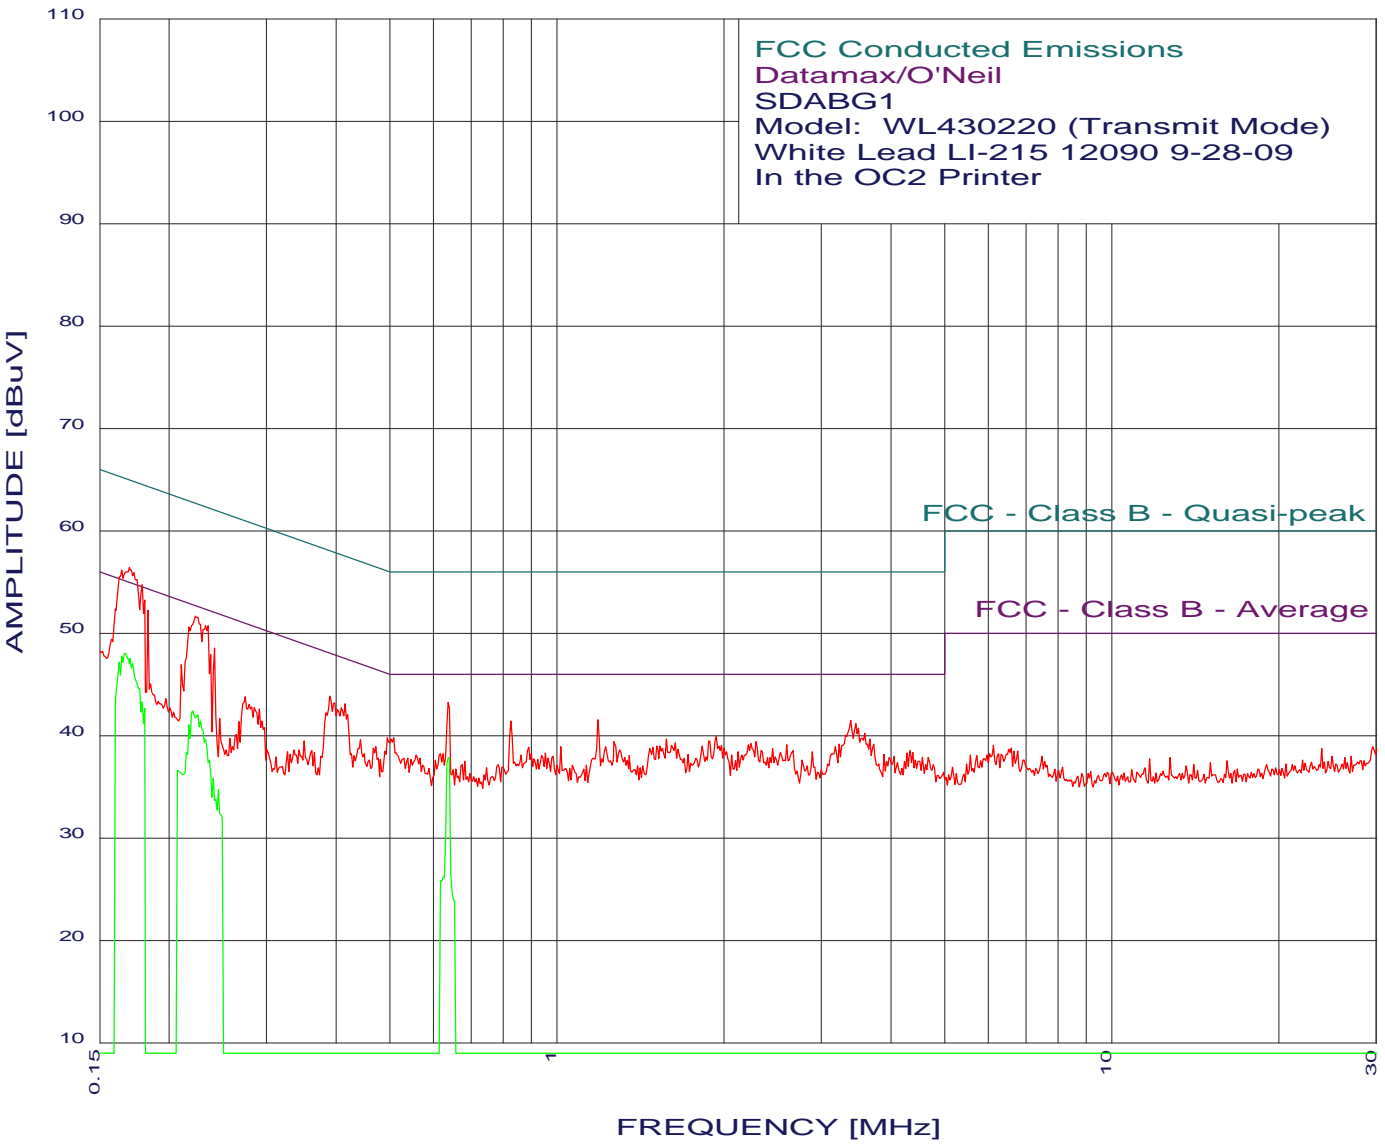

Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Agoura Division
2337 Troutdale Drive
Agoura, CA 91301
(818) 597-0600

Silverado Division
19121 El Toro Road
Silverado, CA 92676
(949) 589-0700

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

Datamax/O'Neil
SDABG1
Model: WL430220 (Transmit Mode) - In the OC2 Printer
White Lead - 120 VAC, 60 Hz
Test Engineer: James Ross

49 highest peaks above -50.00 dB of FCC - Class B - Average limit line

Peak criteria : 1.00 dB, Curve : Peak

Peak#	Freq(MHz)	Amp(dBuV)	Limit(dB)	Delta(dB)
1	0.170	56.38	54.98	1.39**
2	0.179	54.72	54.54	0.17**
3	0.223	51.63	52.70	-1.06**
4	0.181	53.22	54.46	-1.23**
5	0.233	50.74	52.34	-1.60**
6	0.183	52.23	54.33	-2.09**
7	0.637	43.23	46.00	-2.77**
8	0.242	48.53	52.04	-3.51**
9	0.238	47.93	52.17	-4.23**
10	0.389	43.84	48.08	-4.24
11	0.415	43.12	47.55	-4.43
12	1.184	41.50	46.00	-4.50
13	3.383	41.44	46.00	-4.56
14	0.826	41.41	46.00	-4.59
15	3.456	41.14	46.00	-4.86
16	1.939	39.90	46.00	-6.10
17	0.211	46.91	53.18	-6.27
18	0.494	39.77	46.09	-6.32
19	1.577	39.65	46.00	-6.35
20	3.663	39.65	46.00	-6.35
21	1.879	39.49	46.00	-6.51
22	1.269	39.41	46.00	-6.59
23	2.286	39.41	46.00	-6.59
24	2.238	39.21	46.00	-6.79
25	3.722	39.15	46.00	-6.85
26	3.226	39.13	46.00	-6.87
27	2.596	39.12	46.00	-6.88
28	1.830	38.98	46.00	-7.02
29	1.536	38.95	46.00	-7.05
30	1.512	38.94	46.00	-7.06
31	3.175	38.93	46.00	-7.07
32	1.223	38.91	46.00	-7.09
33	1.016	38.88	46.00	-7.12
34	1.488	38.84	46.00	-7.16
35	0.890	38.83	46.00	-7.17
36	0.275	43.81	50.98	-7.17
37	2.002	38.80	46.00	-7.20
38	2.449	38.72	46.00	-7.28
39	1.297	38.62	46.00	-7.38
40	0.442	39.60	47.02	-7.41
41	4.339	38.56	46.00	-7.44
42	2.665	38.52	46.00	-7.48
43	2.334	38.51	46.00	-7.49
44	2.885	38.43	46.00	-7.57
45	2.123	38.41	46.00	-7.59
46	0.471	38.89	46.49	-7.60
47	4.384	38.36	46.00	-7.64
48	4.272	38.26	46.00	-7.74
49	0.953	38.26	46.00	-7.74

Datamax/O'Neil
802.11 a/b/g Module
Model: WL430220 (Transmit Mode) - In the OC2 Printer
White Lead - 120 VAC, 60 Hz
Test Engineer: James Ross

8 highest peaks above -50.00 dB of FCC - Class B - Average limit line


Peak criteria : 1.00 dB, Curve : Average

Peak#	Freq(MHz)	Amp(dBuV)	Limit(dB)	Delta(dB)
1	0.166	48.00	55.16	-7.16
2	0.637	37.85	46.00	-8.15
3	0.162	47.16	55.34	-8.18
4	0.221	42.43	52.78	-10.35
5	0.181	42.65	54.46	-11.80
6	0.217	41.00	52.91	-11.91
7	0.240	35.82	52.08	-16.26
8	0.246	34.71	51.90	-17.19



2/26/2010 14:34:40

EMISSION LEVEL [dBuV] PEAK
Graph for Peak & Average

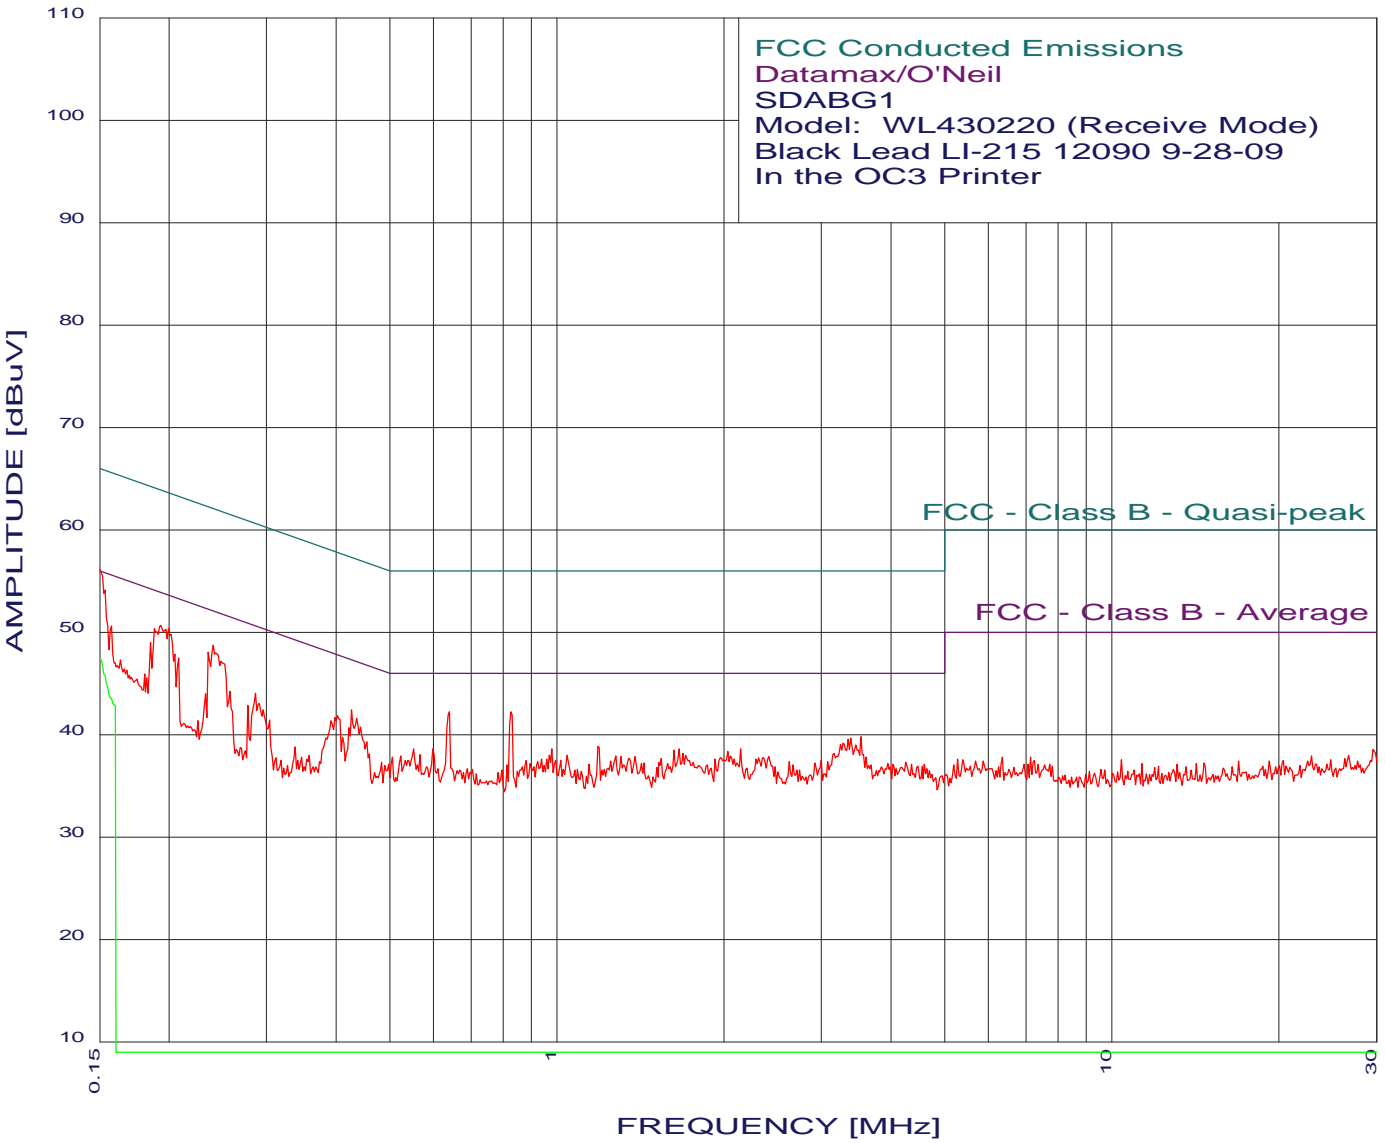

Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Agoura Division
2337 Troutdale Drive
Agoura, CA 91301
(818) 597-0600

Silverado Division
19121 El Toro Road
Silverado, CA 92676
(949) 589-0700

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

Datamax/O'Neil
SDABG1
Model: WL430220 (Receive Mode) - In the OC3 Printer
Black Lead - 120 VAC, 60 Hz
Test Engineer: James Ross

49 highest peaks above -50.00 dB of FCC - Class B - Average limit line

Peak criteria : 1.00 dB, Curve : Peak

Peak#	Freq(MHz)	Amp(dBuV)	Limit(dB)	Delta(dB)
1	0.150	56.08	56.00	0.08**
2	0.194	50.66	53.88	-3.23
3	0.200	50.37	53.62	-3.25
4	0.240	48.75	52.08	-3.34
5	0.641	42.24	46.00	-3.76
6	0.826	42.22	46.00	-3.78
7	0.235	48.05	52.25	-4.21
8	0.426	42.43	47.33	-4.90
9	0.157	50.59	55.60	-5.01
10	0.185	48.94	54.24	-5.30
11	0.208	47.47	53.27	-5.80
12	0.402	41.84	47.81	-5.97
13	3.529	39.76	46.00	-6.24
14	3.383	39.65	46.00	-6.35
15	0.286	44.02	50.63	-6.61
16	1.184	38.81	46.00	-7.19
17	0.258	44.23	51.51	-7.27
18	2.145	38.62	46.00	-7.38
19	0.598	38.62	46.00	-7.38
20	0.552	38.60	46.00	-7.40
21	0.979	38.58	46.00	-7.42
22	1.663	38.58	46.00	-7.42
23	1.629	38.47	46.00	-7.53
24	2.034	38.32	46.00	-7.68
25	1.690	38.18	46.00	-7.82
26	0.411	39.74	47.63	-7.90
27	0.567	38.01	46.00	-7.99
28	1.043	38.00	46.00	-8.00
29	0.277	42.82	50.89	-8.07
30	1.276	37.93	46.00	-8.07
31	0.524	37.89	46.00	-8.11
32	1.382	37.84	46.00	-8.16
33	1.304	37.83	46.00	-8.17
34	2.410	37.83	46.00	-8.17
35	0.505	37.78	46.00	-8.22
36	3.605	37.76	46.00	-8.24
37	1.544	37.66	46.00	-8.34
38	1.352	37.64	46.00	-8.36
39	1.929	37.61	46.00	-8.39
40	0.233	43.95	52.34	-8.39
41	0.939	37.57	46.00	-8.43
42	1.016	37.49	46.00	-8.51
43	0.995	37.49	46.00	-8.51
44	0.181	45.93	54.46	-8.52
45	2.995	37.44	46.00	-8.56
46	0.881	37.44	46.00	-8.56
47	2.624	37.33	46.00	-8.67
48	4.249	37.28	46.00	-8.72
49	1.434	37.25	46.00	-8.75


Datamax/O'Neil
SDABG1
Model: WL430220 (Receive Mode) - In the OC3 Printer
Black Lead - 120 VAC, 60 Hz
Test Engineer: James Ross

1 highest peaks above -50.00 dB of FCC - Class B - Average limit line
Peak criteria : 1.00 dB, Curve : Average
Peak# Freq(MHz) Amp(dBuV) Limit(dB) Delta(dB)
1 0.150 47.29 56.00 -8.71



2/26/2010 14:58:26

EMISSION LEVEL [dBuV] PEAK
Graph for Peak & Average

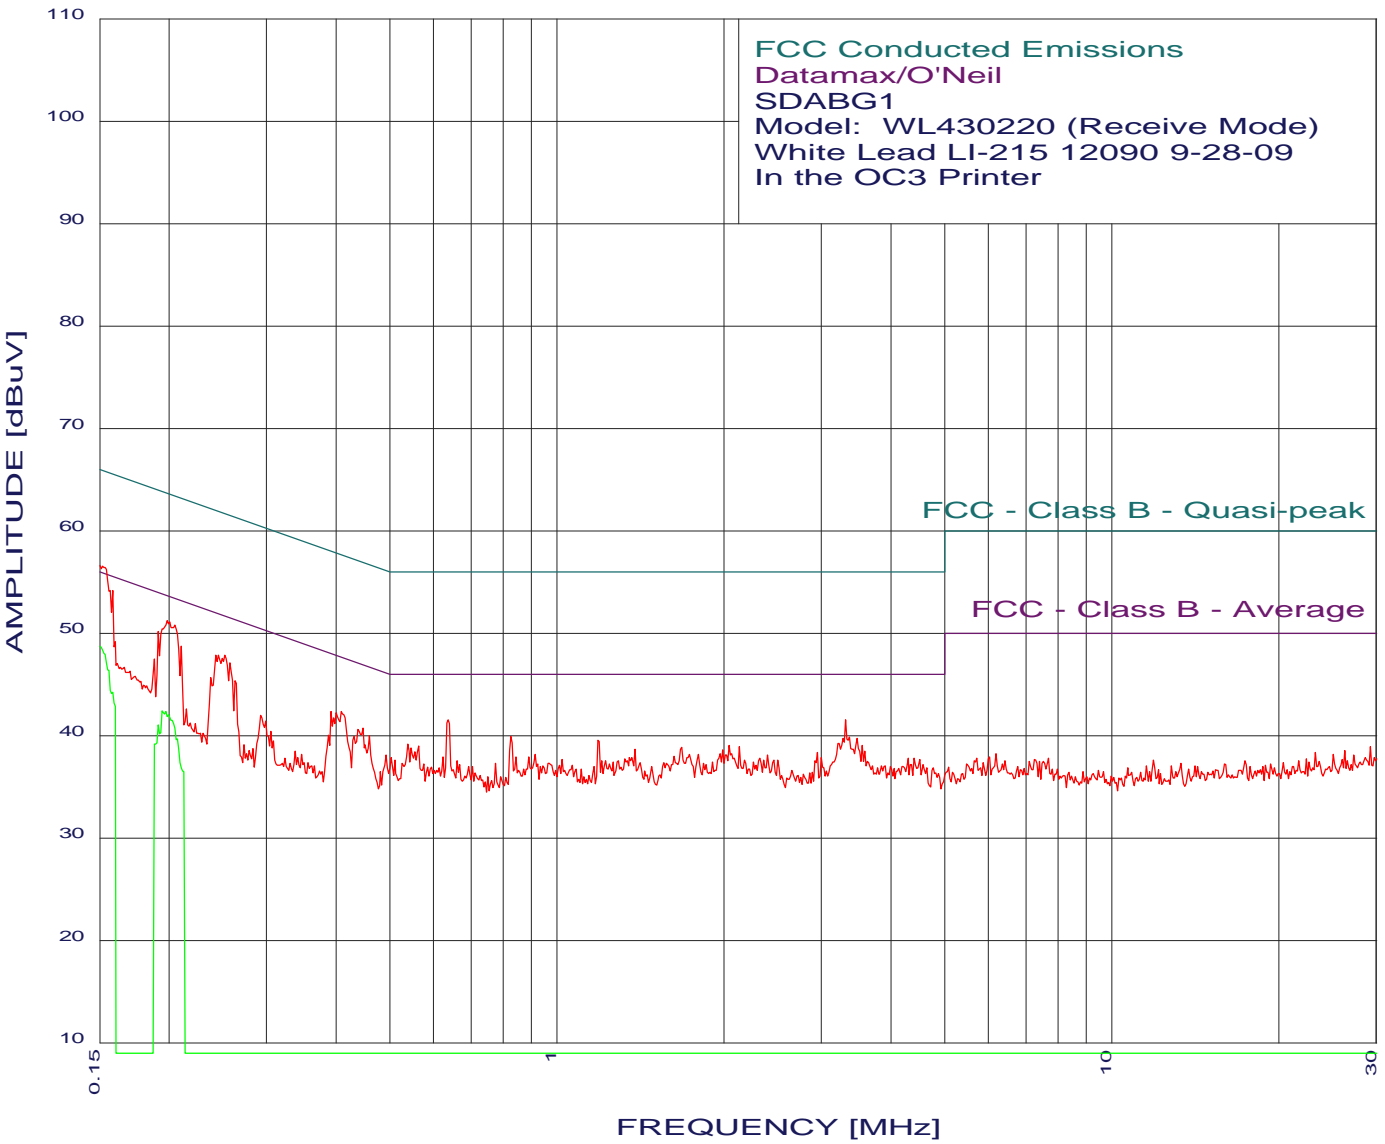

Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Agoura Division
2337 Troutdale Drive
Agoura, CA 91301
(818) 597-0600

Silverado Division
19121 El Toro Road
Silverado, CA 92676
(949) 589-0700

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

Datamax/O'Neil
SDABG1
Model: WL430220 (Receive Mode) - In the OC3 Printer
White Lead - 120 VAC, 60 Hz
Test Engineer: James Ross

49 highest peaks above -50.00 dB of FCC - Class B - Average limit line

Peak criteria : 1.00 dB, Curve : Peak

Peak#	Freq(MHz)	Amp(dBuV)	Limit(dB)	Delta(dB)
1	0.150	56.60	56.00	0.60**
2	0.158	54.13	55.56	-1.42**
3	0.199	51.19	53.67	-2.47**
4	0.192	50.17	53.97	-3.80**
5	0.243	47.83	52.00	-4.16
6	0.258	47.12	51.51	-4.39
7	3.311	41.54	46.00	-4.46
8	0.211	48.71	53.18	-4.47**
9	0.637	41.53	46.00	-4.47
10	0.409	42.33	47.68	-5.35
11	0.391	42.34	48.03	-5.70
12	0.263	45.32	51.33	-6.01
13	0.826	39.91	46.00	-6.09
14	0.447	40.70	46.93	-6.23
15	3.474	39.74	46.00	-6.26
16	1.184	39.50	46.00	-6.50
17	0.188	47.45	54.10	-6.65
18	0.459	39.99	46.71	-6.72
19	0.538	39.18	46.00	-6.82
20	3.547	39.04	46.00	-6.96
21	2.044	39.01	46.00	-6.99
22	0.564	38.99	46.00	-7.01
23	2.134	38.91	46.00	-7.09
24	1.680	38.86	46.00	-7.14
25	0.547	38.79	46.00	-7.21
26	1.382	38.63	46.00	-7.37
27	1.992	38.60	46.00	-7.40
28	3.585	38.44	46.00	-7.56
29	2.948	38.33	46.00	-7.67
30	1.800	38.18	46.00	-7.82
31	0.914	38.14	46.00	-7.86
32	2.397	38.11	46.00	-7.89
33	0.492	38.07	46.14	-8.07
34	0.890	37.93	46.00	-8.07
35	0.387	40.04	48.12	-8.08
36	0.624	37.92	46.00	-8.08
37	0.844	37.91	46.00	-8.09
38	0.502	37.87	46.00	-8.13
39	2.995	37.83	46.00	-8.17
40	2.322	37.81	46.00	-8.19
41	4.408	37.76	46.00	-8.24
42	4.294	37.76	46.00	-8.24
43	1.021	37.68	46.00	-8.32
44	2.501	37.62	46.00	-8.38
45	2.462	37.62	46.00	-8.38
46	0.510	37.57	46.00	-8.43
47	0.293	42.00	50.45	-8.45
48	0.662	37.54	46.00	-8.46
49	1.223	37.51	46.00	-8.49

Datamax/O'Neil
SDABG1
Model: WL430220 (Receive Mode) - In the OC3 Printer
White Lead - 120 VAC, 60 Hz
Test Engineer: James Ross

2 highest peaks above -50.00 dB of FCC - Class B - Average limit line


Peak criteria : 1.00 dB, Curve : Average

Peak#	Freq(MHz)	Amp(dBuV)	Limit(dB)	Delta(dB)
1	0.150	48.74	56.00	-7.26
2	0.195	42.42	53.84	-11.42



2/26/2010 15:09:56

EMISSION LEVEL [dBuV] PEAK
Graph for Peak & Average

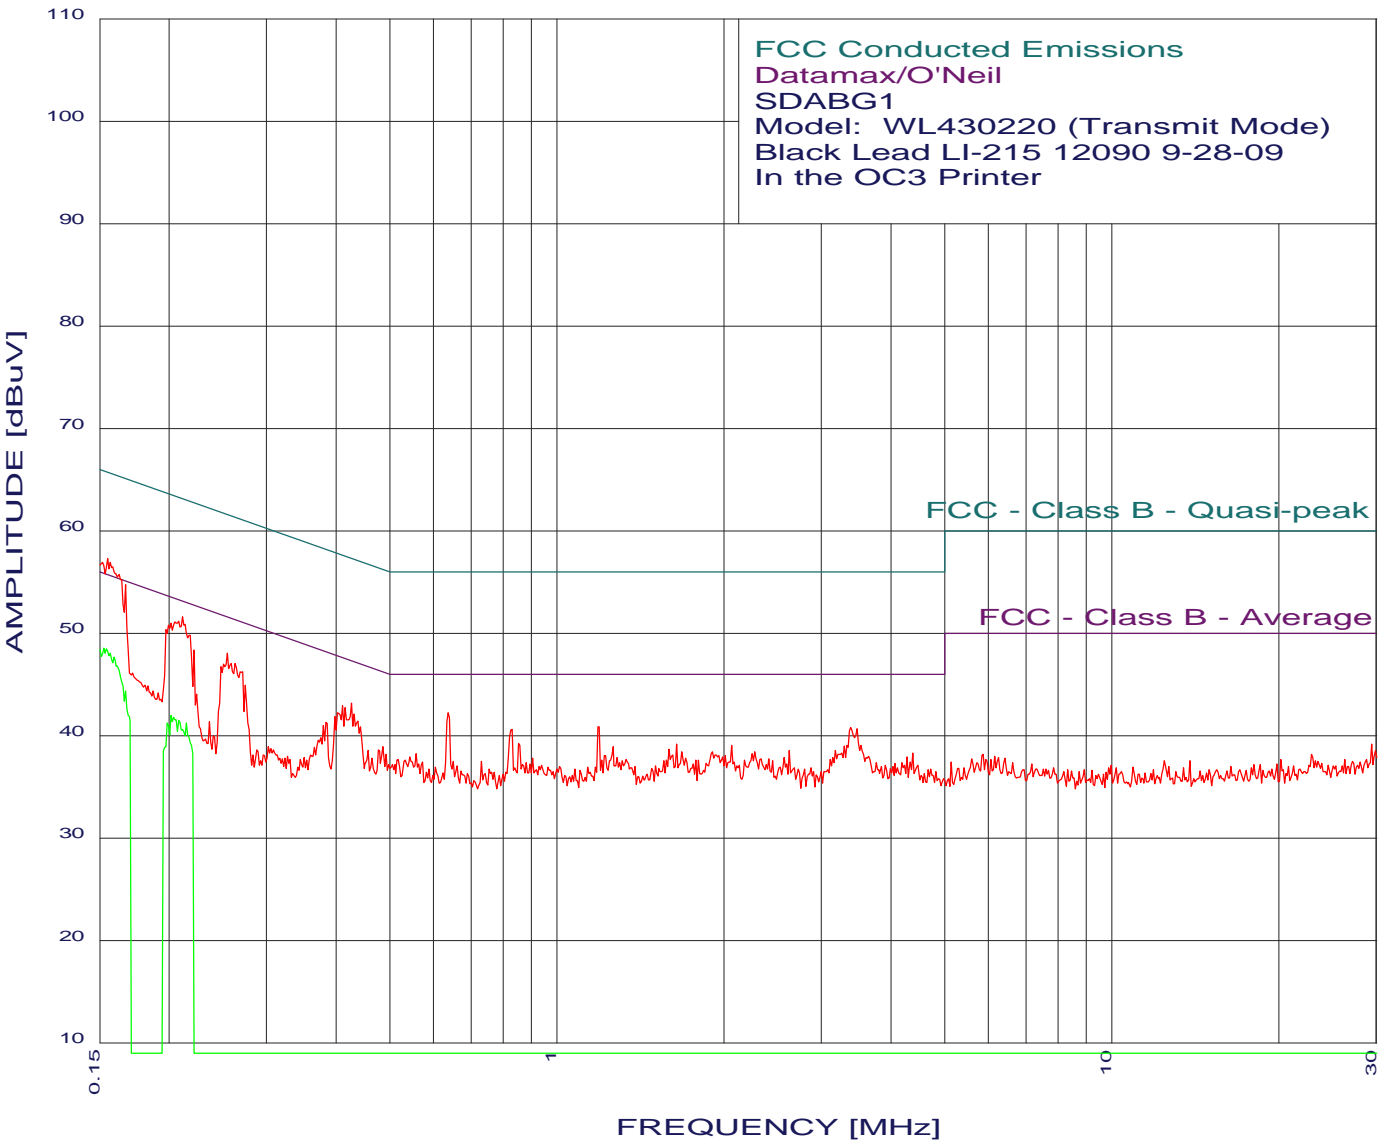

Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Agoura Division
2337 Troutdale Drive
Agoura, CA 91301
(818) 597-0600

Silverado Division
19121 El Toro Road
Silverado, CA 92676
(949) 589-0700

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

Datamax/O'Neil
SDABG1
Model: WL430220 (Transmit Mode) - In the OC3 Printer
Black Lead - 120 VAC, 60 Hz
Test Engineer: James Ross

49 highest peaks above -50.00 dB of FCC - Class B - Average limit line

Peak criteria : 1.00 dB, Curve : Peak

Peak#	Freq(MHz)	Amp(dBuV)	Limit(dB)	Delta(dB)
1	0.155	57.29	55.73	1.55**
2	0.150	56.68	56.00	0.68**
3	0.167	54.70	55.11	-0.41**
4	0.212	51.56	53.14	-1.58**
5	0.255	48.04	51.60	-3.56
6	0.637	42.24	46.00	-3.76
7	0.426	43.13	47.33	-4.20
8	0.222	48.36	52.74	-4.38
9	0.411	42.94	47.63	-4.70
10	0.415	42.73	47.55	-4.81
11	0.431	42.12	47.24	-5.12
12	1.191	40.82	46.00	-5.18
13	3.383	40.75	46.00	-5.25
14	0.831	40.62	46.00	-5.38
15	0.398	41.84	47.90	-6.06
16	0.275	44.92	50.98	-6.06
17	0.853	39.23	46.00	-6.77
18	1.646	39.17	46.00	-6.83
19	0.383	41.25	48.21	-6.95
20	2.066	39.02	46.00	-6.98
21	3.294	38.95	46.00	-7.05
22	1.262	38.92	46.00	-7.08
23	1.594	38.67	46.00	-7.33
24	0.379	40.96	48.29	-7.34
25	0.486	38.89	46.23	-7.34
26	2.624	38.53	46.00	-7.47
27	2.274	38.42	46.00	-7.58
28	1.908	38.41	46.00	-7.59
29	1.680	38.38	46.00	-7.62
30	4.384	38.28	46.00	-7.72
31	0.558	38.20	46.00	-7.80
32	0.476	38.59	46.40	-7.81
33	0.492	38.18	46.14	-7.95
34	1.223	38.02	46.00	-7.98
35	2.013	38.02	46.00	-7.98
36	4.272	37.88	46.00	-8.12
37	2.568	37.83	46.00	-8.17
38	0.904	37.75	46.00	-8.25
39	0.457	38.51	46.76	-8.25
40	2.410	37.73	46.00	-8.27
41	2.334	37.73	46.00	-8.27
42	0.518	37.69	46.00	-8.31
43	1.331	37.63	46.00	-8.37
44	1.204	37.62	46.00	-8.38
45	1.800	37.59	46.00	-8.41
46	1.781	37.59	46.00	-8.41
47	1.560	37.56	46.00	-8.44
48	2.449	37.53	46.00	-8.47
49	0.731	37.48	46.00	-8.52

Datamax/O'Neil
SDABG1
Model: WL430220 (Transmit Mode) - In the OC3 Printer
Black Lead - 120 VAC, 60 Hz
Test Engineer: James Ross

5 highest peaks above -50.00 dB of FCC - Class B - Average limit line


Peak criteria : 1.00 dB, Curve : Average

Peak#	Freq(MHz)	Amp(dBuV)	Limit(dB)	Delta(dB)
1	0.150	48.42	56.00	-7.58
2	0.202	42.00	53.53	-11.53
3	0.215	41.20	53.00	-11.80
4	0.208	41.46	53.27	-11.81
5	0.199	41.22	53.67	-12.45



2/26/2010 15:19:02

EMISSION LEVEL [dBuV] PEAK
Graph for Peak & Average

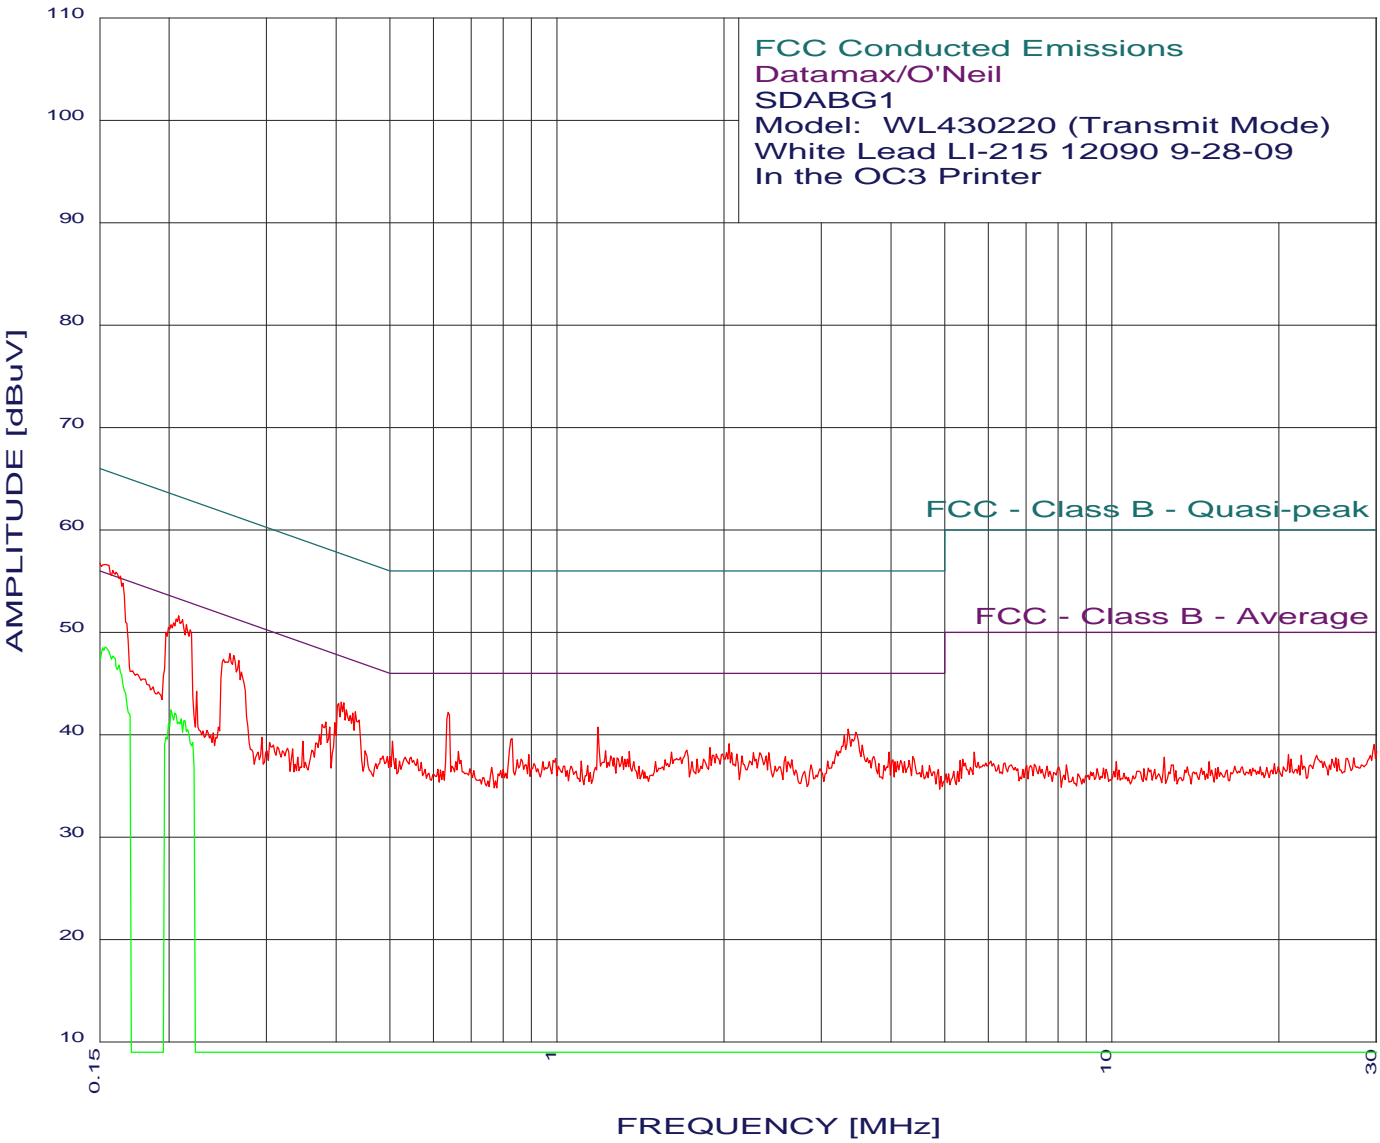

Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Agoura Division
2337 Troutdale Drive
Agoura, CA 91301
(818) 597-0600

Silverado Division
19121 El Toro Road
Silverado, CA 92676
(949) 589-0700

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

Datamax/O'Neil
SDABG1
Model: WL430220 (Transmit Mode) - In the OC3 Printer
White Lead - 120 VAC, 60 Hz
Test Engineer: James Ross

49 highest peaks above -50.00 dB of FCC - Class B - Average limit line

Peak criteria : 1.00 dB, Curve : Peak

Peak#	Freq(MHz)	Amp(dBuV)	Limit(dB)	Delta(dB)
1	0.150	56.70	56.00	0.70**
2	0.208	51.61	53.27	-1.66**
3	0.215	50.72	53.00	-2.28**
4	0.258	47.92	51.51	-3.59
5	0.637	42.13	46.00	-3.87
6	0.267	47.22	51.20	-3.98
7	0.409	43.13	47.68	-4.55
8	0.404	43.03	47.77	-4.74
9	0.433	42.21	47.19	-4.98
10	1.184	40.70	46.00	-5.30
11	3.346	40.54	46.00	-5.46
12	3.456	40.24	46.00	-5.76
13	3.294	39.94	46.00	-6.06
14	0.831	39.61	46.00	-6.39
15	0.505	39.37	46.00	-6.63
16	0.398	41.13	47.90	-6.77
17	2.044	39.11	46.00	-6.89
18	0.383	41.24	48.21	-6.96
19	3.547	38.94	46.00	-7.06
20	1.889	38.69	46.00	-7.31
21	0.389	40.74	48.08	-7.34
22	1.717	38.47	46.00	-7.53
23	1.223	38.41	46.00	-7.59
24	0.665	38.34	46.00	-7.66
25	1.352	38.32	46.00	-7.68
26	1.611	38.26	46.00	-7.74
27	3.966	38.25	46.00	-7.75
28	2.410	38.21	46.00	-7.79
29	2.322	38.21	46.00	-7.79
30	2.262	38.21	46.00	-7.79
31	2.066	38.21	46.00	-7.79
32	2.111	38.11	46.00	-7.89
33	0.890	38.03	46.00	-7.97
34	1.249	37.91	46.00	-8.09
35	2.156	37.91	46.00	-8.09
36	4.384	37.86	46.00	-8.14
37	3.722	37.85	46.00	-8.15
38	2.582	37.82	46.00	-8.18
39	1.311	37.82	46.00	-8.18
40	0.547	37.79	46.00	-8.21
41	0.995	37.68	46.00	-8.32
42	0.513	37.67	46.00	-8.33
43	0.486	37.88	46.23	-8.35
44	0.862	37.62	46.00	-8.38
45	0.224	44.23	52.65	-8.42
46	1.790	37.58	46.00	-8.42
47	4.029	37.55	46.00	-8.45
48	0.452	38.40	46.85	-8.45
49	2.651	37.52	46.00	-8.48

Datamax/O'Neil
SDABG1
Model: WL430220 (Transmit Mode) - In the OC3 Printer
White Lead - 120 VAC, 60 Hz
Test Engineer: James Ross

4 highest peaks above -50.00 dB of FCC - Class B - Average limit line
Peak criteria : 1.00 dB, Curve : Average
Peak# Freq(MHz) Amp(dBuV) Limit(dB) Delta(dB)
1 0.153 48.50 55.82 -7.32
2 0.150 47.23 56.00 -8.77
3 0.202 42.38 53.53 -11.15
4 0.213 41.37 53.09 -11.73
