



FCC EMI TEST REPORT

FCC ID : LHJ-BL28EURD1
Equipment : BL28EU-RD1
Brand Name : BL28EU-RD1
Model Name : BL28EU-RD1
Marketing Name : BL28EU-RD1
Applicant : Continental Automotive Systems, Inc.
21440 W Lake Cook Rd.
Manufacturer : Continental Automotive Systems, Inc.
21440 W Lake Cook Rd.
Standard : FCC 47 CFR FCC Part 15 Subpart B

The product was received on Mar. 30, 2019 and testing was started from Apr. 06, 2019 and completed on Apr. 06, 2019. We, SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures given in ANSI C63.4-2014 and has been in compliance with the applicable technical standards.

The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any agency of government.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.

Approved by: Jones Tsai

SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory

No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.)



Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1. General Description	5
1.1. Product Feature of Equipment Under Test	5
1.2. Modification of EUT	5
1.3. Test Location	5
1.4. Applicable Standards	5
2. Test Configuration of Equipment Under Test	6
2.1. Test Mode	6
2.2. Connection Diagram of Test System	6
2.3. Support Unit used in test configuration and system.....	6
2.4. EUT Operation Test Setup	6
3. Test Result	7
3.1. Test of Radiated Emission Measurement	7
4. List of Measuring Equipment.....	9
5. Uncertainty of Evaluation	10
Appendix A. Radiated Emission Test Result	
Appendix B. Setup Photographs	



Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
-	15.107	AC Conducted Emission	Not Required	-
3.1	15.109	Radiated Emission	Pass	Under limit 4.62 dB at 201.690 MHz

Note: Not required means after assessing, test items are not necessary to carry out.

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

Reviewed by: Louis Wu

Report Producer: Elise Chang



1. General Description

1.1. Product Feature of Equipment Under Test

GSM/WCDMA/LTE, and GNSS.

Product Specification subjective to this standard	
Antenna Type	WWAN: Fixed External Antenna GPS/Glonass/BDS/Galileo/SBAS: Fixed External Antenna

1.2. Modification of EUT

No modifications are made to the EUT during all test items.

1.3. Test Location

Test Site	SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory
Test Site Location	No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.) TEL: +886-3-327-3456 FAX: +886-3-328-4978
Test Site No.	Sporton Site No.
	03CH10-HY

FCC Designation No. TW1093

1.4. Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC 47 CFR FCC Part 15 Subpart B
- ♦ ANSI C63.4-2014

Remark: All test items were verified and recorded according to the standards and without any deviation during the test.


2. Test Configuration of Equipment Under Test

2.1. Test Mode

The EUT has been associated with peripherals pursuant to ANSI C63.4-2014 and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: radiation emission (30MHz to the 5th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower).

Test Items	Function Type
Radiated Emissions	Mode 1 : LTE Band 7 Idle + DC 12V

2.2. Connection Diagram of Test System

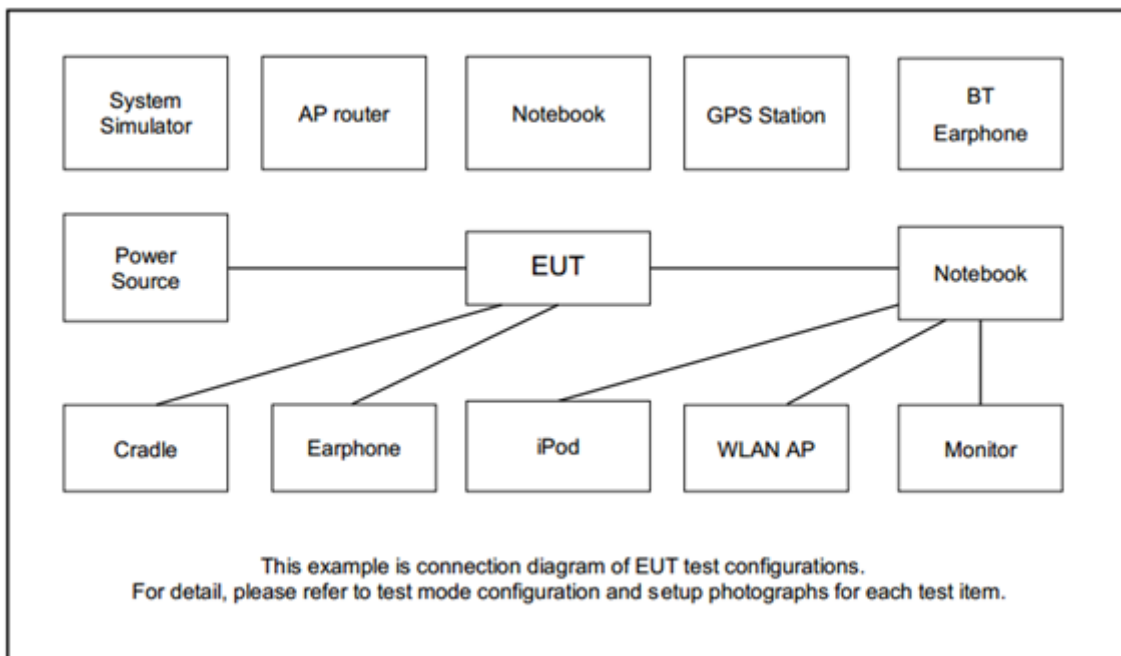

2.3. Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	System Simulator	Anritsu	MT8820C	N/A	N/A	Unshielded, 1.8 m
2.	Notebook	Lenovo	E335	FCC DoC	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m

2.4. EUT Operation Test Setup

The EUT was in LTE idle mode during the testing. The EUT was synchronized with the BCCH, and had been continuous receiving mode by setting paging reorganization of the system simulator.



3. Test Result

3.1. Test of Radiated Emission Measurement

3.1.1. Limit of Radiated Emission

The emissions from an unintentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.1.2. Measuring Instruments


Refer a test equipment and calibration data table in this test report.

3.1.3. Test Procedures


1. The EUT was placed on a turntable with 0.8 meter above ground.
2. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest radiation.
4. The antenna height is adjusted between one to four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode (RBW=120kHz/VBW=300kHz for frequency below 1GHz; RBW=1MHz VBW=3MHz (Peak), RBW=1MHz/VBW=10Hz (Average) for frequency above 1GHz).
7. If the emission level of the EUT in peak mode was 3 dB lower than the limit specified, peak values of EUT will be reported. Otherwise, the emission will be repeated by using the quasi-peak method and reported.
8. Emission level (dB μ V/m) = 20 log Emission level (μ V/m)
9. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level

3.1.4. Test Setup of Radiated Emission

For radiated emissions from 30MHz to 1GHz

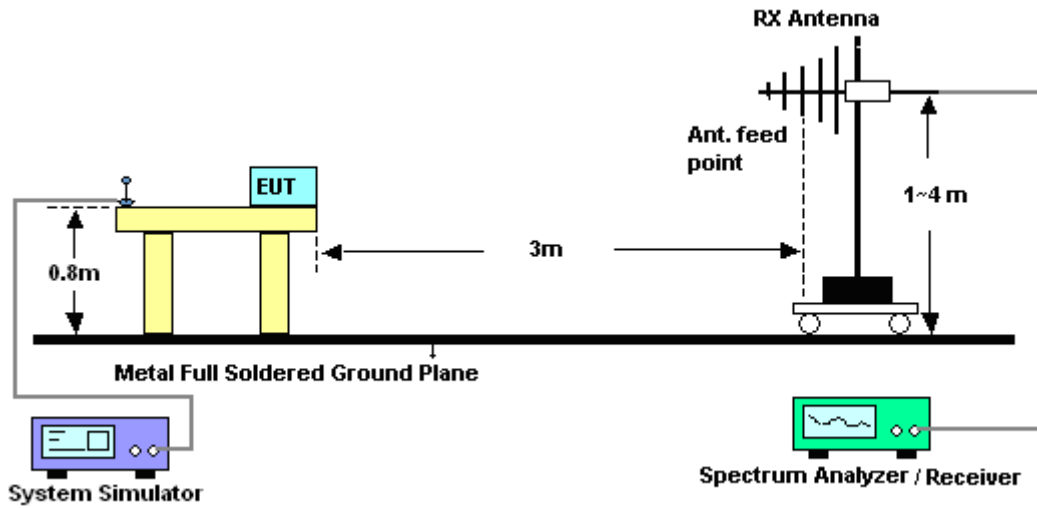

For radiated emissions above 1GHz

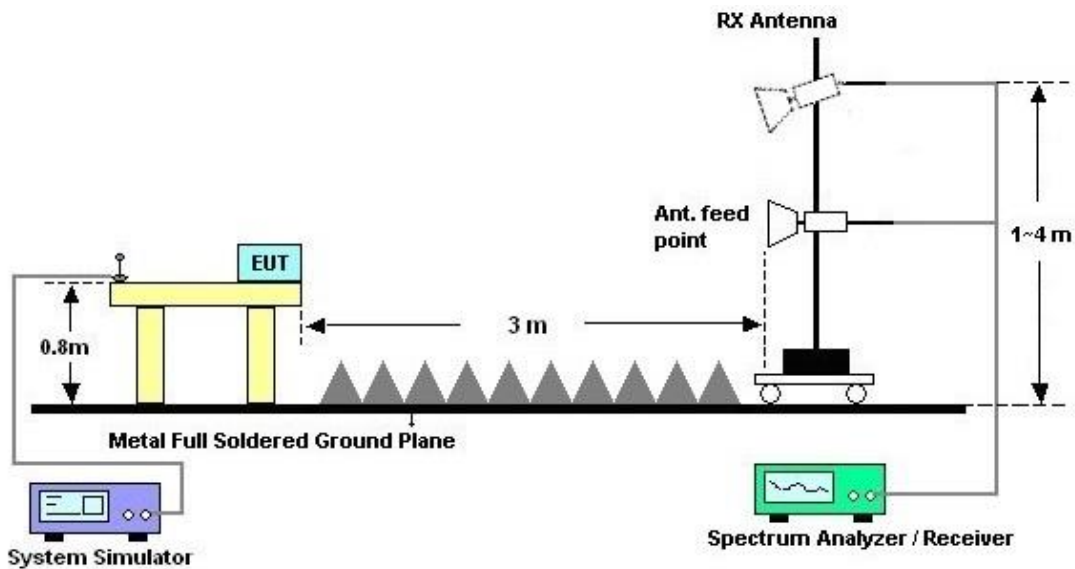

3.1.5. Test Result of Radiated Emission

Please refer to Appendix A.



4. List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Amplifier	SONOMA	310N	187311	9kHz~1GHz	Oct. 23, 2018	Apr. 06, 2019	Oct. 22, 2019	Radiation (03CH10-HY)
Bilog Antenna	TESEQ	CBL 6111D&00800 N1D01N-06	35413&02	30MHz~1GHz	Feb. 12, 2019	Apr. 06, 2019	Feb. 11, 2020	Radiation (03CH10-HY)
Horn Antenna	SCHWARZBE CK	BBHA 9120 D	9120D-1325	1GHz ~ 18GHz	Oct. 02, 2018	Apr. 06, 2019	Oct. 01, 2019	Radiation (03CH10-HY)
Preamplifier	Jet-Power	JAP00101800- 30-10P	16011855000 4	1GHz~18GHz	Apr. 17, 2018	Apr. 06, 2019	Apr. 16, 2019	Radiation (03CH10-HY)
Spectrum Analyzer	Keysight	N9010A	MY54200485	10Hz ~ 44GHz	Nov. 02, 2018	Apr. 06, 2019	Nov. 01, 2019	Radiation (03CH10-HY)
Antenna Mast	EMEC	AM-BS-4500-B	N/A	1~4m	N/A	Apr. 06, 2019	N/A	Radiation (03CH10-HY)
Turn Table	EMEC	TT 2200	N/A	0~360 Degree	N/A	Apr. 06, 2019	N/A	Radiation (03CH10-HY)
Software	Audix	E3 6.2009-8-24	RK-001042	N/A	N/A	Apr. 06, 2019	N/A	Radiation (03CH10-HY)
EMI Test Receiver	Keysight	N9038A(MXE)	MY54130085	20Hz ~ 8.4GHz	Nov. 01, 2018	Apr. 06, 2019	Oct. 31, 2019	Radiation (03CH10-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104 / 102	MY11692/4P E,MY11693/4 PE,MY2855/2	30M-1G	Nov. 08, 2018	Apr. 06, 2019	Nov. 07, 2019	Radiation (03CH10-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104 / 102	MY11692/4P E,MY11693/4 PE,MY2855/2	1G-18G	Nov. 08, 2018	Apr. 06, 2019	Nov. 07, 2019	Radiation (03CH10-HY)



5. Uncertainty of Evaluation

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.6
---	-----


Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.9
---	-----



Appendix A. Radiated Emission Test Result

Test Engineer :	Yun Huang	Temperature :	20~22°C
		Relative Humidity :	51~54%
Test Distance :	3m	Polarization :	Horizontal
Remark :	#10 is system simulator signal which can be ignored.		

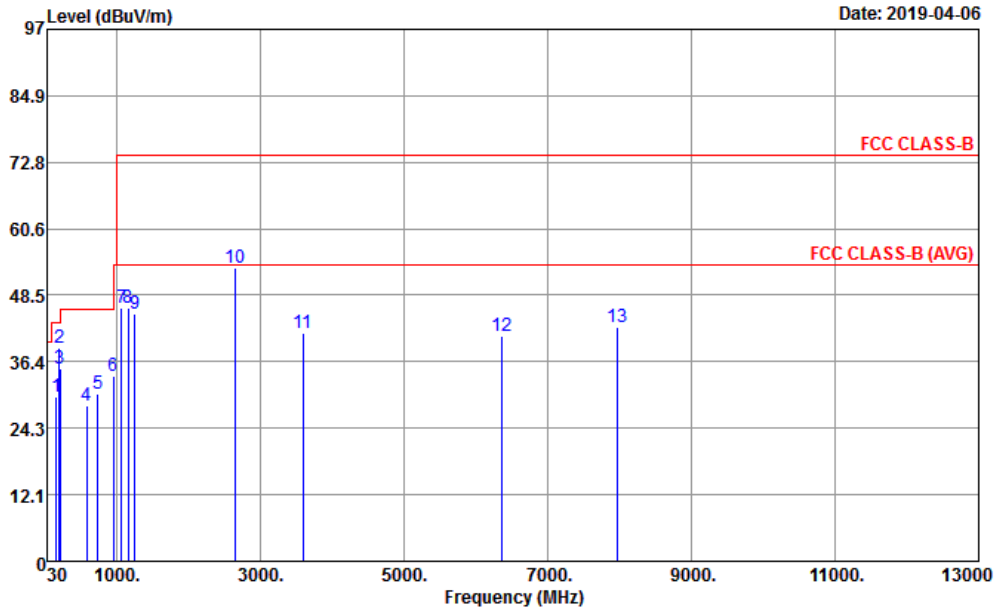


Site : 03CH10-HY
 Condition : FCC CLASS-B 3m HORN 9120D-HF HORIZONTAL
 Project : 933002
 Power : DC 12V
 Mode : 1

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Factor	Preamp Loss	A/Pos	T/Pos	Remark	
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	161.92	29.92	-13.58	43.50	44.89	16.31	1.34	32.62	---	---	Peak
2	201.69	38.88	-4.62	43.50	54.91	15.07	1.49	32.59	100	0	Peak
3	211.39	35.20	-8.30	43.50	51.13	15.12	1.54	32.59	---	---	Peak
4	583.87	28.36	-17.64	46.00	32.44	25.90	2.73	32.71	---	---	Peak
5	731.31	30.42	-15.58	46.00	32.06	27.75	3.12	32.51	---	---	Peak
6	948.59	33.65	-12.35	46.00	30.59	30.89	3.51	31.34	---	---	Peak
7	1070.00	46.09	-27.91	74.00	79.44	24.36	3.82	61.53	---	---	Peak
8	1158.00	46.29	-27.71	74.00	78.67	25.10	4.08	61.56	100	0	Peak
9	1252.00	45.08	-28.92	74.00	77.07	25.31	4.30	61.60	---	---	Peak
10	2654.00	53.61			80.71	27.51	7.22	61.83	---	---	Peak
11	3596.00	41.66	-32.34	74.00	66.88	28.89	8.11	62.22	---	---	Peak
12	6370.00	40.97	-33.03	74.00	60.48	33.52	9.94	62.97	---	---	Peak
13	7968.00	42.69	-31.31	74.00	58.20	36.87	11.23	63.61	---	---	Peak



Test Engineer :	Yun Huang	Temperature :	20~22°C
		Relative Humidity :	51~54%
Test Distance :	3m	Polarization :	Vertical
Remark :	#9 is system simulator signal which can be ignored.		

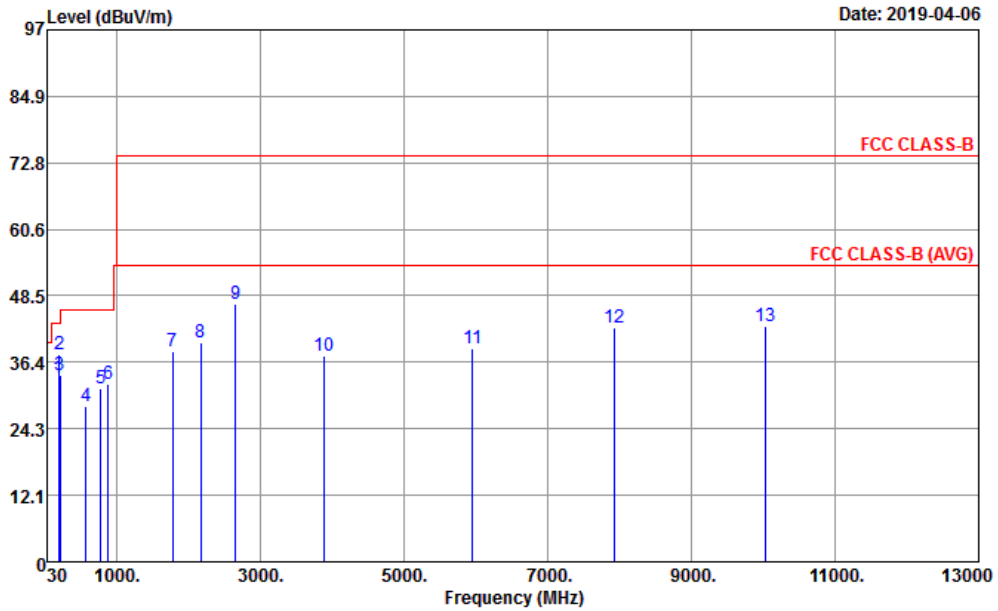

Site : 03CH10-HY
 Condition : FCC CLASS-B 3m HORN 9120D-HF VERTICAL
 Project : 933002
 Power : DC 12V
 Mode : 1

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Factor	Preamp Loss	A/Pos	T/Pos	Remark	
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	191.02	33.38	-10.12	43.50	49.70	14.80	1.48	32.60	---	---	Peak
2	200.72	37.93	-5.57	43.50	54.01	15.03	1.48	32.59	100	0	Peak
3	208.48	34.08	-9.42	43.50	49.94	15.20	1.53	32.59	---	---	Peak
4	576.11	28.42	-17.58	46.00	32.43	25.98	2.71	32.70	---	---	Peak
5	775.93	31.48	-14.52	46.00	32.29	28.40	3.21	32.42	---	---	Peak
6	876.81	32.46	-13.54	46.00	31.85	29.16	3.40	31.95	---	---	Peak
7	1776.00	38.44	-35.56	74.00	69.61	25.05	5.48	61.70	---	---	Peak
8	2168.00	40.10	-33.90	74.00	67.84	27.58	6.41	61.73	100	0	Peak
9	2658.00	46.89			73.98	27.52	7.22	61.83	---	---	Peak
10	3876.00	37.68	-36.32	74.00	62.03	29.55	8.38	62.28	---	---	Peak
11	5948.00	39.00	-35.00	74.00	59.60	32.59	9.68	62.87	---	---	Peak
12	7928.00	42.57	-31.43	74.00	58.30	36.67	11.21	63.61	---	---	Peak
13	10034.00	42.88	-31.12	74.00	56.49	38.67	12.49	64.77	---	---	Peak