

Partial FCC Test Report (PART 22)

Report No.: RF191119C05-2

FCC ID: LHJ-BL28NA003

Test Model: BL28NA-003

Received Date: Nov. 19, 2019

Test Date: Dec. 01 ~ Dec. 09, 2019

Issued Date: Dec. 26, 2019

Applicant: Continental Automotive Systems, Inc.

Address: 21440 West Lake Cook Road Deer Park, IL 60010 United States

Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch
Lin Kou Laboratories

Lab Address: No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan

Test Location: No.19, Hwa Ya 2nd Rd., Wen Hwa Vil., Kwei Shan Dist., Taoyuan City
33383, Taiwan

**FCC Registration /
Designation Number:** 788550 / TW0003



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification. The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies

Table of Contents

Release Control Record	3
1 Certificate of Conformity	4
2 Summary of Test Results.....	5
2.1 Measurement Uncertainty.....	5
2.2 Test Site and Instruments	6
3 General Information	8
3.1 General Description of EUT	8
3.2 Configuration of System under Test.....	9
3.2.1 Description of Support Units	10
3.3 Test Mode Applicability and Tested Channel Detail	11
3.4 EUT Operating Conditions	12
3.5 General Description of Applied Standards.....	12
4 Test Types and Results	13
4.1 Output Power Measurement.....	13
4.1.1 Limits of Output Power Measurement	13
4.1.2 Test Procedures.....	13
4.1.3 Test Setup.....	14
4.1.4 Test Results	15
4.2 Radiated Emission Measurement.....	18
4.2.1 Limits of Radiated Emission Measurement	18
4.2.2 Test Procedure	18
4.2.3 Deviation from Test Standard	18
4.2.4 Test Setup.....	19
4.2.5 Test Results	20
5 Pictures of Test Arrangements.....	50
Appendix – Information of the Testing Laboratories	51

Release Control Record

Issue No.	Description	Date Issued
RF191119C05-2	Original Release	Dec. 26, 2019

1 Certificate of Conformity

Product: Module with Mult-Band LTE, WCDMA, GSM

Brand: Continental

Test Model: BL28NA-003

Sample Status: Identical Prototype


Applicant: Continental Automotive Systems, Inc.

Test Date: Dec. 01 ~ Dec. 09, 2019

Standards: FCC Part 22, Subpart H

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's RF characteristics under the conditions specified in this report.

Prepared by :  , Date: Dec. 26, 2019
Lena Wang / Specialist

Approved by :  , Date: Dec. 26, 2019
Dylan Chiou / Project Engineer

2 Summary of Test Results

Applied Standard: FCC Part 22 & Part 2			
FCC Clause	Test Item	Result	Remarks
2.1046 22.913 (a)	Effective Radiated Power	Pass	Meet the requirement of limit.
2.1047	Modulation Characteristics	N/A	Refer to Note
2.1046 22.913 (d)	Peak to Average Ratio	N/A	Refer to Note
2.1055 22.355	Frequency Stability	N/A	Refer to Note
2.1049	Occupied Bandwidth	N/A	Refer to Note
22.917	Band Edge Measurements	N/A	Refer to Note
2.1051 22.917	Conducted Spurious Emissions	N/A	Refer to Note
2.1053 22.917	Radiated Spurious Emissions	Pass	Meet the requirement of limit. Minimum passing margin is -37.82 dB at 37.76 MHz.

Note:

1. This report is a Class II change Partial report. Therefore, only test item of Effective Radiated Power and Radiated Spurious Emissions tests were performed for this report. Other testing data please refer to SGS report no.: 4323476EMC01, 4323476EMC02, 4323476EMC03 for module (Brand: Continental, Model: BL28NA-003)
2. Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Expanded Uncertainty (k=2) (±)
Radiated Emissions up to 1 GHz	9 kHz ~ 30 MHz	3.04 dB
	30 MHz ~ 200 MHz	2.93 dB
	200 MHz ~ 1000 MHz	2.95 dB
Radiated Emissions above 1 GHz	1 GHz ~ 18 GHz	2.26 dB
	18 GHz ~ 40 GHz	1.94 dB

2.2 Test Site and Instruments

Description & Manufacturer	Model No.	Serial No.	Date of Calibration	Due Date of Calibration
Test Receiver Agilent	N9038A	MY51210203	Mar. 18, 2019	Mar. 17, 2020
Spectrum Analyzer Agilent	N9010A	MY52220314	Dec. 13, 2018	Dec. 12, 2019
HORN Antenna SCHWARZBECK	BBHA 9120D	9120D-969	Nov. 24, 2019	Nov. 23, 2020
BILOG Antenna SCHWARZBECK	VULB 9168	9168-472	Nov. 08, 2019	Nov. 07, 2020
Fixed Attenuator WORKEN	MDCS18N-10	MDCS18N-10-01	Apr. 15, 2019	Apr. 14, 2020
MXG Vector signal generator Agilent	N5182B	MY53050430	Nov. 25, 2019	Nov. 24, 2020
Loop Antenna	EM-6879	269	Sep. 16, 2019	Sep. 15, 2020
Preamplifier EMCI	EMC001340	980201	Oct. 14, 2019	Oct. 13, 2020
Preamplifier EMCI	EMC 012645	980115	Oct. 08, 2019	Oct. 07, 2020
Preamplifier EMCI	EMC 330H	980112	Oct. 08, 2019	Oct. 07, 2020
Power Meter Anritsu	ML2495A	1012010	Sep. 04, 2019	Sep. 03, 2020
Power Sensor Anritsu	MA2411B	1315050	Sep. 04, 2019	Sep. 03, 2020
RF Coaxial Cable HUBER+SUHNNER	EMC104-SM-SM- 8000&3000	140811+170717	Oct. 08, 2019	Oct. 07, 2020
RF Coaxial Cable HUBER+SUHNNER	SUCOFLEX 104	EMC104-SM-SM- 1000(140807)	Oct. 08, 2019	Oct. 07, 2020
RF Coaxial Cable Worken	8D-FB	Cable-Ch10-01	Oct. 08, 2019	Oct. 07, 2020
Boresight Antenna Fixture	FBA-01	FBA-SIP01	NA	NA
Software BV ADT	E3 6.120103	NA	NA	NA
Antenna Tower MF	MFA-440H	NA	NA	NA
Turn Table MF	MFT-201SS	NA	NA	NA
Antenna Tower & Turn Table Controller MF	MF-7802	NA	NA	NA
Communications Tester- Wireless Agilent	8960 Series 10	MY53201073	Jul. 01, 2019	Jun. 30, 2021
Radio Communication Analyzer Anritsu	MT8820C	6201300640	Aug. 19, 2019	Aug. 18, 2021

Temperature & Humidity Chamber	GTH-120-40-CP-AR	MAA1306-019	Sep. 06, 2019	Sep. 05, 2020
DC Power Supply Topward	33010D	807748	NA	NA

- Note: 1. The calibration interval of the above test instruments is 12 / 24 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in HwaYa Chamber 10.

3 General Information

3.1 General Description of EUT


Product	Module with Mult-Band LTE, WCDMA,GSM	
Brand	Continental	
Test Model	BL28NA-003	
Status of EUT	Identical Prototype	
Power Supply Rating	12 Vdc (Power Supply)	
Modulation Type	GSM/GPRS	GMSK
	WCDMA	QPSK
	LTE	QPSK, 16QAM
Frequency Range	GSM/GPRS/EDGE	824.2 ~ 848.8 MHz
	WCDMA	826.4 ~ 846.6 MHz
	LTE 5 (Channel Bandwidth: 1.4 MHz)	824.7 ~ 848.3 MHz
	LTE 5 (Channel Bandwidth: 3 MHz)	825.5 ~ 847.5 MHz
	LTE 5 (Channel Bandwidth: 5 MHz)	826.5 ~ 846.5 MHz
	LTE 5 (Channel Bandwidth: 10 MHz)	829 ~ 844 MHz
Max. ERP Power	GSM/GPRS	599.79 mW
	WCDMA	177.01 mW
	LTE 5 (Channel Bandwidth: 1.4 MHz)	211.84 mW
	LTE 5 (Channel Bandwidth: 3 MHz)	212.81 mW
	LTE 5 (Channel Bandwidth: 5 MHz)	215.28 mW
	LTE 5 (Channel Bandwidth: 10 MHz)	219.28 mW
Antenna Type	Fixed External Antenna with 1.0 dBi gain	
Accessory Device	N/A	
Data Cable Supplied	N/A	

Note:


1. The above EUT information is declared by manufacturer and for more detailed features description, please refers to the manufacturer's specifications or user's manual.

3.2 Configuration of System under Test

<Radiated Emission Test>

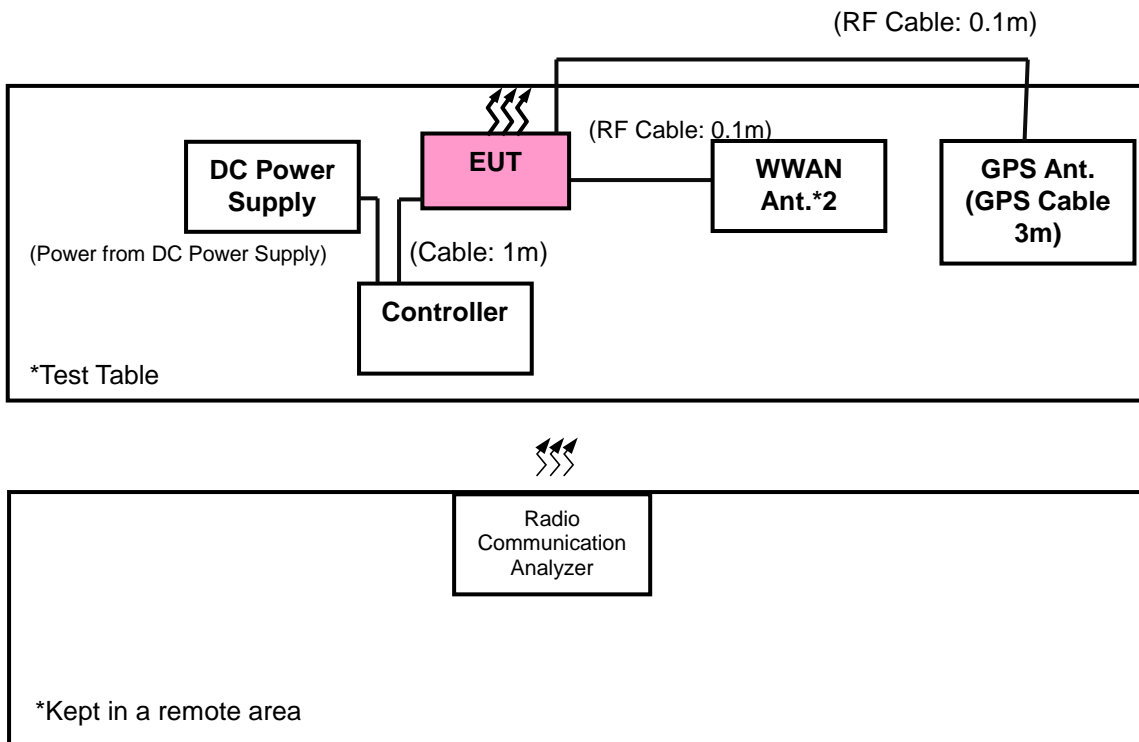

<E.R.P. Test>

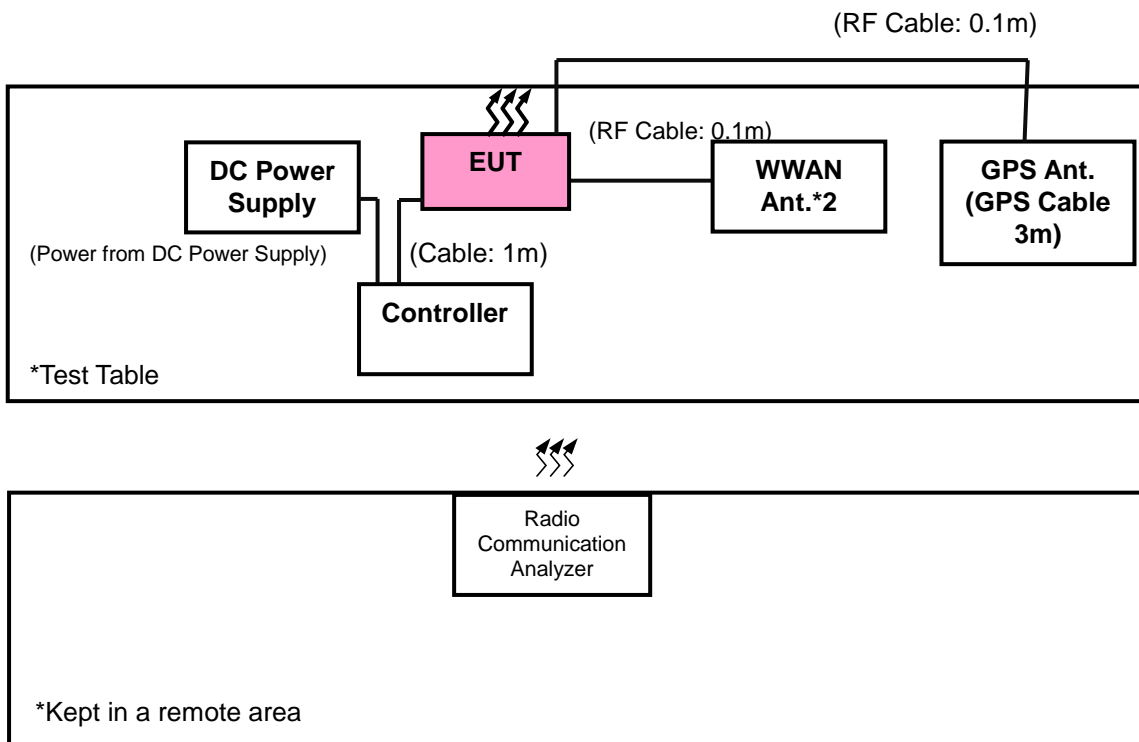

3.2.1 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

No.	Product	Brand	Model No.	Serial No.	FCC ID
1.	DC Power Supply	Torward	33010D	807748	N/A
2.	Controller	N/A	N/A	N/A	N/A
3.	WWAN Ant.*2	N/A	N/A	N/A	N/A
4.	GPS Ant.	N/A	N/A	N/A	N/A

No.	Signal Cable Description Of The Above Support Units
1.	RF Cable: 0.1m
2.	RF Cable: 0.1m
3.	Cable: 1m

Note:

1. All power cords of the above support units are non-shielded (1.8m).
2. DC Power Supply under test table

3.3 Test Mode Applicability and Tested Channel Detail

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis, and antenna ports.

The worst case was found when positioned as the table below. Following channel(s) was (were) selected for the final test as listed below:

Band	ERP	Radiated Emission
GSM	90°	Z-axis
WCDMA	90°	Z-axis
LTE Band 5	Z-plane	Z-axis

GSM

EUT Configure Mode	Test Item	Available Channel	Tested Channel	Mode
-	ERP	128 to 251	128, 189, 251	GSM, EDGE
-	Radiated Emission	128 to 251	128, 189, 251	GSM, EDGE

WCDMA

EUT Configure Mode	Test Item	Available Channel	Tested Channel	Mode
-	ERP	4132 to 4233	4132, 4182, 4233	WCDMA
-	Radiated Emission	4132 to 4233	4132, 4182, 4233	WCDMA

LTE Band 5

EUT Configure Mode	Test Item	Available Channel	Tested Channel	Channel Bandwidth	Modulation	Mode
-	ERP	20407 to 20643	20407, 20525, 20643	1.4 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		20415 to 20635	20415, 20525, 20635	3 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		20425 to 20625	20425, 20525, 20625	5 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		20450 to 20600	20450, 20525, 20600	10 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
-	Radiated Emission	20407 to 20643	20407, 20525, 20643	1.4 MHz	QPSK	1 RB / 0 RB Offset
		20425 to 20625	20425, 20525, 20625	5 MHz	QPSK	1 RB / 0 RB Offset
		20450 to 20600	20450, 20525, 20600	10 MHz	QPSK	1 RB / 0 RB Offset

Note:

1. This device was tested under all bandwidths, RB configurations and modulations. The worst case was found in QPSK modulation.
2. For radiated emission above 1 GHz, according to 3GPP 36.521 Section 6.6.3.1.4, choose the lowest, 5 MHz & highest channel bandwidth for final test.

Test Condition:

Test Item	Environmental Conditions	Input Power	Tested By
ERP	25 deg. C, 65 % RH	12 Vdc	Wayne Lin
Radiated Emission	25 deg. C, 65 % RH	12 Vdc	Tim Chen

3.4 EUT Operating Conditions

The EUT makes a call to the communication simulator. The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency.

3.5 General Description of Applied Standards

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC 47 CFR Part 2

FCC 47 CFR Part 22

KDB 971168 D01 Power Meas License Digital Systems v03r01

ANSI/TIA/EIA-603-E 2016

ANSI 63.26-2015

Note: All test items have been performed and recorded as per the above standards.

4 Test Types and Results

4.1 Output Power Measurement

4.1.1 Limits of Output Power Measurement

Mobile / Portable station are limited to 7 watts e.r.p.

4.1.2 Test Procedures

EIRP / ERP Measurement:


- a. All measurements were done at low, middle and high operational frequency range. RBW and VBW is 1 MHz for GSM, and 5 MHz for WCDMA, and 10 MHz for LTE mode.
- b. Substitution method is used for E.I.R.P measurement. In the semi-anechoic chamber, EUT placed on the 0.8 m (below or equal 1 GHz) and/or 1.5 m (above 1 GHz) height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1 m to 4 m to find the maximum polar radiated power. The "Read Value" is the spectrum reading the maximum power value.
- c. The substitution horn antenna is substituted for EUT at the same position and signals generator export the CW signal to the substitution antenna via a tx cable. Rotated the Turn Table and moved receiving antenna to find the maximum radiation power. Adjust output power level of S.G to get a Value of spectrum reading equal to "Read Value" of step b. Record the power level of S.G.
- d. $EIRP = \text{Output power level of S.G} - \text{TX cable loss} + \text{Antenna gain of substitution horn}$. E.R.P power can be calculated form E.I.R.P power by subtracting the gain of dipole, $E.R.P \text{ power} = E.I.R.P \text{ power} - 2.15 \text{ dB}$.

Conducted Power Measurement:


The EUT was set up for the maximum power with GSM, WCDMA, and LTE link data modulation and link up with simulator. Set the EUT to transmit under low, middle and high channel and record the power level shown on simulator.

4.1.3 Test Setup

**EIRP / ERP Measurement:
<Radiated Emission below or equal 1 GHz>**

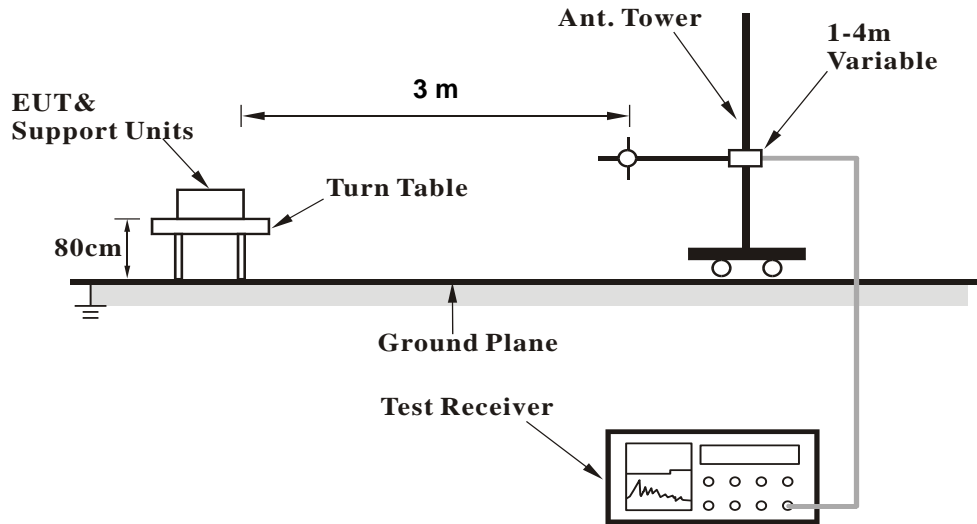

<Radiated Emission above 1 GHz>

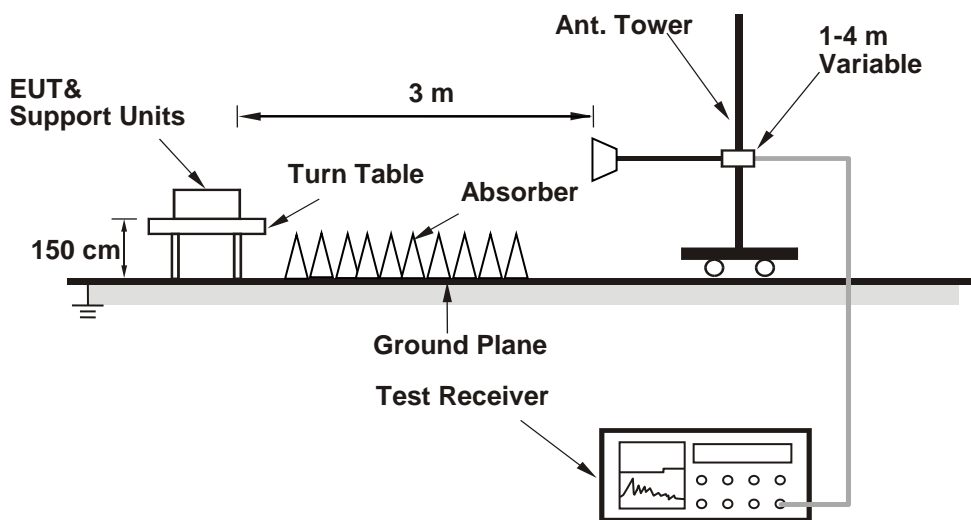

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.1.4 Test Results

ERP Power (dBm)

GSM							
Plane	Channel	Frequency (MHz)	Reading (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (mW)	Polarization (H/V)
90°	128	824.2	-0.54	32.62	27.78	599.79	H
	189	836.4	-0.82	32.52	27.40	549.54	
	251	848.8	-1.46	32.65	26.89	488.65	
	128	824.2	-12.06	32.76	16.40	43.65	V
	189	836.4	-11.63	32.39	16.46	44.26	
	251	848.8	-11.97	32.54	16.27	42.36	

Note: ERP (dBm) = Reading (dBm) + Correction Factor (dB) – 2.15

WCDMA							
Plane	Channel	Frequency (MHz)	Reading (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (mW)	Polarization (H/V)
90°	4132	826.4	-5.92	32.62	22.40	173.78	H
	4182	836.4	-5.74	32.52	22.48	177.01	
	4233	846.6	-6.08	32.65	22.27	168.66	
	4132	826.4	-15.28	32.76	13.18	20.80	V
	4182	836.4	-14.73	32.39	13.36	21.68	
	4233	846.6	-15.10	32.54	13.14	20.61	

Note: ERP (dBm) = Reading (dBm) + Correction Factor (dB) – 2.15

LTE Band 5							
Channel Bandwidth: 1.4 MHz / QPSK							
Plane	Channel	Frequency (MHz)	Reading (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (mW)	Polarization (H/V)
Z	20407	824.7	-7.43	32.62	23.04	201.37	H
	20525	836.5	-7.11	32.52	23.26	211.84	
	20643	848.3	-7.49	32.65	23.01	199.99	
	20407	824.7	-15.67	32.76	14.94	31.19	V
	20525	836.5	-15.07	32.39	15.17	32.89	
	20643	848.3	-15.60	32.54	14.79	30.13	
Channel Bandwidth: 1.4 MHz / 16QAM							
Z	20407	824.7	-8.61	32.62	21.86	153.46	H
	20525	836.5	-8.38	32.52	21.99	158.12	
	20643	848.3	-8.76	32.65	21.74	149.28	
	20407	824.7	-16.93	32.76	13.68	23.33	V
	20525	836.5	-16.35	32.39	13.89	24.49	
	20643	848.3	-16.78	32.54	13.61	22.96	

Note: ERP (dBm) = Reading (dBm) + Correction Factor (dB) – 2.15

LTE Band 5							
Channel Bandwidth: 3 MHz / QPSK							
Plane	Channel	Frequency (MHz)	Reading (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (mW)	Polarization (H/V)
Z	20415	825.5	-7.32	32.62	23.15	206.54	H
	20525	836.5	-7.09	32.52	23.28	212.81	
	20635	847.5	-7.43	32.65	23.07	202.77	
	20415	825.5	-15.62	32.76	14.99	31.55	V
	20525	836.5	-15.01	32.39	15.23	33.34	
	20635	847.5	-15.54	32.54	14.85	30.55	
Channel Bandwidth: 3 MHz / 16QAM							
Z	20415	825.5	-8.53	32.62	21.94	156.31	H
	20525	836.5	-8.25	32.52	22.12	162.93	
	20635	847.5	-8.60	32.65	21.90	154.88	
	20415	825.5	-16.82	32.76	13.79	23.93	V
	20525	836.5	-16.24	32.39	14.00	25.12	
	20635	847.5	-16.75	32.54	13.64	23.12	

Note: ERP (dBm) = Reading (dBm) + Correction Factor (dB) – 2.15

LTE Band 5							
Channel Bandwidth: 5 MHz / QPSK							
Plane	Channel	Frequency (MHz)	Reading (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (mW)	Polarization (H/V)
Z	20425	826.5	-7.29	32.62	23.18	207.97	H
	20525	836.5	-7.04	32.52	23.33	215.28	
	20625	846.5	-7.38	32.65	23.12	205.12	
	20425	826.5	-15.59	32.76	15.02	31.77	V
	20525	836.5	-14.96	32.39	15.28	33.73	
	20625	846.5	-15.50	32.54	14.89	30.83	
Channel Bandwidth: 5 MHz / 16QAM							
Z	20425	826.5	-8.38	32.62	22.09	161.81	H
	20525	836.5	-8.06	32.52	22.31	170.22	
	20625	846.5	-8.46	32.65	22.04	159.96	
	20425	826.5	-16.69	32.76	13.92	24.66	V
	20525	836.5	-16.07	32.39	14.17	26.12	
	20625	846.5	-16.67	32.54	13.72	23.55	

Note: ERP (dBm) = Reading (dBm) + Correction Factor (dB) – 2.15

LTE Band 5							
Channel Bandwidth: 10 MHz / QPSK							
Plane	Channel	Frequency (MHz)	Reading (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (mW)	Polarization (H/V)
Z	20450	829.0	-7.21	32.62	23.26	211.84	H
	20525	836.5	-6.96	32.52	23.41	219.28	
	20600	844.0	-7.32	32.65	23.18	207.97	
	20450	829.0	-15.51	32.76	15.10	32.36	V
	20525	836.5	-14.90	32.39	15.34	34.20	
	20600	844.0	-15.42	32.54	14.97	31.41	
Channel Bandwidth: 10 MHz / 16QAM							
Z	20450	829.0	-8.22	32.62	22.25	167.88	H
	20525	836.5	-7.98	32.52	22.39	173.38	
	20600	844.0	-8.37	32.65	22.13	163.31	
	20450	829.0	-16.59	32.76	14.02	25.23	V
	20525	836.5	-15.94	32.39	14.30	26.92	
	20600	844.0	-16.49	32.54	13.90	24.55	

Note: ERP (dBm) = Reading (dBm) + Correction Factor (dB) – 2.15

4.2 Radiated Emission Measurement

4.2.1 Limits of Radiated Emission Measurement

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. The emission limit is equal to -13 dBm.

4.2.2 Test Procedure

- a. Substitution method is used for E.I.R.P measurement. In the semi-anechoic chamber, EUT placed on the 0.8 m (below or equal 1 GHz) and/or 1.5 m (above 1 GHz) height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1 m to 4 m to find the maximum polar radiated power. The "Read Value" is the spectrum reading the maximum power value.
- b. The substitution horn antenna is substituted for EUT at the same position and signals generator export the CW signal to the substitution antenna via a TX cable. Rotated the Turn Table and moved receiving antenna to find the maximum radiation power. Adjust output power level of S.G to get a Value of spectrum reading equal to "Read Value" of step a. Record the power level of S.G
- c. EIRP = Output power level of S.G – TX cable loss + Antenna gain of substitution horn.
- d. E.R.P power can be calculated form E.I.R.P power by subtracting the gain of dipole, E.R.P power = E.I.R.P power - 2.15 dB.


NOTE: The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz/3 MHz.

4.2.3 Deviation from Test Standard


No deviation.

4.2.4 Test Setup

<Radiated Emission below or equal 1 GHz>

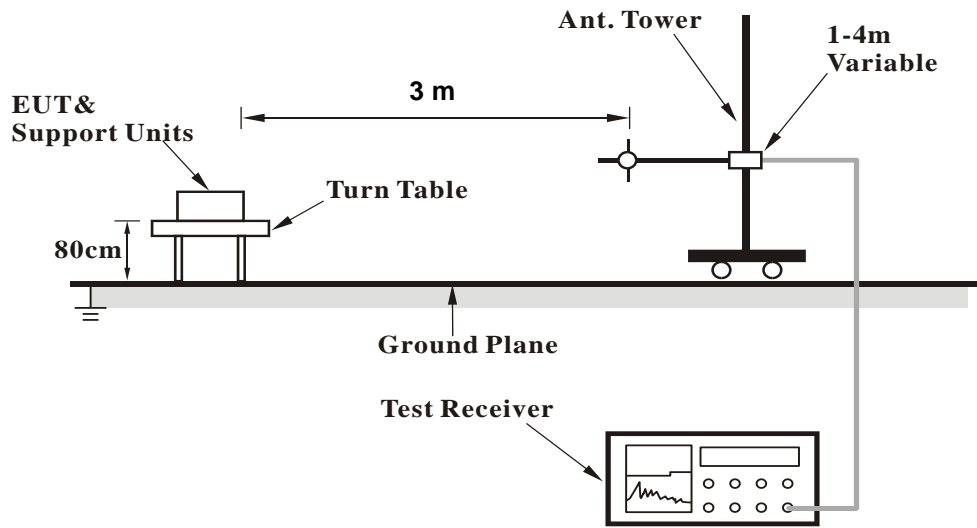

<Radiated Emission above 1 GHz>

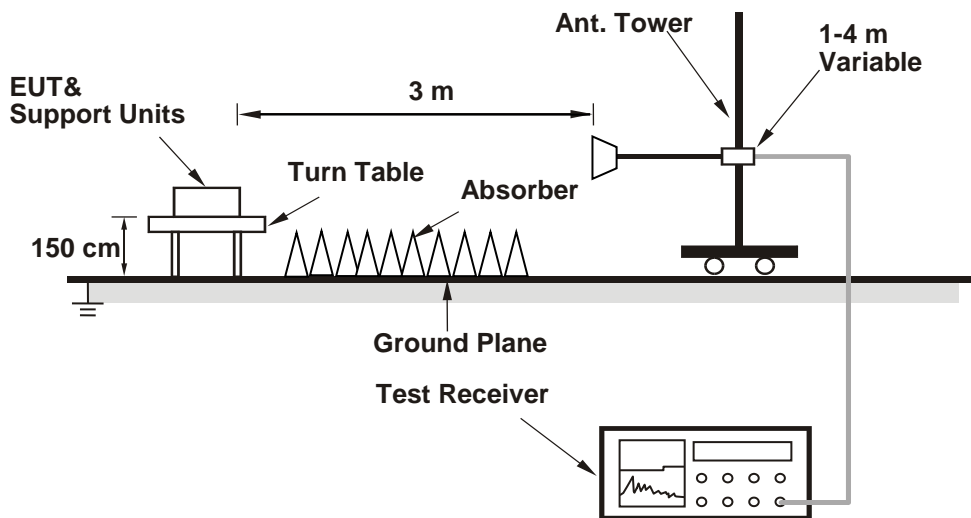

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.2.5 Test Results

GSM:
Low Channel




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 5

Date: 2019-12-01

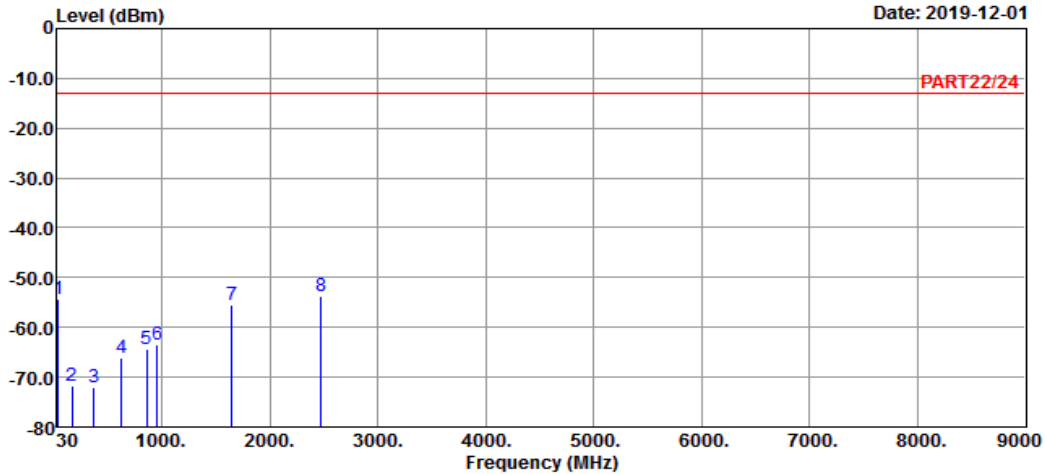

Site : 966 Chamber 5
 Condition: PART22/24 HORIZONTAL
 Remak : GSM 850 Link_L-CH
 Tested by: tim-chen

	Freq	Level	Read Level	Limit Line	Factor	Over Limit	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	39.70	-54.30	-54.94	-13.00	0.64	-41.30	Peak
2	165.80	-71.80	-66.55	-13.00	-5.25	-58.80	Peak
3	367.56	-71.95	-65.81	-13.00	-6.14	-58.95	Peak
4	625.58	-66.21	-65.39	-13.00	-0.82	-53.21	Peak
5	858.38	-64.41	-64.75	-13.00	0.34	-51.41	Peak
6	955.38	-63.58	-65.58	-13.00	2.00	-50.58	Peak
7	1648.40	-55.53	-41.79	-13.00	-13.74	-42.53	Peak
8 pp	2472.60	-53.68	-43.66	-13.00	-10.02	-40.68	Peak




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 6

Date: 2019-12-01

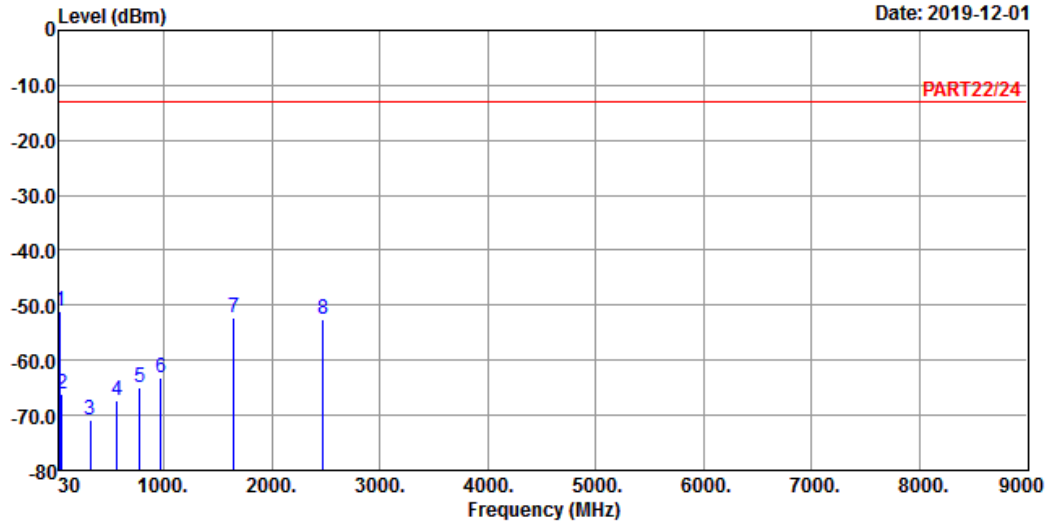

Site : 966 Chamber 5
 Condition: PART22/24 VERTICAL
 Remak : GSM 850 Link_L-CH
 Tested by: tim-chen

	Freq	Level	Read Level	Limit	Line Factor	Over Limit	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1 pp	37.76	-50.95	-50.51	-13.00	-0.44	-37.95	Peak
2	53.28	-66.14	-60.33	-13.00	-5.81	-53.14	Peak
3	314.21	-70.98	-64.19	-13.00	-6.79	-57.98	Peak
4	563.50	-67.26	-64.98	-13.00	-2.28	-54.26	Peak
5	775.93	-64.89	-65.69	-13.00	0.80	-51.89	Peak
6	972.84	-63.18	-65.80	-13.00	2.62	-50.18	Peak
7	1648.40	-52.20	-38.46	-13.00	-13.74	-39.20	Peak
8	2472.60	-52.54	-42.52	-13.00	-10.02	-39.54	Peak


Middle Channel



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 3

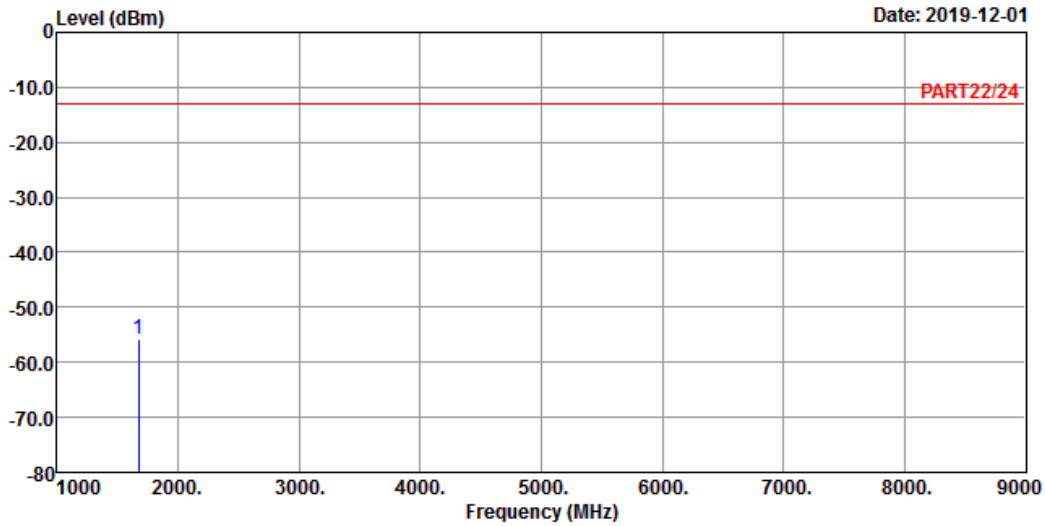

Site : 966 Chamber 5
 Condition: PART22/24 HORIZONTAL
 Remak : GSM 850 Link_M-CH
 Tested by: tim-chen

Freq	Level	Read Level	Limit	Line Factor	Over Limit	Remark
MHz	dBm	dBm	dBm	dB	dB	


1 pp 1672.80 -55.84 -41.94 -13.00 -13.90 -42.84 Peak



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 4

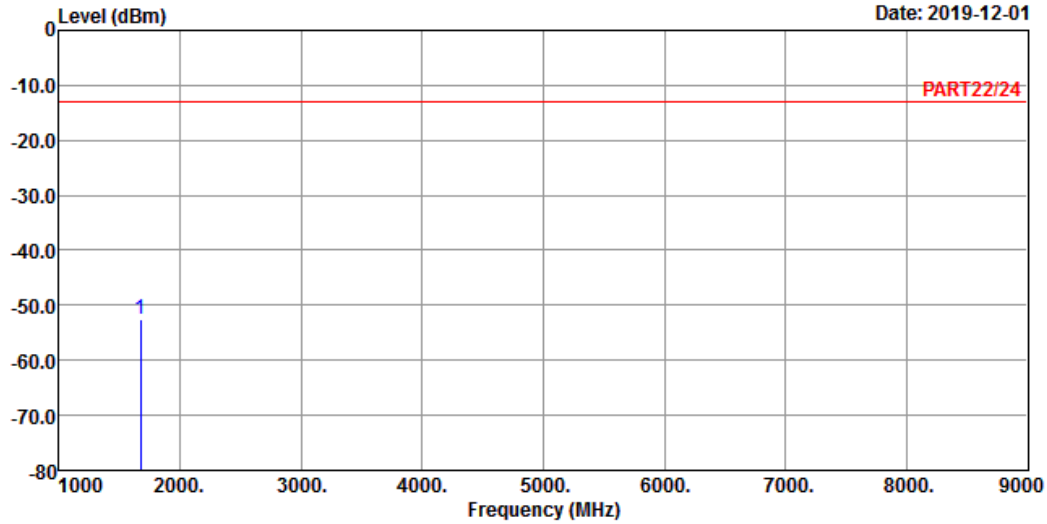

Site : 966 Chamber 5
 Condition: PART22/24 VERTICAL
 Remak : GSM 850 Link_M-CH
 Tested by: tim-chen

Freq	Level	Read Level	Limit	Line Factor	Over Limit	Remark
MHz	dBm	dBm	dBm	dB	dB	
1 pp 1672.80	-52.65	-38.75	-13.00	-13.90	-39.65	Peak


High Channel



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 3

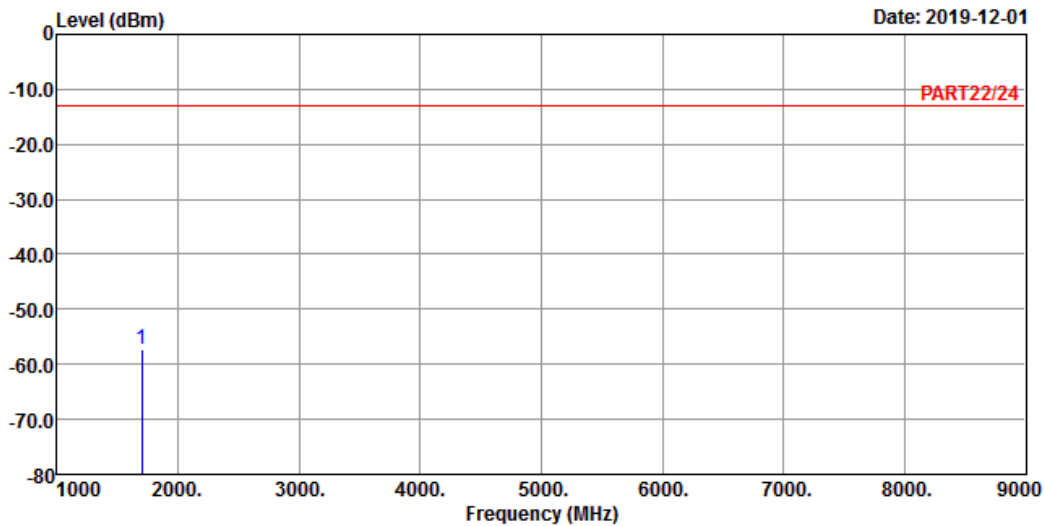

Site : 966 Chamber 5
 Condition: PART22/24 HORIZONTAL
 Remak : GSM 850 Link_H-CH
 Tested by: tim-chen

Freq	Level	Read Level	Limit	Over	Remark
MHz	dBm	dBm	dBm	dB	dB


1 pp 1697.60 -57.19 -43.14 -13.00 -14.05 -44.19 Peak



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 4

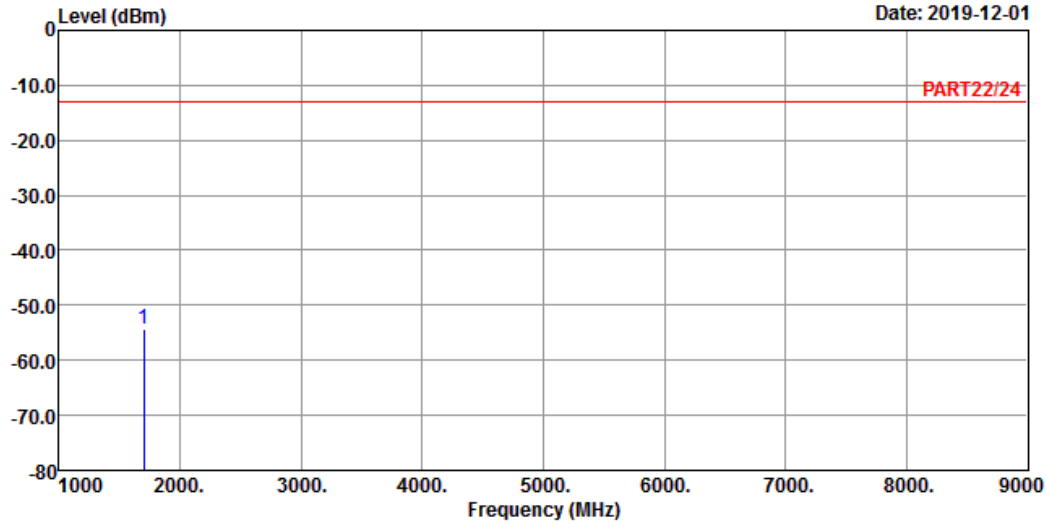

Site : 966 Chamber 5
 Condition: PART22/24 VERTICAL
 Remak : GSM 850 Link_H-CH
 Tested by: tim-chen

Freq	Level	Read Level	Limit	Line Factor	Over Limit	Remark
MHz	dBm	dBm	dBm	dB	dB	
1 pp 1697.60	-54.26	-40.21	-13.00	-14.05	-41.26	Peak


WCDMA:
Low Channel



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 3

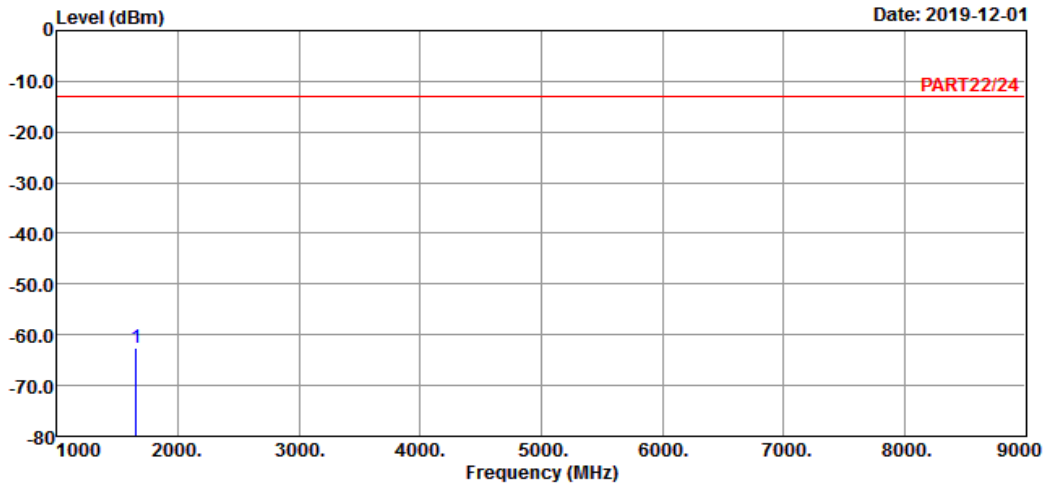

Site : 966 Chamber 5
 Condition: PART22/24 HORIZONTAL
 Remark : WCDMA Band V Link_L-CH
 Tested by: tim-chen


Freq	Level	Read Level	Limit	Line Factor	Over Limit	Remark
MHz	dBm	dBm	dBm	dB	dB	
1 pp 1652.80	-62.47	-48.70	-13.00	-13.77	-49.47	Peak



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 4

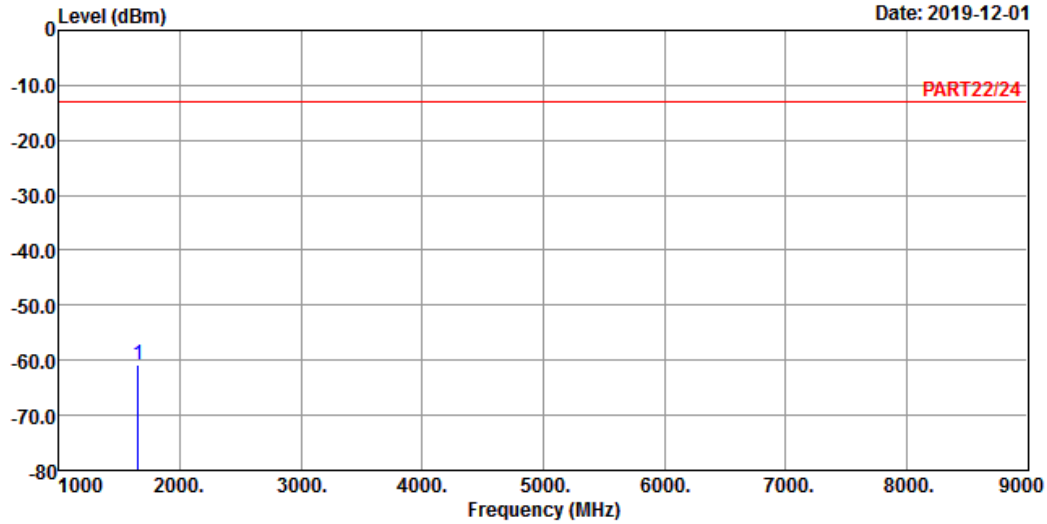

Site : 966 Chamber 5
 Condition: PART22/24 VERTICAL
 Remark : WCDMA Band V Link_L-CH
 Tested by: tim-chen

Freq	Level	Read Level	Limit	Line Factor	Over Limit	Remark
MHz	dBm	dBm	dBm	dB	dB	
1 pp 1652.80	-60.85	-47.08	-13.00	-13.77	-47.85	Peak


Middle Channel



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 3

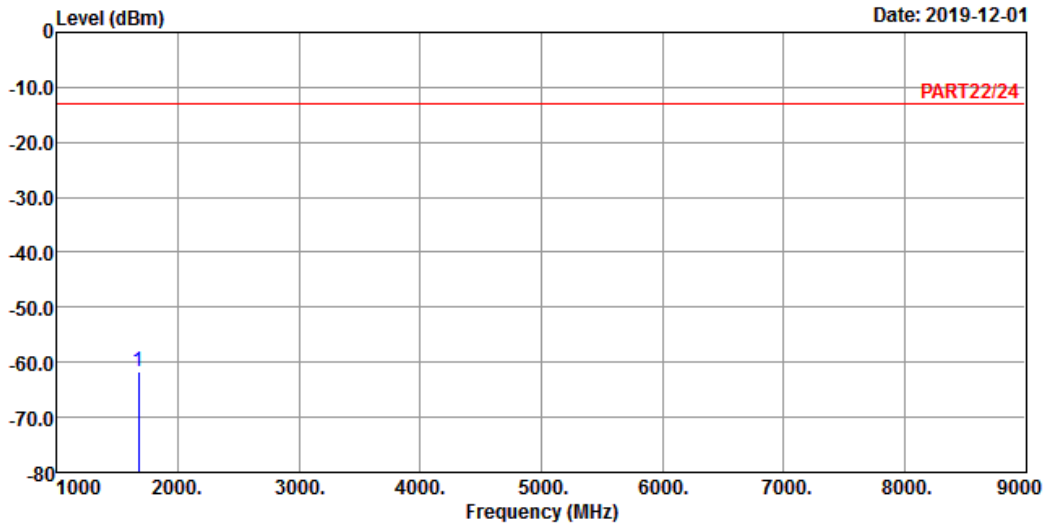

Site : 966 Chamber 5
 Condition: PART22/24 HORIZONTAL
 Remark : WCDMA Band V Link_M-CH
 Tested by: tim-chen

Freq	Level	Read Level	Limit	Line Factor	Over Limit	Remark
MHz	dBm	dBm	dBm	dB	dB	


1 pp 1672.80 -61.66 -47.76 -13.00 -13.90 -48.66 Peak



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 4

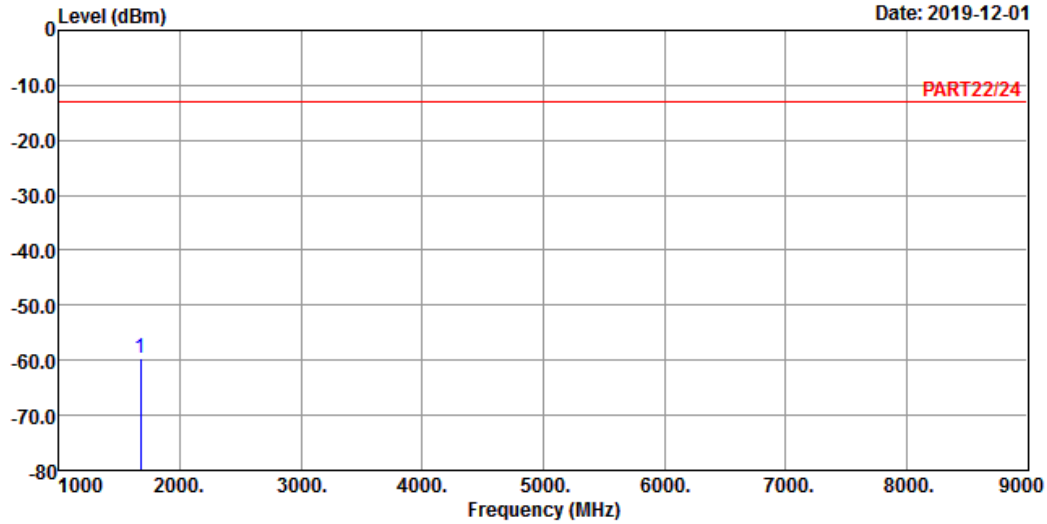

Site : 966 Chamber 5
 Condition: PART22/24 VERTICAL
 Remark : WCDMA Band V Link_M-CH
 Tested by: tim-chen

Freq	Level	Read Level	Limit	Line Factor	Over Limit	Remark
MHz	dBm	dBm	dBm	dB	dB	
1 pp 1672.80	-59.72	-45.82	-13.00	-13.90	-46.72	Peak

High Channel




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 5

Date: 2019-12-01

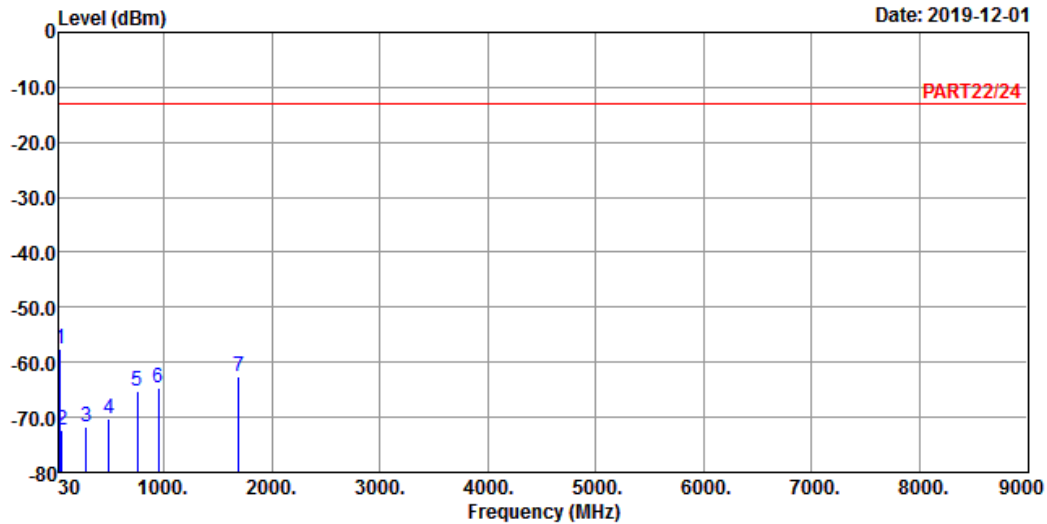

Site : 966 Chamber 5

Condition: PART22/24 HORIZONTAL

Remark : WCDMA Band V Link_H-CH

Tested by: tim-chen

	Freq	Level	Read Level	Limit	Line	Factor	Over	Limit	Remark
	MHz	dBm	dBm	dBm		dB	dB	dB	
1	pp	36.79	-57.68	-56.69	-13.00	-0.99	-44.68	Peak	
2		56.19	-72.31	-65.71	-13.00	-6.60	-59.31	Peak	
3		277.35	-71.72	-65.17	-13.00	-6.55	-58.72	Peak	
4		492.69	-70.35	-65.59	-13.00	-4.76	-57.35	Peak	
5		753.62	-65.26	-66.13	-13.00	0.87	-52.26	Peak	
6		951.50	-64.51	-66.38	-13.00	1.87	-51.51	Peak	
7		1693.20	-62.49	-48.47	-13.00	-14.02	-49.49	Peak	




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 6

Date: 2019-12-01

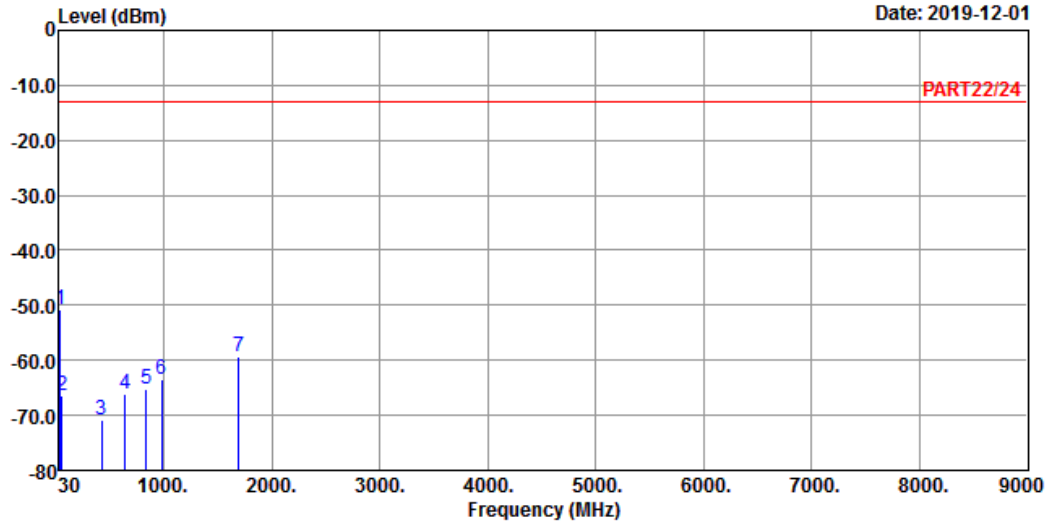

Site : 966 Chamber 5
 Condition: PART22/24 VERTICAL
 Remark : WCDMA Band V Link_H-CH
 Tested by: tim-chen

	Freq	Level	Read Level	Limit	Over		
	MHz	dBm	dBm	dBm	dB	dB	Remark
1 pp	37.76	-50.84	-50.40	-13.00	-0.44	-37.84	Peak
2	54.25	-66.44	-60.37	-13.00	-6.07	-53.44	Peak
3	424.79	-70.98	-65.23	-13.00	-5.75	-57.98	Peak
4	640.13	-66.23	-65.37	-13.00	-0.86	-53.23	Peak
5	835.10	-65.35	-65.77	-13.00	0.42	-52.35	Peak
6	977.69	-63.41	-66.20	-13.00	2.79	-50.41	Peak
7	1693.20	-59.29	-45.27	-13.00	-14.02	-46.29	Peak


LTE Band 5
 Channel Bandwidth: 1.4 MHz / QPSK
 Low Channel



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 3

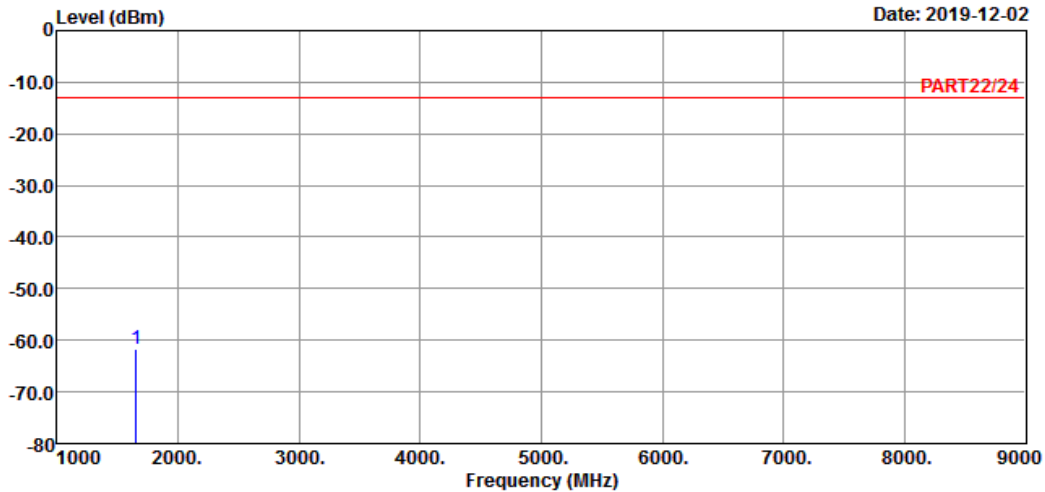

Site : 966 Chamber 5
 Condition: PART22/24 HORIZONTAL
 Remak : LTE Band 5 QPSK_1.4M Link_L-CH
 Tested by: tim-chen

Freq	Level	Read Level	Limit	Over	Remark
MHz	dBm	dBm	dBm	dB	dB


1 pp 1649.40 -61.73 -47.99 -13.00 -13.74 -48.73 Peak



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 4

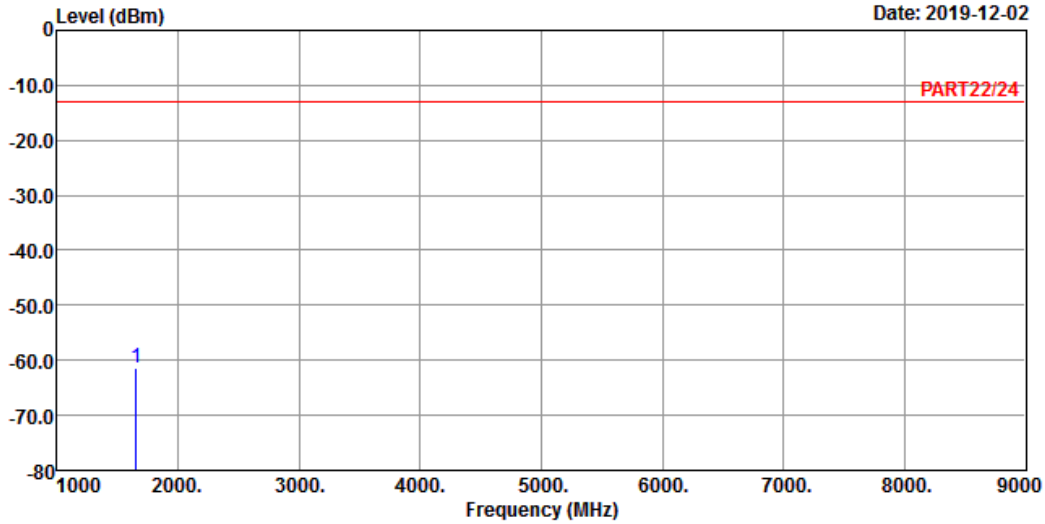

Site : 966 Chamber 5
 Condition: PART22/24 VERTICAL
 Remark : LTE Band 5 QPSK_1.4M Link_L-CH
 Tested by: tim-chen

Freq	Level	Read Level	Limit	Line Factor	Over Limit	Remark
MHz	dBm	dBm	dBm	dB	dB	
1 pp 1649.40	-61.34	-47.60	-13.00	-13.74	-48.34	Peak


Middle Channel



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 3

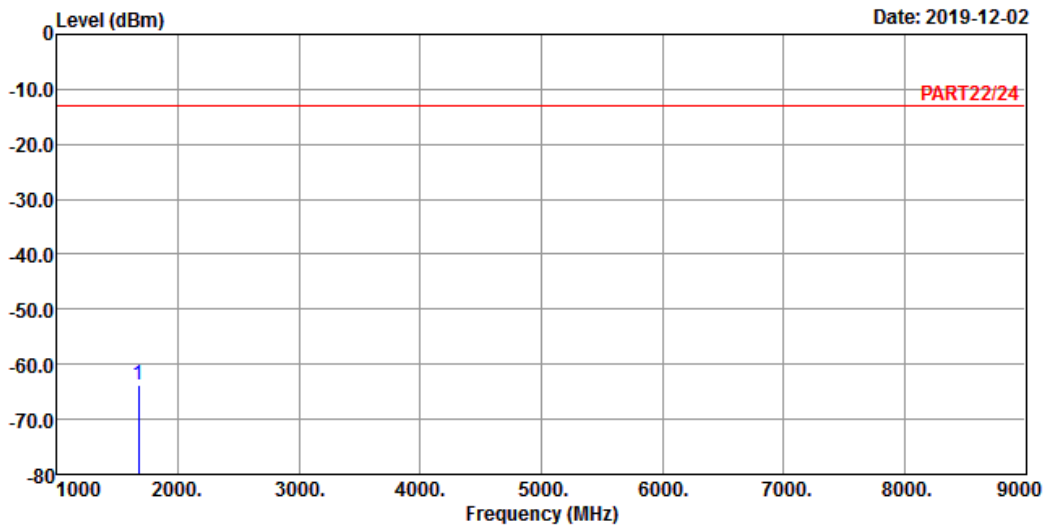

Site : 966 Chamber 5

Condition: PART22/24 HORIZONTAL

Remak : LTE Band 5 QPSK_1.4M Link_M-CH

Tested by: tim-chen

Freq	Level	Read Level	Limit	Line Factor	Over Limit	Remark
MHz	dBm	dBm	dBm	dB	dB	


1 pp 1673.00 -63.68 -49.78 -13.00 -13.90 -50.68 Peak



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 4

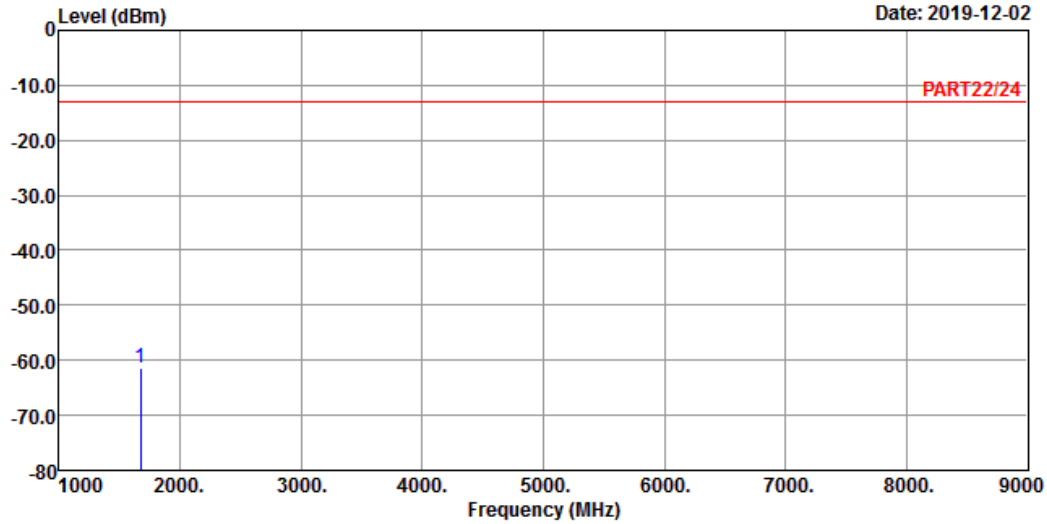

Site : 966 Chamber 5
 Condition: PART22/24 VERTICAL
 Remark : LTE Band 5 QPSK_1.4M Link_M-CH
 Tested by: tim-chen

Freq	Level	Read Level	Limit	Line Factor	Over Limit	Remark
MHz	dBm	dBm	dBm	dB	dB	
1 pp 1673.00	-61.34	-47.44	-13.00	-13.90	-48.34	Peak


High Channel



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 3

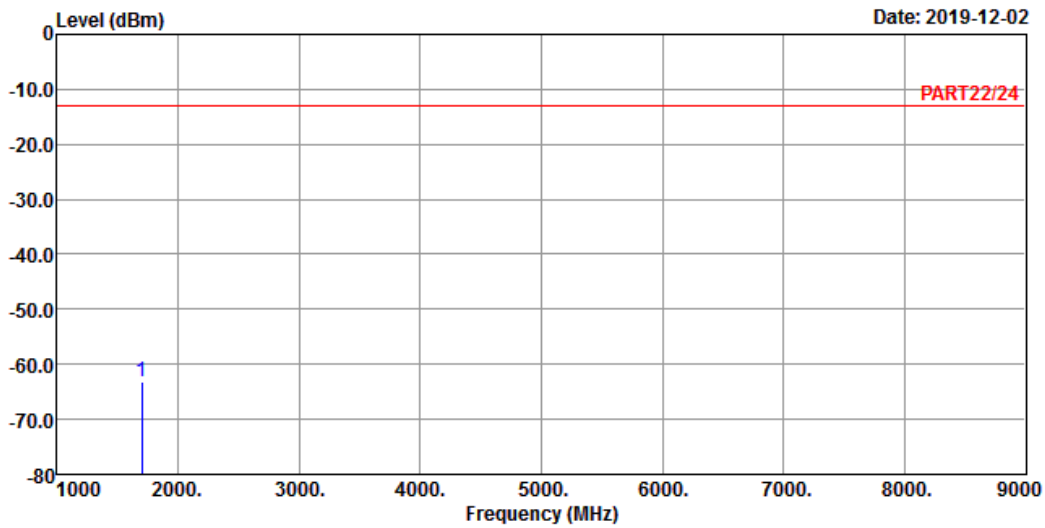

Site : 966 Chamber 5
 Condition: PART22/24 HORIZONTAL
 Remak : LTE Band 5 QPSK_1.4M Link_H-CH
 Tested by: tim-chen

Freq	Level	Read Level	Limit	Line Factor	Over Limit	Remark
MHz	dBm	dBm	dBm	dB	dB	


1 pp 1696.60 -63.24 -49.22 -13.00 -14.02 -50.24 Peak



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 4

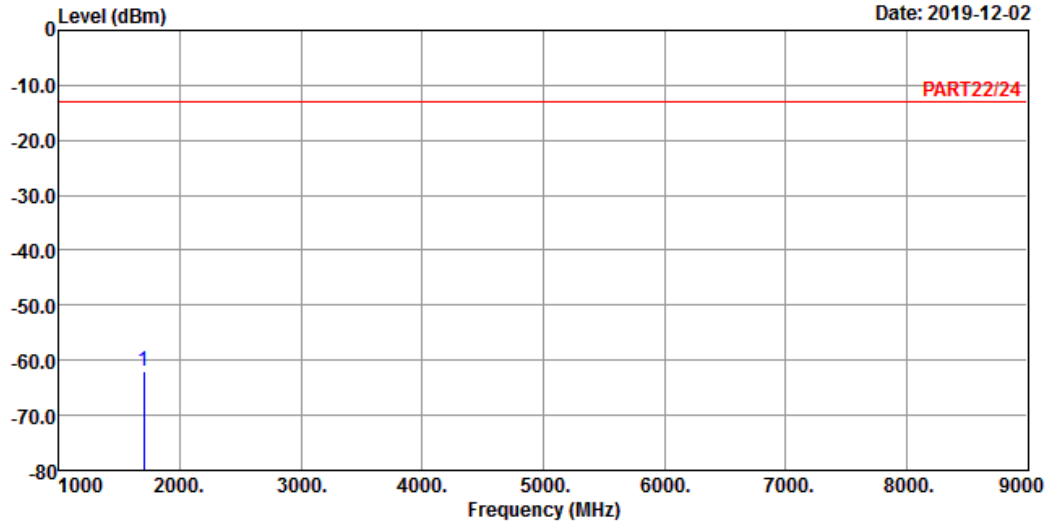

Site : 966 Chamber 5
 Condition: PART22/24 VERTICAL
 Remark : LTE Band 5 QPSK_1.4M Link_H-CH
 Tested by: tim-chen

Freq	Level	Read Level	Limit	Line Factor	Over Limit	Remark
MHz	dBm	dBm	dBm	dB	dB	
1 pp 1696.60	-61.91	-47.89	-13.00	-14.02	-48.91	Peak


Channel Bandwidth: 5 MHz / QPSK
Low Channel



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 3

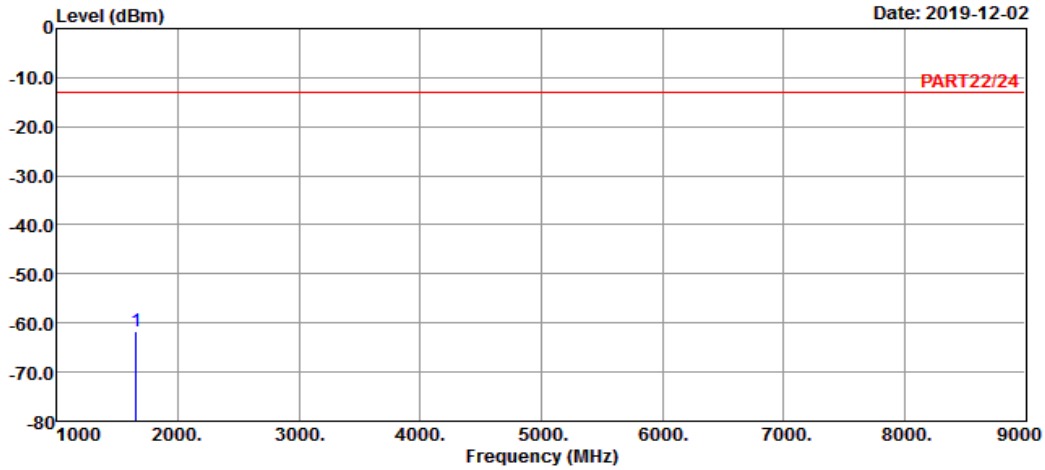

Site : 966 Chamber 5
Condition: PART22/24 HORIZONTAL
Remak : LTE Band 5 QPSK_5M Link_L-CH
Tested by: tim-chen


Freq	Level	Read Level	Limit	Line Factor	Over Limit	Remark
MHz	dBm	dBm	dBm	dB	dB	
1 pp 1653.00	-61.55	-47.78	-13.00	-13.77	-48.55	Peak



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 4

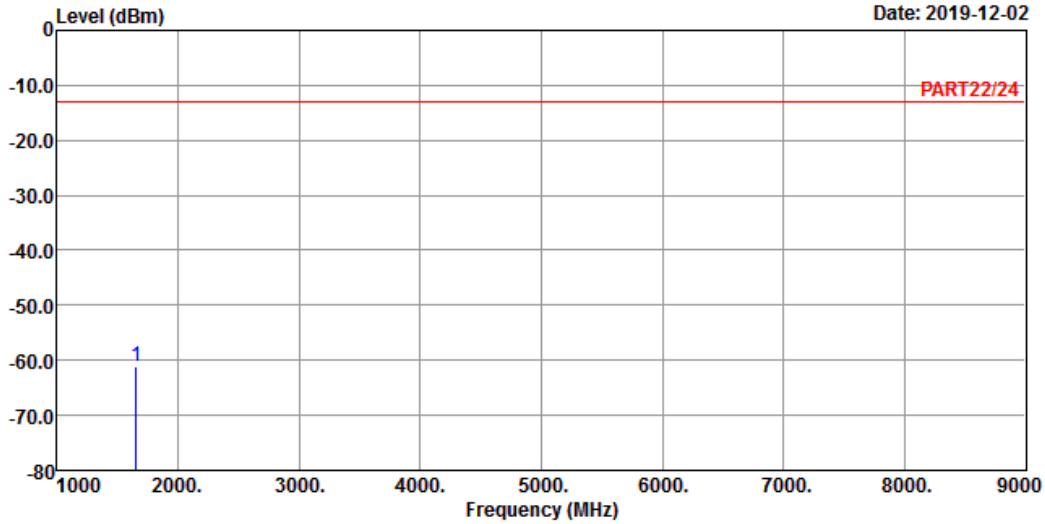

Site : 966 Chamber 5
 Condition: PART22/24 VERTICAL
 Remark : LTE Band 5 QPSK_5M Link_L-CH
 Tested by: tim-chen

Freq	Level	Read Level	Limit	Line Factor	Over Limit	Remark
MHz	dBm	dBm	dBm	dB	dB	
1 pp 1653.00	-61.11	-47.34	-13.00	-13.77	-48.11	Peak


Middle Channel



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 3

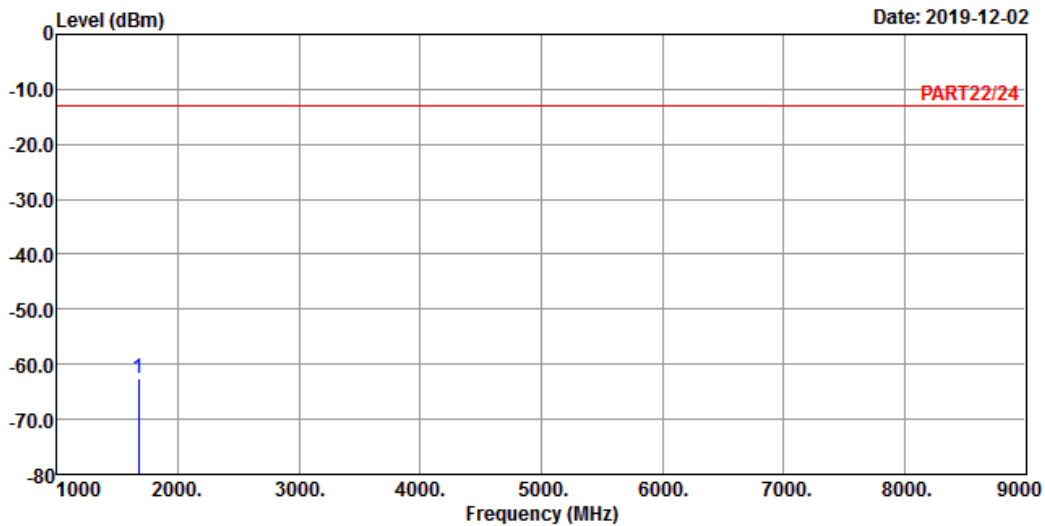

Site : 966 Chamber 5
 Condition: PART22/24 HORIZONTAL
 Remak : LTE Band 5 QPSK_5M Link_M-CH
 Tested by: tim-chen

Freq	Level	Read Level	Limit	Line Factor	Over Limit	Remark
MHz	dBm	dBm	dBm	dB	dB	


1 pp 1673.00 -62.63 -48.73 -13.00 -13.90 -49.63 Peak



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 4

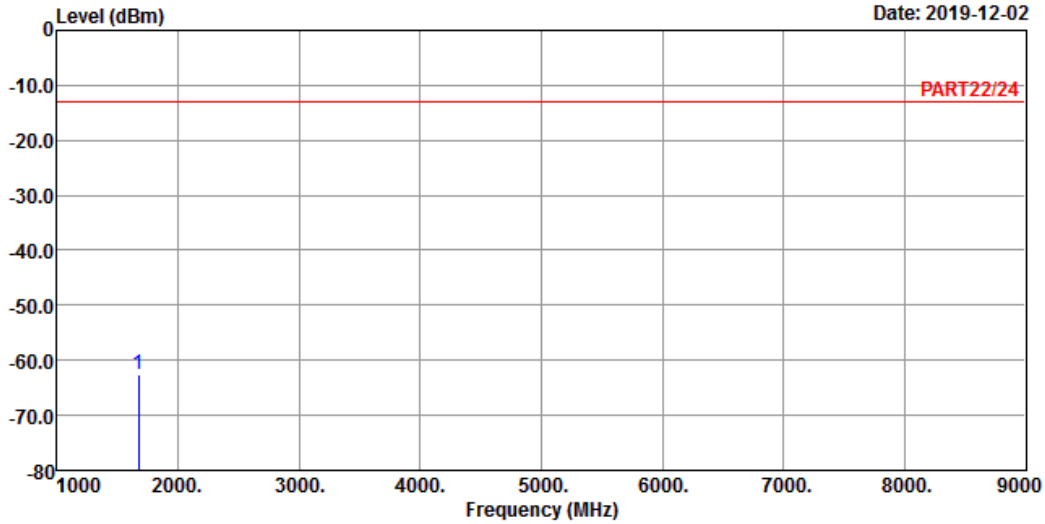

Site : 966 Chamber 5
 Condition: PART22/24 VERTICAL
 Remark : LTE Band 5 QPSK_5M Link_M-CH
 Tested by: tim-chen

Freq	Level	Read Level	Limit	Line Factor	Over Limit	Remark
MHz	dBm	dBm	dBm	dB	dB	
1 pp 1673.00	-62.57	-48.67	-13.00	-13.90	-49.57	Peak


High Channel



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 3

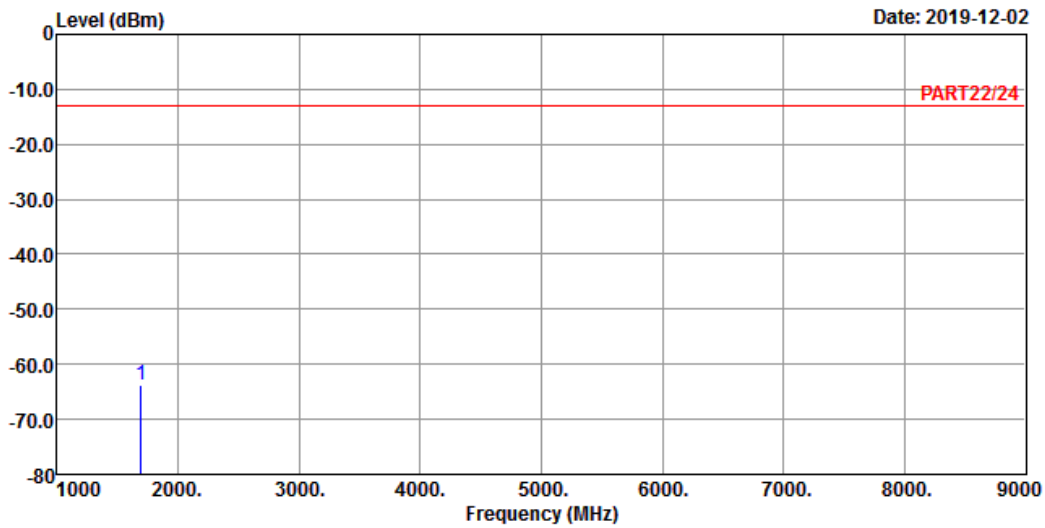

Site : 966 Chamber 5
 Condition: PART22/24 HORIZONTAL
 Remak : LTE Band 5 QPSK_5M Link_H-CH
 Tested by: tim-chen

Freq	Level	Read Level	Limit	Line Factor	Over Limit	Remark
MHz	dBm	dBm	dBm	dB	dB	


1 pp 1693.00 -63.72 -49.70 -13.00 -14.02 -50.72 Peak



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 4

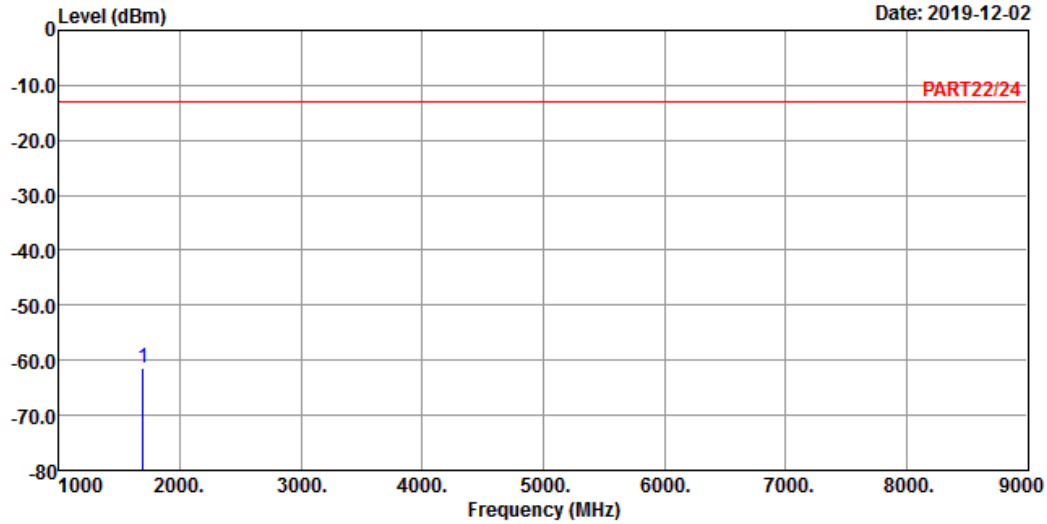

Site : 966 Chamber 5
 Condition: PART22/24 VERTICAL
 Remark : LTE Band 5 QPSK_5M Link_H-CH
 Tested by: tim-chen

Freq	Level	Read Level	Limit	Line Factor	Over Limit	Remark
MHz	dBm	dBm	dBm	dB	dB	
1 pp 1693.00	-61.36	-47.34	-13.00	-14.02	-48.36	Peak


Channel Bandwidth: 10 MHz / QPSK
Low Channel



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 3

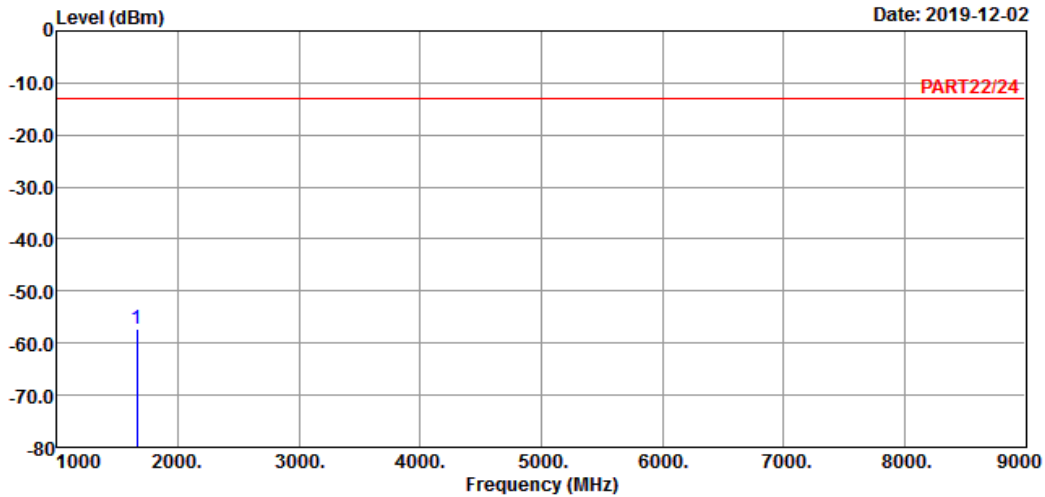

Site : 966 Chamber 5
Condition: PART22/24 HORIZONTAL
Remak : LTE Band 5 QPSK_10M Link_L-CH
Tested by: tim-chen

Freq	Level	Read Level	Limit	Over	Remark
MHz	dBm	dBm	dBm	dB	


1 pp 1658.00 -57.29 -43.49 -13.00 -13.80 -44.29 Peak



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 4

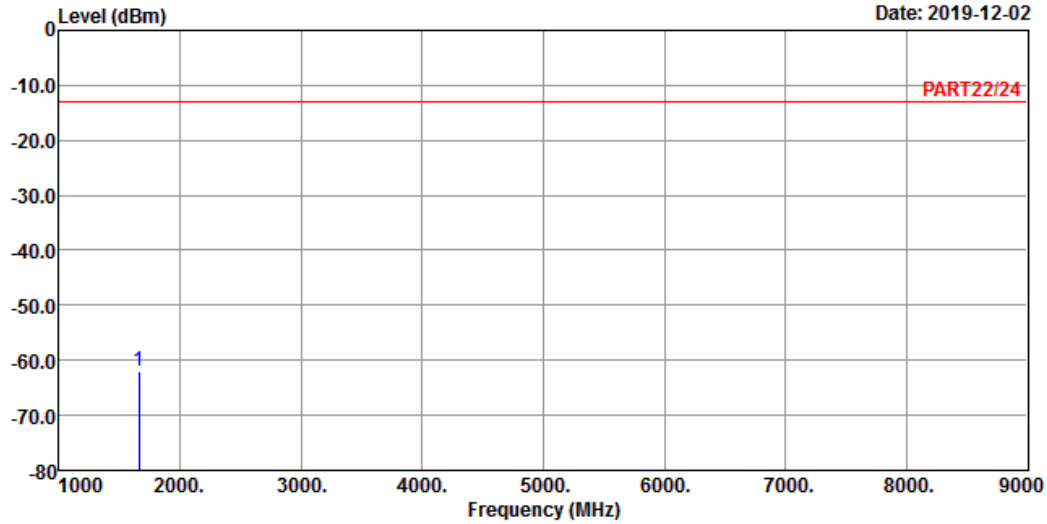

Site : 966 Chamber 5
 Condition: PART22/24 VERTICAL
 Remark : LTE Band 5 QPSK_10M Link_L-CH
 Tested by: tim-chen

Freq	Level	Read Level	Limit	Line Factor	Over Limit	Remark
MHz	dBm	dBm	dBm	dB	dB	
1 pp 1658.00	-62.08	-48.28	-13.00	-13.80	-49.08	Peak


Middle Channel



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 3

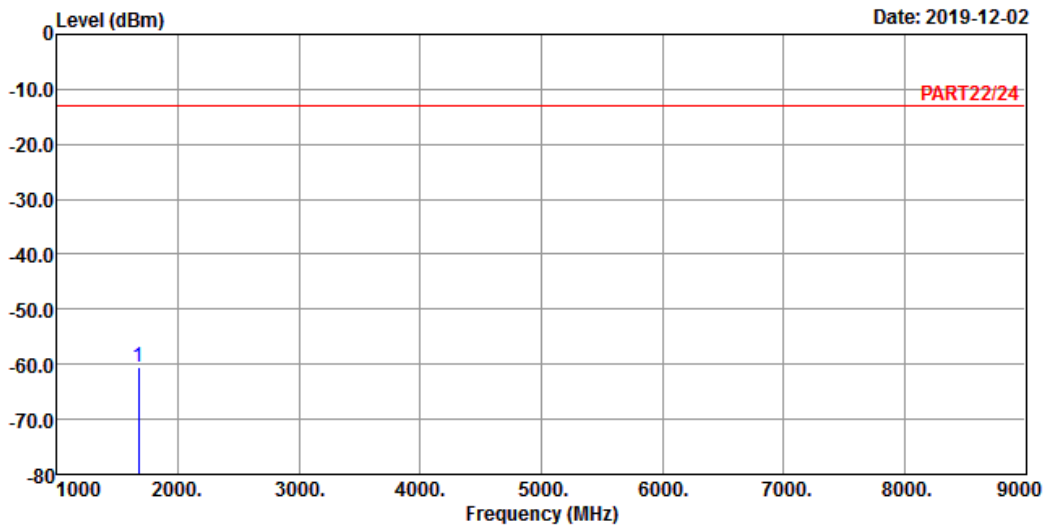

Site : 966 Chamber 5

Condition: PART22/24 HORIZONTAL

Remak : LTE Band 5 QPSK_10M Link_M-CH

Tested by: tim-chen

Freq	Level	Read Level	Limit	Line Factor	Over Limit	Remark
MHz	dBm	dBm	dBm	dB	dB	


1 pp 1673.00 -60.41 -46.51 -13.00 -13.90 -47.41 Peak



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 4

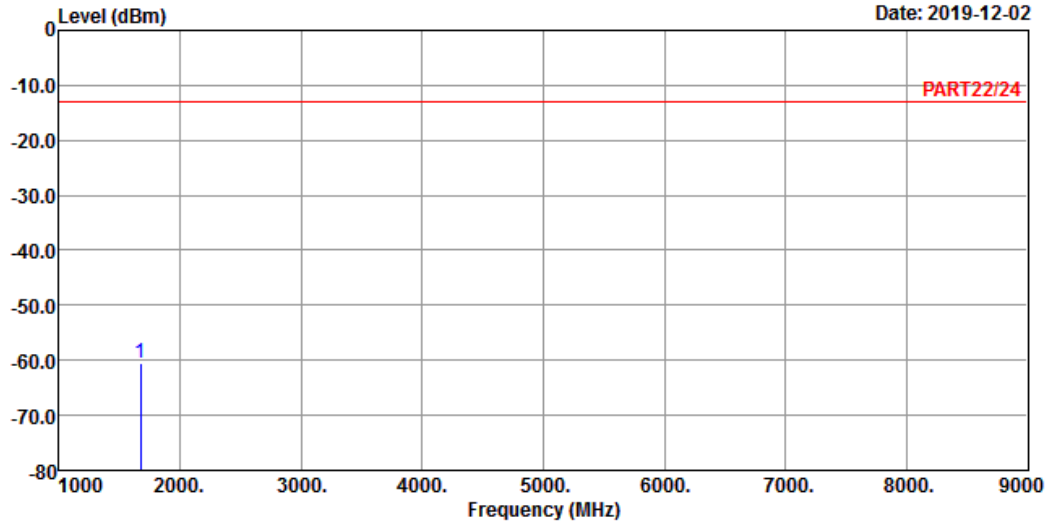

Site : 966 Chamber 5
 Condition: PART22/24 VERTICAL
 Remak : LTE Band 5 QPSK_10M Link_M-CH
 Tested by: tim-chen

Freq	Level	Read Level	Limit	Line Factor	Over Limit	Remark
MHz	dBm	dBm	dBm	dB	dB	
1 pp 1673.00	-60.46	-46.56	-13.00	-13.90	-47.46	Peak

High Channel




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 5

Date: 2019-12-02

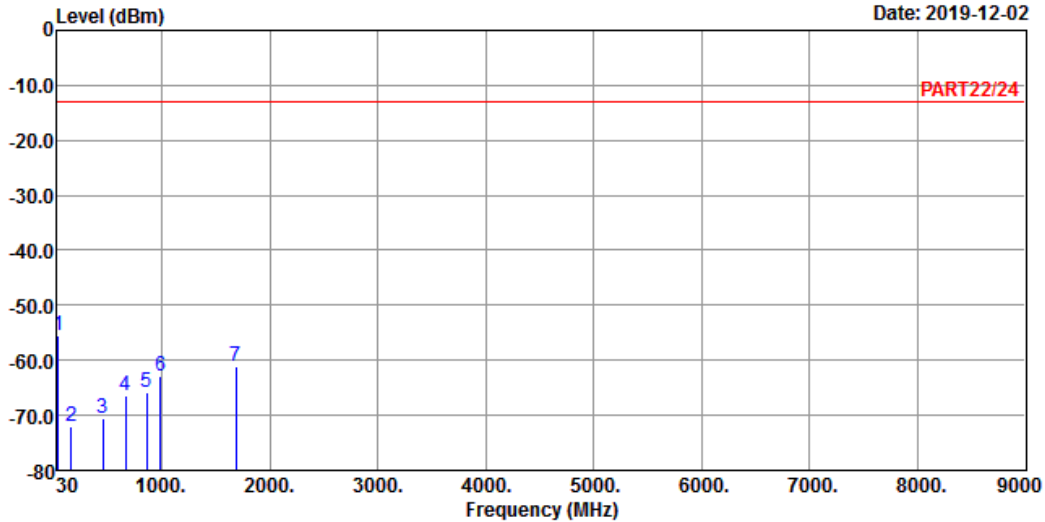

Site : 966 Chamber 5

Condition: PART22/24 HORIZONTAL

Remak : LTE Band 5 QPSK_10M Link_H-CH

Tested by: tim-chen

	Freq	Level	Read Level	Limit	Line	Factor	Over	Limit	Remark
	MHz	dBm	dBm	dBm		dB	dB	dB	
1	pp	39.70	-55.49	-56.13	-13.00	0.64	-42.49	Peak	
2		161.92	-72.06	-67.08	-13.00	-4.98	-59.06	Peak	
3		456.80	-70.50	-65.08	-13.00	-5.42	-57.50	Peak	
4		664.38	-66.52	-65.86	-13.00	-0.66	-53.52	Peak	
5		860.32	-65.75	-66.10	-13.00	0.35	-52.75	Peak	
6		989.33	-62.85	-66.05	-13.00	3.20	-49.85	Peak	
7		1688.00	-61.00	-47.01	-13.00	-13.99	-48.00	Peak	




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 6

Date: 2019-12-02

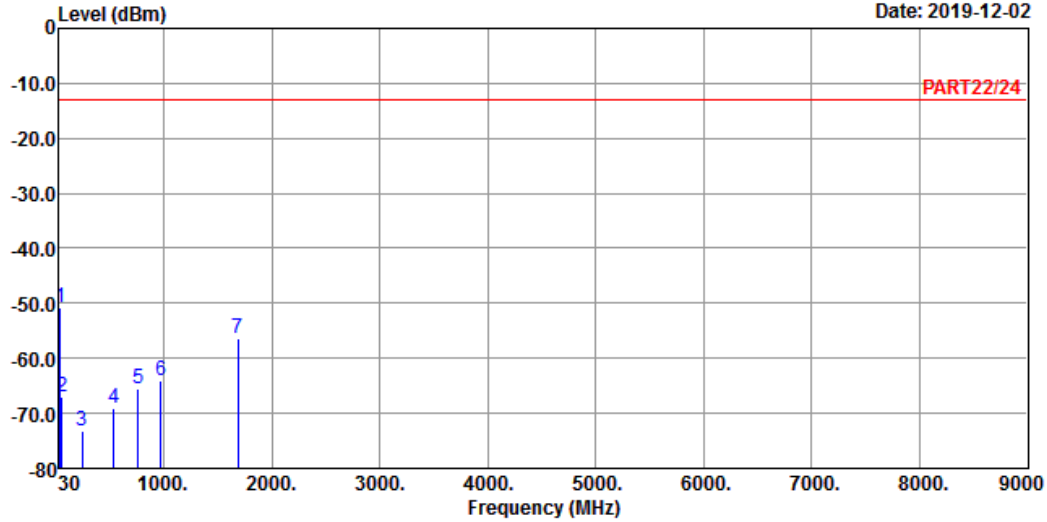

Site : 966 Chamber 5
 Condition: PART22/24 VERTICAL
 Remak : LTE Band 5 QPSK_10M Link_H-CH
 Tested by: tim-chen

	Freq	Level	Read Level	Limit	Line Factor	Over Limit	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1 pp	37.76	-50.82	-50.38	-13.00	-0.44	-37.82	Peak
2	54.25	-67.15	-61.08	-13.00	-6.07	-54.15	Peak
3	241.46	-73.12	-66.78	-13.00	-6.34	-60.12	Peak
4	537.31	-69.11	-65.81	-13.00	-3.30	-56.11	Peak
5	758.47	-65.57	-66.42	-13.00	0.85	-52.57	Peak
6	974.78	-64.20	-66.89	-13.00	2.69	-51.20	Peak
7	1688.00	-56.51	-42.52	-13.00	-13.99	-43.51	Peak

5 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).

Appendix – Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Lin Kou EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.bureauveritas-adt.com

The address and road map of all our labs can be found in our web site also.

--- END ---