

## #01\_WCDMA II\_RMC 12.2Kbps\_Front\_25mm\_Ch9262


Communication System: WCDMA; Frequency: 1852.400 MHz; Duty Cycle: 1:1  
Medium: HSL\_1900\_230613 Medium parameters used:  $f=1852.400$  MHz;  $\sigma=1.38$  S/m;  $\epsilon_r=40.0$   
Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

### DASY6 Configuration:

- Probe: EX3DV4 - SN3925; ConvF(8.6, 8.6, 8.6); Calibrated: 2023-04-25
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn853; Calibrated: 2022-07-20
- Phantom: ELI V5.0 (20deg probe tilt); Serial: 1131; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: WCDMA, 10011-CAC

**Area Scan (150.0 mm x 120.0 mm):** Measurement Grid: 15.0 mm x 15.0 mm  
SAR (1g) = 0.195 W/kg; SAR (10g) = 0.119 W/kg;

**Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm):** Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm  
Power Drift = -0.01 dB  
SAR (1g) = 0.205 W/kg; SAR (8g) = 0.139 W/kg; SAR (10g) = 0.131 W/kg

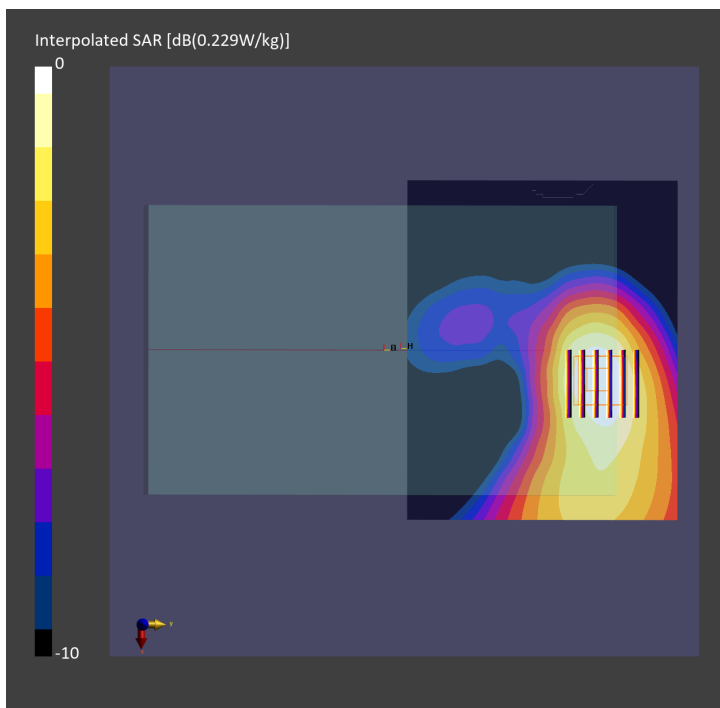

## #02\_WCDMA IV\_RMC 12.2Kbps\_Front\_25mm\_Ch1312


Communication System: WCDMA; Frequency: 1712.400 MHz; Duty Cycle: 1:1  
Medium: HSL\_1750\_230613 Medium parameters used:  $f=1712.400$  MHz;  $\sigma=1.34$  S/m;  $\epsilon_r=40.3$   
Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

### DASY6 Configuration:

- Probe: EX3DV4 - SN3925; ConvF(8.92, 8.92, 8.92); Calibrated: 2023-04-25
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn853; Calibrated: 2022-07-20
- Phantom: ELI V5.0 (20deg probe tilt); Serial: 1131; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: WCDMA, 10011-CAC

**Area Scan (150.0 mm x 120.0 mm):** Measurement Grid: 15.0 mm x 15.0 mm  
SAR (1g) = 0.478 W/kg; SAR (10g) = 0.294 W/kg;

**Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm):** Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm  
Power Drift = 0.01 dB  
SAR (1g) = 0.499 W/kg; SAR (8g) = 0.341 W/kg; SAR (10g) = 0.322 W/kg

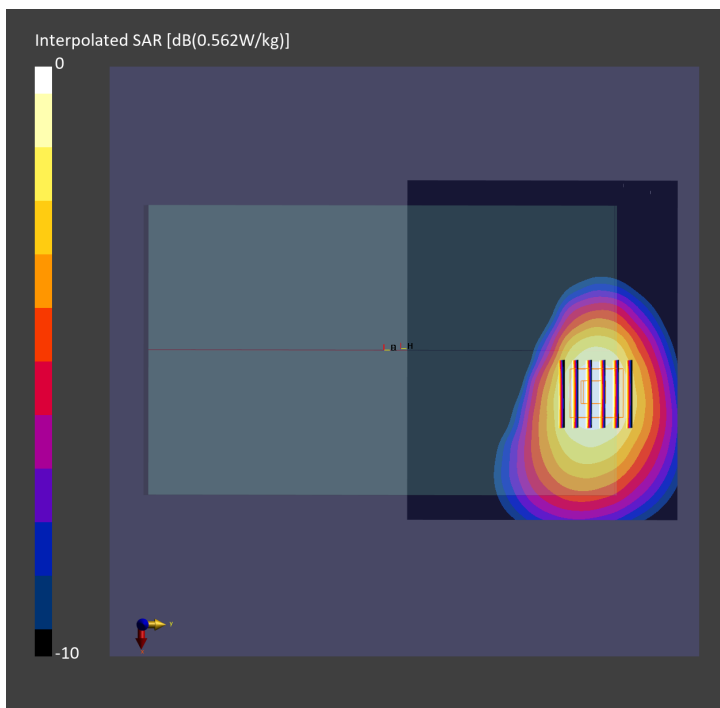

### #03\_WCDMA V\_RMC 12.2Kbps\_Front\_25mm\_Ch4182


Communication System: WCDMA; Frequency: 836.400 MHz; Duty Cycle: 1:1  
Medium: HSL\_835\_230613 Medium parameters used:  $f = 836.400$  MHz;  $\sigma = 0.920$  S/m;  $\epsilon_r = 42.8$   
Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

#### DASY6 Configuration:

- Probe: EX3DV4 - SN3925; ConvF(10.29, 10.29, 10.29); Calibrated: 2023-04-25
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn853; Calibrated: 2022-07-20
- Phantom: ELI V5.0 (20deg probe tilt); Serial: 1131; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: WCDMA, 10011-CAC

**Area Scan (150.0 mm x 120.0 mm):** Measurement Grid: 15.0 mm x 15.0 mm  
SAR (1g) = 0.285 W/kg; SAR (10g) = 0.201 W/kg;

**Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm):** Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm  
Power Drift = -0.01 dB  
SAR (1g) = 0.294 W/kg; SAR (8g) = 0.225 W/kg; SAR (10g) = 0.216 W/kg

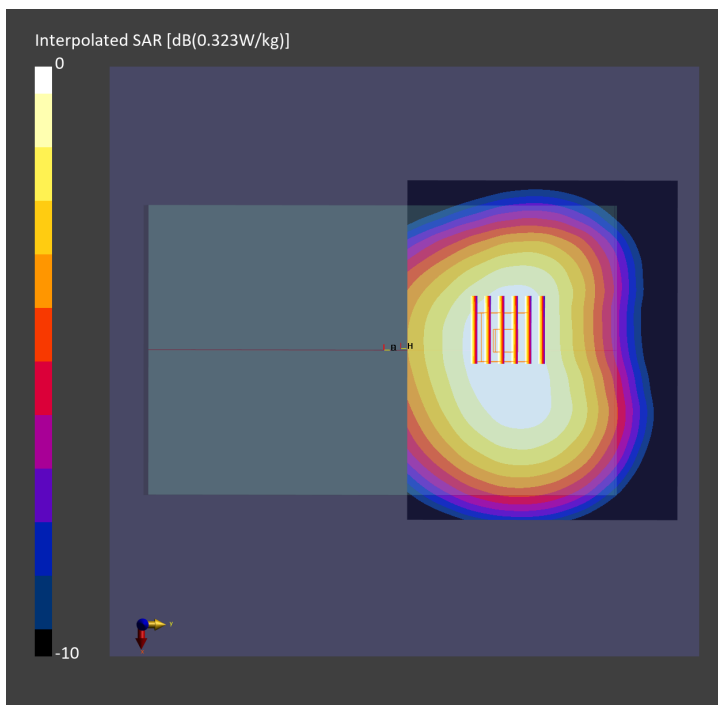

## #04\_LTE Band 2\_20M\_QPSK\_1\_0\_Front\_25mm\_Ch18700


Communication System: LTE-FDD ; Frequency: 1860.000 MHz; Duty Cycle: 1:1  
Medium: HSL\_1900\_230613 Medium parameters used:  $f=1860.000$  MHz;  $\sigma=1.38$  S/m;  $\epsilon_r=39.9$   
Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

### DASY6 Configuration:

- Probe: EX3DV4 - SN3925; ConvF(8.6, 8.6, 8.6); Calibrated: 2023-04-25
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn853; Calibrated: 2022-07-20
- Phantom: ELI V5.0 (20deg probe tilt); Serial: 1131; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: LTE-FDD, 10169-CAF

**Area Scan (150.0 mm x 120.0 mm):** Measurement Grid: 15.0 mm x 15.0 mm  
SAR (1g) = 0.207 W/kg; SAR (10g) = 0.126 W/kg;

**Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm):** Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm  
Power Drift = 0.01 dB  
SAR (1g) = 0.218 W/kg; SAR (8g) = 0.147 W/kg; SAR (10g) = 0.139 W/kg

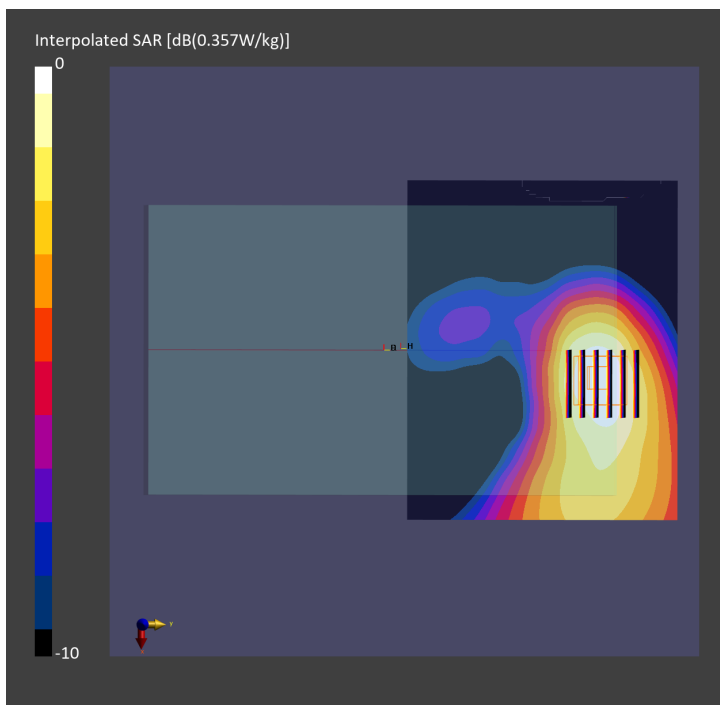

## #05\_LTE Band 5\_10M\_QPSK\_1\_0\_Front\_25mm\_Ch20525


Communication System: LTE-FDD ; Frequency: 836.500 MHz; Duty Cycle: 1:1  
Medium: HSL\_835\_230613 Medium parameters used:  $f = 836.500$  MHz;  $\sigma = 0.920$  S/m;  $\epsilon_r = 42.8$   
Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

### DASY6 Configuration:

- Probe: EX3DV4 - SN3925; ConvF(10.29, 10.29, 10.29); Calibrated: 2023-04-25
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn853; Calibrated: 2022-07-20
- Phantom: ELI V5.0 (20deg probe tilt); Serial: 1131; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: LTE-FDD, 10175-CAH

**Area Scan (150.0 mm x 120.0 mm):** Measurement Grid: 15.0 mm x 15.0 mm  
SAR (1g) = 0.230 W/kg; SAR (10g) = 0.162 W/kg;

**Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm):** Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm  
Power Drift = 0.02 dB  
SAR (1g) = 0.237 W/kg; SAR (8g) = 0.181 W/kg; SAR (10g) = 0.174 W/kg

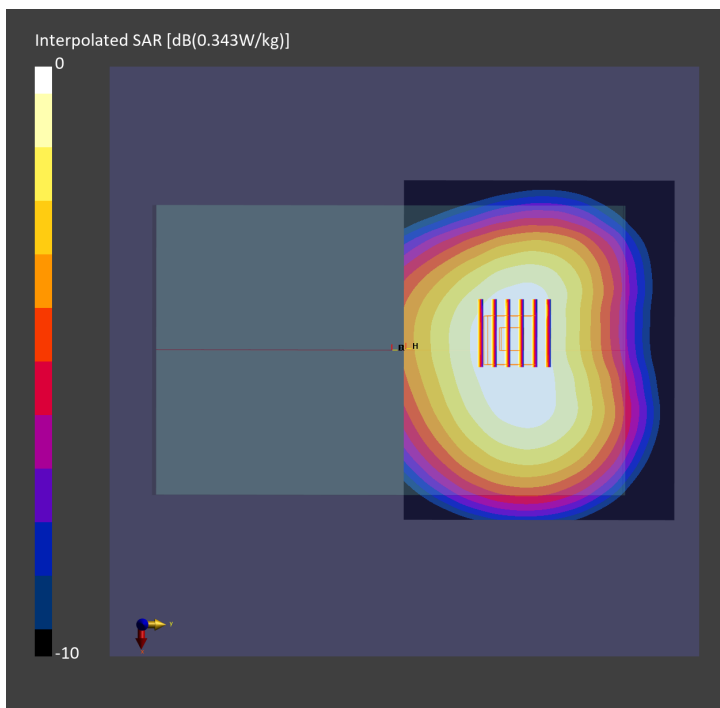

## #06\_LTE Band 12\_10M\_QPSK\_1\_0\_Front\_25mm\_Ch23095


Communication System: LTE-FDD ; Frequency: 707.500 MHz; Duty Cycle: 1:1  
Medium: HSL\_750\_230613 Medium parameters used:  $f = 707.500$  MHz;  $\sigma = 0.876$  S/m;  $\epsilon_r = 43.4$   
Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

### DASY6 Configuration:

- Probe: EX3DV4 - SN3925; ConvF(10.36, 10.36, 10.36); Calibrated: 2023-04-25
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn853; Calibrated: 2022-07-20
- Phantom: ELI V5.0 (20deg probe tilt); Serial: 1131; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: LTE-FDD, 10175-CAH

**Area Scan (150.0 mm x 120.0 mm):** Measurement Grid: 15.0 mm x 15.0 mm  
SAR (1g) = 0.144 W/kg; SAR (10g) = 0.102 W/kg;

**Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm):** Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm  
Power Drift = -0.00 dB  
SAR (1g) = 0.149 W/kg; SAR (8g) = 0.119 W/kg; SAR (10g) = 0.114 W/kg

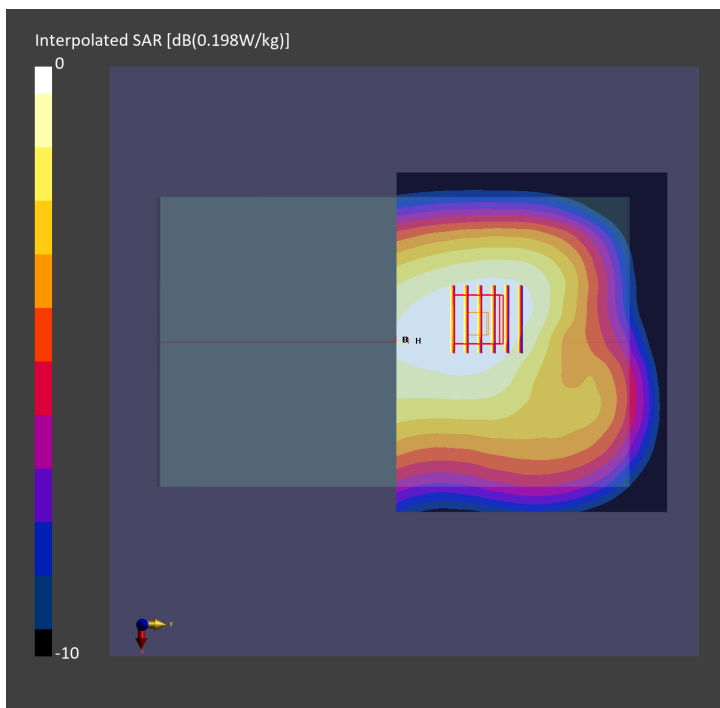

## #07\_LTE Band 13\_10M\_QPSK\_1\_0\_Front\_25mm\_Ch23230


Communication System: LTE-FDD ; Frequency: 782.000 MHz; Duty Cycle: 1:1  
Medium: HSL\_750\_230613 Medium parameters used:  $f = 782.000$  MHz;  $\sigma = 0.903$  S/m;  $\epsilon_r = 42.9$   
Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

### DASY6 Configuration:

- Probe: EX3DV4 - SN3925; ConvF(10.36, 10.36, 10.36); Calibrated: 2023-04-25
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn853; Calibrated: 2022-07-20
- Phantom: ELI V5.0 (20deg probe tilt); Serial: 1131; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: LTE-FDD, 10175-CAH

**Area Scan (150.0 mm x 150.0 mm):** Measurement Grid: 15.0 mm x 15.0 mm  
SAR (1g) = 0.170 W/kg; SAR (10g) = 0.119 W/kg;

**Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm):** Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm  
Power Drift = -0.00 dB  
SAR (1g) = 0.176 W/kg; SAR (8g) = 0.135 W/kg; SAR (10g) = 0.130 W/kg

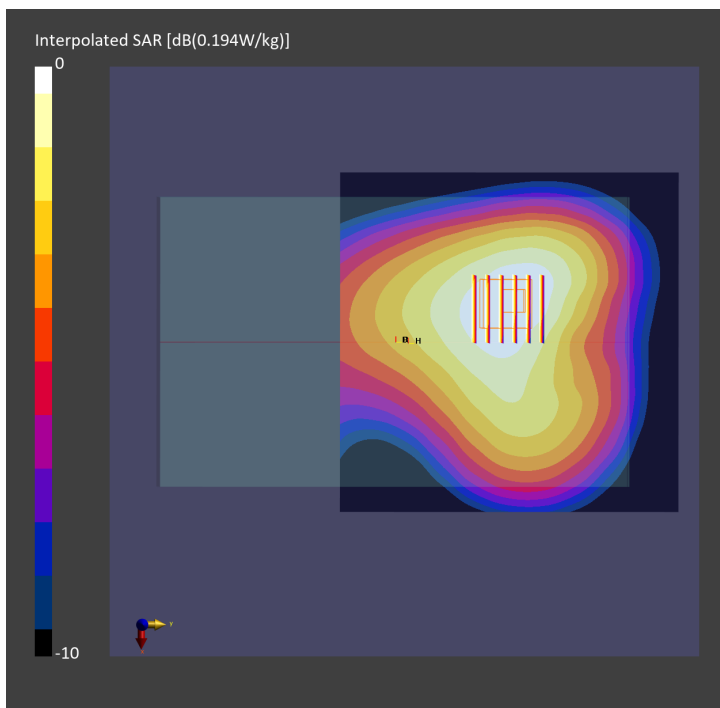

## #08\_LTE Band 14\_10M\_QPSK\_1\_0\_Front\_25mm\_Ch23330


Communication System: LTE-FDD ; Frequency: 793.000 MHz; Duty Cycle: 1:1  
Medium: HSL\_750\_230613 Medium parameters used:  $f = 793.000$  MHz;  $\sigma = 0.905$  S/m;  $\epsilon_r = 43.0$   
Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

### DASY6 Configuration:

- Probe: EX3DV4 - SN3925; ConvF(10.36, 10.36, 10.36); Calibrated: 2023-04-25
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn853; Calibrated: 2022-07-20
- Phantom: ELI V5.0 (20deg probe tilt); Serial: 1131; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: LTE-FDD, 10175-CAH

**Area Scan (150.0 mm x 150.0 mm):** Measurement Grid: 15.0 mm x 15.0 mm  
SAR (1g) = 0.184 W/kg; SAR (10g) = 0.128 W/kg;

**Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm):** Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm  
Power Drift = 0.01 dB  
SAR (1g) = 0.190 W/kg; SAR (8g) = 0.145 W/kg; SAR (10g) = 0.140 W/kg

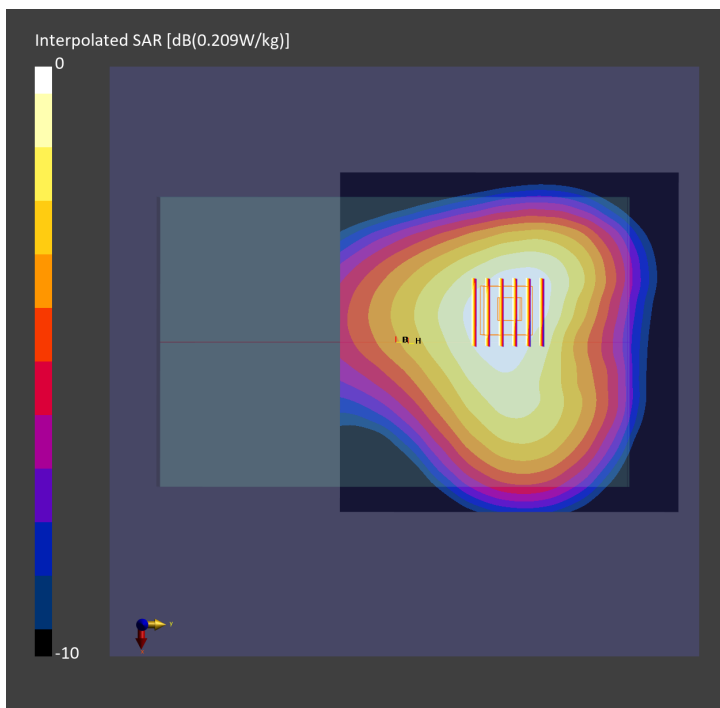



## #09\_LTE Band 66\_20M\_QPSK\_1\_0\_Front\_25mm\_Ch132072

Communication System: LTE-FDD; Frequency: 1720.000 MHz; Duty Cycle: 1:1  
Medium: HSL\_1750\_230613 Medium parameters used:  $f=1720.000$  MHz;  $\sigma=1.34$  S/m;  $\epsilon_r=40.3$   
Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

### DASY6 Configuration:

- Probe: EX3DV4 - SN3925; ConvF(8.92, 8.92, 8.92); Calibrated: 2023-04-25
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn853; Calibrated: 2022-07-20
- Phantom: ELI V5.0 (20deg probe tilt); Serial: 1131; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: LTE-FDD, 10169-CAF

**Area Scan (150.0 mm x 120.0 mm):** Measurement Grid: 15.0 mm x 15.0 mm  
SAR (1g) = 0.410 W/kg; SAR (10g) = 0.252 W/kg;

**Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm):** Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm  
Power Drift = -0.00 dB  
SAR (1g) = 0.426 W/kg; SAR (8g) = 0.291 W/kg; SAR (10g) = 0.275 W/kg

