



# FCC RADIO TEST REPORT

**FCC ID** : LHJ-FE5NA0010  
**Equipment** : FE5NA0010, FE5NA0011  
**Brand Name** : Continental  
**Model Name** : FE5NA0010, FE5NA0011  
**Applicant** : Continental Automotive Systems, Inc.  
21440 W Lake Cook Rd., Deer Park, IL 60010, USA  
**Manufacturer** : Continental Automotive Systems, Inc.  
21440 W Lake Cook Rd., Deer Park, IL 60010, USA  
**Standard** : FCC 47 CFR Part 2, 22(H), 24(E), 27(L)

The product was received on Nov. 22, 2022 and testing was performed from Jan. 17, 2023 to Mar. 23, 2023. We, Sporton International Inc. EMC & Wireless Communications Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures given in ANSI / TIA-603-E and has been in compliance with the applicable technical standards.

The test results in this variant report apply exclusively to the tested model / sample. Without written approval from Sporton International Inc. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.

*Louis Wu*

Approved by: Louis Wu

**Sporton International Inc. EMC & Wireless Communications Laboratory**

No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C.)



# Table of Contents

**History of this test report..... 3**

**Summary of Test Result..... 4**

**1 General Description ..... 5**

    1.1 Product Feature of Equipment Under Test ..... 5

    1.2 Product Specification of Equipment Under Test ..... 6

    1.3 Modification of EUT ..... 6

    1.4 Testing Location ..... 6

    1.5 Applicable Standards ..... 7

**2 Test Configuration of Equipment Under Test ..... 8**

    2.1 Test Mode..... 8

    2.2 Frequency List of Low/Middle/High Channels..... 8

**3 Conducted Test Result ..... 9**

    3.1 Measuring Instruments..... 9

    3.2 Conducted Output Power and ERP/EIRP ..... 10

**4 List of Measuring Equipment..... 11**

**Appendix A. Test Results of Conducted Test**





### Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.2	§2.1046	Conducted Output Power	Pass	-
	§22.913 (a)(5)	Effective Radiated Power (WCDMA Band V)		
	§24.232 (c)	Equivalent Isotropic Radiated Power (WCDMA Band II)		
	§27.50 (d)(4)	Equivalent Isotropic Radiated Power (WCDMA Band IV)		
-	§24.232 (d)	Peak-to-Average Ratio	Not Required	-
-	§2.1049 §22.917 (b) §24.238 (b) §27.53 (g)	Occupied Bandwidth (WCDMA Band V) (WCDMA Band II) (WCDMA Band IV)	Not Required	-
-	§2.1051 §22.917 (a) §24.238 (a) §27.53 (g)	Band Edge Measurement (WCDMA Band V) (WCDMA Band II) (WCDMA Band IV)	Not Required	-
-	§2.1051 §22.917 (a) §24.238 (a) §27.53 (g)	Conducted Emission (WCDMA Band V) (WCDMA Band II) (WCDMA Band IV)	Not Required	-
-	§2.1055 §22.355 §24.235 §27.54	Frequency Stability Temperature & Voltage	Not Required	-
-	§2.1053 §22.917 (a) §24.238 (a) §27.53 (h)	Field Strength of Spurious Radiation (WCDMA Band V) (WCDMA Band II) (WCDMA Band IV)	Not Required	-

**Remark:**

1. Not required means after assessing, test items are not necessary to carry out.
2. This is a variant report by changing SW and enabling internal antenna support band for LTE, LTE CA, 5G FR1. All the test cases were performed on original report which can be referred to Sporton Report Number FG2N2201-06A. Based on the original report, only worst case was verified.
3. The FG2N2201-11A report reuses Conducted output power from the FG2N2201A report.

**Conformity Assessment Condition:**

The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacturer who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.

**Disclaimer:**

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.

**Reviewed by: Yun Huang**

**Report Producer: Rachel Hsieh**



# 1 General Description

## 1.1 Product Feature of Equipment Under Test

Product Feature	
Equipment	FE5NA0010, FE5NA0011
Brand Name	Continental
Model Name	FE5NA0010, FE5NA0011
FCC ID	LHJ-FE5NA0010
Installed into the Host	Equipment name: G12N510G1, G12N500G1 Brand name: Continental Model name: G12N510G1, G12N500G1
EUT supports Radios application	WCDMA/HSPA/LTE/5G NR/GNSS
EUT Stage	Identical Prototype

Sample Information			
Sample	TA-code	L2/L5 GNSS	Band Difference
1	FE5NA0010	Support	/
2	FE5NA0011	Not Support	BOM change: depopulated passive components from the GNSS RF front-end

**Remark:** The above EUT's information was declared by manufacturer.

## 1.2 Product Specification of Equipment Under Test

Product Specification is subject to this standard	
<b>Tx Frequency</b>	<b>WCDMA:</b> Band V: 826.4 MHz ~ 846.6 MHz Band II: 1852.4 MHz ~ 1907.6 MHz Band IV: 1712.4 MHz ~ 1752.6 MHz
<b>Rx Frequency</b>	<b>WCDMA:</b> Band V: 871.4 MHz ~ 891.6 MHz Band II: 1932.4 MHz ~ 1987.6 MHz Band IV: 2112.4 MHz ~ 2152.6 MHz
<b>Maximum Output Power to Antenna</b>	<b>WCDMA:</b> Band V: 23.11 dBm Band II: 22.68 dBm Band IV: 23.00 dBm
<b>Antenna Type</b>	<b>&lt;Internal (Model: INTANT01, INTANT02)&gt;:</b> TCP antenna
<b>Antenna Gain</b>	<b>&lt;Internal (Model: INTANT01)&gt;:</b> Cellular Band: 4.69 dBi PCS Band: 5.15 dBi AWS Band: 4.86 dBi
<b>Type of Modulation</b>	WCDMA: QPSK (Uplink) HSDPA: 64QAM (Downlink) HSUPA: QPSK (Uplink)

**Remark:** The EUT's information above is declared by manufacturer. Please refer to Disclaimer in report summary.

## 1.3 Modification of EUT

No modifications made to the EUT during the testing.

## 1.4 Testing Location

<b>Test Site</b>	Sporton International Inc. EMC & Wireless Communications Laboratory
<b>Test Site Location</b>	No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C.) TEL: +886-3-327-3456 FAX: +886-3-328-4978
<b>Test Site No.</b>	<b>Sporton Site No.</b>
	TH03-HY
<b>Test Engineer</b>	Cotty Hsu and Luffy Lin
<b>Temperature (°C)</b>	22.1~22.8
<b>Relative Humidity (%)</b>	53~55

FCC Designation No.: TW1190



## **1.5 Applicable Standards**

According to the specifications declared by the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ ANSI C63.26-2015
- ♦ ANSI / TIA-603-E
- ♦ FCC 47 CFR Part 2, 22(H), 24(E), 27(L)
- ♦ FCC KDB 971168 D01 Power Meas. License Digital Systems v03r01
- ♦ FCC KDB 412172 D01 Determining ERP and EIRP v01r01

**Remark:**

1. All the test items were validated and recorded in accordance with the standards without any modification during the testing.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.
3. The TAF code is not including all the FCC KDB listed without accreditation.



## 2 Test Configuration of Equipment Under Test

### 2.1 Test Mode

Antenna port conducted and radiated test items were performed according to KDB 971168 D01 Power Meas. License Digital Systems v03r01 with maximum output power.

Radiated emissions were investigated as following frequency range:

1. 30 MHz to 9000 MHz for WCDMA Band V
2. 30 MHz to 18000 MHz for WCDMA Band IV
3. 30 MHz to 19100 MHz for WCDMA Band II

All modes, data rates and positions were investigated.

Test modes are chosen to be reported as the worst case configuration below:

Test Modes		
Band	Radiated TCs	Conducted TCs
WCDMA Band V	■ RMC 12.2Kbps Link	■ RMC 12.2Kbps Link
WCDMA Band II	■ RMC 12.2Kbps Link	■ RMC 12.2Kbps Link
WCDMA Band IV	■ RMC 12.2Kbps Link	■ RMC 12.2Kbps Link

### 2.2 Frequency List of Low/Middle/High Channels

Frequency List				
Band	Channel/Frequency(MHz)	Lowest	Middle	Highest
WCDMA Band V	Channel	4132	4182	4233
	Frequency	826.4	836.4	846.6
WCDMA Band II	Channel	9262	9400	9538
	Frequency	1852.4	1880.0	1907.6
WCDMA Band IV	Channel	1312	1413	1513
	Frequency	1712.4	1732.6	1752.6




### 3 Conducted Test Result

#### 3.1 Measuring Instruments

Please refer to the measuring equipment list in this test report.

##### 3.1.1 Test Setup

##### 3.1.2 Conducted Output Power

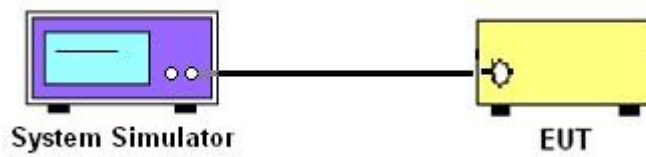

##### 3.1.3 Test Result of Conducted Test

Please refer to Appendix A.



## 3.2 Conducted Output Power and ERP/EIRP

### 3.2.1 Description of the Conducted Output Power and ERP/EIRP

A system simulator was used to establish communication with the EUT. Its parameters were set to enforce EUT transmitting at the maximum power. The measured power in the radio frequency on the transmitter output terminals shall be reported.

The ERP of mobile transmitters must not exceed 7 Watts for WCDMA Band V

The EIRP of mobile transmitters must not exceed 2 Watts for WCDMA Band II

The EIRP of mobile transmitters must not exceed 1 Watts for WCDMA Band IV

According to KDB 412172 D01 Power Approach,

$EIRP = P_T + G_T - L_C$ ,  $ERP = EIRP - 2.15$ , where

$P_T$  = transmitter output power in dBm

$G_T$  = gain of the transmitting antenna in dBi

$L_C$  = signal attenuation in the connecting cable between the transmitter and antenna in dB

### 3.2.2 Test Procedures

1. The transmitter output port is connected to the system simulator.
2. Set EUT at maximum power through system simulator.
3. Select the lowest, middle, and the highest channels for each band and different modulation.
4. Measure the maximum burst average power for GSM and maximum average power for other modulation signal.



## 4 List of Measuring Equipment

Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Radio Communication Analyzer	Anritsu	MT8821C	6262025353	LTE FDD/TDD LTE-2CC DLCA/ULCA	Oct. 13, 2022	Jan. 17 2023~ Mar. 23, 2023	Oct. 12, 2023	Conducted (TH03-HY)
Thermal Chamber	ESPEC	SH-641	92013720	-40°C~90°C	Sep. 07, 2022	Jan. 17, 2023~ Mar. 23, 2023	Sep. 06, 2023	Conducted (TH03-HY)
DC Power Supply	GW Instek	GPP-2323	GES906037	0V~64V : 0A~6A	Dec. 29, 2022	Jan. 17, 2023~ Mar. 23, 2023	Dec. 28, 2023	Conducted (TH03-HY)
Coupler	Warison	20dB 25W SMA Directional Coupler	#B	1~18GHz	Jan. 06, 2023	Jan. 17, 2023~ Mar. 23, 2023	Jan. 05, 2024	Conducted (TH03-HY)
Base Station (Measure)	Anritsu	MT8000A	6262134933	FR1	Jun. 13, 2022	Jan. 17 2023~ Mar. 23, 2023	Jun. 12, 2023	Conducted (TH03-HY)



## Appendix A. Test Results of Conducted Test

### Conducted Output Power(Average power) & ERP / EIRP

WCDMA Band V Maximum Average Power [dBm] (GT - LC = 4.69 dB)					
Channel	4132	4182	4233	ERP (dBm)	ERP (W)
Frequency	826.4	836.4	846.6		
RMC 12.2K	23.11	23.00	23.03	25.65	0.3673
HSDPA Subtest-1	22.13	22.06	22.05		
HSDPA Subtest-2	22.10	22.11	22.05		
HSDPA Subtest-3	21.61	21.58	21.55		
HSDPA Subtest-4	21.59	21.56	21.55		
HSUPA Subtest-1	22.10	22.05	21.95		
HSUPA Subtest-2	20.10	20.00	20.00		
HSUPA Subtest-3	21.12	21.03	20.97		
HSUPA Subtest-4	20.09	20.02	19.99		
HSUPA Subtest-5	22.10	22.00	22.00		
Limit	ERP < 7W				

WCDMA Band II Maximum Average Power [dBm] (GT - LC = 5.15 dB)					
Channel	9262	9400	9538	EIRP (dBm)	EIRP (W)
Frequency	1852.4	1880	1907.6		
RMC 12.2K	22.68	22.59	22.65	27.83	0.6067
HSDPA Subtest-1	21.66	21.61	21.66		
HSDPA Subtest-2	21.72	21.63	21.61		
HSDPA Subtest-3	21.20	21.11	21.11		
HSDPA Subtest-4	21.20	21.11	21.13		
HSUPA Subtest-1	21.70	21.64	21.63		
HSUPA Subtest-2	19.73	19.55	19.66		
HSUPA Subtest-3	20.67	20.61	20.65		
HSUPA Subtest-4	19.70	19.58	19.64		
HSUPA Subtest-5	21.70	21.60	21.60		
Limit	EIRP < 2W				

WCDMA Band IV Maximum Average Power [dBm] (GT - LC = 4.86 dB)					
Channel	1312	1413	1513	EIRP (dBm)	EIRP (W)
Frequency	1712.4	1732.6	1752.6		
RMC 12.2K	22.98	23.00	22.57	27.86	0.6109
HSDPA Subtest-1	21.98	22.06	21.58		
HSDPA Subtest-2	22.01	22.06	21.57		
HSDPA Subtest-3	21.15	21.56	21.10		
HSDPA Subtest-4	21.47	21.51	21.05		
HSUPA Subtest-1	21.97	21.99	21.58		
HSUPA Subtest-2	19.98	20.01	19.59		
HSUPA Subtest-3	20.97	21.00	20.58		
HSUPA Subtest-4	19.99	19.96	19.55		
HSUPA Subtest-5	22.00	21.50	21.60		
Limit	EIRP < 1W				