

Report No.: SUCR240600020702

Rev.: Λ1

1 of 31 Page:

# **TEST REPORT**

**Application No:** SUCR2406000207MO

Applicant: Continental Automotive Systems, Inc.

**Address of Applicant:** 21440 West Lake Cook, Deer Park, Illinois 60010, USA

Manufacturer: Continental Automotive Systems, Inc.

Address of Manufacturer: 21440 West Lake Cook, Deer Park, Illinois 60010, USA

**EUT Description:** FE5RWR131 Model No.: FE5RWR131 **Trade Mark:** Continental

FCC ID: LHJ-FE5RWR131 Standards: 47 CFR Part 2 47 CFR Part 27

February 1, 2023 (for report SEWA2211000080RG02)

February 1, 2023 (for report SEWA2211000082RG02) **Date of Receipt:** 

June 19, 2024 (for report SUCR240600020702)

February 2, 2023 to September 5, 2023(for report SEWA2211000080RG02) February 2, 2023 to September 6, 2023 (for report SEWA2211000082RG02)

June 20, 2024 to July 3, 2024 (for report SUCR240600020702)

July 22, 2024 Date of Issue:

PASS \* **Test Result:** 

Nature Shen

Prepared by: Nature Shen/ Project

Manager

Date of Test:

Approved by : Well Wei/ Wireless

**Laboratory Manager** 

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-This document is issued by the Company subject to its General Conditions of Service printed overlear, available on request or accessible at <a href="http://www.sgs.com/en/lerms-and-Conditions.aspx">http://www.sgs.com/en/lerms-and-Conditions.aspx</a> and Conditions. Aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/lerms-and-Conditions-and-Conditions-and-Conditions-and-Conditions-and-Conditions-and-Conditions-and-Conditions-and-Conditions-and-Conditions-and-Conditions-encounted-Conditions-and-Conditions-encounted-Conditions-and-Conditions-and-Conditions-and-Conditions-encounted-Conditions-and-Conditions-encounte

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services (Suzhou) Co. Ltd. Wireless Laborator

<sup>\*</sup> In the configuration tested, the EUT detailed in this report complied with the standards specified above.



SUCR240600020702 Report No.:

Rev.: 01 2 of 31 Page:

### Version

	Revision Record				
Version	Chapter	Date	Modifier	Remark	
01		July 22, 2024		Original	

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-This document is issued by the Company subject to its General Conditions of Service printed overlear, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions-ferms-and-Conditions-and-Conditions-and-Conditions-and-Conditions-and-Conditions-Erms-and-Conditions-and-Conditions-Erms-and-Condition

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services (Suzhou) Co. Ltd. Wireless Laboratory



SUCR240600020702 Report No.:

Rev.: 01 3 of 31 Page:

## Content

۷	ersion	1	2
1	Tes	st Summary	4
	1.1	NR Band n77	
2	Ger	neral Information	6
	2.1	Client Information	6
	2.2	Test Location	<del>6</del>
	2.3	Test Facility	6
	2.4	General Description of EUT	7
	2.5	Test Mode	8
	2.6	Test Environment	8
	2.7	Description of Support Units	8
	2.8	Technical Specification	g
	2.9	Test Frequencies	10
3	Des	scription of Tests	11
	3.1	Conducted Output Power	11
	3.2	Effective (Isotropic) Radiated Power of Transmitter	
	3.3	Occupied Bandwidth	
	3.4	Band Edge at Antenna Terminals	14
	3.5	Spurious And Harmonic Emissions at Antenna Terminal	15
	3.6	Peak-Average Ratio	16
	3.7	Field Strength of Spurious Radiation	17
	3.8	Frequency Stability / Temperature Variation	19
	3.9	Test Setups	20
	3.10	Test Conditions	23
4	Mai	in Test Instruments	25
5	Mea	asurement Uncertainty	30
6	Anr	nendixes	31

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-This document is issued by the Company subject to its General Conditions of Service printed overlear, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions-ferms-and-Conditions-and-Conditions-and-Conditions-and-Conditions-and-Conditions-Erms-and-Conditions-and-Conditions-Erms-and-Condition

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services (Suzhou) Co. Ltd. Wireless Laboratory



SUCR240600020702 Report No.:

Rev.: 01 4 of 31 Page:

## **Test Summary**

### 1.1 NR Band n77

## 3700-3980MHz:

Test Item	FCC Rule No.	Requirements	Test Result	Verdict
Effective (Isotropic) Radiated Power Output Data	§2.1046, §27.50(j)(3)	EIRP ≤ 1W	Section 1 of Appendix B.12	Pass
Peak-Average Ratio		≤13 dB	Section 2 of Appendix B.12	Pass
Bandwidth	§2.1049	OBW: No limit. EBW: No limit.	Section 3 of Appendix B.12	Pass
Band Edges Compliance	§2.1051, §27.53(I)(2)	(2) For mobile operations in the 3700-3980 MHz band, the conducted power of any emission outside the licensee's authorized bandwidth shall not exceed - 13 dBm/MHz. Compliance with this paragraph (I)(2) is based on the use of measurement instrumentation employing a resolution bandwidth of 1 megahertz or greater. However, in the 1 megahertz bands immediately outside and adjacent to the licensee's frequency block, the minimum resolution bandwidth for the measurement shall be either one percent of the emission of the transmitter or 350 kHz. In the bands between 1 and 5 MHz removed from the licensee's frequency block, the minimum resolution bandwidth for the measurement shall be 500 kHz.	Section 4 of Appendix B.12	Pass
Spurious Emission at Antenna Terminals	§2.1051, §27.53(I)(2)	not exceed -13 dBm/MHz.	Section 5 of Appendix B.12	Pass
Field Strength of Spurious Radiation	§2.1053, §27.53(I)(2)	not exceed -13 dBm/MHz	Section 6 of Appendix B.12	Pass

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sqs.com/en/Terms-and-This document is issued by the Company subject to its General Conditions of Service printed overlear, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions-ferms-and-Conditions-and-Conditions-and-Conditions-and-Conditions-and-Conditions-Erms-and-Conditions-and-Conditions-Erms-and-Condition

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services (Suzhou) Co. Ltd. Wireless Laboratory



SUCR240600020702 Report No.:

Rev.: Λ1 5 of 31 Page:

Test Item	FCC Rule No.	Requirements	Test Result	Verdict
Frequency Stability	§2.1055(a)(1)(b) §2.1055(d)(1) §27.54	Within authorized bands of operation/frequency block.	Section 7 of Appendix B.12	Pass

Remark for report SEWA2211000082RG02 issue on 2023/09/08:

This test report (Report No.: SEWA2211000082RG02 issue on 2023/09/08) is based on the original test report (Report No.: SEWA2211000080RG02 issue on 2023/09/05).

Review this report and original report, this report just changing the parts according to the declaration letter from client.

Considering to the difference, pre-scan were performed on the sample in this report to find the items which can be influential to the result in the original test report for fully retest.

Therefore in this report the ENDC of Field Strength of Spurious Radiation were tested and other test data in this report are based on the previous report with report number SEWA2211000080RG02 issue on 2023/09/05.

Remark for report SUCR240600020702 issue on July 22, 202:

This test report (Report No.: SUCR240600020702 issue on July 22, 2024) is based on the original test report (Report No.: SEWA2211000082RG02 issue on September 8, 2023).

Review this report and original report, this report just changing the parts according to the declaration letter from client.

Considering to the difference, pre-scan were performed on the sample in this report to find the items which can be influential to the result in the original test report for fully retest.

Therefore in this report Effective (Isotropic) Radiated Power Output Data and Field Strength of Spurious Radiation were performed based on the worst case of the original report with report number SEWA2211000082RG02 issue on September 8, 2023 and other test data in this report are based on the previous report with report number SEWA2211000082RG02 issue on September 8, 2023.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-This document is issued by the Company subject to its General Conditions of Service printed overlear, available on request or accessible at <a href="http://www.sgs.com/en/lerms-and-Conditions.aspx">http://www.sgs.com/en/lerms-and-Conditions.aspx</a> and Conditions. Aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/lerms-and-Conditions-and-Conditions-and-Conditions-and-Conditions-and-Conditions-and-Conditions-and-Conditions-and-Conditions-and-Conditions-and-Conditions-encounted-Conditions-and-Conditions-encounted-Conditions-and-Conditions-and-Conditions-and-Conditions-encounted-Conditions-and-Conditions-encounte

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services (Suzhou) Co. Ltd. Wireless Laborator



Report No.: SUCR240600020702

Rev.: 01 6 of 31 Page:

#### 2 **General Information**

### 2.1 Client Information

Applicant:	Continental Automotive Systems, Inc.
Address of Applicant:	21440 West Lake Cook, Deer Park, Illinois 60010, USA
Manufacturer:	Continental Automotive Systems, Inc.
Address of Manufacturer:	21440 West Lake Cook, Deer Park, Illinois 60010, USA

#### 2.2 Test Location

Company:	SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.	
Address:	South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone	
Post code:	215000	
Test engineer:	Levi Li, King-p Li, Tizzy Song	

## 2.3 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

#### • A2LA (Certificate No. 6336.01)

SGS-CSTC STANDARDS TECHNICAL SERVICES (SUZHOU) CO., LTD. is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 6336.01.

#### • Innovation, Science and Economic Development Canada

SGS-CSTC STANDARDS TECHNICAL SERVICES (SUZHOU) CO., LTD. has been recognized by ISED as an accredited testing laboratory.

CAB identifier: CN0120.

IC#: 27594.

#### • FCC -Designation Number: CN1312

SGS-CSTC STANDARDS TECHNICAL SERVICES (SUZHOU) CO., LTD. has been recognized as an

accredited testing laboratory. Designation Number: CN1312.

Test Firm Registration Number: 717327

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-This document is issued by the Company subject to its General Conditions of Service printed overlear, available on request or accessible at <a href="http://www.sgs.com/en/lerms-and-Conditions-and-Condi

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services (Suzhou) Co. Ltd. Wireless Laborator



SUCR240600020702 Report No.:

Rev.: 01 7 of 31 Page:

## 2.4 General Description of EUT

EUT Description:	FE5RWR131				
Model No.:	FE5RWR131	FE5RWR131			
Trade Mark:	Continental				
Hardware Version:	P2.0				
Software Version:	MODEMSA515M_L	.E2.1_(	01.18.52.02		
Power Supply:	DC 14V	DC 14V			
IMEI:	354763190000401				
Antenna Type:	⊠External, □Integ	grated			
	NR Band n77: -0.84dBi (Ant2)				
Antenna Gain:	Note: The antenna gain are derived from the gain information report provided by the manufacturer.				
DE Cable*	0.8dB (Below 1GHz)		1.0dB (1.0~2.4GHz)	1.2dB (2.4~3.4GHz)	
RF Cable*:	1.5dB (Above 3.4GHz)				
Remark: As above information is provided and confirmed by the applicant. SGS is not liable to the accuracy, suitability, reliability or/and integrity of the information.					

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-This document is issued by the Company subject to its General Conditions of Service printed overlear, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions-ferms-and-Conditions-and-Conditions-and-Conditions-and-Conditions-and-Conditions-Erms-and-Conditions-and-Conditions-Erms-and-Condition

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services (Suzhou) Co. Ltd. Wireless Laboratory



Report No.: SUCR240600020702

Rev.: 01 8 of 31 Page:

### 2.5 Test Mode

Test Mode	Test Modes Description		
NR/TM1	NR system, DFT-s-Pi/2-BPSK modulation		
NR/TM2	NR system, DFT-s-QPSK modulation		
NR/TM3	NR system, DFT-s-16QAM modulation		
NR/TM4	NR system, DFT-s-64QAM modulation		
NR/TM5	NR system, DFT-s-256QAM modulation		
NR/TM6	NR system, CP-QPSK modulation		
NR/TM7	NR system, CP-16QAM modulation		
NR/TM8	NR system, CP-64QAM modulation		
NR/TM9 NR system, CP-256QAM modulation			
Remark: The test mode(s) are selected according to relevant radio technology specifications.			

### 2.6 Test Environment

Environment Parameter		101.0 kPa Selected Values During Tests		
Relative Humidity		44-46 % RH Ambient		
Value		Temperature(°C)	Voltage(V)	
NTNV		22~23	4.0	
LTLV		-30	3.8	
LTHV		-30	4.2	
HTLV		50	3.8	
HTHV		50	4.2	
Remark:				
NV: Normal Voltage LV: Low		Extreme Test Voltage	HV: High Extreme Test Voltage	
NT: Normal Temperature LT: Low		Extreme Test Temperature	HT: High Extreme Test Temperature	

# 2.7 Description of Support Units

The EUT has been tested as an independent unit.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-This document is issued by the Company subject to its General Conditions of Service printed overlear, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions-ferms-and-Conditions-and-Conditions-and-Conditions-and-Conditions-and-Conditions-Erms-and-Conditions-and-Conditions-Erms-and-Condition

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services (Suzhou) Co. Ltd. Wireless Laboratory



SUCR240600020702 Report No.:

Rev.: 01 9 of 31 Page:

## 2.8 Technical Specification

Characteristics	Description						
Radio System Type	⊠ SA ⊠ NSA						
	Band	TX		RX			
Supported Frequency	NR Band n77	3700 to 3980	MHz	3700 to 3980 MHz			
Range	ENDC: DC_2A_n77A; DC_	ENDC: DC_2A_n77A; DC_5A_n77A; DC_7A_n77A; DC_41A_n77A					
Company and a di Changana		SCS 30kHz					
Supported Channel Bandwidth	NR Band n77 (3700~3980)	⊠20 MHz	⊠30 MHz	⊠40 MHz	⊠50 MHz		
<b></b>		⊠60 MHz	⊠80 MHz	⊠90 MHz	⊠100 MHz		
Designation of	NR Band n77 (3700~3980)	SCS 30kHz:					
Emissions (Remark: the necessary		17M8G7D	18M3W7D				
		26M8G7D	27M9W7D				
bandwidth of which is		35M8G7D	37M8W7D				
the worst value from the measured occupied		45M7G7D	47M5W7D				
bandwidths for each type of channel bandwidth configuration.)	(	57M9G7D	57M8W7D				
		77M1G7D	77M7W7D				
		85M7G7D	87M3W7D				
		96M4G7D	97M6W7D				

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-This document is issued by the Company subject to its General Conditions of Service printed overlear, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions-ferms-and-Conditions-and-Conditions-and-Conditions-and-Conditions-and-Conditions-Erms-and-Conditions-and-Conditions-Erms-and-Condition

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services (Suzhou) Co. Ltd. Wireless Laboratory



SUCR240600020702 Report No.:

Rev.: 01

10 of 31 Page:

## 2.9 Test Frequencies

### Reference test frequencies for NR operating band n77

## 2.9.1.1 Test frequencies for NR operating band n77 and SCS 30 kHz

#### 3700-3980:

CBW [MHz]	Range		Carrier centre [MHz]	Carrier centre [ARFCN]	SS block SCS [kHz]
	Downlink	Low	3710.01	647334	
20	&	Mid	3840	656000	30
	Uplink	High	3969.99	664666	
	Downlink	Low	3714.99	647666	
30	&	Mid	3840	656000	30
	Uplink	High	3965.01	664334	
	Downlink	Low	3720	648000	
40	&	Mid	3840	656000	30
	Uplink	High	3960	664000	
	Downlink	Low	3725.01	648334	
50	&	Mid	3840	656000	30
	Uplink	High	3954.99	663666	
	Downlink	Low	3730.02	648668	
60	&	Mid	3840	656000	30
	Uplink	High	3949.98	663332	
	Downlink	Low	3740.01	649334	
80	&	Mid	3840	656000	30
	Uplink	High	3939.99	662666	
	Downlink	Low	3745.02	649668	
90	&	Mid	3840	656000	30
	Uplink	High	3934.98	662332	
	Downlink	Low	3750	650000	
100	&	Mid	3840	656000	30
	Uplink	High	3930	662000	

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-This document is issued by the Company subject to its General Conditions of Service printed overlear, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions-ferms-and-Conditions-and-Conditions-and-Conditions-and-Conditions-and-Conditions-Erms-and-Conditions-and-Conditions-Erms-and-Condition

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services (Suzhou) Co. Ltd. Wireless Laboratory



Report No.: SUCR240600020702

Rev.: Λ1

11 of 31 Page:

#### **Description of Tests** 3

## 3.1 Conducted Output Power

Measurement Procedure: FCC KDB 971168 D01 V03r01 Section 5.2.1

The transmitter output was connected to a calibrated coaxial cable, attenuator and power meter, the other end of which was connected to a Base Station Simulator. The Base Station Simulator was set to force the EUT to its maximum power setting. The power output at the transmitter antenna port was determined by adding the value of the cable insertion loss to the power reading. The tests were performed at three frequencies (low channel, middle channel and high channel) and on the highest power levels, which can be setup on the transmitters.

Remark: Reference test setup 1

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sqs.com/en/Terms-and-This document is issued by the Company subject to its General Conditions of Service printed overlear, available on request or accessible at <a href="http://www.sgs.com/en/lerms-and-Conditions-and-Condi

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services (Suzhou) Co. Ltd. Wireless Laborator



SUCR240600020702 Report No.:

Rev.: 01

12 of 31 Page:

## 3.2 Effective (Isotropic) Radiated Power of Transmitter

Measurement Procedure: FCC KDB 971168 D01 V03r01 Section 5.8.4

Calculate power in dBm by the following formula:

ERP (dBm) = Conducted Power (dBm) + antenna gain (dBd)

EIRP(dBm) = Conducted Power (dBm) + antenna gain (dBi)

EIRP=ERP+2.15dB

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sqs.com/en/Terms-and-This document is issued by the Company subject to its General Conditions of Service printed overlear, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions-ferms-and-Conditions-and-Conditions-and-Conditions-and-Conditions-and-Conditions-Erms-and-Conditions-and-Conditions-Erms-and-Condition

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services (Suzhou) Co. Ltd. Wireless Laboratory



SUCR240600020702 Report No.:

Rev.: Λ1

13 of 31 Page:

## 3.3 Occupied Bandwidth

Measurement Procedure: FCC KDB 971168 D01 V03r01 Section 4.2 & 4.3

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured. The transmitter output was connected to a calibrated coaxial cable, attenuator and Spectrum analyser, the other end of which was connected to a Base Station Simulator. The Base Station Simulator was set to force the EUT to its maximum power setting. The tests were performed at three frequencies (low channel, middle channel and high channel). The span of the analyzer shall be set to capture all products of the modulation process, including the emission skirts. The resolution bandwidth shall be set to as close to 1 percent of the selected span as is possible without being below 1 percent. The video bandwidth shall be set to 3 times the resolution bandwidth. Video averaging is not permitted. Where practical, a sampling detector shall be used since a peak or, peak hold, may produce a wider bandwidth than actual. The trace data points are recovered and are directly summed in linear terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5 percent of the total is reached and that frequency recorded. The process is repeated for the highest frequency data points. This frequency is recorded. The span between the two recorded frequencies is the occupied bandwidth.

#### Remark: Reference test setup 1

#### Test Settings

- 1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99% occupied bandwidth and the 26dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
- 2. RBW = 1 5% of the expected OBW
- VBW ≥ 3 x RBW
- Detector = Peak
- Trace mode = max hold
- Sweep = auto couple
- 7. The trace was allowed to stabilize
- 8. If necessary, steps 2 7 were repeated after changing the RBW such that it would be within
  - 1 5% of the 99% occupied bandwidth observed in Step 7

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-This document is issued by the Company subject to its General Conditions of Service printed overlear, available on request or accessible at <a href="http://www.sgs.com/en/lerms-and-Conditions.aspx">http://www.sgs.com/en/lerms-and-Conditions.aspx</a> and Conditions. Aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/lerms-and-Conditions-and-Conditions-and-Conditions-and-Conditions-and-Conditions-and-Conditions-and-Conditions-and-Conditions-and-Conditions-and-Conditions-encounted-Conditions-and-Conditions-encounted-Conditions-and-Conditions-and-Conditions-and-Conditions-encounted-Conditions-and-Conditions-encounte

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services (Suzhou) Co. Ltd.



SUCR240600020702 Report No.:

Rev.:

14 of 31 Page:

## 3.4 Band Edge at Antenna Terminals

Measurement Procedure: FCC KDB 971168 D01 V03r01 Section 6.0

The transmitter output was connected to a calibrated coaxial cable, attenuator and Spectrum analyser, the other end of which was connected to a Base Station Simulator. The Base Station Simulator was set to force the EUT to its maximum power setting. The tests were performed at two frequencies (low channel and high channel).in the 1MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of 100kHz or 1% of the emission bandwidth of the fundamental emission of the transmitter may be employed. The EUT emission bandwidth is measured as the width of the signal between two points, outside of which all emission are attenuated at least 26dB below the transmitter power. The video bandwidth of the spectrum analyzer was set at thrice the resolution bandwidth. Detector Mode was set to peak or peak hold power.

#### Remark: Reference test setup 1

#### Test Settings

- 1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
- 2. Span was set large enough so as to capture all out of band emissions near the band edge
- 3. RBW > 1% of the emission bandwidth
- VBW ≥ 3 x RBW
- Detector = RMS
- Number of sweep points ≥ 2 x Span/RBW
- Trace mode = trace average for continuous emissions, max hold for pulse emissions
- 8. Sweep time = auto couple
- The trace was allowed to stabilize

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-This document is issued by the Company subject to its General Conditions of Service printed overlear, available on request or accessible at <a href="http://www.sgs.com/en/lerms-and-Conditions.aspx">http://www.sgs.com/en/lerms-and-Conditions.aspx</a> and Conditions. Aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/lerms-and-Conditions-and-Conditions-and-Conditions-and-Conditions-and-Conditions-and-Conditions-and-Conditions-and-Conditions-and-Conditions-and-Conditions-encounted-Conditions-and-Conditions-encounted-Conditions-and-Conditions-and-Conditions-and-Conditions-encounted-Conditions-and-Conditions-encounte

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services (Suzhou) Co. Ltd.



SUCR240600020702 Report No.:

Rev.: Λ1 15 of 31 Page:

## 3.5 Spurious And Harmonic Emissions at Antenna Terminal

Measurement Procedure: FCC KDB 971168 D01 V03r01 Section 6.0

The transmitter output was connected to a calibrated coaxial cable, attenuator and Spectrum analyzer, the other end of which was connected to a Base Station Simulator. The Base Station Simulator was set to force the EUT to its maximum power setting. The tests were performed at three frequencies (low channel and high channel). The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. On any frequency outside a licensee's frequency block, the power of any emission shall be attenuated below the transmitter power (P) by at least 43 + 10 log(P) dB. Compliance with these provisions is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.

Remark: Reference test setup 1

#### **Test Settings**

- 1. Start frequency was set to 9kHz and stop frequency was set to at least 10\* the fundamental frequency(Separated into at least two plots per channel)
- 2. Detector = RMS
- 3. Trace mode = trace average for continuous emissinos, max hold for pulse emissions
- 4. Sweep time = auto couple
- 5. The trace was allowed to stabilize
- 6. Please see test notes below for RBW and VBW settings

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-This document is issued by the Company subject to its General Conditions of Service printed overlear, available on request or accessible at <a href="http://www.sgs.com/en/lerms-and-Conditions.aspx">http://www.sgs.com/en/lerms-and-Conditions.aspx</a> and Conditions. Aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/lerms-and-Conditions-and-Conditions-and-Conditions-and-Conditions-and-Conditions-and-Conditions-and-Conditions-and-Conditions-and-Conditions-and-Conditions-encounted-Conditions-and-Conditions-encounted-Conditions-and-Conditions-and-Conditions-and-Conditions-encounted-Conditions-and-Conditions-encounte

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com



SUCR240600020702 Report No.:

Rev.: Λ1

16 of 31 Page:

## 3.6 Peak-Average Ratio

Measurement Procedure: FCC KDB 971168 D01 V03r01 Section 5.7.2

A peak to average ratio measurement is performed at the conducted port of the EUT. For WCDMA signals, the spectrum analyzers Complementary Cumulative Distribution Function (CCDF) measurement profile is used to determine the largest deviation between the average and the peak power of the EUT in a given bandwidth. The CCDF curve shows how much time the peak waveform spends at or above a given average power level. The percent of time the signal spends at or above the level defines the probability for that particular power level. For GSM signals, an average and a peak trace are used on a spectrum analyzer to determine the largest deviation between the average and the peak power of the EUT in a bandwidth greater than the emission bandwidth. The traces are generated with the spectrum analyzer set to zero span mode.

#### Remark: Reference test setup 1

#### Test Settings

- The signal analyzer's CCDF measurement profile is enabled
- Frequency = carrier center frequency
- Measurement BW > Emission bandwidth of signal
- The signal analyzer was set to collect one million samples to generate the CCDF curve
- The measurement interval was set depending on the type of signal analyzed. For continuous signals (>98% duty cycle), the measurement interval was set to 1ms. For burst transmissions, the spectrum analyzer is set to use an internal "RF Burst" trigger that is synced with an incoming pulse and the measurement interval is set to less than the duration of the "on time" of one burst to ensure that energy is only captured during a time in which the transmitter is operating at maximum power

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-This document is issued by the Company subject to its General Conditions of Service printed overlear, available on request or accessible at <a href="http://www.sgs.com/en/lerms-and-Conditions.aspx">http://www.sgs.com/en/lerms-and-Conditions.aspx</a> and Conditions. Aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/lerms-and-Conditions-and-Conditions-and-Conditions-and-Conditions-and-Conditions-and-Conditions-and-Conditions-and-Conditions-and-Conditions-and-Conditions-encounted-Conditions-and-Conditions-encounted-Conditions-and-Conditions-and-Conditions-and-Conditions-encounted-Conditions-and-Conditions-encounte

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services (Suzhou) Co. Ltd.



SUCR240600020702 Report No.:

Rev.: Λ1

17 of 31 Page:

## 3.7 Field Strength of Spurious Radiation

Measurement Procedure: FCC KDB 971168 D01 V03r01 Section 5.8

#### Below 1GHz test procedure as below:

- 1). The EUT was powered ON and placed on a 80cm high table in the chamber. The antenna of the transmitter was extended to its maximum length.
- 2). The disturbance of the transmitter was maximized on the test receiver display by raising and lowering from 1m to 4m (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) the receive antenna and by rotating through 360° the turntable. After the fundamental emission was maximized, a field strength measurement was made.
- 3). Steps 1) and 2) were performed with the EUT and the receive antenna in both vertical and horizontal polarization.
- 4). Test the EUT in the lowest channel, the middle channel, the Highest channel.
- 5). The radiation measurements are performed in X, Y, Z axis positioning. And found the X axis positioning which it is worse case, Only the test worst case mode is recorded in the report.
- 6). Repeat above procedures until all frequencies measured was complete.

E (dBμV/m) = Measured amplitude level (dBμV) + (Cable Loss (dB) + Antenna Factor (dB/m) – AMP(dB)) EIRP (dBm) = E (dBμV/m) + 20 log D - 104.8; where D is the measurement distance in meters

#### Above 1GHz test procedure as below:

- 1) Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber
- Calculate power in dBm by the following formula:

E (dBμV/m) = Measured amplitude level (dBμV) + (Cable Loss (dB) + Antenna Factor (dB/m) – AMP(dB)) EIRP (dBm) = E (dB $\mu$ V/m) + 20 log D - 104.8; where D is the measurement distance in meters

- 3). Test the EUT in the lowest channel, the middle channel the Highest channel
- 4). The radiation measurements are performed in X, Y, Z axis positioning. And found the X axis positioning which it is worse case, Only the test worst case mode is recorded in the report.
- 5). Repeat above procedures until all frequencies measured was complete

Remark1: Reference test setup 2

Remark2: The emission below 18G were measured at a 3m test distance, while emissions above 18GHz were measured at a 1m test distance. At a measurement distance of 1 meter the limit line was increased by 20\*LOG(3/1) = 9.54 dB.

#### Remark: Reference test setup 2

#### Remark:

1) The field strength is calculated by adding the Antenna Factor, Cable Factor & AMP. The basic equation with a sample calculation is as follows:

AF = Antenna Factor(dB/m)

Factor = Cable Factor(dB) - Preamplifier (dB)

Level = Reading Level + AF + Factor -95.26

Margin = Limit – Level

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-This document is issued by the Company subject to its General Conditions of Service printed overlear, available on request or accessible at <a href="http://www.sgs.com/en/lerms-and-Conditions-and-Condi

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.



Report No.: SUCR240600020702

Rev.: 01

18 of 31 Page:

2) Scan from 9kHz to 40GHz, The disturbance between 9KHz to 30MHz and 18GHz to 40GHz was very low, and the harmonics were the highest point could be found when testing, so only the harmonics had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.

3) All modes have been tested, but only the worst case data displayed in this report.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sqs.com/en/Terms-and-This document is issued by the Company subject to its General Conditions of Service printed overlear, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions-ferms-and-Conditions-and-Conditions-and-Conditions-and-Conditions-and-Conditions-Erms-and-Conditions-and-Conditions-Erms-and-Condition

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services (Suzhou) Co. Ltd. Wireless Laboratory



SUCR240600020702 Report No.:

Rev.: Λ1

19 of 31 Page:

## 3.8 Frequency Stability / Temperature Variation

Measurement Procedure:

Frequency stability testing is performed in accordance with the guidelines of FCC KDB 971168 D01 V03r01 Section 9

The frequency stability of the transmitter is measured by:

- a.) Temperature: The temperature is varied from -30°C to +50°C in 10°C increments using an environmental chamber.
- b.) Primary Supply Voltage: The primary supply voltage is varied from 85% to 115% of the nominal value for non hand-carried battery and AC powered equipment. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.

Specification – The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within ±0.00025% (±2.5 ppm) of the center frequency.

#### Time Period and Procedure:

- 1. The carrier frequency of the transmitter is measured at room temperature (20°C to provide a reference).
- 2. The equipment is turned on in a "standby" condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
- 3. Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

Remark: Reference test setup 3

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-This document is issued by the Company subject to its General Conditions of Service printed overlear, available on request or accessible at <a href="http://www.sgs.com/en/lerms-and-Conditions.aspx">http://www.sgs.com/en/lerms-and-Conditions.aspx</a> and Conditions. Aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/lerms-and-Conditions-and-Conditions-and-Conditions-and-Conditions-and-Conditions-and-Conditions-and-Conditions-and-Conditions-and-Conditions-and-Conditions-encounted-Conditions-and-Conditions-encounted-Conditions-and-Conditions-and-Conditions-and-Conditions-encounted-Conditions-and-Conditions-encounte

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.




Report No.: SUCR240600020702

Rev.:


20 of 31 Page:

## 3.9 Test Setups

#### 3.9.1 **Test Setup 1**

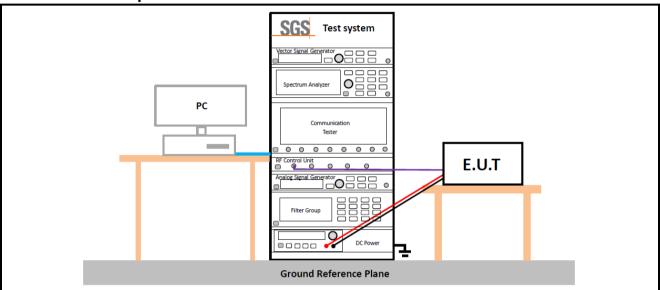

#### 3.9.2 **Test Setup 2**

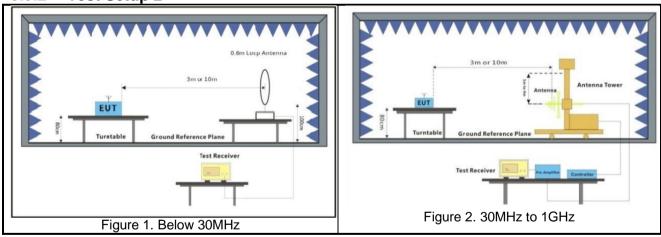

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sqs.com/en/Terms-and-This document is issued by the Company subject to its General Conditions of Service printed overlear, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions-ferms-and-Conditions-and-Conditions-and-Conditions-and-Conditions-and-Conditions-Erms-and-Conditions-and-Conditions-Erms-and-Condition

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services (Suzhou) Co. Ltd.



Report No.: SUCR240600020702

Rev.: 01

21 of 31 Page:

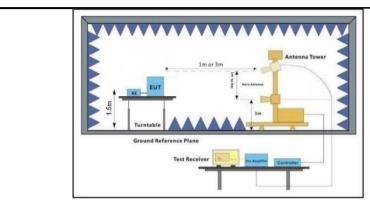


Figure 3. above 1GHz

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-This document is issued by the Company subject to its General Conditions of Service printed overlear, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions-ferms-and-Conditions-and-Conditions-and-Conditions-and-Conditions-and-Conditions-Erms-and-Conditions-and-Conditions-Erms-and-Condition

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services (Suzhou) Co. Ltd. Wireless Laboratory




SUCR240600020702 Report No.:

Rev.: 01

22 of 31 Page:

#### **Test Setup 3** 3.9.3

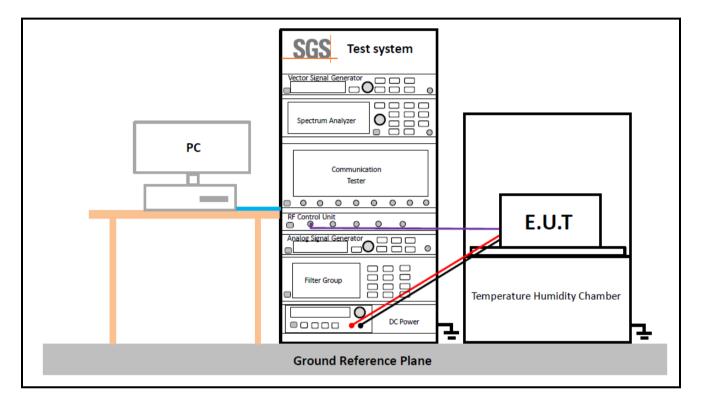

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sqs.com/en/Terms-and-This document is issued by the Company subject to its General Conditions of Service printed overlear, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions-ferms-and-Conditions-and-Conditions-and-Conditions-and-Conditions-and-Conditions-Erms-and-Conditions-and-Conditions-Erms-and-Condition

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services (Suzhou) Co. Ltd. Wireless Laboratory



SUCR240600020702 Report No.:

Rev.: 01

23 of 31 Page:

#### 3.10 Test Conditions

Transmit Output Power Data - Average Power, Total				
Test Case	Test Conditions			
Test Environment	Ambient Climate & Rated Voltage			
Test Setup	Test Setup 1			
RF Channels (TX)	L, M, H (L= low channel, M= middle channel, H= high channel)			
Test Mode	NR/TM1; NR/TM2; NR/TM3; NR/TM4; NR/TM5			
	Peak-to-Average Ratio			
Test Case	Test Conditions			
Test Environment	Ambient Climate & Rated Voltage			
Test Setup	Test Setup 1			
RF Channels (TX)	L, M, H (L= low channel, M= middle channel, H= high channel)			
Test Mode	NR/TM5; NR/TM9			
	Bandwidth - Occupied Bandwidth			
Test Case	Test Conditions			
Test Environment	Ambient Climate & Rated Voltage			
Test Setup	Test Setup 1			
RF Channels (TX)	L, M, H (L= low channel, M= middle channel, H= high channel)			
Test Mode	NR/TM1; NR/TM2; NR/TM3; NR/TM4; NR/TM5; NR/TM6; NR/TM7; NR/TM8; NR/TM9			
T GOT INIGGO				
	Bandwidth - Emission Bandwidth			
Test Case	Test Conditions			
Test Environment	Ambient Climate & Rated Voltage			
Test Setup	Test Setup 1			
RF Channels (TX)	L, M, H (L= low channel, M= middle channel, H= high channel)			
Test Mode	NR/TM1; NR/TM2; NR/TM3; NR/TM4; NR/TM5; NR/TM6; NR/TM7; NR/TM8; NR/TM9			
	Band Edges Compliance			
Test Case	Test Conditions			

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-This document is issued by the Company subject to its General Conditions of Service printed overlear, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions-ferms-and-Conditions-and-Conditions-and-Conditions-and-Conditions-and-Conditions-Erms-and-Conditions-and-Conditions-Erms-and-Condition

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services (Suzhou) Co. Ltd. Wireless Laboratory



Report No.: SUCR240600020702

**Rev.:** 01

Page: 24 of 31

Test Environment	Ambient Climate & Rated Voltage				
Test Setup	Test Setup 1				
RF Channels (TX)	L, H (L= low channel, H= high channel)				
Test Mode	NR/TM1; NR/TM6				
	Spurious Emission at Antenna Terminals				
Test Case	Test Conditions				
Test Environment	Ambient Climate & Rated Voltage				
Test Setup	Test Setup 1				
RF Channels (TX)	L, M, H (L= low channel, M= middle channel, H= high channel)				
Test Mode	NR/TM1				
	Field Strength of Spurious Radiation				
Test Case	Test Conditions				
Test Environment	Ambient Climate & Rated Voltage				
Test Setup	Test Setup 2				
RF Channels (TX)	L, M, H (L= low channel, M= middle channel, H= high channel)				
Test Mode	NR/TM1 Remark: All bandwidth and modulation of NR have been pre tested, and only the worst results are reflected in the report.				
	Frequency Stability				
Test Case	Test Conditions				
Test Environment	(1) -30 °C to +50 °C with step 10 °C at Rated Voltage				
rest Environment	(2) VL, VN and VH of Rated Voltage at Ambient Climate.				
Test Setup	Test Setup 3				
RF Channels (TX)	M (M= middle channel)				
Test Mode	NR/TM1				
I GOLIVIOUG	The report only show the bandwidth with the worst case.				

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx">http://www.sgs.com/en/Terms-and-Conditions.aspx</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx">http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.
Wireless Laboratory

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 t (86-512) 62992980

www.sgsgroup.com.c



SUCR240600020702 Report No.:

Rev.: 01 25 of 31 Page:

# **Main Test Instruments**

RF conducted test For report SEWA2211000082RG02						
Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. date (yyyy/mm/dd)	Cal.Due date (yyyy/mm/dd)	
Shielding Room	Brilliant-emc	N/A	SUWI-04-01-06	2021/05/08	2024/05/07	
Temperature and	MingGao	TH101B	SUWI-01-01-07	2022/02/16	2023/02/15	
humidity meter	WilligGao	1111016	30001-01-01	2023/02/06	2024/02/05	
Signal Analyzer	ROHDE&SCHWARZ	FSV3030	SUWI-01-02-02	2022/05/17	2023/05/16	
Signal Analyzei	ROI IDE&SCI IWARZ	F3 V3030	3011-01-02-02	2023/05/11	2024/05/10	
Measurement Software	Tonscend	JS1120-3 Test System V 2.6.88.0336	SUWI-02-09-09	NCR	NCR	
Radio Communication Analyzer	Anritsu	MT8821C	SUWI-01-26-03	2022/11/23	2023/11/22	
Wideband Radio	ROHDE&SCHWARZ	CMW500	SUWI-01-16-05	2022/02/14	2023/02/13	
Communication Tester				2023/02/06	2024/02/05	
DC Power Supply	HYELEC	HY3005B	SUWI-01-18-01	2022/02/15	2023/02/14	
DC Power Supply	HTELEC			2023/02/06	2024/02/05	
Temperature Chamber	ESPEC	SU-242	SUWI-01-13-01	2022/02/15	2023/02/14	
Temperature Chamber	ESPEC	30-242	30001-01-13-01	2023/02/06	2024/02/05	
Wideband Radio Communication Test Ststion	Anritsu	MT8000A	SUWI-01-34-02	2022/09/16	2023/09/15	
Signal Applyzor	DOLIDE & COLIMA D.Z	FOM/40	SUWI-01-02-04	2022/05/28	2023/05/27	
Signal Analyzer	ROHDE&SCHWARZ	FSW43	30001-01-02-04	2023/05/11	2024/05/10	

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx">http://www.sgs.com/en/Terms-and-Conditions

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: <a href="mailto:CN.Doccheck@sgs.com">CN.Doccheck@sgs.com</a>

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd. Wireless Laborator

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 t (86-512) 62992980

www.sgsgroup.com.cn



SUCR240600020702 Report No.:

Rev.: 01

26 of 31 Page:

RSE Test System For report SEWA2211000082RG02					
Equipment	Manufacturer	Model No.	Inventory No.	Cal Date (yyyy/mm/dd)	Cal Due Date (yyyy/mm/dd)
Semi-Anechoic Chamber	Brilliant-emc	N/A	SUWI-04-02-01	2021/05/08	2024/05/07
Temperature	MinaCoo	TU404B	SUWI-01-01-05	2022/02/16	2023/02/15
and humidity meter	MingGao	TH101B	3077-01-01	2023/02/07	2024/02/06
Cianal Analyzar	DOUDE & COUMADA	FSW43	SUWI-01-02-04	2022/05/28	2023/05/27
Signal Analyzer	ROHDE&SCHWARZ	F5VV43	30771-01-02-04	2023/05/11	2024/05/10
Signal Analyzer	KEYSIGHT	N9020A	SUWI-01-02-05	2022/11/23	2023/11/22
Test receiver	ROHDE&SCHWARZ	ESR7	SUWI-01-10-01	2022/02/19	2023/02/18
restreceivei	ROHDE&SCHWARZ	ESKI	30771-01-10-01	2023/02/08	2024/02/07
Receiving	SCHWRZBECK	\ \\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\	SUWI-01-11-01	2021/05/16	2023/05/15
antenna	MESS-ELEKTRONIK	VULB 9163	30001-01-11-01	2023/05/13	2024/05/12
Receiving	SCHWRZBECK MESS-ELEKTRONIK	BBHA 9120D	SUWI-01-11-02	2021/05/16	2023/05/15
antenna				2023/05/13	2024/05/12
Receiving	SCHWRZBECK	K BBHA 9170 SUWI-01-11-03	SUIWU 01 11 03	2021/05/14	2023/05/13
antenna	MESS-ELEKTRONIK		2023/05/12	2024/05/11	
Active Loop	SCHWRZBECK	FMZB 1519B	SUWI-01-21-01	2021/06/10	2023/06/09
Antenna	MESS-ELEKTRONIK	FINIZE 1319B		2023/05/13	2024/05/12
Amplifion	Tonscend	TAP9K3G40	SUWI-01-14-01	2022/02/14	2023/02/13
Amplifier	Tonscend	TAP9K3G40	30771-01-14-01	2023/02/06	2024/02/05
Amplifier	Tonscend	TAP01018050	SUWI-01-14-02	2022/02/14	2023/02/13
Ampliner	Tonscena	14401010000	30771-01-14-02	2023/02/06	2024/02/05
Amplifion	Tonscend	TAP18040048	SUWI-01-14-03	2022/02/19	2023/02/18
Amplifier				2023/02/08	2024/02/07
Wideband				2022/02/14	2023/02/13
Radio Communication Tester	Anritsu	MT8820C	SUWI-01-16-08	2023/02/06	2024/02/05
Wideband Radio Communication	Anritsu	MT8821C	SUWI-01-26-03	2022/11/23	2023/11/22

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx">http://www.sgs.com/en/Terms-and-Conditions.aspx</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-an

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services (Suzhou) Co. Ltd. Wireless Laboratory



Report No.: SUCR240600020702

Rev.: 01

27 of 31 Page:

RSE Test System For report SEWA2211000082RG02						
Equipment	Manufacturer	Model No.	Inventory No.	Cal Date (yyyy/mm/dd)	Cal Due Date (yyyy/mm/dd)	
Tester						
UXM 5G	KEVOLOLIT	F7545D	01 11411 04 04 04	2022/02/20	2023/02/19	
Wireless Test Platform	KEYSIGHT	E7515B	SUWI-01-04-01	2023/02/06	2024/02/05	
Measurement Software	Tonscend	JS32-RE 4.0.0.0	SUWI-02-09-04	NCR	NCR	

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-This document is issued by the Company subject to its General Conditions of Service printed overlear, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions-ferms-and-Conditions-and-Conditions-and-Conditions-and-Conditions-and-Conditions-Erms-and-Conditions-and-Conditions-Erms-and-Condition

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services (Suzhou) Co. Ltd. Wireless Laboratory



Report No.: SUCR240600020702

Rev.: 01

28 of 31 Page:

RF Test Equipment For report SUCR240600020702					
Equipment	Manufacturer	Model No.	Inventory No.	Cal Date (yyyy/mm/dd)	Cal Due Date (yyyy/mm/dd)
Shielding Room	Brilliant-emc	N/A	SUWI-04-01-06	2022/11/09	2025/11/08
Temperature and humidity meter	MingGao	TH101B	SUWI-01-01-07	2024/02/18	2025/02/17
Signal Analyzer	ROHDE&SCHWARZ	FSV3030	SUWI-01-02-02	2024/05/08	2025/05/07
Measurement Software	TST	TST-271-2.0	SUWI-03-55-01	NCR	NCR
Measurement Software	Tonscend	JS1120-3 Test System V 2.6.88.0336	SUWI-02-09-09	NCR	NCR
Wideband Radio Communication Test Ststion	Anritsu	MT8000A	SUWI-01-34-02	2023/11/21	2024/11/20
Signal Analyzer	ROHDE&SCHWARZ	FSW43	SUWI-01-02-04	2024/05/08	2025/05/07
Programmable Temperature & Humidity Chamber	GiantForce	LCD-9531	SUWI-03-55-01	2024/05/09	2025/05/08

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-This document is issued by the Company subject to its General Conditions of Service printed overlear, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions-ferms-and-Conditions-and-Conditions-and-Conditions-and-Conditions-and-Conditions-Erms-and-Conditions-and-Conditions-Erms-and-Condition

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services (Suzhou) Co. Ltd. Wireless Laboratory



SUCR240600020702 Report No.:

Rev.: 01

29 of 31 Page:

RSE Test System For report SUCR240600020702					
Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. date (yyyy/mm/dd)	Cal.Due date (yyyy/mm/dd)
Semi-Anechoic Chamber	Brilliant-emc	N/A	SUWI-04-02-02	2023/04/03	2026/03/03
Temperature and humidity meter	MingGao	TH101B	SUWI-01-01-13	2024/02/08	2025/02/07
Signal Analyzer	ROHDE&SCHWARZ	FSW43	SUWI-01-02-04	2024/05/08	2025/05/07
Signal Analyzer	KEYSIGHT	N9020A	SUWI-01-02-06	2023/11/21	2024/11/20
Test receiver	ROHDE&SCHWARZ	ESR7	SUWI-01-10-01	2024/02/01	2025/01/31
Receiving antenna	SCHWRZBECK MESS- ELEKTRONIK	VULB 9168	SUWI-01-11-04	2023/11/25	2024/11/24
Receiving antenna	SCHWRZBECK MESS- ELEKTRONIK	BBHA 9120D	SUWI-01-11-05	2023/11/25	2024/11/24
Receiving antenna	SCHWRZBECK MESS- ELEKTRONIK	BBHA 9170	SUWI-01-11-03	2023/05/12	2025/05/11
Active Loop Antenna	SCHWRZBECK MESS- ELEKTRONIK	FMZB 1519B	SUWI-01-21-01	2023/05/13	2025/05/12
Amplifier	Tonscend	TAP9K3G32	SUWI-01-14-06	2023/11/21	2024/11/20
Amplifier	Tonscend	TAP01018050	SUWI-01-14-04	2023/11/21	2024/11/20
Amplifier	Tonscend	TAP30M7G30	SUWI-01-14-05	2023/11/21	2024/11/20
Radio Communication Analyzer	StarPoint	SP9500E	SUWI-01-28-02	2023/11/21	2024/11/20
Measurement Software	Tonscend	JS32-RE V4.0.0.0	SUWI-02-09-04	NCR	NCR
Measurement Software	Tonscend	JS32-RE V4.0.0.1	SUWI-02-09-06	NCR	NCR
DC Power Supply	ROHDE&SCHWARZ	HMC8042	SUWI-01-18-03	2024/02/04	2025/02/03

Remark: NCR=No Calibration Requirement.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-This document is issued by the Company subject to its General Conditions of Service printed overlear, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions-ferms-and-Conditions-and-Conditions-and-Conditions-and-Conditions-and-Conditions-Erms-and-Conditions-and-Conditions-Erms-and-Condition

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services (Suzhou) Co. Ltd. Wireless Laboratory



Report No.: SUCR240600020702

Rev.: Λ1

30 of 31 Page:

#### 5 **Measurement Uncertainty**

For a 95% confidence level (k = 2), the measurement expanded uncertainties for defined systems, in accordance with the recommendations of ISO 17025 as following:

For report SEWA2211000082RG01				
No.	Item	Measurement Uncertainty		
1	Total RF power, conducted	±0.54dB		
2	RF power density, conducted	±1.03dB		
3	Spurious emissions, conducted	±0.54dB		
4	Radio Frequency	±1.0 %		
5	Duty Cycle	±0.37%		
6	Occupied Bandwidth	±1.0 %		
		± 3.13dB (9k -30MHz)		
7	Dedicted Engineer	± 4.8dB (30M -1GHz)		
	Radiated Emission	± 4.8dB (1GHz to 18GHz)		
		± 4.80dB (Above 18GHz)		

#### Remark:

The Ulab (lab Uncertainty) is less than Ucispr/ETSI (CISPR/ETSI Uncertainty), so the test results

- compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit;
- non-compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit.

For report SUCR240600020701					
No.	Item	Measurement Uncertainty			
1	Total RF power, conducted	±0.54dB			
		± 3.13dB (9k -30MHz)			
2	Radiated Emission	± 4.88dB (30M -1GHz)			
2		± 4.75dB (1GHz to 18GHz)			
		± 4.77dB (Above 18GHz)			

#### Remark:

The U<sub>lab</sub> (lab Uncertainty) is less than U<sub>cisp(FTSI</sub> (CISPR/ETSI Uncertainty), so the test results

- compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit;
- non-compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sqs.com/en/Terms-and-This document is issued by the Company subject to its General Conditions of Service printed overlear, available on request or accessible at <a href="http://www.sgs.com/en/lerms-and-Conditions.aspx">http://www.sgs.com/en/lerms-and-Conditions.aspx</a> and Conditions forms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/lerms-and-Conditions/ems-e-Document.aspx">http://www.sgs.com/en/lerms-and-Conditions/ems-e-Document.aspx</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services (Suzhou) Co. Ltd. Wireless Laboratory



SUCR240600020702 Report No.:

Rev.: 01

31 of 31 Page:

# **Appendixes**

Appendix A.2	WWAN Setup Photos
Appendix B.12	NR Band n77(3700-3980)

---End of Report---

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-This document is issued by the Company subject to its General Conditions of Service printed overlear, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions-ferms-and-Conditions-and-Conditions-and-Conditions-and-Conditions-and-Conditions-Erms-and-Conditions-and-Conditions-Erms-and-Condition

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services (Suzhou) Co. Ltd. Wireless Laboratory