

FCC Part 15B Compliance Test Report

Test Report no.:	FCC15B_RM-696_15.docx	Date of Report:	6-jul-2011
Number of pages:	11	Customer's Contact person:	Peltola Timo.Ta
Testing laboratory:	TCC Nokia Copenhagen Laboratory Frederikskaj 1790 COPENHAGEN V DENMARK Tel. +45 33 292929 Fax. +45 33 292934	Customer:	Nokia Corporation P.O. Box 300 Yrtyipellontie 6 FIN-90230 OULU, FINLAND Tel. +358 (0) 7180 08000 Fax. +358 (0) 7180 58300
FCC listing no.:	99059		
IC recognition no.:	661AL-1		
Tested devices/ accessories:	Phone RM-696 / Headset WH-901 / AC-Charger AC-16E		
FCC ID:	LJPK	IC:	-
Supplement reports:	-		
Testing has been carried out in accordance with:	CFR 47, FCC rules Part 15 Subpart B, ANSI C63.4 (2003), ICES-003, CISPR 22, RSS-132 (Issue 2, September 2005), RSS-133 (Issue 5, February 2009), RSS-139 (Issue 2, February 2009), RSS-210 (Issue 8, December 2010). Deviations, modifications or clarifications (if any) to above mentioned documents are written in each section under "Test method and limit".		
Documentation:	The test report must always be reproduced in full; reproduction of an excerpt only is subject to written approval of the testing laboratory. The documentation of the testing performed on the tested devices is archived for 15 years at TCC Nokia.		
Test Results:	The EUT complies with the requirements in respect of all parameters subject to the test. The test results relate only to devices specified in this document		
Date and signature for the contents:			
	Ruben Hansen, System Manager, EMC		

1. Summary for FCC Part 15B Compliance Test Report

Date of receipt	12-May-2011
Testing completed	30-May-2011
The customer's contact person	Peltola Timo.Ta
Test Plan referred to	T:\Projects\RM-696\TestPlan\RS_testplan_RM-696.xls
Notes	-
Document name	Projects\RM-696\EMC\FCC15B_RM-696_15.docx

1.1. EUT and Accessory Information

The EUT is a 9-band (GSM850/900/1800/1900) and WCDMA Band (I/II(1900)/IV(1700)/V(850)/VIII/) mobile phone with GPRS, EGPRS, HSDPA, HSUPA and WLAN and Bluetooth.

Product	Type	SN	HW	MV	SW	DUT
Phone	RM-696	004402135480766	1501	-	0.2011.21-5-TA-INT-TEST-BUILD_001	23608
Headset	WH-901	-	0.31MWO0.3 PV04	-	-	23602
AC-Charger	AC-16E	-	0.31MWO0.3 PV04	-	-	23600

1.2. Summary of Test Results

GSM850:

Section in CFR 47	Section in ICES-003 (RSS-132)	Name of the test	Result
15.107, a	5.3	AC powerline conducted emissions	NP
15.109, a	5.5 (4.6)	Radiated emissions	Passed

GSM1900:

Section in CFR 47	Section in ICES-003 (RSS-133)	Name of the test	Result
15.107, a	5.3	AC powerline conducted emissions	NP
15.109, a	5.5 (6.6)	Radiated emissions	Passed

WCDMA 1700 (Band IV):

Section in CFR 47	Section in ICES-003 (RSS-139)	Name of the test	Result
15.107, a	5.3	AC powerline conducted emissions	NP
15.109, a	5.5 (6.6)	Radiated emissions	Passed

PASSED
FAILED
NP

The EUT complies with the essential requirements in the standard.
The EUT does not comply with the essential requirements in the standard.
The test was not performed by the TCC Nokia Laboratory.

CONTENTS


1. Summary for FCC Part 15B Compliance Test Report	2
1.1. EUT and Accessory Information	2
1.2. Summary of Test Results	2
2. Radiated emissions	
(FCC §15.109, ICES-003 section 5.5, RSS-132 4.6, RSS-133 6.6, RSS-139 6.6)	4
2.2. Test method and limit	4
2.3. GSM850 Test results	6
2.4. GSM1900 Test results	7
2.5. WCDMA 1700 (Band IV) Test results	9
3. Test Equipment	10
3.1. Conducted measurements	10
3.2. Radiated measurements	10

2. Radiated emissions

(FCC §15.109, ICES-003 section 5.5, RSS-132 4.6, RSS-133 6.6, RSS-139 6.6)

EUT with DUT number	RM-696, DUT 23608
Accessories with DUT numbers	WH-901, DUT 23602 ; AC-16E, DUT 23600
Operation Voltage [V] / [Hz]	115 / 60
Results	Passed
Remarks	Tested with FM-Radio active.
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	21 / 45 / 100
Date of measurements	30-May-2011
Measured by	Bo Moltved Christiansen

2.1.1 Test Setup

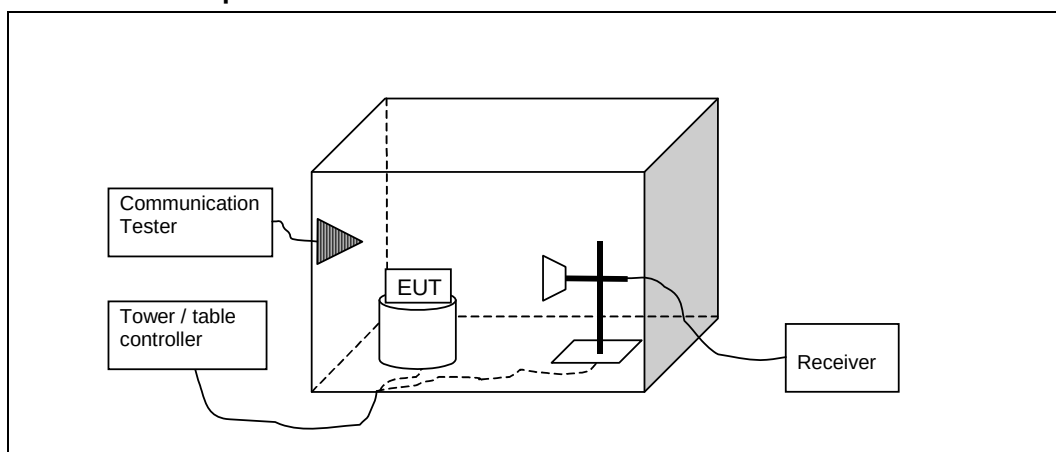

2.2. Test method and limit

The measurement is made according to ANSI C63.4-2003as follows:

The measurement is performed in the Semi-Anechoic Chamber with conducting metal floor.

The measurement distance is 3 m.

The EUT is placed on a nonconductive plate at 80 cm height.

For each suspected frequency, the turntable is rotated 360 degrees and antenna is scanned from 1 to 4 m. This is repeated for both horizontal and vertical receive antenna polarizations.

The emissions less than 20 dB below the permissible value are reported.

The measurement results are obtained as described below:

$$E [\mu V/m] = U_{RX} + A_{TOT}$$

Where U_{RX} is receiver reading and A_{TOT} is total correction factor including cable loss, antenna factor and preamplifier gain ($A_{TOT} = L_{CABLES} + A_F - G_{PREAMP}$).

CISPR 22 and FCC Part 15 Class B limits (3 m measurement distance)

Frequency range [MHz]	Quasi peak limit [dBμV/m]	Average limit [dBμV/m]	Peak limit [dBμV/m]
30 - 230	40	-	-
230 – 1000	47	-	-
Above 1000	-	54	74

2.3. GSM850 Test results

RX mode, channel 128 / 869.2 MHz

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
3475.2	36.37	65.811	39.3	-2.93	HORIZONTAL	Passed
6955.3	55.61	603.115	46.4	9.21	HORIZONTAL	Passed

Average (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
3475.2	23.79	15.463	26.72	-2.93	HORIZONTAL	Passed
6955.3	42.87	139.187	33.66	9.21	HORIZONTAL	Passed

RX mode, channel 190 / 881.6 MHz

Quasi peak (RBW: 120 kHz, VBW: 300 kHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
32.687	19.22	9.142	33.92	-14.7	VERTICAL	Passed
41.934	25.25	18.308	45.59	-20.34	VERTICAL	Passed
97.926	67.53	2379.03	90.82	-23.29	VERTICAL	Passed

*98.0 MHz frequency is FM-Radio signal and thus ignored.

RX mode, channel 190 / 881.6 MHz

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
7816.63	49.7	305.316	37.62	12.08	HORIZONTAL	Passed
7831.564	49.83	310.242	37.61	12.22	HORIZONTAL	Passed
7839.378	50.58	338.065	38.41	12.17	VERTICAL	Passed
7851.001	50.14	321.514	38.01	12.13	VERTICAL	Passed

Average (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
7816.63	36.59	67.499	24.51	12.08	HORIZONTAL	Passed
7831.564	36.79	69.064	24.57	12.22	HORIZONTAL	Passed
7839.378	36.73	68.612	24.56	12.17	VERTICAL	Passed
7851.001	36.6	67.616	24.47	12.13	VERTICAL	Passed

RX mode, channel 251 / 893.8 MHz

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
3574	36.88	69.831	39.05	-2.17	VERTICAL	Passed
7150.9	48.37	262.029	37.75	10.62	HORIZONTAL	Passed

Average(RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
3574	23.7	15.314	25.87	-2.17	VERTICAL	Passed
7150.9	35.48	59.457	24.86	10.62	HORIZONTAL	Passed

2.4. GSM1900 Test results

RX mode, channel 512 / 1930.2 MHz

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
3861.8	38.49	84.062	39.42	-0.93	HORIZONTAL	Passed
7720.1	48.44	264.119	36.96	11.48	VERTICAL	Passed

Average(RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
3861.8	25.58	19.015	26.51	-0.93	HORIZONTAL	Passed
7720.1	35.61	60.318	24.13	11.48	VERTICAL	Passed

RX mode, channel 661 / 1960.0 MHz

Quasi peak (RBW: 120 kHz, VBW: 300 kHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
34.377	23.95	15.758	39.63	-15.68	VERTICAL	Passed
35.925	20.92	11.122	37.53	-16.61	VERTICAL	Passed
41.744	23.76	15.408	43.98	-20.22	VERTICAL	Passed
97.926	67.84	2467.175	91.13	-23.29	VERTICAL	Passed

*98.0 MHz frequency is FM-Radio signal and thus ignored

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
1960.019	64.51	1679.771	65.87	-1.36	HORIZONTAL	Passed
2895.492	48.36	261.698	42.05	6.31	HORIZONTAL	Passed

Average(RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
1960.019	63.75	1540.104	65.11	-1.36	HORIZONTAL	Passed
2895.492	35.68	60.835	29.37	6.31	HORIZONTAL	Passed

RX mode, channel 661 / 1960.0 MHz

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dB μ V/m]	E [μ V/m]	U _{RX} [dB μ V]	A _{TOT} [dB]	Polarisation	Result
7829.559	49.31	292.146	37.08	12.23	HORIZONTAL	Passed
7842.486	49.11	285.463	36.95	12.16	VERTICAL	Passed
7845.29	49.36	293.765	37.22	12.14	VERTICAL	Passed
7855.812	49.41	295.495	37.22	12.19	HORIZONTAL	Passed

Average (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dB μ V/m]	E [μ V/m]	U _{RX} [dB μ V]	A _{TOT} [dB]	Polarisation	Result
7829.559	36.61	67.717	24.38	12.23	HORIZONTAL	Passed
7842.486	36.58	67.476	24.42	12.16	VERTICAL	Passed
7845.29	36.59	67.492	24.45	12.14	VERTICAL	Passed
7855.812	36.56	67.313	24.37	12.19	HORIZONTAL	Passed

2.5. WCDMA 1700 (Band IV) Test results

RX mode, channel 1537 / 2112.4 MHz

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4224.2	39.13	90.438	39.62	-0.49	HORIZONTAL	PASSED
6336.1	49.11	285.496	43.29	5.82	HORIZONTAL	PASSED

Average(RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4224.2	26	19.948	26.49	-0.49	HORIZONTAL	PASSED
6336.1	36.58	67.484	30.76	5.82	HORIZONTAL	PASSED

RX mode, channel 1637 / 2132.4 MHz

Quasi peak (RBW: 120 kHz, VBW: 300 kHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
33.156	17.9	7.85	32.87	-14.97	VERTICAL	PASSED
43.067	12.14	4.046	33.19	-21.05	VERTICAL	PASSED

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
2133.364	48.35	261.397	48.49	-0.14	HORIZONTAL	PASSED

Average(RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
2133.364	33.36	46.58	33.5	-0.14	HORIZONTAL	PASSED

RX mode, channel 1738 / 2152.6 MHz

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4305.2	38.83	87.347	38.54	0.29	HORIZONTAL	PASSED
6458.1	51.57	378.922	45.05	6.52	HORIZONTAL	PASSED

Average(RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4305.2	25.65	19.158	25.36	0.29	HORIZONTAL	PASSED
6458.1	38.75	86.557	32.23	6.52	HORIZONTAL	PASSED

3. Test Equipment

3.1. Conducted measurements

Eq. No	Equipment	Type	Manufacturer	Used in
13037	Power Supply 0-15V 10A	EA3012	LP Instruments	15C, 15B
13357	Signal Generator	SMP02	Rohde&Schwarz	22/24/27, 15C, 15B
13513	Pulse Limiter	ESH3Z2	Rohde&Schwarz	15C, 15B
13666	Receiver	ESPC	Rohde&Schwarz	15C, 15B
13935	LISN	ESH3-Z5	Rohde&Schwarz	15C, 15B
20682	LISN	ESH3-Z5	Rohde&Schwarz	15C, 15B
16601	Communication Tester	CMU200	Rohde&Schwarz	22/24/27, 15C, 15B
16995	Directional Coupler 20dB 0,5-2,0 GHz SMA Conn.	1538RA-20	Weinschel	15C, 15B
18772	Shielded Chamber	RFD-100	ETS-Lindgren	15C, 15B
18772	Shielded Chamber	RFD-100	ETS-Lindgren	15C, 15B
19116	Power splitter	-	various	22/24/27, 15C, 15B
19171	Communication Tester	CMU200	Rohde&Schwarz	15C, 15B
19625	Climatic Chamber	VT4002EMC	Vötsch	22/24/27, 15C, 15B
19678	Spectrum Analyzer	FSP	Rohde&Schwarz	22/24/27, 15C, 15B
20168	Bluetooth Tester	CBT	Rohde&Schwarz	22/24/27, 15C, 15B
20543	UPS. 700V/A 490W	PW 9120 700i	Powerware	22/24/27, 15C, 15B
20544	Transformer. 230/115V	-	Nokia	22/24/27, 15C, 15B
20739	Communication Tester	CMU200	Rohde&Schwarz	15C, 15B

3.2. Radiated measurements

Eq. No	Equipment	Type	Manufacturer	Used in
13077	Power Supply	EA-3016	-	22/24/27, 15C, 15B
13799	Signal Generator	SMP02	Rohde&Schwarz	22/24/27, 15C, 15B
13936	Band reject filter	WRCD1747.5-0.2/40-10SS	Wainwright Instruments	22/24/27, 15C, 15B
13937	Band reject filter	WRCA902.4-0.2/40-6SS	Wainwright Instruments	22/24/27, 15C, 15B
14021	Relay Dual 6 Chnl μ Wave Mux	10-785-522	-	22/24/27, 15C, 15B
14114	Highpass Filter	WHK1000-12SS	Wainwright Instruments	22/24/27, 15C, 15B
14187	Band reject filter	WRCD1747.5-0.2/40-10SS	Wainwright	22/24/27, 15C, 15B
14188	Band reject filter	WRCA902.4-0.2/40-6SS	Wainwright	22/24/27, 15C, 15B
14900	Antenna Controller	HD100	HD GmbH	22/24/27, 15C, 15B
15191	Turntable Contoller Unit	G-800SDX	YAESU	22/24/27, 15C, 15B
15742	Programmable Relay Switching System	-----	Pickering	22/24/27, 15C, 15B
16633	Band reject filter	WRCD1880.0-0.2/40-10SS	Wainwright	22/24/27, 15C, 15B
16948	Dual 6 Channel MUX Microwave Relay SMA 50 Ohm	10-785-522	Pickering	22/24/27, 15C, 15B
16949	Dual 6 Channel MUX Microwave Relay SMA 50 Ohm	10-785-522	Pickering	22/24/27, 15C, 15B
17644	Dual 6 Channel MUX Microwave Relay SMA 50 Ohm	10-785-522	Pickering	22/24/27, 15C, 15B
18416	Communication Tester	CMU200	Rohde&Schwarz	22/24/27, 15C, 15B
18773	Anechoic chamber	RFD-100	ETS-Lindgren	22/24/27, 15C, 15B
18774	Anechoic chamber	RFSD-F/A-100	ETS-Lindgren	22/24/27, 15C, 15B

Eq. No	Equipment	Type	Manufacturer	Used in
18792	Mast/turntable controller	2090	ETS-EMCO	22/24/27, 15C, 15B
18860	Antenna	HL562	Rohde&Schwarz	22/24/27, 15C, 15B
19151	High Pass Filter	WHJS3000-10SS	Wainwright	22/24/27, 15C, 15B
19587	Band reject filter	WRCG2400/2483-2390/2493-35/10SS	Wainwright	22/24/27, 15C, 15B
19966	Antenna	HFH2-Z2	Rohde&Schwarz	15C, 15B
20078	Relay 2x6 Chnl μ Wave Mux	10-785B-522	Pickering	22/24/27, 15C, 15B
20114	Band reject filter	WRCG1737/1743-1733/1747-40/6SS	Wainwright	22/24/27, 15C, 15B
20115	Band reject filter	-	Wainwright	22/24/27, 15C, 15B
20116	Band reject filter	WRCG832/83/-825/845-40/5SS	Wainwright	22/24/27, 15C, 15B
20168	Bluetooth Tester	CBT	Rohde&Schwarz	22/24/27, 15C, 15B
20543	UPS. 700V/A 490W	PW 9120 700i	Powerware	22/24/27, 15C, 15B
20544	Transformer. 230/115V	-	Nokia	22/24/27, 15C, 15B
20698	Antenna	BBHA 9120 D	SCHWARZBECK	22/24/27, 15C, 15B
-	Relay Dual 6 Chnl μ Wave Mux	10-785-522	-	22/24/27, 15C, 15B