



M. Flom Associates, Inc. - Global Compliance Center

3356 North San Marcos Place, Suite 107, Chandler, Arizona 85225-7176

www.mflom.com general@mflom.com (480) 926-3100, FAX: 926-3598

T R A N S M I T T E R C E R T I F I C A T I O N

of
FCC ID: LJPNPL-3
MODEL: 6200

Serial Numbers of Units Tested:
001004/10/062943/6, 001004/10/062953/5

to

FEDERAL COMMUNICATIONS COMMISSION

Rule Parts 22H, 22.901(d), 24E, Confidentiality

DATE OF REPORT: December 18, 2002

ON THE BEHALF OF THE APPLICANT:

Nokia Corporation

AT THE REQUEST OF:

P.O. Olli Kautio 12/09/2002

Nokia Corporation
Elektroniikkatie 10
Fin-90570
Oulu, Finland

Attention of:

Olli Kautio, Senior Engineering Manager,
Testing & Type Approvals
olli.kautio@nokia.com
and/or Kare Oksanen, R&D Type Approvals
kare.oksanen@nokia.com
011 358 7180 08000; FAX: 011 358 7180 47222

SUPERVISED BY:

Morton Flom, P. Eng.

THE APPLICANT HAS BEEN CAUTIONED AS TO THE FOLLOWING:

15.21 INFORMATION TO USER.

The users manual or instruction manual for an intentional radiator shall caution the user that changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

15.27(a) SPECIAL ACCESSORIES.

Equipment marketed to a consumer must be capable of complying with the necessary regulations in the configuration in which the equipment is marketed. Where special accessories, such as shielded cables and/or special connectors are required to enable an unintentional or intentional radiator to comply with the emission limits in this part, the equipment must be marketed with, i.e. shipped and sold with, those special accessories. However, in lieu of shipping or packaging the special accessories with the unintentional or intentional radiator, the responsible party may employ other methods of ensuring that the special accessories are provided to the consumer, without additional charge.

Information detailing any alternative method used to supply the special accessories for a grant of equipment authorization or retained in the verification records, as appropriate. The party responsible for the equipment, as detailed in § 2.909 of this chapter, shall ensure that these special accessories are provided with the equipment. The instruction manual for such devices shall include appropriate instructions on the first page of text concerned with the installation of the device that these special accessories must be used with the device. It is the responsibility of the user to use the needed special accessories supplied with the equipment.

TABLE OF CONTENTS

RULE	DESCRIPTION	PAGE
	Test Report	1
2.1033(c)	General Information Required	2
2.1033(c)(14)	Rule Summary	5
	General Information	6
	Standard Test Conditions and Engineering Practices	7
2.1046(a)	ERP Carrier Power (Radiated)	8
2.1049(c)(1), 22		
	Emission Masks (Occupied Bandwidth)	10
2.1051, 2.1049(c), 24, 24.238(b)	Emission Masks (Occupied Bandwidth)	
	Transmitter Conducted Measurements	22
2.1051, 22.917	Spurious Emissions at Antenna Terminals	34
2.1053(a)	Field Strength of Spurious Radiation	39
2.1055(a)(1)	Frequency Stability (Temperature Variation)	45
2.1055(b)(1)	Frequency Stability (Voltage Variation)	48
2.202(g)	Necessary Bandwidth and Emission Bandwidth	49

PAGE NO.

1 of 49.

Required information per ISO/IEC Guide 25-1990, paragraph 13.2:

a) TEST REPORT
 b) Laboratory: M. Flom Associates, Inc.
 (FCC: 31040/SIT) 3356 N. San Marcos Place, Suite 107
 (Canada: IC 2044) Chandler, AZ 85225
 c) Report Number: d02c0023
 d) Client: Nokia Corporation
 Elektroniikkatie 10
 Fin-90570
 Oulu, Finland
 6200
 e) Identification:
 Description: FCC ID: LJPNPL-3
 f) EUT Condition: Dual-band Cellular Telephone
 Not required unless specified in individual tests.
 g) Report Date: December 18, 2002
 EUT Received: December 9, 2002
 h, j, k): As indicated in individual tests.
 i) Sampling method: No sampling procedure used.
 l) Uncertainty: In accordance with MFA internal quality manual.
 m) Supervised by:



Morton Flom, P. Eng.

n) Results: The results presented in this report relate only to the item tested.
 o) Reproduction: This report must not be reproduced, except in full, without written permission from this laboratory.

ACCESSORIES USED DURING TESTING:

Type	Model	MFA#
Charger	ACP-7U	s001248
Charger	ACP-8U	s001250
Charger	ACP-9U	s001249
Charger	ACP-12U	s001275
Battery	BLD-3	s000559
Battery	BLD-3	s000560
Desktop Charger	DCV-14	s000561
Stereo Headset	HS-1C	s000562
Stereo Music Stand	DT-1	s000563
Loopset	LPS-4	s000564
Headset	HS-5	s000565
Stereo Headset	HDS-3	s000566
Headset	HDS-4	s000567

PAGE NO.

2 of 49.

LIST OF GENERAL INFORMATION REQUIRED FOR CERTIFICATIONIN ACCORDANCE WITH FCC RULES AND REGULATIONS,
VOLUME II, PART 2 AND TO

22H, 22.901(d), 24E, Confidentiality

Sub-part 2.1033(c)(1): NAME AND ADDRESS OF APPLICANT:

Nokia Corporation
Elektroniikkatie 10
Fin-90570
Oulu, Finland

MANUFACTURER:

Nokia Brazil Manaus AM
Rod. Torquato Tapajos, 7200 KM 12 - Taruma
Postal Code: 69048-660
Manaus, Amazonas, Brazil

(c)(2): FCC ID: LJPNPL-3MODEL NO: 6200(c)(3): INSTRUCTION MANUAL(S):

PLEASE SEE ATTACHED EXHIBITS

(c)(4): TYPE OF EMISSION: 300KGXW, 300KG7W(c)(5): FREQUENCY RANGE, MHz: 1850.2 to 1909.8
824.2 to 848.8(c)(6): POWER RATING, Watts: 1 to 2
____ Switchable Variable N/A

FCC GRANT NOTE: BC - The output power is continuously variable from the value listed in this entry to 5%-10% of the value listed.

(c)(7): MAXIMUM POWER RATING, Watts: 1, 2

PAGE NO.

3 of 49.

Subpart 2.1033 (continued)

(c)(8): VOLTAGES & CURRENTS IN ALL ELEMENTS IN FINAL R. F. STAGE,
INCLUDING FINAL TRANSISTOR OR SOLID STATE DEVICE:

COLLECTOR CURRENT, A = per manual
COLLECTOR VOLTAGE, Vdc = per manual
SUPPLY VOLTAGE, Vdc = 3.9

(c)(9): TUNE-UP PROCEDURE:

PLEASE SEE ATTACHED EXHIBITS

(c)(10): CIRCUIT DIAGRAM/CIRCUIT DESCRIPTION:

Including description of circuitry & devices provided for determining and stabilizing frequency, for suppression of spurious radiation, for limiting modulation and limiting power.

PLEASE SEE ATTACHED EXHIBITS

(c)(11): LABEL INFORMATION:

PLEASE SEE ATTACHED EXHIBITS

(c)(12): PHOTOGRAPHS:

PLEASE SEE ATTACHED EXHIBITS

(c)(13): DIGITAL MODULATION DESCRIPTION:

 ATTACHED EXHIBITS
 x N/A


(c)(14): TEST AND MEASUREMENT DATA:

FOLLOWS

PAGE NO.

4 of 49.

M. Flom Associates, Inc. is accredited by the American Association for Laboratory Accreditation (A2LA) as shown in the scope below.

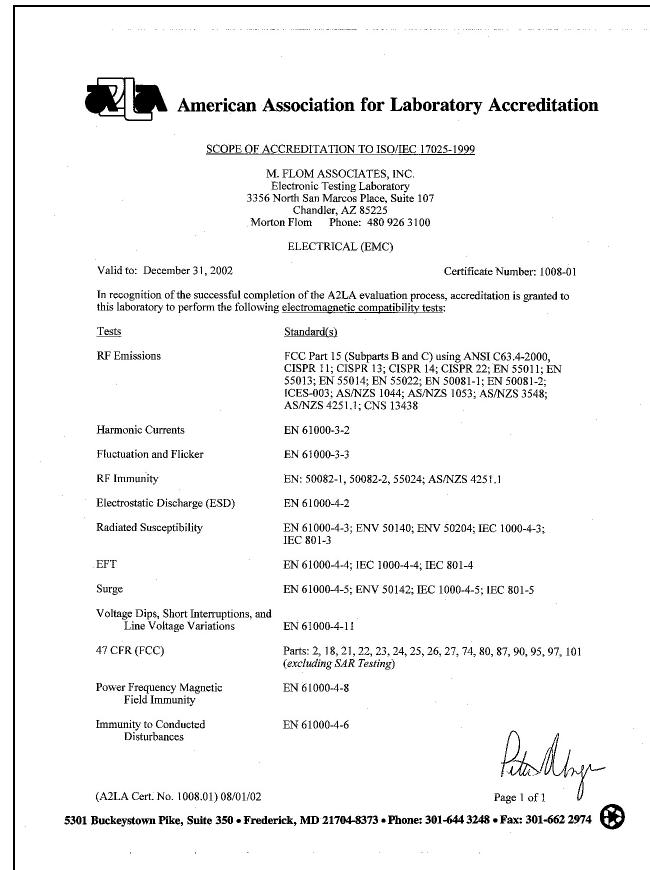

"This laboratory is accredited by the American Association for Laboratory Accreditation (A2LA) and the results shown in this report have been determined in accordance with the laboratory's terms of accreditation unless stated otherwise in the report."

Should this report contain any data for tests for which we are not accredited, or which have been undertaken by a subcontractor that is not A2LA accredited, such data would not be covered by this laboratory's A2LA accreditation.

PAGE NO.

5 of 49.

Sub-part

2.1033(c)(14):TEST AND MEASUREMENT DATA

All tests and measurement data shown were performed in accordance with FCC Rules and Regulations, Volume II; Part 2, Sub-part J, Sections 2.947, 2.1033(c), 2.1041, 2.1046, 2.1047, 2.1079, 2.1051, 2.1053, 2.1055, 2.1057 and the following individual Parts:

- 21 - Domestic Public Fixed Radio Services
- x 22 - Public Mobile Services
- 22 Subpart H - Cellular Radiotelephone Service
- x 22.901(d) - Alternative technologies and auxiliary services
- 23 - International Fixed Public Radiocommunication services
- x 24 - Personal Communications Services
- 74 Subpart H - Low Power Auxiliary Stations
- 80 - Stations in the Maritime Services
- 80 Subpart E - General Technical Standards
- 80 Subpart F - Equipment Authorization for Compulsory Ships
- 80 Subpart K - Private Coast Stations and Marine Utility Stations
- 80 Subpart S - Compulsory Radiotelephone Installations for Small Passenger Boats
- 80 Subpart T - Radiotelephone Installation Required for Vessels on the Great Lakes
- 80 Subpart U - Radiotelephone Installations Required by the Bridge-to-Bridge Act
- 80 Subpart V - Emergency Position Indicating Radiobeacons (EPIRB'S)
- 80 Subpart W - Global Maritime Distress and Safety System (GMDSS)
- 80 Subpart X - Voluntary Radio Installations
- 87 - Aviation Services
- 90 - Private Land Mobile Radio Services
- 94 - Private Operational-Fixed Microwave Service
- 95 Subpart A - General Mobile Radio Service (GMRS)
- 95 Subpart C - Radio Control (R/C) Radio Service
- 95 Subpart D - Citizens Band (CB) Radio Service
- 95 Subpart E - Family Radio Service
- 95 Subpart F - Interactive Video and Data Service (IVDS)
- 97 - Amateur Radio Service
- 101 - Fixed Microwave Services

PAGE NO.

6 of 49.

GENERAL INFORMATION

1. Prior to testing, the deviation for audio modulation and each of the respective SAT + ST tones were set as close as possible to the required limit.
2. Except for audio modulation, which was applied externally, Wideband Data SAT, ST and all other tones and operational modes were provided by a test control unit incorporating appropriate software. Worst case repetition rate for Wideband Data was 10 kb/s.
3. Spurious radiation was measured at three (3) meters.
4. The two cellular frequency bands are available to the user automatically. Please refer to the manual contained in the documentation.
5. The normal modes of modulation are:
 - x (a) GSM850
 - x (b) GPRS850
 - x (c) EGPRS850
 - x (d) GSM1900
 - x (e) GPRS1900
 - x (f) EGPRS1900

PAGE NO.

7 of 49.

STANDARD TEST CONDITIONS
and
ENGINEERING PRACTICES

Except as noted herein, the following conditions and procedures were observed during the testing:

In accordance with ANSI C63.4-1992/2000, section 6.1.9, and unless otherwise indicated in the specific measurement results, the ambient temperature of the actual EUT was maintained within the range of 10° to 40°C (50° to 104 °F) unless the particular equipment requirements specify testing over a different temperature range. Also, unless otherwise indicated, the humidity levels were in the range of 10% to 90% relative humidity.

Prior to testing, the EUT was tuned up in accordance with the manufacturer's alignment procedures. All external gain controls were maintained at the position of maximum and/or optimum gain throughout the testing.

Measurement results, unless otherwise noted, are worst case measurements.

PAGE NO.

8 of 49.

NAME OF TEST:

ERP Carrier Power (Radiated)


SPECIFICATION:

TIA/EIA 603A (Substitution Method)

Definition: The average radiated power of device is the equivalent power required, when delivered to a substitution antenna, to produce at a distant point the same average received power as produced by the licensed device.

Method of Measurement:

a) Connect the equipment as illustrated. Place the transmitter to be tested on the turntable in the standard test site.

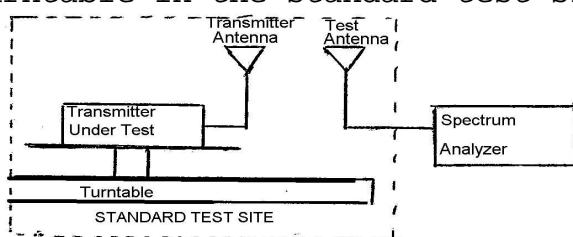

b) Raise and lower the test antenna from 1m to 4m and rotate turntable from 0° to 360°. Record the highest received signal in dB as E_T .

c) Replace the transmitter under test with a substitution antenna. The center of the antenna should be at the same location as the transmitter under test. Connect the antenna to a signal generator with a known output power level using the same modulation as with the transmitter. Raise and lower the test antenna like in step b) and record the highest received signal in dB as E_S .

d) Calculate radiated power as following:

$$\text{Radiated power} = \text{Level} + E_T - E_S + \text{Gain}_{\text{Ant}}$$

E_T Signal level received from transmitter

E_S Signal level received from substitution antenna

RESULTS ATTACHED

PAGE NO.

9 of 49.

TEST RESULTS FOR: ERP Carrier Power (Radiated)

Freq MHz	Level dBm	Antenna Gain	E _T - E _S dBm	Radiated P Out dbm	Radiated P Out Watts
GSM850					
824.2	30.7	-0.94 dBd	93.7-95.0	28.5 ERP	0.701
836.0	30.8	-0.64 dBd	91.6-93.2	28.6 ERP	0.718
848.8	30.9	-0.24 dBd	93.5-94.4	29.8 ERP	0.946
GPRS850					
824.2	27.7	-0.94 dBd	91.1-92.0	25.9 ERP	0.385
836.0	27.7	-0.64 dBd	88.9-90.3	25.7 ERP	0.368
848.8	27.8	-0.24 dBd	90.8-91.3	27.1 ERP	0.508
EGPRS850					
824.2	24.8	-0.94 dBd	91.3-92.5	22.7 ERP	0.185
836.0	25.0	-0.64 dBd	89.4-91.2	22.6 ERP	0.180
848.8	25.1	-0.24 dBd	91.2-92.0	24.1 ERP	0.255
GSM1900/GPRS1900					
1850.2	27.0	+1.2 dBi	82.7-81.0	29.9 EIRP	0.977
1880.0	27.2	+0.5 dBi	82.1-80.2	29.6 EIRP	0.912
1909.8	27.4	-0.1 dBi	82.0-80.1	29.2 EIRP	0.832
EGPRS1900					
1850.2	21.7	+1.2 dBi	80.8-78.9	24.8 EIRP	0.302
1880.0	21.7	+0.5 dBi	80.1-77.8	24.5 EIRP	0.282
1909.8	21.4	-0.1 dBi	80.4-77.6	24.1 EIRP	0.257

SAMPLE CALCULATION:

$$P_{ANT\ OUT} + ANT\ GAIN + E_T - E_S = P.O. \text{ RADIATED}$$

$$30.7 - 0.94 + 93.7 - 95.0 = 28.46 \text{ dbm ERP}$$

$$= 0.701 \text{ W ERP}$$

ANTENNA: EMCO 3125-870 dipole s/n 1027 cal. 20-May-02
 EMCO 3126-1880 dipole s/n 1009 cal. 26-Feb-02

PAGE NO. 10 of 49.

NAME OF TEST: Emission Masks (Occupied Bandwidth)

SPECIFICATION: 47 CFR 2.1049(c)(1), 22

TEST EQUIPMENT: As per previous page

MEASUREMENT PROCEDURE


1. The EUT and test equipment were set up as shown on the following page, with the Spectrum Analyzer connected.
2. For EUTs supporting audio modulation, the audio signal generator was adjusted to the frequency of maximum response and with output level set for ± 2.5 kHz deviation (or 50% modulation). With level constant, the signal level was increased 16 dB.
3. For EUTs supporting digital modulation, the digital modulation mode was operated to its maximum extent.
4. The Occupied Bandwidth was measured with the Spectrum Analyzer controls set as shown on the test results.
5. MEASUREMENT RESULTS: ATTACHED

PAGE NO.

11 of 49.

TRANSMITTER SPURIOUS EMISSION

TEST A. OCCUPIED BANDWIDTH (IN-BAND SPURIOUS)
 TEST B. OUT-OF-BAND SPURIOUS

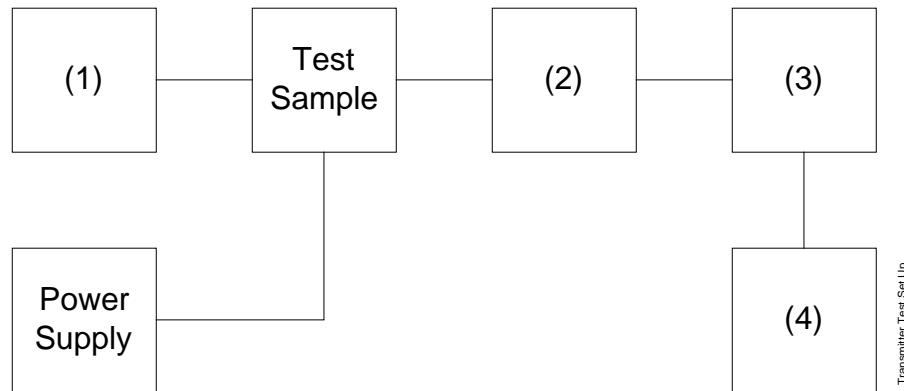


Asset Description (as applicable)		s/n
(1) <u>AUDIO OSCILLATOR/GENERATOR</u>		
i00010 HP 204D		1105A04683
i00017 HP 8903A		2216A01753
i00012 HP 3312A		1432A11250
(2) <u>COAXIAL ATTENUATOR</u>		
i00122 Narda 766-10		7802
i00123 Narda 766-10		7802A
i00069 Bird 8329 (30 dB)		1006
i00113 Sierra 661A-3D		1059
(3) <u>FILTERS; NOTCH, HP, LP, BP</u>		
i00126 Eagle TNF-1		100-250
i00125 Eagle TNF-1		50-60
i00124 Eagle TNF-1		250-850
(4) <u>SPECTRUM ANALYZER</u>		
i00048 HP 8566B		2511A01467
i00029 HP 8563E		3213A00104

PAGE NO.

12 of 49.

NAME OF TEST: Emission Masks (Occupied Bandwidth)
 g02c0082: 2002-Dec-13 Fri 10:34:00
 STATE: 1:Low Power

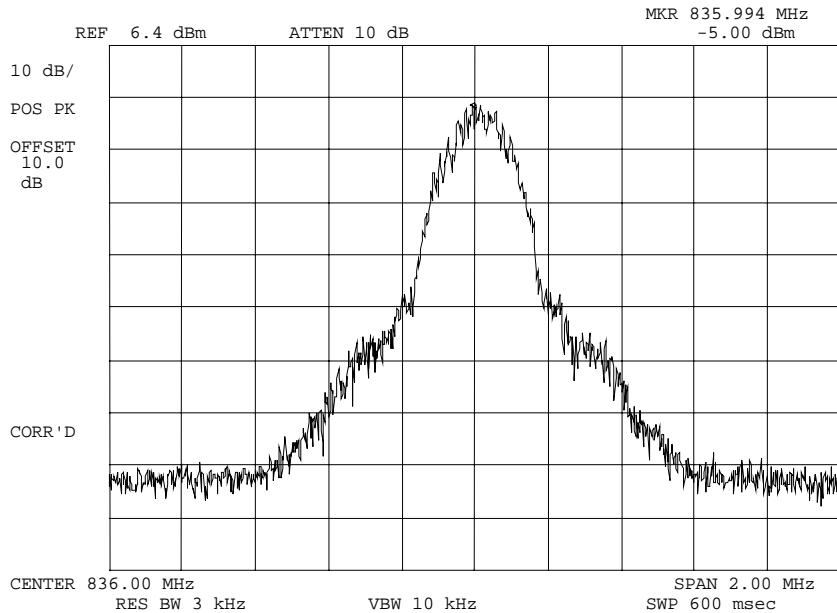

POWER: LOW
 MODULATION: GSM850


PERFORMED BY:


 Doug Noble, B.A.S. E.E.T.

PAGE NO.

13 of 49.

NAME OF TEST: Emission Masks (Occupied Bandwidth)
 g02c0078: 2002-Dec-13 Fri 10:10:00
 STATE: 2:High Power

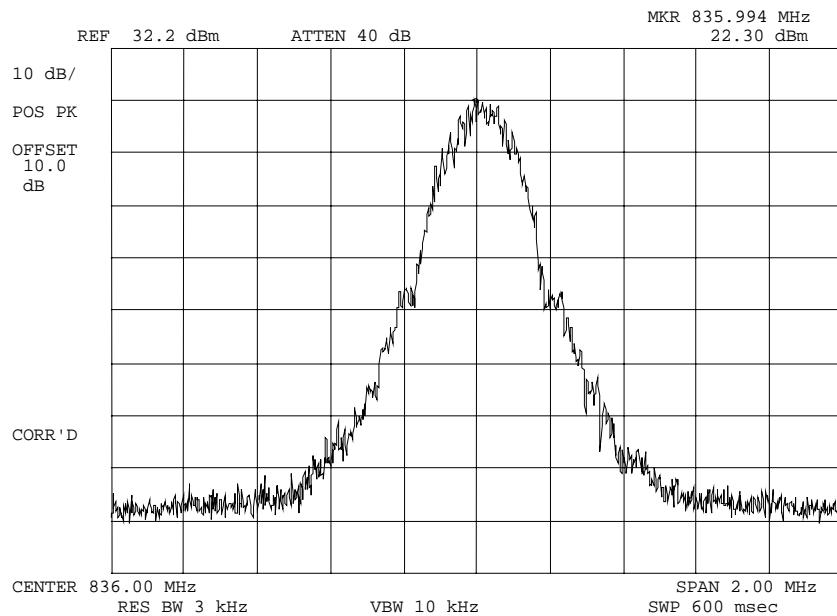

POWER: HIGH
 MODULATION: GSM850


PERFORMED BY:


 Doug Noble, B.A.S. E.E.T.

PAGE NO.

14 of 49.

NAME OF TEST: Emission Masks (Occupied Bandwidth)
 g02c0070: 2002-Dec-13 Fri 09:32:00
 STATE: 2:High Power

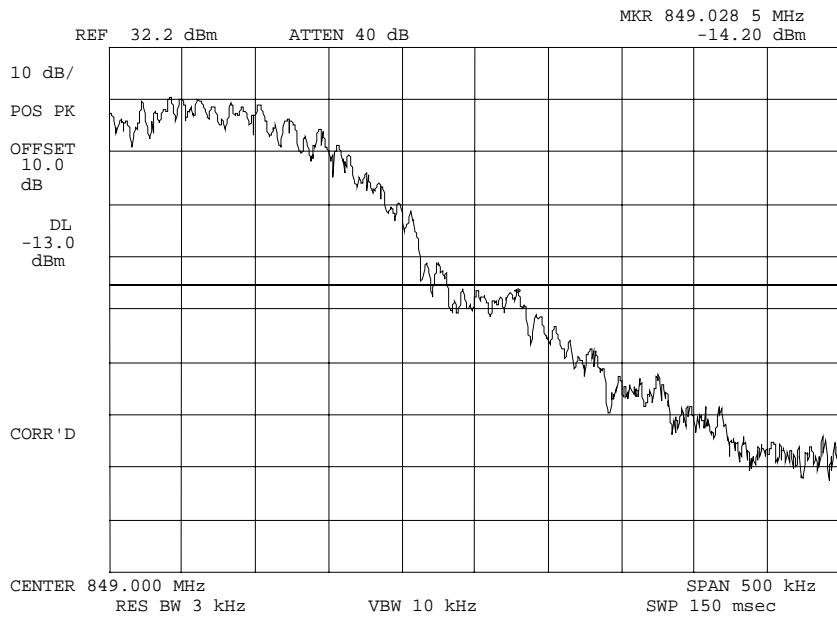

POWER: HIGH
 MODULATION: GSM850
 UPPER BANDEDGE CH 251


PERFORMED BY:


 Doug Noble, B.A.S. E.E.T.

PAGE NO.

15 of 49.

NAME OF TEST: Emission Masks (Occupied Bandwidth)
 g02c0069: 2002-Dec-13 Fri 09:30:00
 STATE: 2:High Power

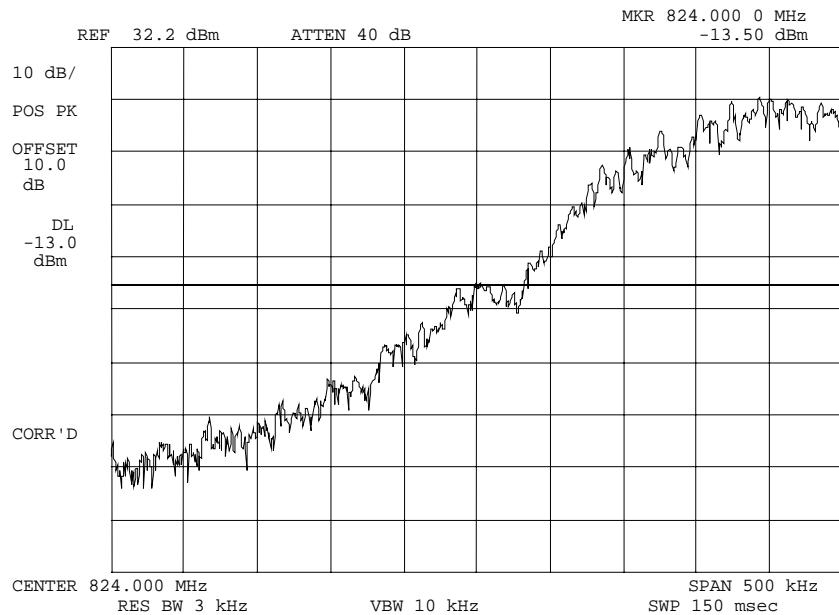

POWER: HIGH
 MODULATION: GSM850
 LOWER BANDEDGE CH 128


PERFORMED BY:


 Doug Noble, B.A.S. E.E.T.

PAGE NO.

16 of 49.

NAME OF TEST: Emission Masks (Occupied Bandwidth)
 g02c0105: 2002-Dec-16 Mon 09:17:00
 STATE: 2:High Power

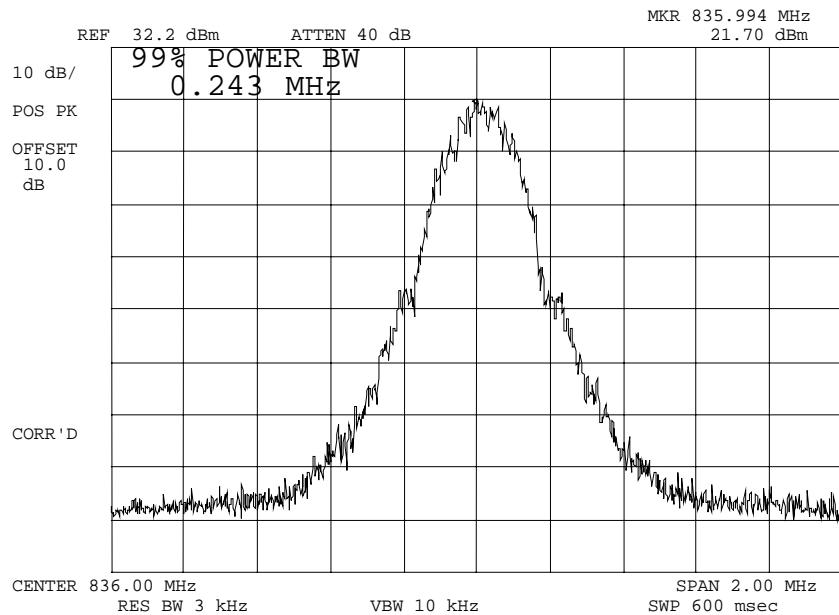

POWER: HIGH
 MODULATION: GSM850
 99 % POWER BANDWIDTH

PERFORMED BY:




Doug Noble, B.A.S. E.E.T.

PAGE NO.

17 of 49.

NAME OF TEST: Emission Masks (Occupied Bandwidth)
 g02c0074: 2002-Dec-13 Fri 09:51:00
 STATE: 1:Low Power

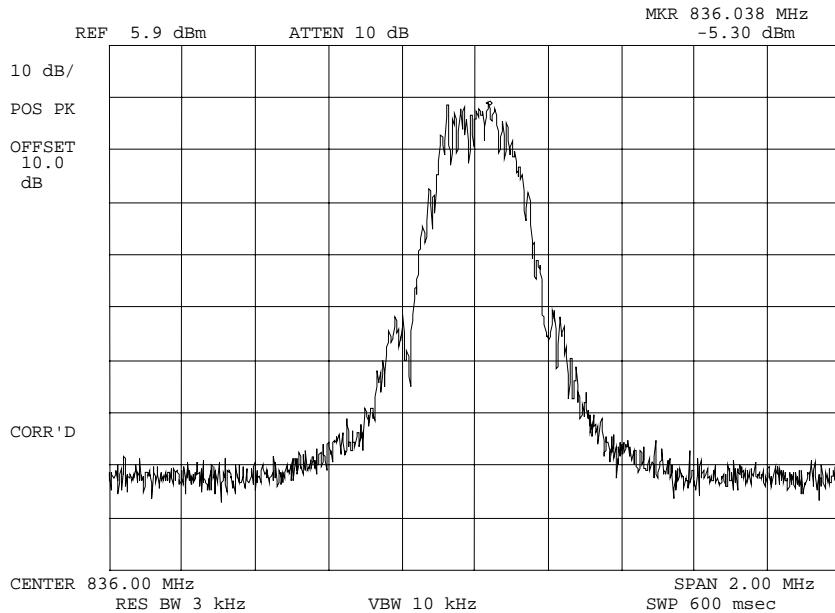

POWER: LOW
 MODULATION: EGPRS850


PERFORMED BY:


 Doug Noble, B.A.S. E.E.T.

PAGE NO.

18 of 49.

NAME OF TEST: Emission Masks (Occupied Bandwidth)
 g02c0075: 2002-Dec-13 Fri 09:56:00
 STATE: 2:High Power

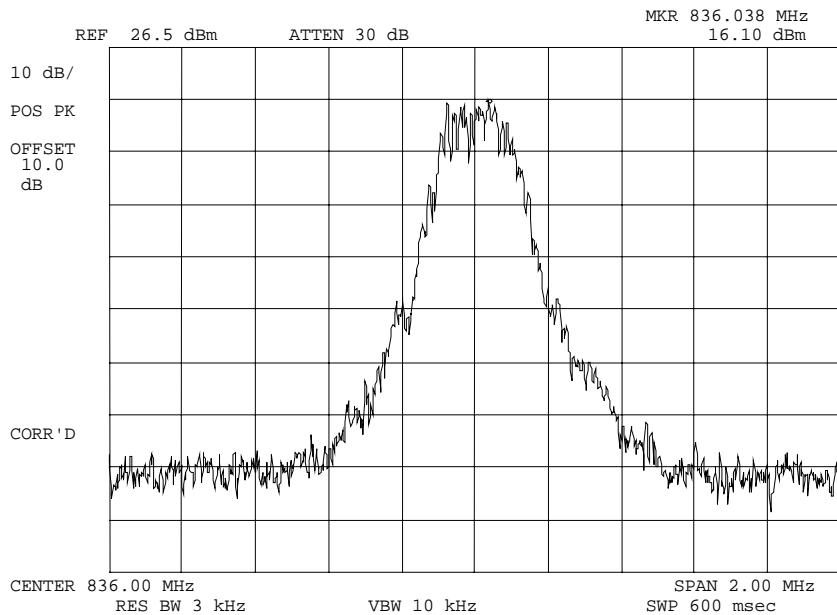

POWER: HIGH
 MODULATION: EGPRS850

PERFORMED BY:




Doug Noble, B.A.S. E.E.T.

PAGE NO.

19 of 49.

NAME OF TEST: Emission Masks (Occupied Bandwidth)
 g02c0081: 2002-Dec-13 Fri 10:21:00
 STATE: 2:High Power

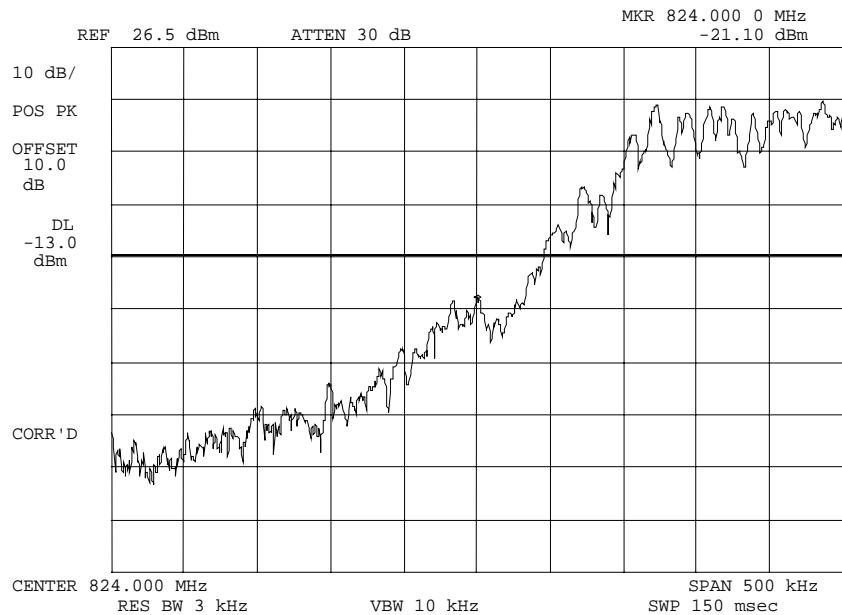

POWER: HIGH
 MODULATION: EGPRS850
 LOWER BANDEDGE CH 128

PERFORMED BY:




Doug Noble, B.A.S. E.E.T.

PAGE NO.

20 of 49.

NAME OF TEST: Emission Masks (Occupied Bandwidth)
 g02c0080: 2002-Dec-13 Fri 10:18:00
 STATE: 2:High Power

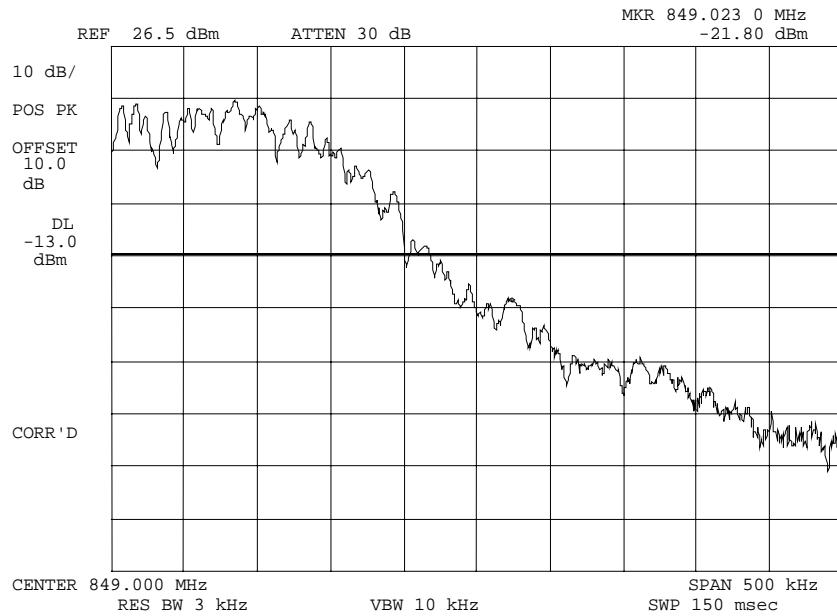

POWER:
 MODULATION:

HIGH
 EGPRS850
 UPPER BANDEDGE CH 251

PERFORMED BY:



Doug Noble, B.A.S. E.E.T.


PAGE NO.

21 of 49.

NAME OF TEST:

Emission Masks (Occupied Bandwidth)

STATE: 2:High Power g02c0104: 2002-Dec-16 Mon 09:15:00

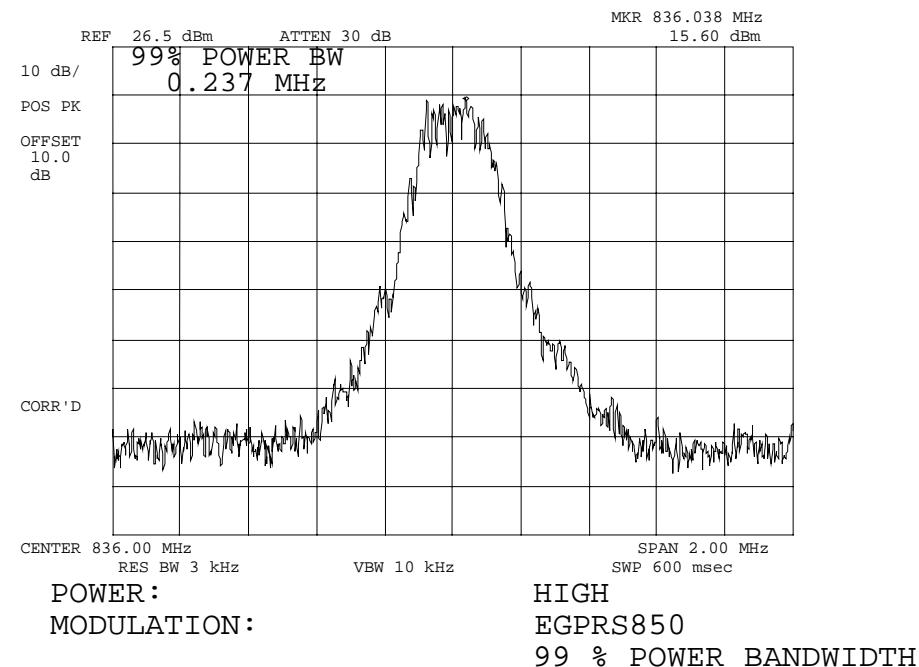


NAME OF TEST:

Emission Masks - RX Critical Band Plot

Marker 1 [T1] RBW 30 kHz RF Att 0 dB

Ref Lvl -97.20 dBm VBW 30 kHz Mixer -80 dBm

-20 dBm 874.76152305 MHz SWT 10 s Unit dBm

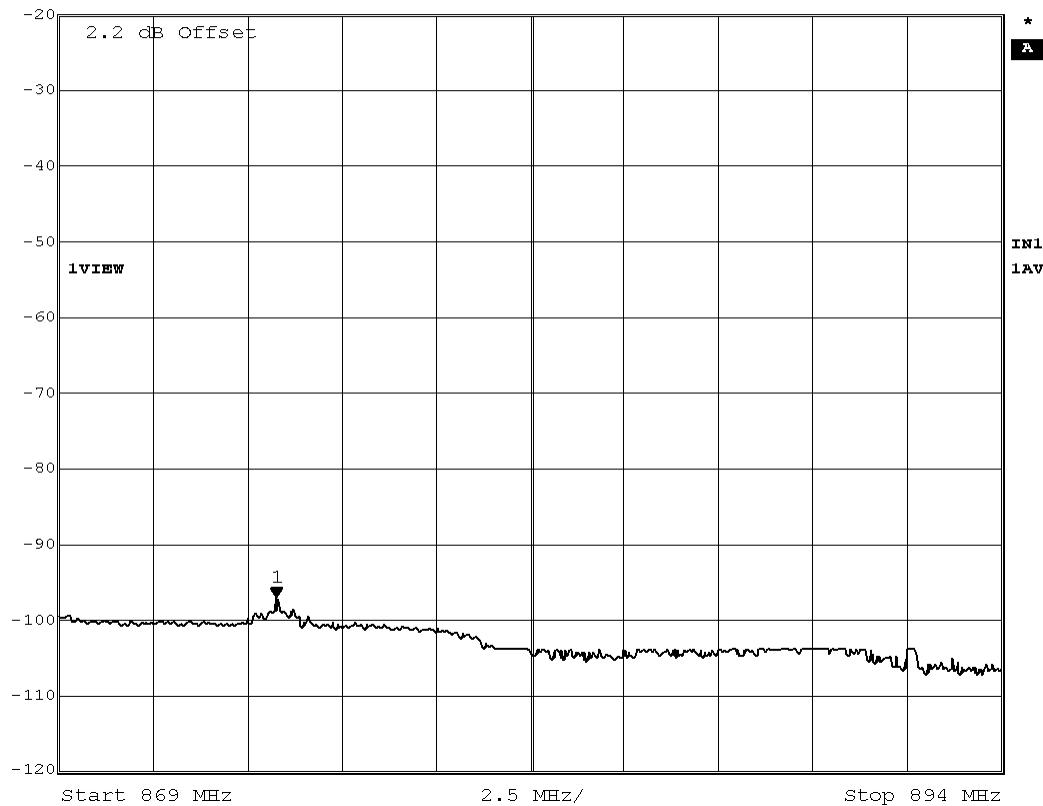

PAGE NO. 22 of 49.

NAME OF TEST: Transmitter Conducted Measurements

SPECIFICATION: 47 CFR 2.1051: Unwanted (spurious) Emissions
2.1049(c), 24.238(b): Occupied Bandwidth
24: Emissions at Band Edges

TEST EQUIPMENT: As per attached page

MEASUREMENT PROCEDURE

1. The EUT and test equipment were set up as shown on the following page with the Spectrum Analyzer connected.
2. The low and high channels for all RF powers within the designated frequency block(s) were measured.
3. MEASUREMENT RESULTS: ATTACHED

PERFORMED BY:




Doug Noble, B.A.S. E.E.T.

PAGE NO.

23 of 49.

TRANSMITTER SPURIOUS EMISSION

TEST A. OCCUPIED BANDWIDTH (IN-BAND SPURIOUS)
 TEST B. OUT-OF-BAND SPURIOUS

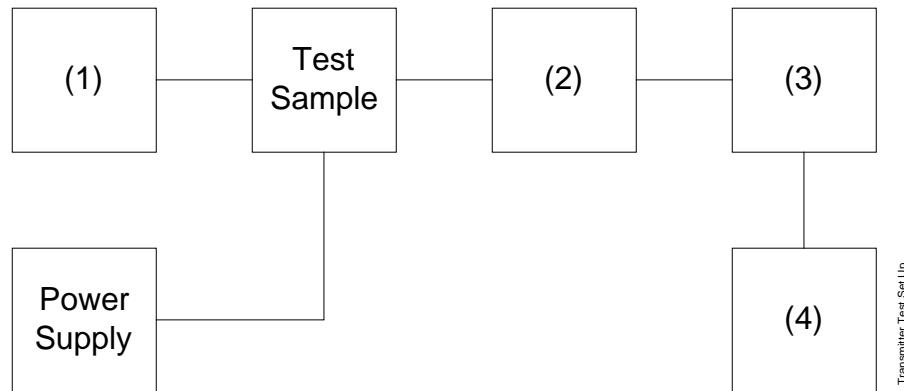

Asset Description (as applicable)	s/n
(1) <u>AUDIO OSCILLATOR/GENERATOR</u>	
i00010 HP 204D	1105A04683
i00017 HP 8903A	2216A01753
i00012 HP 3312A	1432A11250
(2) <u>COAXIAL ATTENUATOR</u>	
i00122 Narda 766-10	7802
i00123 Narda 766-10	7802A
i00069 Bird 8329 (30 dB)	1006
i00113 Sierra 661A-3D	1059
(3) <u>FILTERS; NOTCH, HP, LP, BP</u>	
i00126 Eagle TNF-1	100-250
i00125 Eagle TNF-1	50-60
i00124 Eagle TNF-1	250-850
(4) <u>SPECTRUM ANALYZER</u>	
i00048 HP 8566B	2511A01467
i00029 HP 8563E	3213A00104

PAGE NO.


24 of 49.

NAME OF TEST:

Emission Masks (Occupied Bandwidth)

g02c0084: 2002-Dec-13 Fri 11:01:00

STATE: 1:Low Power

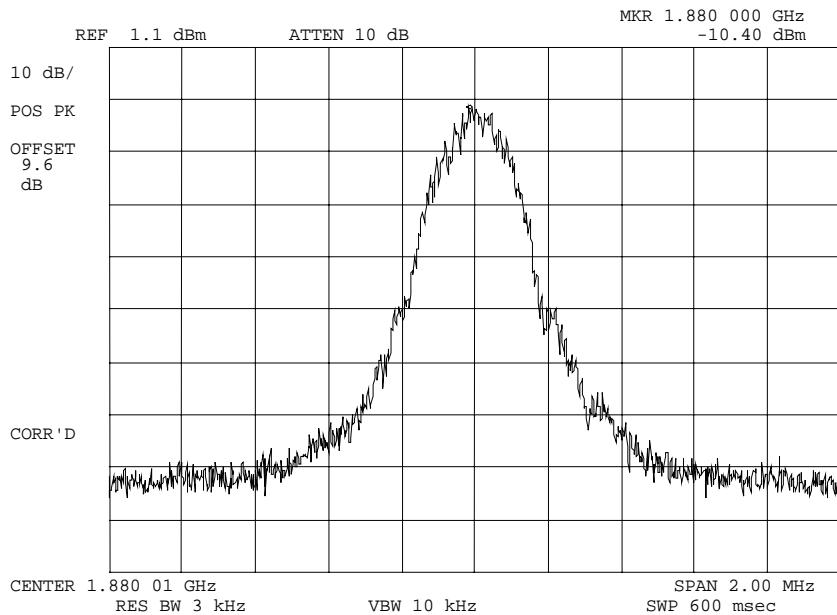

POWER:

LOW

MODULATION:

GSM1900


PERFORMED BY:

Doug Noble, B.A.S. E.E.T.

PAGE NO.

25 of 49.

NAME OF TEST: Emission Masks (Occupied Bandwidth)
 g02c0083: 2002-Dec-13 Fri 10:59:00
 STATE: 2:High Power

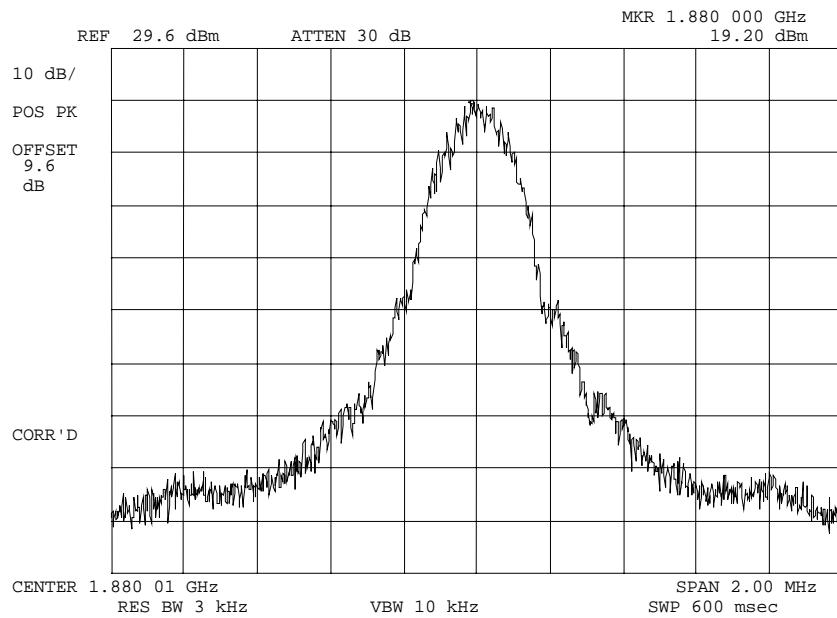

POWER: HIGH
 MODULATION: GSM1900


PERFORMED BY:


 Doug Noble, B.A.S. E.E.T.

PAGE NO.

26 of 49.

NAME OF TEST: Emission Masks (Occupied Bandwidth)
 g02c0086: 2002-Dec-13 Fri 11:09:00
 STATE: 2:High Power

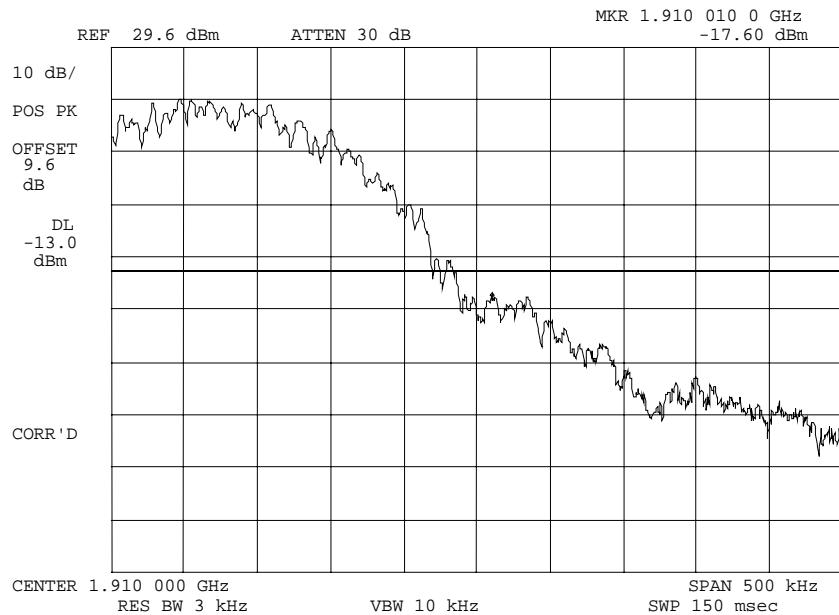

POWER: HIGH
 MODULATION: GSM1900
 UPPER BANDEDGE CH 810

PERFORMED BY:




Doug Noble, B.A.S. E.E.T.

PAGE NO.

27 of 49.

NAME OF TEST: Emission Masks (Occupied Bandwidth)
 g02c0085: 2002-Dec-13 Fri 11:03:00
 STATE: 2:High Power

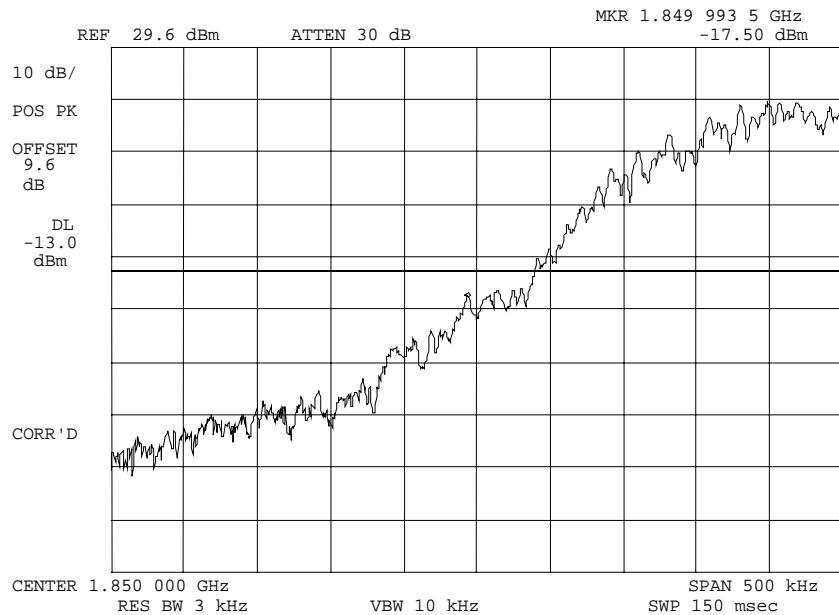

POWER: HIGH
 MODULATION: GSM1900
 LOWER BANDEDGE CH 512


PERFORMED BY:

Doug Noble, B.A.S. E.E.T.

PAGE NO.

28 of 49.

NAME OF TEST: Emission Masks (Occupied Bandwidth)
 g02c0102: 2002-Dec-16 Mon 09:12:00
 STATE: 2:High Power

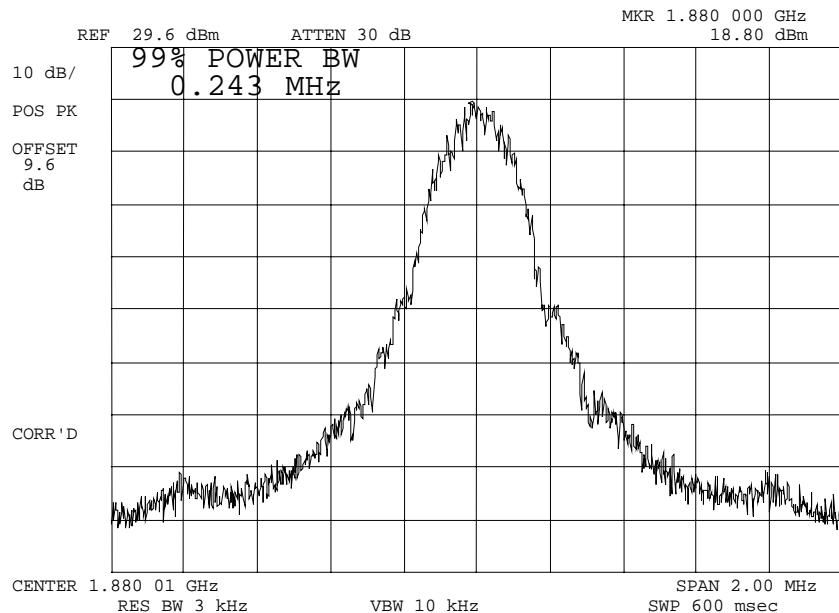

POWER: HIGH
 MODULATION: GSM1900
 99 % POWER BANDWIDTH

PERFORMED BY:




Doug Noble, B.A.S. E.E.T.

PAGE NO.

29 of 49.

NAME OF TEST: Emission Masks (Occupied Bandwidth)
 g02c0088: 2002-Dec-13 Fri 11:17:00
 STATE: 1:Low Power

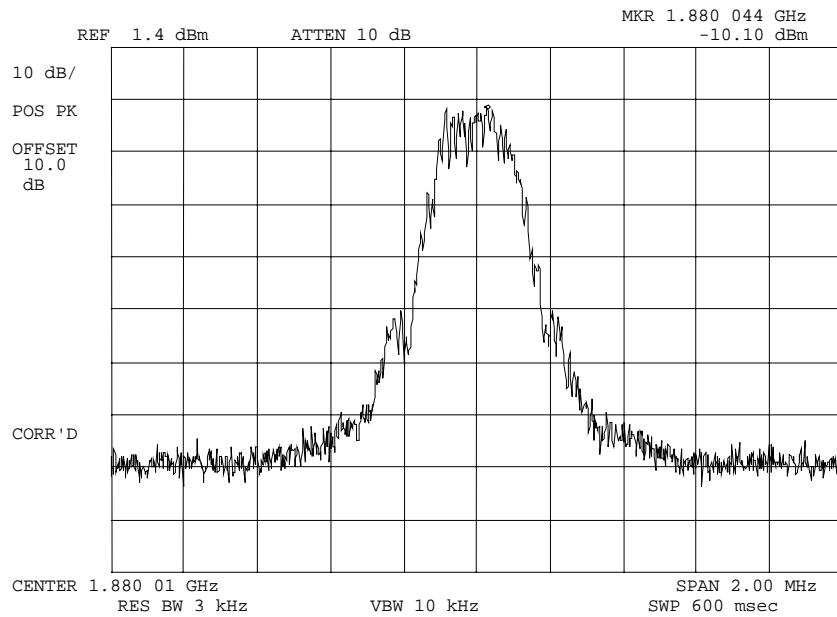

POWER: LOW
 MODULATION: EGPRS850

PERFORMED BY:




Doug Noble, B.A.S. E.E.T.

PAGE NO.

30 of 49.

NAME OF TEST: Emission Masks (Occupied Bandwidth)
 g02c0087: 2002-Dec-13 Fri 11:14:00
 STATE: 2:High Power

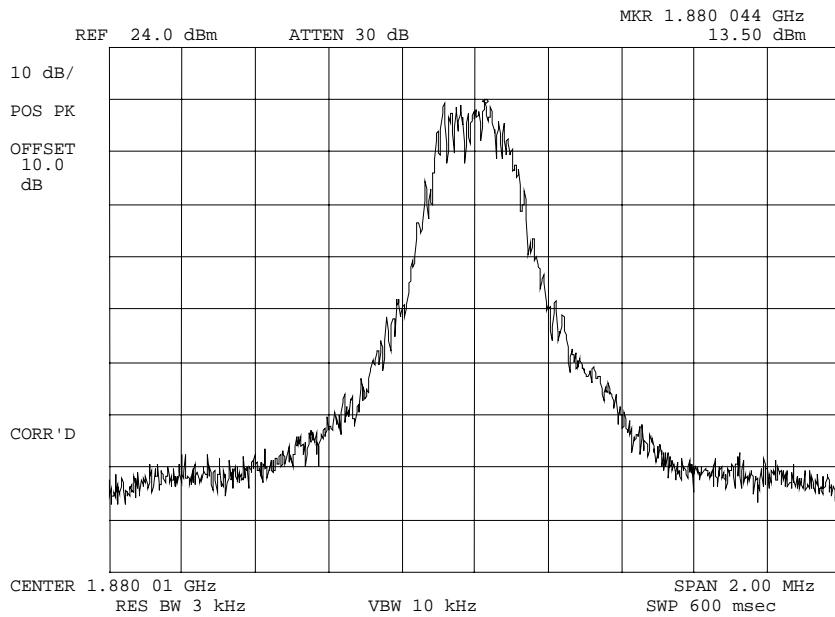

POWER: HIGH
 MODULATION: EGPRS850


PERFORMED BY:


 Doug Noble, B.A.S. E.E.T.

PAGE NO.

31 of 49.

NAME OF TEST: Emission Masks (Occupied Bandwidth)
 g02c0090: 2002-Dec-13 Fri 11:25:00
 STATE: 2:High Power

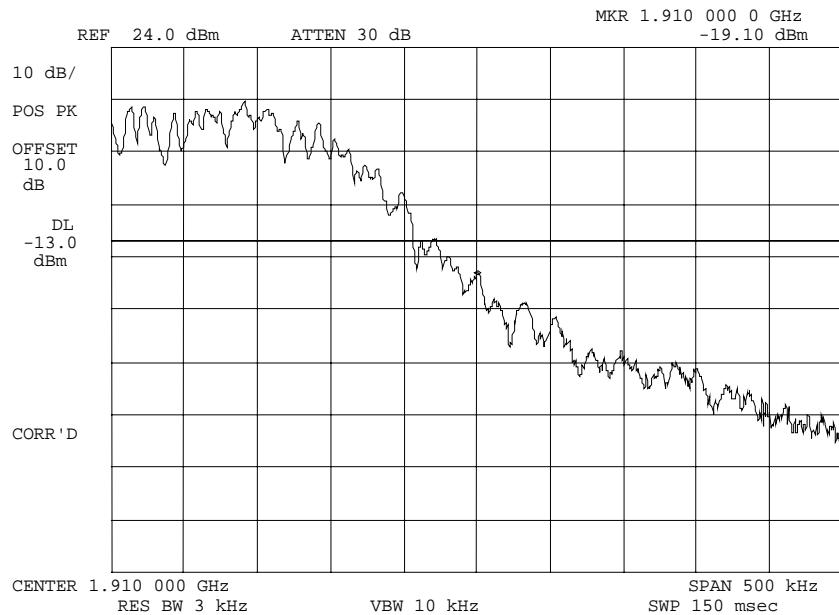

POWER: HIGH
 MODULATION: EGPRS850
 UPPER BANDEDGE CH 810

PERFORMED BY:




Doug Noble, B.A.S. E.E.T.

PAGE NO.

32 of 49.

NAME OF TEST: Emission Masks (Occupied Bandwidth)
 g02c0089: 2002-Dec-13 Fri 11:23:00
 STATE: 2:High Power

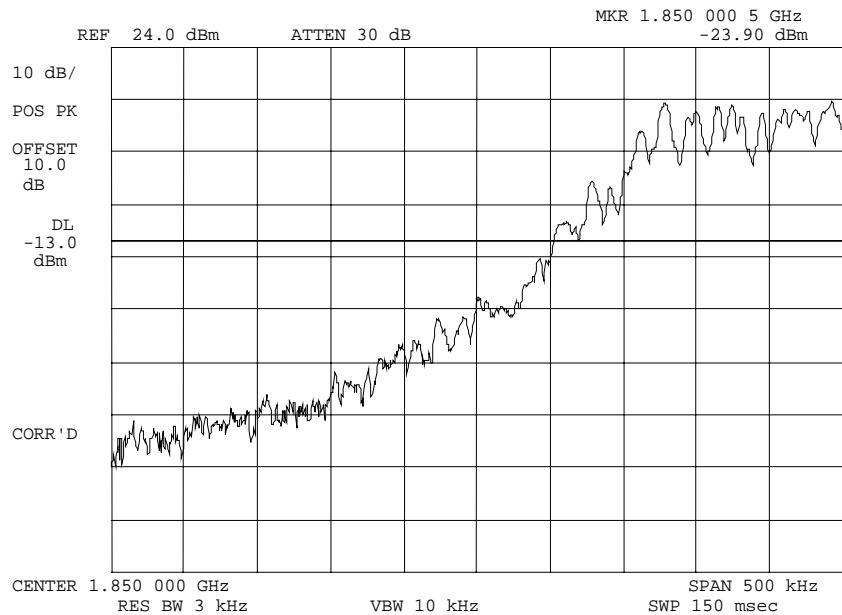

POWER: HIGH
 MODULATION: EGPRS850
 LOWER BANDEDGE CH 512

PERFORMED BY:




Doug Noble, B.A.S. E.E.T.

PAGE NO.

33 of 49.

NAME OF TEST: Emission Masks (Occupied Bandwidth)
 g02c0103: 2002-Dec-16 Mon 09:13:00
 STATE: 2:High Power

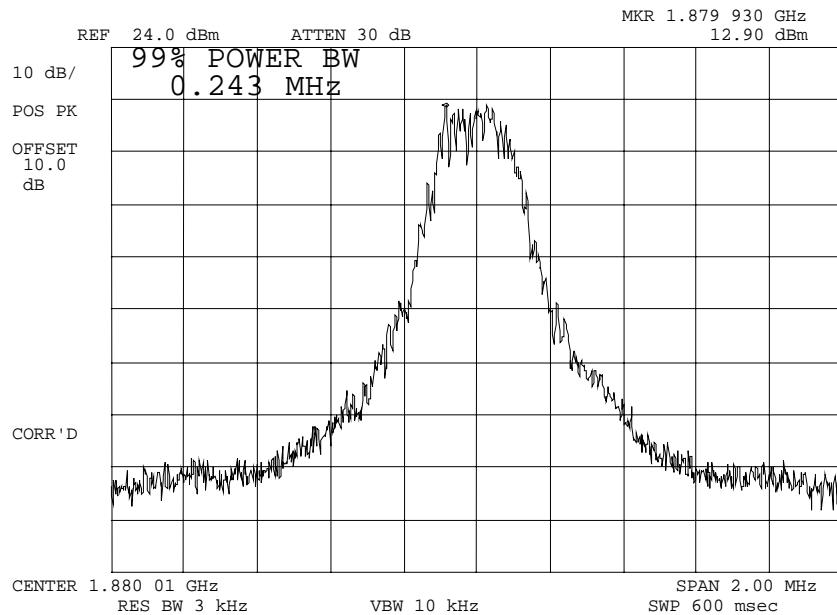

POWER: HIGH
 MODULATION: EGPRS850
 99 % POWER BANDWIDTH

PERFORMED BY:



Doug Noble, B.A.S. E.E.T.

PAGE NO. 34 of 49.

NAME OF TEST: Spurious Emissions at Antenna Terminals

SPECIFICATION: 47 CFR 2.1051, 22.917

TEST EQUIPMENT: As per attached page

MEASUREMENT PROCEDURE

1. The EUT was connected to a coaxial attenuator and then to a Spectrum Analyzer.
2. A notch filter was introduced to reduce or eliminate spurious emission which could be generated internally in the spectrum analyzer.
3. Measurements were made over the range from 45 kHz to 10 GHz for the worst case modulation so both the highest and lowest R.F. power settings.
4. All other emissions were 20 dB or more below the limit.
5. Spectrum analyzer bandwidth was set to section 22.917(h) as applicable.
6. MEASUREMENT RESULTS: ATTACHED

PAGE NO.

35 of 49.

NAME OF TEST: Unwanted Emissions (Transmitter Conducted)
 g02c0091: 2002-Dec-13 Fri 15:01:00
 STATE: 2:High Power GSM850

FREQUENCY TUNED, MHz	FREQUENCY EMISSION, MHz	LEVEL, dBm	LEVEL, dBc	MARGIN, dB
824.200000	1648.418500	-37.4	-69.6	-24.4
836.000000	1672.144900	-41.5	-73.7	-28.5
848.800000	1697.619000	-37.9	-70.1	-24.9
824.200000	2472.609500	-39.6	-71.8	-26.6
836.000000	2507.809200	-44.5	-76.7	-31.5
848.800000	2546.332600	-44.4	-76.6	-31.4
824.200000	3296.659600	-45.3	-77.5	-32.3
836.000000	3343.974500	-46.2	-78.4	-33.2
848.800000	3395.155000	-45.5	-77.7	-32.5
824.200000	4120.786200	-45.8	-78	-32.8
836.000000	4180.235800	-45.2	-77.4	-32.2
848.800000	4244.139900	-46.3	-78.5	-33.3
824.200000	4945.027600	-45.3	-77.5	-32.3
836.000000	5015.771200	-45.3	-77.5	-32.3
848.800000	5092.615600	-45.5	-77.7	-32.5
824.200000	5769.539400	-44.8	-77	-31.8
836.000000	5851.972100	-39.3	-71.5	-26.3
848.800000	5941.355200	-39.8	-72	-26.8
824.200000	6593.676600	-39.2	-71.4	-26.2
836.000000	6687.845200	-38.7	-70.9	-25.7
848.800000	6790.601000	-37.9	-70.1	-24.9
824.200000	7417.857700	-39.5	-71.7	-26.5
836.000000	7523.872600	-39.5	-71.7	-26.5
848.800000	7639.292600	-39.6	-71.8	-26.6
824.200000	8242.079600	-40.5	-72.7	-27.5
836.000000	8360.008500	-39.6	-71.8	-26.6
848.800000	8487.807900	-39	-71.2	-26
824.200000	9066.074600	-40	-72.2	-27
836.000000	9196.229900	-38.8	-71	-25.8
848.800000	9336.789100	-39.4	-71.6	-26.4
824.200000	9890.298000	-40	-72.2	-27
836.000000	10031.961700	-38.8	-71	-25.8
848.800000	10185.705500	-39.1	-71.3	-26.1
824.200000	10714.592000	-39.2	-71.4	-26.2
836.000000	10868.128900	-38.9	-71.1	-25.9
848.800000	11034.217400	-39.2	-71.4	-26.2
824.200000	11538.746800	-39.6	-71.8	-26.6
836.000000	11703.855200	-39	-71.2	-26
848.800000	11883.169100	-39	-71.2	-26
824.200000	12362.888500	-38.5	-70.7	-25.5
836.000000	12539.965500	-34.2	-66.4	-21.2
848.800000	12731.820100	-34.5	-66.7	-21.5

PAGE NO.

36 of 49.

NAME OF TEST: Unwanted Emissions (Transmitter Conducted)
 g02c0093: 2002-Dec-13 Fri 15:14:00
 STATE: 2:High Power EGPRS850

FREQUENCY TUNED, MHz	FREQUENCY EMISSION, MHz	LEVEL, dBm	LEVEL, dBc	MARGIN, dB
824.200000	1648.453500	-33.8	-60.3	-20.8
836.000000	1672.041500	-40.4	-66.9	-27.4
848.800000	1697.668400	-37.9	-64.4	-24.9
824.200000	2472.648000	-34.3	-60.8	-21.3
836.000000	2507.785700	-55.1	-81.6	-42.1
848.800000	2546.189700	-55.2	-81.7	-42.2
824.200000	3296.571200	-55.8	-82.3	-42.8
836.000000	3343.793200	-55.5	-82	-42.5
848.800000	3395.365900	-56.2	-82.7	-43.2
824.200000	4121.003000	-55.7	-82.2	-42.7
836.000000	4180.159900	-55.5	-82	-42.5
848.800000	4244.058000	-54.6	-81.1	-41.6
824.200000	4945.208500	-55.8	-82.3	-42.8
836.000000	5015.776700	-55.2	-81.7	-42.2
848.800000	5092.600700	-55.7	-82.2	-42.7
824.200000	5769.279100	-54.2	-80.7	-41.2
836.000000	5852.172700	-50.6	-77.1	-37.6
848.800000	5941.751300	-48.9	-75.4	-35.9
824.200000	6593.735800	-49.7	-76.2	-36.7
836.000000	6687.775600	-49.7	-76.2	-36.7
848.800000	6790.246200	-47.9	-74.4	-34.9
824.200000	7417.858200	-49.7	-76.2	-36.7
836.000000	7524.229400	-49.5	-76	-36.5
848.800000	7639.396600	-48.9	-75.4	-35.9
824.200000	8242.033300	-49.7	-76.2	-36.7
836.000000	8360.177600	-49.6	-76.1	-36.6
848.800000	8488.059200	-49.7	-76.2	-36.7
824.200000	9066.092500	-49.5	-76	-36.5
836.000000	9196.050300	-50.2	-76.7	-37.2
848.800000	9336.560700	-49.3	-75.8	-36.3
824.200000	9890.558700	-49.9	-76.4	-36.9
836.000000	10032.175700	-50	-76.5	-37
848.800000	10185.376600	-49.8	-76.3	-36.8
824.200000	10714.369100	-49.7	-76.2	-36.7
836.000000	10868.127400	-49.1	-75.6	-36.1
848.800000	11034.597500	-49.1	-75.6	-36.1
824.200000	11538.734800	-49.2	-75.7	-36.2
836.000000	11703.888500	-48.5	-75	-35.5
848.800000	11883.139300	-49.8	-76.3	-36.8
824.200000	12363.044300	-48.6	-75.1	-35.6
836.000000	12540.094400	-45.2	-71.7	-32.2
848.800000	12731.869100	-45.2	-71.7	-32.2

PAGE NO.

37 of 49.

NAME OF TEST: Unwanted Emissions (Transmitter Conducted)
 g02c0094: 2002-Dec-13 Fri 15:23:00
 STATE: 2:High Power GSM1900

FREQUENCY TUNED, MHz	FREQUENCY EMISSION, MHz	LEVEL, dBm	LEVEL, dBc	MARGIN, dB
1850.200000	3700.548900	-56.5	-86.1	-43.5
1880.000000	3760.176400	-55.7	-85.3	-42.7
1909.800000	3819.641500	-55.5	-85.1	-42.5
1850.200000	5550.468100	-54.8	-84.4	-41.8
1880.000000	5640.237300	-56.4	-86	-43.4
1909.800000	5729.633300	-55.2	-84.8	-42.2
1850.200000	7401.006500	-50.2	-79.8	-37.2
1880.000000	7519.889000	-49.4	-79	-36.4
1909.800000	7639.432900	-49.4	-79	-36.4
1850.200000	9250.900000	-50.5	-80.1	-37.5
1880.000000	9399.963200	-50.7	-80.3	-37.7
1909.800000	9549.239800	-50.5	-80.1	-37.5
1850.200000	11101.425900	-49.4	-79	-36.4
1880.000000	11280.079100	-50.1	-79.7	-37.1
1909.800000	11458.705500	-49.5	-79.1	-36.5
1850.200000	12951.331600	-45	-74.6	-32
1880.000000	13160.044300	-44.7	-74.3	-31.7
1909.800000	13368.761400	-45.2	-74.8	-32.2
1850.200000	14801.529300	-45.3	-74.9	-32.3
1880.000000	15039.902400	-44.1	-73.7	-31.1
1909.800000	15278.273600	-44.6	-74.2	-31.6
1850.200000	16651.578200	-44.5	-74.1	-31.5
1880.000000	16919.828200	-44.3	-73.9	-31.3
1909.800000	17188.125100	-43.9	-73.5	-30.9
1850.200000	18501.845000	-42.8	-72.4	-29.8
1880.000000	18799.766500	-38.5	-68.1	-25.5
1909.800000	19097.862700	-38.5	-68.1	-25.5
1850.200000	20352.137300	-37.8	-67.4	-24.8
1880.000000	20680.187500	-37.6	-67.2	-24.6
1909.800000	21007.906500	-36.4	-66	-23.4

PAGE NO.

38 of 49.

NAME OF TEST: Unwanted Emissions (Transmitter Conducted)
 g02c0095: 2002-Dec-13 Fri 15:41:00
 STATE: 2:High Power EGPRS1900

FREQUENCY TUNED, MHz	FREQUENCY EMISSION, MHz	LEVEL, dBm	LEVEL, dBc	MARGIN, dB
1850.200000	3700.405000	-55.4	-79.4	-42.4
1880.000000	3759.781200	-55.9	-79.9	-42.9
1909.800000	3819.480600	-55.5	-79.5	-42.5
1850.200000	5550.504600	-56	-80	-43
1880.000000	5639.847100	-55.9	-79.9	-42.9
1909.800000	5729.282100	-55.4	-79.4	-42.4
1850.200000	7400.892600	-48.8	-72.8	-35.8
1880.000000	7520.114000	-49	-73	-36
1909.800000	7639.208500	-49.9	-73.9	-36.9
1850.200000	9250.869600	-49.7	-73.7	-36.7
1880.000000	9399.762100	-49.4	-73.4	-36.4
1909.800000	9548.932800	-49.3	-73.3	-36.3
1850.200000	11101.361200	-48.5	-72.5	-35.5
1880.000000	11279.752200	-48.8	-72.8	-35.8
1909.800000	11458.662200	-49.2	-73.2	-36.2
1850.200000	12951.629000	-45.6	-69.6	-32.6
1880.000000	13159.931800	-44.6	-68.6	-31.6
1909.800000	13368.470600	-44.6	-68.6	-31.6
1850.200000	14801.640800	-43	-67	-30
1880.000000	15039.909800	-44.5	-68.5	-31.5
1909.800000	15278.525400	-44.4	-68.4	-31.4
1850.200000	16651.911400	-43.9	-67.9	-30.9
1880.000000	16919.764600	-43.7	-67.7	-30.7
1909.800000	17188.048100	-41.7	-65.7	-28.7
1850.200000	18502.093800	-43.1	-67.1	-30.1
1880.000000	18800.200700	-37.7	-61.7	-24.7
1909.800000	19098.051300	-38.3	-62.3	-25.3
1850.200000	20352.249800	-37.1	-61.1	-24.1
1880.000000	20679.830100	-35.6	-59.6	-22.6
1909.800000	21008.038800	-36.5	-60.5	-23.5

PAGE NO. 39 of 49.

NAME OF TEST: Field Strength of Spurious Radiation

SPECIFICATION: 47 CFR 2.1053(a)


GUIDE: ANSI/TIA/EIA-603-1992/2001, Paragraph 1.2.12 and Table 16, 47 CFR 22.917

MEASUREMENT PROCEDURE

1.2.12.1 Definition: Radiated spurious emissions are emissions from the equipment when transmitting into a non-radiating load on a frequency or frequencies which are outside an occupied band sufficient to ensure transmission of information of required quality for the class of communications desired.

1.2.12.2 Method of Measurement

- A) Connect the equipment as illustrated
- B) Adjust the spectrum analyzer for the following settings:
 - 1) Resolution Bandwidth 100 kHz (<1 GHZ), 1 MHZ (> 1GHz).
 - 2) Video Bandwidth \geq 3 times Resolution Bandwidth, or 30 kHz (22.917)
 - 3) Sweep Speed \leq 2000 Hz/second
 - 4) Detector Mode = Mean or Average Power
- C) Place the transmitter to be tested on the turntable in the standard test site. The transmitter is transmitting into a non-radiating load which is placed on the turntable. The RF cable to this load should be of minimum length.

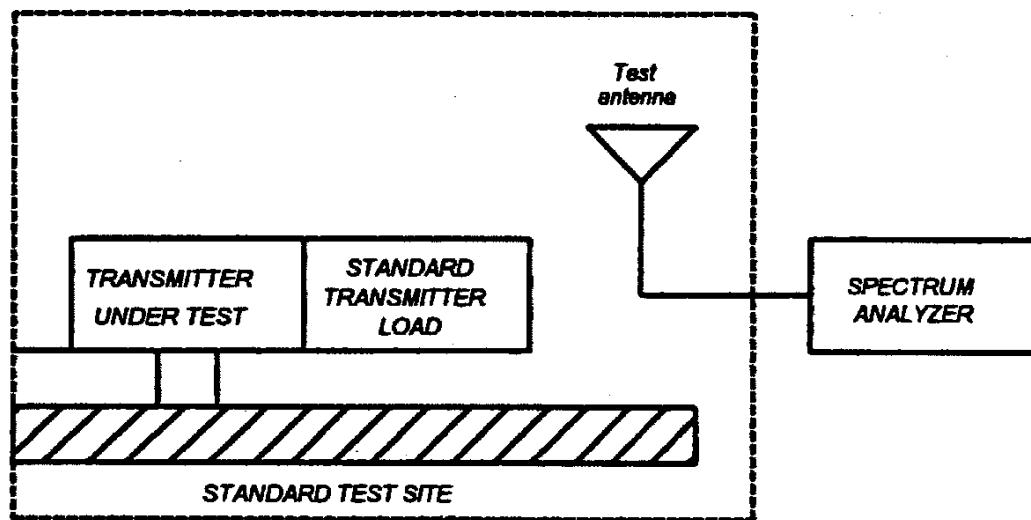

PAGE NO.


40 of 49.

NAME OF TEST: Field Strength of Spurious Radiation (Cont.)

D) For each spurious measurement the test antenna should be adjusted to the correct length for the frequency involved. This length may be determined from a calibration ruler supplied with the equipment. Measurements shall be made from the lowest radio frequency generated in the equipment to the tenth harmonic of the carrier, except for the region close to the carrier equal to \pm the test bandwidth (see section 1.3.4.4).

E) For each spurious frequency, raise and lower the test antenna from 1 m to 4 m to obtain a maximum reading on the spectrum analyzer with the test antenna at horizontal polarity. Repeat this procedure to obtain the highest possible reading. Record this maximum reading.

F) Repeat step E) for each spurious frequency with the test antenna polarized vertically.

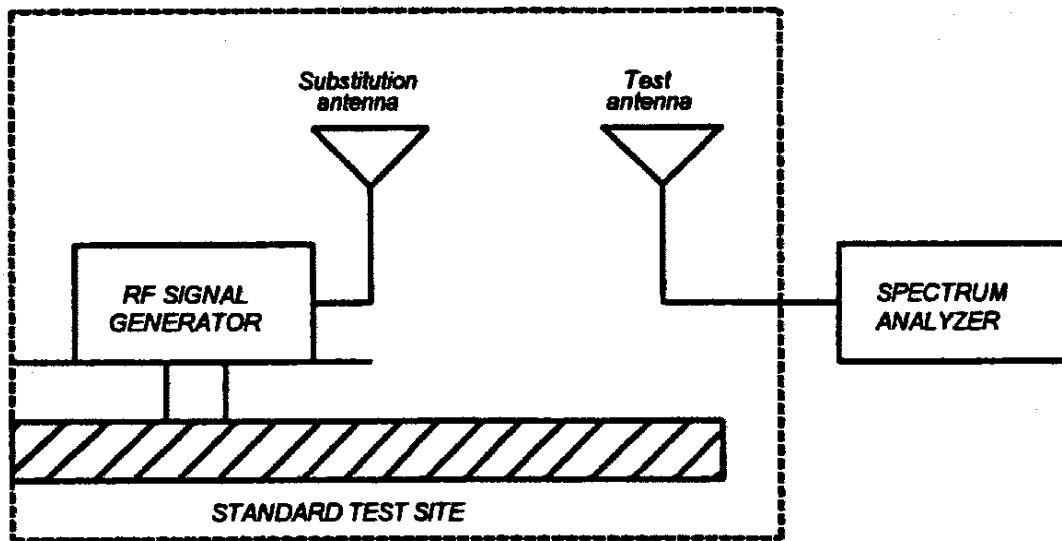

G) Reconnect the equipment as illustrated.

H) Keep the spectrum analyzer adjusted as in step B).

I) Remove the transmitter and replace it with a substitution antenna (the antenna should be half-wavelength for each frequency involved). The center of the substitution antenna should be approximately at the same location as the center of the transmitter. At lower frequencies, where the substitution antenna is very long, this will be impossible to achieve when the antenna is polarized vertically. In such case the lower end of the antenna should be 0.3 m above the ground.

PAGE NO.

41 of 49.

NAME OF TEST: Field Strength of Spurious Radiation (Cont.)

J) Feed the substitution antenna at the transmitter end with a signal generator connected to the antenna by means of a non-radiating cable. With the antennas at both ends horizontally polarized and with the signal generator tuned to a particular spurious frequency, raise and lower the test antenna to obtain a maximum reading at the spectrum analyzer. Adjust the level of the signal generator output until the previously recorded maximum reading for this set of conditions is obtained. This should be done carefully repeating the adjustment of the test antenna and generator output.

K) Repeat step J) with both antennas vertically polarized for each spurious frequency.

L) Calculate power in dBm into a reference ideal half-wave dipole antenna by reducing the readings obtained in steps J) and K) by the power loss in the cable between the generator and the antenna and further corrected for the gain of the substitution antenna used relative to an ideal half-wave dipole antenna.

M) The levels recorded in step L) are absolute levels of radiated spurious emissions in dBm. The radiated spurious emissions in dB can be calculated by the following:

Radiated spurious emissions dB =
 $10\log_{10}(\text{TX power in watts}/0.001) - \text{the levels in step l})$

NOTE: It is permissible that other antennas provided can be referenced to a dipole.

Test Equipment:

Asset (as applicable)	Description	s/n	Cycle	Last Cal
Per ANSI C63.4-1992/2000 Draft, 10.1.4				
<u>TRANSDUCER</u>				
i00088	EMCO 3109-B 25MHz-300MHz	2336	12 mo.	Sep-02
i00065	EMCO 3301-B Active Monopole	2635	12 mo.	Sep-02
i00089	Aprel 2001 200MHz-1GHz	001500	12 mo.	Sep-02
i00103	EMCO 3115 1GHz-18GHz	9208-3925	12 mo.	Sep-02
<u>AMPLIFIER</u>				
i00028	HP 8449A	2749A00121	12 mo.	Mar-02
Per ANSI C63.4-1992/2000 Draft, 10.1.4				
Per ANSI C63.4-1992/2000 Draft, 10.1.4				
<u>SPECTRUM ANALYZER</u>				
i00029	HP 8563E	3213A00104	12 mo.	Jan-02
i00033	HP 85462A	3625A00357	12 mo.	Jan-02
i00048	HP 8566B	2511AD1467	6 mo.	Jul-02

PAGE NO.

42 of 49.

NAME OF TEST: Field Strength of Spurious Radiation
 g02c0057: 2002-Dec-10 Tue 14:11:00
 GSM850

FREQUENCY TUNED, MHz	FREQUENCY EMISSION, MHz	ERP, dBm	ERP, dbc
824.200000	1648.430000	-46.2	-73.9
836.000000	1671.872499	-49.2	-76.8
848.800000	1697.633333	-50.2	-77.8
824.200000	2472.815000	-55.9	-83.6
836.000000	2507.813332	-50.6	-78.3
848.800000	2546.208334	-53.2	-80.9
824.200000	3296.831666	-54.3	-81.9
836.000000	3344.307498	-53.8	-81.5
848.800000	3395.468334	-52.8	-80.5
824.200000	4121.296666	-55.8	-83.5
836.000000	4180.376665	-55.1	-82.8
848.800000	4243.873334	-54	-81.7
824.200000	4945.448332	-56	-83.6
836.000000	5015.334164	-55.9	-83.5
848.800000	5092.833335	-55.7	-83.3
824.200000	5769.856665	-54.6	-82.2
836.000000	5851.486664	-55	-82.7
848.800000	5941.703335	-55.4	-83.1
824.200000	6594.388331	-54.5	-82.2
836.000000	6688.029164	-52.9	-80.5
848.800000	6790.428335	-51.7	-79.4
824.200000	7418.861664	-52	-79.6
836.000000	7523.508330	-52.9	-80.6
848.800000	7638.848336	-51.7	-79.3
824.200000	8242.758331	-51	-78.6
836.000000	8359.899163	-51.3	-78.9
848.800000	8487.548336	-50.8	-78.4

PERFORMED BY:


 Doug Noble, B.A.S. E.E.T.

PAGE NO.

43 of 49.

NAME OF TEST: Field Strength of Spurious Radiation
 g02c0056: 2002-Dec-10 Tue 10:57:00
 EGPRS850

FREQUENCY TUNED, MHz	FREQUENCY EMISSION, MHz	ERP, dBm	ERP, dbc
824.200000	1648.428333	-58.6	-82.5
836.000000	1672.048333	-58.2	-82.0
848.800000	1697.588334	-60.3	-83.2
824.200000	2472.482500	-61.7	-83.8
836.000000	2507.780000	-53.8	-77.7
848.800000	2546.438334	-56	-79.8
824.200000	3296.424167	-58.4	-82.2
836.000000	3344.005833	-56.5	-80.3
848.800000	3395.199167	-56.1	-80.0
824.200000	4120.390834	-56.5	-80.3
836.000000	4180.255000	-56.5	-80.3
848.800000	4243.705834	-57.5	-81.3
824.200000	4944.546668	-56.7	-80.6
836.000000	5016.085833	-55.9	-79.7
848.800000	5092.695001	-56.4	-80.3
824.200000	5768.755002	-55.1	-78.9
836.000000	5852.122500	-54.1	-78.0
848.800000	5941.315002	-55.2	-79.0
824.200000	6592.740835	-53.5	-77.3
836.000000	6688.048333	-50.8	-74.7
848.800000	6789.982502	-53.8	-77.7
824.200000	7416.749169	-52.7	-76.6
836.000000	7524.070833	-53.5	-77.4
848.800000	7639.288336	-51.8	-75.7
824.200000	8240.677503	-51.7	-75.9
836.000000	8359.856667	-50.8	-74.7
848.800000	8487.769169	-50.7	-77.5

PERFORMED BY:


 Doug Noble, B.A.S. E.E.T.

PAGE NO. 44 of 49.

NAME OF TEST: Field Strength of Spurious Radiation

g02c0059: 2002-Dec-11 Wed 08:08:00

GSM1900

FREQUENCY TUNED, MHz	FREQUENCY EMISSION, MHz	EIRP, dBm	EIRP, dbc
1880.000000	3760.180000	-34.3	-63.4
1880.000000	5642.540000	-41.6	-70.7
1880.000000	7520.320000	-38.6	-67.7
1880.000000	9399.653333	-33.7	-62.7
1880.000000	11280.353333	-35	-64.1
1880.000000	13160.211667	-35.5	-64.6
1880.000000	15040.211667	-34	-63.1
1880.000000	16920.211667	-33.7	-62.7

g02c0060: 2002-Dec-11 Wed 09:41:00

EGPRS1900

FREQUENCY TUNED, MHz	FREQUENCY EMISSION, MHz	EIRP, dBm	EIRP, dbc
1880.000000	3760.053333	-38.8	-66.9
1880.000000	5639.993333	-42.3	-70.4
1880.000000	7520.193333	-40.6	-70.7
1880.000000	9400.133333	-37.5	-65.6
1880.000000	11280.033333	-35.9	-64.0
1880.000000	13160.000000	-34.2	-62.3
1880.000000	15040.003333	-34.3	-62.4
1880.000000	16920.003333	-32.5	-60.6

PERFORMED BY:


 Doug Noble, B.A.S. E.E.T.

PAGE NO. 45 of 49.

NAME OF TEST: Frequency Stability (Temperature Variation)

SPECIFICATION: 47 CFR 2.1055(a)(1)

TEST CONDITIONS: As Indicated

TEST EQUIPMENT: As per previous page

MEASUREMENT PROCEDURE


1. The EUT and test equipment were set up as shown on the following page.
2. With all power removed, the temperature was decreased to -30°C and permitted to stabilize for three hours. Power was applied and the maximum change in frequency was noted within one minute.
3. With power OFF, the temperature was raised in 10°C steps. The sample was permitted to stabilize at each step for at least one-half hour. Power was applied and the maximum frequency change was noted within one minute.
4. The temperature tests were performed for the worst case.
5. MEASUREMENT RESULTS: ATTACHED

PAGE NO.

46 of 49.

TRANSMITTER TEST SET-UP

TEST A. OPERATIONAL STABILITY
 TEST B. CARRIER FREQUENCY STABILITY
 TEST C. OPERATIONAL PERFORMANCE STABILITY
 TEST D. HUMIDITY
 TEST E. VIBRATION
 TEST F. ENVIRONMENTAL TEMPERATURE
 TEST G. FREQUENCY STABILITY: TEMPERATURE VARIATION
 TEST H. FREQUENCY STABILITY: VOLTAGE VARIATION

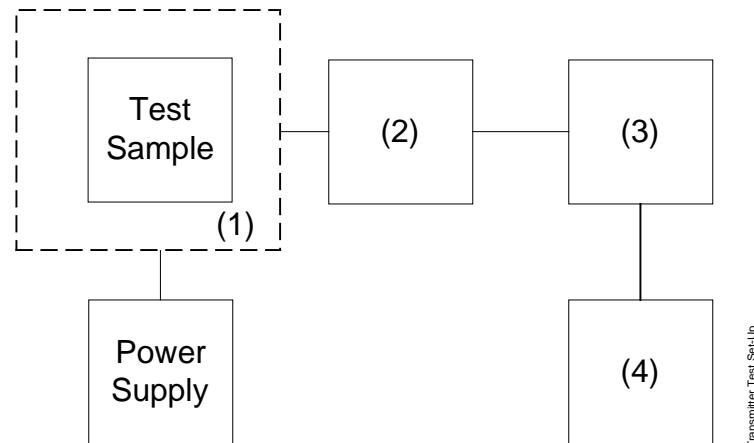

Transmitter Test Set Up

Asset Description (as applicable)		s/n
(1) TEMPERATURE, HUMIDITY, VIBRATION		
i00027 Tenney Temp. Chamber		9083-765-234
i00 Weber Humidity Chamber		
i00 L.A.B. RVH 18-100		
(2) COAXIAL ATTENUATOR		
i00122 NARDA 766-10		7802
i00123 NARDA 766-10		7802A
i00113 SIERRA 661A-3D		1059
i00069 BIRD 8329 (30 dB)		10066
(3) R.F. POWER		
i00014 HP 435A POWER METER		1733A05839
i00039 HP 436A POWER METER		2709A26776
i00020 HP 8901A POWER MODE		2105A01087
(4) FREQUENCY COUNTER		
i00042 HP 5383A		1628A00959
i00019 HP 5334B		2704A00347
i00020 HP 8901A		2105A01087

PAGE NO. 47 of 49.

NAME OF TEST: Frequency Stability (Temperature Variation)

GSM/GPRS/EGPRS CELLULAR BAND

°C	Change, Hz	Change, ppm
-30	+48	0.1
-20	+22	0.0
-10	+17	0.0
0	-39	0.0
10	-25	0.0
20	-27	0.0
30	20	0.0
40	28	0.0
50	21	0.0

GSM/GPRS/EGPRS PCS BAND

°C	Change, Hz	Change, ppm
-30	+36	0.0
-20	+40	0.0
-10	-36	0.0
0	-41	0.0
10	+42	0.0
20	-44	0.0
30	-28	0.0
40	+46	0.0
50	-44	0.0

PAGE NO. 48 of 49.

NAME OF TEST: Frequency Stability (Voltage Variation)

SPECIFICATION: 47 CFR 2.1055 (b)(1)

TEST EQUIPMENT: As per previous page

MEASUREMENT PROCEDURE

1. The EUT was placed in a temperature chamber at $25\pm5^{\circ}\text{C}$ and connected as for "Frequency Stability - Temperature Variation" test.
2. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value measured at the input to the EUT.
3. The variation in frequency was measured for the worst case.

RESULTS: Frequency Stability (Voltage Variation)

GSM/GPRS/EGPRS CELLULAR BAND

BATTERY END POINT (Voltage) = 3.2

% of STV	Voltage	Frequency, MHz	Change, Hz	Change, ppm
100	3.9	836.399973	-27	0.0
B.E.P.	3.2	836.400020	+20	0.0

GSM/GPRS/EGPRS PCS BAND

BATTERY END POINT (Voltage) = 3.2

% of STV	Voltage	Frequency, MHz	Change, Hz	Change, ppm
100	3.9	1879.999956	-44	0.0
B.E.P.	3.2	1880.000019	+19	0.0

PAGE NO. 49 of 49.

NAME OF TEST: Necessary Bandwidth and Emission Bandwidth

SPECIFICATION: 47 CFR 2.202(g)

MODULATION = 300KGXW

NECESSARY BANDWIDTH:

NECESSARY BANDWIDTH (B_N), kHz = 243, Measured
(measured at the 99.75% power bandwidth)

MODULATION = 300KG7W

NECESSARY BANDWIDTH:

NECESSARY BANDWIDTH (B_N), kHz = 237, Measured
(measured at the 99.75% power bandwidth)

PERFORMED BY:


Doug Noble, B.A.S. E.E.T.

END OF TEST REPORT

TESTIMONIAL
AND
STATEMENT OF CERTIFICATION

THIS IS TO CERTIFY THAT:

1. THAT the application was prepared either by, or under the direct supervision of, the undersigned.
2. THAT the technical data supplied with the application was taken under my direction and supervision.
3. THAT the data was obtained on representative units, randomly selected.
4. THAT, to the best of my knowledge and belief, the facts set forth in the application and accompanying technical data are true and correct.

CERTIFYING ENGINEER:



Morton Flom, P. Eng.