



M. Flom Associates, Inc. - Global Compliance Center

3356 North San Marcos Place, Suite 107, Chandler, Arizona 85225-7176

www.mflom.com general@mflom.com (480) 926-3100, FAX: 926-3598

Date: May 27, 2003

Applicant: Nokia Corporation
Elektroniikkatie 10
Fin-90570
Oulu, Finland

Attention of: Kare Oksanen, R&D Type Approvals
kare.oksanen@nokia.com
011 358 7180 08000; FAX: 011 358 7180 47222

Equipment: RH-20
FCC ID: LJPRH-20
P.O. Number: Kare Oksanen 05/05/2003
FCC Rules: 24E, Confidentiality

Gentlemen:

Enclosed please find your copies your copy of the Engineering Test Report for which you are subject to the restrictions as listed on the attached summary.

Our invoice for services has already been sent to you.

Should you need any clarification, just fax or phone. Thank you again for this order - it has been a pleasure to be of service.

Sincerely yours,

A handwritten signature in black ink, appearing to read 'M. Flom, P. Eng.'

Morton Flom, P. Eng.

enclosure(s)
MF/cva



M. Flom Associates, Inc. - Global Compliance Center

3356 North San Marcos Place, Suite 107, Chandler, Arizona 85225-7176

www.mflom.com general@mflom.com (480) 926-3100, FAX: 926-3598

SUMMARY OF RESTRICTIONS

1. All submissions to the FCC are subject to their Examiner's interpretation.

2. Please allow from 60 to 90 days before hearing from the FCC with regard to any submission.

3. The FCC can set aside any action; modify or set aside any action, within 30 days. (FCC Rule 1.108, 1.113).

4. Under Rule 2.803, if device is not type accepted/certified then it must **NOT** be sold, leased, offered for sale, imported, shipped or distributed or advertised for sale.

5. FCC can revoke its certificates at any time if the equipment does not meet or CONTINUE to meet their Rules. (Rule Parts 2.927, 2.939).

6. FCC can request a sample at any time (2.936).

M. FLOM ASSOCIATES, INC.

A handwritten signature in black ink, appearing to read 'M. Flom, P. Eng.'

Morton Flom, P. Eng.



M. Flom Associates, Inc. - Global Compliance Center

3356 North San Marcos Place, Suite 107, Chandler, Arizona 85225-7176

www.mflom.com general@mflom.com (480) 926-3100, FAX: 926-3598

T R A N S M I T T E R C E R T I F I C A T I O N

of

FCC ID: LJPRH-20
MODEL: RH-20

SERIAL NUMBERS OF UNITS TESTED:
004400/23/166330/1 and 004400/23/166315/2

to

FEDERAL COMMUNICATIONS COMMISSION

Rule Part(s) 24E, Confidentiality

DATE OF REPORT: May 21, 2003

ON THE BEHALF OF THE APPLICANT:

Nokia Corporation

AT THE REQUEST OF:

P.O. Kare Oksanen 05/05/2003

Nokia Corporation
Elektroniikkatie 10
Fin-90570
Oulu, Finland

Attention of:

Kare Oksanen, R&D Type Approvals

kare.oksanen@nokia.com

011 358 7180 08000; FAX: 011 358 7180 47222

SUPERVISED BY:


Morton Flom, P. Eng.

THE APPLICANT HAS BEEN CAUTIONED AS TO THE FOLLOWING:

15.21 INFORMATION TO USER.

The users manual or instruction manual for an intentional radiator shall caution the user that changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

15.27(a) SPECIAL ACCESSORIES.

Equipment marketed to a consumer must be capable of complying with the necessary regulations in the configuration in which the equipment is marketed. Where special accessories, such as shielded cables and/or special connectors are required to enable an unintentional or intentional radiator to comply with the emission limits in this part, the equipment must be marketed with, i.e. shipped and sold with, those special accessories. However, in lieu of shipping or packaging the special accessories with the unintentional or intentional radiator, the responsible party may employ other methods of ensuring that the special accessories are provided to the consumer, without additional charge.

Information detailing any alternative method used to supply the special accessories for a grant of equipment authorization or retained in the verification records, as appropriate. The party responsible for the equipment, as detailed in § 2.909 of this chapter, shall ensure that these special accessories are provided with the equipment. The instruction manual for such devices shall include appropriate instructions on the first page of text concerned with the installation of the device that these special accessories must be used with the device. It is the responsibility of the user to use the needed special accessories supplied with the equipment.

TABLE OF CONTENTS

<u>RULE</u>	<u>DESCRIPTION</u>	<u>PAGE</u>
	Test Report	1
2.1033(c)	General Information Required	2
2.1033(c) (14)	Rule Summary	5
	Standard Test Conditions and Engineering Practices	6
2.1046(a), 24.232(b)		
	Carrier Output Power (Radiated)	7
2.1051, 2.1049(c), 24, 24.238(b)		
	Transmitter Conducted Measurements	9
2.1053(a)	Field Strength of Spurious Radiation	21
2.1055(a) (1), 24.235		
	Frequency Stability (Temperature Variation)	29
2.1055(b) (1)	Frequency Stability (Voltage Variation)	32
2.202(g)	Necessary Bandwidth and Emission Bandwidth	33

PAGE NO.

1 of 33.

Required information per ISO/IEC Guide 25-1990, paragraph 13.2:

a) TEST REPORT

b) Laboratory: M. Flom Associates, Inc.
(FCC: 31040/SIT) 3356 N. San Marcos Place, Suite 107
(Canada: IC 2044) Chandler, AZ 85225

c) Report Number: d0350028

d) Client: Nokia Corporation
Elektronika 10
Fin-90570
Oulu, Finland

e) Identification: RH-20
FCC ID: LJPRH-20
Description: GSM/GPRS, EGPRS (EDGE) Cellular Phone
900/1800/1900

f) EUT Condition: Not required unless specified in individual tests.

g) Report Date: May 21, 2003
EUT Received: May 5, 2003

h, j, k): As indicated in individual tests.

i) Sampling method: No sampling procedure used.

l) Uncertainty: In accordance with MFA internal quality manual.

m) Supervised by:



Morton Flom, P. Eng.

n) Results: The results presented in this report relate only to the item tested.

o) Reproduction: This report must not be reproduced, except in full, without written permission from this laboratory.

ACCESSORIES:

<u>TYPE</u>	<u>MODEL</u>	<u>SERIAL NUMBER</u>	<u>MFA NUMBER</u>
EUT	RH-20	004400/23/166330/1	S00726
EUT	RH-20	004400/23/166315/2	S00727
Music Stand	DT-1	N/A	S00728
Desk Top Stand	DCV-14	N/A	S00729
Headset	HS-5	N/A	S00730
Boom Headset	HDB-4	N/A	S00731
Battery	BLD-3	N/A	S00732
Battery	BLD-3	N/A	S00560
Charger	ACP-12U	N/A	S00465
Charger	ACP-8U	N/A	S01280
Charger	ACP-7U	N/A	S01248
Stereo Headset	HDS-3	N/A	S00566
Loopset	LPS-4	N/A	S00764

PAGE NO. 2 of 33.

LIST OF GENERAL INFORMATION REQUIRED FOR CERTIFICATION

IN ACCORDANCE WITH FCC RULES AND REGULATIONS,
VOLUME II, PART 2 AND TO

24E, Confidentiality

Sub-part 2.1033

(c) (1): NAME AND ADDRESS OF APPLICANT:

Nokia Corporation
Elektroniikkatie 10
Fin-90570
Oulu, Finland

MANUFACTURERS:

Nokia Komárom kft.
2900 Komárom
Nokia u. 1.
Hungary

BEIJING CAPITAL MOBILE TELECOMMUNICATIONS LTD.
Beijing Economic & Technological Development
Area No. 5
Zhonlu, Beijing
100176 P.R. China

(c) (2): FCC ID: LJPRH-20

MODEL NO: RH-20

(c) (3): INSTRUCTION MANUAL(S):

PLEASE SEE ATTACHED EXHIBITS

(c) (4): TYPE OF EMISSION: 300KGXW, 300KG7W

(c) (5): FREQUENCY RANGE, MHz: 1850.2 to 1909.8

(c) (6): POWER RATING, Watts: 1
____ Switchable ____ Variable N/A

(c) (7): MAXIMUM POWER RATING, Watts: 1

PAGE NO.

3 of 33.

Subpart 2.1033 (continued)

(c) (8) : VOLTAGES & CURRENTS IN ALL ELEMENTS IN FINAL R. F. STAGE,
INCLUDING FINAL TRANSISTOR OR SOLID STATE DEVICE:

COLLECTOR CURRENT, A = 1.25 Maximum, Peak
COLLECTOR VOLTAGE, Vdc = 3.9
SUPPLY VOLTAGE, Vdc = 4.2 Maximum

(c) (9) : TUNE-UP PROCEDURE:

PLEASE SEE ATTACHED EXHIBITS

(c) (10) : CIRCUIT DIAGRAM/CIRCUIT DESCRIPTION:

Including description of circuitry & devices provided for determining and stabilizing frequency, for suppression of spurious radiation, for limiting modulation and limiting power.

PLEASE SEE ATTACHED EXHIBITS

(c) (11) : LABEL INFORMATION:

PLEASE SEE ATTACHED EXHIBITS

(c) (12) : PHOTOGRAPHS:

PLEASE SEE ATTACHED EXHIBITS

(c) (13) : DIGITAL MODULATION DESCRIPTION:

 ATTACHED EXHIBITS
x N/A


(c) (14) : TEST AND MEASUREMENT DATA:

FOLLOWS

PAGE NO.

4 of 33.

M. Flom Associates, Inc. is accredited by the American Association for Laboratory Accreditation (A2LA) as shown in the scope below.

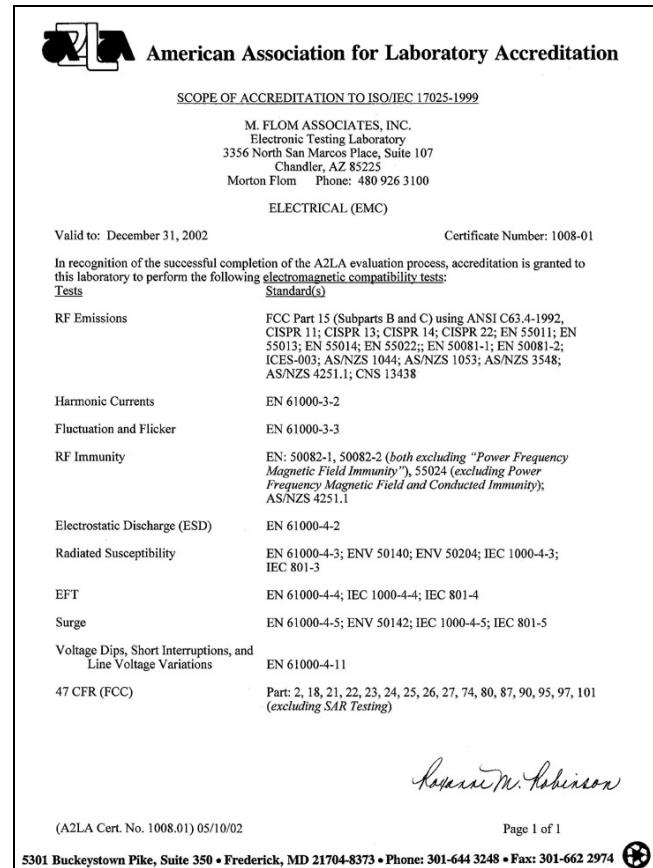

"This laboratory is accredited by the American Association for Laboratory Accreditation (A2LA) and the results shown in this report have been determined in accordance with the laboratory's terms of accreditation unless stated otherwise in the report."

Should this report contain any data for tests for which we are not accredited, or which have been undertaken by a subcontractor that is not A2LA accredited, such data would not be covered by this laboratory's A2LA accreditation.

PAGE NO.

5 of 33.

Sub-part

2.1033(c) (14) : TEST AND MEASUREMENT DATA

All tests and measurement data shown were performed in accordance with FCC Rules and Regulations, Volume II; Part 2, Sub-part J, Sections 2.947, 2.1033(c), 2.1041, 2.1046, 2.1047, 2.1079, 2.1051, 2.1053, 2.1055, 2.1057 and the following individual Parts:

- ____ 21 - Domestic Public Fixed Radio Services
- ____ 22 - Public Mobile Services
- ____ 22 Subpart H - Cellular Radiotelephone Service
- ____ 22.901(d) - Alternative technologies and auxiliary services
- ____ 23 - International Fixed Public Radiocommunication services
- x 24 - Personal Communications Services
- ____ 74 Subpart H - Low Power Auxiliary Stations
- ____ 80 - Stations in the Maritime Services
- ____ 80 Subpart E - General Technical Standards
- ____ 80 Subpart F - Equipment Authorization for Compulsory Ships
- ____ 80 Subpart K - Private Coast Stations and Marine Utility Stations
- ____ 80 Subpart S - Compulsory Radiotelephone Installations for Small Passenger Boats
- ____ 80 Subpart T - Radiotelephone Installation Required for Vessels on the Great Lakes
- ____ 80 Subpart U - Radiotelephone Installations Required by the Bridge-to-Bridge Act
- ____ 80 Subpart V - Emergency Position Indicating Radiobeacons (EPIRB'S)
- ____ 80 Subpart W - Global Maritime Distress and Safety System (GMDSS)
- ____ 80 Subpart X - Voluntary Radio Installations
- ____ 87 - Aviation Services
- ____ 90 - Private Land Mobile Radio Services
- ____ 94 - Private Operational-Fixed Microwave Service
- ____ 95 Subpart A - General Mobile Radio Service (GMRS)
- ____ 95 Subpart C - Radio Control (R/C) Radio Service
- ____ 95 Subpart D - Citizens Band (CB) Radio Service
- ____ 95 Subpart E - Family Radio Service
- ____ 95 Subpart F - Interactive Video and Data Service (IVDS)
- ____ 97 - Amateur Radio Service
- ____ 101 - Fixed Microwave Services

PAGE NO.

6 of 33.

STANDARD TEST CONDITIONS
and
ENGINEERING PRACTICES

Except as noted herein, the following conditions and procedures were observed during the testing:

In accordance with ANSI C63.4-1992/2000 Draft, section 6.1.9, and unless otherwise indicated in the specific measurement results, the ambient temperature of the actual EUT was maintained within the range of 10° to 40°C (50° to 104 °F) unless the particular equipment requirements specify testing over a different temperature range. Also, unless otherwise indicated, the humidity levels were in the range of 10% to 90% relative humidity.

Prior to testing, the EUT was tuned up in accordance with the manufacturer's alignment procedures. All external gain controls were maintained at the position of maximum and/or optimum gain throughout the testing.

Measurement results, unless otherwise noted, are worst case measurements.

FOR PCS EQUIPMENT:

Pursuant to Section 24.51(d), the EUT complies with IEEE C95.1-1991, "IEEE Standards for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz."

The EUT uses digital modulation, as such, measurements of the modulation characteristics are not applicable. The applicant has provided a description of the modulation particular to the EUT.

Pursuant to Section 24.238(c), the EUT was tested at it's lowest and highest possible tuned frequencies.

PAGE NO.

7 of 33.

NAME OF TEST:

ERP Carrier Power (Radiated)


SPECIFICATION:

TIA/EIA 603A (Substitution Method)

Definition: The average radiated power of device is the equivalent power required, when delivered to a substitution antenna, to produce at a distant point the same average received power as produced by the licensed device.

Method of Measurement:

a) Connect the equipment as illustrated. Place the transmitter to be tested on the turntable in the standard test site.

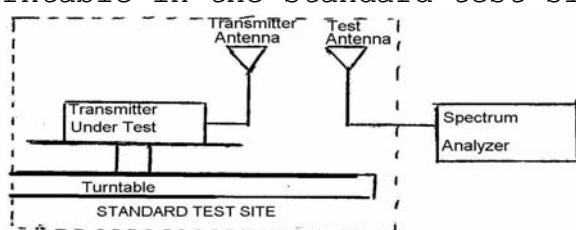

b) Raise and lower the test antenna from 1m to 4m and rotate turntable from 0° to 360°. Record the highest received signal in dB as E_T .

c) Replace the transmitter under test with a substitution antenna. The center of the antenna should be at the same location as the transmitter under test. Connect the antenna to a signal generator with a known output power level using the same modulation as with the transmitter. Raise and lower the test antenna like in step b) and record the highest received signal in dB as E_S .

d) Calculate radiated power as following:

$$\text{Radiated power} = \text{Level} + E_T - E_S + \text{Gain}_{\text{Ant}}$$

E_T Signal level received from transmitter

E_S Signal level received from substitution antenna

RESULTS ATTACHED

PAGE NO.

8 of 33.

TEST RESULTS FOR: ERP Carrier Power (Radiated)

Freq MHz	Level dBm	Antenna Gain	$E_T - E_s$ dBm	Radiated P Out dbm	Radiated P Out Watts
GSM1900/GPRS1900					
1850.2	26.6	+0.2 dBi	79.3-79.1	27.0 EIRP	0.501
1880.0	26.7	-0.5 dBi	79.6-78.2	27.6 EIRP	0.575
1909.8	26.1	-0.8 dBi	78.8-77.5	26.6 EIRP	0.457
EGPRS1900					
1850.2	21.6	+0.2 dBi	79.1-78.8	22.2 EIRP	0.166
1880.0	21.5	-0.5 dBi	78.0-78.9	20.1 EIRP	0.102
1909.8	21.0	-0.8 dBi	76.6-77.2	19.6 EIRP	0.091

SAMPLE CALCULATION:

$$P_{ANT\ OUT} + ANT\ GAIN + E_T - E_s = P.O. \text{ RADIATED}$$

$$26.6 + 0.2 + 79.3 - 79.1 = 27.0 \text{ dbm EIRP}$$

$$= 0.501 \text{ W EIRP}$$

ANTENNA: EMCO 3125-1880 dipole s/n 1010 cal. 21-Oct-02

PAGE NO. 9 of 33.

NAME OF TEST: Transmitter Conducted Measurements

SPECIFICATION: 47 CFR 2.1051: Unwanted (spurious) Emissions
2.1049(c), 24.238(b): Occupied Bandwidth
24: Emissions at Band Edges

GUIDE: As indicated on page **Error! Bookmark not defined.**

TEST EQUIPMENT: As per attached page

MEASUREMENT PROCEDURE

1. The EUT and test equipment were set up as shown on the following page with the Spectrum Analyzer connected.
2. The low and high channels for all RF powers within the designated frequency block(s) were measured.
3. MEASUREMENT RESULTS: ATTACHED

PERFORMED BY:

David Lee




PAGE NO.

10 of 33.

TRANSMITTER SPURIOUS EMISSION

TEST A. OCCUPIED BANDWIDTH (IN-BAND SPURIOUS)
TEST B. OUT-OF-BAND SPURIOUS

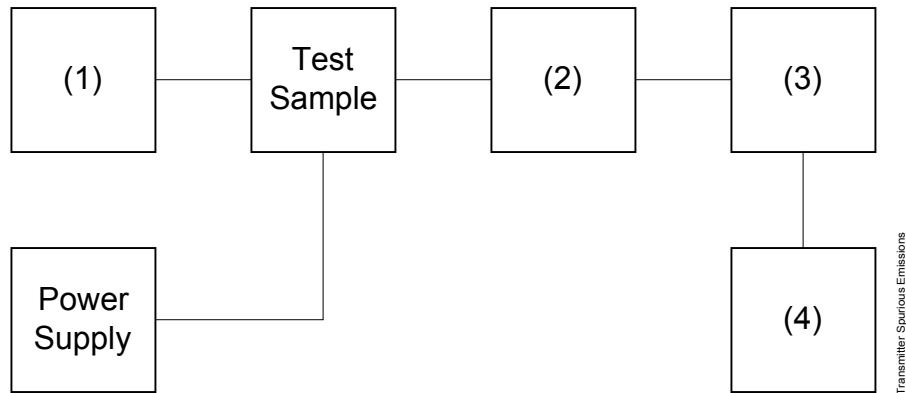

Asset Description (as applicable)	s/n
(1) <u>AUDIO OSCILLATOR/GENERATOR</u>	
i00010 HP 204D	1105A04683
i00017 HP 8903A	2216A01753
i00012 HP 3312A	1432A11250
(2) <u>COAXIAL ATTENUATOR</u>	
i00122 Narda 766-10	7802
i00123 Narda 766-10	7802A
i00069 Bird 8329 (30 dB)	1006
i00113 Sierra 661A-3D	1059
(3) <u>FILTERS; NOTCH, HP, LP, BP</u>	
i00126 Eagle TNF-1	100-250
i00125 Eagle TNF-1	50-60
i00124 Eagle TNF-1	250-850
(4) <u>SPECTRUM ANALYZER</u>	
i00048 HP 8566B	2511A01467
i00029 HP 8563E	3213A00104

PAGE NO.

11 of 33.

NAME OF TEST: Unwanted Emissions (Transmitter Conducted)
 g0350041: 2003-May-07 Wed 13:28:00
 STATE: 1:GSM 1900 Low Power

FREQUENCY TUNED, MHz	FREQUENCY EMISSION, MHz	LEVEL, dBm	LEVEL, dBc	MARGIN, dB
1850.200000	3700.548000	-62.1	-62.5	-42.1
1880.000000	3759.991000	-64	-64.4	-44
1905.200000	3810.647500	-81.9	-82.3	-61.9
1850.200000	5550.686000	-80.5	-80.9	-60.5
1880.000000	5639.832000	-80.9	-81.3	-60.9
1905.200000	5715.561500	-81.4	-81.8	-61.4
1850.200000	7400.683500	-75.9	-76.3	-55.9
1880.000000	7520.003000	-73	-73.4	-53
1905.200000	7620.622000	-75.2	-75.6	-55.2
1850.200000	9250.848500	-75.5	-75.9	-55.5
1880.000000	9400.012500	-76.3	-76.7	-56.3
1905.200000	9526.163500	-75.9	-76.3	-55.9
.....1850.200000	11101.419500	-75.7	-76.1	-55.7
1880.000000	11280.065000	-75.3	-75.7	-55.3
1905.200000	11431.372000	-73.4	-73.8	-53.4
1850.200000	12951.468200	-71.3	-71.7	-51.3
1880.000000	13160.141500	-70.9	-71.3	-50.9
1905.200000	13336.639500	-68.9	-69.3	-48.9
1850.200000	14801.809000	-70.6	-71	-50.6
1880.000000	15040.093600	-70.1	-70.5	-50.1
1905.200000	15241.509400	-69.7	-70.1	-49.7
1850.200000	16651.917500	-70.5	-70.9	-50.5
1880.000000	16920.167600	-68.7	-69.1	-48.7
1905.200000	17146.957200	-67.8	-68.2	-47.8
1850.200000	18502.229800	-69.1	-69.5	-49.1
1880.000000	18800.036700	-65	-65.4	-45
1905.200000	19051.906300	-63.4	-63.8	-43.4
1850.200000	20352.019100	-62.8	-63.2	-42.8
1880.000000	20679.882400	-62	-62.4	-42
1905.200000	20957.349300	-61.2	-61.6	-41.2

PERFORMED BY:

David Lee

PAGE NO.

12 of 33.

NAME OF TEST: Unwanted Emissions (Transmitter Conducted)
 g0350044: 2003-May-07 Wed 13:47:00
 STATE: 1:EGPRS Low Power

FREQUENCY TUNED, MHz	FREQUENCY EMISSION, MHz	LEVEL, dBm	LEVEL, dBc	MARGIN, dB
1850.200000	3700.416000	-77.2	-79.8	-57.2
1880.000000	3760.017500	-75.7	-78.3	-55.7
1905.200000	3810.331000	-80.4	-83	-60.4
1850.200000	5550.353500	-81.9	-84.5	-61.9
1880.000000	5639.830500	-81.5	-84.1	-61.5
1905.200000	5715.734500	-81.2	-83.8	-61.2
1850.200000	7400.889000	-75.9	-78.5	-55.9
1880.000000	7520.234500	-73.7	-76.3	-53.7
1905.200000	7620.831000	-75.6	-78.2	-55.6
1850.200000	9250.890000	-76.2	-78.8	-56.2
1880.000000	9400.169500	-76	-78.6	-56
1905.200000	9525.962000	-76	-78.6	-56
1850.200000	11101.433500	-75.4	-78	-55.4
1880.000000	11279.928500	-75.4	-78	-55.4
1905.200000	11431.063000	-74.8	-77.4	-54.8
1850.200000	12951.589200	-71.3	-73.9	-51.3
1880.000000	13159.781000	-70.5	-73.1	-50.5
1905.200000	13336.259000	-70.9	-73.5	-50.9
1850.200000	14801.554000	-69.3	-71.9	-49.3
1880.000000	15039.781900	-70.5	-73.1	-50.5
1905.200000	15241.372400	-69.2	-71.8	-49.2
1850.200000	16651.610700	-70	-72.6	-50
1880.000000	16920.020800	-69.5	-72.1	-49.5
1905.200000	17146.653700	-69	-71.6	-49
1850.200000	18502.208200	-68.3	-70.9	-48.3
1880.000000	18800.151800	-63.9	-66.5	-43.9
1905.200000	19051.810500	-64.5	-67.1	-44.5
1850.200000	20351.988800	-62.4	-65	-42.4
1880.000000	20680.108600	-61.8	-64.4	-41.8
1905.200000	20957.221300	-61.7	-64.3	-41.7

PERFORMED BY:

David Lee



PAGE NO.

13 of 33.

NAME OF TEST: Unwanted Emissions (Transmitter Conducted)
 g0350040: 2003-May-07 Wed 13:27:00
 STATE: 2:GSM 1900 High Power

FREQUENCY TUNED, MHz	FREQUENCY EMISSION, MHz	LEVEL, dBm	LEVEL, dBc	MARGIN, dB
1850.200000	3700.473500	-49.9	-79.1	-29.9
1880.000000	3760.149500	-51	-80.2	-31
1905.200000	3810.204500	-51.9	-81.1	-31.9
1850.200000	5550.748000	-50.5	-79.7	-30.5
1880.000000	5639.984500	-50.8	-80	-30.8
1905.200000	5715.762500	-51.2	-80.4	-31.2
1850.200000	7400.647500	-45	-74.2	-25
1880.000000	7520.058500	-44.9	-74.1	-24.9
1905.200000	7620.738500	-44.7	-73.9	-24.7
1850.200000	9250.972500	-45.4	-74.6	-25.4
1880.000000	9400.111000	-45.8	-75	-25.8
1905.200000	9526.091000	-45.1	-74.3	-25.1
1850.200000	11101.294000	-44.9	-74.1	-24.9
1880.000000	11280.137000	-45.1	-74.3	-25.1
1905.200000	11431.171500	-45.1	-74.3	-25.1
1850.200000	12951.335800	-41.3	-70.5	-21.3
1880.000000	13159.935500	-40.6	-69.8	-20.6
1905.200000	13336.373000	-41.1	-70.3	-21.1
1850.200000	14801.826500	-41	-70.2	-21
1880.000000	15040.247000	-40.1	-69.3	-20.1
1905.200000	15241.408800	-38.6	-67.8	-18.6
1850.200000	16651.860700	-39.4	-68.6	-19.4
1880.000000	16920.120500	-39.4	-68.6	-19.4
1905.200000	17146.882300	-40.1	-69.3	-20.1
1850.200000	18502.166300	-38.1	-67.3	-18.1
1880.000000	18799.964300	-34	-63.2	-14
1905.200000	19051.767400	-33.1	-62.3	-13.1
1850.200000	20352.211100	-32.4	-61.6	-12.4
1880.000000	20679.879000	-32.9	-62.1	-12.9
1905.200000	20957.290800	-31.7	-60.9	-11.7

PERFORMED BY:

David Lee

PAGE NO.

14 of 33.

NAME OF TEST: Unwanted Emissions (Transmitter Conducted)
 g0350043: 2003-May-07 Wed 13:45:00
 STATE: 2:EGPRS High Power

FREQUENCY TUNED, MHz	FREQUENCY EMISSION, MHz	LEVEL, dBm	LEVEL, dBc	MARGIN, dB
1850.200000	3700.297000	-51.3	-78.4	-31.3
1880.000000	3760.051500	-52.3	-79.4	-32.3
1905.200000	3810.296500	-51.5	-78.6	-31.5
1850.200000	5550.546000	-51.4	-78.5	-31.4
1880.000000	5640.233000	-51.8	-78.9	-31.8
1905.200000	5715.828000	-51.3	-78.4	-31.3
1850.200000	7400.774000	-46.3	-73.4	-26.3
1880.000000	7520.202500	-45.2	-72.3	-25.2
1905.200000	7620.611500	-44.8	-71.9	-24.8
1850.200000	9251.208500	-45.9	-73	-25.9
1880.000000	9400.052000	-45.2	-72.3	-25.2
1905.200000	9526.134500	-44.5	-71.6	-24.5
1850.200000	11101.203000	-44.7	-71.8	-24.7
1880.000000	11280.203000	-45	-72.1	-25
1905.200000	11431.307000	-45.2	-72.3	-25.2
1850.200000	12951.446300	-40.5	-67.6	-20.5
1880.000000	13159.858500	-40.8	-67.9	-20.8
1905.200000	13336.250500	-40.3	-67.4	-20.3
1850.200000	14801.812500	-39.8	-66.9	-19.8
1880.000000	15039.768900	-40.6	-67.7	-20.6
1905.200000	15241.542200	-39.6	-66.7	-19.6
1850.200000	16651.896900	-39.5	-66.6	-19.5
1880.000000	16919.956400	-39.5	-66.6	-19.5
1905.200000	17146.619500	-38.6	-65.7	-18.6
1850.200000	18502.112900	-37.4	-64.5	-17.4
1880.000000	18799.835300	-34	-61.1	-14
1905.200000	19052.121500	-33.4	-60.5	-13.4
1850.200000	20352.230200	-32.7	-59.8	-12.7
1880.000000	20679.896800	-31.4	-58.5	-11.4
1905.200000	20957.081500	-30.7	-57.8	-10.7

PERFORMED BY:


David Lee



PAGE NO.

15 of 33.

NAME OF TEST: Emission Masks (Occupied Bandwidth)
 g0350047: 2003-May-07 Wed 14:06:00
 STATE: 1:Low Power

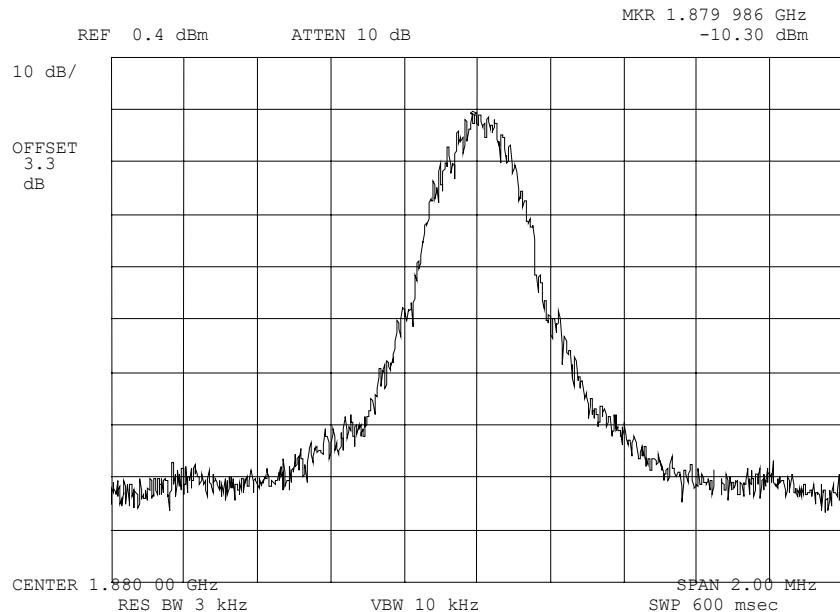

POWER: LOW
 MODULATION: GSM 1900 VOICE 1880MHz
 FINAL


PERFORMED BY:

David Lee

PAGE NO.

16 of 33.

NAME OF TEST: Emission Masks (Occupied Bandwidth)
g0350046: 2003-May-07 Wed 14:03:00
STATE: 2:High Power

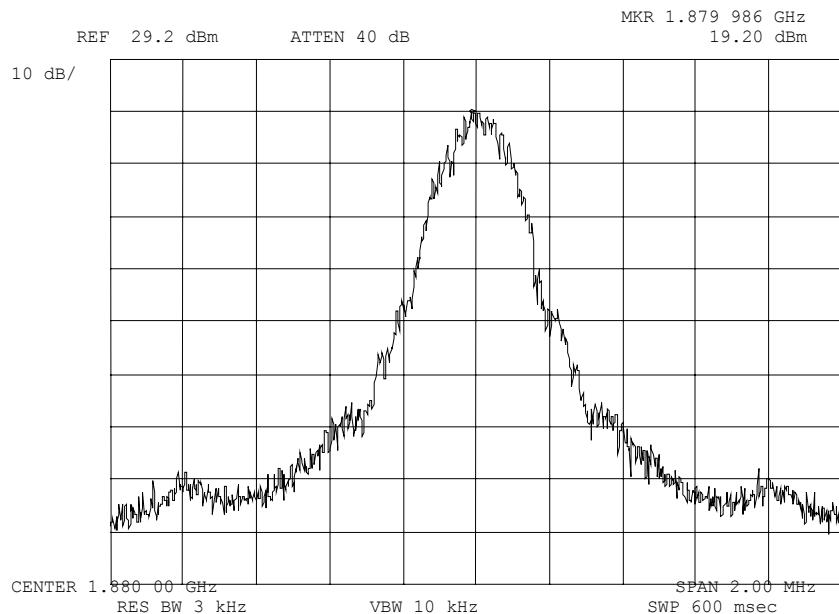

POWER: HIGH
MODULATION: GSM 1900 VOICE 1880MHZ
FINAL

PERFORMED BY:


David Lee



PAGE NO.

17 of 33.

NAME OF TEST: Emission Masks (Occupied Bandwidth)
 g0350039: 2003-May-07 Wed 12:37:00
 STATE: 2:High Power

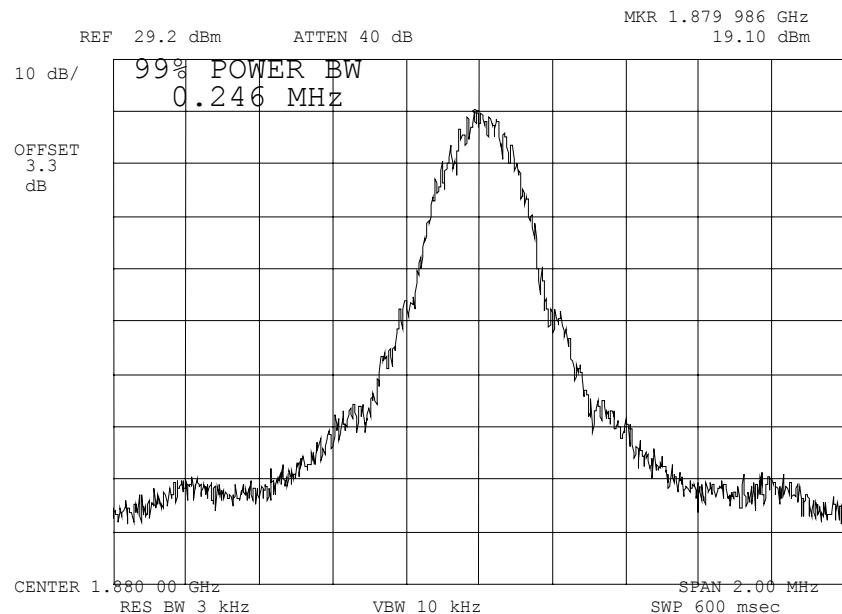

POWER:
 MODULATION:

HIGH
 GSM 1900 OCCUPIED BANDWIDTH
 FINAL


PERFORMED BY:

David Lee

PAGE NO.

18 of 33.

NAME OF TEST: Emission Masks (Occupied Bandwidth)
g0350049: 2003-May-07 Wed 14:10:00
STATE: 1:Low Power

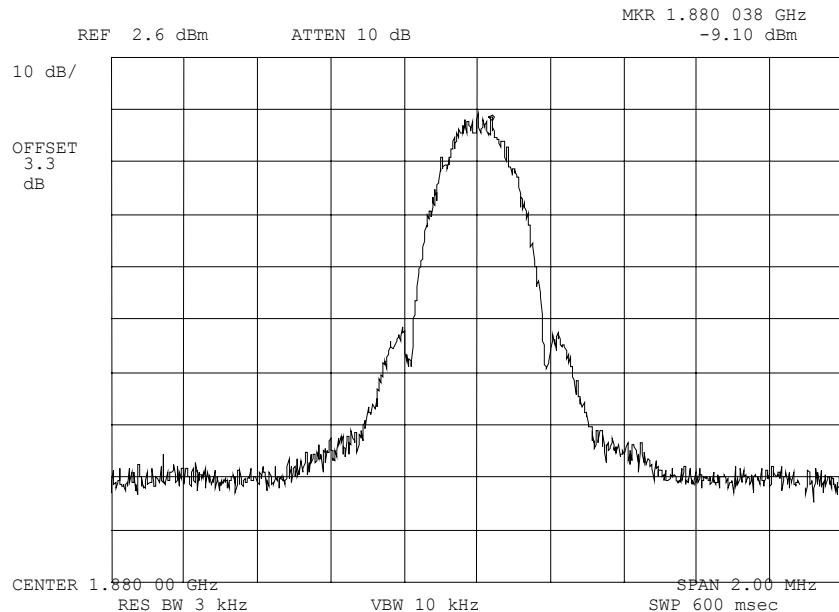

POWER: LOW
MODULATION: EGPRS 1880MHz
FINAL


PERFORMED BY:

David Lee

PAGE NO.

19 of 33.

NAME OF TEST: Emission Masks (Occupied Bandwidth)
 g0350048: 2003-May-07 Wed 14:09:00
 STATE: 2:High Power

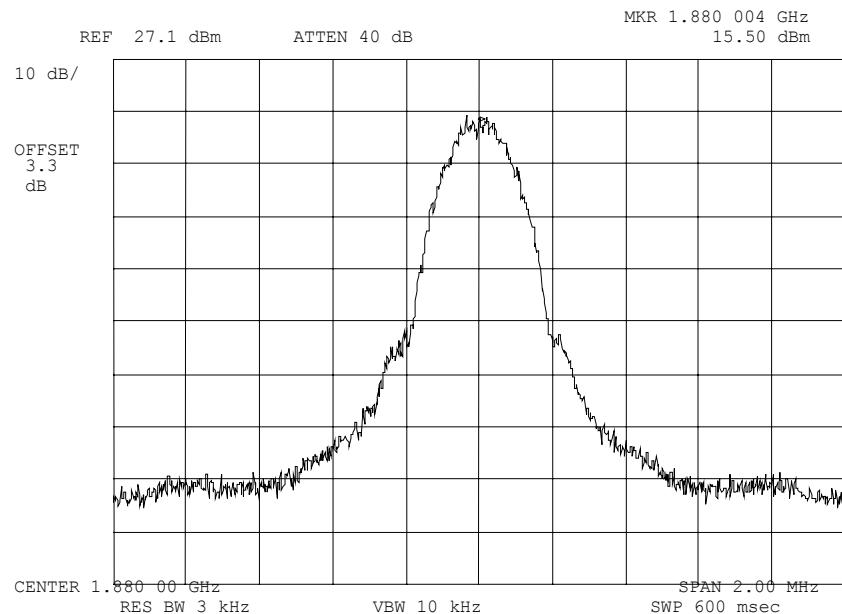

POWER:

HIGH

MODULATION:

EGPRS 1880MHz
FINAL


PERFORMED BY:

David Lee

PAGE NO.

20 of 33.

NAME OF TEST: Emission Masks (Occupied Bandwidth)
 g0350037: 2003-May-07 Wed 12:26:00
 STATE: 2:High Power

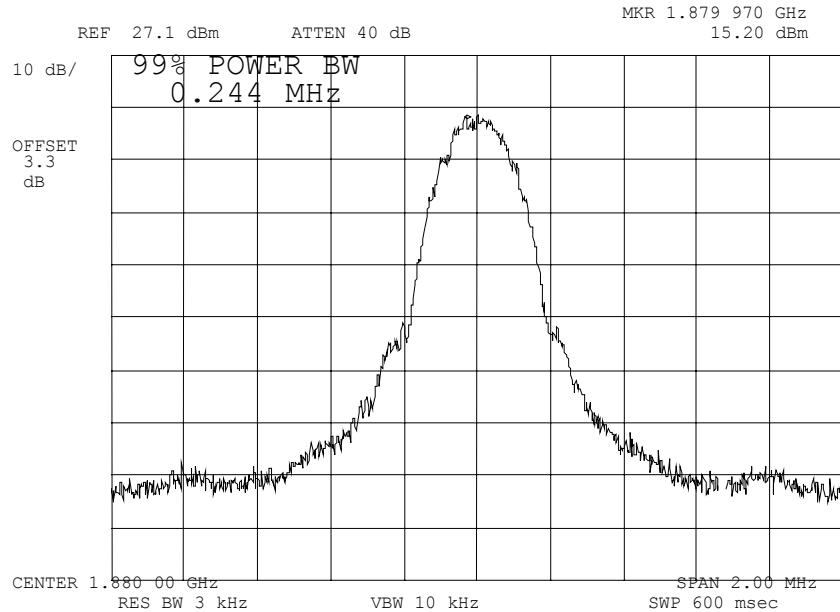

POWER: HIGH
 MODULATION: EGPRS OCCUPIED BANDWIDTH
 FINAL

PERFORMED BY:

David Lee

PAGE NO. 21 of 33.

NAME OF TEST: Field Strength of Spurious Radiation

SPECIFICATION: 47 CFR 2.1053(a)


GUIDE: ANSI/TIA/EIA-603-1992/2001, Paragraph 1.2.12 and Table 16, 47 CFR 22.917

MEASUREMENT PROCEDURE

1.2.12.1 Definition: Radiated spurious emissions are emissions from the equipment when transmitting into a non-radiating load on a frequency or frequencies which are outside an occupied band sufficient to ensure transmission of information of required quality for the class of communications desired.

1.2.12.2 Method of Measurement

- A) Connect the equipment as illustrated
- B) Adjust the spectrum analyzer for the following settings:
 - 1) Resolution Bandwidth 100 kHz (<1 GHZ), 1 MHZ (> 1GHz).
 - 2) Video Bandwidth \geq 3 times Resolution Bandwidth, or 30 kHz (22.917)
 - 3) Sweep Speed \leq 2000 Hz/second
 - 4) Detector Mode = Mean or Average Power
- C) Place the transmitter to be tested on the turntable in the standard test site. The transmitter is transmitting into a non-radiating load which is placed on the turntable. The RF cable to this load should be of minimum length.

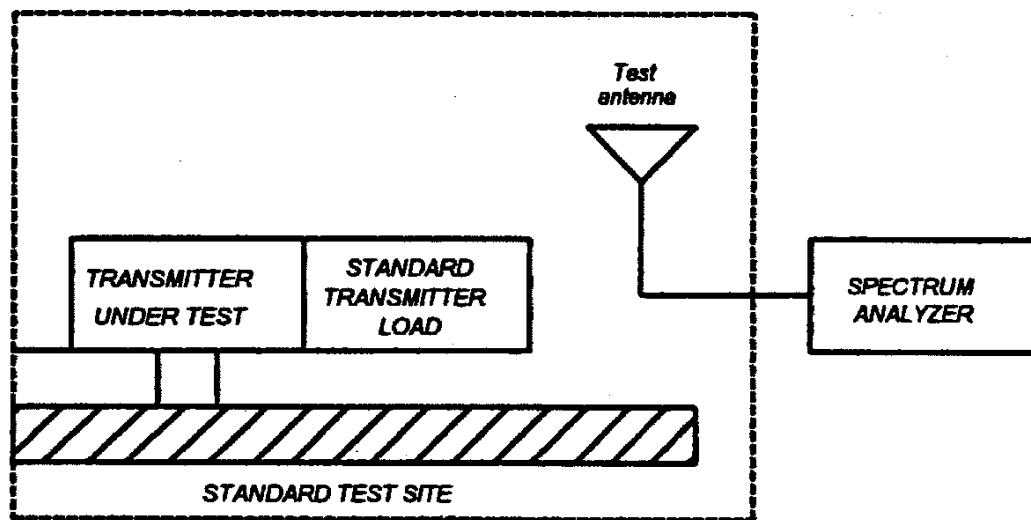

PAGE NO.


22 of 33.

NAME OF TEST: Field Strength of Spurious Radiation (Cont.)

D) For each spurious measurement the test antenna should be adjusted to the correct length for the frequency involved. This length may be determined from a calibration ruler supplied with the equipment. Measurements shall be made from the lowest radio frequency generated in the equipment to the tenth harmonic of the carrier, except for the region close to the carrier equal to \pm the test bandwidth (see section 1.3.4.4).

E) For each spurious frequency, raise and lower the test antenna from 1 m to 4 m to obtain a maximum reading on the spectrum analyzer with the test antenna at horizontal polarity. Repeat this procedure to obtain the highest possible reading. Record this maximum reading.

F) Repeat step E) for each spurious frequency with the test antenna polarized vertically.

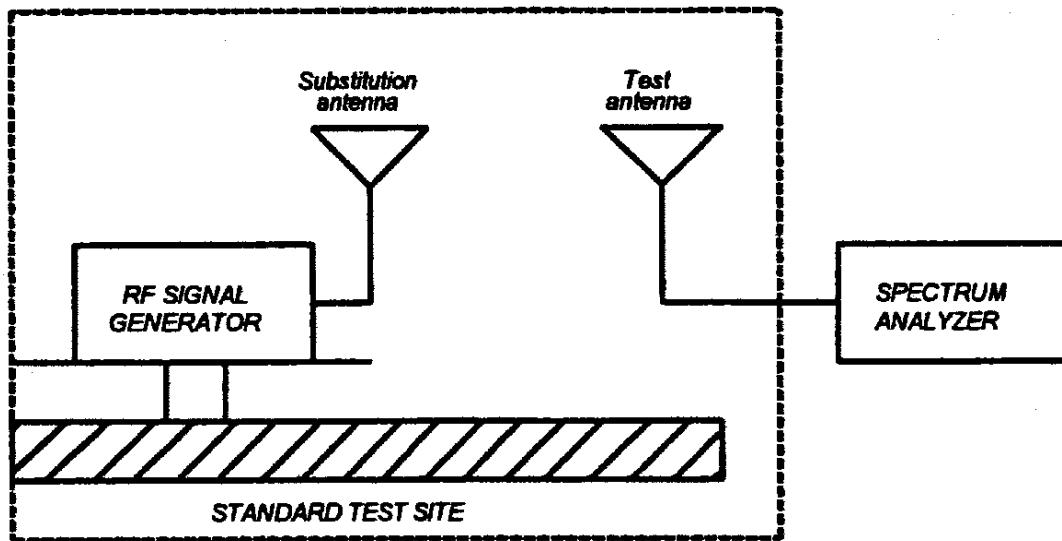

G) Reconnect the equipment as illustrated.

H) Keep the spectrum analyzer adjusted as in step B).

I) Remove the transmitter and replace it with a substitution antenna (the antenna should be half-wavelength for each frequency involved). The center of the substitution antenna should be approximately at the same location as the center of the transmitter. At lower frequencies, where the substitution antenna is very long, this will be impossible to achieve when the antenna is polarized vertically. In such case the lower end of the antenna should be 0.3 m above the ground.

PAGE NO.

23 of 33.

NAME OF TEST: Field Strength of Spurious Radiation (Cont.)

J) Feed the substitution antenna at the transmitter end with a signal generator connected to the antenna by means of a non-radiating cable. With the antennas at both ends horizontally polarized and with the signal generator tuned to a particular spurious frequency, raise and lower the test antenna to obtain a maximum reading at the spectrum analyzer. Adjust the level of the signal generator output until the previously recorded maximum reading for this set of conditions is obtained. This should be done carefully repeating the adjustment of the test antenna and generator output.

K) Repeat step J) with both antennas vertically polarized for each spurious frequency.

L) Calculate power in dBm into a reference ideal half-wave dipole antenna by reducing the readings obtained in steps J) and K) by the power loss in the cable between the generator and the antenna and further corrected for the gain of the substitution antenna used relative to an ideal half-wave dipole antenna.

M) The levels recorded in step L) are absolute levels of radiated spurious emissions in dBm. The radiated spurious emissions in dB can be calculated by the following:

Radiated spurious emissions dB =
 $10\log_{10}(\text{TX power in watts}/0.001) - \text{the levels in step l})$

NOTE: It is permissible that other antennas provided can be referenced to a dipole.

Test Equipment:

Asset	Description (as applicable)	s/n	Cycle	Last Cal
Per ANSI C63.4-1992/2000 Draft, 10.1.4				
<u>TRANSDUCER</u>				
i00088	EMCO 3109-B 25MHz-300MHz	2336	12 mo.	Sep-02
i00065	EMCO 3301-B Active Monopole	2635	12 mo.	Sep-02
i00089	Aprel 2001 200MHz-1GHz	001500	12 mo.	Sep-02
i00103	EMCO 3115 1GHz-18GHz	9208-3925	12 mo.	Sep-02
<u>AMPLIFIER</u>				
i00028	HP 8449A	2749A00121	12 mo.	Mar-03
Per ANSI C63.4-1992/2000 Draft, 10.1.4				
Per ANSI C63.4-1992/2000 Draft, 10.1.4				
<u>SPECTRUM ANALYZER</u>				
i00029	HP 8563E	3213A00104	12 mo.	Jan-03
i00033	HP 85462A	3625A00357	12 mo.	Jan-03
i00048	HP 8566B	2511AD1467	6 mo.	Jan-03

PAGE NO.

24 of 33.

NAME OF TEST:

Field Strength of Spurious Radiation

g0350006: 2003-May-05 Mon 12:38:00

STATE: 2:GSM High Power

FREQUENCY TUNED, MHz	FREQUENCY EMISSION, MHz	EIRP, dBm	EIRP, dBc
1880.000000	3759.986667	-38.2	-65.8
1880.000000	5640.230000	-40	-67.6
1880.000000	7519.980000	-40.3	-67.9
1880.000000	9399.986667	-38.5	-66.1
1880.000000	11279.990000	-37.7	-65.3
1880.000000	13159.990000	-36.9	-64.5
1880.000000	16920.006667	-34.3	-61.9

g0350007: 2003-May-05 Mon 13:42:00

STATE: 2:EGPRS High Power

FREQUENCY TUNED, MHz	FREQUENCY EMISSION, MHz	EIRP, dBm	EIRP, dBc
1880.000000	3759.973333	-44	-66.2
1880.000000	5639.986667	-43.8	-66
1880.000000	7519.986667	-42.4	-64.6
1880.000000	9399.986667	-39.4	-61.6
1880.000000	11279.986667	-37.9	-60.1
1880.000000	13160.000000	-36.2	-58.4
1880.000000	15040.000000	-35.8	-58
1880.000000	16919.986667	-33.6	-55.8


PERFORMED BY:

David Lee

PAGE NO.

25 of 33.

NAME OF TEST: Emission Masks (Occupied Bandwidth)
 g0350050: 2003-May-07 Wed 14:15:00
 STATE: 2:High Power

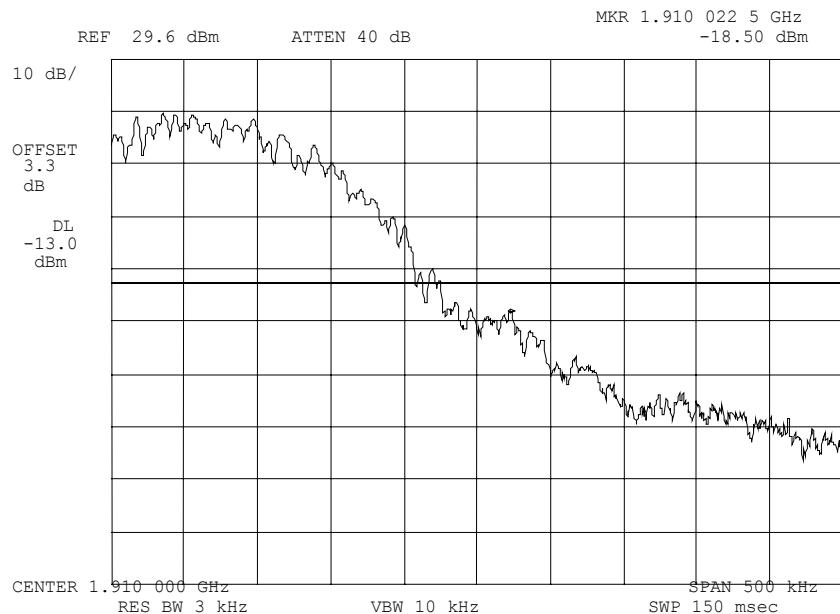

POWER: HIGH
 MODULATION: GSM 1900 UPPER BAND EDGE
 FINAL


PERFORMED BY:

David Lee

PAGE NO.

26 of 33.

NAME OF TEST: Emission Masks (Occupied Bandwidth)
 g0350053: 2003-May-07 Wed 14:24:00
 STATE: 2:High Power

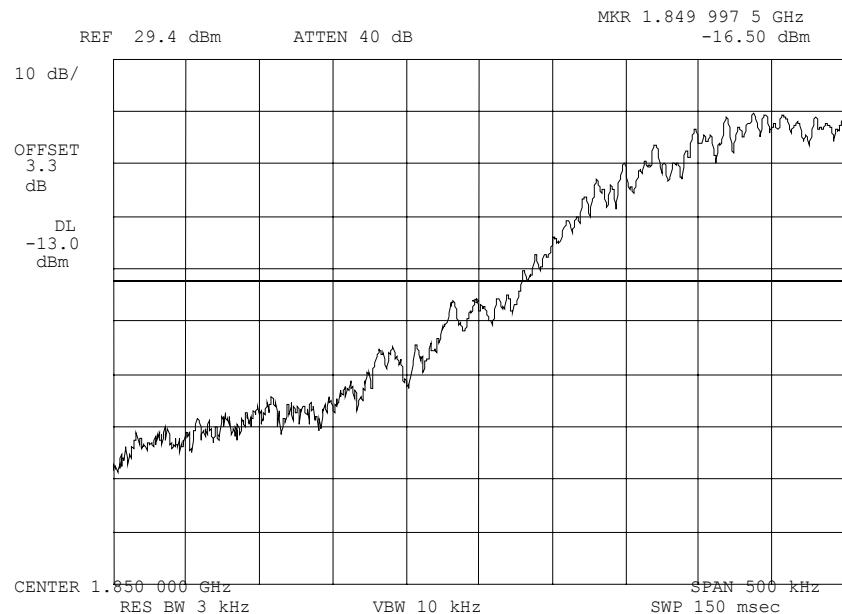

POWER: HIGH
 MODULATION: GSM 1900 LOWER BAND EDGE FINAL


PERFORMED BY:

David Lee

PAGE NO.

27 of 33.

NAME OF TEST: Emission Masks (Occupied Bandwidth)
 g0350051: 2003-May-07 Wed 14:17:00
 STATE: 2:High Power

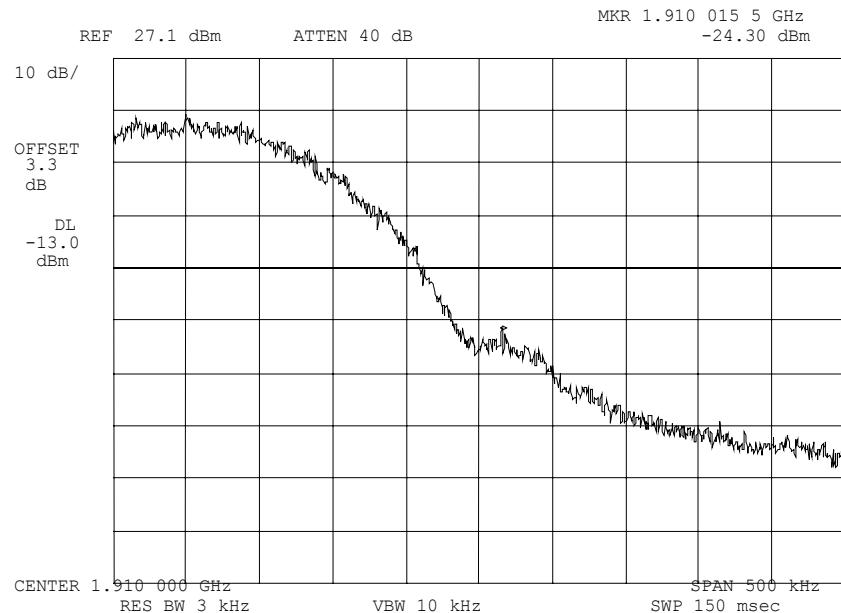

POWER: HIGH
 MODULATION: EGPRS UPPER BAND EDGE
 FINAL


PERFORMED BY:

David Lee

PAGE NO.

28 of 33.

NAME OF TEST: Emission Masks (Occupied Bandwidth)
 g0350052: 2003-May-07 Wed 14:22:00
 STATE: 2:High Power

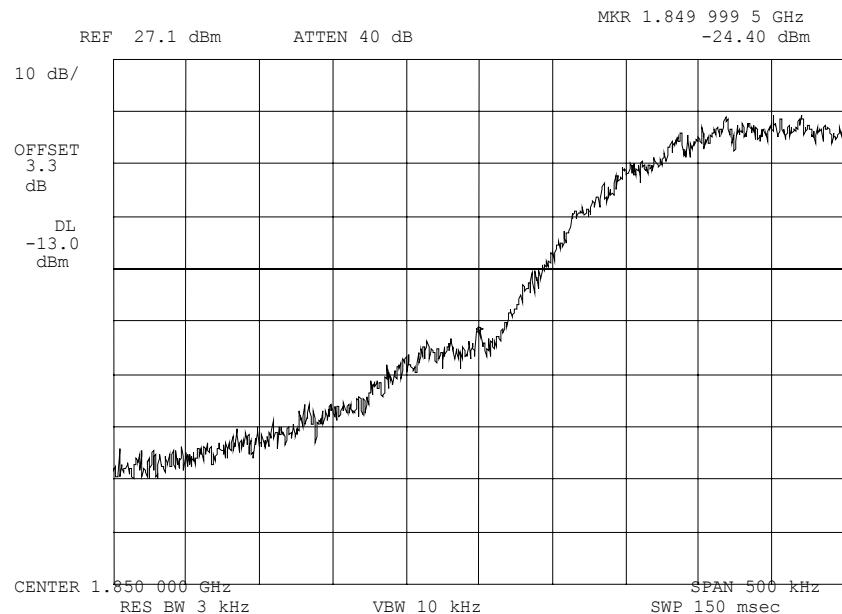

POWER: HIGH
 MODULATION: EGPRS LOWER BAND EDGE FINAL

PERFORMED BY:

David Lee

PAGE NO. 29 of 33.

NAME OF TEST: Frequency Stability (Temperature Variation)

SPECIFICATION: 47 CFR 2.1055(a)(1), 24.235

GUIDE: As indicated on page **Error! Bookmark not defined.**

TEST CONDITIONS: As Indicated

TEST EQUIPMENT: As per previous page

MEASUREMENT PROCEDURE


1. The EUT and test equipment were set up as shown on the following page.
2. With all power removed, the temperature was decreased to -30°C and permitted to stabilize for three hours. Power was applied and the maximum change in frequency was noted within one minute.
3. With power OFF, the temperature was raised in 10°C steps. The sample was permitted to stabilize at each step for at least one-half hour. Power was applied and the maximum frequency change was noted within one minute.
4. The temperature tests were performed for the worst case.
5. MEASUREMENT RESULTS: ATTACHED

PAGE NO.

30 of 33.

TRANSMITTER TEST SET-UP

TEST A. OPERATIONAL STABILITY
 TEST B. CARRIER FREQUENCY STABILITY
 TEST C. OPERATIONAL PERFORMANCE STABILITY
 TEST D. HUMIDITY
 TEST E. VIBRATION
 TEST F. ENVIRONMENTAL TEMPERATURE
 TEST G. FREQUENCY STABILITY: TEMPERATURE VARIATION
 TEST H. FREQUENCY STABILITY: VOLTAGE VARIATION

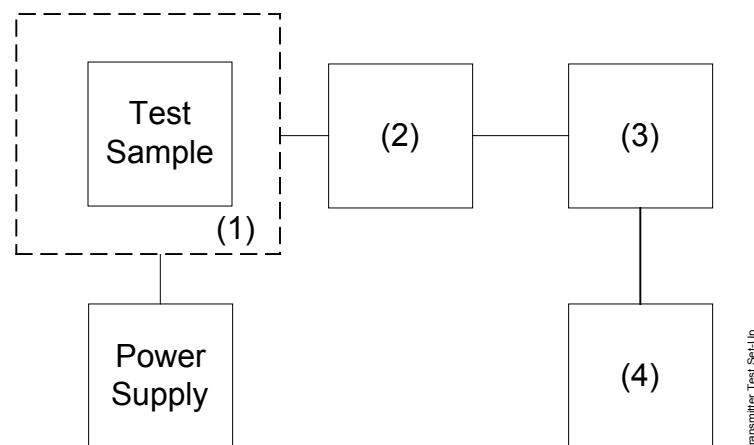

Transmitter Test Set Up

Asset Description (as applicable)		s/n
(1) TEMPERATURE, HUMIDITY, VIBRATION		
i00027 Tenney Temp. Chamber		9083-765-234
i00 Weber Humidity Chamber		
i00 L.A.B. RVH 18-100		
(2) COAXIAL ATTENUATOR		
i00122 NARDA 766-10		7802
i00123 NARDA 766-10		7802A
i00113 SIERRA 661A-3D		1059
i00069 BIRD 8329 (30 dB)		10066
(3) R.F. POWER		
i00014 HP 435A POWER METER		1733A05839
i00039 HP 436A POWER METER		2709A26776
i00020 HP 8901A POWER MODE		2105A01087
(4) FREQUENCY COUNTER		
i00042 HP 5383A		1628A00959
i00019 HP 5334B		2704A00347
i00020 HP 8901A		2105A01087

PAGE NO.

31 of 33.

NAME OF TEST: Frequency Stability (Temperature Variation)

°C	Change, Hz	Change, ppm
-30	8.2	0.0
-20	-12.2	0.0
-10	-3.1	0.0
0	13.6	0.0
10	1.7	0.0
20	-17.3	0.0
30	23.9	0.0
40	16.6	0.0
50	5.8	0.0

PAGE NO. 32 of 33.

NAME OF TEST: Frequency Stability (Voltage Variation)

SPECIFICATION: 47 CFR 2.1055(d) (1)

GUIDE: As indicated on page **Error! Bookmark not defined.**

TEST EQUIPMENT: As per previous page

MEASUREMENT PROCEDURE

1. The EUT was placed in a temperature chamber at $25\pm 5^{\circ}\text{C}$ and connected as for "Frequency Stability - Temperature Variation" test.
2. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value measured at the input to the EUT.
3. The variation in frequency was measured for the worst case.

RESULTS: Frequency Stability (Voltage Variation)

BATTERY END POINT (Voltage) = 3.25

% of STV	Voltage	Frequency, MHz	Change, Hz	Change, ppm
100	3.9	1879.9999827	-17.3	0.0
B.E.P.	3.25	1879.9999795	-20.5	0.0

LIMIT: Must remain within authorized frequency block.

PAGE NO. 33 of 33.

NAME OF TEST: Necessary Bandwidth and Emission Bandwidth

SPECIFICATION: 47 CFR 2.202(g)

MODULATION = 300KGXW

NECESSARY BANDWIDTH:

NECESSARY BANDWIDTH (B_N), kHz = 300
(measured at the 99.75% power bandwidth)

MODULATION = 300KG7W

NECESSARY BANDWIDTH:

NECESSARY BANDWIDTH (B_N), kHz = 300
(measured at the 99.75% power bandwidth)

PERFORMED BY:

END

OF

David Lee
TEST

REPORT

TESTIMONIAL
AND
STATEMENT OF CERTIFICATION

THIS IS TO CERTIFY THAT:

1. THAT the application was prepared either by, or under the direct supervision of, the undersigned.
2. THAT the technical data supplied with the application was taken under my direction and supervision.
3. THAT the data was obtained on representative units, randomly selected.
4. THAT, to the best of my knowledge and belief, the facts set forth in the application and accompanying technical data are true and correct.

CERTIFYING ENGINEER:



Morton Flom, P. Eng.