

FCC Part 15B Compliance Test Report

Test Report no.:	FCC15B_RM-431_16.doc	Date of Report:	23-Sep-2009
Number of pages:	13	Customer's Contact person:	Jyrki Juvani
Testing laboratory:	TCC Nokia Tampere Laboratory P.O. Box 68 Sinitaival 5 FIN-33720 TAMPERE, FINLAND Tel. +358 (0) 7180 46800 Fax. +358 (0) 7180 46880	Customer:	Nokia Corporation P.O. Box 50 Elektroniikkatie 10 FIN-90571 OULU, FINLAND Tel. +358 (0) 7180 08000 Fax. +358 (0) 7180 47222
FCC listing no.:	94436		
IC recognition no.:	3608		
Tested devices/ accessories:	Phone RM-431 / AC-Charger AC-10 E, Battery BL-4CT, Audio Adapter AD-54, Headset HS-45		
FCC ID:	LJPRM-431X	IC:	661E-RM431
Supplement reports:	-		
Testing has been carried out in accordance with:	CFR 47, FCC rules Part 15 Subpart B, ANSI C63.4 (2003), ICES-003, CISPR 22 and IC standards RSS-132 (Issue 2, September 2005), RSS-133 (Issue 4, February 2008), RSS-139 (Issue 1, February 2008) and RSS-210 (Issue 7, June 2007). Deviations, modifications or clarifications (if any) to above mentioned documents are written in each section under "Test method and limit".		
Documentation:	The test report must always be reproduced in full; reproduction of an excerpt only is subject to written approval of the testing laboratory. The documentation of the testing performed on the tested devices is archived for 15 years at TCC Nokia.		
Test Results:	The EUT complies with the requirements in respect of all parameters subject to the test. The test results relate only to devices specified in this document.		
Date and signature for the contents:			

Jari Jantunen, Test System Manager

1. Summary for FCC Part 15B Compliance Test Report

Date of receipt	18-Nov-2008
Testing completed	10-Dec-2008
The customer's contact person	Jyrki Juvani
Test Plan referred to	T:\Projects\RM-431\TestPlan_RS\RS_Testplan_RM-431.xls
Notes	-
Document name	T:\Projects\RM-431\EMC\Results\FCC\Tre_FCC_0847_03.doc

1.1. EUT and Accessory Information

The EUT is a 6-band (GSM850/900/1800/1900 and WCDMA Band I/VIII) mobile phone with GPRS, EGPRS, Bluetooth and WLAN. GSM bands are tested in idle mode. Bluetooth and WLAN are tested with maximum rated TX power.

Product	Type	SN	HW	MV	SW	DUT
Phone	RM-431	004401104172545	0412	-	v002.002	41709
Battery	BL-4CT	-	-	-	-	41712
AC-Charger	AC-10E	-	-	-	-	41701
Audio Adapter	AD-54	-	0.5	2.4	0.2	41704
Headset	HS-45	-	-	-	-	41706

1.2. Summary of Test Results

GSM 850:

Section in CFR 47	Section in ICES-003 (RSS-132)	Name of the test	Result
15.107, a	5.3	AC powerline conducted emissions	PASSED
15.109, a	5.5 (4.6)	Radiated emissions	PASSED

GSM 1900:

Section in CFR 47	Section in ICES-003 (RSS-133)	Name of the test	Result
15.107, a	5.3	AC powerline conducted emissions	NP
15.109, a	5.5 (6.6)	Radiated emissions	PASSED

Bluetooth:

Section in CFR 47	Section in ICES-003	Name of the test	Result
15.107, a	5.3	AC powerline conducted emissions	NP
15.109, a	5.5	Radiated emissions	PASSED

WLAN:

Section in CFR 47	Section in ICES-003	Name of the test	Result
15.107, a	5.3	AC powerline conducted emissions	NP
15.109, a	5.5	Radiated emissions	PASSED

PASSED

FAILED

NP

The EUT complies with the essential requirements in the standard.

The EUT does not comply with the essential requirements in the standard.

The test was not performed by the TCC Nokia Tampere Laboratory.


CONTENTS

1. Summary for FCC Part 15B Compliance Test Report.....	2
1.1. EUT and Accessory Information	2
1.2. Summary of Test Results	2
2. AC powerline conducted emissions (FCC §15.107, ICES-003 section 5.3)	4
2.1. Test setup	4
2.2. Test method and limit	4
2.3. GSM 850 Test results	5
3. Radiated emissions (FCC §15.109, ICES-003 section 5.5, RSS-132 4.6, RSS-133 6.6, RSS-139 6.6)	6
3.1. Test setup	6
3.2. Test method and limit	6
3.3. GSM 850 Test results	7
3.4. GSM 1900 Test results	8
3.5. Bluetooth Test results	9
3.6. WLAN Test results	10
4. Test Equipment.....	12
4.1. Conducted measurements	12
4.2. Radiated measurements	12

2. AC powerline conducted emissions (FCC §15.107, ICES-003 section 5.3)

EUT with DUT number	RM-431 DUT 41709
Accessories with DUT numbers	BL-4CT DUT 41712 / AD-54 DUT 41704 / HS-45 DUT 41705 / AC-10E DUT 41701
Operation Voltage [V] / [Hz]	115/60
Result	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	20 / 49 / 100.7
Date of measurements	02-Dec-2008
Measured by	Jari Jantunen

2.1. Test setup



2.2. Test method and limit

The measurement is made according to ANSI C63.4-2003 as follows:

The EUT is placed on a wooden table 80 cm above the reference groundplane.

The EUT is connected via LISN to a test power supply.

The measurement results are obtained as described below:

$$U [dB\mu V] = U_{RX} + A_{TOT}$$


Where U_{RX} is receiver reading and A_{TOT} is total correction factor including cable and pulse limiter attenuations.

CISPR 22 Class B limits

Frequency range [MHz]	Quasi peak limit [dBμV]	Average limit [dBμV]
0.15 - 0.5	66 - 56	56 - 46
0.5 - 5	56	46
5 - 30	60	50

2.3. GSM 850 Test results

RX mode, channel 190 / 881.6 MHz

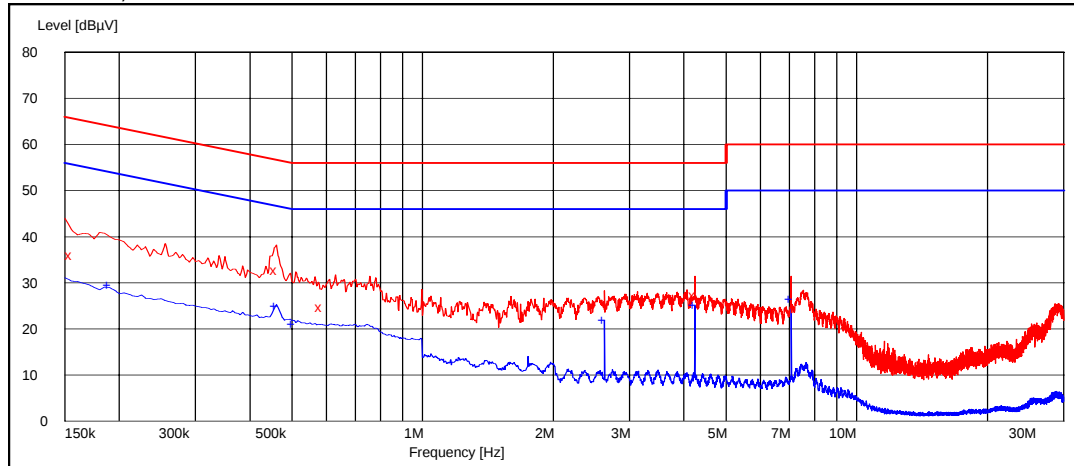

Quasi peak (RBW: 9 kHz)

Frequency [MHz]	U [dBμV]	Line	Result
0.155000	36.00	L1	PASSED
0.460000	32.80	L1	PASSED
0.585000	24.80	N	PASSED
4.240000	27.40	L1	PASSED

Average (RBW: 9 kHz)


Frequency [MHz]	U [dBμV]	Line	Result
0.190000	29.50	N	PASSED
0.460000	24.90	L1	PASSED
0.505000	21.10	L1	PASSED
2.625000	21.90	L1	PASSED
4.240000	25.10	L1	PASSED
7.065000	26.40	L1	PASSED

3. Radiated emissions

(FCC §15.109, ICES-003 section 5.5, RSS-132 4.6, RSS-133 6.6, RSS-139 6.6)

EUT with DUT number	RM-431 DUT 41709
Accessories with DUT numbers	BL-4CT DUT 41712 / AD-54 DUT 41704 / HS-45 DUT 41705 / AC-10E DUT 41701
Operation Voltage [V] / [Hz]	115/60
Result	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	24 / 45 / 101.1
Date of measurements	10-Dec-2008
Measured by	Jari Jantunen

3.1. Test setup

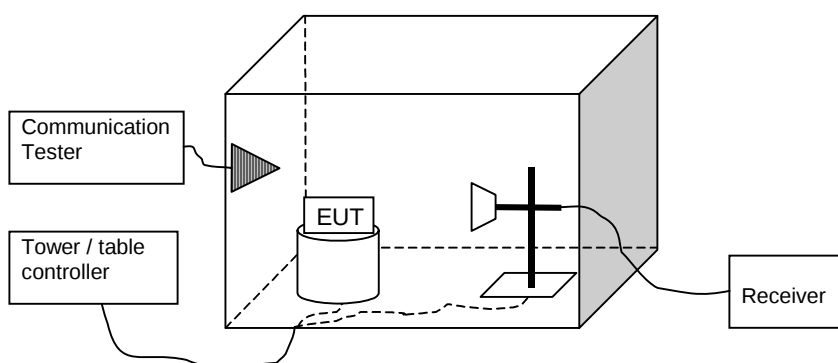

3.2. Test method and limit

The measurement is made according to ANSI C63.4-2003as follows:

The measurement is performed in the Semi-Anechoic Chamber with conducting metal floor.

The measurement distance is 3 m.

The EUT is placed on a nonconductive plate at 80 cm height.

For each suspected frequency, the turntable is rotated 360 degrees and antenna is scanned from 1 to 4 m. This is repeated for both horizontal and vertical receive antenna polarizations.

The emissions less than 20 dB below the permissible value are reported.

The measurement results are obtained as described below:

$$E [\mu\text{V/m}] = U_{RX} + A_{TOT}$$

Where U_{RX} is receiver reading and A_{TOT} is total correction factor including cable loss, antenna factor and preamplifier gain ($A_{TOT} = L_{CABLES} + AF - G_{PREAMP}$).

CISPR 22 and FCC Part 15 Class B limits (3 m measurement distance)

Frequency range [MHz]	Quasi peak limit [dBμV/m]	Average limit [dBμV/m]	Peak limit [dBμV/m]
30 – 230	40	-	-
230 – 1000	47	-	-
Above 1000	-	54	74

3.3. GSM 850 Test results

RX mode, channel 128 / 869.2 MHz

Peak (RBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U_{RX} [dBμV]	A_{TOT} [dB]	Polarisation	Result
3476.800000	41.90	124.45	46.60	-4.7	HORIZONTAL	PASSED
6953.600000	43.60	151.36	41.90	1.7	VERTICAL	PASSED

Average (RBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U_{RX} [dBμV]	A_{TOT} [dB]	Polarisation	Result
3476.800000	27.80	24.55	32.50	-4.7	HORIZONTAL	PASSED
6953.600000	30.80	34.67	29.10	1.7	HORIZONTAL	PASSED

RX mode, channel 190 / 881.6 MHz

Quasi peak (RBW: 120 kHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U_{RX} [dBμV]	A_{TOT} [dB]	Polarisation	Result
30.000000	25.20	18.20	50.70	-25.5	VERTICAL	PASSED

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U_{RX} [dBμV]	A_{TOT} [dB]	Polarisation	Result
3526.552104	41.30	116.14	46.00	-4.7	HORIZONTAL	PASSED

Average (RBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U_{RX} [dBμV]	A_{TOT} [dB]	Polarisation	Result
3526.052104	26.40	20.89	31.10	-4.7	HORIZONTAL	PASSED

RX mode, channel 251 / 893.8 MHz

Peak (RBW: 1 MHz)

Frequency [MHz]	E [dB μ V/m]	E [μ V/m]	U _{RX} [dB μ V]	A _{TOT} [dB]	Polarisation	Result
3575.200000	40.00	100.00	44.40	-4.4	HORIZONTAL	PASSED
7150.400000	41.70	121.62	39.20	2.5	HORIZONTAL	PASSED

Average (RBW: 1 MHz)

Frequency [MHz]	E [dB μ V/m]	E [μ V/m]	U _{RX} [dB μ V]	A _{TOT} [dB]	Polarisation	Result
3575.200000	26.40	20.89	30.80	-4.4	VERTICAL	PASSED
7150.400000	29.00	28.18	26.50	2.5	HORIZONTAL	PASSED

3.4. GSM 1900 Test results

RX mode, channel 512 / 1930.2 MHz

Peak (RBW: 1 MHz)

Frequency [MHz]	E [dB μ V/m]	E [μ V/m]	U _{RX} [dB μ V]	A _{TOT} [dB]	Polarisation	Result
3860.000000	43.80	154.88	46.00	-2.2	HORIZONTAL	PASSED
7720.000000	43.10	142.89	39.60	3.5	VERTICAL	PASSED

Average (RBW: 1 MHz)

Frequency [MHz]	E [dB μ V/m]	E [μ V/m]	U _{RX} [dB μ V]	A _{TOT} [dB]	Polarisation	Result
3860.000000	29.00	28.18	31.20	-2.2	HORIZONTAL	PASSED
7720.000000	30.10	31.99	26.60	3.5	HORIZONTAL	PASSED

RX mode, channel 661 / 1960.0 MHz

Quasi peak (RBW: 120 kHz)

Frequency [MHz]	E [dB μ V/m]	E [μ V/m]	U _{RX} [dB μ V]	A _{TOT} [dB]	Polarisation	Result
30.000000	32.80	43.65	58.30	-25.5	VERTICAL	PASSED
52.664729	18.50	8.41	56.20	-37.7	VERTICAL	PASSED
76.553307	21.30	11.61	58.30	-37.0	HORIZONTAL	PASSED
106.551503	24.50	16.79	59.40	-34.9	VERTICAL	PASSED
119.196994	28.10	25.41	62.10	-34.0	VERTICAL	PASSED
169.339078	22.50	13.34	58.70	-36.2	VERTICAL	PASSED

RX mode, channel 810 / 1989.8 MHz

Peak (RBW: 1 MHz)

Frequency [MHz]	E [dB μ V/m]	E [μ V/m]	U _{RX} [dB μ V]	A _{TOT} [dB]	Polarisation	Result
3980.000000	42.80	138.04	44.50	-1.7	HORIZONTAL	PASSED
7960.000000	44.10	160.32	40.00	4.1	VERTICAL	PASSED

Average (RBW: 1 MHz)

Frequency	E [dB μ V/m]	E [μ V/m]	U _{RX} [dB μ V]	A _{TOT}	Polarisation	Result
-----------	------------------	----------------	------------------------------	------------------	--------------	--------

[MHz]				[dB]		
3980.000000	29.10	28.51	30.80	-1.7	HORIZONTAL	PASSED
7960.000000	30.90	35.08	26.80	4.1	HORIZONTAL	PASSED

3.5. Bluetooth Test results

Channel 0 / 2402 MHz

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4804.000000	48.90	278.61	50.00	-1.1	HORIZONTAL	PASSED
7206.000000	62.10	1 273.50	59.30	2.8	VERTICAL	PASSED

Average (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4804.000000	36.40	66.07	37.50	-1.1	HORIZONTAL	PASSED
7206.000000	48.00	251.19	45.20	2.8	VERTICAL	PASSED

Channel 40 / 2442 MHz

Quasi peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
38.235872	23.00	14.13	37.30	-14.3	VERTICAL	PASSED
74.469940	17.30	7.33	40.90	-23.6	HORIZONTAL	PASSED
74.488978	18.00	7.94	41.60	-23.6	HORIZONTAL	PASSED
121.823246	20.40	10.47	42.50	-22.1	VERTICAL	PASSED
123.666132	22.80	13.80	45.10	-22.3	VERTICAL	PASSED

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4883.767535	47.00	223.87	48.50	-1.5	HORIZONTAL	PASSED
4883.769539	47.00	223.87	48.50	-1.5	HORIZONTAL	PASSED
7325.653307	58.10	803.53	54.80	3.3	HORIZONTAL	PASSED
7326.151303	57.90	785.24	54.60	3.3	VERTICAL	PASSED
17939.883768	52.90	441.57	33.10	19.8	HORIZONTAL	PASSED

Average (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4883.767535	33.80	48.98	35.30	-1.5	HORIZONTAL	PASSED
4884.269539	33.30	46.24	34.70	-1.4	HORIZONTAL	PASSED
7325.651303	44.00	158.49	40.70	3.3	VERTICAL	PASSED
7325.653307	43.60	151.36	40.30	3.3	HORIZONTAL	PASSED
17941.883768	40.40	104.71	20.60	19.8	HORIZONTAL	PASSED

Channel 78 / 2480 MHz

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4960.000000	47.10	226.46	47.60	-0.5	HORIZONTAL	PASSED
7440.000000	58.90	881.05	55.40	3.5	VERTICAL	PASSED

Average (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4960.000000	34.80	54.95	35.30	-0.5	HORIZONTAL	PASSED
7440.000000	45.10	179.89	41.60	3.5	VERTICAL	PASSED

3.6. WLAN Test results

RX mode, channel 1 / 2412 MHz

Peak (RBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4824.000000	39.30	92.26	40.70	-1.4	VERTICAL	PASSED
7236.000000	42.30	130.32	39.20	3.1	HORIZONTAL	PASSED

Average (RBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4824.000000	26.40	20.89	27.80	-1.4	HORIZONTAL	PASSED
7236.000000	29.80	30.90	26.70	3.1	HORIZONTAL	PASSED

RX mode, channel 7 / 2442 MHz

Quasi peak (RBW: 120 kHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
38.076353	25.60	19.05	39.80	-14.2	VERTICAL	PASSED
119.861323	26.80	21.88	48.70	-21.9	VERTICAL	PASSED
123.106613	21.20	11.48	43.50	-22.3	VERTICAL	PASSED
166.732465	22.10	12.74	46.50	-24.4	HORIZONTAL	PASSED
166.935471	23.30	14.62	47.70	-24.4	HORIZONTAL	PASSED

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dB μ V/m]	E [μ V/m]	U _{RX} [dB μ V]	A _{TOT} [dB]	Polarisation	Result
7283.065130	43.60	151.36	40.20	3.4	HORIZONTAL	PASSED
7315.123246	43.60	151.36	40.20	3.4	HORIZONTAL	PASSED
7422.847695	43.40	147.91	39.80	3.6	HORIZONTAL	PASSED
17890.777555	53.70	484.17	34.00	19.7	HORIZONTAL	PASSED

Average (RBW: 1 MHz)

Frequency [MHz]	E [dB μ V/m]	E [μ V/m]	U _{RX} [dB μ V]	A _{TOT} [dB]	Polarisation	Result
7280.565130	30.60	33.88	27.20	3.4	HORIZONTAL	PASSED
7311.123246	30.40	33.11	27.00	3.4	HORIZONTAL	PASSED
7424.847695	30.50	33.50	26.90	3.6	HORIZONTAL	PASSED
17889.777555	40.70	108.39	21.00	19.7	HORIZONTAL	PASSED

RX mode, channel 11 / 2462 MHz

Peak (RBW: 1 MHz)

Frequency [MHz]	E [dB μ V/m]	E [μ V/m]	U _{RX} [dB μ V]	A _{TOT} [dB]	Polarisation	Result
4924.000000	40.00	100.00	41.30	-1.3	VERTICAL	PASSED
7386.000000	43.50	149.62	40.00	3.5	VERTICAL	PASSED

Average (RBW: 1 MHz)

Frequency [MHz]	E [dB μ V/m]	E [μ V/m]	U _{RX} [dB μ V]	A _{TOT} [dB]	Polarisation	Result
4924.000000	27.30	23.17	28.60	-1.3	HORIZONTAL	PASSED
7386.000000	30.40	33.11	26.90	3.5	HORIZONTAL	PASSED

4. Test Equipment

4.1. Conducted measurements

Eq. No	Equipment	Type	Manufacturer	Used in
TM30597	Power splitter	11667A	Agilent	22/24/27, 15C
TM37499	Power splitter	11667A	Agilent	22/24/27, 15C
TM38111	Multimeter	34401A	Agilent	22/24/27, 15C
TM38112	DC power supply	6632A	Agilent	22/24/27, 15C
TM22901	Attenuator	8496A	Agilent	22/24/27, 15C
TM30636	Artificial mains net	L2-16	PMM	15C, 15B
TM37678	Radio communication tester	CMU-200	R&S	22/24/27, 15C, 15B
TM37773	Radio communication tester	CMU-200	R&S	22/24/27, 15C, 15B
TM30600	Pulse Limiter	ESH3-Z2	R&S	15C, 15B
TM26490	LISN 50 μ H	ESH3-Z5	R&S	15C, 15B
TM37610	Spectrum analyzer	FSU	R&S	22/24/27, 15C
TM22835	Multimeter	87	Fluke	15C, 15B
TM37500	Microwave switch system	7116-MSW	Keithley	22/24/27, 15C, 15B
TM22638	Power supply	OL63743-901	Transmatic	22/24/27, 15C, 15B
	Temperature chamber	VT4002	Vötsch	22/24/27, 15C
2058	EMI Test receiver	ESPC	R&S	15C, 15B
2001	Bluetooth tester	CBT	R&S	22/24/27, 15C, 15B
2002	Radio communication tester	CMU-200	R&S	22/24/27, 15C, 15B

4.2. Radiated measurements

Eq. No	Equipment	Type	Manufacturer	Used in
TM30599	3m semi-anechoic chamber		TDK	22/24/27, 15C, 15B
TM38845	EMI receiver	ESI 40	R&S	22/24/27, 15C, 15B
TM37498	Preamplifier	AMF-5D-020180-26-10P	MITEQ	22/24/27, 15C, 15B
TM37523	Preamplifier	AMF-4D-10M-3G-25-20P	MITEQ	22/24/27, 15C, 15B
TM37516	Biconilog antenna	HL562	R&S	22/24/27, 15C, 15B
TM26496	Double ridged waveguide antenna	3115	EMCO	22/24/27, 15C, 15B
TM39158	Horn antenna	3116	EMCO	22/24/27, 15C, 15B
TM26492	Reference dipole set	UHAP/VHAP	Schwarzbeck	22/24/27, 15C, 15B
TM37501	Dipole antenna	3125-870	EMCO	22/24/27
TM37502	Dipole antenna	3125-1880	EMCO	22/24/27
TM37773	Radio communication tester	CMU-200	R&S	22/24/27, 15C, 15B
TM38631	Signal generator	83640L	Agilent	22/24/27, 15C, 15B
TM38066	High pass filter	4HC3000/18000-3-KK	Trilithic	22/24/27, 15C, 15B
TM26511	Tunable notch filter	WRCA870	Wainwright	22/24/27
TM38215	Tunable notch filter	WRCD1850/1910-0.2/40	Wainwright	22/24/27
TM38214	Band reject filter	WRCT 2402/2480-2400/2483.5-30	Wainwright	15C
TM30642	Mast/Turntable controller	HD-100	Deisel	22/24/27, 15C, 15B
TM26500	Turntable	DS412	Deisel	22/24/27, 15C, 15B
TM38842	Antenna mast controller	2090	EMCO	22/24/27, 15C, 15B
TM38843	Antenna mast	2075	EMCO	22/24/27, 15C, 15B
TM38114	DC power supply	6632A	Agilent	22/24/27, 15C, 15B
TM38323	Preamplifier	PA-02 18-26 GHz	EMC Automation	22/24/27, 15C, 15B
TM37678	Radio communication tester	CMU-200	R&S	22/24/27, 15C, 15B
TM22638	Power supply	OL63743-901	Transmatic	22/24/27, 15C, 15B
TM23892	Yaesu controller	G-1000SDX	Yaesu	22/24/27, 15C, 15B
2001	Bluetooth tester	CBT	R&S	22/24/27, 15C, 15B

Eq. No	Equipment	Type	Manufacturer	Used in
2002	Radio communication tester	CMU-200	R&S	22/24/27, 15C, 15B