



**ADDENDUM 1 TO TEST REPORT OF A 2.4 GHz  
RADIOLAN PCMCIA CARD, BRAND BREEZECOM,  
TYPE PC-DS.11, IN CONFORMITY WITH  
FCC PART 15.**

**FCC ID: LKT-PC-DS11**

FCC report layout endorsed by the FCC by Public  
Notice of March 11, 1992.

|                              |          |   |
|------------------------------|----------|---|
| <b>Accredited by</b>         | <b>:</b> | <b>STERLAB accreditation number L029<br/>D.A.R., TTI-P-G.127/96-00</b>                    |
| <b>Competent body</b>        | <b>:</b> | <b>Article 10-2 EMC Directive</b>   |
| <b>Notified body</b>         | <b>:</b> | <b>Article 10-5 EMC Directive<br/>Low Voltage Directive<br/>Number 0122 TTE Directive</b> |
| <b>Designated laboratory</b> | <b>:</b> | <b>TTE Directive</b>  |
| <b>Notified test service</b> | <b>:</b> | <b>Automotive Directive</b>   |
| <b>FCC listed</b>            | <b>:</b> | <b>31040/SIT</b>  |
| <b>VCCI listed</b>           | <b>:</b> | <b>R 592 and C 507</b>  |
| <b>Certification body</b>    | <b>:</b> | <b>Electrical Products Safety<br/>Regulation Hong Kong</b>                                |

**Nederlands Meetinstituut**

**P.O. Box 15  
9822 ZG Niekerk (NL)  
Smidshornerweg 18  
9822 TL Niekerk (NL)**

**Telephone: +31 594 505005  
Telefax: +31 594 504804  
E-mail: NMI@NMI.nl**

NMI B.V. (Chamber of Commerce Haaglanden No. 27228701)


Offices: Delft, Bergum, Dordrecht, Niekerk, Utrecht,  
Tinton Falls NJ (USA), Kawasaki (Japan), Hortolândia SP (Brazil)

Subsidiary companies:

NMI Certin B.V. (27233418)

NMI Van Swinden Laboratorium B.V. (27228703)

NMI International B.V. (27239176)



FCC ID: LKT-PC-DS11  
 Description of EUT: 2.4 GHz RLAN PCMCIA card  
 Manufacturer: No Wires Needed B.V.  
 Brand mark: BreezeCOM  
 Type: PC-DS.11

## MEASUREMENT/TECHNICAL REPORT

**BreezeCOM, Ltd.**

**Model : PC-DS.11**

**FCC ID: LKT-PC-DS11**

June 28, 1999


|   |                       |                             |                 |
|---|-----------------------|-----------------------------|-----------------|
| This report concerns (check one):   |                       | Original grant              | Class II change |
| Equipment type: Direct Sequence Spread Spectrum Transceiver   |                       |                             |                 |
| Deferred grant requested per 47 CFR 0.457(d)(1)(ii)?  |                       | yes                         | no              |
| If yes defer until: _____   |                       |                             |                 |
| BreezeCOM, Ltd., Atidim Technology Park, Bldg 1, Tel Aviv 61131, Israel, agrees to notify the Commission by _____ of the intended date of announcement of the product so that the grant can be issued on that date. |                       |                             |                 |
| Transition Rules Request per 15.37  |                       | yes                         | no              |
| If no, assumed Part 15, Subpart B for unintentional radiators – the new 47 CFR (10-1-90 Edition) provision.   |                       |                             |                 |
| Report prepared by:   | Name                  | : Jan S. Sikkema B.Sc. E.E. |                 |
|   | Company name          | : NMI Certin B.V.           |                 |
|   | Address               | : Smidshornerweg 18         |                 |
|   | Telephone number      | : + 31-59450-50 05          |                 |
|   | Telefax number        | : + 31-59450-48 04          |                 |
|   | Mailing address       | : P.O. Box 15               |                 |
|   | City/Place/Postal cd. | : 9822 ZG NIEKERK           |                 |
|   | Country               | : The Netherlands           |                 |


The data taken for this test and report herein was done in accordance with FCC Part 15 and measurement Procedures of ANSI C63.4-1992 and were relevant the procedures as specified in the sheets from the FCC attached to this test report. NMI Certin B.V. at Niekerk, The Netherlands, certifies that the data is accurate and contains a true representation of the emission-profile of the Equipment Under Test (EUT) on the date of the test noted in the test report. I have reviewed the test report and find it to be an accurate description of the test(s) performed and the EUT so tested.

Date: June 28, 1999

Signature:

P.A.J.M. Robber  
 Department EMC and Telecommunicatie






FCC ID: LKT-PC-DS11  
Description of EUT: 2.4 GHz RLAN PCMCIA card  
Manufacturer: No Wires Needed B.V.  
Brand mark: BreezeCOM  
Type: PC-DS.11

---

| <b>Table of Contents</b>                            | <b>Page</b> |
|---|-------------|
| <b>1 Processing gain .....</b>                      | <b>4</b>    |
| 1.1 <i>Blockdiagram Jamming testsetup:.....</i>     | <i>4</i>    |
| 1.2 <i>Processing Gain testresults tables .....</i> | <i>5</i>    |
| 1.3 <i>Summary of JIS values.....</i>               | <i>9</i>    |
| 1.4 <i>Photograph of testsetup .....</i>            | <i>10</i>   |



## 1 Processing gain

The processing gain is measured using the CW jamming margin method. A signal generator is stepped in 50 kHz increments across the passband of the system. At each point the generator level required to produce a Bit Error Rate equivalent to  $BER=1.0 \times 10E-5$  is recorded as the Jammer level (J). The output power of the transmitter is measured at the same point and recorded as Signal (S). The Jammer to Signal ratio (J/S) is then calculated with 20% of the worst datapoints discarded. The lowest remaining J/S ratio is used to calculate the processing gain using formula:

$$G_p = E_s/N_o + M_j + L_{sys}$$

with:

$E_s/N_o = 18.7$  dB for 11Mb/s (obtained from manufacturer's specification of spreading processor Harris semiconductor model HFA3860B)

$L_{sys} = 2$  dB

Measured lowest remaining  $J/S = M_j = -8.8$  dB

$$G_p = 18.7 \text{ dB} + (-8.8 \text{ dB}) + 2 \text{ dB} = 11.9 \text{ dB}$$

### 1.1 Blockdiagram Jamming testsetup:


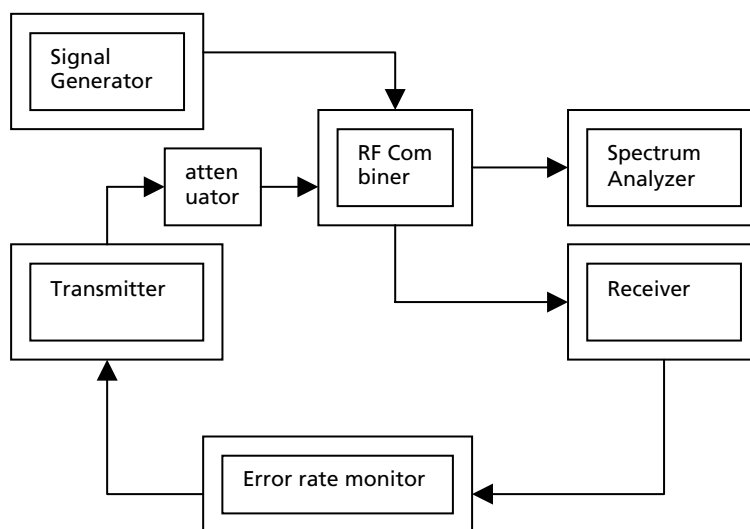


figure 1: blockdiagram of testsetup




## 1.2 Processing Gain testresults tables

pass band =  $f_o \pm 5\text{MHz}$  ( 5000 kHz = 100 x 50 kHz)

channel: 07 = 2441.7 MHz 1 of 4 (AP-DS.11 to PC-DS.11)

| Frequency (MHz) | frequency offset (kHz) | J (dBm) | S (dBm) | J/S (dB) |
|-----------------|------------------------|---------|---------|----------|
| 2446.95         | +100 x 50              | -56.5   | -51.0   | -5.5     |
| 2446.90         | +99 x 50               | -56.6   | -51.0   | -5.6     |
| 2446.85         | +98 x 50               | -56.5   | -51.0   | -5.5     |
| 2446.80         | +97 x 50               | -56.6   | -51.0   | -5.6     |
| 2446.75         | +96 x 50               | -56.3   | -51.0   | -5.3     |
| 2446.70         | +95 x 50               | -56.0   | -51.0   | -5       |
| 2446.65         | +94 x 50               | -56.1   | -51.0   | -5.1     |
| 2446.60         | +93 x 50               | -56.2   | -51.0   | -5.2     |
| 2446.55         | +92 x 50               | -56.0   | -51.0   | -5       |
| 2446.50         | +91 x 50               | -55.7   | -51.0   | -4.7     |
| 2446.45         | +90 x 50               | -55.7   | -51.0   | -4.7     |
| 2446.40         | +89 x 50               | -55.8   | -51.0   | -4.8     |
| 2446.35         | +88 x 50               | -55.7   | -51.0   | -4.7     |
| 2446.30         | +87 x 50               | -55.9   | -51.0   | -4.9     |
| 2446.25         | +86 x 50               | -56.2   | -51.0   | -5.2     |
| 2446.15         | +85 x 50               | -56.9   | -51.0   | -5.9     |
| 2446.10         | +84 x 50               | -57.2   | -51.0   | -6.2     |
| 2446.05         | +83 x 50               | -57.6   | -51.0   | -6.6     |
| 2446.00         | +82 x 50               | -58.0   | -51.0   | -7       |
| 2445.95         | +81 x 50               | -58.4   | -51.0   | -7.4     |
| 2445.90         | +80 x 50x              | -59.0   | -51.0   | -8       |
| 2445.85         | +79 x 50               | -59.0   | -51.0   | -8       |
| 2445.80         | +78 x 50               | -59.1   | -51.0   | -8.1     |
| 2445.75         | +77 x 50               | -59.4   | -51.0   | -8.4     |
| 2445.70         | +76 x 50               | -59.7   | -51.0   | -8.7     |
| 2445.65         | +75 x 50               | -60.1   | -51.0   | -9.1     |
| 2445.60         | +74 x 50               | -60.5   | -51.0   | -9.5     |
| 2445.55         | +73 x 50               | -60.1   | -51.0   | -9.1     |
| 2445.50         | +72 x 50               | -59.9   | -51.0   | -8.9     |
| 2445.45         | +71 x 50               | -59.9   | -51.0   | -8.9     |
| 2445.40         | +70 x 50               | -59.8   | -51.0   | -8.8     |
| 2445.35         | +69 x 50               | -59.9   | -51.0   | -8.9     |
| 2445.30         | +68 x 50               | -59.9   | -51.0   | -8.9     |
| 2445.25         | +67 x 50               | -60.0   | -51.0   | -9       |
| 2445.15         | +66 x 50               | -60.2   | -51.0   | -9.2     |
| 2445.10         | +65 x 50               | -60.3   | -51.0   | -9.3     |
| 2445.05         | +64 x 50               | -60.4   | -51.0   | -9.4     |
| 2445.00         | +63 x 50               | -60.3   | -51.0   | -9.3     |
| 2444.95         | +62 x 50               | -60.3   | -51.0   | -9.3     |
| 2444.90         | +61 x 50               | -60.4   | -51.0   | -9.4     |
| 2444.85         | +60 x 50               | -60.4   | -51.0   | -9.4     |
| 2444.80         | +59 x 50               | -60.1   | -51.0   | -9.1     |
| 2444.75         | +58 x 50               | -59.8   | -51.0   | -8.8     |
| 2444.70         | +57 x 50               | -59.8   | -51.0   | -8.8     |
| 2444.65         | +56 x 50               | -59.9   | -51.0   | -8.9     |
| 2444.60         | +55 x 50               | -59.6   | -51.0   | -8.6     |
| 2444.55         | +54 x 50               | -59.4   | -51.0   | -8.4     |
| 2444.50         | +53 x 50               | -59.0   | -51.0   | -8       |
| 2444.45         | +52 x 50               | -58.9   | -51.0   | -7.9     |
| 2444.40         | +51 x 50               | -58.5   | -51.0   | -7.5     |
| 2444.35         | +50 x 50               | -58.0   | -51.0   | -7       |

Table 1 : J/S values for  $f_o(+50 \times 50\text{kHz})$  to  $f_o(+100 \times 50\text{kHz})$




FCC ID: LKT-PC-DS11  
 Description of EUT: 2.4 GHz RLAN PCMCIA card  
 Manufacturer: No Wires Needed B.V.  
 Brand mark: BreezeCOM  
 Type: PC-DS.11

pass band =  $f_0 \pm 5\text{MHz}$  ( 5000 kHz = 100 x 50 kHz)  
 channel: 07 = 2441.7 MHz      2 of 4 (AP-DS.11 to PC-DS.11)

| Frequency (MHz) | frequency offset (kHz) | J (dBm) | S (dBm) | J/S (dB) |
|-----------------|------------------------|---------|---------|----------|
| 2444.35         | +50 x 50               | -58.0   | -51.0   | -7       |
| 2444.30         | +49 x 50               | -58.1   | -51.0   | -7.1     |
| 2444.25         | +48 x 50               | -58.0   | -51.0   | -7       |
| 2444.15         | +47 x 50               | -57.8   | -51.0   | -6.8     |
| 2444.10         | +46 x 50               | -57.6   | -51.0   | -6.6     |
| 2444.05         | +45 x 50               | -57.5   | -51.0   | -6.5     |
| 2444.00         | +44 x 50               | -57.2   | -51.0   | -6.2     |
| 2443.95         | +43 x 50               | -57.3   | -51.0   | -6.3     |
| 2443.90         | +42 x 50               | -57.3   | -51.0   | -6.3     |
| 2443.85         | +41 x 50               | -57.8   | -51.0   | -6.8     |
| 2443.80         | +40 x 50               | -58.2   | -51.0   | -7.2     |
| 2443.75         | +39 x 50               | -58.3   | -51.0   | -7.3     |
| 2443.70         | +38 x 50               | -58.2   | -51.0   | -7.2     |
| 2443.65         | +37 x 50               | -58.3   | -51.0   | -7.3     |
| 2443.60         | +36 x 50               | -58.3   | -51.0   | -7.3     |
| 2443.55         | +35 x 50               | -58.2   | -51.0   | -7.2     |
| 2443.50         | +34 x 50               | -58.4   | -51.0   | -7.4     |
| 2443.45         | +33 x 50               | -58.9   | -51.0   | -7.9     |
| 2443.40         | +32 x 50               | -59.2   | -51.0   | -8.2     |
| 2443.35         | +31 x 50               | -58.4   | -51.0   | -7.4     |
| 2443.30         | +30 x 50               | -59.9   | -51.0   | -8.9     |
| 2443.25         | +29 x 50               | -60.0   | -51.0   | -9       |
| 2443.15         | +28 x 50               | -60.1   | -51.0   | -9.1     |
| 2443.10         | +27 x 50               | -60.1   | -51.0   | -9.1     |
| 2443.05         | +26 x 50               | -60.2   | -51.0   | -9.2     |
| 2443.00         | +25 x 50               | -60.2   | -51.0   | -9.2     |
| 2442.95         | +24 x 50               | -60.3   | -51.0   | -9.3     |
| 2442.90         | +23 x 50               | -60.5   | -51.0   | -9.5     |
| 2442.85         | +22 x 50               | -60.5   | -51.0   | -9.5     |
| 2442.80         | +21 x 50               | -60.6   | -51.0   | -9.6     |
| 2442.75         | +20 x 50               | -60.6   | -51.0   | -9.6     |
| 2442.70         | +19 x 50               | -60.4   | -51.0   | -9.4     |
| 2442.65         | +18 x 50               | -60.2   | -51.0   | -9.2     |
| 2442.60         | +17 x 50               | -60.1   | -51.0   | -9.1     |
| 2442.55         | +16 x 50               | -60.1   | -51.0   | -9.1     |
| 2442.50         | +15 x 50               | -60.2   | -51.0   | -9.2     |
| 2442.45         | +14 x 50               | -60.1   | -51.0   | -9.1     |
| 2442.40         | +13 x 50               | -59.9   | -51.0   | -8.9     |
| 2442.35         | +12 x 50               | -59.9   | -51.0   | -8.9     |
| 2442.30         | +11 x 50               | -59.8   | -51.0   | -8.8     |
| 2442.25         | +10 x 50               | -59.8   | -51.0   | -8.8     |
| 2442.15         | +09 x 50               | -59.9   | -51.0   | -8.9     |
| 2442.10         | +08 x 50               | -59.4   | -51.0   | -8.4     |
| 2442.05         | +07 x 50               | -59.0   | -51.0   | -8       |
| 2442.00         | +06 x 50               | -58.9   | -51.0   | -7.9     |
| 2441.95         | +05 x 50               | -58.9   | -51.0   | -7.9     |
| 2441.90         | +04 x 50               | -58.8   | -51.0   | -7.8     |
| 2441.85         | +03 x 50               | -59.0   | -51.0   | -8       |
| 2441.80         | +02 x 50               | -59.2   | -51.0   | -8.2     |
| 2441.75         | +01 x 50               | -59.3   | -51.0   | -8.3     |
| 2441.70         | +00 x 50               | -59.4   | -51.0   | -8.4     |

Table 2 : J/S values for  $f_0(+0x50\text{kHz})$  to  $f_0(+50x50\text{kHz})$




FCC ID: LKT-PC-DS11  
 Description of EUT: 2.4 GHz RLAN PCMCIA card  
 Manufacturer: No Wires Needed B.V.  
 Brand mark: BreezeCOM  
 Type: PC-DS.11

pass band =  $f_o \pm 5\text{MHz}$  ( 5000 kHz = 100 x 50 kHz)  
 channel: 07 = 2441.7 MHz      3 of 4 (AP-DS.11 to PC-DS.11)

| Frequency (MHz) | frequency offset (kHz) | J (dBm) | S (dBm) | J/S (dB) |
|-----------------|------------------------|---------|---------|----------|
| 2436.70         | -100 x 50              | -57.7   | -51.0   | -6.7     |
| 2436.75         | -99 x 50               | -57.2   | -51.0   | -6.2     |
| 2436.80         | -98 x 50               | -57.0   | -51.0   | -6       |
| 2436.85         | -97 x 50               | -56.8   | -51.0   | -5.8     |
| 2436.90         | -96 x 50               | -56.7   | -51.0   | -5.7     |
| 2436.95         | -95 x 50               | -56.3   | -51.0   | -5.3     |
| 2437.00         | -94 x 50               | -56.0   | -51.0   | -5       |
| 2437.05         | -93 x 50               | -55.7   | -51.0   | -4.7     |
| 2437.10         | -92 x 50               | -55.5   | -51.0   | -4.5     |
| 2437.15         | -91 x 50               | -55.4   | -51.0   | -4.4     |
| 2437.20         | -90 x 50               | -55.3   | -51.0   | -4.3     |
| 2437.25         | -89 x 50               | -55.8   | -51.0   | -4.8     |
| 2437.30         | -88 x 50               | -56.0   | -51.0   | -5       |
| 2437.35         | -87 x 50               | -56.1   | -51.0   | -5.1     |
| 2437.40         | -86 x 50               | -56.1   | -51.0   | -5.1     |
| 2437.45         | -85 x 50               | -56.1   | -51.0   | -5.1     |
| 2437.50         | -84 x 50               | -56.2   | -51.0   | -5.2     |
| 2437.55         | -83 x 50               | -56.8   | -51.0   | -5.8     |
| 2437.60         | -82 x 50               | -57.2   | -51.0   | -6.2     |
| 2437.65         | -81 x 50               | -57.6   | -51.0   | -6.6     |
| 2437.70         | -80 x 50               | -57.5   | -51.0   | -6.5     |
| 2437.75         | -79 x 50               | -57.6   | -51.0   | -6.6     |
| 2437.80         | -78 x 50               | -57.8   | -51.0   | -6.8     |
| 2437.85         | -77 x 50               | -57.9   | -51.0   | -6.9     |
| 2437.90         | -76 x 50               | -58.0   | -51.0   | -7       |
| 2437.95         | -75 x 50               | -58.1   | -51.0   | -7.1     |
| 2438.00         | -74 x 50               | -58.1   | -51.0   | -7.1     |
| 2438.05         | -73 x 50               | -58.0   | -51.0   | -7       |
| 2438.10         | -72 x 50               | -58.3   | -51.0   | -7.3     |
| 2438.15         | -71 x 50               | -58.7   | -51.0   | -7.7     |
| 2438.20         | -70 x 50               | -58.9   | -51.0   | -7.9     |
| 2438.25         | -69 x 50               | -58.8   | -51.0   | -7.8     |
| 2438.30         | -68 x 50               | -58.8   | -51.0   | -7.8     |
| 2438.35         | -67 x 50               | -58.9   | -51.0   | -7.9     |
| 2438.40         | -66 x 50               | -59.0   | -51.0   | -8       |
| 2438.45         | -65 x 50               | -58.6   | -51.0   | -7.6     |
| 2438.50         | -64 x 50               | -58.4   | -51.0   | -7.4     |
| 2438.55         | -63 x 50               | -58.5   | -51.0   | -7.5     |
| 2438.60         | -62 x 50               | -58.5   | -51.0   | -7.5     |
| 2438.65         | -61 x 50               | -58.2   | -51.0   | -7.2     |
| 2438.70         | -60 x 50               | -57.8   | -51.0   | -6.8     |
| 2438.75         | -59 x 50               | -57.7   | -51.0   | -6.7     |
| 2438.80         | -58 x 50               | -57.7   | -51.0   | -6.7     |
| 2438.85         | -57 x 50               | -57.6   | -51.0   | -6.6     |
| 2438.90         | -56 x 50               | -57.5   | -51.0   | -6.5     |
| 2438.95         | -55 x 50               | -57.4   | -51.0   | -6.4     |
| 2439.00         | -54 x 50               | -57.4   | -51.0   | -6.4     |
| 2439.05         | -53 x 50               | -57.7   | -51.0   | -6.7     |
| 2439.10         | -52 x 50               | -58.3   | -51.0   | -7.3     |
| 2439.15         | -51 x 50               | -58.3   | -51.0   | -7.3     |
| 2439.20         | -50 x 50               | -58.2   | -51.0   | -7.2     |

Table 3 : J/S values for  $f_o(-50x50\text{kHz})$  to  $f_o(-100x50\text{kHz})$




FCC ID: LKT-PC-DS11  
 Description of EUT: 2.4 GHz RLAN PCMCIA card  
 Manufacturer: No Wires Needed B.V.  
 Brand mark: BreezeCOM  
 Type: PC-DS.11

pass band =  $f_0 \pm 5\text{MHz}$  ( 5000 kHz = 100 x 50 kHz)  
 channel: 07 = 2441.7 MHz 4 of 4 (AP-DS.11 to PC-DS.11)

| Frequency (MHz) | frequency offset (kHz) | J (dBm) | S (dBm) | J/S (dB) |
|-----------------|------------------------|---------|---------|----------|
| 2439.20         | -50 x 50               | -58.2   | -51.0   | -7.2     |
| 2439.25         | -49 x 50               | -58.0   | -51.0   | -7       |
| 2439.30         | -48 x 50               | -57.9   | -51.0   | -6.9     |
| 2439.35         | -47 x 50               | -57.5   | -51.0   | -6.5     |
| 2439.40         | -46 x 50               | -57.2   | -51.0   | -6.2     |
| 2439.45         | -45 x 50               | -57.2   | -51.0   | -6.2     |
| 2439.50         | -44 x 50               | -57.0   | -51.0   | -6       |
| 2439.55         | -43 x 50               | -57.0   | -51.0   | -6       |
| 2439.60         | -42 x 50               | -56.9   | -51.0   | -5.9     |
| 2439.65         | -41 x 50               | -57.0   | -51.0   | -6       |
| 2439.70         | -40 x 50               | -57.2   | -51.0   | -6.2     |
| 2439.75         | -39 x 50               | -57.3   | -51.0   | -6.3     |
| 2439.80         | -38 x 50               | -57.2   | -51.0   | -6.2     |
| 2439.85         | -37 x 50               | -57.4   | -51.0   | -6.4     |
| 2439.90         | -36 x 50               | -57.8   | -51.0   | -6.8     |
| 2439.95         | -35 x 50               | -58.0   | -51.0   | -7       |
| 2440.00         | -34 x 50               | -57.9   | -51.0   | -6.9     |
| 2440.05         | -33 x 50               | -57.8   | -51.0   | -6.8     |
| 2440.10         | -32 x 50               | -57.8   | -51.0   | -6.8     |
| 2440.15         | -31 x 50               | -58.0   | -51.0   | -7       |
| 2440.20         | -30 x 50               | -58.4   | -51.0   | -7.4     |
| 2440.25         | -29 x 50               | -58.8   | -51.0   | -7.8     |
| 2440.30         | -28 x 50               | -58.6   | -51.0   | -7.6     |
| 2440.35         | -27 x 50               | -58.6   | -51.0   | -7.6     |
| 2440.40         | -26 x 50               | -58.4   | -51.0   | -7.4     |
| 2440.45         | -25 x 50               | -58.3   | -51.0   | -7.3     |
| 2440.50         | -24 x 50               | -58.4   | -51.0   | -7.4     |
| 2440.55         | -23 x 50               | -58.4   | -51.0   | -7.4     |
| 2440.60         | -22 x 50               | -58.5   | -51.0   | -7.5     |
| 2440.65         | -21 x 50               | -58.5   | -51.0   | -7.5     |
| 2440.70         | -20 x 50               | -58.6   | -51.0   | -7.6     |
| 2440.75         | -19 x 50               | -59.0   | -51.0   | -8       |
| 2440.80         | -18 x 50               | -59.3   | -51.0   | -8.3     |
| 2440.85         | -17 x 50               | -59.3   | -51.0   | -8.3     |
| 2440.90         | -16 x 50               | -59.4   | -51.0   | -8.4     |
| 2440.95         | -15 x 50               | -59.3   | -51.0   | -8.3     |
| 2441.00         | -14 x 50               | -59.3   | -51.0   | -8.3     |
| 2441.05         | -13 x 50               | -59.2   | -51.0   | -8.2     |
| 2441.10         | -12 x 50               | -59.2   | -51.0   | -8.2     |
| 2441.15         | -11 x 50               | -59.2   | -51.0   | -8.2     |
| 2441.20         | -10 x 50               | -59.4   | -51.0   | -8.4     |
| 2441.25         | -09 x 50               | -59.8   | -51.0   | -8.8     |
| 2441.30         | -08 x 50               | -60.2   | -51.0   | -9.2     |
| 2441.35         | -07 x 50               | -59.8   | -51.0   | -8.8     |
| 2441.40         | -06 x 50               | -59.4   | -51.0   | -8.4     |
| 2441.45         | -05 x 50               | -59.4   | -51.0   | -8.4     |
| 2441.50         | -04 x 50               | -59.5   | -51.0   | -8.5     |
| 2441.55         | -03 x 50               | -59.3   | -51.0   | -8.3     |
| 2441.60         | -02 x 50               | -59.2   | -51.0   | -8.2     |
| 2441.65         | -01 x 50               | -59.3   | -51.0   | -8.3     |
| 2441.70         | -00 x 50               | -59.3   | -51.0   | -8.3     |

Table 4 : J/S values for  $f_0(-0x50\text{kHz})$  to  $f_0(-50x50\text{kHz})$





### 1.3 Summary of J/S values

| J/S table 1              | J/S table 2 | J/S table 3 | J/S table 4 |
|--------------------------|-------------|-------------|-------------|
| -9.5                     | -9.6        | -8          | -9.2        |
| -9.4                     | -9.6        | -7.9        | -8.8        |
| -9.4                     | -9.5        | -7.9        | -8.8        |
| -9.4                     | -9.5        | -7.8        | -8.5        |
| -9.3                     | -9.4        | -7.8        | -8.4        |
| -9.3                     | -9.3        | -7.7        | -8.4        |
| -9.3                     | -9.2        | -7.6        | -8.4        |
| -9.2                     | -9.2        | -7.5        | -8.4        |
| -9.1                     | -9.2        | -7.5        | -8.3        |
| -9.1                     | -9.2        | -7.4        | -8.3        |
| -9.1                     | -9.1        | -7.3        | -8.3        |
| -9                       | -9.1        | -7.3        | -8.3        |
| -8.9                     | -9.1        | -7.3        | -8.3        |
| -8.9                     | -9.1        | -7.2        | -8.3        |
| -8.9                     | -9.1        | -7.2        | -8.3        |
| -8.9                     | -9          | -7.1        | -8.2        |
| -8.9                     | -8.9        | -7.1        | -8.2        |
| <b><i>J/S = -8.8</i></b> | -8.9        | -7          | -8.2        |
| -8.8                     | -8.9        | -7          | -8.2        |
| -8.8                     | -8.9        | -6.9        | -8          |
| -8.7                     | -8.8        | -6.8        | -7.8        |
| -8.6                     | -8.8        | -6.8        | -7.6        |
| -8.4                     | -8.4        | -6.7        | -7.6        |
| -8.4                     | -8.4        | -6.7        | -7.6        |
| -8.1                     | -8.3        | -6.7        | -7.5        |
| -8                       | -8.2        | -6.7        | -7.5        |
| -8                       | -8.2        | -6.6        | -7.4        |
| -8                       | -8          | -6.6        | -7.4        |
| -7.9                     | -8          | -6.6        | -7.4        |
| -7.5                     | -7.9        | -6.5        | -7.4        |
| -7.4                     | -7.9        | -6.5        | -7.3        |
| -7                       | -7.9        | -6.4        | -7.2        |
| -7                       | -7.8        | -6.4        | -7          |
| -6.6                     | -7.4        | -6.2        | -7          |
| -6.2                     | -7.4        | -6.2        | -7          |
| -5.9                     | -7.3        | -6          | -6.9        |
| -5.6                     | -7.3        | -5.8        | -6.9        |
| -5.6                     | -7.3        | -5.8        | -6.8        |
| -5.5                     | -7.2        | -5.7        | -6.8        |
| -5.5                     | -7.2        | -5.3        | -6.8        |
| -5.3                     | -7.2        | -5.2        | -6.5        |
| -5.2                     | -7.1        | -5.1        | -6.4        |
| -5.2                     | -7          | -5.1        | -6.3        |
| -5.1                     | -7          | -5.1        | -6.2        |
| -5                       | -6.8        | -5          | -6.2        |
| -5                       | -6.8        | -5          | -6.2        |
| -4.9                     | -6.6        | -4.8        | -6.2        |
| -4.8                     | -6.5        | -4.7        | -6          |
| -4.7                     | -6.3        | -4.5        | -6          |
| -4.7                     | -6.3        | -4.4        | -6          |
| -4.7                     | -6.2        | -4.3        | -5.9        |

Table 5: J/S values sorted in descending order

Note: Values in bold font are 20% worst case discarded. *J/S = -8.8* (italics)

## 1.4 Photograph of testsetup



**Photograph 1: testsetup**