

ACLARA RF SYSTEMS
Former HEXAGRAM, Inc.
30400 Solon Road.
Solon, OH 44139
440-528-7200

Dec. 14, 2011


Field Calibration and Tune-Up Procedure
FCC ID: LLB11009X

Aclara RF Systems, Formerly Hexagram's low power RF devices have passed through extensive testing and calibration Procedures while in the factory.

We test the LLB11009X units in production at the customer operating frequency of 467.3125MHz and measure the conducted power at 28 dBm with +/- 1.5 dB tolerance. The transmit power level is fixed and is set using a software setting in the Transceiver. The Hexagram's low power RF devices are shipped to the customer in the sealed enclosures. Therefore, no additional calibration, tuning is required in the field.

No adjustments can be made in the field, without breaking the factory sealed enclosure.

Sincerely,

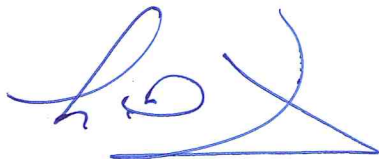

Larry Murphy
Executive Director of Engineering
440-528-7200
LMurphy@aclara.com