



Test Report – ISED RSS-247 DTS

Applicant: Aclara Technologies LLC

Signature:

A handwritten signature in black ink, appearing to read "Tim Royer".

Sr. EMC Engineer
EMC-003838-NE



Name & Title:

Tim Royer, EMC Engineer

Date of Signature

6/4/2024

Signature:

A handwritten signature in black ink, appearing to read "Kristoffer Costa".

Name & Title:

Kristoffer Costa, EMC Technician

Date of Signature

6/4/2024

This test report relates only to the items tested as identified and is not valid for any subsequent changes or modifications made to the equipment under test.

Table of Contents

1.	APPLICANT INFORMATION.....	4
1.1	TEST RESULT SUMMARY	4
2.	LOCATION OF TESTING	5
2.1	TEST LABORATORY	5
3.	TEST SAMPLE(S) (EUT/DUT).....	5
3.1	DESCRIPTION OF THE EUT.....	6
3.2	CONFIGURATION OF EUT	7
3.3	TEST SETUP OF EUT	7
4.	TEST METHODS & APPLICABLE REGULATORY LIMITS.....	8
4.1	TEST METHODS/STANDARDS/GUIDANCE:	8
4.2	APPLIED LIMITS AND REGULATORY LIMITS:.....	8
5.	MEASUREMENT UNCERTAINTY.....	8
6.	ENVIRONMENTAL CONDITIONS	8
6.1	TEMPERATURE & HUMIDITY.....	8
7.	LIST OF TEST EQUIPMENT AND TEST FACILITY.....	9
7.1	LIST OF TEST EQUIPMENT	9
8.	TEST RESULTS	10
8.1	99% OCCUPIED BANDWIDTH	11
8.1.1	99% Bandwidth Plot, 2402 MHz	12
8.1.2	99% Bandwidth Plot, 2426 MHz	13
8.1.3	99% Bandwidth Plot, 2480 MHz	14
8.2	20dB OCCUPIED BANDWIDTH.....	15
8.2.1	20dB Bandwidth Plot, 2402 MHz	16
8.2.2	20dB Bandwidth Plot, 2426 MHz	17
8.2.3	20dB Bandwidth Plot, 2480 MHz	18
8.3	6dB OCCUPIED BANDWIDTH	19
8.3.1	6dB Bandwidth (DTS BW), 2402 MHz	20
8.3.2	6dB Bandwidth (DTS BW), 2426 MHz	21
8.3.3	6dB Bandwidth (DTS BW), 2480 MHz	22
8.4	POWER SPECTRAL DENSITY (PSD).....	23
8.4.1	Power Spectral Density (PSD), 2402 MHz	24
8.4.2	Power Spectral Density (PSD), 2426 MHz	25
8.4.3	Power Spectral Density (PSD), 2480 MHz	26
8.5	DTS CONDUCTED OUTPUT POWER.....	27
8.6	BAND-EDGE MEASUREMENTS	28
8.6.1	Lower Band Edge Plot.....	29
8.6.2	Upper Band Edge Plot.....	30
8.7	RADIATED EMISSIONS.....	31
8.7.1	Radiated Emissions, 2402 MHz	32
8.7.2	Radiated Emissions, 2426 MHz	33



8.7.3	<i>Radiated Emissions, 2480 MHz</i>	34
9.	ANNEX-B – TEST SETUP PHOTOGRAPHS.....	35
10.	HISTORY OF TEST REPORT CHANGES.....	35

1. Applicant Information

Applicant: Aclara Technologies LLC
Address: 77 Westport Plaza Drive
Suite 500
St. Louis, Missouri, 63146, United States

1.1 Test Result Summary

The following test procedure and guidance were used for measuring IC RSS-GEN Issue 5. Full test results are available in this report.

No additions to the test methods were needed. There were no deviations, or exclusions from the test methods. No test results are from external providers or from the customer. The test results relate only to the items tested. Timco does not offer opinions and interpretations, only a pass/fail statement.

FCC Clauses	Description of the requirements	Result (Pass, Fail or N/A)
Applicable Clauses from RSS-GEN		
RSS-GEN 6.6	99 % Bandwidth	for reporting only
RSS-GEN 6.6	20dB Bandwidth	Pass
Applicable Clauses from RSS-247		
RSS-247 § 5.2	6dB Bandwidth	Pass
RSS-247 § 5.2	Power Spectral Density (PSD)	Pass
RSS-247 § 5.4	DTS conducted output power ERP	Pass
RSS-247 § 5.4	Ant Gain EIRP	N/A
RSS-247 § 5.5	Spurious Emissions (Out of Band) Emissions in nonrestricted frequency bands	Pass
RSS-247 § 5.5	Band-edge measurements	Pass

2. Location of Testing

2.1 Test Laboratory

Timco Engineering Inc. is a subsidiary of Industrial Inspection & Analysis, Inc. ("IIA"). Testing was performed at IIA's permanent laboratory located at 13146 NW 86th Drive, Suite 400, Alachua, Florida 32615.

FCC test firm # 578780

FCC Designation # US1070

FCC site registration is under A2LA certificate # 0955.01

ISED Canada test site registration # 2056A

EU Notified Body # 1177

For all designations see A2LA scope # 0955.01

3. Test Sample(s) (EUT/DUT)

The test sample was received: 5/21/2024

Dates of Testing: 5/23/2024 – 5/29/2024

3.1 Description of the EUT

A description as well as unambiguous identification of the EUT(s) tested. Where more than one sample is required for technical reasons (such as the use of connected units for the purpose of conducted output power testing where the product units will have integral antennas), each specific test shall identify which unit was tested.

Identification	
IC ID:	4546A-2022002
Brief Description	Ultrasonic Gas Meter
Model(s) #	3511-066-LCW
Serial #	2308570196, 2308570094
Firmware	V01.02.0002

Technical Characteristics	
Number of Channels	N/A
Antenna Connector	N/A
Antenna Gain	1.5dBi
Voltage Rating (AC or Batt.)	3.4 VDC

Results Summary	
Power output	☐ Conducted Measurement ☒ EIRP 0.00277W
Frequency Range	2400 MHz- 2483.5 MHz
Type of Modulation	FM
Emission Classification	F1D
Transmitter Spurious (worst case) at 3 meters	2760 MHz @ -47.01 dBm
Max Frequency Deviation	0.250 kHz

Note: Information such as antenna gain, firmware/software numbers are provided by manufacturer and cannot be validated by the test lab.

3.2 Configuration of EUT

Test Modes					
Band (MHZ)	Mode (#)	Mode (Type)	Test Frequencies (MHz)	Modulation	Number of Antennas
2400 MHz- 2483.5 MHz	1	FM	2402 MHz 2426 MHz 2480 MHz	FM (F1D)	1

Operating conditions during Testing:

No modifications of the device under test (including firmware, specific software settings, and input/output signal levels to the EUT).

Peripherals used during Testing:

A laptop was used to program the EUT.

3.3 Test Setup of EUT

Equipment, antenna, and cable arrangement. The setup of the equipment and cable or wire placement on the test site that produces the highest radiated and the highest ac power line conducted emissions shall be shown clearly and described. Information on the orientation of portable equipment during testing shall be included. Drawings or photographs may be used for this purpose.

Test Setups are included in the test report.

4. Test methods & Applicable Regulatory Limits

4.1 Test methods/Standards/Guidance:

Test procedures and guidance for measuring Digital Transmission System (DTS) are provided in RSS-GEN.

- 1) RSS-GEN

4.2 Applied Limits and Regulatory Limits:

- 2) RSS-GEN
- 3) RSS 247 Issue 3

5. Measurement Uncertainty

Parameter	Uncertainty (dB)
Conducted Emissions	± 3.14 dB
Radiated Emissions (9kHz – 30 MHz)	± 3.08 dB
Radiated Emissions (30 – 200 MHz)	± 2.16 dB
Radiated Emissions (200 – 1000 MHz)	± 2.15 dB
Radiated Emissions (1 GHz – 18 GHz)	± 2.14 dB
Radiated Emissions (18 GHz – 40 GHz)	± 2.31 dB
Note: The uncertainties provided in this table represent an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of K=2.	

6. Environmental Conditions

6.1 Temperature & Humidity

Measurements performed at the test site did not exceed the following:

Parameter	Measurement
Temperature	23 C +/- 5%
Humidity	55% +/- 5%
Barometric Pressure	30.05 in Hg
Note: Specific environmental conditions that are applicable to a specific test are available in the test result section.	

7. List of Test Equipment and Test Facility

The test equipment used identified by type, manufacturer, serial number, or other identification and the date on which the next calibration or service check is due.

Description of the firmware or software used to operate EUT for testing purposes.

A complete list of all test equipment used shall be included with the test report. The manufacturer's model and serial numbers, and date of last calibration, and calibration interval shall be included. Measurement cable loss, measuring instrument bandwidth and detector function, video bandwidth, if appropriate, and antenna factors shall also be included where applicable.

7.1 List of Test Equipment

Test Equipment						
Type	Device	Manufacturer	Model	SN#	Current Cal	Cal Due
Antenna	Double-Ridged Horn/ETS Horn 1	ETS-Lindgren	3117	00035923	5/31/23	11/18/2024
CHAMBER	CHAMBER	Panashield	3M	N/A	12/29/23	12/18/2025
Receiver	EMI Test Receiver R&S ESU 40	Rohde & Schwarz	ESU 40	100320	5/27/21	11/18/2024
Receiver	EMI Test Receiver R&S ESW44	Rohde & Schwarz	ESW44	103049	10/13/21	10/12/2024
Signal Generator	Signal Generator HP 8648C	HP	8648C	35537A01679	8/4/22	8/03/2025

Software			
Software	Author	Version	Validation on
ESU Firmware	Rohde & Schwarz	4.43 SP3; BIOS v5.1-24-3	2018
RSCCommander	Rohde & Schwarz	1.6.4	2014
ScopeExplorer	LeCroy	v2.25.0.0	2009
Field Strength	Timco	v4.10.7.0	2016

8. Test Results

The results of the test are usually indicated in the form of tables, spectrum analyzer plots, charts, sample calculations, as appropriate for each test procedure.

A description and/or a block diagram of the test setup is usually provided.

The measurement results, along with the appropriate limits for comparison, may be presented in tabular or graphical form. In addition, any variation in the measurement environment may be reported if applicable (e.g., a significant change of temperature that could affect the cable loss and amplifier response).

Unless noted otherwise in the referenced standard, the measurements of **ac power-line conducted emissions and conducted power output** will be reported in units of dB μ V. Unless noted otherwise in the referenced standard, the measurements of **radiated emissions** will be reported in units of decibels, referenced to one microvolt per meter (dB μ V/m) for electric fields, or to one ampere per meter (dBA/m) for magnetic fields, at the distance specified in the appropriate standards or requirements. The measurements of antenna-conducted power for receivers may be reported in units of dB μ V if the impedance of the measuring instrument is also reported. Otherwise, antenna-conducted power will be reported in units of decibels referenced to one milliwatt (dBm). All formulas for data conversions and conversion factors, if used, will be included in this measurement report.

Example:


Freq (MHz)	Meter Reading	+ ACF	+CL	= FS
33	20 dB μ V	+ 10.36 dB/m	+0.40 dB	=30.36 dB μ V/m @ 3m

$EIRP = P_{cond} \text{ (dBm)} + dBi$

8.1 99% Occupied Bandwidth

Requirement from RSS-GEN 6.6 and test procedure from RSS-GEN 6.6


Setup



99% BW Test Results


Tuned Frequency (MHz)	99% BW (MHz)
2402	1.0277
2426	1.0329
2480	1.0104

8.1.1 99% Bandwidth Plot, 2402 MHz

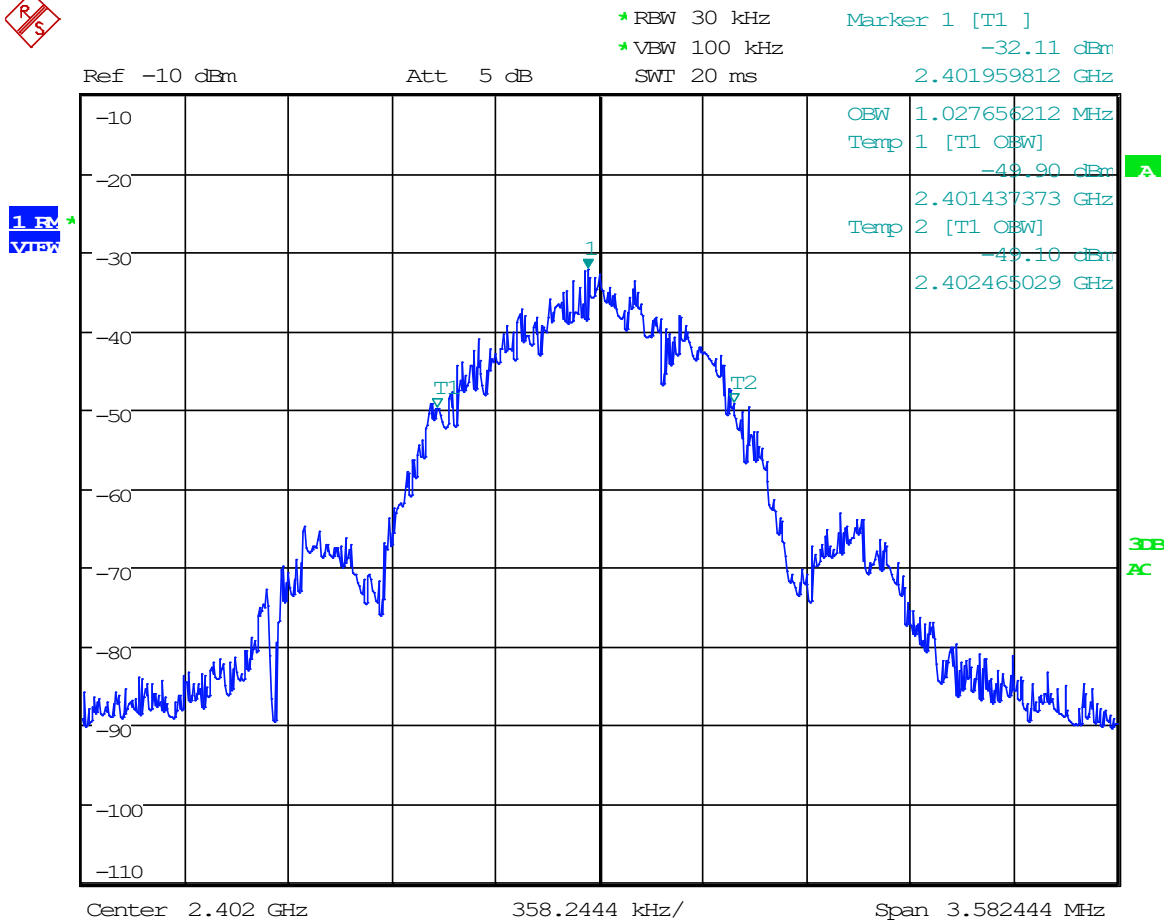


Date: 28.MAY.2024 14:17:25

8.1.2 99% Bandwidth Plot, 2426 MHz

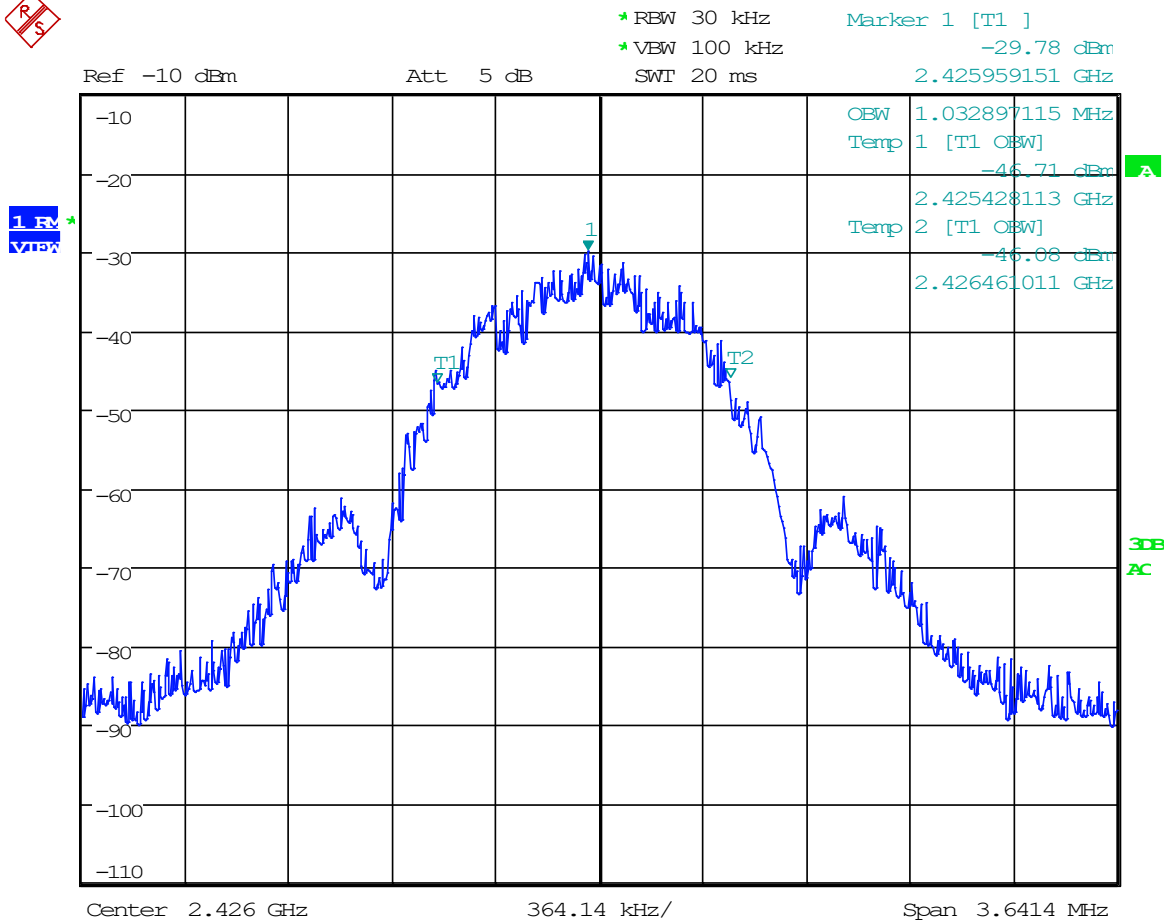

Date: 28.MAY.2024 14:40:47

8.1.3 99% Bandwidth Plot, 2480 MHz

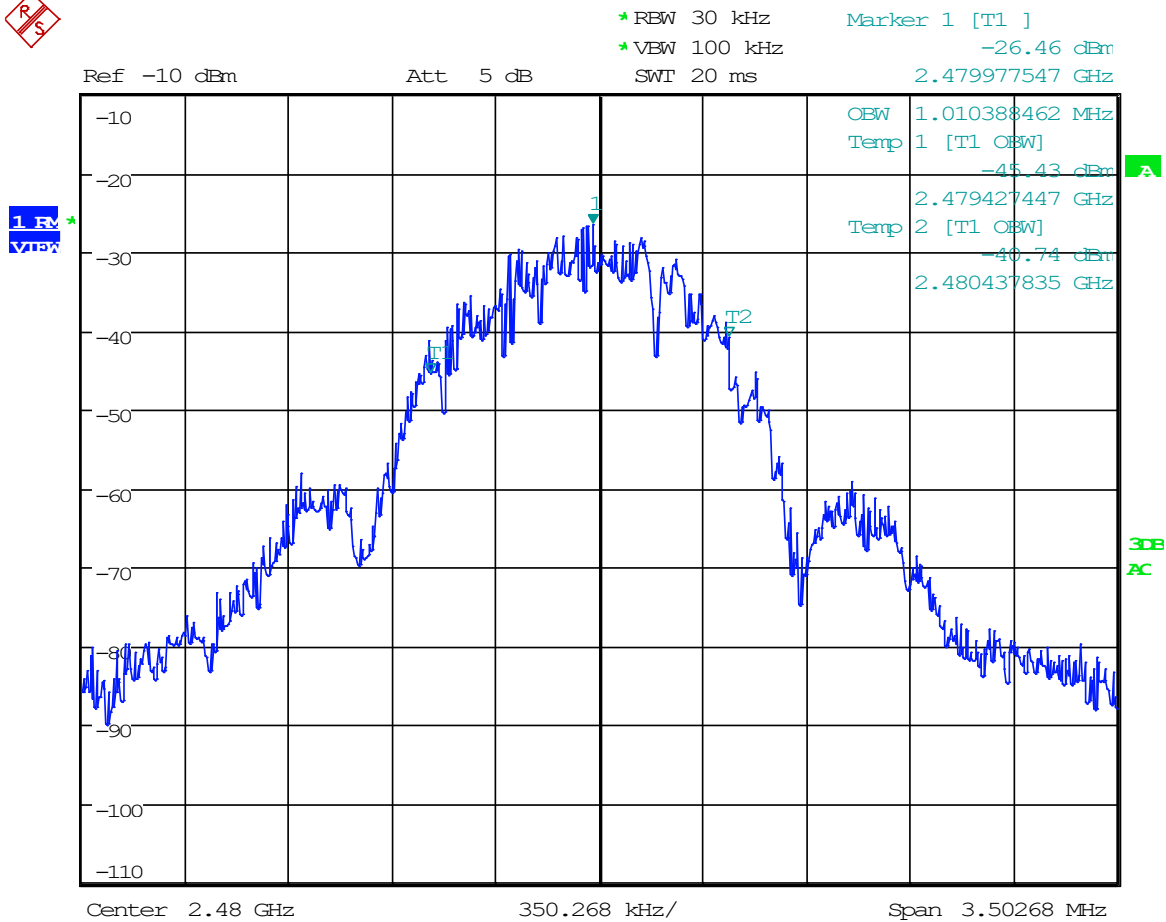


Date: 28.MAY.2024 14:44:08

8.2 20dB Occupied Bandwidth

Requirement from RSS-GEN 6.6 and test procedure from RSS-GEN 6.6


Setup



20dB BW Test Results


Tuned Frequency (MHz)	20dB BW (MHz)
2402	1.089
2426	1.111
2480	1.083

8.2.1 20dB Bandwidth Plot, 2402 MHz

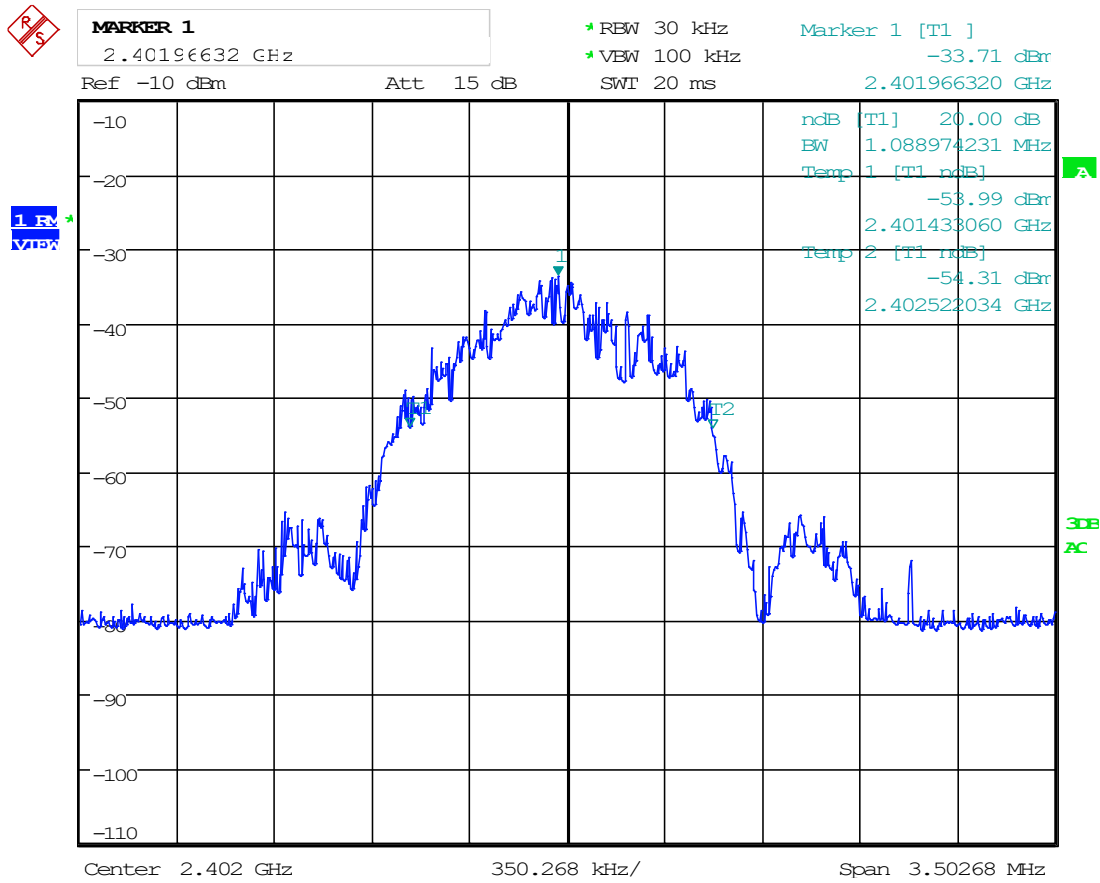


Date: 28.MAY.2024 14:57:35

8.2.2 20dB Bandwidth Plot, 2426 MHz

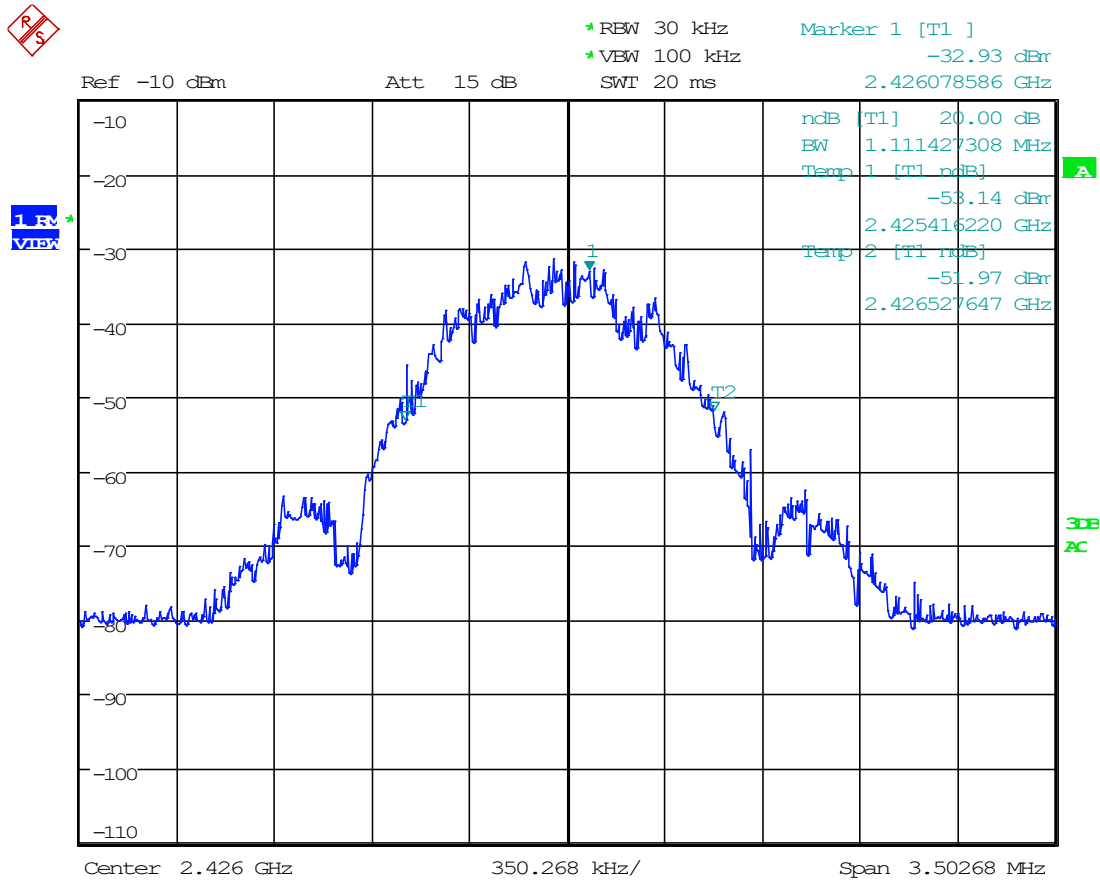

Date: 28.MAY.2024 14:59:32

8.2.3 20dB Bandwidth Plot, 2480 MHz

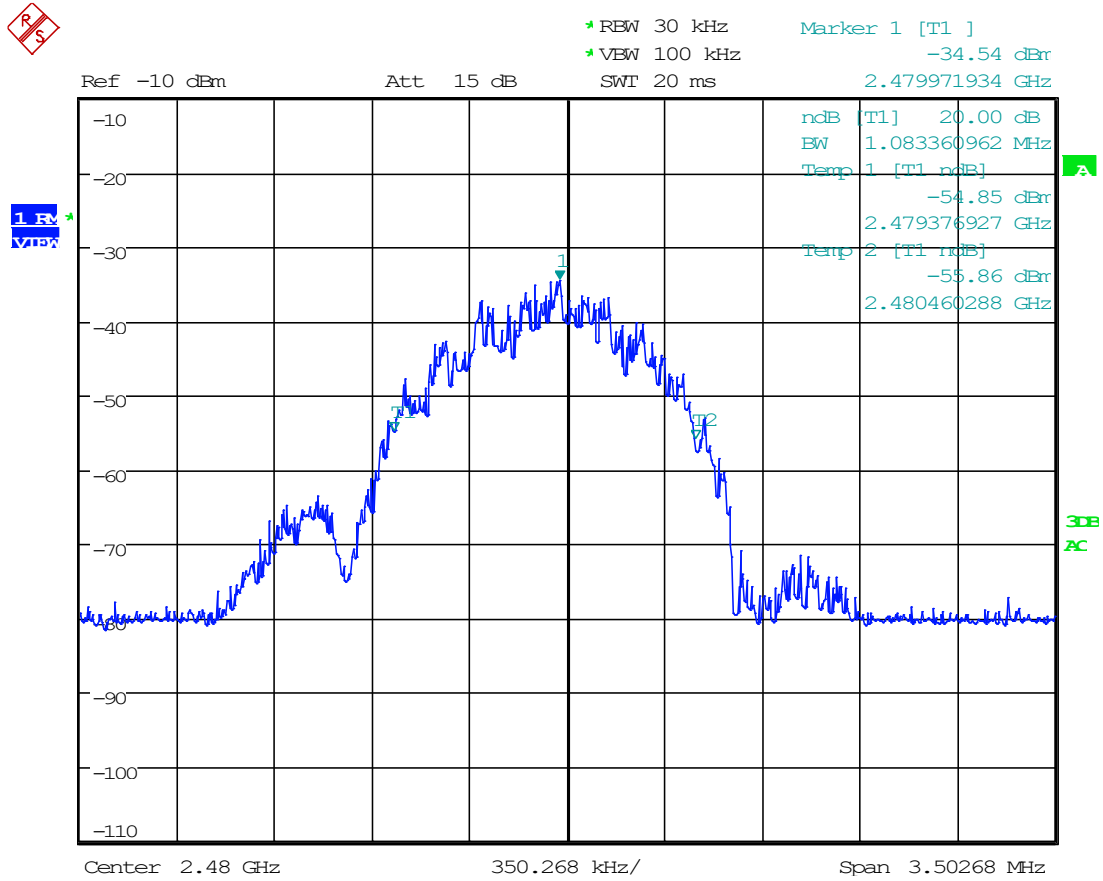


Date: 28.MAY.2024 14:48:39

8.3 6dB Occupied Bandwidth

Requirement from RSS-247 § 5.2 and test procedure from RSS-GEN 6.6


Setup



6dB BW Test Results


Tuned Frequency (MHz)	6dB BW (kHz)
2402	595.007
2426	499.581
2480	488.354

8.3.1 6dB Bandwidth (DTS BW), 2402 MHz

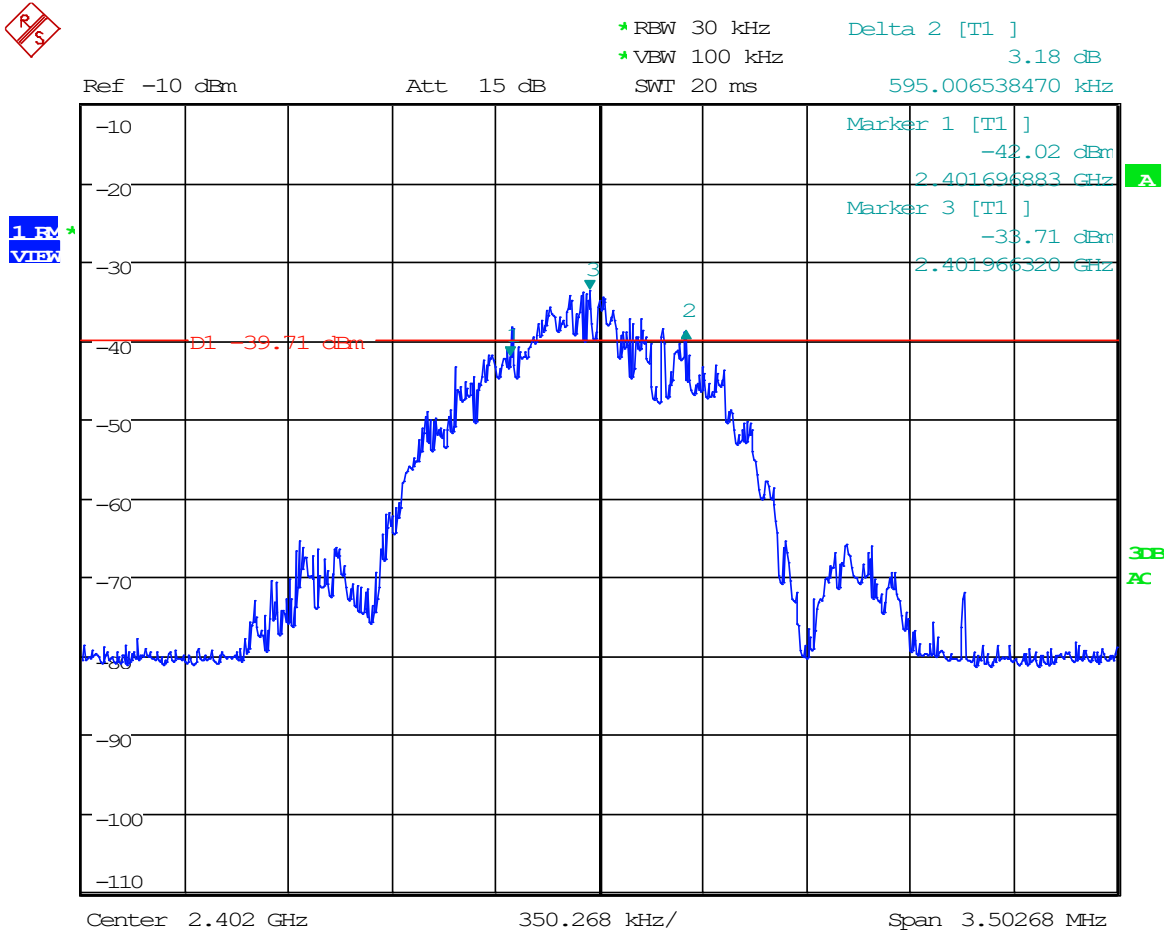


Date: 28.MAY.2024 14:56:47

8.3.2 6dB Bandwidth (DTS BW), 2426 MHz

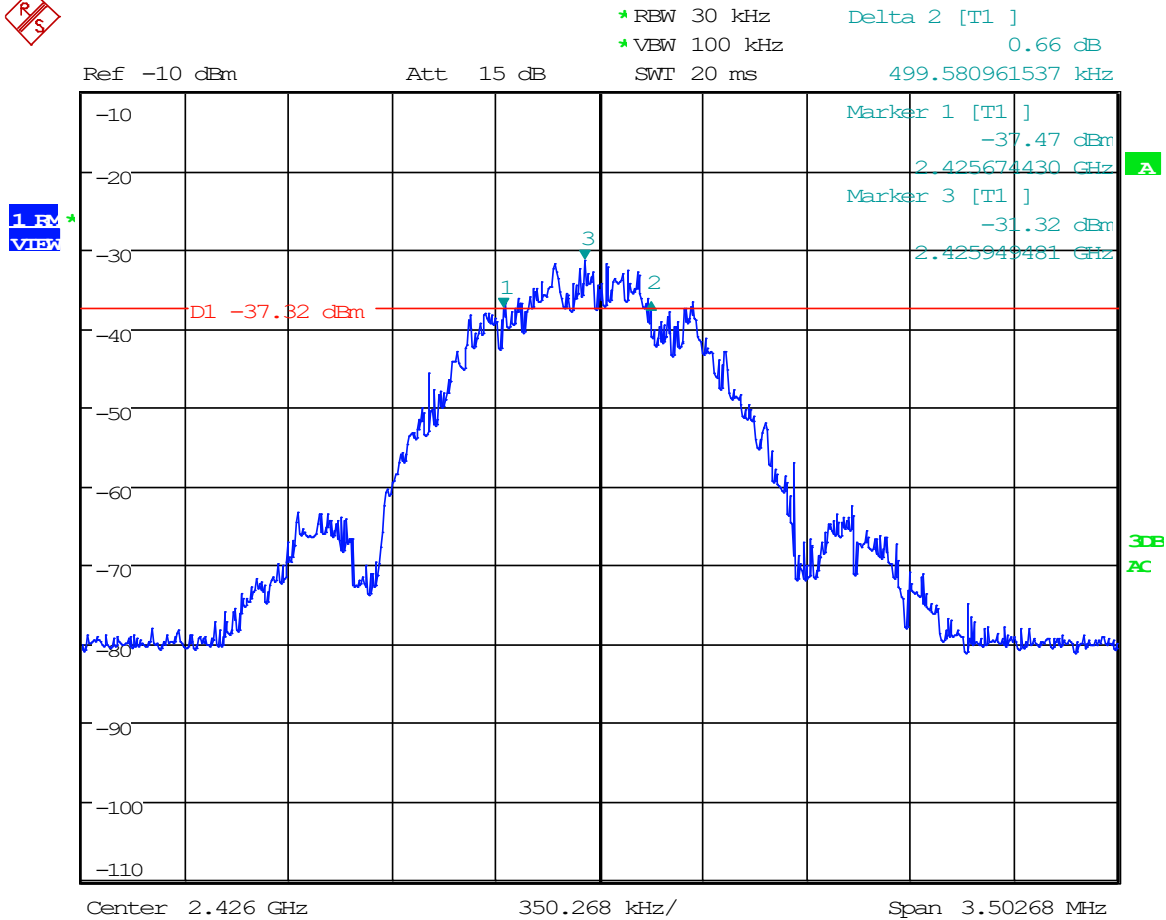

Date: 28.MAY.2024 15:00:37

8.3.3 6dB Bandwidth (DTS BW), 2480 MHz

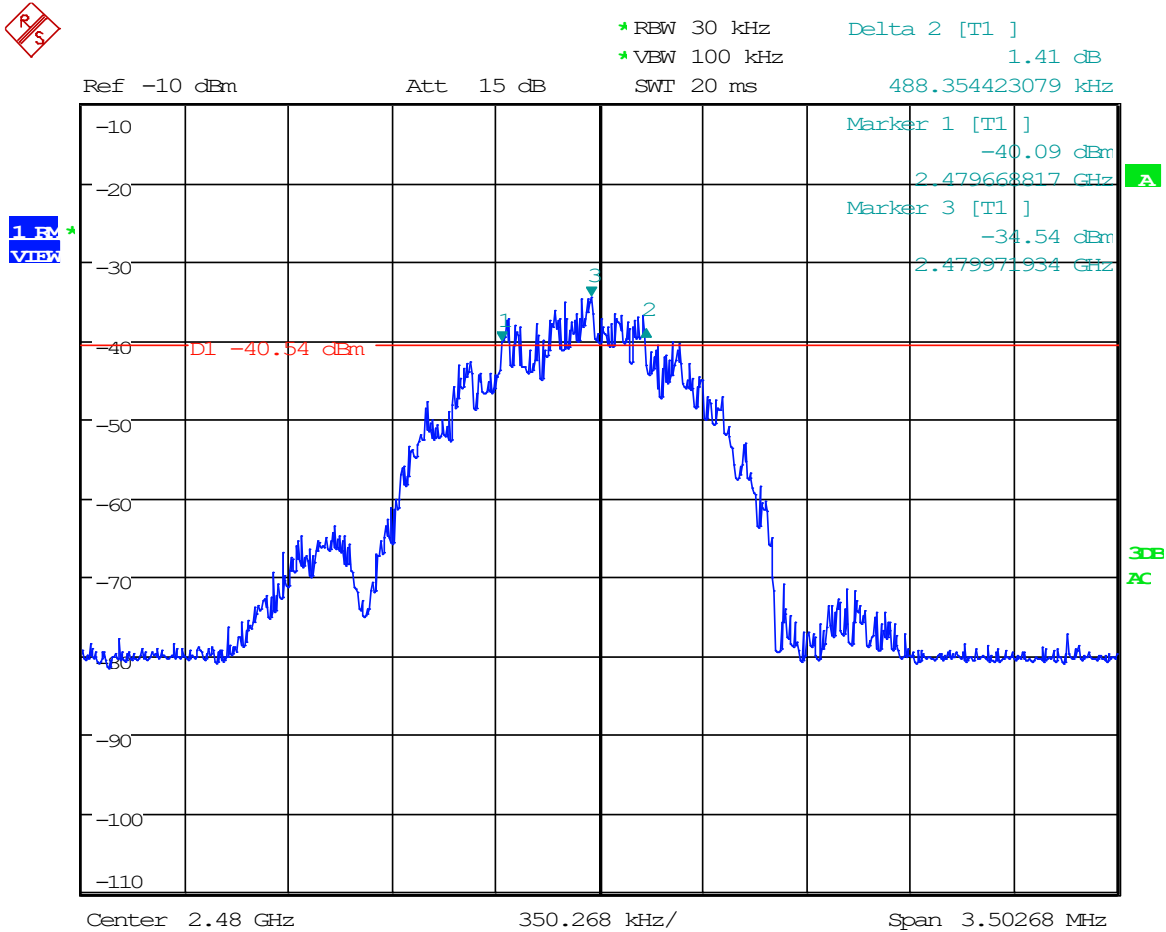


Date: 28.MAY.2024 14:50:01

8.4 Power Spectral Density (PSD)

Limits from RSS-247 § 5.2 and test procedure from RSS-GEN 6.6


Setup



PSD Test Results


Tuned Frequency (MHz)	PSD Level (dBm)
2402	1.95
2426	4.60
2480	5.18

8.4.1 Power Spectral Density (PSD), 2402 MHz

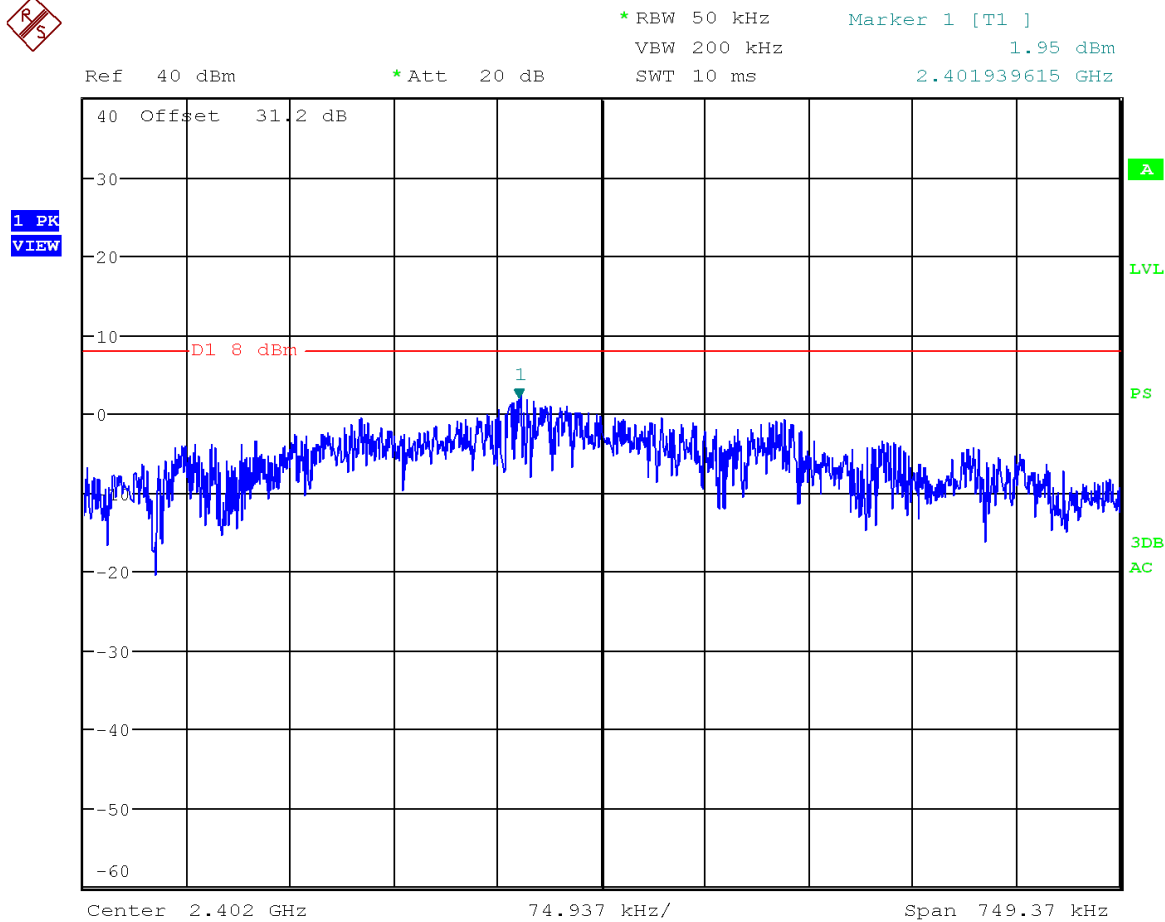


Date: 28.MAY.2024 15:37:04

8.4.2 Power Spectral Density (PSD), 2426 MHz

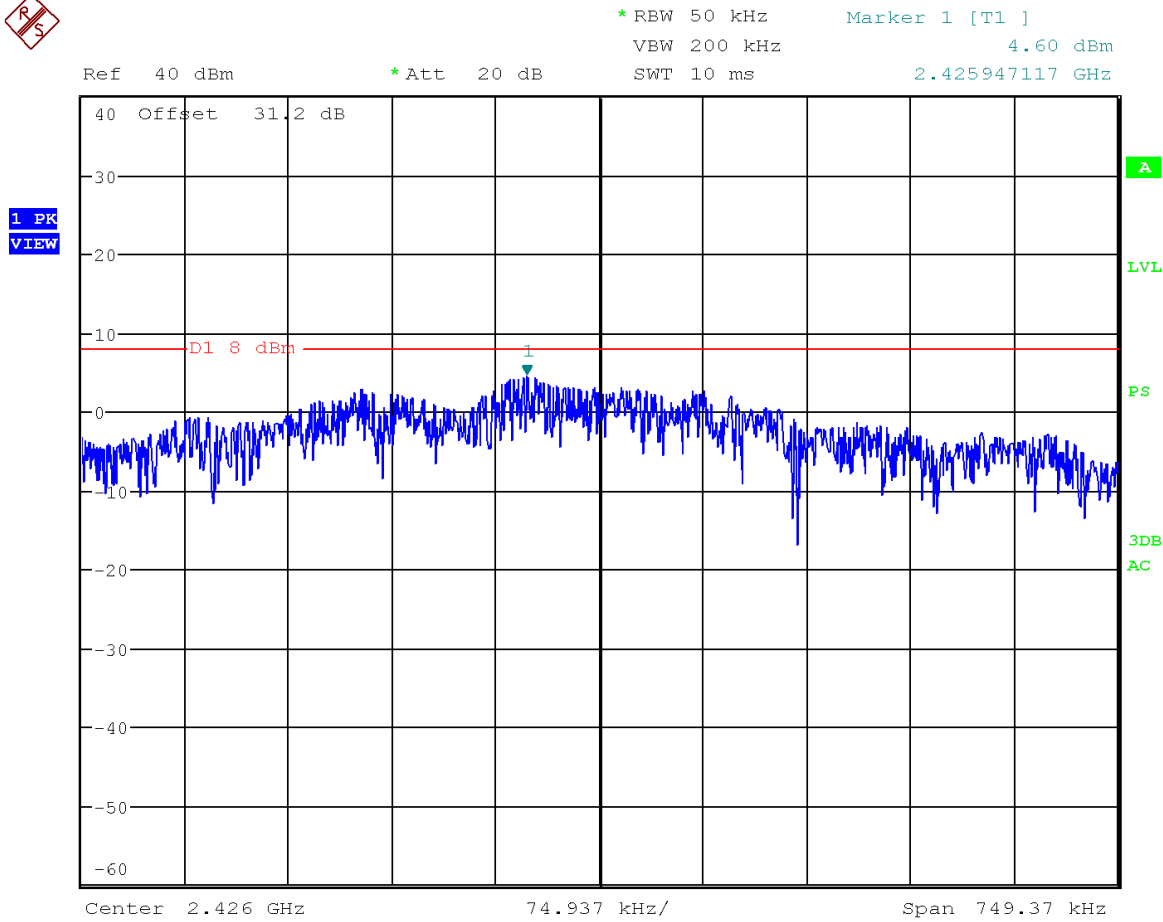

Date: 28.MAY.2024 15:39:03

8.4.3 Power Spectral Density (PSD), 2480 MHz

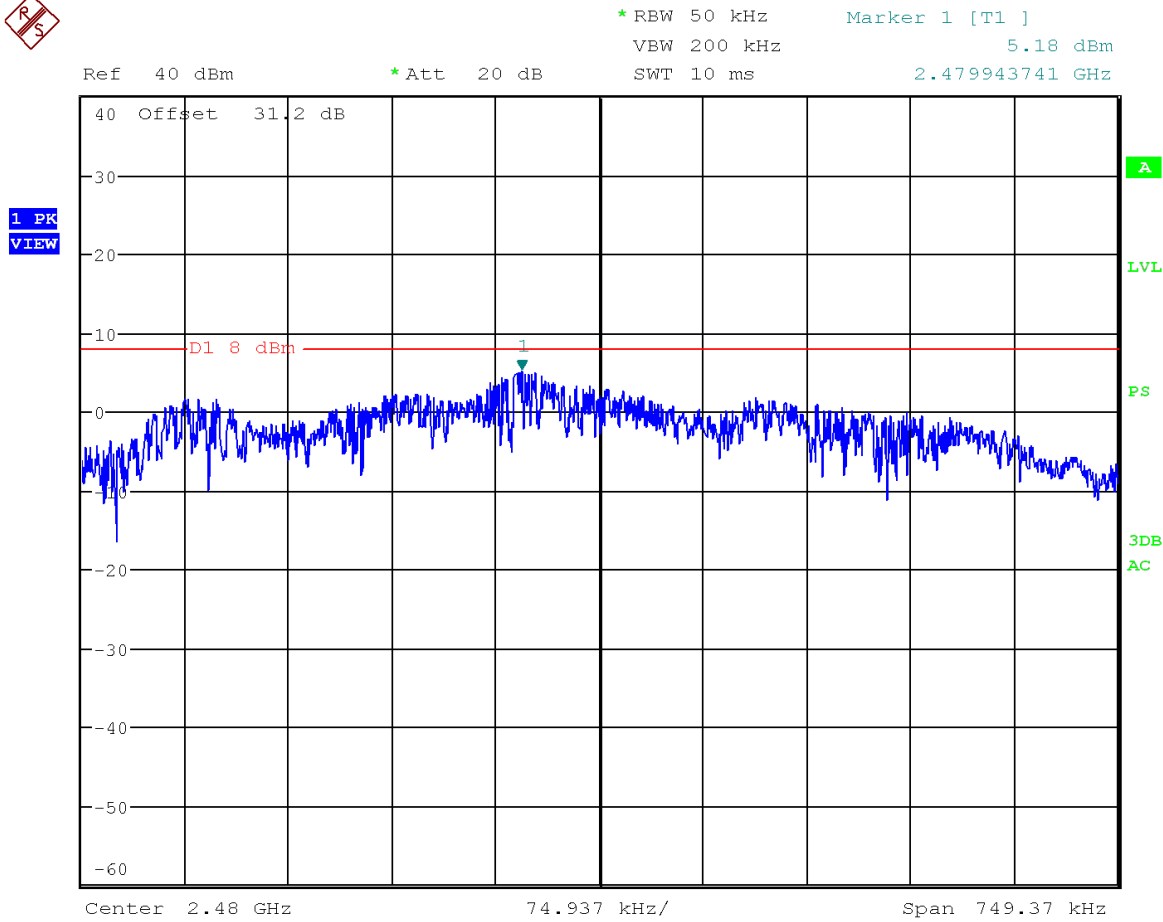


Date: 28.MAY.2024 15:46:09

8.5 DTS conducted output power

Limits from RSS-247 § 5.4 and test procedure from RSS-GEN 6.6

Setup



Conducted Output Power Test Results

Tuned Frequency (MHz)	Power Output (dBm)
2402	97.42 dBuV/m/ 0.004 dBm
2426	101.09 dBuV/m/ 3.71 dBm
2480	101.81 dBuV/m/ 4.43 dBm


- MAXIMUM Conducted Output Power Standard = 101.81 dBuV/m/ 4.43 dBm

Tuned Frequency (MHz)	Detector	Meter Reading (dBμV)	Antenna Polarity	Coax Loss (dB)	Antenna Correction Factor (dB/m)	Distance (m)	Field Strength (dBμV/m)	ERP (dBm)
2402.00	PK	59.70	H	5.62	32.10	3.00	97.42	0.04
2402.00	PK	50.70	V	5.62	32.10	3.00	88.42	-8.96
2426.00	PK	63.20	H	5.61	32.28	3.00	101.09	3.72
2426.00	PK	54.30	V	5.61	32.28	3.00	92.19	-5.18
2480.00	PK	63.80	H	5.62	32.39	3.00	101.81	4.43
2480.00	PK	59.30	V	5.62	32.39	3.00	97.31	-0.07
2480.00	AV	15.60	H	5.62	32.39	3.00	53.61	-43.77
2480.00	AV	11.00	V	5.62	32.39	3.00	49.01	-48.37


8.6 Band-edge measurements

Requirement from RSS-247 § 5.5 and test procedure from RSS-GEN


Conducted Test Setup




Radiated Test Setup, 30 – 1000 MHz

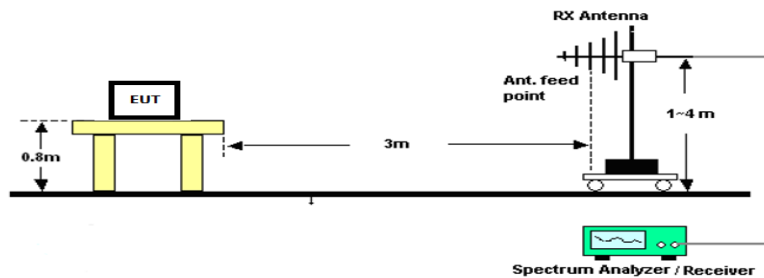

Radiated Test Setup, Above 1000 MHz

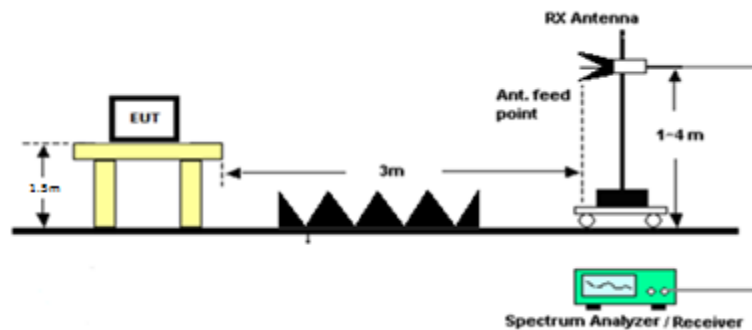


8.6.1 Lower Band Edge Plot

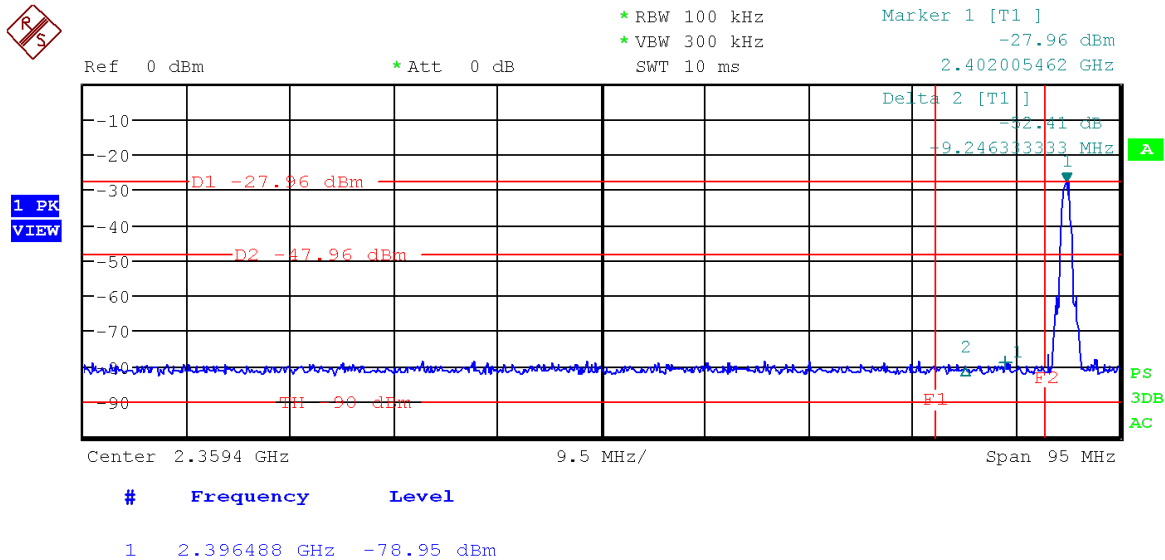

Date: 28.MAY.2024 15:23:47

8.6.2 Upper Band Edge Plot

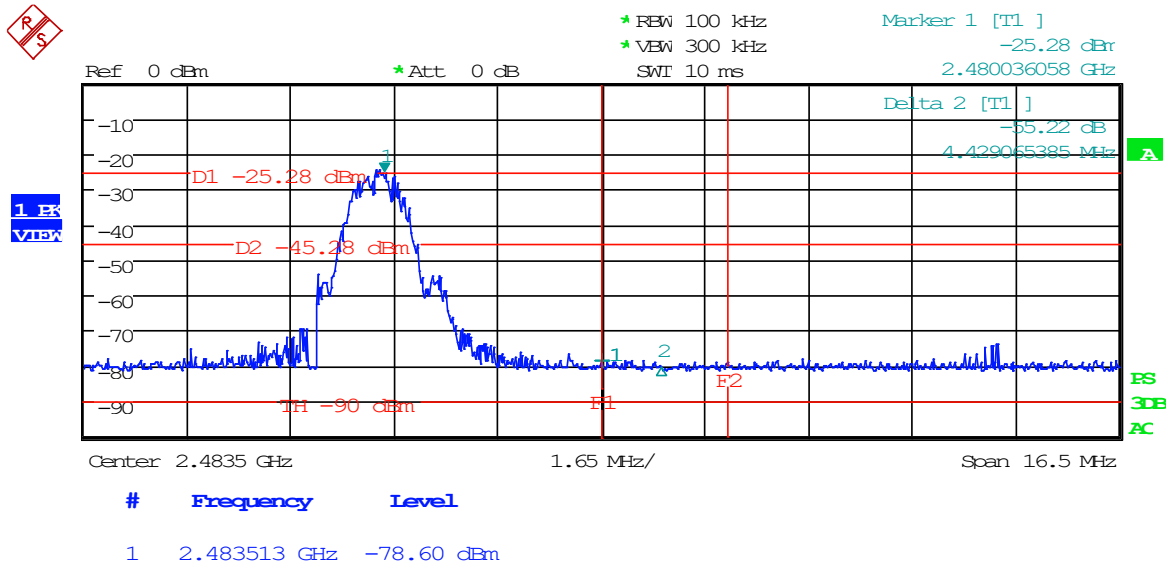


Date: 28.MAY.2024 15:26:23


8.7 Radiated Emissions

Requirement from RSS-247 § 5.5 and test procedure from RSS-GEN

Radiated Test Setup, 30 – 1000 MHz

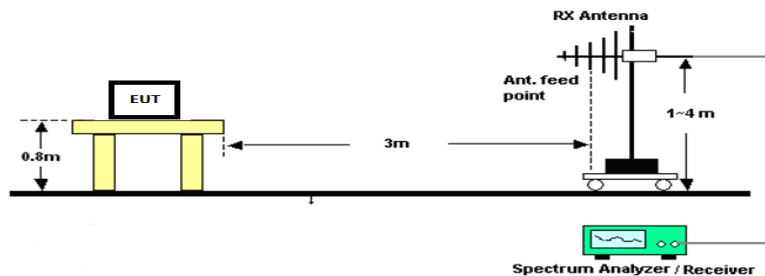

Radiated Test Setup, Above 1000 MHz

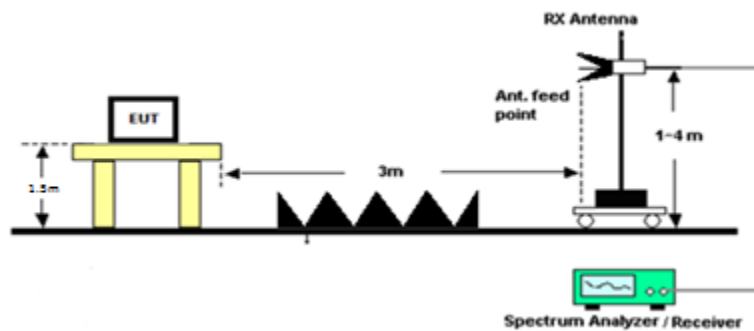

Radiated Emissions in Restricted Bands, Tabular Data

8.7.1 Radiated Emissions, 2402 MHz

Tuned Frequency (MHz)	Emission Frequency (MHz)	15.205 Restricted Band	15.205, 15.35, 15.247(d) Detector	Meter Reading (dBμV)	Antenna Polarity	Coax Loss (dB)	Duty Cycle Correction (dB)	Antenna Correction Factor (dB/m)	Distance (m)	Field Strength (dBμV/m)	Limit (dBμV/m)	Margin (dB)
2402.00	4804.00	X	PK	-4.60	H	7.10	0.00	34.19	3.00	36.68	73.98	37.30
2402.00	4804.00	X	PK	-5.80	V	7.10	0.00	34.19	3.00	35.48	73.98	38.50
2402.00	4804.00	X	AVG	-22.20	H	7.10	0.00	34.19	3.00	19.08	53.98	34.90
2402.00	4804.00	X	AVG	-22.00	V	7.10	0.00	34.19	3.00	19.28	53.98	34.70
2402.00	7206.00		PK	-5.30	H	9.54	0.00	36.31	3.00	40.54	53.98	13.44
2402.00	7206.00		PK	-5.20	V	9.54	0.00	36.31	3.00	40.64	53.98	13.34
2402.00	9608.00		PK	-4.10	H	10.70	0.00	36.81	3.00	43.41	53.98	10.57
2402.00	9608.00		PK	-4.10	V	10.70	0.00	36.81	3.00	43.41	53.98	10.57
2402.00	12010.00	X	PK	-7.40	H	12.40	0.00	38.79	3.00	43.79	73.98	30.19
2402.00	12010.00	X	PK	-7.50	V	12.40	0.00	38.79	3.00	43.69	73.98	30.29
2402.00	12010.00	X	AVG	-21.80	H	12.40	0.00	38.79	3.00	29.39	53.98	24.59
2402.00	12010.00	X	AVG	-21.40	V	12.40	0.00	38.79	3.00	29.79	53.98	24.19
2402.00	14412.00		PK	-8.10	H	13.35	0.00	39.72	3.00	44.97	53.98	9.01
2402.00	14412.00		PK	-7.90	V	13.35	0.00	39.72	3.00	45.17	53.98	8.81
2402.00	16814.00		PK	-9.30	H	14.60	0.00	42.29	3.00	47.60	53.98	6.38
2402.00	16814.00		PK	-9.50	V	14.60	0.00	42.29	3.00	47.40	53.98	6.58
2402.00	19216.00	X	PK	-6.80	H	16.00	0.00	16.00	3.00	25.20	73.98	48.78
2402.00	19216.00	X	PK	-7.40	V	16.00	0.00	16.00	3.00	24.60	73.98	49.38
2402.00	19216.00	X	AVG	-21.20	H	16.00	0.00	16.00	3.00	10.80	53.98	43.18
2402.00	19216.00	X	AVG	-20.90	V	16.00	0.00	16.00	3.00	11.10	53.98	42.88
2402.00	21618.00		PK	-7.90	H	16.90	0.00	16.90	3.00	25.90	53.98	28.08
2402.00	21618.00		PK	-7.30	V	16.90	0.00	16.90	3.00	26.50	53.98	27.48
2402.00	24020.00		PK	-8.60	H	17.95	0.00	17.95	3.00	27.30	53.98	26.68
2402.00	24020.00		PK	-8.80	V	17.95	0.00	17.95	3.00	27.10	53.98	26.88

8.7.2 Radiated Emissions, 2426 MHz

Tuned Frequency (MHz)	Emission Frequency (MHz)	15.205 Restricted Band	15.205, 15.35, 15.247(d) Detector	Meter Reading (dBμV)	Antenna Polarity	Coax Loss (dB)	Duty Cycle Correction (dB)	Antenna Correction Factor (dB/m)	Distance (m)	Field Strength (dBμV/m)	Limit (dBμV/m)	Margin (dB)
2426.00	4852.00	X	PK	-6.60	H	7.23	0.00	34.17	3.00	34.79	73.98	39.19
2426.00	4852.00	X	PK	-5.20	V	7.23	0.00	34.17	3.00	36.19	73.98	37.79
2426.00	4852.00	X	AVG	-21.20	H	7.23	0.00	34.17	3.00	20.19	53.98	33.79
2426.00	4852.00	X	AVG	-21.20	V	7.23	0.00	34.17	3.00	20.19	53.98	33.79
2426.00	7278.00	X	PK	-4.70	H	9.56	0.00	36.48	3.00	41.34	73.98	32.64
2426.00	7278.00	X	PK	-5.00	V	9.56	0.00	36.48	3.00	41.04	73.98	32.94
2426.00	7278.00	X	AVG	-19.30	H	9.56	0.00	36.48	3.00	26.74	53.98	27.24
2426.00	7278.00	X	AVG	-19.40	V	9.56	0.00	36.48	3.00	26.64	53.98	27.34
2426.00	9704.00		PK	-5.50	H	10.87	0.00	37.01	3.00	42.39	53.98	11.59
2426.00	9704.00		PK	-4.90	V	10.87	0.00	37.01	3.00	42.99	53.98	10.99
2426.00	12130.00	X	PK	-8.60	H	12.31	0.00	38.87	3.00	42.57	73.98	31.41
2426.00	12130.00	X	PK	-8.50	V	12.31	0.00	38.87	3.00	42.67	73.98	31.31
2426.00	12130.00	X	AVG	-22.10	H	12.31	0.00	38.87	3.00	29.07	53.98	24.91
2426.00	12130.00	X	AVG	-22.00	V	12.31	0.00	38.87	3.00	29.17	53.98	24.81
2426.00	14556.00		PK	-8.30	H	13.77	0.00	39.76	3.00	45.23	53.98	8.75
2426.00	14556.00		PK	-7.70	V	13.77	0.00	39.76	3.00	45.83	53.98	8.15
2426.00	16982.00		PK	-9.30	H	14.81	0.00	42.14	3.00	47.65	53.98	6.33
2426.00	16982.00		PK	-10.00	V	14.81	0.00	42.14	3.00	46.95	53.98	7.03
2426.00	19408.00	X	PK	-6.80	H	15.58	0.00	15.58	3.00	24.37	73.98	49.61
2426.00	19408.00	X	PK	-7.50	V	15.58	0.00	15.58	3.00	23.67	73.98	50.31
2426.00	19408.00	X	AVG	-21.10	H	15.58	0.00	15.58	3.00	10.07	53.98	43.91
2426.00	19408.00	X	AVG	-21.10	V	15.58	0.00	15.58	3.00	10.07	53.98	43.91
2426.00	21834.00		PK	-8.00	H	17.00	0.00	17.00	3.00	26.01	53.98	27.97
2426.00	21834.00		PK	-8.00	V	17.00	0.00	17.00	3.00	26.01	53.98	27.97
2426.00	24260.00		PK	-9.00	H	18.03	0.00	18.03	3.00	27.06	53.98	26.92
2426.00	24260.00		PK	-9.00	V	18.03	0.00	18.03	3.00	27.06	53.98	26.92

8.7.3 Radiated Emissions, 2480 MHz

Tuned Frequency (MHz)	Emission Frequency (MHz)	15.205 Restricted Band	15.205, 15.35, 15.247(d) Detector	Meter Reading (dBμV)	Antenna Polarity	Coax Loss (dB)	Duty Cycle Correction (dB)	Antenna Correction Factor (dB/m)	Distance (m)	Field Strength (dBμV/m)	Limit (dBμV/m)	Margin (dB)
2480.00	4960.00	X	PK	-4.60	H	7.72	0.00	33.99	3.00	37.11	73.98	36.87
2480.00	4960.00	X	PK	-6.70	V	7.72	0.00	33.99	3.00	35.01	73.98	38.97
2480.00	4960.00	X	AVG	-21.90	H	7.72	0.00	33.99	3.00	19.81	53.98	34.17
2480.00	4960.00	X	AVG	-22.00	V	7.72	0.00	33.99	3.00	19.71	53.98	34.27
2480.00	7440.00	X	PK	-5.40	H	9.56	0.00	36.21	3.00	40.37	73.98	33.61
2480.00	7440.00	X	PK	-5.00	V	9.56	0.00	36.21	3.00	40.77	73.98	33.21
2480.00	7440.00	X	AVG	-18.90	H	9.56	0.00	36.21	3.00	26.87	53.98	27.11
2480.00	7440.00	X	AVG	-18.80	V	9.56	0.00	36.21	3.00	26.97	53.98	27.01
2480.00	9920.00		PK	-6.00	H	11.15	0.00	37.07	3.00	42.22	53.98	11.76
2480.00	9920.00		PK	-6.00	V	11.15	0.00	37.07	3.00	42.22	53.98	11.76
2480.00	12400.00	X	PK	-7.50	H	12.54	0.00	39.26	3.00	44.30	73.98	29.68
2480.00	12400.00	X	PK	-8.00	V	12.54	0.00	39.26	3.00	43.80	73.98	30.18
2480.00	12400.00	X	AVG	-21.70	H	12.54	0.00	39.26	3.00	30.10	53.98	23.88
2480.00	12400.00	X	AVG	-21.60	V	12.54	0.00	39.26	3.00	30.20	53.98	23.78
2480.00	14880.00		PK	-7.90	H	13.44	0.00	40.09	3.00	45.64	53.98	8.34
2480.00	14880.00		PK	-8.10	V	13.44	0.00	40.09	3.00	45.44	53.98	8.54
2480.00	17360.00		PK	-8.60	H	15.01	0.00	41.59	3.00	48.00	53.98	5.98
2480.00	17360.00		PK	-7.50	V	15.01	0.00	41.59	3.00	49.10	53.98	4.88
2480.00	19840.00	X	PK	-7.00	H	16.21	0.00	16.21	3.00	25.43	73.98	48.55
2480.00	19840.00	X	PK	-7.00	V	16.21	0.00	16.21	3.00	25.43	73.98	48.55
2480.00	19840.00	X	AVG	-20.50	H	16.21	0.00	16.21	3.00	11.93	53.98	42.05
2480.00	19840.00	X	AVG	-20.60	V	16.21	0.00	16.21	3.00	11.83	53.98	42.15
2480.00	22320.00	X	PK	-9.10	H	17.02	0.00	17.02	3.00	24.93	73.98	49.05
2480.00	22320.00	X	PK	-8.30	V	17.02	0.00	17.02	3.00	25.73	73.98	48.25
2480.00	22320.00	X	AVG	-22.40	H	17.02	0.00	17.02	3.00	11.63	53.98	42.35
2480.00	22320.00	X	AVG	-22.40	V	17.02	0.00	17.02	3.00	11.63	53.98	42.35
2480.00	24800.00		PK	-7.70	H	18.07	0.00	18.07	3.00	28.44	53.98	25.54
2480.00	24800.00		PK	-8.20	V	18.07	0.00	18.07	3.00	27.94	53.98	26.04

9. ANNEX-B – Test Setup Photographs

Test setup photographs are located in a separate supplementary ANNEX-B document.

10. History of Test Report Changes

Test Report #	Revision #	Description	Date of Issue
TR_13811-24_ISED RSS-247 DTS_	1	Initial release	6/4/2024
	2	Updated pages 1, 6	10/4/2024
	3	Updated pages 1, 6	10/9/2024

END OF TEST REPORT
