

<b>Prüfbericht - Nr.:</b> Test Report No.	<b>14011876 001</b>	<b>Seite 1 von 13</b> Page 1 of 13	
<b>Auftraggeber:</b> Applicant	<b>Nasaco Electronics (H.K.) Ltd.</b> Unit 6, 11/F., Eastern Centre 1065 King's Road, Quarry Bay Hong Kong		
<b>Gegenstand der Prüfung:</b> Test item	<b>Wideband Transmission System - Bluetooth Neckband Stereo Headphones</b>		
<b>Bezeichnung:</b> Identification	<b>NTE3100</b>	<b>Serien-Nr.:</b> Serial No.	<b>Engineering sample</b>
<b>Wareneingangs-Nr.:</b> Receipt No.	<b>051209025</b>	<b>Eingangsdatum:</b> Date of receipt	<b>09.12.2005</b>
<b>Prüfart:</b> Testing location	<b>TÜV Rheinland Hong Kong Ltd.</b> Room 8, 25th Floor, Skyline Tower, 39 Wang Kwong Road, Kowloon Bay Kowloon, Hong Kong <b>Hong Kong Productivity Council</b> HKPC Building, 78 Tat Chee Avenue, Kowloon, Hong Kong		
<b>Prüfgrundlage:</b> Test specification	<b>FCC Part 15 Subpart C</b> <b>ANSI C63.4-2003</b> <b>CISPR 22:1997</b>		
<b>Prüfresultat:</b> Test Result	<b>Das vorstehend beschriebene Gerät wurde geprüft und entspricht oben genannter Prüfgrundlage.</b> The above mentioned product was tested and <b>passed</b> .		
<b>geprüft / tested by:</b>		<b>kontrolliert / reviewed by:</b>	
10.04.2006	Sharon Li Project Engineer	10.04.2006	Thomas Berns Senior Project Manager
<b>Datum</b> Date	<b>Name</b> Name	<b>Unterschrift</b> Signature	<b>Unterschrift</b> Signature
<b>Sonstiges:</b> Other Aspects		<b>FCCID: LLP-NTE3100</b>	
<b>Abkürzungen:</b>	<b>OK, Pass, P</b> Fail, F N/A NT	<b>= entspricht Prüfgrundlage</b> <b>= entspricht nicht Prüfgrundlage</b> <b>= nicht anwendbar</b> <b>= nicht getestet</b>	<b>Abbreviations:</b> <b>OK, Pass, P</b> Fail, F N/A NT
<b>= passed</b> <b>= failed</b> <b>= not applicable</b> <b>= not tested</b>			
<b>Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens.</b> This test report relates to the a. m. test sample. Without permission of the test center this test report is not permitted to be duplicate in extracts. This test report does not entitle to carry any safety mark on this or similar products.			

## Table of Content

	Page
<b>Cover Page</b> .....	<b>1</b>
<b>Table of Content</b> .....	<b>2</b>
<b>Product information</b> .....	<b>3</b>
Manufacturers declarations .....	3
Product function and intended use.....	3
Submitted documents .....	3
Special accessories and auxiliary equipment.....	3
<b>List of Test and Measurement Instruments</b> .....	<b>4</b>
<b>Result FCC Part 15 – Subpart C</b> .....	<b>5</b>
Subclause 15.203 – Antenna Information.....	Pass..... 5
Subclause 15.204 – Antenna Information.....	Pass..... 5
Subclause 15.207 – Disturbance Voltage on AC Mains .....	N.A..... 5
Subclause 15.247 (a) – Carrier Frequency Separation.....	Pass..... 6
Subclause 15.247 (a) – Time of Occupancy (Dwell Time).....	Pass..... 7
Subclause 15.247 (a) – 20 dB Bandwidth .....	8
Subclause 15.247 (a) – Hopping Sequence.....	Pass..... 8
Subclause 15.247 (a) – Equal Hopping Frequency Use .....	Pass..... 9
Subclause 15.247 (a) – Receiver Input Bandwidth .....	Pass..... 10
Subclause 15.247 (a) – Receiver Hopping Capability.....	Pass..... 10
Subclause 15.247 (b) – Peak Output Power .....	Pass..... 10
Subclause 15.247 (b) – Band edge compliance .....	Pass..... 11
Subclause 15.247 (c) – Spurious Conducted Emissions .....	Pass..... 11
Subclause 15.247 (c) – Spurious Radiated Emissions.....	Pass..... 12
<b>Appendix 1 – Test protocols</b> .....	<b>16 pages</b>
<b>Appendix 2 – Test setup</b> .....	<b>3 pages</b>
<b>Appendix 3 – Photo documentation</b> .....	<b>9 pages</b>
<b>Appendix 4 – Product documentation</b> .....	<b>13 pages</b>

## Product information

### Manufacturers declarations

	Transmitter	Receiver
Operating frequency range	2402 - 2480 MHz	2402 - 2480 MHz
Type of modulation	FHSS modulation	FHSS modulation
Number of channels	79	79
Channel separation	1 MHz	1 MHz
Type of antenna	Integral Antenna	Integral Antenna
Antenna gain (dBi)	1.0 dBi typ.	
Power level	fix	
Type of equipment	stand alone, plug-in radio device	stand alone, plug-in radio device
Connection to public utility power line	No	
Nominal voltage	V <sub>nor</sub> : 3.6 V	V <sub>nor</sub> : 3.6 V
Independent Operation Modes	Page scan Inquiry scan Connection state - ACL Link Connection state - SCO Link	

### Product function and intended use

The test item is a wireless headset based on the Bluetooth technology.

Bluetooth is a short-range radio link intended to be a cable replacement between portable and/or fixed electronic devices.

Bluetooth operates in the unlicensed ISM Band at 2.4 GHz. In the US a band of 83.5 MHz width is available. In this band, 79 RF channels spaced 1 MHz apart are defined.

The channel is represented by a pseudo-random hopping sequence through the 79 channels. The channel is divided into time slots, with a nominal slot length of 625 µs, where each slot corresponds to different RF hop frequencies. The nominal hop rate is 1600 hops/s. The symbol rate on the channel is 1 Ms/s.

### Submitted documents

Circuit Diagram  
Block Diagram  
Bill of material  
User manual

### Special accessories and auxiliary equipment

The product has been tested together with the following additional accessory:

- Standard Charger  
Manufacturer: HELMS MAN TRANSFORMERS  
Model number: SCP0501000P  
Input: 100-240VAC, 300mA, 50-60Hz  
Output: 5.0V, 1000mA

## List of Test and Measurement Instruments

	Kind of Equipment	Manufacturer	Type	S/N
<input type="checkbox"/>	Test Receiver	Rohde & Schwarz	ESH-3	890173/033
<input type="checkbox"/>	L/I/S/N	Rohde & Schwarz	ESH 3-Z5	849876/026
<input type="checkbox"/>	Oscilloscope	HP	54713B	US34510455
<input type="checkbox"/>	Test Receiver	Rohde & Schwarz	ESVP	882402/033
<input type="checkbox"/>	Absorbing Clamp	Rohde & Schwarz	MDS-21	979 3/4
<input checked="" type="checkbox"/>	Test Receiver	Rohde & Schwarz	ESVS30	842807/009
<input checked="" type="checkbox"/>	Active Loop Antenna	EMCO	6502	9107-2651
<input checked="" type="checkbox"/>	Biconical Antenna	Rohde & Schwarz	HK116	841489/015
<input checked="" type="checkbox"/>	Log.-Periodic Antenna	Rohde & Schwarz	HL223	841516/017
<input type="checkbox"/>	Universal Power Analyzer	Voltech	PM3000A	9915
<input type="checkbox"/>	Reference Impedance Network	Voltech	IEC 555 Standard	9946
<input type="checkbox"/>	AC Power Source	California Instr.	4500L	HK51895
<input type="checkbox"/>	Trip-Loop Antenna	Chase	LLA6142	1019
<input checked="" type="checkbox"/>	Double Ridge Horn Antenna	EMCO	3115	9002-3351
<input type="checkbox"/>	Double Ridge Horn Antenna	EMCO	3115	9002-3347
<input type="checkbox"/>	RF Comms Test Set	HP	8920B	US36492628
<input type="checkbox"/>	Spectrum Analyser + Tracking G.	HP	8596E	3639A00758
<input type="checkbox"/>	Signal Generator	Rohde & Schwarz	SMY 01	844146/024
<input type="checkbox"/>	Signal Generator	Rohde & Schwarz	SMY 01	844146/023
<input type="checkbox"/>	BiLog Antenna	EMCO	3143	9607-1287
<input type="checkbox"/>	Isotropic Field Probe	Holladay	HI-4422	90956
<input type="checkbox"/>	Power Amplifier	Kalmus	757-LC	7620-1
<input type="checkbox"/>	Power Amplifier	Kalmus	122-FC	7620-2
<input type="checkbox"/>	Coupling Clamp	Schaffner	CDN 126	312
<input type="checkbox"/>	Couple Device Network	Fischer	CDN-M2	9604
<input checked="" type="checkbox"/>	Spectrum Analyzer	Rohde & Schwarz	FSP30	1093.4495K30
<input type="checkbox"/>	Temperature Chamber	Binder	MK 240	9020-0028
<input type="checkbox"/>	EFT,ESD,SURGE, DIPS tester	Schaffner	Best 96	IN3796-011
<input type="checkbox"/>	Surge Generator	Schaffner	NSG650	280
<input checked="" type="checkbox"/>	Active Loop Antenna	EMCO	6502	9107-2651
<input checked="" type="checkbox"/>	Spectrum Analyzer	Anritsu Corp.	MS2667C	M16886

## Result FCC Part 15 – Subpart C

<b>Subclause 15.203 – Antenna Information</b>		<b>Pass</b>
<b>Requirement:</b>	No antenna other than that furnished by the responsible party shall be used with the device	
<b>Result:</b>	Permanent attached antenna	
<b>Verdict:</b>	Pass	


<b>Subclause 15.204 – Antenna Information</b>		<b>Pass</b>
<b>Requirement:</b>	Provide information for every antenna proposed for the use with the EUT	
<b>Result:</b>	a) Antenna type: Inverted F type antenna soldered to the circuit board b) Manufacturer and model no: N.A. c) Gain with reference to an isotropic radiator: 1.0 dBi typ. dBi	
<b>Verdict:</b>	Pass	

<b>Subclause 15.207 – Disturbance Voltage on AC Mains</b>		<b>N.A.</b>				
Test Port: AC mains input port of the charger Applied voltage: 100VAC Applicable only to equipment designed to be connected to the public utility power line. 1) Mode of operation: Charging only						
<b>Live measurement</b>						
Frequency range (MHz)	Frequency (MHz)	Quasi-peak dB $\mu$ V	Average dB $\mu$ V	Limit QP (dB $\mu$ V)	Limit AV (dB $\mu$ V)	Verdict
0,15 – 0,5	-	-	-	66 - 56	56 - 46	Pass
> 0,5 - 5	-	-	-	56	46	Pass
> 5 - 30	-	-	-	60	50	Pass
<b>Neutral measurement</b>						
Frequency range (MHz)	Frequency (MHz)	Quasi-peak dB $\mu$ V	Average dB $\mu$ V	Limit QP (dB $\mu$ V)	Limit AV (dB $\mu$ V)	Verdict
0,15 – 0,5	-	-	-	66 - 56	56 - 46	Pass
> 0,5 - 5	-	-	-	56	46	Pass
> 5 - 30	-	-	-	60	50	Pass
<b>Result:</b> The radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150kHz to 30MHz does not exceed the limits. For test results plots refer to Appendix 1, page 2.						

<b>Subclause 15.247 (a) – Carrier Frequency Separation</b>	<b>Pass</b>
<b>Requirement:</b> Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25kHz or the 20dB bandwidth of the hopping channel, whichever is greater.	
Test Specification : FCC Part 15 Subpart A – Subclause 15.31 Mode of operation : Tx mode (hopping on), DH1 packet Port of testing : Temporary antenna port Detector : Peak RBW/VBW : 100 kHz / 300 kHz Supply voltage : 3.6 VDC from DC power supply Temperature : 23°C Humidity : 50%	
<b>Result:</b> The centre frequencies of the hopping channels are separated by more than the 20dB bandwidth. For test results plots refer to Appendix 1, page 3.	
<b>Verdict:</b> Pass	

<b>Subclause 15.247 (a) – Time of Occupancy (Dwell Time)</b>	<b>Pass</b>
<p><b>Requirement:</b> Frequency hopping systems in the 2400 – 2483.5 MHz band shall use at least 15 non-overlapping channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.</p>	
<p>Test Specification : FCC Part 15 Subpart A – Subclause 15.31  Mode of operation : Tx mode (hopping on), DH5 packet  Port of testing : Temporary antenna port  Detector : Peak  RBW/VBW : 1 MHz / 3 MHz  Supply voltage : 3.6 VDC from DC power supply  Temperature : 23°C  Humidity : 50%</p>	
<p><b>Result:</b> The screenshot in Appendix 1 page 4 shows the occurrence of a channel in a 31.6 s time period. In normal hopping mode Bluetooth is using 79 hopping channels only. The frequency was used 64 times. The dwell time for the longest supported packet type is about 3 ms. As a result the average time of occupancy will not be greater than 400 ms.</p> <p>i.e. Time period calculation:  <math>0.4 \times 79 = 31.6\text{s}</math></p> <p>Limit calculation:  <math>2.928 \text{ ms} \times 64 \times 10^{-3} = 187.3 \times 10^{-3}</math>  <math>\leq 400 \times 10^{-3} \text{ s}</math></p> <p>For test protocols please refer to Appendix 1, page 4-5.</p> <p><b>Verdict:</b> Pass</p>	

<b>Subclause 15.247 (a) – 20 dB Bandwidth</b>			
Requirement: Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25kHz or the 20dB bandwidth of the hopping channel, whichever is greater.			
Test Specification : FCC Part 15 Subpart A – Subclause 15.31 Mode of operation : Tx mode (2402MHz, 2441MHz, 2480MHz), DH5 packet Port of testing : Temporary antenna port Detector : Peak RBW/VBW : 30 kHz / 100 kHz Supply voltage : 3.6 VDC from DC power supply Temperature : 23°C Humidity : 50%			
<b>Results</b>			
For test protocols refer to Appendix 1, page 5-7.			
Frequency (MHz)	20 dB left (MHz)	20 dB right (MHz)	20dB bandwidth (MHz)
2402	0.316	0.656	0.972
2441	0.296	0.660	0.956
2480	0.300	0.656	0.956
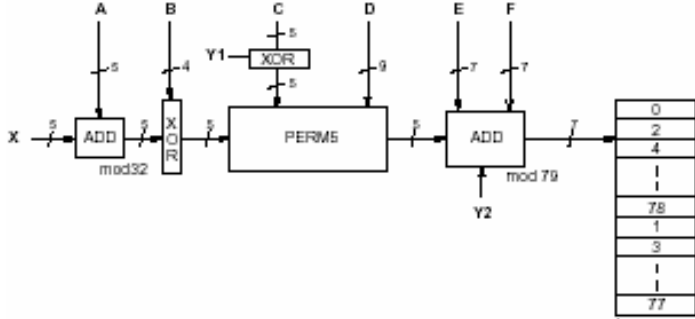
<b>Subclause 15.247 (a) – Hopping Sequence</b>	<b>Pass</b>
Requirement: The hopping sequence is generated and provided with an example.	
Hopping sequence The channel is represented by a pseudo-random hopping sequence hopping through the 79 RF channels. The hopping sequence is unique for the piconet and is determined by the Bluetooth device address of the master. The X input determines the phase in the 32-hop segment, whereas Y1 and Y2 selects between master-to-slave and slave-to-master transmission. The inputs A to D determine the ordering within the segment, the inputs E and F determine the mapping onto the hop frequencies.	
	



Example data:

Hop sequence {k} for CONNECTION STATE:

CLK start: 0x0000010

ULAP: 0x00000000

#ticks: 00 02 | 04 06 | 08 0a | 0c 0e | 10 12 | 14 16 | 18 1a | 1c 1e |

```

-----
0x0000010: 08 66 | 10 70 | 12 19 | 14 23 | 16 01 | 18 05 | 20 33 | 22 37 |
0x0000030: 24 03 | 26 07 | 28 35 | 30 39 | 32 72 | 34 76 | 36 25 | 38 29 |
0x0000050: 40 74 | 42 78 | 44 27 | 46 31 | 48 09 | 50 13 | 52 41 | 54 45 |
0x0000070: 56 11 | 58 15 | 60 43 | 62 47 | 32 17 | 36 19 | 34 49 | 38 51 |
0x0000090: 40 21 | 44 23 | 42 53 | 46 55 | 48 33 | 52 35 | 50 65 | 54 67 |
0x00000b0: 56 37 | 60 39 | 58 69 | 62 71 | 64 25 | 68 27 | 66 57 | 70 59 |
0x00000d0: 72 29 | 76 31 | 74 61 | 78 63 | 01 41 | 05 43 | 03 73 | 07 75 |
0x00000f0: 09 45 | 13 47 | 11 77 | 15 00 | 64 49 | 66 53 | 68 02 | 70 06 |
0x0000110: 01 51 | 03 55 | 05 04 | 07 08 | 72 57 | 74 61 | 76 10 | 78 14 |
0x0000130: 09 59 | 11 63 | 13 12 | 15 16 | 17 65 | 19 69 | 21 18 | 23 22 |
0x0000150: 33 67 | 35 71 | 37 20 | 39 24 | 25 73 | 27 77 | 29 26 | 31 30 |
0x0000170: 41 75 | 43 00 | 45 28 | 47 32 | 17 02 | 21 04 | 19 34 | 23 36 |
0x0000190: 33 06 | 37 08 | 35 38 | 39 40 | 25 10 | 29 12 | 27 42 | 31 44 |
0x00001b0: 41 14 | 45 16 | 43 46 | 47 48 | 49 18 | 53 20 | 51 50 | 55 52 |
0x00001d0: 65 22 | 69 24 | 67 54 | 71 56 | 57 26 | 61 28 | 59 58 | 63 60 |
0x00001f0: 73 30 | 77 32 | 75 62 | 00 64 | 49 34 | 51 42 | 57 66 | 59 74 |
0x0000210: 53 36 | 55 44 | 61 68 | 63 76 | 65 50 | 67 58 | 73 03 | 75 11 |
0x0000230: 69 52 | 71 60 | 77 05 | 00 13 | 02 38 | 04 46 | 10 70 | 12 78 |
0x0000250: 06 40 | 08 48 | 14 72 | 16 01 | 18 54 | 20 62 | 26 07 | 28 15 |
0x0000270: 22 56 | 24 64 | 30 09 | 32 17 | 02 66 | 06 74 | 10 19 | 14 27 |
0x0000290: 04 70 | 08 78 | 12 23 | 16 31 | 18 03 | 22 11 | 26 35 | 30 43 |
0x00002b0: 20 07 | 24 15 | 28 39 | 32 47 | 34 68 | 38 76 | 42 21 | 46 29 |
0x00002d0: 36 72 | 40 01 | 44 25 | 48 33 | 50 05 | 54 13 | 58 37 | 62 45 |
0x00002f0: 52 09 | 56 17 | 60 41 | 64 49 | 34 19 | 36 35 | 50 51 | 52 67 |
0x0000310: 38 21 | 40 37 | 54 53 | 56 69 | 42 27 | 44 43 | 58 59 | 60 75 |
0x0000330: 46 29 | 48 45 | 62 61 | 64 77 | 66 23 | 68 39 | 03 55 | 05 71 |
0x0000350: 70 25 | 72 41 | 07 57 | 09 73 | 74 31 | 76 47 | 11 63 | 13 00 |
0x0000370: 78 33 | 01 49 | 15 65 | 17 02 | 66 51 | 70 67 | 03 04 | 07 20 |
0x0000390: 68 55 | 72 71 | 05 08 | 09 24 | 74 59 | 78 75 | 11 12 | 15 28 |
0x00003b0: 76 63 | 01 00 | 13 16 | 17 32 | 19 53 | 23 69 | 35 06 | 39 22 |
0x00003d0: 21 57 | 25 73 | 37 10 | 41 26 | 27 61 | 31 77 | 43 14 | 47 30 |
0x00003f0: 29 65 | 33 02 | 45 18 | 49 34 | 19 04 | 21 08 | 23 20 | 25 24 |
    
```

**Subclause 15.247 (a) – Equal Hopping Frequency Use**

**Pass**

Requirement: Each of the transmitter's hopping channels is used equally on average.

Equal hopping frequency use

The EUT complies with the Bluetooth RF specifications. For details refer to the Bluetooth standard.

<b>Subclause 15.247 (a) – Receiver Input Bandwidth</b>	<b>Pass</b>
Requirement: The associated receiver(s) complies with the requirement that its input bandwidth matches the bandwidth of the transmitted signal.	
Receiver input bandwidth The receiver bandwidth is equal to the receiver bandwidth in the 79 hopping channel mode, which is 1 MHz. The receiver bandwidth was verified during Bluetooth RF conformance testing.	

<b>Subclause 15.247 (a) – Receiver Hopping Capability</b>	<b>Pass</b>
Requirement: The associated receiver has the ability to shift frequencies in synchronisation with the transmitted signals.	
Receiver hopping Capability The EUT complies with the Bluetooth RF specifications. For details refer to the Bluetooth standard.	

<b>Subclause 15.247 (b) – Peak Output Power</b>	<b>Pass</b>				
Test Specification : FCC Part 15 Subpart A – Subclause 15.31 Mode of operation : Tx mode (2402MHz, 2441MHz, 2480MHz), DH1 packet Port of testing : Temporary antenna port Detector : Peak RBW/VBW : 1 MHz / 3 MHz Supply voltage : 3.6 VDC from DC power supply Temperature : 23°C Humidity : 50%					
Requirement: For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 Watt. For all other frequency hopping systems in the 2400 – 2483.5 MHz band: 0.125 Watts.					
<b>Result</b> All three transmit frequency modes comply with the maximum peak output power limit. For test protocols please refer to Appendix 1, page 9-10.					
<b>Frequency (MHz)</b>	<b>Maximum peak output power (dBm)</b>	<b>Cable attenuation (dB)</b>	<b>Output power (dBm)</b>	<b>Limit (W/dBm)</b>	<b>Verdict</b>
2402	-3.50	3.52	0.02	1 / 30.0	Pass
2441	-4.64	3.65	-0.99	1 / 30.0	Pass
2480	-6.06	3.60	-2.46	1 / 30.0	Pass

<b>Subclause 15.247 (b) – Band edge compliance</b>	<b>Pass</b>
Test Specification : FCC Part 15 Subpart A – Subclause 15.31 Mode of operation : Tx mode (2402MHz, 2441MHz, 2480MHz), DH1 packet Port of testing : Temporary antenna port Detector : Peak RBW/VBW : 300 kHz / 1 MHz Supply voltage : 3.6 VDC from DC power supply Temperature : 23°C Humidity : 50%	
<b>Requirement:</b> In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.	
<b>Result</b> There is no peak found outside any 100 kHz bandwidth of the operating frequency band in the three transmit frequency. All three transmit frequency modes comply with the limit stated in subclause 15.247(c). For test protocols refer to Appendix 1, page 11-13.	

<b>Subclause 15.247 (c) – Spurious Conducted Emissions</b>	<b>Pass</b>				
Test Specification : FCC Part 15 Subpart A – Subclause 15.31 Mode of operation : Tx mode (2402MHz, 2441MHz, 2480MHz), DH1 packet Port of testing : Temporary antenna port Detector : Peak RBW/VBW : 100 kHz / 300 kHz Supply voltage : 3.6 VDC from DC power supply Temperature : 23 °C Humidity : 50 %					
<b>Requirement:</b> In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.					
<b>Result</b> There is no peak found outside any 100kHz bandwidth of the operating frequency band in the three transmit frequency. All three transmit frequency modes comply with the limit stated in subclause 15.247(c). For test protocols refer to Appendix 1, page 14-16.					
<b>Operating frequency (MHz)</b>	<b>Spurious frequency (MHz)</b>	<b>Spurious Level (dBm)</b>	<b>Reference value (dBm)</b>	<b>Delta (dB)</b>	<b>Verdict</b>
2402	No peak found	-	-	-	Pass
2441	No peak found	-	-	-	Pass
2480	No peak found	-	-	-	Pass

<b>Subclause 15.247 (c) – Spurious Radiated Emissions</b>							<b>Pass</b>
Test Specification : ANSI C63.4 - 2003 Mode of operation : Tx mode (2402MHz, 2441MHz, 2480MHz), DH1 packet Port of testing : Enclosure Detector : Peak RBW/VBW : 100 kHz / 300 kHz for f < 1 GHz 1 MHz / 3 MHz for f > 1 GHz Supply voltage : fully charged internal batteries Temperature : 23°C Humidity : 50%							
<b>Requirement:</b> In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.							
<b>Result</b> All three transmit frequency modes comply with the field strength within the restricted bands.							
Tx frequency 2402MHz				Vertical Polarization			
Freq MHz	Reading dBuV	AF dB(1/m)	Cable att. dB	Pre-amp dB	Filter att. dB	Level dBuV/m	Limit/ Detector dBuV/m
172.20	-	15.10	1.00	-	-	30.1	43.5 / QP
397.34	-	15.60	1.00	-	-	21.9	46.0 / QP
544.16	-	15.80	1.50	-	-	23.1	46.0 / QP
3603.8	-	23.20	2.90	-	-	40.90	54.0 / A
Tx frequency 2402MHz				Horizontal Polarization			
Freq MHz	Reading dBuV	AF dB(1/m)	Cable att. dB	Pre-amp dB	Filter att. dB	Level dBuV/m	Limit/ Detector dBuV/m
547.04	-	17.70	2.00	-	-	26.1	46.0 / QP
3603.52	-	23.20	2.90	-	-	40.57	54.0 / QP

Tx frequency 2441MHz Vertical Polarization							
Freq MHz	Reading dBuV	AF dB(1/m)	Cable att. dB	Pre-amp dB	Filter att. dB	Level dBuV/m	Limit/ Detector dBuV/m
170.78	-	15.10	1.00	-	-	29.6	43.5 / QP
Tx frequency 2441MHz Horizontal Polarization							
Freq MHz	Reading dBuV	AF dB(1/m)	Cable att. dB	Pre-amp dB	Filter att. dB	Level dBuV/m	Limit/ Detector dBuV/m
170.00	-	15.10	1.00	-	-	34.70	43.5 / QP
Tx frequency 2480MHz Vertical Polarization							
Freq MHz	Reading dBuV	AF dB(1/m)	Cable att. dB	Pre-amp dB	Filter att. dB	Level dBuV/m	Limit/ Detector dBuV/m
N.A.	-	-	-	-	-	-	-
Tx frequency 2480MHz Horizontal Polarization							
Freq MHz	Reading dBuV	AF dB(1/m)	Cable att. dB	Pre-amp dB	Filter att. dB	Level dBuV/m	Limit/ Detector dBuV/m
170.72	-	15.10	1.00	-	-	34.00	43.5 / QP

# Appendix 1


## Test results

## Carrier Frequency Separation

Date: 16 Feb 2006  
EUT: NTE3100 / SL3100  
Company: Nasaco Electronics (H.K.) Ltd.  
Humidity: 60%  
Temperature: 23°C  
Voltage supply: 3.6 VDC from DC power supply  
Test by: Sharon Li  
Op. mode: Hopping on

Reference frequency (MHz)	Channel Separation (MHz)
2441.000	1.008

MKR:2.441186GHz 2006/02/16 15:42:20 Marker  
-5.26dBm RB 100kHz# AT 40dB Band auto  
RLV: 20.00dBm VB 300kHz# ST 20ms#

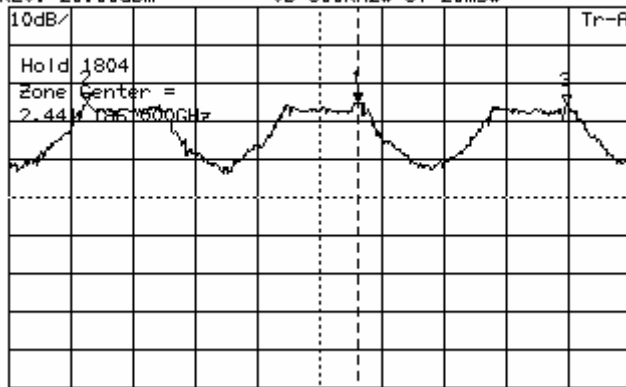

CF:2.441000GHz Span:3.00MHz  
DLT:0Hz 2006/02/16 15:41:42 Marker  
0.00dB RB 100kHz# AT 40dB Band auto  
RLV: 20.00dBm VB 300kHz# ST 20ms#




CF:2.441000GHz Span:3.00MHz

Marker List		
* 1:	0 Hz	0.00 dB
2:	-1.308 MHz	-0.35 dB
3:	1.008 MHz	-0.62 dB
4:		
5:		
6:		
7:		
8:		
9:		
10:		

# Dwell Time

Date: 16 Feb 2006  
 EUT: NTE3100 / SL3100  
 Company: Nasaco Electronics (H.K.) Ltd.  
 Humidity: 60%  
 Temperature: 23°C  
 Voltage supply: 3.6 VDC from DC power supply  
 Test by: Sharon Li  
 Op. mode: Hopping on

Burst Duration (ms)	Number of hopping	Time of occupancy (s)	Results
		0.00298 x 64 = 0.1873	Pass

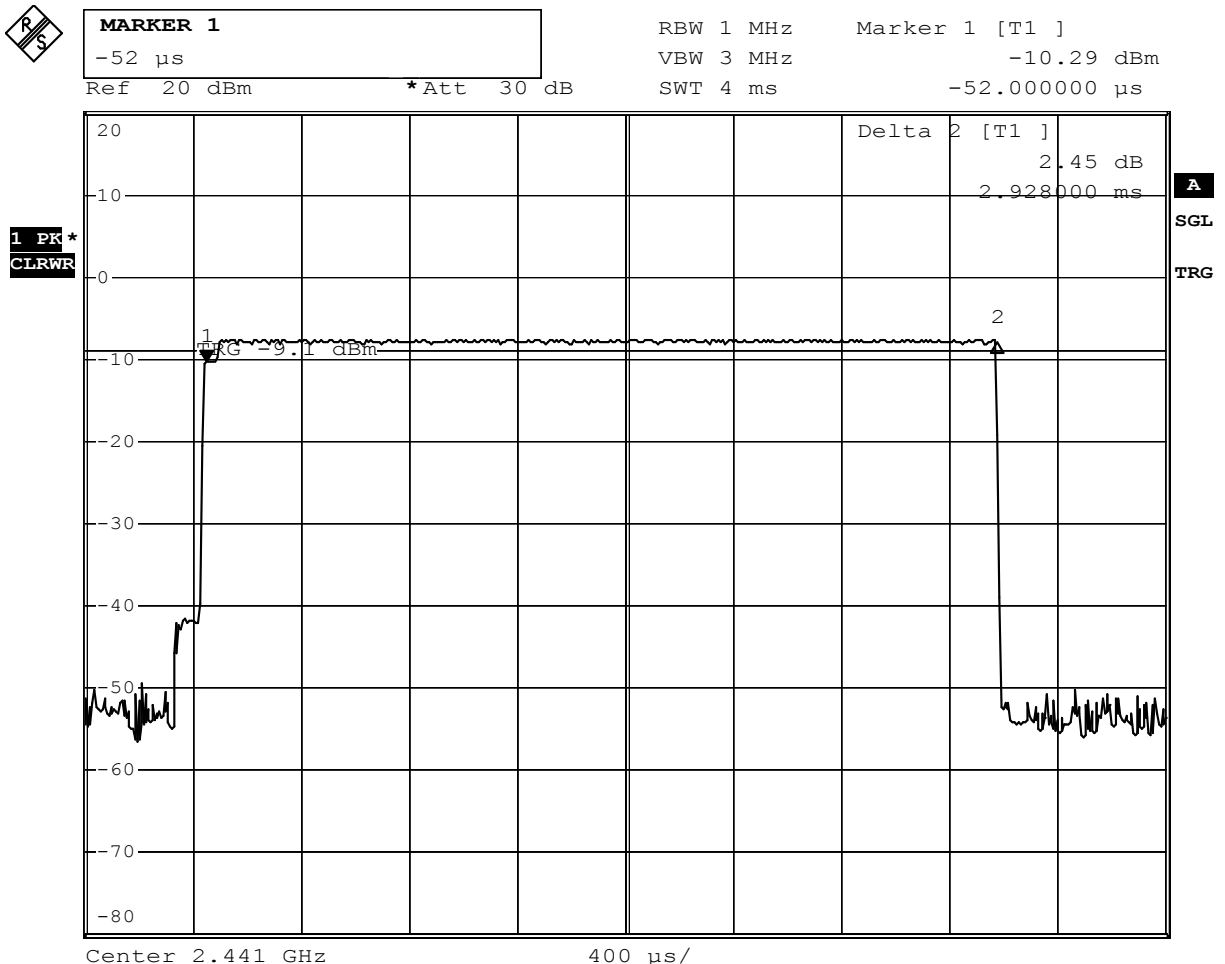

Date: 8.MAR.2006 16:46:06






**SWEEP TIME**  
31.6 s

RBW 1 MHz  
VBW 3 MHz  
SWT 31.6 s

Ref 20 dBm \*Att 30 dB

1 PK\*  
CLRWR

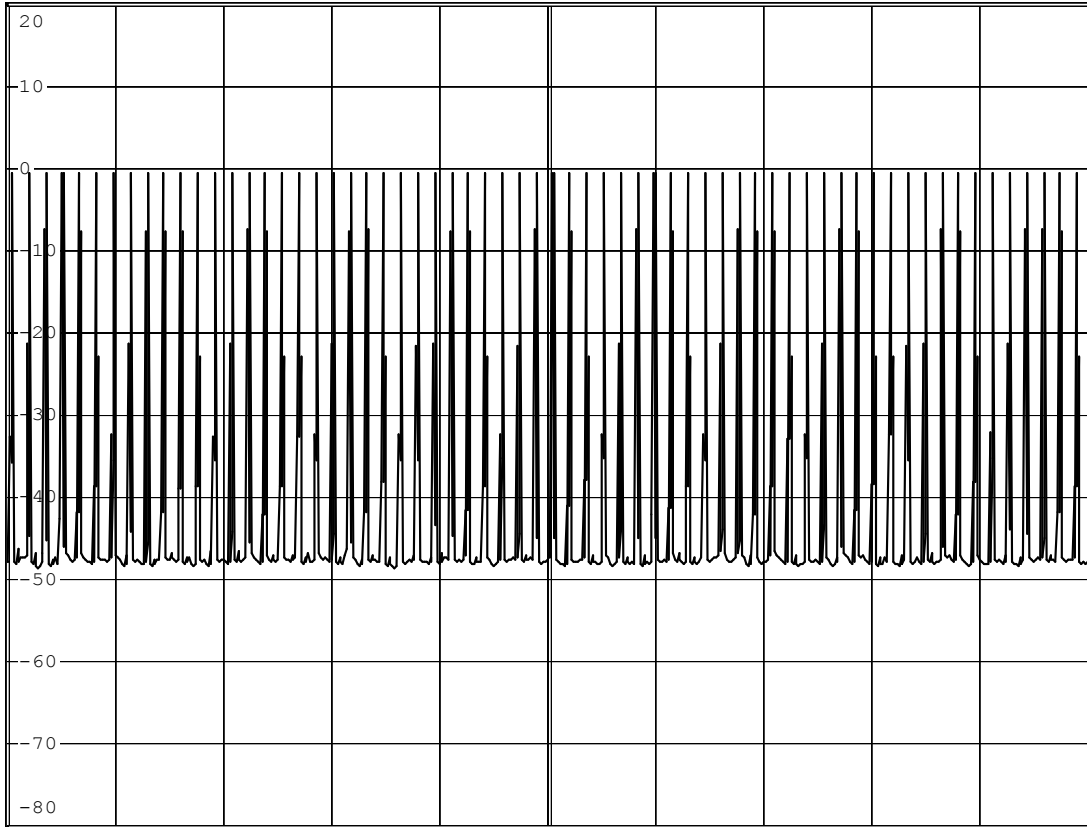

Date: 8.MAR.2006 16:50:11


## 20dB Bandwidth

Date: 16 Feb 2006  
 EUT: NTE3100 / SL3100  
 Company: Nasaco Electronics (H.K.) Ltd.  
 Humidity: 60%  
 Temperature: 23°C  
 Voltage supply: 3.6 VDC from DC power supply  
 Test by: Sharon Li  
 Op. mode: TX mode, DH5 with PRBS9 payload


Tx frequency (MHz)	$\Delta f_L$ (MHz)	$\Delta f_H$ (MHz)	$ \Delta f_H  +  \Delta f_L $ (MHz)	Results
2402	0.316	0.656	0.972	Pass
2441	0.296	0.660	0.956	Pass
2480	0.300	0.656	0.956	Pass

Tx frequency: 2402MHz

MKR: 2.402472GHz 2006/02/16 15:51:49 Mkr List  
 -23.71dBm RB 30kHz AT 40dB Band auto  
 RLV: 20.00dBm VB 100kHz# ST 100ms#

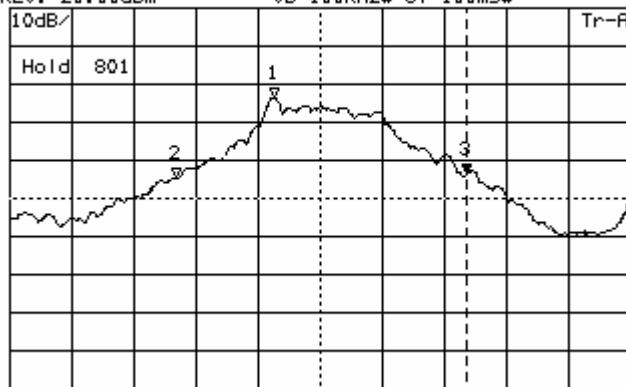

CF: 2.402000GHz Span: 2.00MHz  
 DLT: 656kHz 2006/02/16 15:51:21 Manual Set  
 -20.20dB RB 30kHz AT 40dB Band auto  
 RLV: 20.00dBm VB 100kHz# ST 100ms#




CF: 2.402000GHz Span: 2.00MHz


Marker List		
1:	0 Hz	0.07 dB
2:	-316 kHz	-20.76 dB
* 3:	656 kHz	-20.20 dB
4:		
5:		
6:		
7:		
8:		
9:		
10:		

Tx frequency: 2441MHz

MKR: 2.440552GHz      2006/02/16 15:55:25      Mkr List  
 -24.76dBm      RB 30kHz    AT 40dB    Band auto  
 RLV: 20.00dBm      VB 100kHz#    ST 100ms#

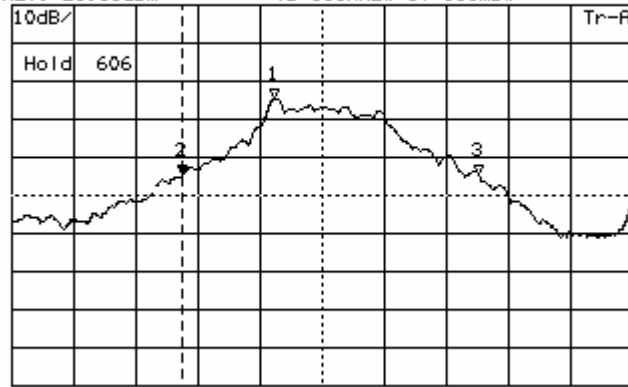

CF: 2.441000GHz      Span: 2.00MHz  
 DLT: -296kHz      2006/02/16 15:54:46      Manual Set  
 -20.33dB      RB 30kHz    AT 40dB    Band auto  
 RLV: 20.00dBm      VB 100kHz#    ST 100ms#




CF: 2.441000GHz      Span: 2.00MHz

Marker List		
1:	0 Hz	0.09 dB
* 2:	-296 kHz	-20.33 dB
3:	660 kHz	-20.24 dB
4:		
5:		
6:		
7:		
8:		
9:		
10:		


Tx frequency: 2480MHz

DLT: 656kHz      2006/02/16 15:57:00      Manual Set  
 -20.20dB      RB 30kHz    AT 40dB    Band auto  
 RLV: 20.00dBm      VB 100kHz#    ST 100ms#



CF: 2.480000GHz      Span: 2.00MHz


Marker List		
1:	0 Hz	0.06 dB
2:	-300 kHz	-19.72 dB
* 3:	656 kHz	-20.20 dB
4:		
5:		
6:		
7:		
8:		
9:		
10:		

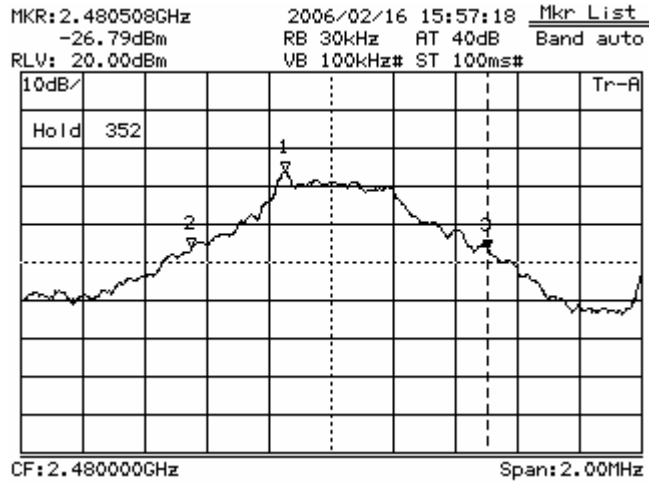


## Peak Output Power

Date: 16 Feb 2006  
 EUT: NTE3100 / SL3100  
 Company: Nasaco Electronics (H.K.) Ltd.  
 Humidity: 60%  
 Temperature: 23°C  
 Voltage supply: 3.6 VDC from DC power supply  
 Test by: Sharon Li  
 Op. mode: TX mode, DH1 with PRBS9 payload

Tx Frequency (MHz)	Power P <sub>PK</sub> (dBm)	Cable Attenuation (dB)	Actual Peak Power (dBm)	Results
2402	-3.50	3.52	0.02	Pass
2441	-4.64	3.65	-0.99	Pass
2480	-6.06	3.60	-2.46	Pass

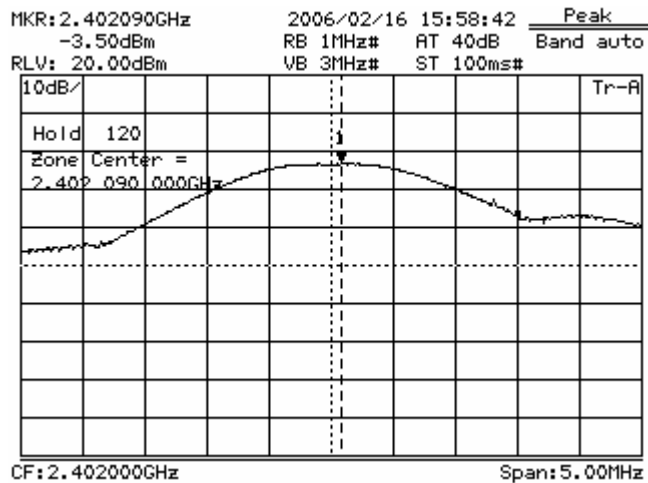


Tx frequency: 2402MHz

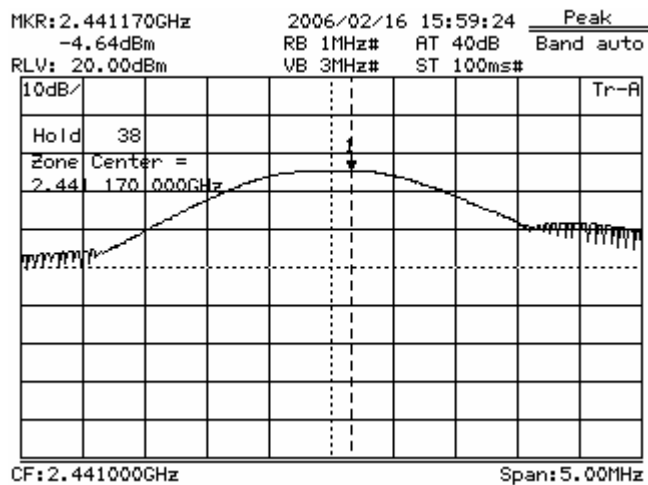

Tx frequency: 2441MHz

Tx frequency: 2480MHz

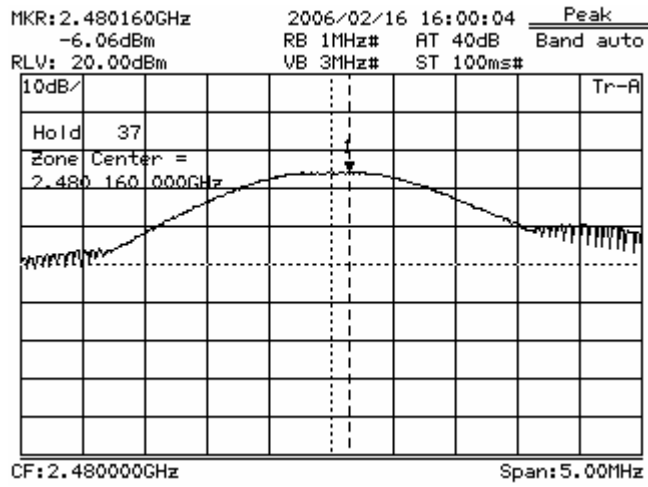


## Band Edge Compliance

Date: 16 Feb 2006  
 EUT: NTE3100 / SL3100  
 Company: Nasaco Electronics (H.K.) Ltd.  
 Humidity: 60%  
 Temperature: 23°C  
 Voltage supply: 3.6 VDC from DC power supply  
 Test by: Sharon Li  
 Op. mode: TX mode, DH1 with PRBS9 payload


Tx Frequency (MHz)	Peak in band Power level (dBm)	RF power outside 100kHz BW (MHz)	RF power difference outside 100kHz BW (dB)	Results
2402	-	No Peak	-	Pass
2480	-	No Peak	-	Pass

Tx frequency: 2402MHz

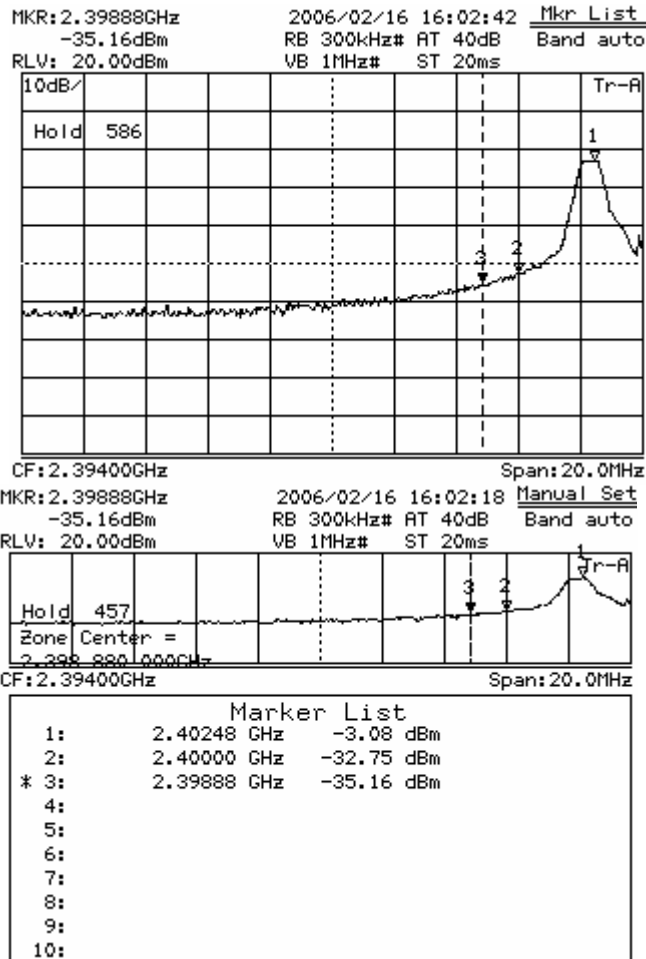


Tx frequency: 2441MHz

MKR: 2.3903GHz      2006/02/16 16:04:30      Mkr List  
 -36.39dBm      RB 3MHz#      AT 40dB      Band auto  
 RLV: 20.00dBm      VB 3MHz#      ST 50ms

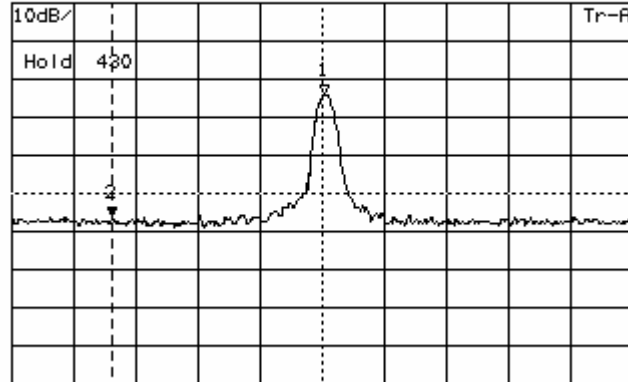

CF: 2.4410GHz      Span: 150MHz  
 MKR: 2.3903GHz      2006/02/16 16:04:22      Mkr List  
 -36.39dBm      RB 3MHz#      AT 40dB      Band auto  
 RLV: 20.00dBm      VB 3MHz#      ST 50ms




CF: 2.4410GHz      Span: 150MHz

Marker List		
1:	2.4419 GHz	-4.36 dBm
* 2:	2.3903 GHz	-36.39 dBm
3:		
4:		
5:		
6:		
7:		
8:		
9:		
10:		

Tx frequency: 2480MHz


MKR: 2.48024GHz      2006/02/16 16:07:24      Mkr List  
 -5.44dBm      RB 300kHz#      AT 40dB      Band auto  
 RLV: 20.00dBm      VB 1MHz#      ST 20ms



CF: 2.48800GHz      Span: 20.0MHz

Marker List		
* 1:	2.48024 GHz	-5.44 dBm
2:	2.48352 GHz	-31.46 dBm
3:	2.48740 GHz	-40.63 dBm
4:		
5:		
6:		
7:		
8:		
9:		
10:		



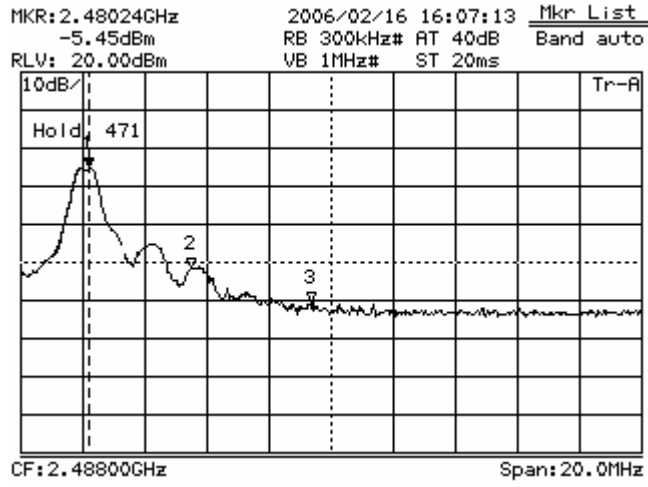

## Spurious Emissions - Conducted

Date: 16 Feb 2006  
 EUT: NTE3100 / SL3100  
 Company: Nasaco Electronics (H.K.) Ltd.  
 Humidity: 60%  
 Temperature: 23°C  
 Voltage supply: 3.6 VDC from DC power supply  
 Test by: Sharon Li  
 Op. mode: TX mode, DH1 with PRBS9 payload

Tx frequency : 2402MHz


Spurious Frequency (MHz)	Power level (dBm)	Reference value (dBm)	Delta to reference level (dB)	Results
-	-	-	--	Pass
-	-	-	-	Pass




Tx frequency : 2441MHz

Spurious Frequency (MHz)	Power level (dBm)	Reference value (dBm)	Delta to reference level (dB)	Results
-	-	-	-	Pass
-	-	-	-	Pass


Tx frequency : 2480MHz

Spurious Frequency (MHz)	Power level (dBm)	Reference value (dBm)	Delta to reference level (dB)	Results
-	-	-	-	Pass
-	-	-	-	Pass

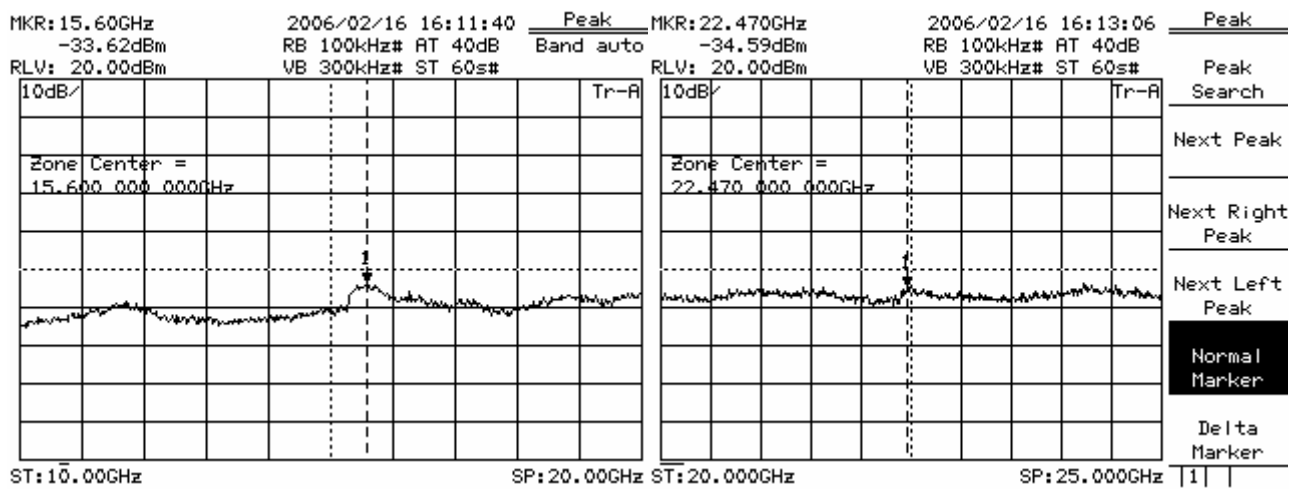

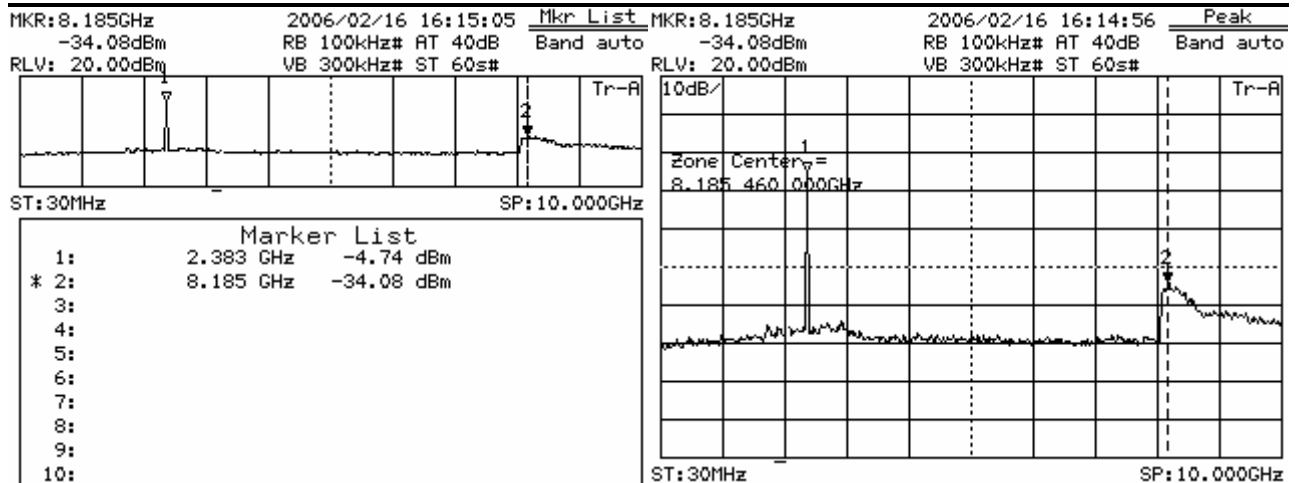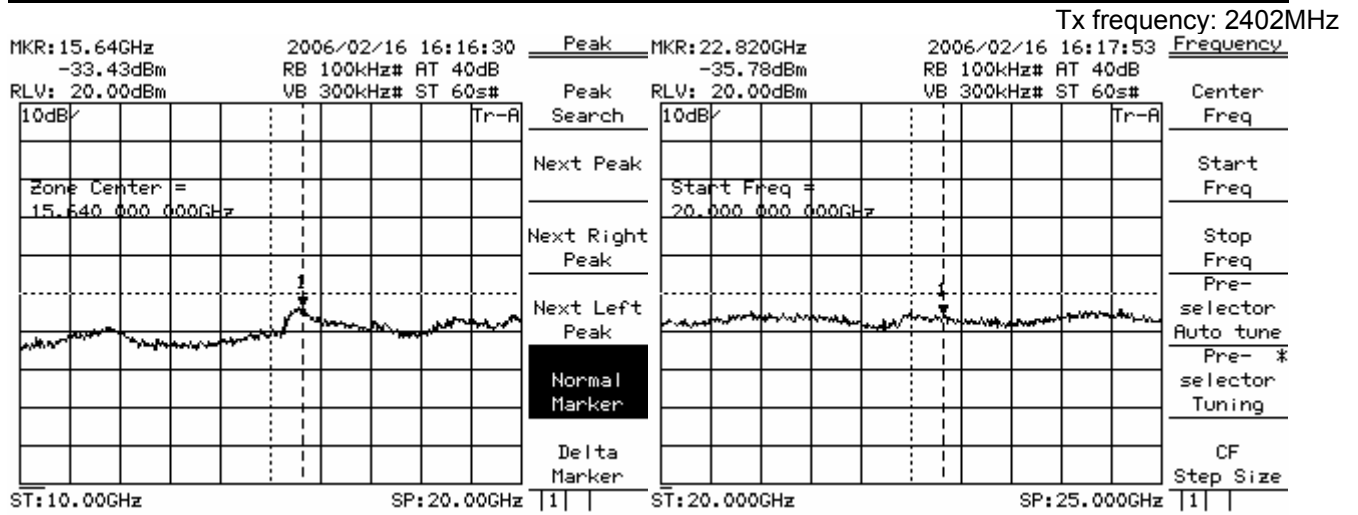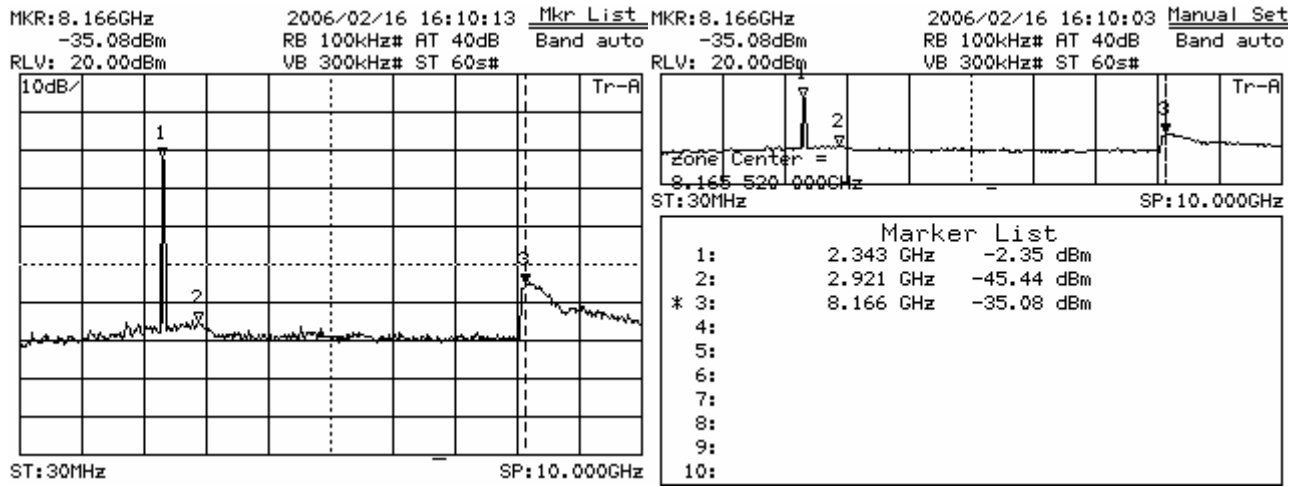

Tx frequency: 2441MHz

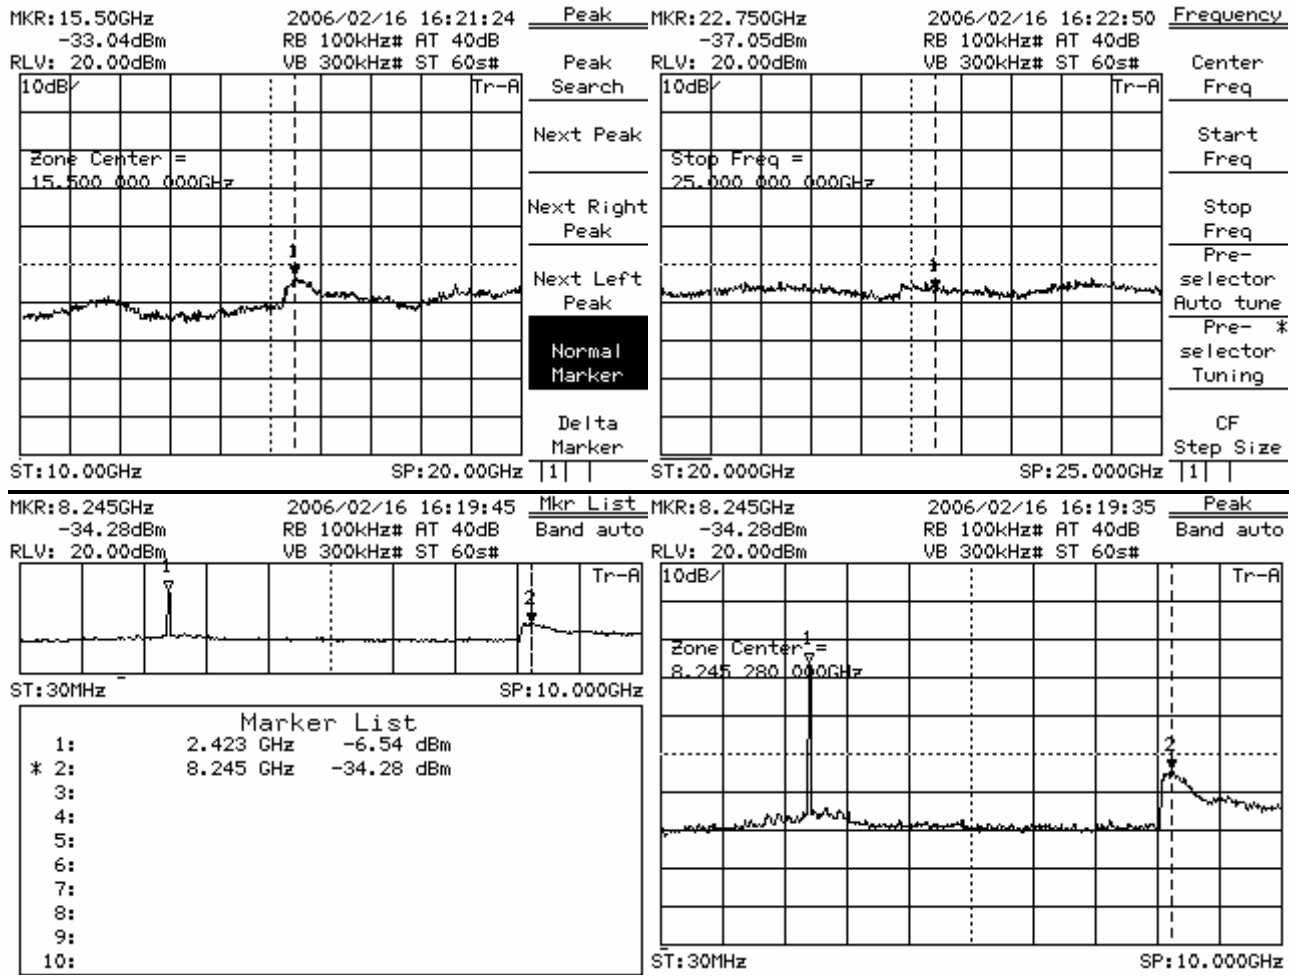

Tx frequency: 2480MHz

## Spurious Emissions - Radiated

Date: 16 Feb 2006

EUT: NTE3100 / SL3100

Company: Nasaco Electronics (H.K.) Ltd.

Humidity: 60%

Temperature: 23°C

Voltage supply: 3.6 VDC from DC power supply

Test by: Sharon Li

Op. mode: TX mode, DH1 with PRBS9 payload

There is no spurious found below 30MHz

Tx frequency (MHz)	Polarization	Spurious Frequency (MHz)	Power Level (dBuV/m)	Detector (P/QP/A)
2402	V	172.20	30.1	QP
2402	V	397.34	21.9	QP
2402	V	544.16	23.1	QP
2402	V	3603.8	40.90	A
2402	H	17.70	26.1	QP
2402	H	23.20	40.57	QP

Tx frequency (MHz)	Polarization	Spurious Frequency (MHz)	Power Level (dBuV/m)	Detector (P/QP/A)
2441	V	170.78	43.50	QP
2441	H	170.00	34.70	QP

Tx frequency (MHz)	Polarization	Spurious Frequency (MHz)	Power Level (dBuV/m)	Detector (P/QP/A)
2480	H	170.72	34.00	QP