

Prüfbericht - Nr.: Test Report No.	14014742 002	Seite 1 von 10 Page 1 of 10	
Auftraggeber: Applicant	Nasaco Electronics (H.K.) Ltd. Unit 6, 11/F., Eastern Centre 1065 King's Road, Quarry Bay Hong Kong		
Gegenstand der Prüfung: Test item	Bluetooth Headset		
Bezeichnung: Identification	NTE8100	Serien-Nr.: Serial No.	Engineering sample
Wareneingangs-Nr.: Receipt No.	070308001-1	Eingangsdatum: Date of receipt	08.03.2007
Prüfart: Testing location	TÜV Rheinland Hong Kong Ltd. 9th Floor, Oriental News Building, 7 Wang Tai Road, Kowloon Bay, Kowloon, Hong Kong Hong Kong Productivity Council HKPC Building, 78 Tat Chee Avenue, Kowloon, Hong Kong		
Prüfgrundlage: Test specification	FCC Part 15 Subpart C ANSI C63.4-2003 CISPR 22:1997		
Prüfresultat: Test Result	Das vorstehend beschriebene Gerät wurde geprüft und entspricht oben genannter Prüfgrundlage. The above mentioned product was tested and passed .		
geprüft / tested by:		kontrolliert / reviewed by:	
07.03.2007	Sharon Li	07.03.2007	Thomas Berns
Datum Date	Name Name	Unterschrift Signature	Unterschrift Signature
Sonstiges: Other Aspects		FCCID: LLP-NTE8100 This test report is issued for the modification of the previously test EUT of model NTE8100 in test report number 14014742 001. For details, please refer to "Remark" on page 3.	
Abkürzungen:	OK, Pass, P Fail, F N/A NT	= entspricht Prüfgrundlage = entspricht nicht Prüfgrundlage = nicht anwendbar = nicht getestet	Abbreviations: OK, Pass, P Fail, F N/A NT
= passed = failed = not applicable = not tested			
Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens. This test report relates to the a. m. test sample. Without permission of the test center this test report is not permitted to be duplicate in extracts. This test report does not entitle to carry any safety mark on this or similar products.			

Table of Content

	Page
Cover Page	1
Table of Content	2
Product information	3
Manufacturers declarations	3
Product function and intended use	3
Submitted documents	3
Remarks	3
List of Test and Measurement Instruments	4
Result FCC Part 15 – Subpart C	5
Subclause 15.203 – Antenna Information.....	Pass 5
Subclause 15.204 – Antenna Information.....	Pass 5
Subclause 15.207 – Disturbance Voltage on AC Mains	N.A. 5
Subclause 15.247 (a) – Carrier Frequency Separation.....	Pass 5
Subclause 15.247 (a) – Time of Occupancy (Dwell Time).....	Pass 5
Subclause 15.247 (a) – 20 dB Bandwidth	Pass 5
Subclause 15.247 (a) – Hopping Sequence.....	Pass 6
Subclause 15.247 (a) – Equal Hopping Frequency Use.....	Pass 7
Subclause 15.247 (a) – Receiver Input Bandwidth.....	Pass 8
Subclause 15.247 (a) – Receiver Hopping Capability	Pass 8
Subclause 15.247 (b) – Peak Output Power	Pass 8
Subclause 15.247 (b) – Band edge compliance.....	Pass 9
Subclause 15.247 (c) – Spurious Conducted Emissions.....	Pass 9
Subclause 15.247 (c) – Spurious Radiated Emissions	Pass 9
Appendix 1 – Test protocols	3 pages
Appendix 2 – Test setup	3 pages
Appendix 3 – Photo documentation	10 pages
Appendix 4 – Product documentation	9 pages

Product information

Manufacturers declarations

	Transceiver
Operating frequency range	2402 - 2480 MHz
Type of modulation	FHSS modulation
Number of channels	79
Channel separation	1 MHz
Type of antenna	Integral Antenna
Antenna gain (dBi)	1
Power level	fix
Type of equipment	stand alone, plug-in radio device
Connection to public utility power line	No
Nominal voltage	V _{nom} : 3.6 V
Independent Operation Modes	Page scan Inquiry scan Connection state - ACL Link Connection state - SCO Link

Product function and intended use

The test item is a Bluetooth Headset based on the Bluetooth technology.

Bluetooth is a short-range radio link intended to be a cable replacement between portable and/or fixed electronic devices.

Bluetooth operates in the unlicensed ISM Band at 2.4 GHz. In the US a band of 83.5 MHz width is available. In this band, 79 RF channels spaced 1 MHz apart are defined.

The channel is represented by a pseudo-random hopping sequence through the 79 channels. The channel is divided into time slots, with a nominal slot length of 625 μ s, where each slot corresponds to different RF hop frequencies. The nominal hop rate is 1600 hops/s. The symbol rate on the channel is 1 Ms/s.

Submitted documents

Circuit Diagram
Bill of material

Remarks

Following components change for the modified sample. Please refer to the Bill of material for further details.

Capacitor C18 change to 1pF
Capacitor C14 change to 3.9pH
Resistor L8 change to 0 ohm.

To show compliance Radiated Spurious Emission and Peak Output Power were repeated on the revised sample.

List of Test and Measurement Instruments

	Kind of Equipment	Manufacturer	Type	S/N
<input type="checkbox"/>	Test Receiver	Rohde & Schwarz	ESH-3	890173/033
<input type="checkbox"/>	L/I/S/N	Rohde & Schwarz	ESH 3-Z5	849876/026
<input type="checkbox"/>	Oscilloscope	HP	54713B	US34510455
<input type="checkbox"/>	Test Receiver	Rohde & Schwarz	ESVP	882402/033
<input type="checkbox"/>	Absorbing Clamp	Rohde & Schwarz	MDS-21	979 3/4
<input type="checkbox"/>	Test Receiver	Rohde & Schwarz	ESVS30	842807/009
<input type="checkbox"/>	Biconical Antenna	Rohde & Schwarz	HK116	841489/015
<input type="checkbox"/>	Log.-Periodic Antenna	Rohde & Schwarz	HL223	841516/017
<input type="checkbox"/>	Universal Power Analyzer	Voltech	PM3000A	9915
<input type="checkbox"/>	Reference Impedance Network	Voltech	IEC 555 Standard	9946
<input type="checkbox"/>	AC Power Source	California Instr.	4500L	HK51895
<input type="checkbox"/>	Trip-Loop Antenna	Chase	LLA6142	1019
<input type="checkbox"/>	Double Ridge Horn Antenna	EMCO	3115	9002-3351
<input checked="" type="checkbox"/>	Double Ridge Horn Antenna	EMCO	3115	9002-3347
<input type="checkbox"/>	RF Comms Test Set	HP	8920B	US36492628
<input type="checkbox"/>	Spectrum Analyser + Tracking G.	HP	8596E	3639A00758
<input type="checkbox"/>	Signal Generator	Rohde & Schwarz	SMY 01	844146/024
<input type="checkbox"/>	Signal Generator	Rohde & Schwarz	SMY 01	844146/023
<input type="checkbox"/>	BiLog Antenna	EMCO	3143	9607-1287
<input type="checkbox"/>	Isotropic Field Probe	Holladay	HI-4422	90956
<input type="checkbox"/>	Power Amplifier	Kalmus	757-LC	7620-1
<input type="checkbox"/>	Power Amplifier	Kalmus	122-FC	7620-2
<input type="checkbox"/>	Coupling Clamp	Schaffner	CDN 126	312
<input type="checkbox"/>	Couple Device Network	Fischer	CDN-M2	9604
<input checked="" type="checkbox"/>	Spectrum Analyzer	Rohde & Schwarz	FSP30	1093.4495K30
<input type="checkbox"/>	Temperature Chamber	Binder	MK 240	9020-0028
<input type="checkbox"/>	EFT,ESD,SURGE, DIPS tester	Schaffner	Best 96	IN3796-011
<input type="checkbox"/>	Surge Generator	Schaffner	NSG650	280
<input checked="" type="checkbox"/>	Active Loop Antenna	EMCO	6502	9107-2651

Result FCC Part 15 – Subpart C

Subclause 15.203 – Antenna Information		Pass
Requirement:	No antenna other than that furnished by the responsible party shall be used with the device	
Result:	Permanent attached antenna	
Verdict:	Pass	
Subclause 15.204 – Antenna Information		Pass
Requirement:	Provide information for every antenna proposed for the use with the EUT	
Result:	a) Antenna type: Integral antenna soldered to the circuit board b) Manufacturer and model no: N.A. c) Gain with reference to an isotropic radiator: 1 dBi	
Verdict:	Pass	
Subclause 15.207 – Disturbance Voltage on AC Mains		N.A.
The device is not functioning (no RF radiations) during charging		
Subclause 15.247 (a) – Carrier Frequency Separation		Pass
Remark: Test result refers to test report 14014742 001.		
Subclause 15.247 (a) – Time of Occupancy (Dwell Time)		Pass
Remark: Test result refers to test report 14014742 001.		
Subclause 15.247 (a) – 20 dB Bandwidth		Pass
Remark: Test result refers to test report 14014742 001.		


Subclause 15.247 (a) – Hopping Sequence

Pass

Requirement: The hopping sequence is generated and provided with an example.

Hopping sequence

The channel is represented by a pseudo-random hopping sequence hopping through the 79 RF channels. The hopping sequence is unique for the piconet and is determined by the Bluetooth device address of the master. The X input determines the phase in the 32-hop segment, whereas Y1 and Y2 selects between master-to-slave and slave-to-master transmission. The inputs A to D determine the ordering within the segment, the inputs E and F determine the mapping onto the hop frequencies.

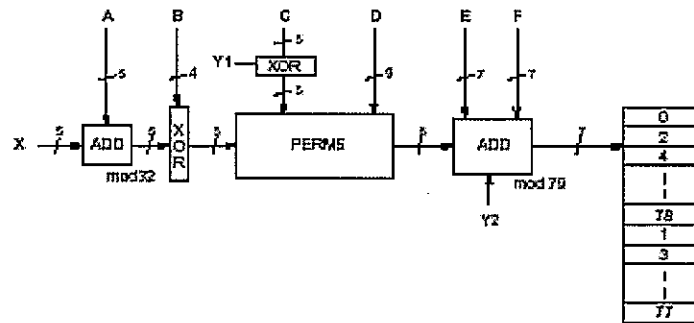

Example data:

Hop sequence {k} for CONNECTION STATE:

CLK start: 0x000010

ULAP: 0x00000000

#ticks: 00 02 | 04 06 | 08 0a | 0c 0e | 10 12 | 14 16 | 18 1a | 1c 1e |

```

0x0000010: 08 66 | 10 70 | 12 19 | 14 23 | 16 01 | 18 05 | 20 33 | 22 37 |
0x0000030: 24 03 | 26 07 | 28 35 | 30 39 | 32 72 | 34 76 | 36 25 | 38 29 |
0x0000050: 40 74 | 42 78 | 44 27 | 46 31 | 48 09 | 50 13 | 52 41 | 54 45 |
0x0000070: 56 11 | 58 15 | 60 43 | 62 47 | 32 17 | 36 19 | 34 49 | 38 51 |
0x0000090: 40 21 | 44 23 | 42 53 | 46 55 | 48 33 | 52 35 | 50 65 | 54 67 |
0x00000b0: 56 37 | 60 39 | 58 69 | 62 71 | 64 25 | 68 27 | 66 57 | 70 59 |
0x00000d0: 72 29 | 76 31 | 74 61 | 78 63 | 01 41 | 05 43 | 03 73 | 07 75 |
0x00000f0: 09 45 | 13 47 | 11 77 | 15 00 | 64 49 | 66 53 | 68 02 | 70 06 |
0x0000110: 01 51 | 03 55 | 05 04 | 07 08 | 72 57 | 74 61 | 76 10 | 78 14 |
0x0000130: 09 59 | 11 63 | 13 12 | 15 16 | 17 65 | 19 69 | 21 18 | 23 22 |
0x0000150: 33 67 | 35 71 | 37 20 | 39 24 | 25 73 | 27 77 | 29 26 | 31 30 |
0x0000170: 41 75 | 43 00 | 45 28 | 47 32 | 17 02 | 21 04 | 19 34 | 23 36 |
0x0000190: 33 06 | 37 08 | 35 38 | 39 40 | 25 10 | 29 12 | 27 42 | 31 44 |
0x00001b0: 41 14 | 45 16 | 43 46 | 47 48 | 49 18 | 53 20 | 51 50 | 55 52 |
0x00001d0: 65 22 | 69 24 | 67 54 | 71 56 | 57 26 | 61 28 | 59 58 | 63 60 |
0x00001f0: 73 30 | 77 32 | 75 62 | 00 64 | 49 34 | 51 42 | 57 66 | 59 74 |
0x0000210: 53 36 | 55 44 | 61 68 | 63 76 | 65 50 | 67 58 | 73 03 | 75 11 |
0x0000230: 69 52 | 71 60 | 77 05 | 00 13 | 02 38 | 04 46 | 10 70 | 12 78 |
0x0000250: 06 40 | 08 48 | 14 72 | 16 01 | 18 54 | 20 62 | 26 07 | 28 15 |
0x0000270: 22 56 | 24 64 | 30 09 | 32 17 | 02 66 | 06 74 | 10 19 | 14 27 |
0x0000290: 04 70 | 08 78 | 12 23 | 16 31 | 18 03 | 22 11 | 26 35 | 30 43 |
0x00002b0: 20 07 | 24 15 | 28 39 | 32 47 | 34 68 | 38 76 | 42 21 | 46 29 |
0x00002d0: 36 72 | 40 01 | 44 25 | 48 33 | 50 05 | 54 13 | 58 37 | 62 45 |
0x00002f0: 52 09 | 56 17 | 60 41 | 64 49 | 34 19 | 36 35 | 50 51 | 52 67 |
0x0000310: 38 21 | 40 37 | 54 53 | 56 69 | 42 27 | 44 43 | 58 59 | 60 75 |
0x0000330: 46 29 | 48 45 | 62 61 | 64 77 | 66 23 | 68 39 | 03 55 | 05 71 |
0x0000350: 70 25 | 72 41 | 07 57 | 09 73 | 74 31 | 76 47 | 11 63 | 13 00 |
0x0000370: 78 33 | 01 49 | 15 65 | 17 02 | 66 51 | 70 67 | 03 04 | 07 20 |
0x0000390: 68 55 | 72 71 | 05 08 | 09 24 | 74 59 | 78 75 | 11 12 | 15 28 |
0x00003b0: 76 63 | 01 00 | 13 16 | 17 32 | 19 53 | 23 69 | 35 06 | 39 22 |
0x00003d0: 21 57 | 25 73 | 37 10 | 41 26 | 27 61 | 31 77 | 43 14 | 47 30 |
0x00003f0: 29 65 | 33 02 | 45 18 | 49 34 | 19 04 | 21 08 | 23 20 | 25 24 |

```

Subclause 15.247 (a) – Equal Hopping Frequency Use
Pass

Requirement: Each of the transmitter's hopping channels is used equally on average.

Equal hopping frequency use

The EUT complies with the Bluetooth RF specifications. For details refer to the Bluetooth standard.

Subclause 15.247 (a) – Receiver Input Bandwidth	Pass
Requirement: The associated receiver(s) complies with the requirement that its input bandwidth matches the bandwidth of the transmitted signal.	
Receiver input bandwidth The receiver bandwidth is equal to the receiver bandwidth in the 79 hopping channel mode, which is 1 MHz. The receiver bandwidth was verified during Bluetooth RF conformance testing.	

Subclause 15.247 (a) – Receiver Hopping Capability	Pass
Requirement: The associated receiver has the ability to shift frequencies in synchronisation with the transmitted signals.	
Receiver hopping Capability The EUT complies with the Bluetooth RF specifications. For details refer to the Bluetooth standard.	

Subclause 15.247 (b) – Peak Output Power	Pass																								
Test Specification : FCC Part 15 Subpart A – Subclause 15.31 Mode of operation : Tx mode (2402MHz, 2441MHz, 2480MHz), DH1 packet Port of testing : Temporary antenna port Detector : Peak RBW/VBW : 1 MHz / 3 MHz Supply voltage : 3.6VDC from DC power supply Temperature : 23°C Humidity : 50%																									
Requirement: For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 Watt. For all other frequency hopping systems in the 2400 – 2483.5 MHz band: 0.125 Watts.																									
Result All three transmit frequency modes comply with the maximum peak output power limit. For test protocols please refer to Appendix 1, page 2-3.																									
<table border="1"> <thead> <tr> <th>Frequency (MHz)</th> <th>Maximum peak output power (dBm)</th> <th>Cable attenuation (dB)</th> <th>Output power (dBm)</th> <th>Limit (W/dBm)</th> <th>Verdict</th> </tr> </thead> <tbody> <tr> <td>2402</td> <td>1.51</td> <td>3.52</td> <td>5.03</td> <td>1 / 30.0</td> <td>Pass</td> </tr> <tr> <td>2441</td> <td>0.59</td> <td>3.65</td> <td>4.24</td> <td>1 / 30.0</td> <td>Pass</td> </tr> <tr> <td>2480</td> <td>-0.41</td> <td>3.60</td> <td>3.19</td> <td>1 / 30.0</td> <td>Pass</td> </tr> </tbody> </table>	Frequency (MHz)	Maximum peak output power (dBm)	Cable attenuation (dB)	Output power (dBm)	Limit (W/dBm)	Verdict	2402	1.51	3.52	5.03	1 / 30.0	Pass	2441	0.59	3.65	4.24	1 / 30.0	Pass	2480	-0.41	3.60	3.19	1 / 30.0	Pass	
Frequency (MHz)	Maximum peak output power (dBm)	Cable attenuation (dB)	Output power (dBm)	Limit (W/dBm)	Verdict																				
2402	1.51	3.52	5.03	1 / 30.0	Pass																				
2441	0.59	3.65	4.24	1 / 30.0	Pass																				
2480	-0.41	3.60	3.19	1 / 30.0	Pass																				

Subclause 15.247 (b) – Band edge compliance
Pass

Remark: Test result refers to test report 14014742 001.

Subclause 15.247 (c) – Spurious Conducted Emissions
Pass

Remark: Test result refers to test report 14014742 001.

Subclause 15.247 (c) – Spurious Radiated Emissions
Pass

Test Specification : ANSI C63.4 - 2003
Mode of operation : Tx mode (2402MHz, 2441MHz, 2480MHz), DH1 packet
Port of testing : Enclosure
Detector : Peak
RBW/VBW : 100 kHz / 300 kHz for $f < 1$ GHz
1 MHz / 3 MHz for $f > 1$ GHz
Supply voltage : internal batteries has been activated
Temperature : 23°C
Humidity : 50%

Requirement: In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

Result

All three transmit frequency modes comply with the field strength within the restricted bands. There is no spurious found under the frequency below 30MHz.

Tx frequency 2402MHz

Vertical Polarization

Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m
-	-	43.5 / QP
-	-	74.0 / P
-	-	54.0 / A

Tx frequency 2402MHz

Horizontal Polarization

Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m
158.06	27.0	43.5 / QP
-	-	74.0 / P
-	-	54.0 / A

Tx frequency 2441MHz			Vertical Polarization		
Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m			
-	-	43.5 / QP			
-	-	74.0 / P			
-	-	54.0 / A			
Tx frequency 2441MHz			Horizontal Polarization		
Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m			
157.64	27.70	43.5 / QP			
-	-	74.0 / P			
-	-	54.0 / A			
Tx frequency 2480MHz			Vertical Polarization		
Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m			
-	-	43.5 / QP			
-	-	74.0 / P			
-	-	54.0 / A			
Tx frequency 2480MHz			Horizontal Polarization		
Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m			
157.88	28.00	43.5 / QP			
-	-	74.0 / P			
-	-	54.0 / A			