



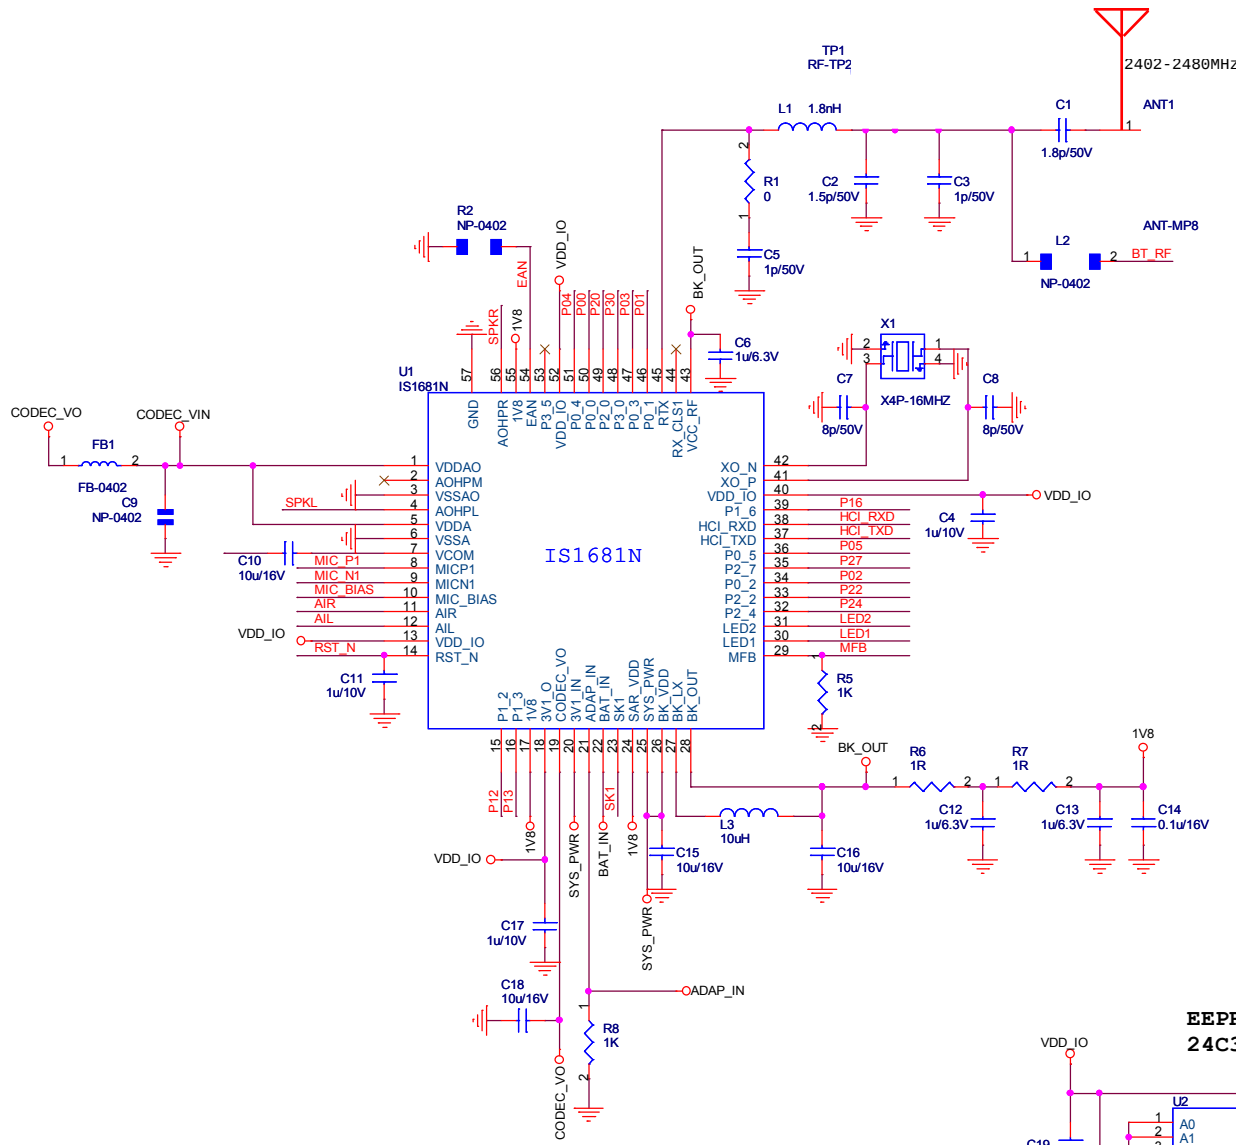

Bluetooth Module PIN DEFINITION

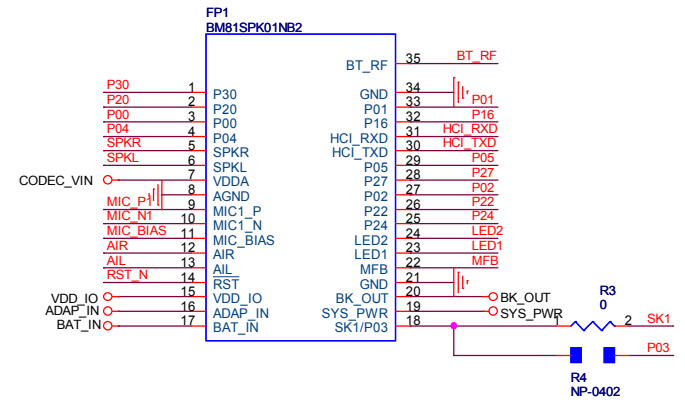


GPIO Description

P00	Slide Switch Detect/TX_IND
P01	Volume up
P02	Play/Pause
P03	RX_IND
P04	Audio AMP Enable
P05	REV
P16	Volume down
P20	System Configuration
P22	Keep alive for external LDO
P24	System Configuration
P27	FWD
P30	Line-in detect

BOM NAME	R3	R4	NOTE
BOM_BM81SPK01NB2_V1_20110809	0 OHM	NP	Pin 18 = SK1
BOM_BM81SPK01NB3_V1_20110809	NP	0 OHM	Pin 18 = P03

EEPROM 24C32

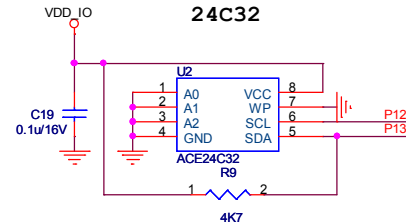



ISSC Technologies Corp.
ADD. 4F, No.8, Dusing Rd., Hsinchu Science Park,
Hsinchu City 30078, Taiwan
TEL. 886-3-5778385

Board Name		BM81SPK01NB2 / BM81SPK01NB3	P/N
Size	Title	SCH_BM81SPK01NB2_V1_20110809	Rev
B		SCH_BM81SPK01NB3_V1_20110809	V1
Date: Monday, September 19, 2011		Sheet	1 of 1