

## FCC 47 CFR PART 15 SUBPART C

### RF Test Report

Applicant : Ocean Star Electronics Limited

Product Type : Bluetooth/Wi-Fi Wireless Stereo Smart Speaker

Trade Name : JENSEN, SOLIS, Ocean

Model Number : JSB-1000, JSB-1000XXXXX, SO-3000, SO-3000XXXXX,  
SO-6000, SO-6000XXXXX,  
iStation 20GC, iStation 4GC, iStation 8GC

Applicable Standard : FCC 47 CFR PART 15 SUBPART C  
ANSI C63.10:2013

Receive Date : Dec. 10, 2016

Test Period : Nov. 16 ~ Dec 12, 2016

Issue Date : Jan. 20, 2017

#### Issue by

A Test Lab Techno Corp.  
No. 140-1, Changan Street, Bade District,  
Taoyuan City 33465, Taiwan (R.O.C)  
Tel : +886-3-2710188 / Fax : +886-3-2710190



Taiwan Accreditation Foundation accreditation number: 1330

**Note:** This report shall not be reproduced except in full, without the written approval of A Test Lab Techno Corp. This document may be altered or revised by A Test Lab Techno Corp. personnel only, and shall be noted in the revision section of the document. The client should not use it to claim product endorsement by TAF, or any government agencies. The test results in the report only apply to the tested sample.



**Revision History**

Rev.	Issue Date	Revisions	Revised By
00	Jan. 20, 2017	Initial Issue	Snow Wang

## Verification of Compliance

Issued Date: Jan. 20, 2017

Applicant : Ocean Star Electronics Limited

Product Type : Bluetooth/Wi-Fi Wireless Stereo Smart Speaker

Trade Name : JENSEN, SOLIS, Ocean

Model Number : JSB-1000, JSB-1000XXXXX, SO-3000, SO-3000XXXXX,  
SO-6000, SO-6000XXXXX,  
iStation 20GC, iStation 4GC, iStation 8GC

FCC ID : LMZ-250737476GC

EUT Rated Voltage : DC 18V, 1.5A

Test Voltage : 120 Vac / 60 Hz

Applicable Standard : FCC 47 CFR PART 15 SUBPART C  
ANSI C63.10:2013

Test Result : Complied

Performing Lab. : A Test Lab Techno Corp.

No. 140-1, Changan Street, Bade District,  
Taoyuan City 33465, Taiwan (R.O.C)  
Tel : +886-3-2710188 / Fax : +886-3-2710190



Taiwan Accreditation Foundation accreditation number: 1330

<http://www.atl-lab.com.tw/e-index.htm>

A Test Lab Techno Corp. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by A Test Lab Techno Corp. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Approved By



(Manager)

(Fly Lu)

Reviewed By



(Testing Engineer)

(Eric Ou Yang)



## TABLE OF CONTENTS

<b>1</b>	<b>General Information .....</b>	<b>6</b>
<b>2</b>	<b>EUT Description .....</b>	<b>7</b>
<b>3</b>	<b>Test Methodology .....</b>	<b>9</b>
3.1.	Mode of Operation.....	9
3.2.	EUT Exercise Software .....	12
3.3.	Configuration of Test System Details .....	13
3.4.	Test Site Environment .....	13
<b>4</b>	<b>AC Power Line Conducted Emission Measurement .....</b>	<b>14</b>
4.1.	Limit .....	14
4.2.	Test Instruments .....	14
4.3.	Test Setup.....	14
4.4.	Test Procedure .....	15
4.5.	Test Result.....	16
<b>5</b>	<b>Radiated Emission Measurement.....</b>	<b>18</b>
5.1.	Limit .....	18
5.2.	Test Instruments .....	18
5.3.	Setup .....	19
5.4.	Test Procedure .....	20
5.5.	Test Result.....	22
<b>6</b>	<b>Maximum Conducted Output Power Measurement.....</b>	<b>53</b>
6.1.	Limit .....	53
6.2.	Test Setup.....	53
6.3.	Test Instruments .....	53
6.4.	Test Procedure .....	53
6.5.	Test Result.....	54
<b>7</b>	<b>6dB RF Bandwidth Measurement.....</b>	<b>56</b>
7.1.	Limit .....	56
7.2.	Test Setup.....	56
7.3.	Test Instruments .....	56
7.4.	Test Procedure .....	56
7.5.	Test Result.....	57
7.6.	Test Graphs .....	58
<b>8</b>	<b>Maximum Power Density Measurement .....</b>	<b>61</b>
8.1.	Limit .....	61
8.2.	Test Setup.....	61
8.3.	Test Instruments .....	61
8.4.	Test Procedure .....	61
8.5.	Test Result.....	62
8.6.	Test Graphs .....	63



<b>9</b>	<b>Out of Band Conducted Emissions Measurement .....</b>	<b>66</b>
9.1.	Limit .....	66
9.2.	Test Setup.....	66
9.3.	Test Instruments .....	66
9.4.	Test Procedure .....	66
9.5.	Test Graphs .....	67
<b>10</b>	<b>Antenna Measurement.....</b>	<b>76</b>
10.1.	Limit .....	76
10.2.	Antenna Description .....	76

## 1 General Information

### 1.1 Summary of Test Result

Standard	Item	Result	Remark
15.247			
15.207	AC Power Conducted Emission	PASS	-----
Standard	Item	Result	Remark
15.247			
15.247(d)	Transmitter Radiated Emissions	PASS	-----
15.247(b)(3)	Max. Output Power	PASS	-----
15.247(a)(2)	6dB RF Bandwidth	PASS	-----
15.247(e)	Power Spectral Density	PASS	-----
15.247(d)	Out of Band Conducted Spurious Emission	PASS	-----
15.203	Antenna Requirement	PASS	-----

The test results of this report relate only to the tested sample(s) identified in this report. Manufacturer or whom it may concern should recognize the pass or fail of the test result.

### 1.2 Measurement Uncertainty

Test Item	Frequency Range	Uncertainty (dB)
Conducted Emission	9kHz ~ 150KHz	2.7
	150kHz ~ 30MHz	2.7
Radiated Emission	9kHz ~ 30MHz	1.7
	30MHz ~ 1000MHz	5.7
	1000MHz ~ 18000MHz	5.5
	18000MHz ~ 26500MHz	4.8
	26500MHz ~ 40000MHz	4.8
Conducted Output Power	+0.27 dB / -0.28 dB	
RF Bandwidth	4.96%	
Power Spectral Density	+0.71 dB / -0.77 dB	



## 2 EUT Description

Applicant	Ocean Star Electronics Limited Unit 15, 8/F., Wah Wai Centre, 38-40 Au Pui Wan Street, Fo Tan, Hong Kong			
Manufacturer	Ocean Star Electronics Limited Unit 15, 8/F., Wah Wai Centre, 38-40 Au Pui Wan Street, Fo Tan, Hong Kong			
Product Type	Bluetooth/Wi-Fi Wireless Stereo Smart Speaker			
Trade Name	JENSEN, SOLIS, Ocean			
Model Number	JSB-1000, JSB-1000XXXXX, SO-3000, SO-3000XXXXX, SO-6000, SO-6000XXXXX, iStation 20GC, iStation 4GC, iStation 8GC			
FCC ID	LMZ-250737476GC			
Operate Freq. Band	Frequency Range (MHz)	Modulation	Channel Bandwidth	Data Rate 400 GI (ns)
IEEE 802.11b	2412 ~ 2462	DSSS	20MHz	Up to 11Mbps
IEEE 802.11g	2412 ~ 2462	OFDM	20MHz	Up to 54Mbps
IEEE 802.11n 2.4GHz 20MHz	2412 ~ 2462	OFDM	20MHz	Up to 72.2Mbps
Antenna Information	Antenna Model	Antenna Type	Antenna Gain	
	GY 9000	PCB Antenna	2dBi	
Antenna Delivery	See section 3.1			

Frequency Band	Max. RF Output Power (W)
IEEE 802.11b	0.100
IEEE 802.11g	0.168
IEEE 802.11n 2.4GHz 20MHz	0.125

Component List				
Power adapter(1)	Trade Name	JIEDONG DLECFRON FACTORY	Model Number	JDA0301800150WUS
	I/P: 100-240VAC, 50-60Hz, 0.8A O/P: 18VDC, 1.5A Cable out: Shielded, 1.5m, Non-Detachable at Power Adapter			
Power adapter(2)	Trade Name	KINGWALL	Model Number	AS360-180.AA150
	I/P: 100-240VAC, 50-60Hz, 1.2A O/P: 18VDC, 1.5A Cable out: Shielded, 1.5m with one core, Non-Detachable at Power Adapter			



**Trade name / model number and model different description :**

Model Group	Trade Name	Model Number	Description
1	JENSEN	JSB-1000	JSB-1000XXXXX (where XXXXX denote any printable characters in the ASCII Standard Character Table to represent variances in cosmetics or buyers)
		JSB-1000XXXXX	
	Ocean	iStation 20GC	JSB-1000 and iStation 20GC differ is the model number only.
2	SOLIS	SO-3000	SO-3000XXXXX (where XXXXX denote any printable characters in the ASCII Standard Character Table to represent variances in cosmetics or buyers)
		SO-3000XXXXX	
	Ocean	iStation 4GC	SO-3000 and iStation 4GC differ is the model number only.
	SOLIS	SO-6000	SO-6000XXXXX (where XXXXX denote any printable characters in the ASCII Standard Character Table to represent variances in cosmetics or buyers)
		SO-6000XXXXX	
Ocean	iStation 8GC	SO-6000 and iStation 8GC differ is the model number only.	
The model group 1 and group 2 differ is the appearance and button.			



### 3 Test Methodology

#### 3.1. Mode of Operation

In the test report use EUT model: JSB-1000 to operate testing.

Decision of Test ATL has verified the construction and function in typical operation. All the test modes were carried out with the EUT in normal operation, which was shown in this test report and defined as:

Test Mode
Mode 1: Continuous TX mode
Mode 2: IEEE 802.11b link mode
Mode 3: IEEE 802.11g link mode
Mode 4: IEEE 802.11n 2.4GHz 20MHz link mode

Software used to control the EUT for staying in continuous transmitting mode was programmed.

After verification, all tests were carried out with the worst case test modes as shown below except radiated spurious emission below 1GHz and power line conducted emissions below 30MHz, which worst case was in normal link mode only.

By preliminary testing and verifying three axis (X, Y and Z) position of EUT transmitted status, it was found that "X axis" position was the worst, then the final test was executed the worst condition and test data were recorded in this report.

Note:

1. Because ANT-1 power is greater than ANT-2, the ANT-1 is primary measured.
2. The device used two models of adapter, adapter number: JDA0301800150WUS is worst case to perform testing.

Test Mode	ANT-1	ANT-2
Mode 2: IEEE 802.11b link mode	V	V
Mode 3: IEEE 802.11g link mode	V	V
Mode 4: IEEE 802.11n 2.4GHz 20MHz link mode	V	V

Test Mode	Antenna Delivery	Test Channel	Data Rate (Mbps)
Mode 2: IEEE 802.11b link mode	1TX /1RX (Diversity)	1, 6, 11	1
Mode 3: IEEE 802.11g link mode	1TX /1RX (Diversity)	1, 6, 11	6
Mode 4: IEEE 802.11n 2.4GHz 20MHz link mode	1TX /1RX (Diversity)	1, 6, 11	6.5

#### Duty cycle

Test Mode	Frequency (MHz)	on time (ms)	on+off time (ms)	Duty cycle	Duty Factor (dB)	1/T Minimum VBW (kHz)
Mode 2: IEEE 802.11b link mode	2412.0	1.000	1.000	1.000	0.000	0.010
Mode 3: IEEE 802.11g link mode	2412.0	1.000	1.000	1.000	0.000	0.010
Mode 4: IEEE 802.11n 2.4GHz 20MHz link mode	2412.0	1.000	1.000	1.000	0.000	0.010





Duty Cycle Graphs

Mode 2: IEEE 802.11b link mode	
On time	<p>Agilent R T Freq/Channel            Ref 20 dBm Atten 20 dB Mkr1 17.63 ms            *Peak 9.55 dBm            Log 10 dB/ Offst 11.5 dB            LgAv            W1 S2 S3 FS AA            E(f): FTun            Center 2.412 000 GHz Span 0 Hz            Res BW 1 MHz VBW 1 MHz Sweep 20 ms (601 pts)            Copyright 2000-2006 Agilent Technologies</p>
On+off time	<p>Agilent R T Freq/Channel            Ref 20 dBm Atten 20 dB Mkr1 17.63 ms            *Peak 9.55 dBm            Log 10 dB/ Offst 11.5 dB            LgAv            W1 S2 S3 FS AA            E(f): FTun            Center 2.412 000 GHz Span 0 Hz            Res BW 1 MHz VBW 1 MHz Sweep 20 ms (601 pts)            Copyright 2000-2006 Agilent Technologies</p>



Mode 3: IEEE 802.11g Mode	
<p>On time</p>	
<p>On+off time</p>	

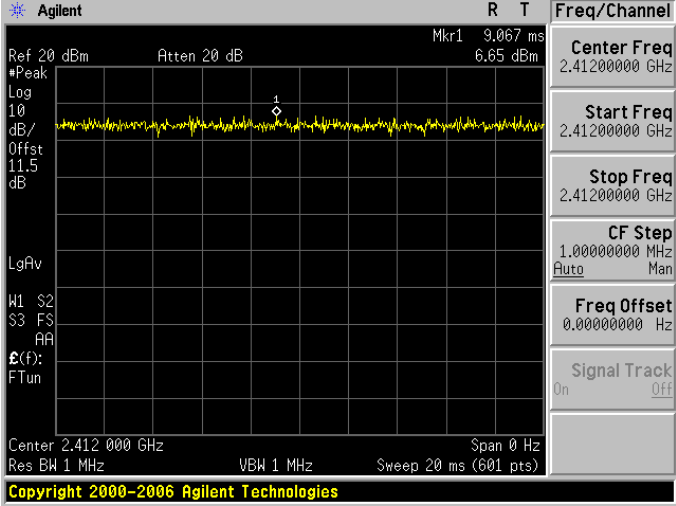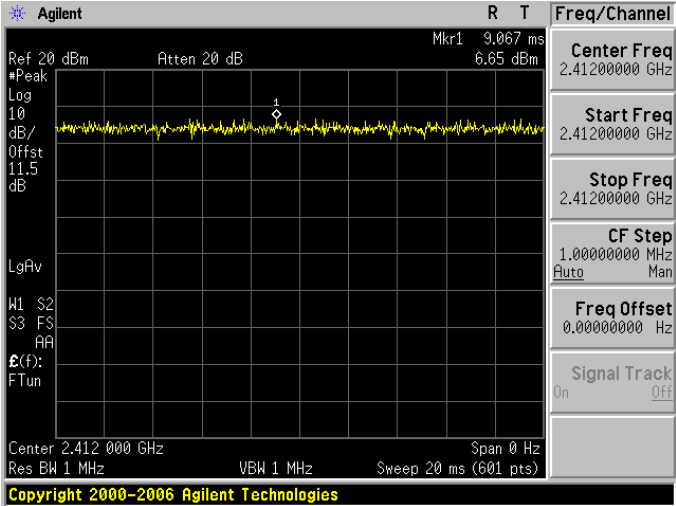Mode 4: IEEE 802.11n 2.4GHz 20MHz Mode	
On time	 <p>The screenshot shows a spectrum analyzer interface with a yellow signal trace. The center frequency is 2.4120000 GHz. The signal level is approximately 6.65 dBm. The interface includes various control panels for reference level, attenuation, markers, and frequency settings.</p>
On+off time	 <p>This screenshot is identical to the one above, showing the same spectrum analyzer settings and signal trace during the 'On+off time' period.</p>


### 3.2. EUT Exercise Software

1.	Setup the EUT shown on 3.3.
2.	Turn on the power of all equipment.
3.	Turn Wi-Fi function link to AP
4.	EUT run test program.


Measurement Software	
1	EZ-EMC Ver. ATL-03A1-1
2	EZ-EMC Ver ATL-ITC-3A1-1

### 3.3. Configuration of Test System Details

#### Conducted Emissions

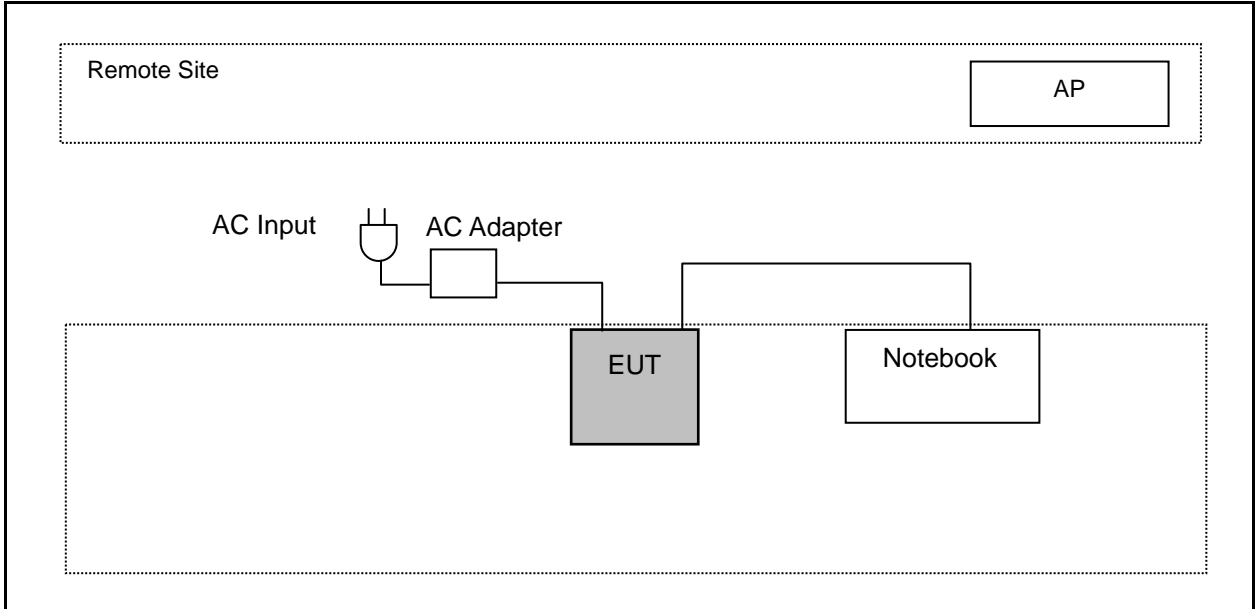

#### Radiated Emissions

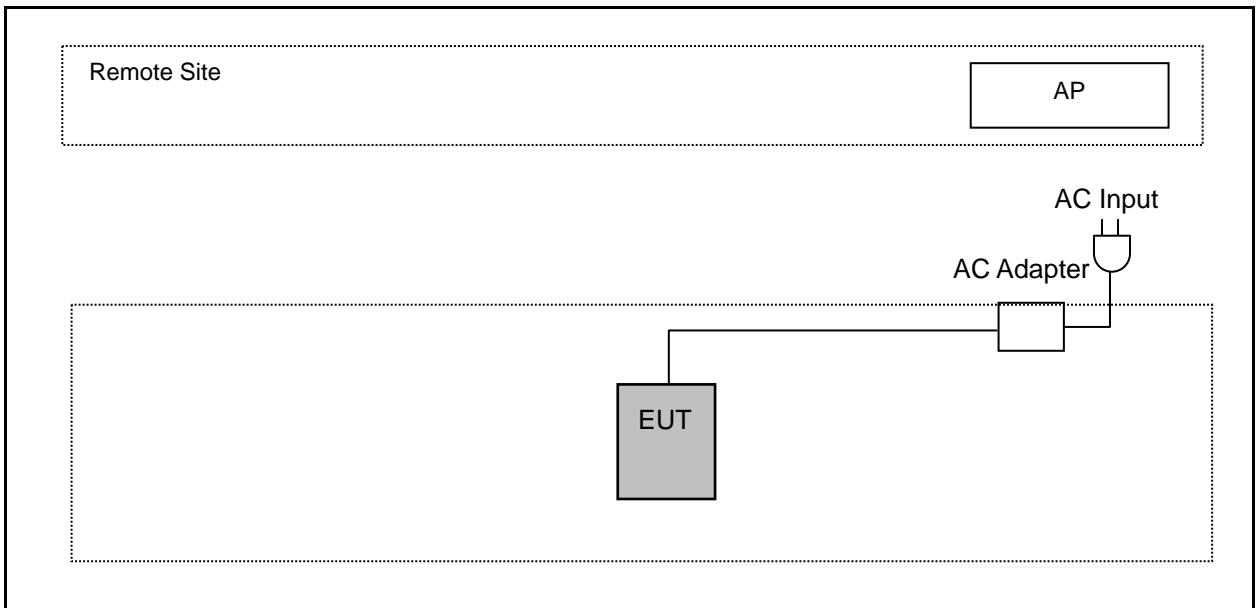

### 3.4. Test Site Environment

Items	Required (IEC 60068-1)	Actual
Temperature (°C)	15-35	26
Humidity (%RH)	25-75	60
Barometric pressure (mbar)	860-1060	950

## 4 AC Power Line Conducted Emission Measurement

### 4.1. Limit


Frequency (MHz)	Quasi-peak	Average
0.15 - 0.5	66 to 56	56 to 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

### 4.2. Test Instruments

Describe	Manufacturer	Model Number	Serial Number	Cal. Date	Cal. Period
Test Receiver	R&S	ESCI	100367	05/13/2016	1 year
LISN	R&S	ENV216	101040	03/15/2016	1 year
LISN	R&S	ENV216	101041	03/07/2016	1 year
RF Cable	Woken	00100D1380194M	TE-02-02	05/31/2016	1 year
Test Site	ATL	TE02	TE02	N.C.R.	-----

Note: N.C.R. = No Calibration Request.

### 4.3. Test Setup

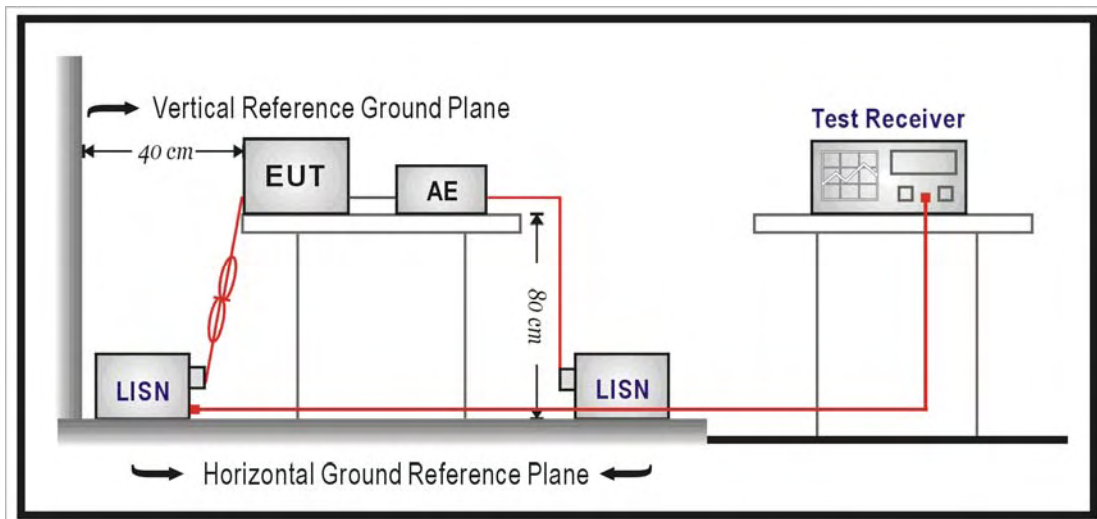

#### 4.4. Test Procedure

The EUT and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a  $50\Omega//50\mu\text{H}$  coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a  $50\Omega//50\mu\text{H}$  coupling impedance with 50ohm termination.

Tabletop device shall be placed on a non-conducting platform, of nominal size 1 m by 1.5 m, raised 80 cm above the reference ground plane. The wall of screened room shall be located 40cm to the rear of the EUT. Other surfaces of tabletop or floor standing EUT shall be at least 80cm from any other ground conducting surface including one or more LISNs. For floor-standing device shall be placed under the EUT with a 12mm insulating material.

Conducted emissions were investigated over the frequency range from 0.15 MHz to 30 MHz using a resolution bandwidth of 9 kHz. The equipment under test (EUT) shall be meet the limits in section 4.1, as applicable, including the average limit and the quasi-peak limit when using respectively, an average detector and quasi-peak detector measured in accordance with the methods described of related standard. When all of peak value were complied with quasi-peak and average limit from 150kHz to 30MHz then quasi-peak and average measurement was unnecessary.


The AMN shall be placed 0,8 m from the boundary of the unit under test and bonded to a ground reference plane for AMNs mounted on top of the ground reference plane. This distance is between the closest points of the AMN and the EUT. All other units of the EUT and associated equipment shall be at least 0,8 m from the AMN. If the mains power cable is longer than 1m then the cable shall be folded back and forth at the centre of the lead to form a bundle no longer than 0.4m. All of interconnecting cables that hang closer than 40cm to the ground plane shall be folded back and forth in the center forming a bundle 30 cm to 40 cm long. All of EUT and AE shall be separate place more than 0.1m. All 50  $\Omega$  ports of the LISN shall be resistively terminated into 50  $\Omega$  loads when not connected to the measuring instrument.

If the reading of the measuring receiver shows fluctuations close to the limit, the reading shall be observed for at least 15 s at each measurement frequency; the higher reading shall be recorded with the exception of any brief isolated high reading which shall be ignored.



### 4.5. Test Result

Standard:	FCC Part 15C	Line:	L1
Test item:	Conducted Emission	Power:	AC 120V/60Hz
Test Mode:	Mode 1	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Description:		Date:	11/16/2016

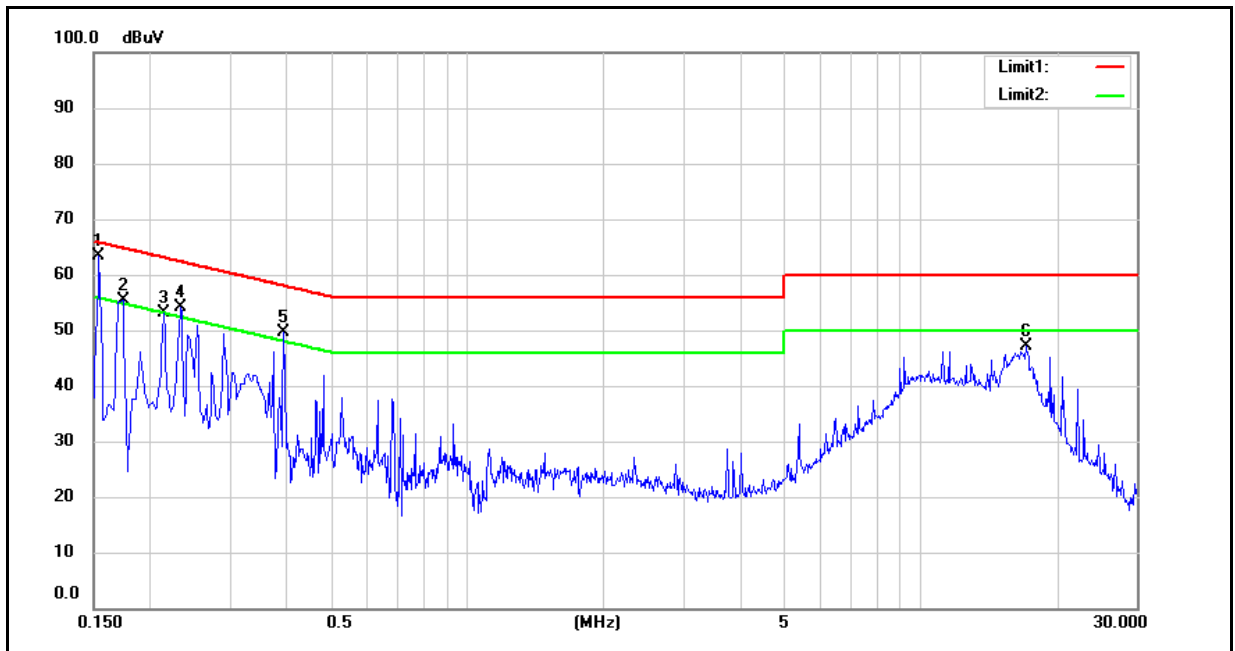

No.	Frequency (MHz)	QP reading (dBuV)	AVG reading (dBuV)	Correction factor (dB)	QP result (dBuV)	AVG result (dBuV)	QP limit (dBuV)	AVG limit (dBuV)	QP margin (dB)	AVG margin (dB)	Remark
1	0.1540	40.26	15.92	9.63	49.89	25.55	65.78	55.78	-15.89	-30.23	Pass
2	0.1740	37.43	9.68	9.64	47.07	19.32	64.77	54.77	-17.70	-35.45	Pass
3	0.2140	35.22	12.74	9.64	44.86	22.38	63.05	53.05	-18.19	-30.67	Pass
4	0.2340	32.45	14.31	9.64	42.09	23.95	62.31	52.31	-20.22	-28.36	Pass
5	0.3940	23.16	7.38	9.65	32.81	17.03	57.98	47.98	-25.17	-30.95	Pass
6	17.1220	29.79	22.31	10.21	40.00	32.52	60.00	50.00	-20.00	-17.48	Pass


Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2. Correction factor (dB) = Cable loss (dB) + L.I.S.N. factor (dB).





Standard:	FCC Part 15C	Line:	N
Test item:	Conducted Emission	Power:	AC 120V/60Hz
Test Mode:	Mode 1	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
		Date:	11/16/2016
Description:			

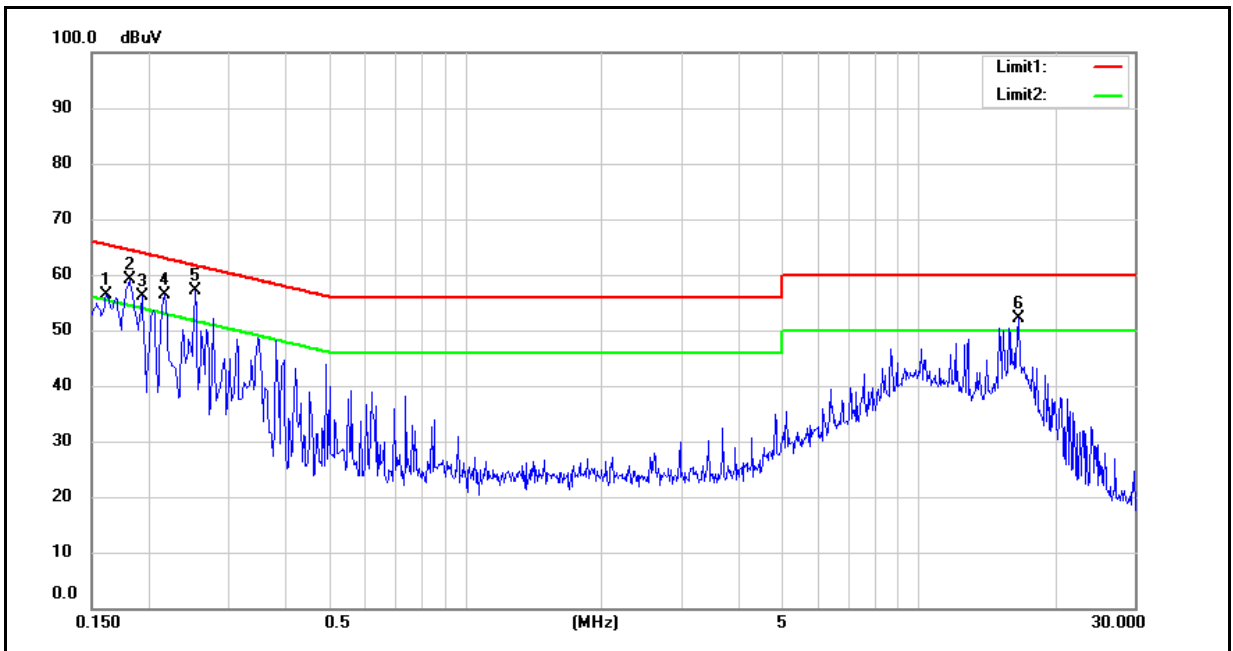

No.	Frequency (MHz)	QP reading (dBuV)	AVG reading (dBuV)	Correction factor (dB)	QP result (dBuV)	AVG result (dBuV)	QP limit (dBuV)	AVG limit (dBuV)	QP margin (dB)	AVG margin (dB)	Remark
1	0.1620	38.63	13.37	9.64	48.27	23.01	65.36	55.36	-17.09	-32.35	Pass
2	0.1820	36.81	9.06	9.64	46.45	18.70	64.39	54.39	-17.94	-35.69	Pass
3	0.1940	36.75	10.73	9.64	46.39	20.37	63.86	53.86	-17.47	-33.49	Pass
4	0.2180	34.27	9.30	9.64	43.91	18.94	62.89	52.89	-18.98	-33.95	Pass
5	0.2540	31.32	9.49	9.65	40.97	19.14	61.63	51.63	-20.66	-32.49	Pass
6	16.6620	27.90	21.36	10.21	38.11	31.57	60.00	50.00	-21.89	-18.43	Pass

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2. Correction factor (dB) = Cable loss (dB) + L.I.S.N. factor (dB).



## 5 Radiated Emission Measurement

### 5.1. Limit

According to §15.209(a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength ( $\mu\text{V}/\text{m}$ at meter)	Measurement Distance (meters)
0.009 – 0.490	2400 / F (kHz)	300
0.490 – 1.705	24000 / F (kHz)	30
1.705 – 30.0	30	30
30 - 88	100**	3
88-216	150**	3
216-960	200**	3
Above 960	500	3

\*\* Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.


### 5.2. Test Instruments

3 Meter Chamber					
Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Cal. Period
RF Pre-selector	Agilent	N9039A	MY46520256	03/22/2016	1 year
Spectrum Analyzer	Agilent	E4446A	MY46180578	03/22/2016	1 year
Pre Amplifier	Agilent	8449B	3008A02237	10/11/2016	1 year
Pre Amplifier	Agilent	8447D	2944A11119	01/11/2016	1 year
Broadband Antenna	Schwarzbeck	VULB9168	416	10/13/2016	1 year
Horn Antenna (1~18GHz)	SCHWARZBECK MESS-ELEKTRONIK	BBHA9120D	9120D-550	06/06/2016	1 year
Horn Antenna (18~40GHz)	ETS	3116	86467	09/05/2016	1 year
Loop Antenna	COM-POWER CORPORATION	AL-130	121014	02/01/2016	1 year
Microwave Cable	EMCI	EMC102-KM-KM-14000	151001	02/23/2016	1 year
Microwave Cable	EMCI	EMC-104-SM-SM-14000	140202	02/23/2016	1 year
Microwave Cable	EMCI	EMC104-SM-SM-600	140301	02/23/2016	1 year
Test Site	ATL	TE01	888001	08/29/2016	1 year


Note: N.C.R. = No Calibration Request.

### 5.3. Setup


9kHz ~ 30MHz

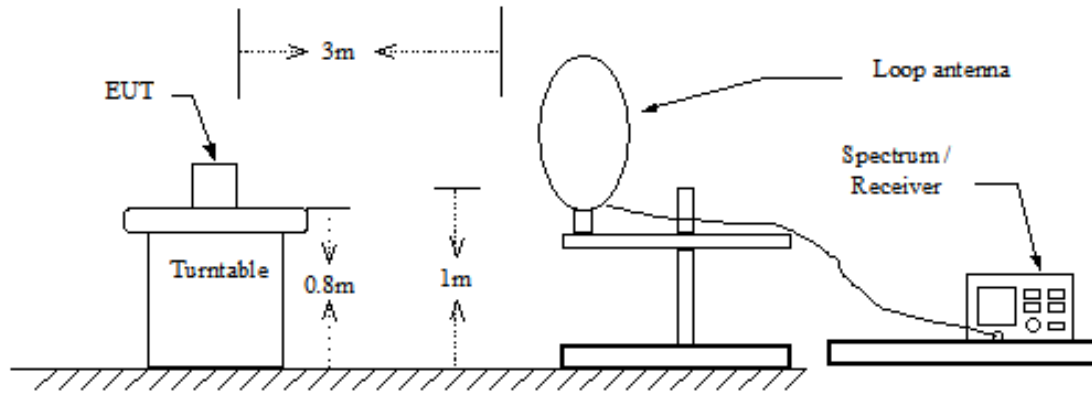

Below 1GHz

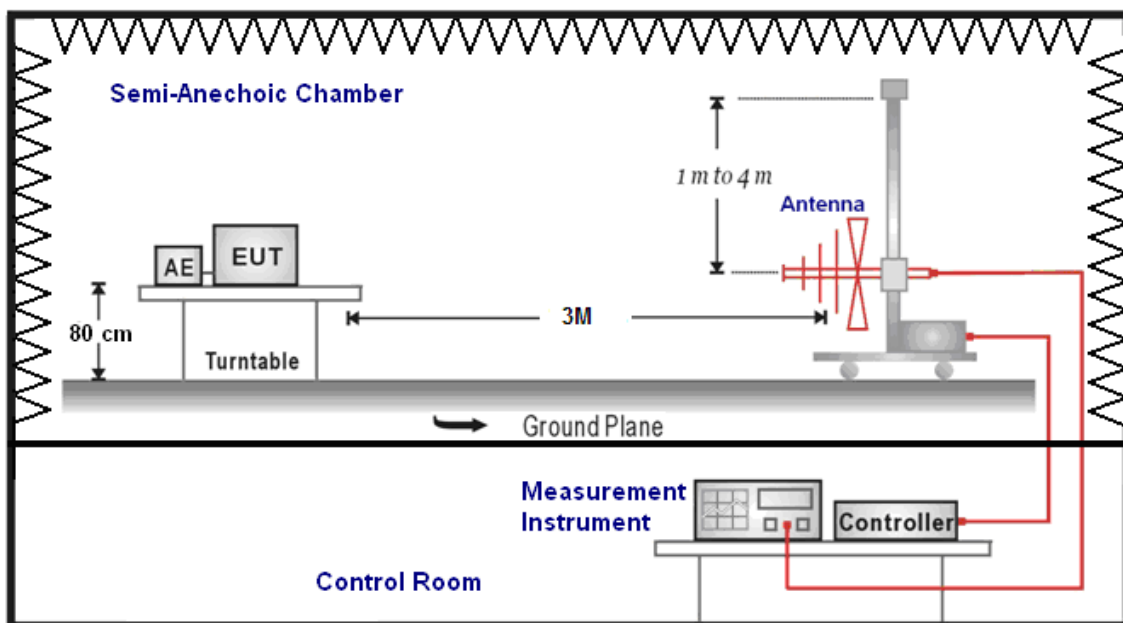

Above 1GHz

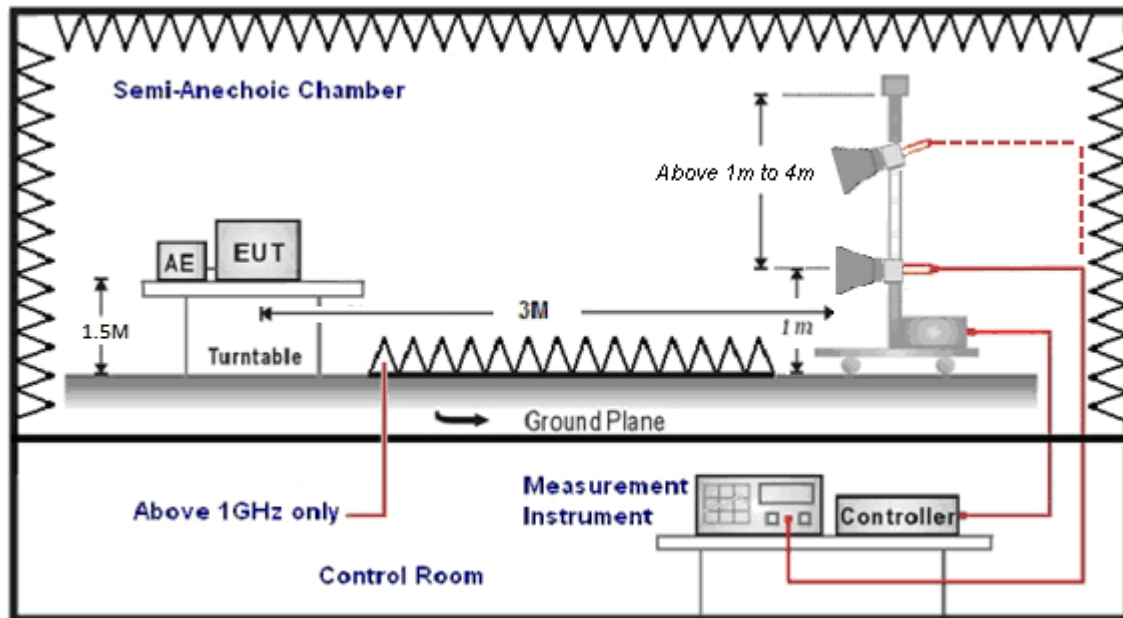

#### 5.4. Test Procedure

Final radiation measurements were made on a three-meter, Semi Anechoic Chamber. The EUT system was placed on a nonconductive turntable which is 0.8 or 1.5 meters height (below 1GHz use 0.8m turntable / above 1GHz use 1.5m turntable), top surface 1.0 x 1.5 meter. The spectrum was examined from 250 MHz to 2.5 GHz in order to cover the whole spectrum below 10th harmonic which could generate from the EUT. During the test, EUT was set to transmit continuously & Measurements spectrum range from 9 kHz to 26.5 GHz is investigated.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, and then the video bandwidth is set to 1 MHz for peak measurements and 10 Hz for average measurements when Duty cycle  $>0.98$  /  $1/T$  for average measurements when Duty cycle  $<0.98$ . A nonconductive material surrounded the EUT to supporting the EUT for standing on three orthogonal planes. At each condition, the EUT was rotated 360 degrees, and the antenna was raised and lowered from one to four meters to find the maximum emission levels. Measurements were taken using both horizontal and vertical antenna polarization.

SCHWARZBECK MESS-ELEKTRONIK Biconilog Antenna at 3 Meter and the SCHWARZBECK Double Ridged Guide Antenna was used in frequencies 1 –26.5 GHz at a distance of 3 meter. The antenna at an angle toward the source of the emission. All test results were extrapolated to equivalent signal at 3 meters utilizing an inverse linear distance extrapolation Factor (20dB/decade).



For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

Appropriate preamplifiers were used for improving sensitivity and precautions were taken to avoid overloading or desensitizing the spectrum analyzer. No post – detector video filters were used in the test.

The spectrum analyzer's 6 dB bandwidth was set to 1 MHz, and the analyzer was operated in the peak detection mode, for frequencies both below and up 1 GHz. The average levels were obtained by subtracting the duty cycle correction factor from the peak readings.

The following procedures were used to convert the emission levels measured in decibels referenced to 1 microvolt (dBuV) into field intensity in micro volts pre meter (uV/m).

The actual field intensity in decibels referenced to 1 microvolt in to field intensity in micro colts per meter (dBuV/m).

The actual field is intensity in referenced to 1 microvolt per meter (dBuV/m) is determined by algebraically adding the measured reading in dBuV, the antenna factor (dB), and cable loss (dB) and Subtracting the gain of preamplifier (dB) is auto calculate in spectrum analyzer.

$$(1) \text{ Amplitude (dBuV/m) = FI (dBuV) +AF (dBuV) +CL (dBuV)-Gain (dB)}$$

FI= Reading of the field intensity.

AF= Antenna factor.

CL= Cable loss.

P.S Amplitude is auto calculate in spectrum analyzer.

$$(2) \text{ Actual Amplitude (dBuV/m) = Amplitude (dBuV)-Dis(dB)}$$

The FCC specified emission limits were calculated according the EUT operating frequency and by following linear interpolation equations:

(a) For fundamental frequency : Transmitter Output < +30dBm

(b) For spurious frequency : Spurious emission limits = fundamental emission limit /10

Data of measurement within this frequency range without mark in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.



### 5.5. Test Result

#### Below 1GHz

Standard:		FCC Part 15.247		Test Distance:		3m	
Test item:		Harmonic		Power:		AC 120V/60Hz	
Test Mode:		Mode 1		Temp.(°C)/Hum.(%RH):		26(°C)/60%RH	
				Date:		12/12/2016	
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
196.5000	43.76	-7.67	36.09	43.50	-7.41	QP	H
270.5000	38.25	-4.43	33.82	46.00	-12.18	QP	H
319.5000	39.47	-3.10	36.37	46.00	-9.63	QP	H
480.5000	26.44	0.39	26.83	46.00	-19.17	QP	H
649.5000	26.24	3.89	30.13	46.00	-15.87	QP	H
859.0000	25.56	7.74	33.30	46.00	-12.70	QP	H
196.5000	35.33	-7.67	27.66	43.50	-15.84	QP	V
270.5000	29.40	-4.43	24.97	46.00	-21.03	QP	V
341.0000	26.39	-2.80	23.59	46.00	-22.41	QP	V
515.5000	27.38	0.97	28.35	46.00	-17.65	QP	V
716.0000	25.54	5.09	30.63	46.00	-15.37	QP	V
877.5000	24.56	8.12	32.68	46.00	-13.32	QP	V

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).


2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.No emission found between lowest internal used/generated frequencies to 30MHz (9 kHz~30MHz).



**Above 1GHz**

Standard:	FCC Part 15.247	Test Distance:	3m
Test item:	Harmonic	Power:	AC 120V/60Hz
Frequency:	2412MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 2	Date:	12/09/2016
Ant.Polar.:	Horizontal		

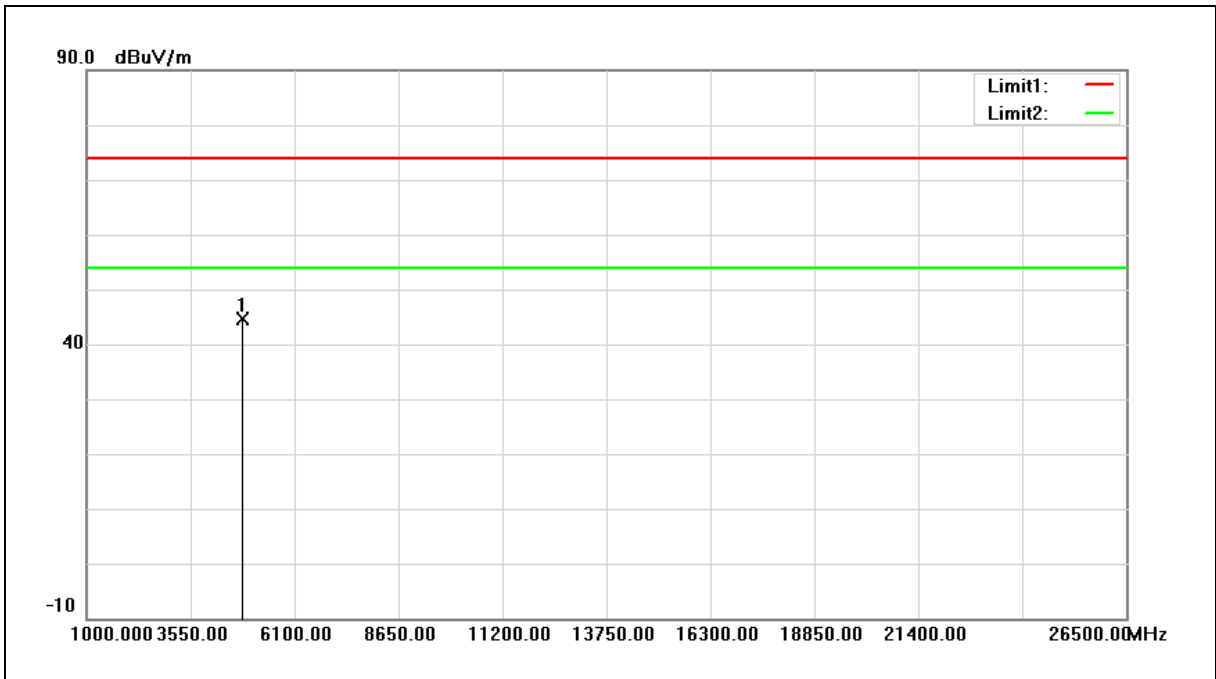


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4824.000	52.66	-7.96	44.70	74.00	-29.30	peak

- Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).  
 2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).  
 3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.247	Test Distance:	3m
Test item:	Harmonic	Power:	AC 120V/60Hz
Frequency:	2412MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 2	Date:	12/09/2016
Ant.Polar.:	Vertical		

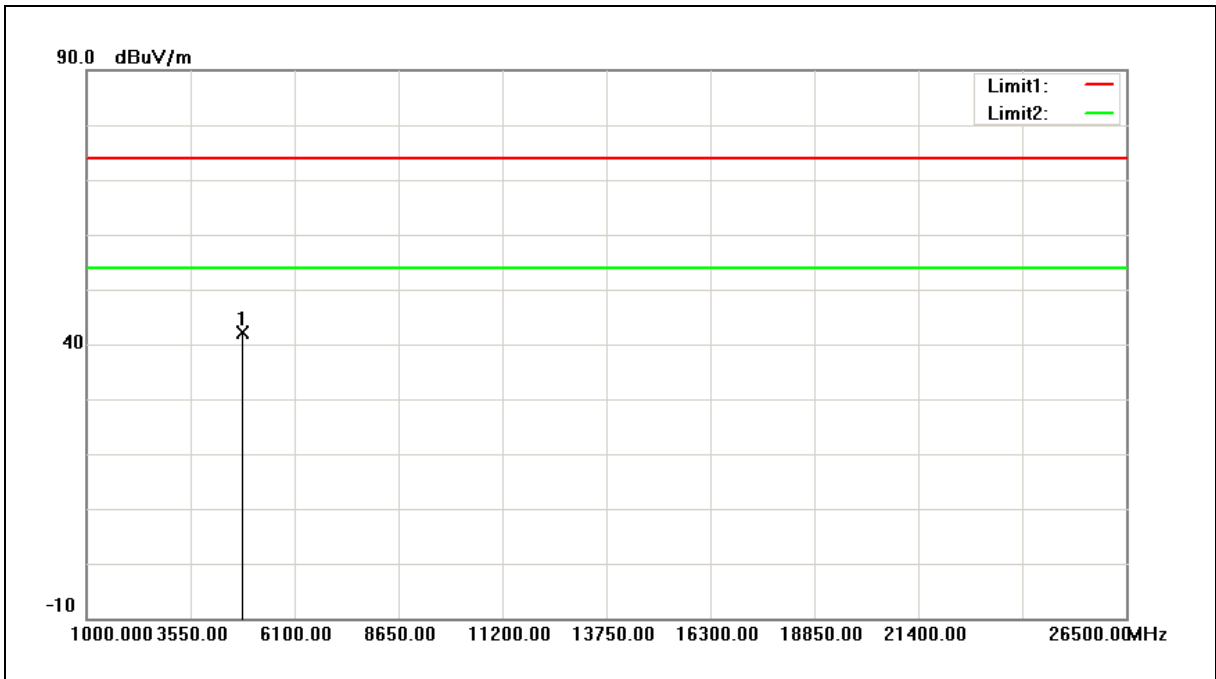

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4824.000	50.09	-7.96	42.13	74.00	-31.87	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).


2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.





Standard:	FCC Part 15.247	Test Distance:	3m
Test item:	Harmonic	Power:	AC 120V/60Hz
Frequency:	2437MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 2	Date:	12/09/2016
Ant.Polar.:	Horizontal		

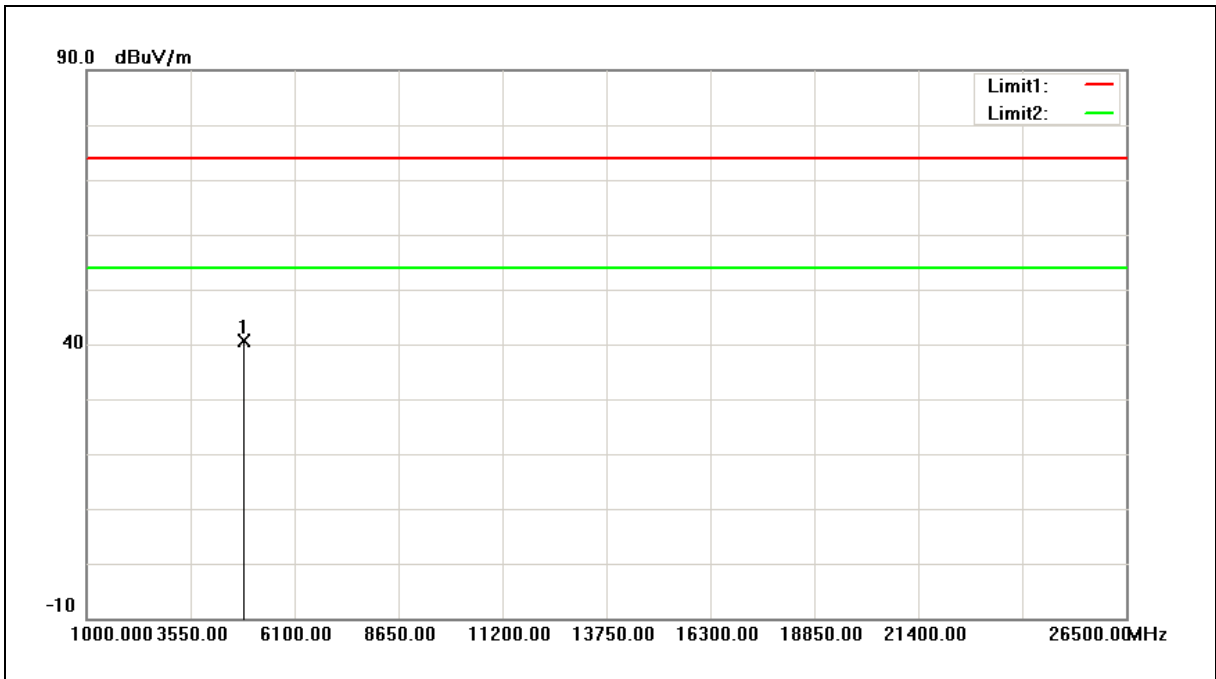

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4874.000	48.36	-7.80	40.56	74.00	-33.44	peak


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.247	Test Distance:	3m
Test item:	Harmonic	Power:	AC 120V/60Hz
Frequency:	2437MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 2	Date:	12/09/2016
Ant.Polar.:	Vertical		

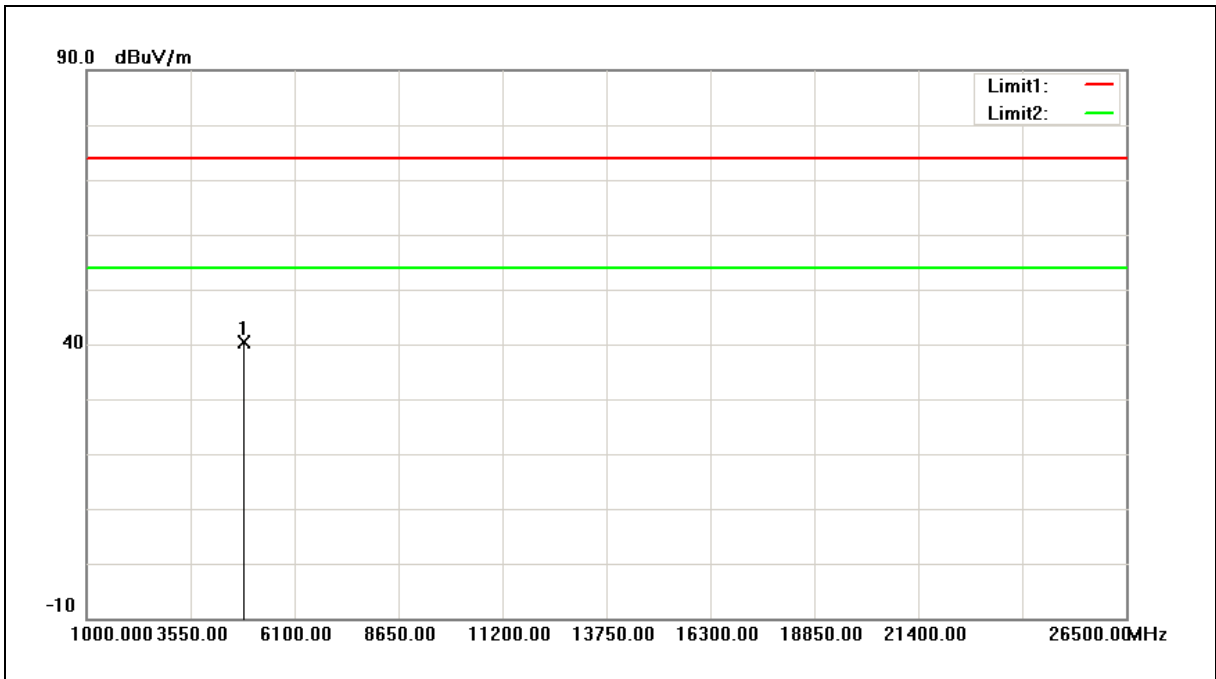

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4874.000	48.21	-7.80	40.41	74.00	-33.59	peak


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.247	Test Distance:	3m
Test item:	Harmonic	Power:	AC 120V/60Hz
Frequency:	2462MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 2	Date:	12/09/2016
Ant.Polar.:	Horizontal		

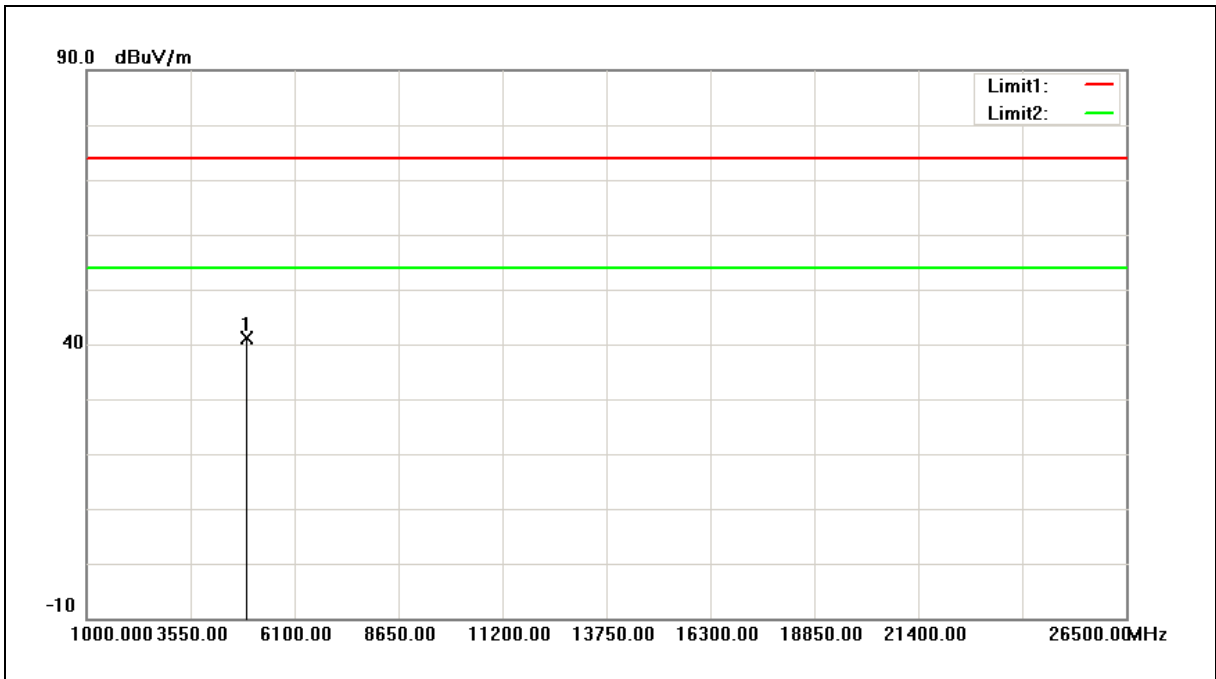

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4924.000	48.78	-7.65	41.13	74.00	-32.87	peak


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.247	Test Distance:	3m
Test item:	Harmonic	Power:	AC 120V/60Hz
Frequency:	2462MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 2	Date:	12/09/2016
Ant.Polar.:	Vertical		

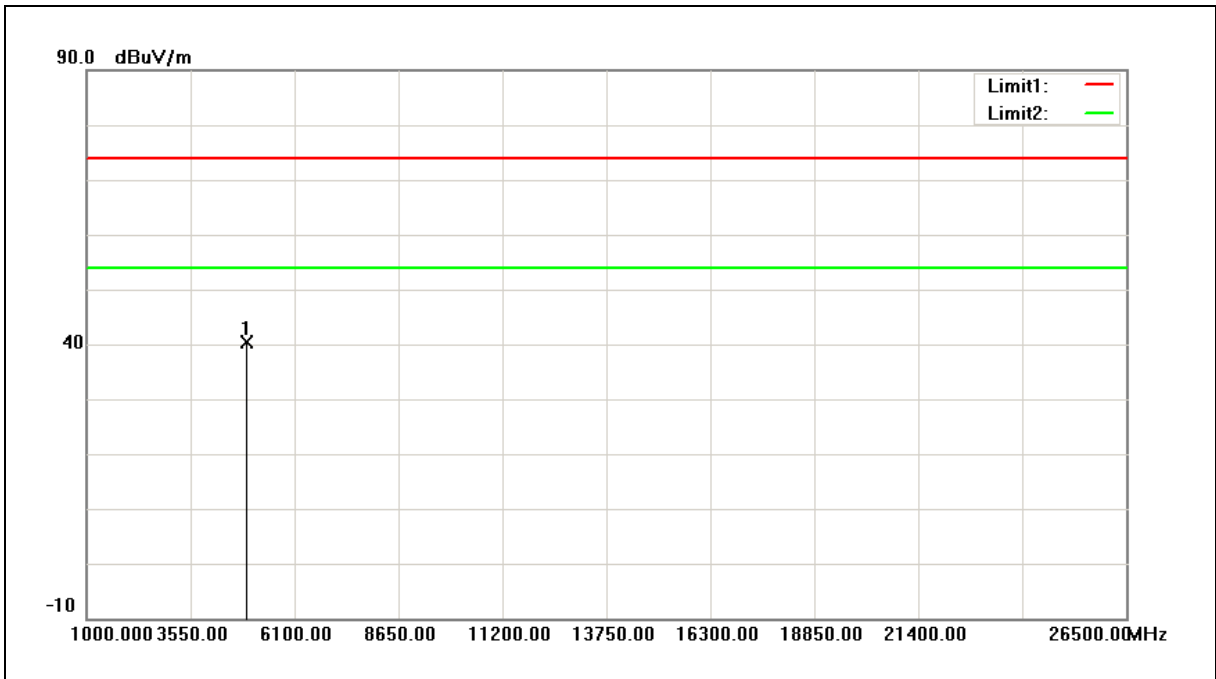


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4924.000	48.13	-7.65	40.48	74.00	-33.52	peak

- Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).  
 2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).  
 3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.247	Test Distance:	3m
Test item:	Harmonic	Power:	AC 120V/60Hz
Frequency:	2412MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 3	Date:	12/09/2016
Ant.Polar.:	Horizontal		

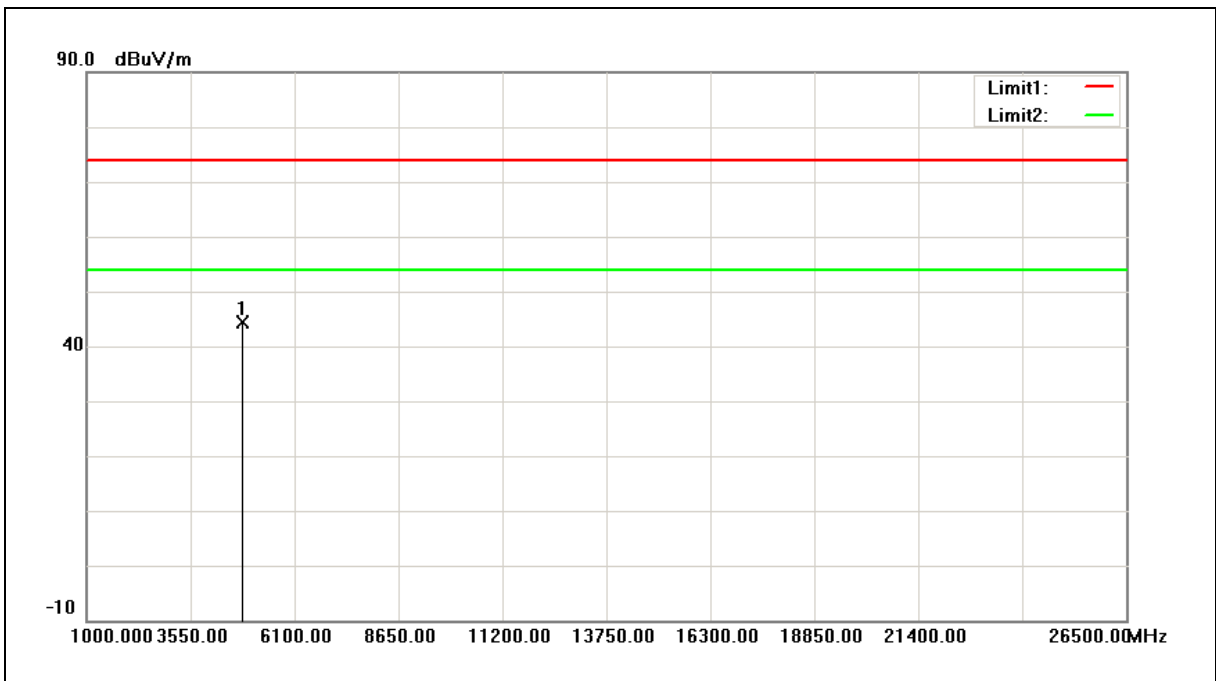

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4824.000	52.34	-7.96	44.38	74.00	-29.62	peak


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.247	Test Distance:	3m
Test item:	Harmonic	Power:	AC 120V/60Hz
Frequency:	2412MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60%RH
Mode:	Mode 3	Date:	12/09/2016
Ant.Polar.:	Vertical		

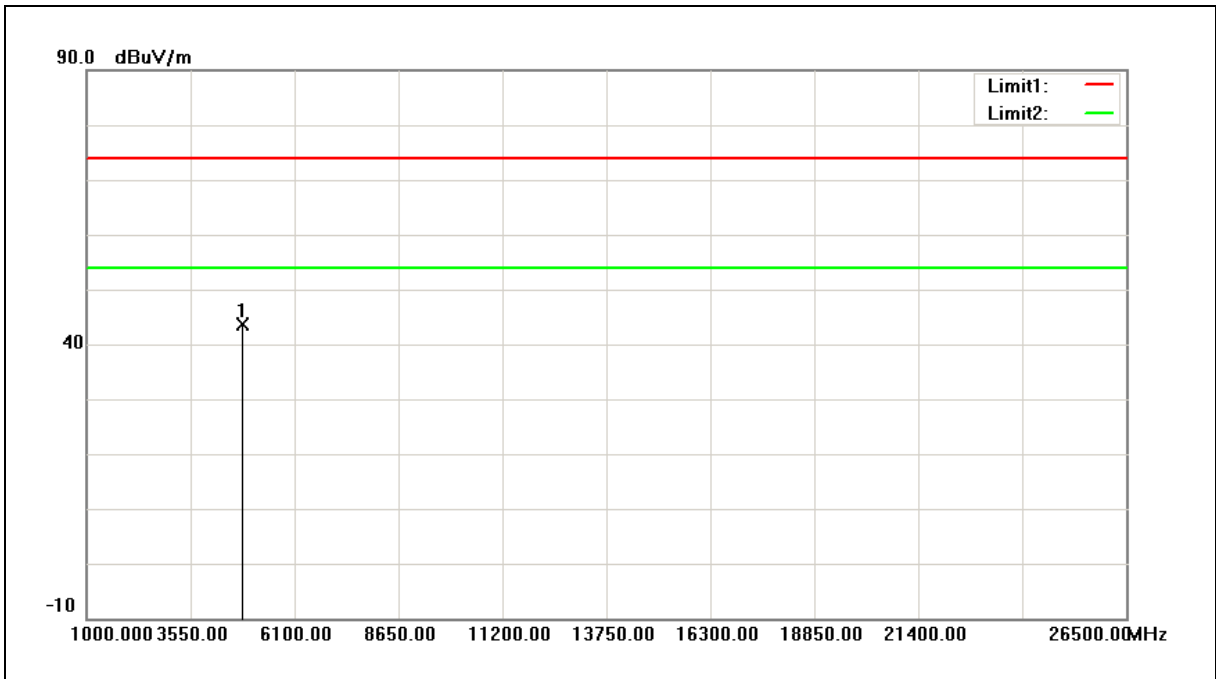

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4824.000	51.51	-7.96	43.55	74.00	-30.45	peak


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.247	Test Distance:	3m
Test item:	Harmonic	Power:	AC 120V/60Hz
Frequency:	2437MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 3	Date:	12/09/2016
Ant.Polar.:	Horizontal		

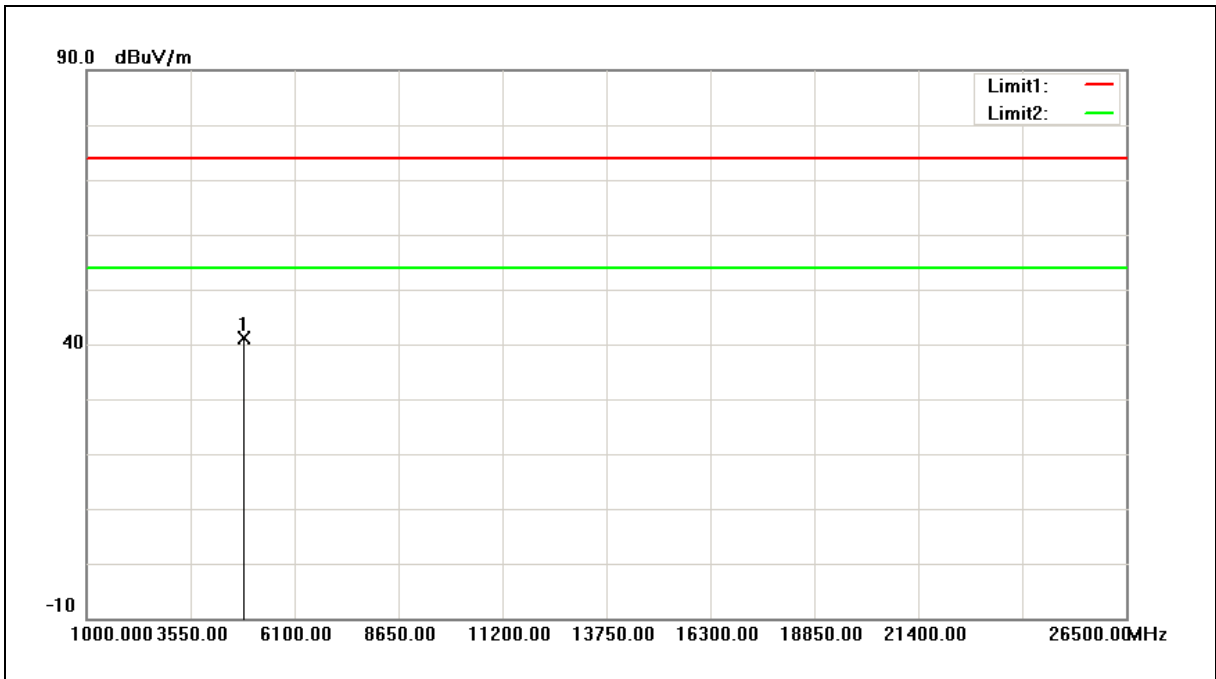

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4874.000	48.97	-7.80	41.17	74.00	-32.83	peak


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.247	Test Distance:	3m
Test item:	Harmonic	Power:	AC 120V/60Hz
Frequency:	2437MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 3	Date:	12/09/2016
Ant.Polar.:	Vertical		

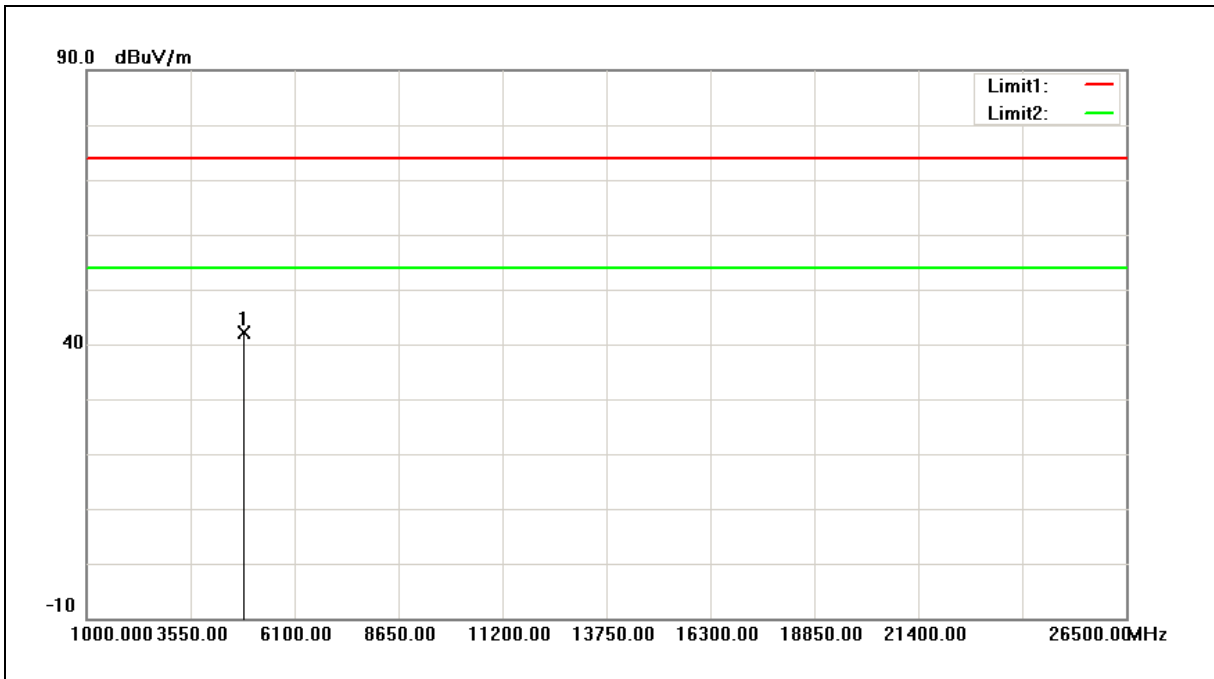

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4874.000	49.93	-7.80	42.13	74.00	-31.87	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).


2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.





Standard:	FCC Part 15.247	Test Distance:	3m
Test item:	Harmonic	Power:	AC 120V/60Hz
Frequency:	2462MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 3	Date:	12/09/2016
Ant.Polar.:	Horizontal		

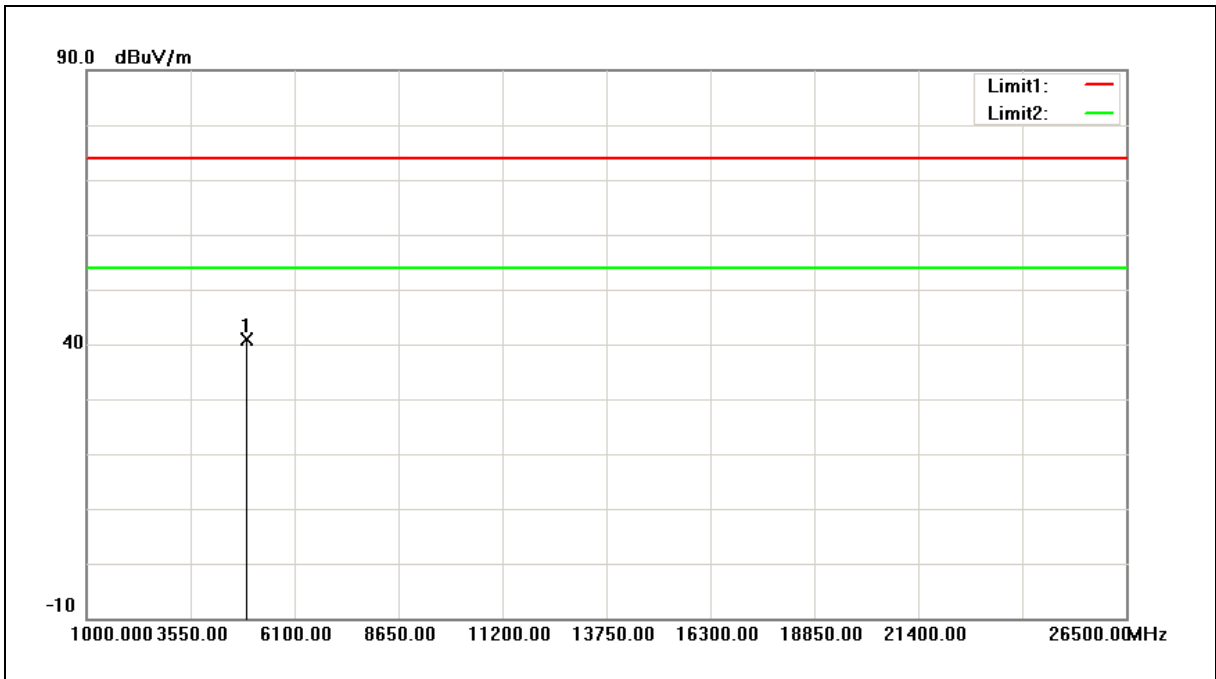

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4924.000	48.63	-7.65	40.98	74.00	-33.02	peak


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.247	Test Distance:	3m
Test item:	Harmonic	Power:	AC 120V/60Hz
Frequency:	2462MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 3	Date:	12/09/2016
Ant.Polar.:	Vertical		

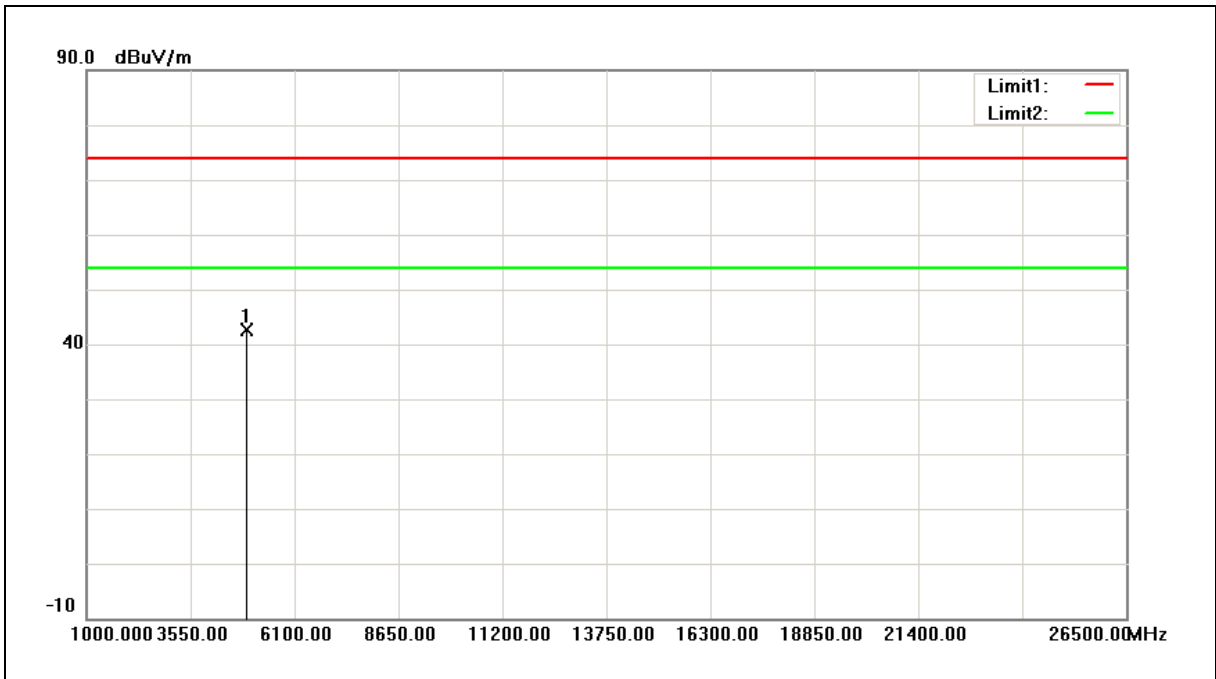

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4924.000	50.20	-7.65	42.55	74.00	-31.45	peak


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.247	Test Distance:	3m
Test item:	Harmonic	Power:	AC 120V/60Hz
Frequency:	2412MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60%RH
Mode:	Mode 4	Date:	12/09/2016
Ant.Polar.:	Horizontal		

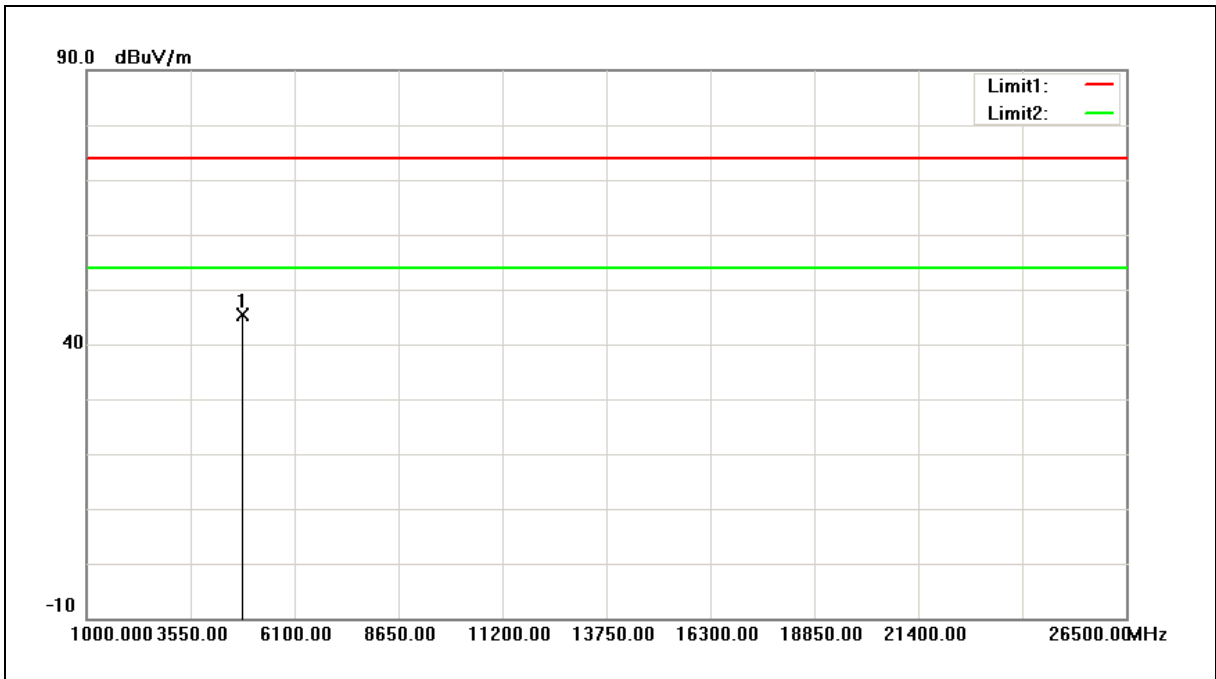

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4824.000	53.28	-7.96	45.32	74.00	-28.68	peak


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.247	Test Distance:	3m
Test item:	Harmonic	Power:	AC 120V/60Hz
Frequency:	2412MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 4	Date:	12/09/2016
Ant.Polar.:	Vertical		

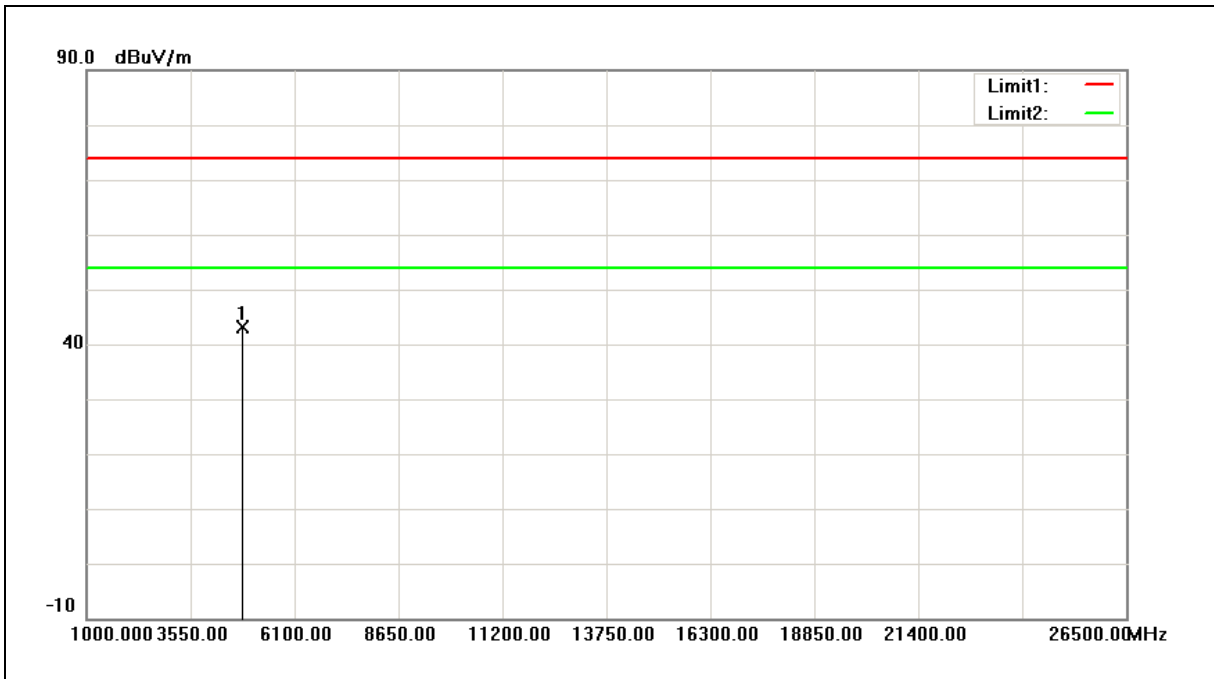

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4824.000	51.16	-7.96	43.20	74.00	-30.80	peak


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.247	Test Distance:	3m
Test item:	Harmonic	Power:	AC 120V/60Hz
Frequency:	2437MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 4	Date:	12/09/2016
Ant.Polar.:	Horizontal		

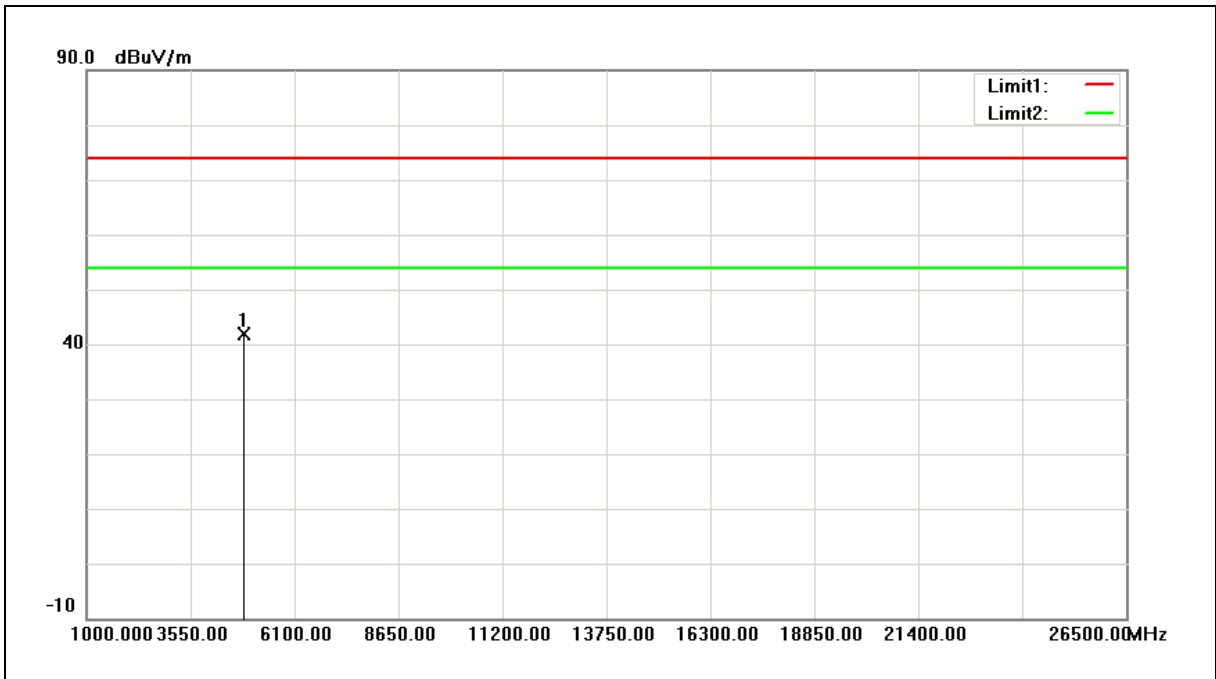


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4874.000	49.59	-7.80	41.79	74.00	-32.21	peak

- Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).
- 2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).
3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.247	Test Distance:	3m
Test item:	Harmonic	Power:	AC 120V/60Hz
Frequency:	2437MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 4	Date:	12/09/2016
Ant.Polar.:	Vertical		

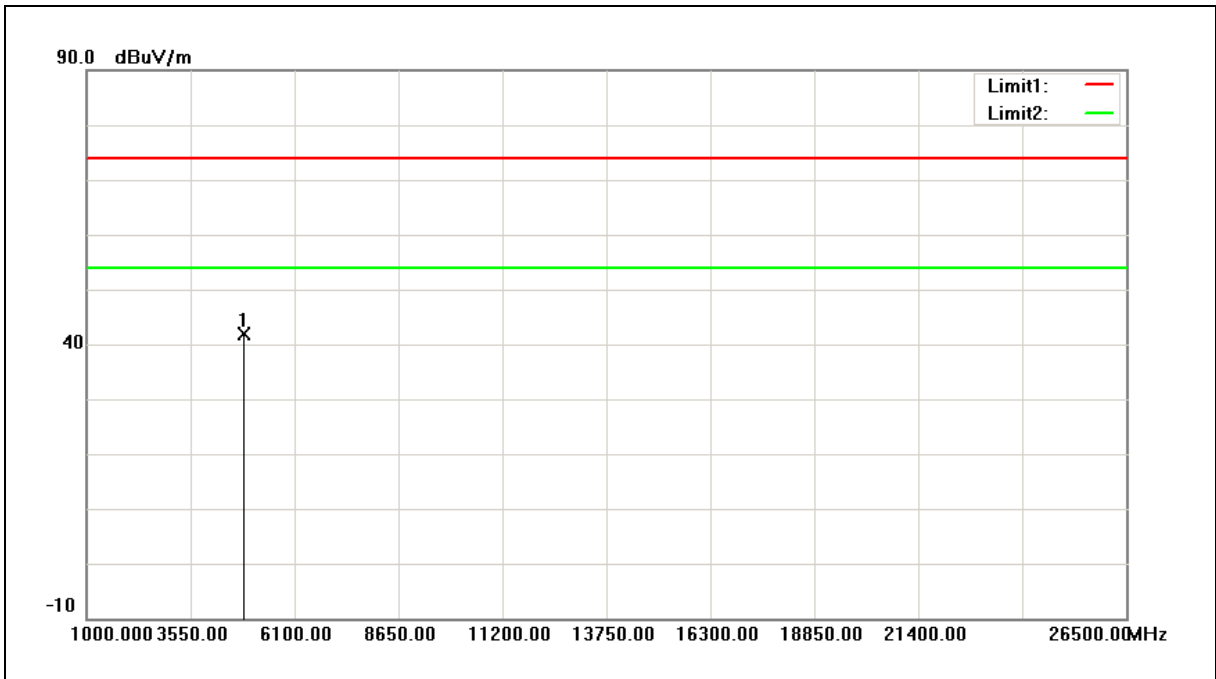

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4874.000	49.76	-7.80	41.96	74.00	-32.04	peak


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.247	Test Distance:	3m
Test item:	Harmonic	Power:	AC 120V/60Hz
Frequency:	2462MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 4	Date:	12/09/2016
Ant.Polar.:	Horizontal		

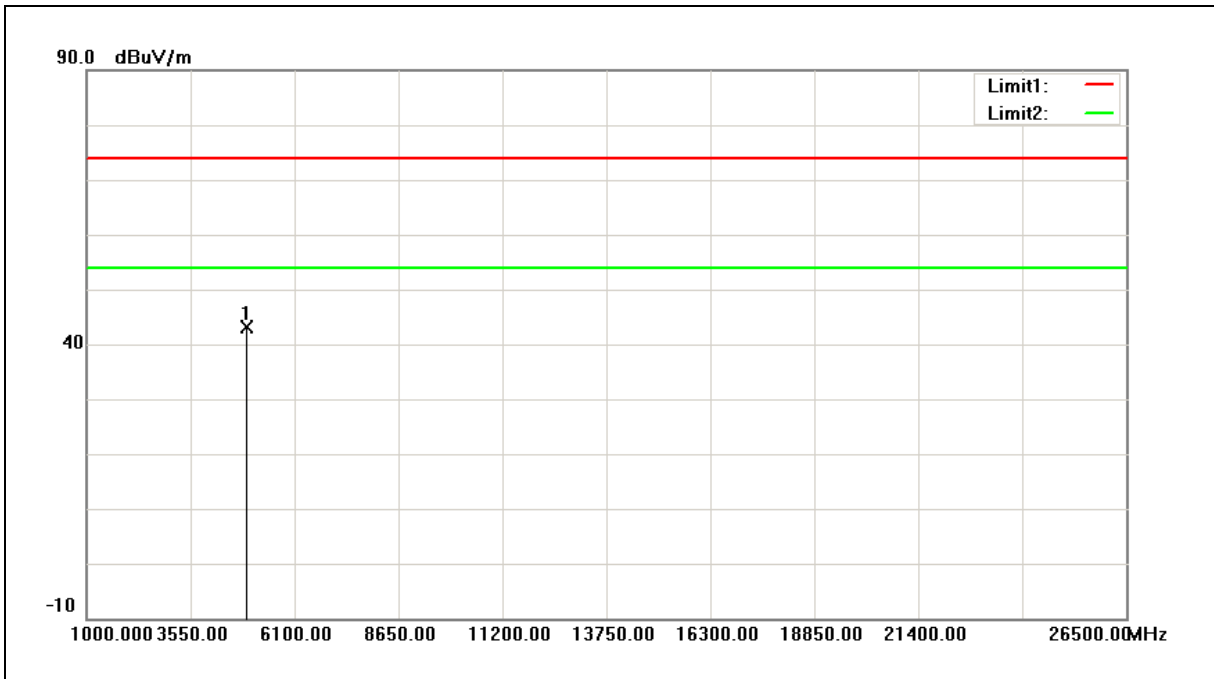

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4924.000	50.70	-7.65	43.05	74.00	-30.95	peak


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.247	Test Distance:	3m
Test item:	Harmonic	Power:	AC 120V/60Hz
Frequency:	2462MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 4	Date:	12/09/2016
Ant.Polar.:	Vertical		

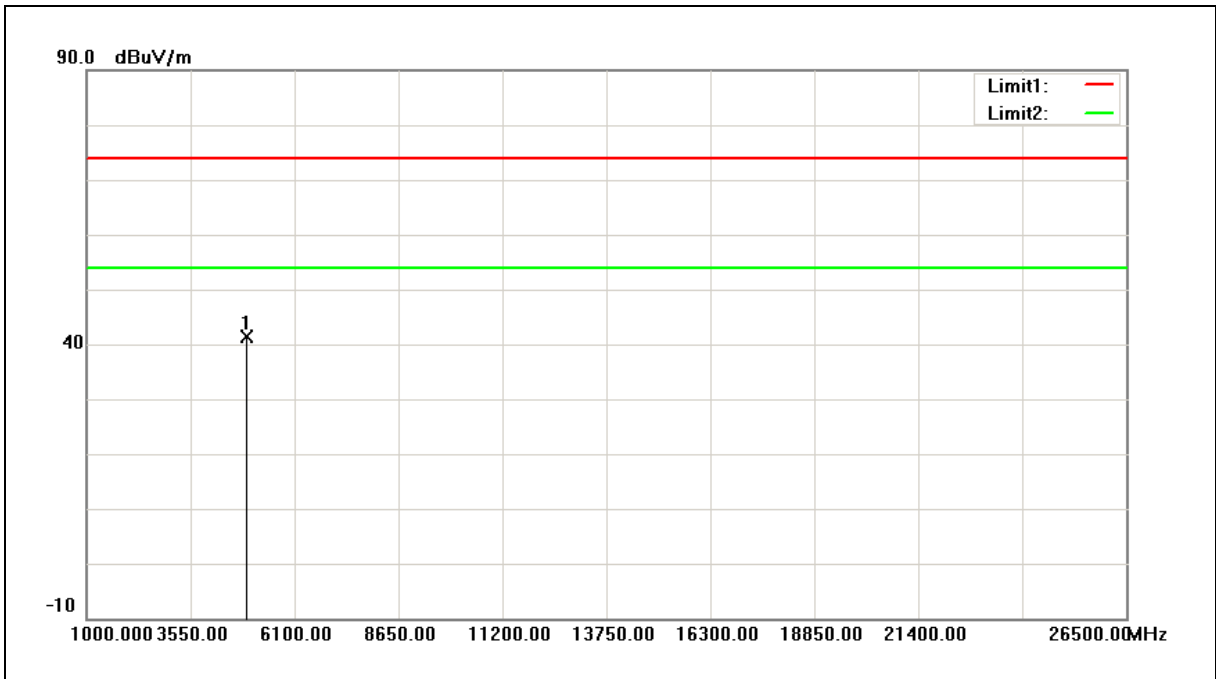

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4924.000	49.08	-7.65	41.43	74.00	-32.57	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).


3. When the peak results are less than average limit, so not need to evaluate the average.





**Band Edge**

Standard:	FCC Part 15.247	Test Distance:	3m
Test item:	Band edge	Power:	AC 120V/60Hz
Frequency:	2412MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 2	Date:	12/09/2016
Ant.Polar.:	Horizontal		

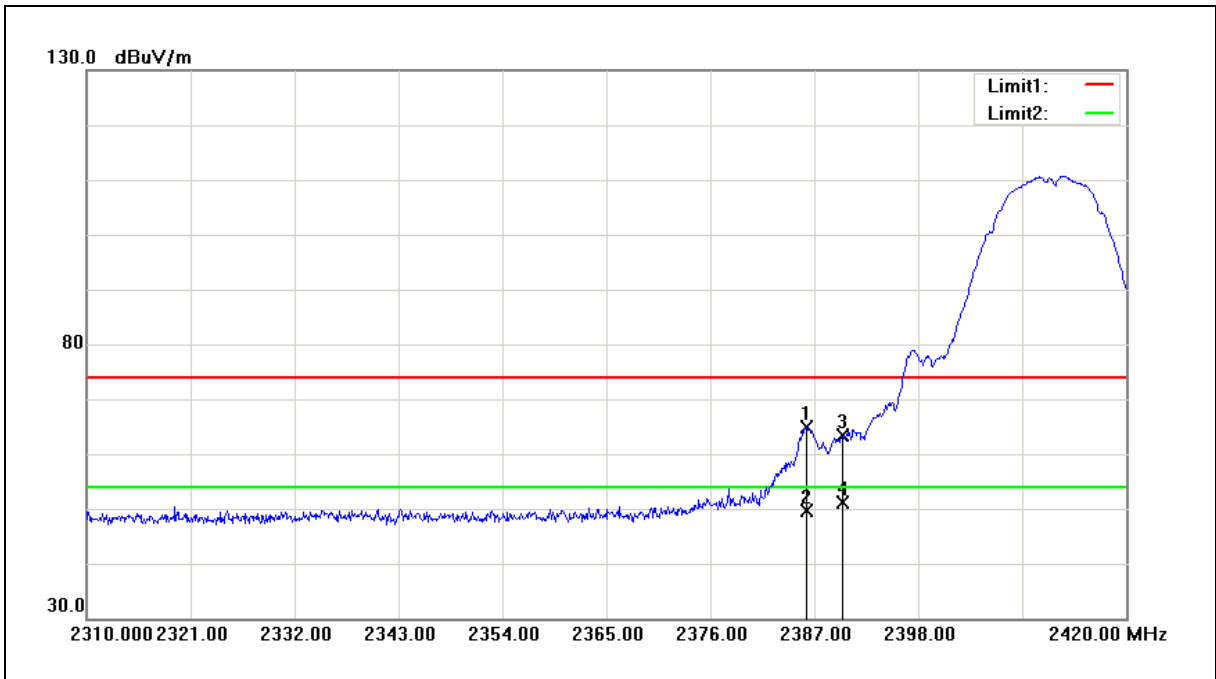


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2386.230	65.27	-0.28	64.99	74.00	-9.01	peak
2	2386.230	49.81	-0.28	49.53	54.00	-4.47	AVG
3	2390.000	63.72	-0.26	63.46	74.00	-10.54	peak
4	2390.000	51.33	-0.26	51.07	54.00	-2.93	AVG

- Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).
- 2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).
3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.247	Test Distance:	3m
Test item:	Band edge	Power:	AC 120V/60Hz
Frequency:	2412MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 2	Date:	12/09/2016
Ant.Polar.:	Vertical		

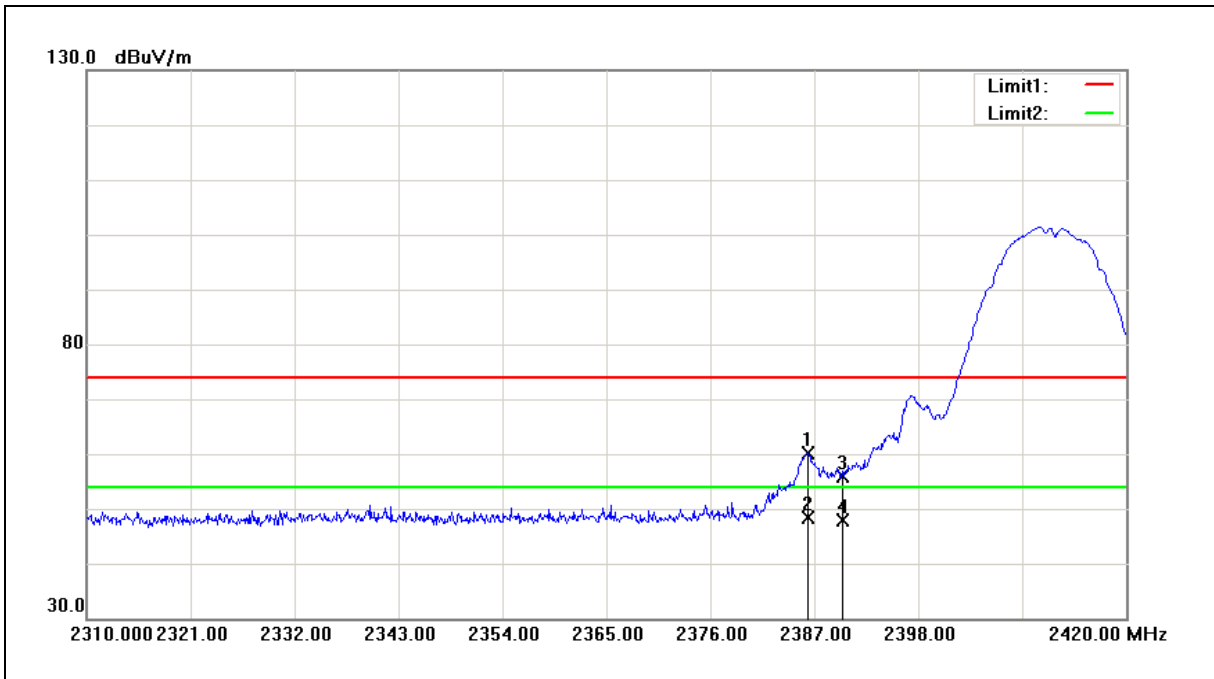

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2386.340	60.33	-0.28	60.05	74.00	-13.95	peak
2	2386.340	48.55	-0.28	48.27	54.00	-5.73	AVG
3	2390.000	56.14	-0.26	55.88	74.00	-18.12	peak
4	2390.000	48.19	-0.26	47.93	54.00	-6.07	AVG


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.247	Test Distance:	3m
Test item:	Band edge	Power:	AC 120V/60Hz
Frequency:	2462MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 2	Date:	12/09/2016
Ant.Polar.:	Horizontal		

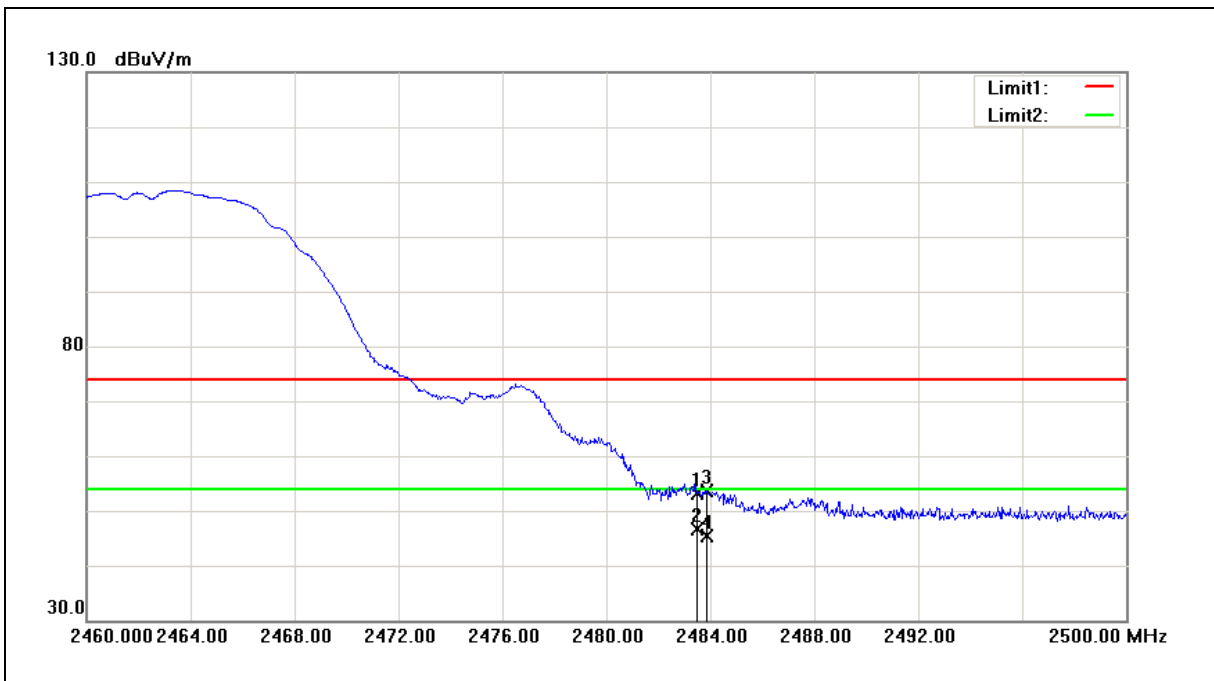


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	53.14	0.11	53.25	74.00	-20.75	peak
2	2483.500	46.63	0.11	46.74	54.00	-7.26	AVG
3	2483.840	53.45	0.11	53.56	74.00	-20.44	peak
4	2483.840	45.17	0.11	45.28	54.00	-8.72	AVG

- Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).
- 2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).
3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.247	Test Distance:	3m
Test item:	Band edge	Power:	AC 120V/60Hz
Frequency:	2462MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60%RH
Mode:	Mode 2	Date:	12/09/2016
Ant.Polar.:	Vertical		

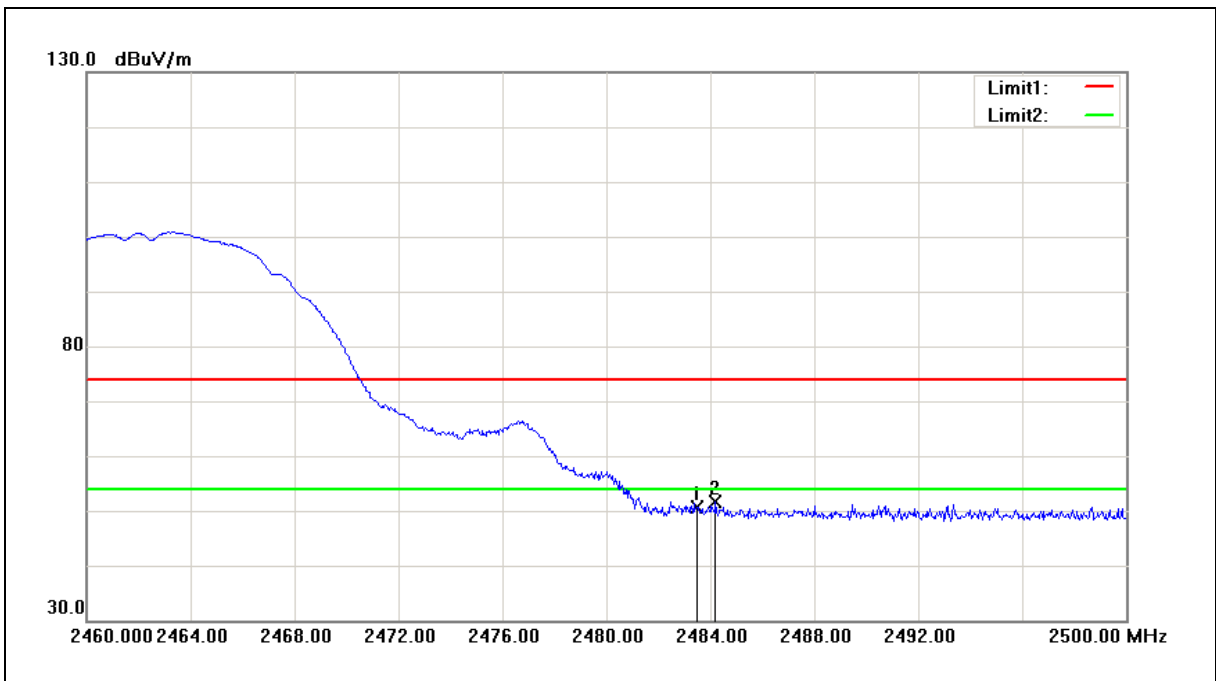

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	50.60	0.11	50.71	74.00	-23.29	peak
2	2484.200	51.52	0.12	51.64	74.00	-22.36	peak


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.247	Test Distance:	3m
Test item:	Band edge	Power:	AC 120V/60Hz
Frequency:	2412MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 3	Date:	12/09/2016
Ant.Polar.:	Horizontal		

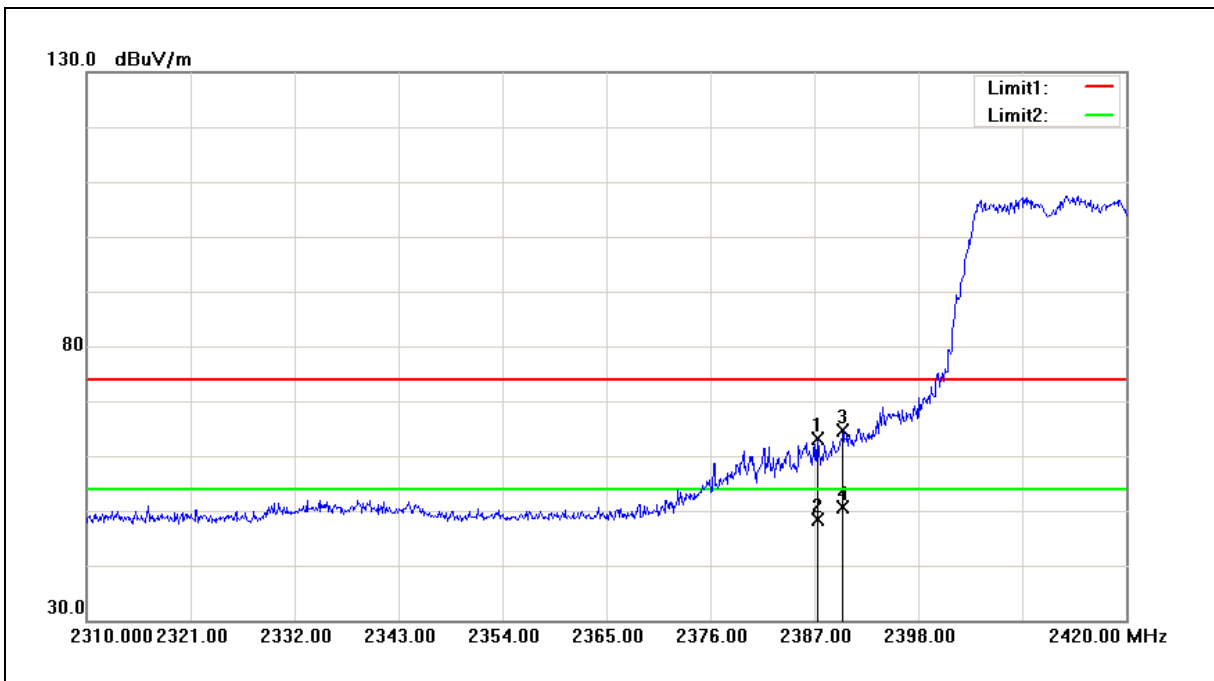


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2387.330	63.36	-0.27	63.09	74.00	-10.91	peak
2	2387.330	48.66	-0.27	48.39	54.00	-5.61	AVG
3	2390.000	64.92	-0.26	64.66	74.00	-9.34	peak
4	2390.000	50.81	-0.26	50.55	54.00	-3.45	AVG

- Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).  
 2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).  
 3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.247	Test Distance:	3m
Test item:	Band edge	Power:	AC 120V/60Hz
Frequency:	2412MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 3	Date:	12/09/2016
Ant.Polar.:	Vertical		

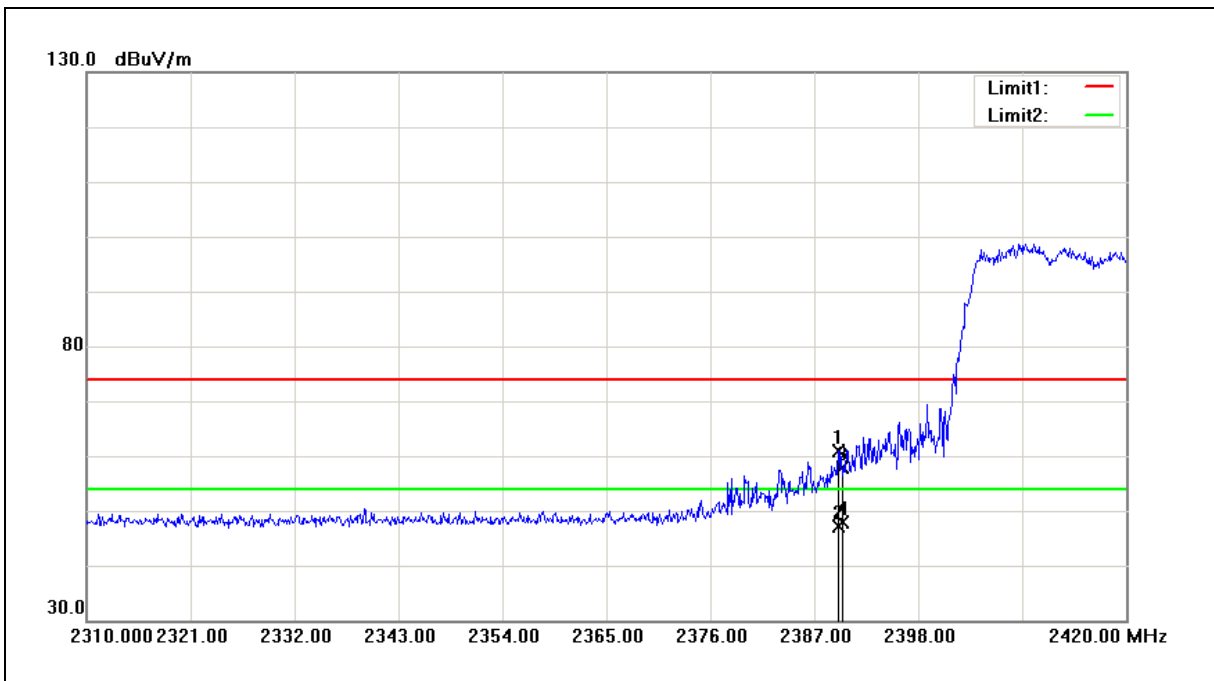

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2389.530	61.21	-0.26	60.95	74.00	-13.05	peak
2	2389.530	47.48	-0.26	47.22	54.00	-6.78	AVG
3	2390.000	58.26	-0.26	58.00	74.00	-16.00	peak
4	2390.000	48.04	-0.26	47.78	54.00	-6.22	AVG


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.247	Test Distance:	3m
Test item:	Band edge	Power:	AC 120V/60Hz
Frequency:	2462MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 3	Date:	12/09/2016
Ant.Polar.:	Horizontal		

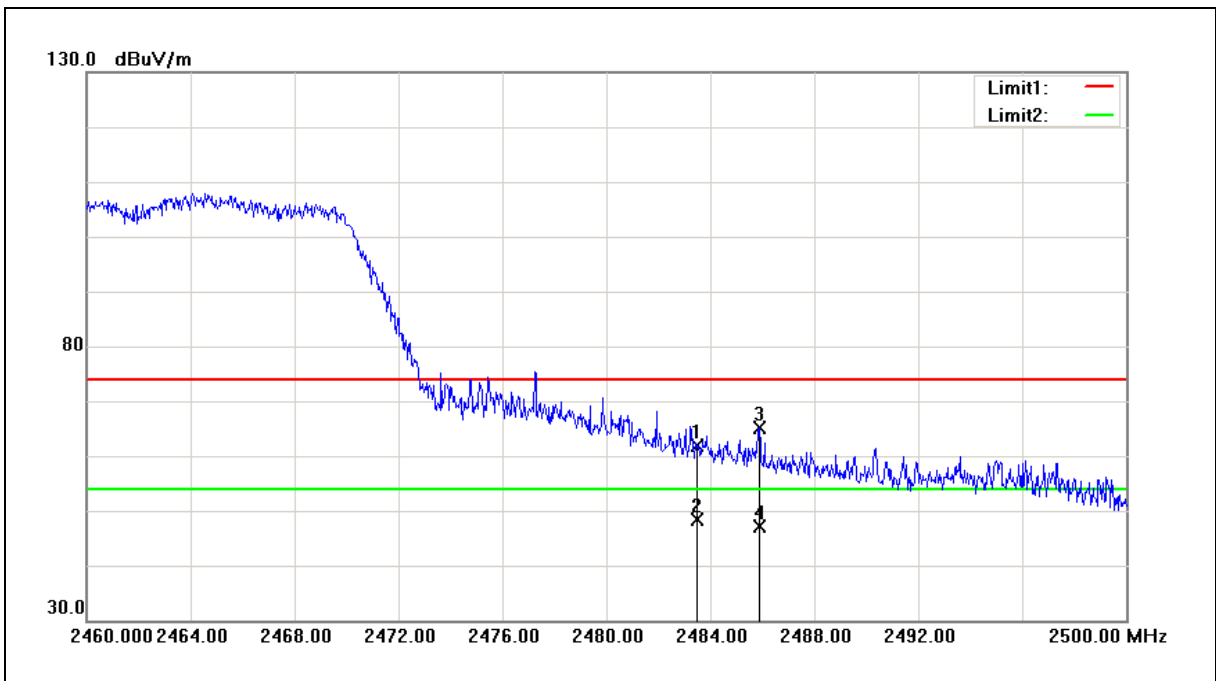


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	61.85	0.11	61.96	74.00	-12.04	peak
2	2483.500	48.34	0.11	48.45	54.00	-5.55	AVG
3	2485.880	65.05	0.12	65.17	74.00	-8.83	peak
4	2485.880	47.12	0.12	47.24	54.00	-6.76	AVG

- Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).
- 2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).
3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.247	Test Distance:	3m
Test item:	Band edge	Power:	AC 120V/60Hz
Frequency:	2462MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 3	Date:	12/09/2016
Ant.Polar.:	Vertical		

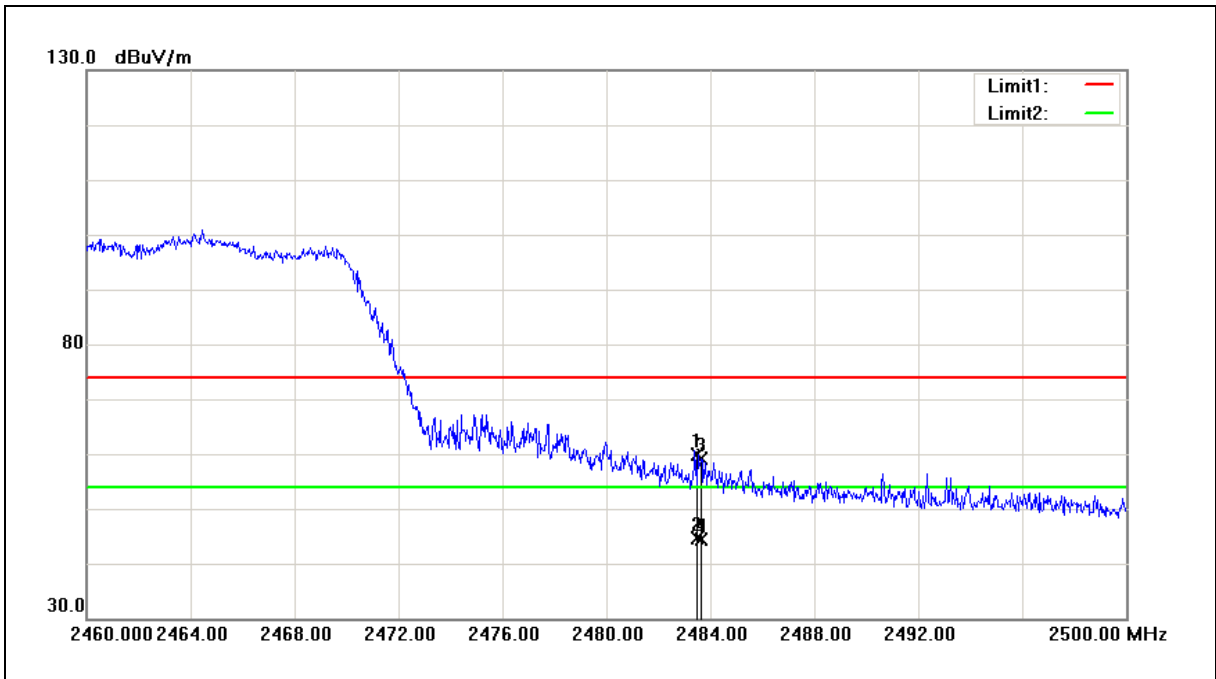


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	59.68	0.11	59.79	74.00	-14.21	peak
2	2483.500	44.41	0.11	44.52	54.00	-9.48	AVG
3	2483.640	58.91	0.11	59.02	74.00	-14.98	peak
4	2483.640	44.36	0.11	44.47	54.00	-9.53	AVG

- Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).
- 2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).
3. When the peak results are less than average limit, so not need to evaluate the average.





Standard:	FCC Part 15.247	Test Distance:	3m
Test item:	Band edge	Power:	AC 120V/60Hz
Frequency:	2412MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 4	Date:	12/09/2016
Ant.Polar.:	Horizontal		

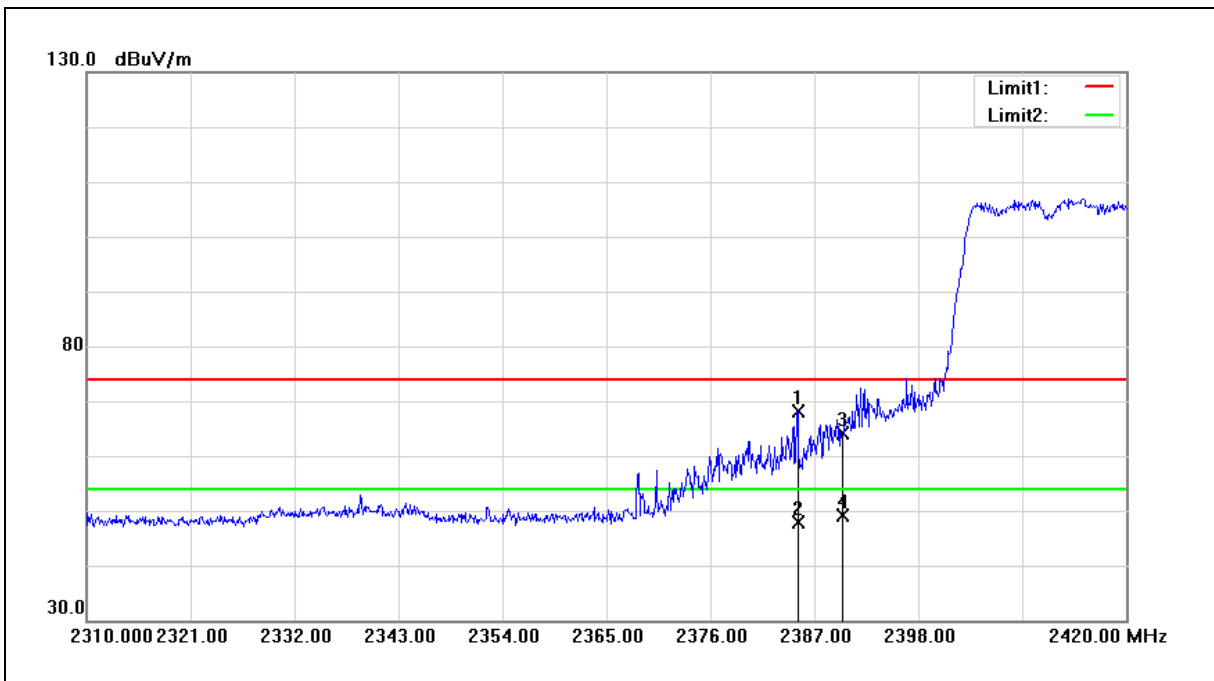

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2385.240	68.36	-0.28	68.08	74.00	-5.92	peak
2	2385.240	48.18	-0.28	47.90	54.00	-6.10	AVG
3	2390.000	64.29	-0.26	64.03	74.00	-9.97	peak
4	2390.000	49.42	-0.26	49.16	54.00	-4.84	AVG


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.247	Test Distance:	3m
Test item:	Band edge	Power:	AC 120V/60Hz
Frequency:	2412MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 4	Date:	12/09/2016
Ant.Polar.:	Vertical		

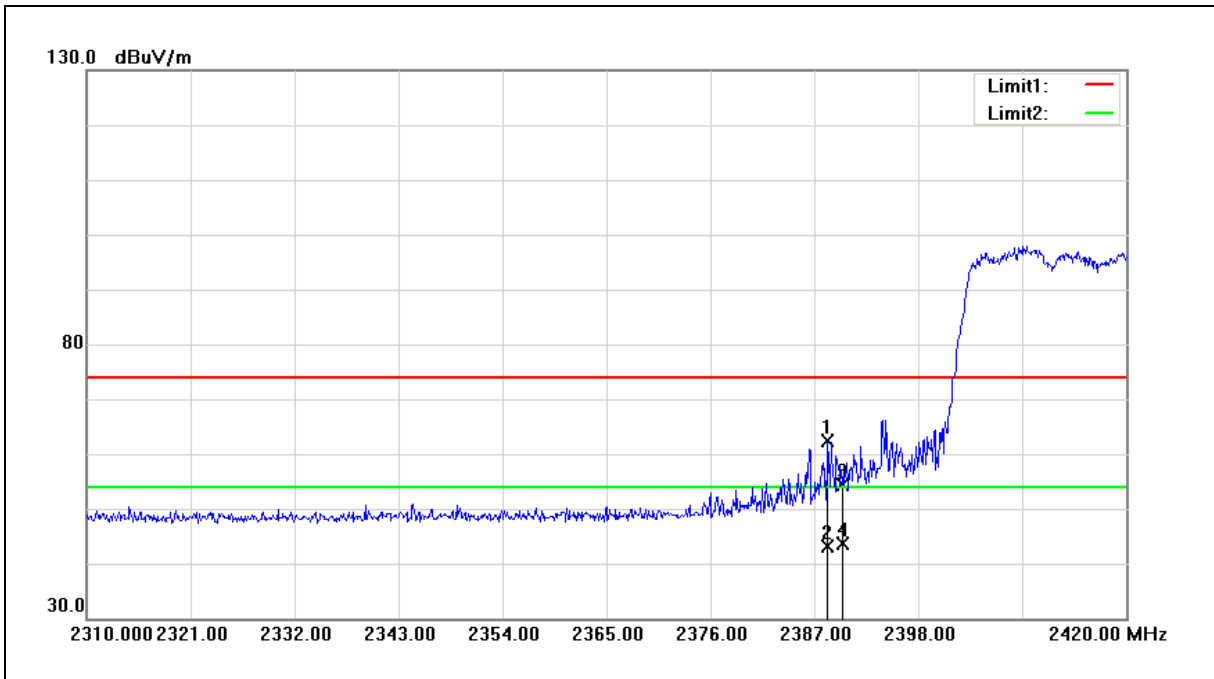

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2388.430	62.65	-0.26	62.39	74.00	-11.61	peak
2	2388.430	43.50	-0.26	43.24	54.00	-10.76	AVG
3	2390.000	54.60	-0.26	54.34	74.00	-19.66	peak
4	2390.000	43.81	-0.26	43.55	54.00	-10.45	AVG


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.247	Test Distance:	3m
Test item:	Band edge	Power:	AC 120V/60Hz
Frequency:	2462MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60%RH
Mode:	Mode 4	Date:	12/09/2016
Ant.Polar.:	Horizontal		

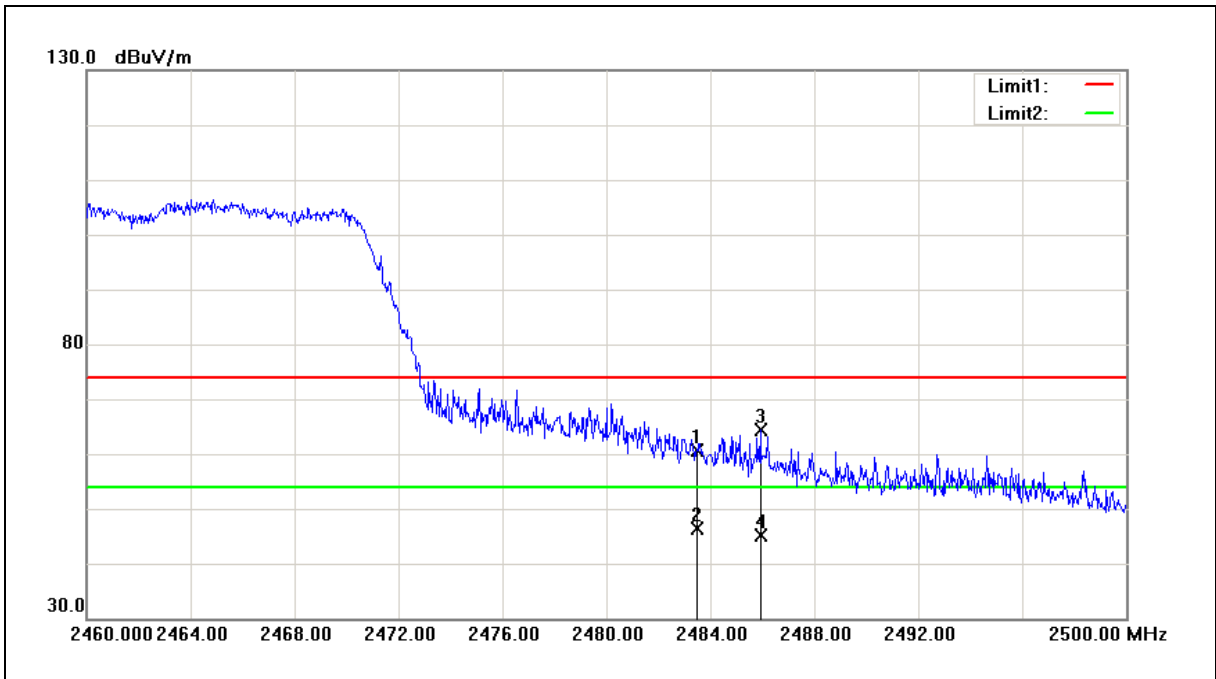


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	60.62	0.11	60.73	74.00	-13.27	peak
2	2483.500	46.20	0.11	46.31	54.00	-7.69	AVG
3	2485.920	64.19	0.12	64.31	74.00	-9.69	peak
4	2485.920	45.06	0.12	45.18	54.00	-8.82	AVG

- Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).
- 2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).
3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.247	Test Distance:	3m
Test item:	Band edge	Power:	AC 120V/60Hz
Frequency:	2462MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 4	Date:	12/09/2016
Ant.Polar.:	Vertical		

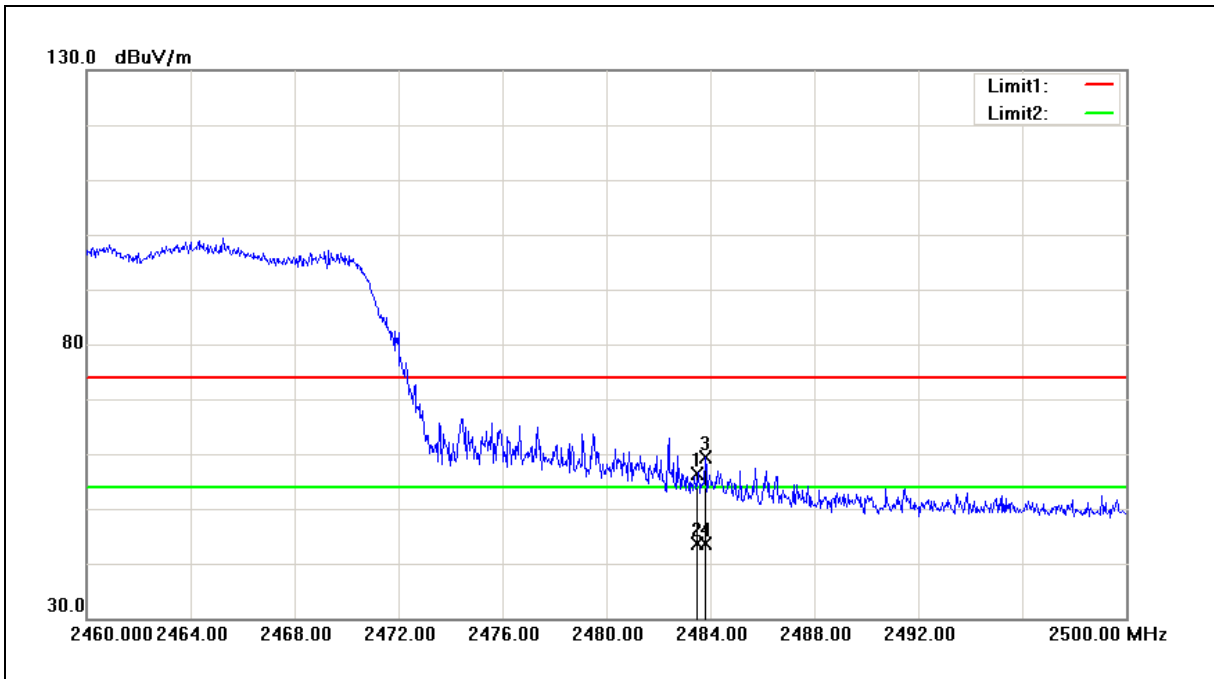

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	56.32	0.11	56.43	74.00	-17.57	peak
2	2483.500	43.61	0.11	43.72	54.00	-10.28	AVG
3	2483.800	59.28	0.11	59.39	74.00	-14.61	peak
4	2483.800	43.55	0.11	43.66	54.00	-10.34	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.


## 6 Maximum Conducted Output Power Measurement

### 6.1. Limit

For systems using digital modulation in the 2400-2483.5MHz, the limit for maximum output power is 30dBm.

And According to 15.247 (b), if transmitting antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

### 6.2. Test Setup

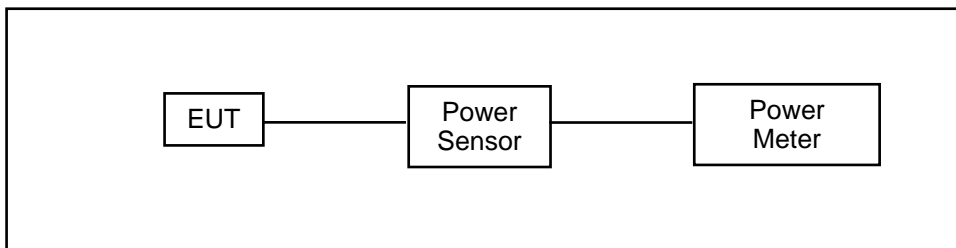

### 6.3. Test Instruments

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Cal. Period
Power Sensor	Anritsu	MA2411B	1126022	08/29/2016	1 year
Power Meter	Anritsu	ML2495A	1135009	08/29/2016	1 year
Microwave Cable	EMCI	EMC104-SM-SM-1500	140303	02/23/2016	1 year
Test Site	ATL	TE05	TE05	N.C.R.	-----

Note: N.C.R. = No Calibration Request.

### 6.4. Test Procedure

The tests below are run with the EUT's transmitter set at high power in TX mode. The EUT is needed to force selection of output power level and channel number. While testing, EUT was set to transmit continuously. Remove the Subjective device's antenna and connect the RF output port to power sensor.



### 6.5. Test Result

Date of Test	11/16/2016						
Antenna	ANT-1						
Test Mode	Frequency (MHz)	Data Rate	Average Output Power		Peak Output Power		
			Measurement Results		Measurement Results		Limit
			dBm	W	dBm	W	dBm
Mode 2	2412	1M	16.50	0.045	19.70	0.093	< 30
	2437		16.56	0.045	19.82	0.096	< 30
	2462		16.62	0.046	<b>19.98</b>	<b>0.100</b>	< 30
	2437	2M	16.50	0.045	19.77	0.095	< 30
	2437	5.5M	16.45	0.044	19.71	0.094	< 30
	2437	11M	16.31	0.043	19.58	0.091	< 30
Mode 3	2412	6M	13.15	0.021	22.02	0.159	< 30
	2437		13.19	0.021	22.13	0.163	< 30
	2462		13.22	0.021	<b>22.25</b>	<b>0.168</b>	< 30
	2437	9M	13.12	0.021	22.07	0.161	< 30
	2437	12M	13.07	0.020	22.02	0.159	< 30
	2437	18M	13.01	0.020	21.99	0.158	< 30
	2437	24M	12.99	0.020	21.94	0.156	< 30
	2437	36M	12.94	0.020	21.88	0.154	< 30
		48M	12.88	0.019	21.82	0.152	< 30
	2437	54M	12.82	0.019	21.77	0.150	< 30
Mode 4	2412	6.5M	11.80	0.015	20.73	0.118	< 30
	2437		11.98	0.016	20.83	0.121	< 30
	2462		12.04	0.016	<b>20.97</b>	<b>0.125</b>	< 30
	2437	13M	11.92	0.016	20.77	0.119	< 30
	2437	19.5M	11.87	0.015	20.71	0.118	< 30
	2437	26M	11.82	0.015	20.64	0.116	< 30
	2437	39M	11.76	0.015	20.58	0.114	< 30
	2437	52M	11.71	0.015	20.51	0.112	< 30
	2437	58.5M	11.68	0.015	20.44	0.111	< 30
	2437	65M	11.62	0.015	20.38	0.109	< 30

Note: The relevant measured result has the offset with cable loss already.



Date of Test	11/16/2016						
Antenna	ANT-2						
Test Mode	Frequency (MHz)	Data Rate	Average Output Power		Peak Output Power		
			Measurement Results		Measurement Results		Limit
			dBm	W	dBm	W	dBm
Mode 2	2412	1M	16.42	0.044	19.67	0.093	< 30
	2437		16.53	0.045	19.74	0.094	< 30
	2462		16.58	0.045	<b>19.92</b>	<b>0.098</b>	< 30
	2437	2M	16.43	0.044	19.71	0.094	< 30
	2437	5.5M	16.39	0.044	19.67	0.093	< 30
	2437	11M	16.30	0.043	19.53	0.090	< 30
Mode 3	2412	6M	13.10	0.020	21.97	0.157	< 30
	2437		13.15	0.021	22.03	0.160	< 30
	2462		13.19	0.021	<b>22.18</b>	<b>0.165</b>	< 30
	2437	9M	13.05	0.020	21.97	0.157	< 30
	2437	12M	13.01	0.020	21.95	0.157	< 30
	2437	18M	12.97	0.020	21.90	0.155	< 30
	2437	24M	12.91	0.020	21.89	0.155	< 30
	2437	36M	12.87	0.019	21.80	0.151	< 30
	2437	48M	12.80	0.019	21.79	0.151	< 30
	2437	54M	12.76	0.019	21.71	0.148	< 30
Mode 4	2412	6.5M	11.75	0.015	20.66	0.116	< 30
	2437		11.94	0.016	20.72	0.118	< 30
	2462		11.97	0.016	<b>20.91</b>	<b>0.123</b>	< 30
	2437	13M	11.85	0.015	20.69	0.117	< 30
	2437	19.5M	11.81	0.015	20.64	0.116	< 30
	2437	26M	11.74	0.015	20.55	0.114	< 30
	2437	39M	11.71	0.015	20.50	0.112	< 30
	2437	52M	11.69	0.015	20.47	0.111	< 30
	2437	58.5M	11.65	0.015	20.36	0.109	< 30
	2437	65M	11.56	0.014	20.32	0.108	< 30


Note: The relevant measured result has the offset with cable loss already.

## 7 6dB RF Bandwidth Measurement

### 7.1. Limit

6dB RF Bandwidth: Systems using digital modulation techniques may operate in the 2400–2483.5 MHz bands. The minimum 6 dB band-width shall be at least 500 kHz.

### 7.2. Test Setup

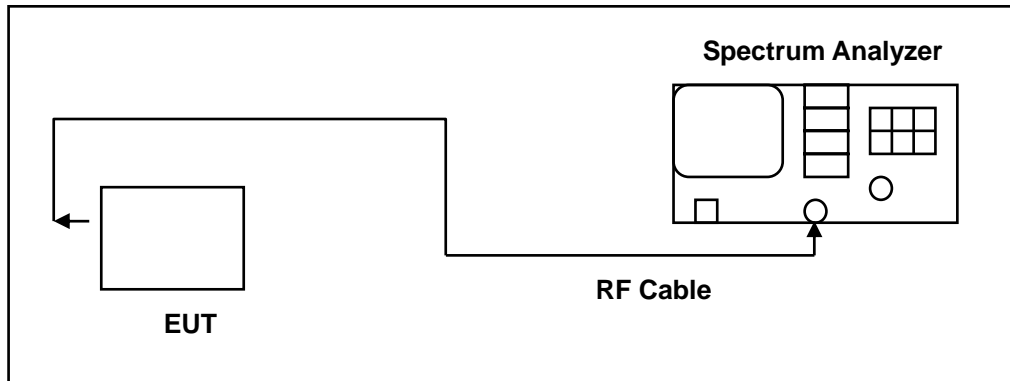

### 7.3. Test Instruments

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Cal. Period
Spectrum Analyzer	Agilent	E4445A	MY45300744	12/15/2015	1 year
Microwave Cable	EMCI	EMC104-SM-SM-1500	140303	02/23/2016	1 year
Test Site	ATL	TE05	TE05	N.C.R.	-----

Note: N.C.R. = No Calibration Request.

### 7.4. Test Procedure

The EUT tested to DTS test procedure of KDB558074D01 for compliance to FCC 47CFR 15.247 requirements.

6dB RF Bandwidth: The antenna port of the EUT was connected to the input of a spectrum analyzer. Analyzer RBW was set to 100 kHz. For each RF output channel investigated, the spectrum analyzer center frequency was set to the channel carrier. A peak output reading was taken, a DISPLAY line was drawn 6 dB lower than peak level. The 6 dB bandwidth was determined from where the channel output spectrum intersected the display line.

The test was performed at 3 channels (Channel low, middle, high)



**7.5. Test Result**

Date of Test	12/10/2016		
Test Mode	Frequency (MHz)	Measurement (kHz)	Limit (kHz)
		ANT-1	
Mode 2	2412	10134	> 500
	2437	10079	> 500
	2462	9636	> 500
Mode 3	2412	16383	> 500
	2437	16412	> 500
	2462	16404	> 500
Mode 4	2412	17367	> 500
	2437	17562	> 500
	2462	17363	> 500



### 7.6. Test Graphs

Test Mode:	Mode 2: IEEE 802.11b link mode
Antenna:	ANT-1
2412 MHz	<p>Agilent R T Freq/Channel</p> <p>Ch Freq 2.412 GHz Trig Free</p> <p>Center Freq 2.41200000 GHz</p> <p>Start Freq 2.39700000 GHz</p> <p>Stop Freq 2.42700000 GHz</p> <p>CF Step 3.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Ref 20 dBm Atten 20 dB</p> <p>+Peak</p> <p>Log</p> <p>10</p> <p>dB/</p> <p>Offst 11.5</p> <p>dB</p> <p>Center 2.412 00 GHz Span 30 MHz</p> <p>*Res BW 100 kHz *VBW 300 kHz Sweep 2.88 ms (601 pts)</p> <p>Occupied Bandwidth 13.0983 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error 6.639 kHz</p> <p>x dB Bandwidth 10.134 MHz</p> <p>Copyright 2000-2006 Agilent Technologies</p>
2437 MHz	<p>Agilent R T Freq/Channel</p> <p>Ch Freq 2.437 GHz Trig Free</p> <p>Center Freq 2.43700000 GHz</p> <p>Start Freq 2.42200000 GHz</p> <p>Stop Freq 2.45200000 GHz</p> <p>CF Step 3.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Ref 20 dBm Atten 20 dB</p> <p>+Peak</p> <p>Log</p> <p>10</p> <p>dB/</p> <p>Offst 11.5</p> <p>dB</p> <p>Center 2.437 00 GHz Span 30 MHz</p> <p>*Res BW 100 kHz *VBW 300 kHz Sweep 2.88 ms (601 pts)</p> <p>Occupied Bandwidth 13.1221 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error -242.272 Hz</p> <p>x dB Bandwidth 10.079 MHz</p> <p>Copyright 2000-2006 Agilent Technologies</p>
2462 MHz	<p>Agilent R T Freq/Channel</p> <p>Ch Freq 2.462 GHz Trig Free</p> <p>Center Freq 2.46200000 GHz</p> <p>Start Freq 2.44700000 GHz</p> <p>Stop Freq 2.47700000 GHz</p> <p>CF Step 3.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Ref 20 dBm Atten 20 dB</p> <p>+Peak</p> <p>Log</p> <p>10</p> <p>dB/</p> <p>Offst 11.5</p> <p>dB</p> <p>Start 2.447 00 GHz Stop 2.477 00 GHz</p> <p>*Res BW 100 kHz *VBW 300 kHz Sweep 2.88 ms (601 pts)</p> <p>Occupied Bandwidth 13.1038 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error -35.187 kHz</p> <p>x dB Bandwidth 9.636 MHz</p> <p>Copyright 2000-2006 Agilent Technologies</p>



Test Mode:	Mode 3: IEEE 802.11g link mode
Antenna:	ANT-1
2412 MHz	<p>Agilent R T Freq/Channel</p> <p>Ch Freq 2.412 GHz Trig Free</p> <p>Center Freq 2.41200000 GHz</p> <p>Start Freq 2.39700000 GHz</p> <p>Stop Freq 2.42700000 GHz</p> <p>CF Step 3.00000000 MHz</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Ref 20 dBm Atten 20 dB</p> <p>Occupied Bandwidth 16.4251 MHz Occ BN % Pwr 99.00 %</p> <p>Transmit Freq Error 1.310 kHz x dB -6.00 dB</p> <p>x dB Bandwidth 16.383 MHz</p> <p>Copyright 2000-2006 Agilent Technologies</p>
2437 MHz	<p>Agilent R T Freq/Channel</p> <p>Ch Freq 2.437 GHz Trig Free</p> <p>Center Freq 2.43700000 GHz</p> <p>Start Freq 2.42200000 GHz</p> <p>Stop Freq 2.45200000 GHz</p> <p>CF Step 3.00000000 MHz</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Ref 20 dBm Atten 20 dB</p> <p>Occupied Bandwidth 16.4419 MHz Occ BN % Pwr 99.00 %</p> <p>Transmit Freq Error -6.096 kHz x dB -6.00 dB</p> <p>x dB Bandwidth 16.412 MHz</p> <p>Copyright 2000-2006 Agilent Technologies</p>
2462 MHz	<p>Agilent R T Freq/Channel</p> <p>Ch Freq 2.462 GHz Trig Free</p> <p>Center Freq 2.46200000 GHz</p> <p>Start Freq 2.44700000 GHz</p> <p>Stop Freq 2.47700000 GHz</p> <p>CF Step 3.00000000 MHz</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Ref 20 dBm Atten 20 dB</p> <p>Occupied Bandwidth 16.4380 MHz Occ BN % Pwr 99.00 %</p> <p>Transmit Freq Error 4.679 kHz x dB -6.00 dB</p> <p>x dB Bandwidth 16.404 MHz</p> <p>Copyright 2000-2006 Agilent Technologies</p>




Test Mode:	Mode 4: IEEE 802.11n 2.4GHz 20MHz link mode
Antenna:	ANT-1
2412 MHz	<p><b>Agilent</b> R T Freq/Channel</p> <p>Ch Freq 2.412 GHz Trig Free</p> <p>Center Freq 2.41200000 GHz</p> <p>Start Freq 2.39700000 GHz</p> <p>Stop Freq 2.42700000 GHz</p> <p>CF Step 3.00000000 MHz</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Ref 20 dBm Atten 20 dB</p> <p>Occupied Bandwidth 17.5453 MHz Occ BN % Pwr 99.00 %</p> <p>Transmit Freq Error 2.208 kHz x dB -6.00 dB</p> <p>x dB Bandwidth 17.367 MHz</p> <p>Copyright 2000-2006 Agilent Technologies</p>
2437 MHz	<p><b>Agilent</b> R T Freq/Channel</p> <p>Ch Freq 2.437 GHz Trig Free</p> <p>Center Freq 2.43700000 GHz</p> <p>Start Freq 2.42200000 GHz</p> <p>Stop Freq 2.45200000 GHz</p> <p>CF Step 3.00000000 MHz</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Ref 20 dBm Atten 20 dB</p> <p>Occupied Bandwidth 17.5594 MHz Occ BN % Pwr 99.00 %</p> <p>Transmit Freq Error 146.360 Hz x dB -6.00 dB</p> <p>x dB Bandwidth 17.562 MHz</p> <p>Copyright 2000-2006 Agilent Technologies</p>
2462 MHz	<p><b>Agilent</b> R T Freq/Channel</p> <p>Ch Freq 2.462 GHz Trig Free</p> <p>Center Freq 2.46200000 GHz</p> <p>Start Freq 2.44700000 GHz</p> <p>Stop Freq 2.47700000 GHz</p> <p>CF Step 3.00000000 MHz</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Ref 20 dBm Atten 20 dB</p> <p>Occupied Bandwidth 17.5589 MHz Occ BN % Pwr 99.00 %</p> <p>Transmit Freq Error 3.899 kHz x dB -6.00 dB</p> <p>x dB Bandwidth 17.363 MHz</p> <p>Copyright 2000-2006 Agilent Technologies</p>

## 8 Maximum Power Density Measurement

### 8.1. Limit

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

### 8.2. Test Setup

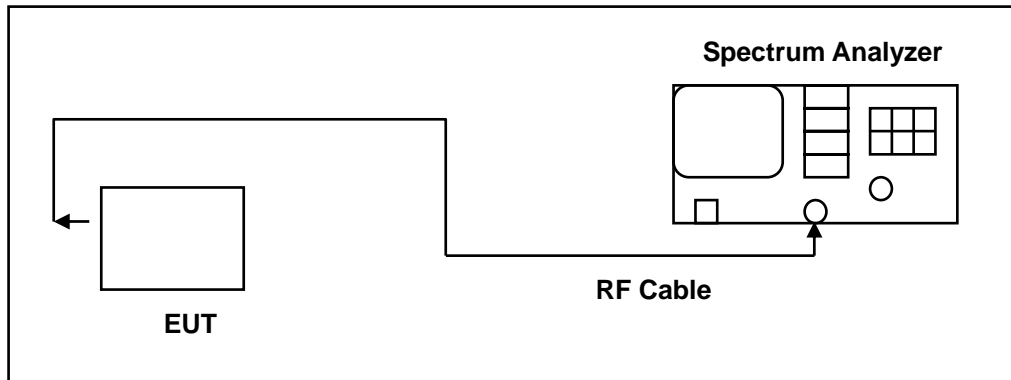

### 8.3. Test Instruments

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Cal. Period
Spectrum Analyzer	Agilent	E4445A	MY45300744	12/15/2015	1 year
Microwave Cable	EMCI	EMC104-SM-SM-1500	140303	02/23/2016	1 year
Test Site	ATL	TE05	TE05	N.C.R.	-----

Note: N.C.R. = No Calibration Request.

### 8.4. Test Procedure

The EUT tested to DTS test procedure of KDB558074D01 for compliance to FCC 47CFR 15.247 requirements.




1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS bandwidth.
3. Set the RBW to:  $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$ .
4. Set the VBW  $\geq 3 \times \text{RBW}$ .
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

**8.5. Test Result**

Date of Test	12/10/2016		
Test Mode	Frequency (MHz)	Measurement (dBm/3KHz)	Limit (dBm/3KHz)
		ANT-1	
Mode 2	2412	-5.190	< 8
	2437	-5.120	< 8
	2462	-5.120	< 8
Mode 3	2412	-11.730	< 8
	2437	-12.240	< 8
	2462	-12.880	< 8
Mode 4	2412	-11.640	< 8
	2437	-12.560	< 8
	2462	-11.380	< 8



### 8.6. Test Graphs

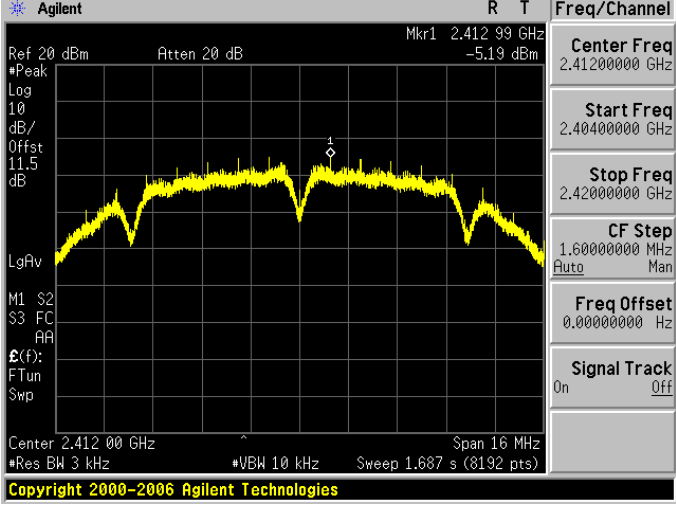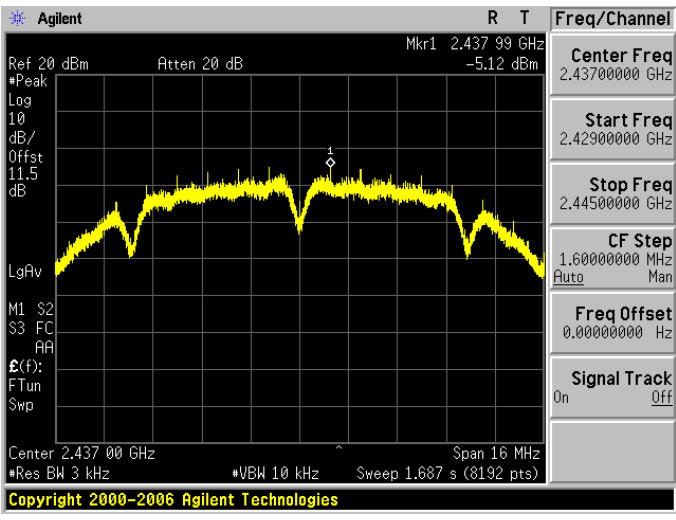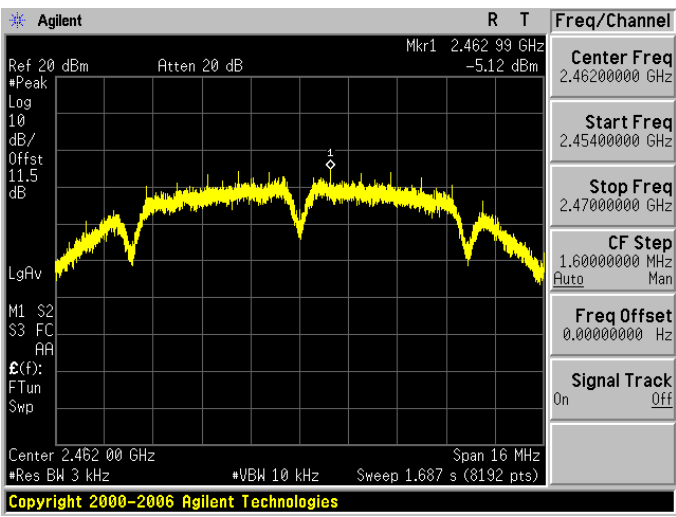Test Mode:	Mode 2: IEEE 802.11b link mode
Antenna:	ANT-1
2412 MHz	
2437 MHz	
2462 MHz	



<p>Test Mode:</p>	<p>Mode 3: IEEE 802.11g link mode</p>
<p>Antenna:</p>	<p>ANT-1</p>
<p>2412 MHz</p>	
<p>2437 MHz</p>	
<p>2462 MHz</p>	






<p>Test Mode:</p>	<p>Mode 4: IEEE 802.11n 2.4GHz 20MHz link mode</p>
<p>Antenna:</p>	<p>ANT-1</p>
<p>2412 MHz</p>	<p>Agilent R T Freq/Channel          Ref 20 dBm Atten 20 dB Mkr1 2.410 12 GHz          #Peak -11.64 dBm          Log          10          dB/          Offst          11.5          dB          LgAv          M1 S2          S3 FC          AA          E(f):          FTun          Swp          Center 2.412 00 GHz Span 27 MHz          #Res BW 3 kHz #VBW 10 kHz Sweep 2.847 s (8192 pts)          Copyright 2000-2006 Agilent Technologies</p> <p>Center Freq 2.41200000 GHz          Start Freq 2.39850000 GHz          Stop Freq 2.42550000 GHz          CF Step 2.70000000 MHz          Freq Offset 0.00000000 Hz          Signal Track On Off</p>
<p>2437 MHz</p>	<p>Agilent R T Freq/Channel          Ref 20 dBm Atten 20 dB Mkr1 2.444 12 GHz          #Peak -12.56 dBm          Log          10          dB/          Offst          11.5          dB          LgAv          M1 S2          S3 FC          AA          E(f):          FTun          Swp          Center 2.437 00 GHz Span 27 MHz          #Res BW 3 kHz #VBW 10 kHz Sweep 2.847 s (8192 pts)          Copyright 2000-2006 Agilent Technologies</p> <p>Center Freq 2.43700000 GHz          Start Freq 2.42350000 GHz          Stop Freq 2.45050000 GHz          CF Step 2.70000000 MHz          Freq Offset 0.00000000 Hz          Signal Track On Off</p>
<p>2462 MHz</p>	<p>Agilent R T Freq/Channel          Ref 20 dBm Atten 20 dB Mkr1 2.460 12 GHz          #Peak -11.38 dBm          Log          10          dB/          Offst          11.5          dB          LgAv          M1 S2          S3 FC          AA          E(f):          FTun          Swp          Center 2.462 00 GHz Span 27 MHz          #Res BW 3 kHz #VBW 10 kHz Sweep 2.847 s (8192 pts)          Copyright 2000-2006 Agilent Technologies</p> <p>Center Freq 2.46200000 GHz          Start Freq 2.44850000 GHz          Stop Freq 2.47550000 GHz          CF Step 2.70000000 MHz          Freq Offset 0.00000000 Hz          Signal Track On Off</p>

## 9 Out of Band Conducted Emissions Measurement

### 9.1. Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power

### 9.2. Test Setup

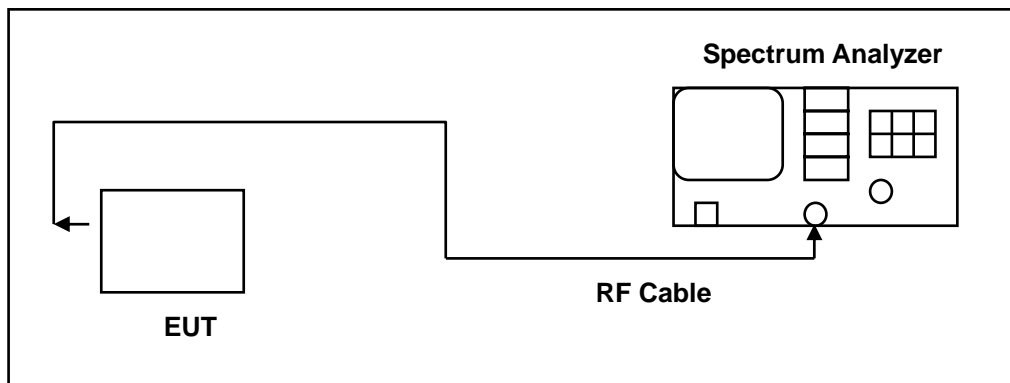

### 9.3. Test Instruments

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Cal. Period
Spectrum Analyzer	Agilent	E4445A	MY45300744	12/15/2015	1 year
Spectrum Analyzer	Agilent	E4408B	MY45107753	08/08/2016	1 year
Microwave Cable	EMCI	EMC104-SM-SM-1500	140303	02/23/2016	1 year
Test Site	ATL	TE05	TE05	N.C.R.	-----

Note: N.C.R. = No Calibration Request.

### 9.4. Test Procedure

In any 100 kHz bandwidth outside the EUT pass band, the RF power produced by the modulation products of the spreading sequence, the information sequence, and the carrier frequency shall be at least 20 dB below that of the maximum in-band 100 kHz emission, antenna output of the EUT was coupled directly to spectrum analyzer; if an external attenuator and/or cable was used, these losses are compensated for with the analyzer OFFSET function.

All other types of emissions from the EUT shall meet the general limits for radiated frequencies outside the pass band.

The test was performed at 3 channels.






### 9.5. Test Graphs

#### Reference level

Test Mode:	Mode 2: IEEE 802.11b link mode
Antenna:	ANT-1
2412 MHz	<p>Agilent Spectrum Analyzer - Sweep SA      Ref Offset 11.5 dB      Ref 20.00 dBm      Mkr1 2.412 994 4 GHz      7.682 dBm      Center 2.412000 GHz #VBW 300 kHz Span 16.00 MHz #Res BW 100 kHz Sweep 2.667 ms (40001 pts)</p>
2437 MHz	<p>Agilent Spectrum Analyzer - Sweep SA      Ref Offset 11.5 dB      Ref 20.00 dBm      Mkr1 2.437 996 0 GHz      7.735 dBm      Center 2.437000 GHz #VBW 300 kHz Span 16.00 MHz #Res BW 100 kHz Sweep 2.667 ms (40001 pts)</p>
2462 MHz	<p>Agilent Spectrum Analyzer - Sweep SA      Ref Offset 11.5 dB      Ref 20.00 dBm      Mkr1 2.462 996 4 GHz      7.944 dBm      Center 2.462000 GHz #VBW 300 kHz Span 16.00 MHz #Res BW 100 kHz Sweep 2.667 ms (40001 pts)</p>



Test Mode:	Mode 3: IEEE 802.11g link mode
Antenna:	ANT-1
2412 MHz	
2437 MHz	
2462 MHz	



<p>Test Mode:</p>	<p>Mode 4: IEEE 802.11n 2.4GHz 20MHz link mode</p>
<p>Antenna:</p>	<p>ANT-1</p>
<p>2412 MHz</p>	
<p>2437 MHz</p>	
<p>2462 MHz</p>	





**Out of Band Conducted Emissions**

Test Mode:	Mode 2: IEEE 802.11b link mode
Antenna:	ANT-1
2412 MHz	
2437 MHz	
2462 MHz	



<p>Test Mode:</p>	<p>Mode 3: IEEE 802.11g link mode</p>
<p>Antenna:</p>	<p>ANT-1</p>
<p>2412 MHz</p>	
<p>2437 MHz</p>	
<p>2462 MHz</p>	





<p>Test Mode:</p>	<p>Mode 4: IEEE 802.11n 2.4GHz 20MHz link mode</p>																		
<p>Antenna:</p>	<p>ANT-1</p>																		
<p>2412 MHz</p>	<p>Agilent Spectrum Analyzer - Swept SA</p> <p>Ref Offset 11.5 dB Ref 20.00 dBm</p> <p>Mkr1 2.412 0 GHz 0.977 dBm</p> <p>Start 30 MHz #Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Stop 26.50 GHz Sweep 2.531 s (40001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.412 0 GHz</td> <td>0.977 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.412 0 GHz	0.977 dBm			
MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE											
1	N	1	f	2.412 0 GHz	0.977 dBm														
<p>2437 MHz</p>	<p>Agilent Spectrum Analyzer - Swept SA</p> <p>Ref Offset 11.5 dB Ref 20.00 dBm</p> <p>Mkr1 2.437 0 GHz 1.000 dBm</p> <p>Start 30 MHz #Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Stop 26.50 GHz Sweep 2.531 s (40001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.437 0 GHz</td> <td>1.000 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.437 0 GHz	1.000 dBm			
MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE											
1	N	1	f	2.437 0 GHz	1.000 dBm														
<p>2462 MHz</p>	<p>Agilent Spectrum Analyzer - Swept SA</p> <p>Ref Offset 11.5 dB Ref 20.00 dBm</p> <p>Mkr1 2.462 0 GHz 0.966 dBm</p> <p>Start 30 MHz #Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Stop 26.50 GHz Sweep 2.531 s (40001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.462 0 GHz</td> <td>0.966 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.462 0 GHz	0.966 dBm			
MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE											
1	N	1	f	2.462 0 GHz	0.966 dBm														


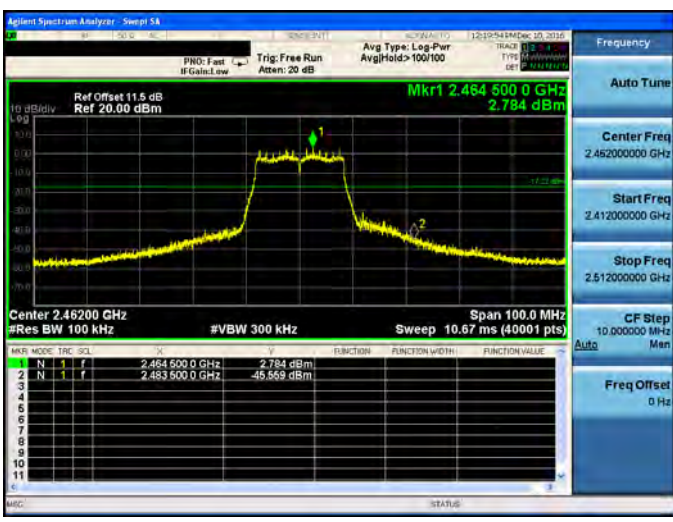





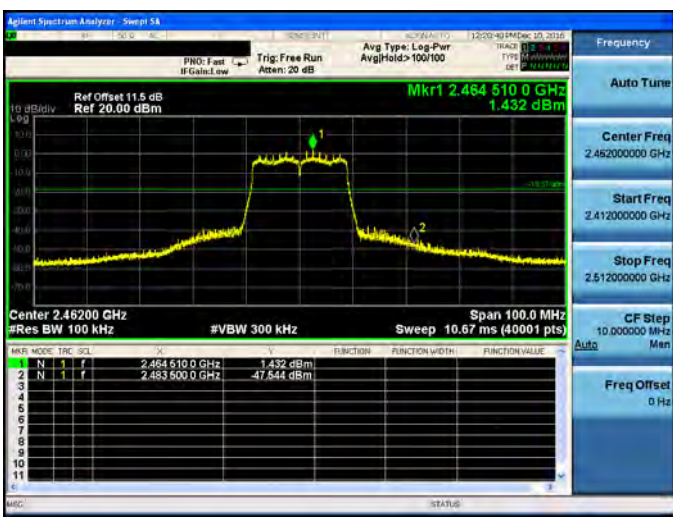
**Conducted Band Edge**

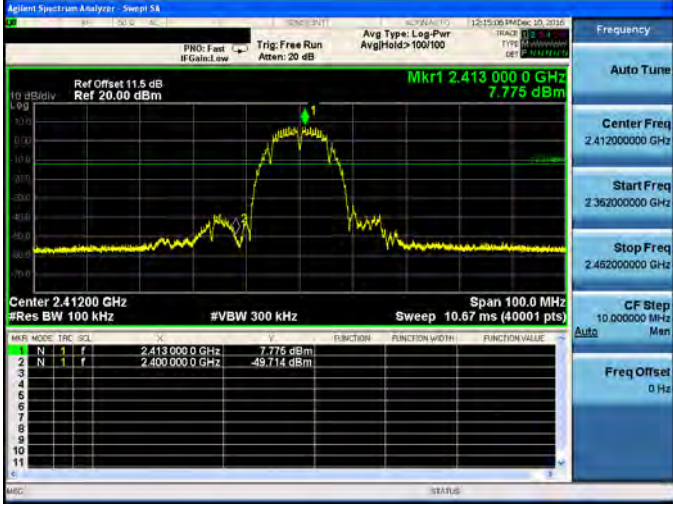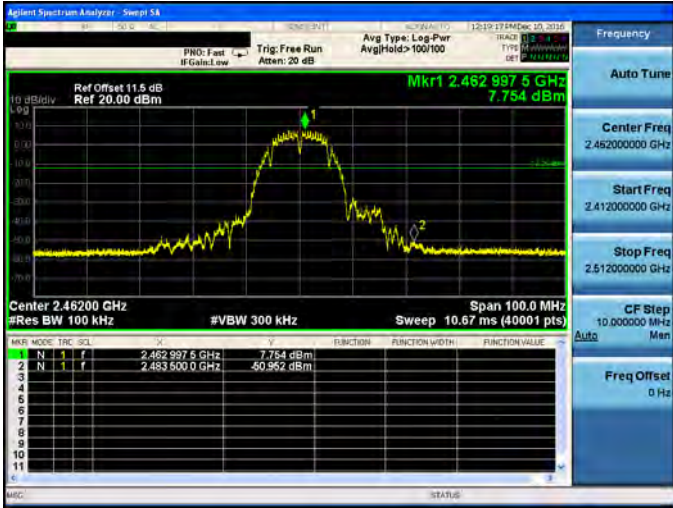Test Mode:	Mode 2: IEEE 802.11b link mode																																																																																																												
Antenna:	ANT-1																																																																																																												
2412 MHz	 <table border="1" data-bbox="646 772 1220 929"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.4130000 GHz</td> <td>7.775 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.4000000 GHz</td> <td>-49.714 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>5</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>6</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>7</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>8</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>9</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>10</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>11</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.4130000 GHz	7.775 dBm				2	N	1	f	2.4000000 GHz	-49.714 dBm				3									4									5									6									7									8									9									10									11								
MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																																																																																					
1	N	1	f	2.4130000 GHz	7.775 dBm																																																																																																								
2	N	1	f	2.4000000 GHz	-49.714 dBm																																																																																																								
3																																																																																																													
4																																																																																																													
5																																																																																																													
6																																																																																																													
7																																																																																																													
8																																																																																																													
9																																																																																																													
10																																																																																																													
11																																																																																																													
2462 MHz	 <table border="1" data-bbox="646 1299 1220 1456"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.4629975 GHz</td> <td>7.754 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.4535000 GHz</td> <td>-50.952 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>5</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>6</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>7</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>8</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>9</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>10</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>11</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.4629975 GHz	7.754 dBm				2	N	1	f	2.4535000 GHz	-50.952 dBm				3									4									5									6									7									8									9									10									11								
MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																																																																																					
1	N	1	f	2.4629975 GHz	7.754 dBm																																																																																																								
2	N	1	f	2.4535000 GHz	-50.952 dBm																																																																																																								
3																																																																																																													
4																																																																																																													
5																																																																																																													
6																																																																																																													
7																																																																																																													
8																																																																																																													
9																																																																																																													
10																																																																																																													
11																																																																																																													



Test Mode:	Mode 3: IEEE 802.11g link mode																											
Antenna:	ANT-1																											
2412 MHz	 <table border="1" data-bbox="646 772 1220 929"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>ISL</th> <th>F</th> <th>V</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.4144950 GHz</td> <td>2.767 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.4000000 GHz</td> <td>-40.585 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	ISL	F	V	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.4144950 GHz	2.767 dBm				2	N	1	f	2.4000000 GHz	-40.585 dBm			
MKR	MODE	TRC	ISL	F	V	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																				
1	N	1	f	2.4144950 GHz	2.767 dBm																							
2	N	1	f	2.4000000 GHz	-40.585 dBm																							
2462 MHz	 <table border="1" data-bbox="646 1310 1220 1467"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>ISL</th> <th>F</th> <th>V</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.4645000 GHz</td> <td>2.784 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.4835000 GHz</td> <td>-45.569 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	ISL	F	V	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.4645000 GHz	2.784 dBm				2	N	1	f	2.4835000 GHz	-45.569 dBm			
MKR	MODE	TRC	ISL	F	V	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																				
1	N	1	f	2.4645000 GHz	2.784 dBm																							
2	N	1	f	2.4835000 GHz	-45.569 dBm																							



Test Mode:	Mode 4: IEEE 802.11n 2.4GHz 20MHz link mode																											
Antenna:	ANT-1																											
2412 MHz	 <table border="1" data-bbox="646 772 1220 929"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>ISL</th> <th>F</th> <th>V</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.4144850 GHz</td> <td>1.564 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.4000000 GHz</td> <td>-43.021 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	ISL	F	V	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.4144850 GHz	1.564 dBm				2	N	1	f	2.4000000 GHz	-43.021 dBm			
MKR	MODE	TRC	ISL	F	V	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																				
1	N	1	f	2.4144850 GHz	1.564 dBm																							
2	N	1	f	2.4000000 GHz	-43.021 dBm																							
2462 MHz	 <table border="1" data-bbox="646 1310 1220 1467"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>ISL</th> <th>F</th> <th>V</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.4645100 GHz</td> <td>1.432 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.4835000 GHz</td> <td>-47.844 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	ISL	F	V	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.4645100 GHz	1.432 dBm				2	N	1	f	2.4835000 GHz	-47.844 dBm			
MKR	MODE	TRC	ISL	F	V	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																				
1	N	1	f	2.4645100 GHz	1.432 dBm																							
2	N	1	f	2.4835000 GHz	-47.844 dBm																							



## **10 Antenna Measurement**

### **10.1.Limit**

For intentional device, according to 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And According to 15.247 (b), if transmitting antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

### **10.2.Antenna Description**

See section 2 – antenna information.