

Test Site	SIP-AC3	Test Engineer	Arvin Ding
Test Date	2024-03-05	Test Mode	802.11ac-VHT80 – Channel 138
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not shown in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	8837.0	48.5	-1.7	46.8	68.2	-21.4	Peak	Horizontal
	12313.5	48.6	-1.4	47.2	74.0	-26.8	Peak	Horizontal
*	13741.5	47.7	1.9	49.6	68.2	-18.6	Peak	Horizontal
	15705.0	45.5	4.9	50.4	74.0	-23.6	Peak	Horizontal
*	8650.0	50.5	-2.7	47.8	68.2	-20.4	Peak	Vertical
	11803.5	48.4	-1.9	46.5	74.0	-27.5	Peak	Vertical
*	14183.5	46.7	3.2	49.9	68.2	-18.3	Peak	Vertical
	15943.0	44.3	4.3	48.6	74.0	-25.4	Peak	Vertical

Note 1: "\*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Arvin Ding
Test Date	2024-01-25 ~ 2024-01-26	Test Mode	802.11ac-VHT80 – Channel 155
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not shown in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10520.0	49.0	-1.3	47.7	68.2	-20.5	Peak	Horizontal
*	14056.0	47.3	3.0	50.3	68.2	-17.9	Peak	Horizontal
	15705.0	45.9	4.9	50.8	74.0	-23.2	Peak	Horizontal
	17728.0	45.9	7.4	53.3	74.0	-20.7	Peak	Horizontal
	17728.0	33.9	7.4	41.3	54.0	-12.7	Average	Horizontal
*	9942.0	48.4	-1.6	46.8	68.2	-21.4	Peak	Vertical
*	14175.0	46.5	3.7	50.2	68.2	-18.0	Peak	Vertical
	15713.5	46.3	4.8	51.1	74.0	-22.9	Peak	Vertical
	15713.5	34.2	4.8	39.0	54.0	-15.0	Average	Vertical
	17957.5	44.2	9.0	53.2	74.0	-20.8	Peak	Vertical
	17957.5	32.6	9.0	41.6	54.0	-12.4	Average	Vertical

Note 1: "\*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Arvin Ding
Test Date	2024-01-25 ~ 2024-01-26	Test Mode	802.11ac-VHT160 – Channel 50
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not shown in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10010.0	48.5	-1.8	46.7	68.2	-21.5	Peak	Horizontal
*	14158.0	47.4	3.1	50.5	68.2	-17.7	Peak	Horizontal
	15679.5	47.8	4.7	52.5	74.0	-21.5	Peak	Horizontal
	15679.5	34.4	4.7	39.1	54.0	-14.9	Average	Horizontal
	18000.0	43.8	8.9	52.7	74.0	-21.3	Peak	Horizontal
	18000.0	31.7	8.9	40.6	54.0	-13.4	Average	Horizontal
*	9942.0	48.7	-1.6	47.1	68.2	-21.1	Peak	Vertical
*	14166.5	47.5	3.4	50.9	68.2	-17.3	Peak	Vertical
	15679.5	46.1	4.7	50.8	74.0	-23.2	Peak	Vertical
	17804.5	45.9	7.9	53.8	74.0	-20.2	Peak	Vertical
	17804.5	33.2	7.9	41.1	54.0	-12.9	Average	Vertical

Note 1: "\*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Arvin Ding
Test Date	2024-01-25 ~ 2024-01-26	Test Mode	802.11ac-VHT160-Channel 114
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not shown in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10137.5	48.4	-1.5	46.9	68.2	-21.3	Peak	Horizontal
*	14175.0	46.6	3.7	50.3	68.2	-17.9	Peak	Horizontal
	15696.5	46.6	4.9	51.5	74.0	-22.5	Peak	Horizontal
	15696.5	34.3	4.9	39.2	54.0	-14.8	Average	Horizontal
	17966.0	45.5	9.4	54.9	74.0	-19.1	Peak	Horizontal
	17966.0	32.3	9.4	41.7	54.0	-12.3	Average	Horizontal
*	9950.5	48.5	-1.6	46.9	68.2	-21.3	Peak	Vertical
*	14234.5	47.3	2.9	50.2	68.2	-18.0	Peak	Vertical
	15458.5	46.9	4.3	51.2	74.0	-22.8	Peak	Vertical
	15458.5	33.9	4.3	38.2	54.0	-15.8	Average	Vertical
	17881.0	44.7	7.9	52.6	74.0	-21.4	Peak	Vertical
	17881.0	32.9	7.9	40.8	54.0	-13.2	Average	Vertical

Note 1: "\*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Arvin Ding
Test Date	2024-01-25 ~ 2024-01-26	Test Mode	802.11ax-HE20 – Channel 36
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not shown in the report.		

Mark	Frequency (MHz)	Reading Level (dB $\mu$ V)	Factor (dB/m)	Measure Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB/m)	Detector	Polarization
*	10120.5	48.2	-1.5	46.7	68.2	-21.5	Peak	Horizontal
*	14158.0	47.3	3.1	50.4	68.2	-17.8	Peak	Horizontal
	15713.5	46.3	4.8	51.1	74.0	-22.9	Peak	Horizontal
	15713.5	34.1	4.8	38.9	54.0	-15.1	Average	Horizontal
	17906.5	44.9	8.2	53.1	74.0	-20.9	Peak	Horizontal
	17906.5	33.1	8.2	41.3	54.0	-12.7	Average	Horizontal
*	9942.0	48.5	-1.6	46.9	68.2	-21.3	Peak	Vertical
*	14166.5	47.5	3.4	50.9	68.2	-17.3	Peak	Vertical
	15713.5	46.0	4.8	50.8	74.0	-23.2	Peak	Vertical
	17855.5	45.9	7.9	53.8	74.0	-20.2	Peak	Vertical
	17855.5	32.8	7.9	40.7	54.0	-13.3	Average	Vertical

Note 1: "\*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB $\mu$ V/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Arvin Ding
Test Date	2024-03-05	Test Mode	802.11ax-HE20 – Channel 44
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not shown in the report.		

Mark	Frequency (MHz)	Reading Level (dB $\mu$ V)	Factor (dB/m)	Measure Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB/m)	Detector	Polarization
*	10112.0	47.7	-1.6	46.1	68.2	-22.1	Peak	Horizontal
	11914.0	48.7	-1.8	46.9	74.0	-27.1	Peak	Horizontal
*	13894.5	47.3	2.5	49.8	68.2	-18.4	Peak	Horizontal
	15637.0	44.3	3.8	48.1	74.0	-25.9	Peak	Horizontal
*	10078.0	46.2	-1.6	44.6	68.2	-23.6	Peak	Vertical
	11327.5	46.2	-1.5	44.7	74.0	-29.3	Peak	Vertical
*	14175.0	45.9	3.7	49.6	68.2	-18.6	Peak	Vertical
	15705.0	45.5	4.9	50.4	74.0	-23.6	Peak	Vertical

Note 1: "\*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB $\mu$ V/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Arvin Ding
Test Date	2024-03-05	Test Mode	802.11ax-HE20 – Channel 48
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not shown in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	8947.5	48.5	-2.1	46.4	68.2	-21.8	Peak	Horizontal
	11174.5	48.8	-1.5	47.3	74.0	-26.7	Peak	Horizontal
*	14141.0	46.6	2.9	49.5	68.2	-18.7	Peak	Horizontal
	15705.0	44.8	4.9	49.7	74.0	-24.3	Peak	Horizontal
*	8794.5	49.8	-2.1	47.7	68.2	-20.5	Peak	Vertical
	11625.0	48.4	-1.6	46.8	74.0	-27.2	Peak	Vertical
*	13869.0	47.3	2.5	49.8	68.2	-18.4	Peak	Vertical
	15773.0	47.1	4.9	52.0	74.0	-22.0	Peak	Vertical
	15773.0	34.2	4.9	39.1	54.0	-14.9	Average	Vertical

Note 1: "\*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Arvin Ding
Test Date	2024-03-05	Test Mode	802.11ax-HE20 – Channel 52
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not shown in the report.		

Mark	Frequency (MHz)	Reading Level (dB $\mu$ V)	Factor (dB/m)	Measure Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB/m)	Detector	Polarization
*	8888.0	46.9	-2.5	44.4	68.2	-23.8	Peak	Horizontal
	11115.0	48.8	-1.5	47.3	74.0	-26.7	Peak	Horizontal
*	13979.5	46.8	2.6	49.4	68.2	-18.8	Peak	Horizontal
	15671.0	45.3	4.6	49.9	74.0	-24.1	Peak	Horizontal
*	8769.0	46.9	-2.1	44.8	68.2	-23.4	Peak	Vertical
	11506.0	48.6	-1.7	46.9	74.0	-27.1	Peak	Vertical
*	14158.0	46.9	3.1	50.0	68.2	-18.2	Peak	Vertical
	15705.0	45.6	4.9	50.5	74.0	-23.5	Peak	Vertical

Note 1: "\*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB $\mu$ V/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)



Test Site	SIP-AC3	Test Engineer	Arvin Ding
Test Date	2024-03-05	Test Mode	802.11ax-HE20 – Channel 60
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not shown in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9500.0	48.7	-1.9	46.8	68.2	-21.4	Peak	Horizontal
	11506.0	48.6	-1.7	46.9	74.0	-27.1	Peak	Horizontal
*	14166.5	46.8	3.4	50.2	68.2	-18.0	Peak	Horizontal
	15798.5	45.2	4.9	50.1	74.0	-23.9	Peak	Horizontal
*	10137.5	48.8	-1.5	47.3	68.2	-20.9	Peak	Vertical
	12313.5	48.4	-1.4	47.0	74.0	-27.0	Peak	Vertical
*	13818.0	47.5	2.1	49.6	68.2	-18.6	Peak	Vertical
	15467.0	45.9	4.6	50.5	74.0	-23.5	Peak	Vertical

Note 1: "\*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Arvin Ding
Test Date	2024-03-05	Test Mode	802.11ax-HE20 – Channel 64
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not shown in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9959.0	48.3	-1.6	46.7	68.2	-21.5	Peak	Horizontal
	11718.5	48.8	-1.7	47.1	74.0	-26.9	Peak	Horizontal
*	13758.5	48.2	2.1	50.3	68.2	-17.9	Peak	Horizontal
	15679.5	46.1	4.7	50.8	74.0	-23.2	Peak	Horizontal
*	9755.0	47.9	-2.0	45.9	68.2	-22.3	Peak	Vertical
	11225.5	48.1	-1.6	46.5	74.0	-27.5	Peak	Vertical
*	13792.5	47.6	2.1	49.7	68.2	-18.5	Peak	Vertical
	15688.0	45.5	4.8	50.3	74.0	-23.7	Peak	Vertical

Note 1: "\*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Arvin Ding
Test Date	2024-03-05	Test Mode	802.11ax-HE20 – Channel 100
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not shown in the report.		

Mark	Frequency (MHz)	Reading Level (dB $\mu$ V)	Factor (dB/m)	Measure Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB/m)	Detector	Polarization
*	9746.5	48.6	-2.1	46.5	68.2	-21.7	Peak	Horizontal
	11769.5	48.7	-1.9	46.8	74.0	-27.2	Peak	Horizontal
*	13792.5	48.1	2.1	50.2	68.2	-18.0	Peak	Horizontal
	15764.5	45.9	4.6	50.5	74.0	-23.5	Peak	Horizontal
*	9823.0	48.1	-1.9	46.2	68.2	-22.0	Peak	Vertical
	11642.0	48.2	-1.7	46.5	74.0	-27.5	Peak	Vertical
*	14166.5	46.9	3.4	50.3	68.2	-17.9	Peak	Vertical
	15679.5	45.3	4.7	50.0	74.0	-24.0	Peak	Vertical

Note 1: "\*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB $\mu$ V/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Arvin Ding
Test Date	2024-03-05	Test Mode	802.11ax-HE20 – Channel 116
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not shown in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9670.0	48.1	-2.0	46.1	68.2	-22.1	Peak	Horizontal
	12441.0	49.2	-1.4	47.8	74.0	-26.2	Peak	Horizontal
*	13767.0	47.9	2.1	50.0	68.2	-18.2	Peak	Horizontal
	15399.0	45.7	3.6	49.3	74.0	-24.7	Peak	Horizontal
*	10120.5	48.0	-1.5	46.5	68.2	-21.7	Peak	Vertical
	11395.5	48.6	-1.7	46.9	74.0	-27.1	Peak	Vertical
*	14175.0	46.5	3.7	50.2	68.2	-18.0	Peak	Vertical
	15696.5	46.1	4.9	51.0	74.0	-23.0	Peak	Vertical

Note 1: "\*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Arvin Ding
Test Date	2024-03-05	Test Mode	802.11ax-HE20 – Channel 140
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not shown in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10426.5	48.2	-1.4	46.8	68.2	-21.4	Peak	Horizontal
	11259.5	48.7	-1.7	47.0	74.0	-27.0	Peak	Horizontal
*	14183.5	46.8	3.2	50.0	68.2	-18.2	Peak	Horizontal
	15696.5	46.0	4.9	50.9	74.0	-23.1	Peak	Horizontal
*	10137.5	48.0	-1.5	46.5	68.2	-21.7	Peak	Vertical
	11540.0	48.1	-1.5	46.6	74.0	-27.4	Peak	Vertical
*	14175.0	46.5	3.7	50.2	68.2	-18.0	Peak	Vertical
	15773.0	45.9	4.9	50.8	74.0	-23.2	Peak	Vertical

Note 1: "\*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Arvin Ding
Test Date	2024-03-05	Test Mode	802.11ax-HE20 – Channel 144
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not shown in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9976.0	47.3	-1.5	45.8	68.2	-22.4	Peak	Horizontal
	11344.5	48.6	-1.5	47.1	74.0	-26.9	Peak	Horizontal
*	14166.5	45.8	3.4	49.2	68.2	-19.0	Peak	Horizontal
	15509.5	46.7	4.1	50.8	74.0	-23.2	Peak	Horizontal
*	9976.0	47.8	-1.5	46.3	68.2	-21.9	Peak	Vertical
	11523.0	48.4	-1.5	46.9	74.0	-27.1	Peak	Vertical
*	14166.5	46.3	3.4	49.7	68.2	-18.5	Peak	Vertical
	15900.5	45.3	5.1	50.4	74.0	-23.6	Peak	Vertical

Note 1: "\*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Arvin Ding
Test Date	2024-01-25 ~ 2024-01-26	Test Mode	802.11ax-HE20 – Channel 149
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not shown in the report.		

Mark	Frequency (MHz)	Reading Level (dB $\mu$ V)	Factor (dB/m)	Measure Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB/m)	Detector	Polarization
*	9959.0	48.0	-1.6	46.4	68.2	-21.8	Peak	Horizontal
*	14073.0	47.3	2.9	50.2	68.2	-18.0	Peak	Horizontal
	15883.5	46.0	5.1	51.1	74.0	-22.9	Peak	Horizontal
	15883.5	34.3	5.1	39.4	54.0	-14.6	Average	Horizontal
	17923.5	45.4	8.3	53.7	74.0	-20.3	Peak	Horizontal
	17923.5	32.9	8.3	41.2	54.0	-12.8	Average	Horizontal
*	9959.0	48.5	-1.6	46.9	68.2	-21.3	Peak	Vertical
*	14158.0	47.4	3.1	50.5	68.2	-17.7	Peak	Vertical
	15798.5	46.2	4.9	51.1	74.0	-22.9	Peak	Vertical
	15798.5	34.0	4.9	38.9	54.0	-15.1	Average	Vertical
	17966.0	43.6	9.4	53.0	74.0	-21.0	Peak	Vertical
	17966.0	33.1	9.4	42.5	54.0	-11.5	Average	Vertical

Note 1: "\*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB $\mu$ V/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Arvin Ding
Test Date	2024-03-05	Test Mode	802.11ax-HE20 – Channel 157
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not shown in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10401.0	47.5	-1.3	46.2	68.2	-22.0	Peak	Horizontal
	11914.0	49.0	-1.8	47.2	74.0	-26.8	Peak	Horizontal
*	14183.5	47.4	3.2	50.6	68.2	-17.6	Peak	Horizontal
	15790.0	46.8	5.0	51.8	74.0	-22.2	Peak	Horizontal
	15790.0	34.2	5.0	39.2	54.0	-14.8	Average	Vertical
*	10375.5	49.0	-1.6	47.4	68.2	-20.8	Peak	Vertical
	11744.0	49.0	-1.8	47.2	74.0	-26.8	Peak	Vertical
*	14209.0	47.3	3.0	50.3	68.2	-17.9	Peak	Vertical

Note 1: "\*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)



Test Site	SIP-AC3	Test Engineer	Arvin Ding
Test Date	2024-01-25 ~ 2024-01-26	Test Mode	802.11ax-HE20 – Channel 165
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not shown in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10197.0	48.7	-1.7	47.0	68.2	-21.2	Peak	Horizontal
*	14166.5	46.5	3.4	49.9	68.2	-18.3	Peak	Horizontal
	15696.5	46.2	4.9	51.1	74.0	-22.9	Peak	Horizontal
	15696.5	34.3	4.9	39.2	54.0	-14.8	Average	Horizontal
	17974.5	43.7	9.7	53.4	74.0	-20.6	Peak	Horizontal
	17974.5	31.6	9.7	41.3	54.0	-12.7	Average	Horizontal
*	10265.0	49.1	-1.5	47.6	68.2	-20.6	Peak	Vertical
*	14175.0	46.6	3.7	50.3	68.2	-17.9	Peak	Vertical
	15883.5	46.7	5.1	51.8	74.0	-22.2	Peak	Vertical
	15883.5	34.2	5.1	39.3	54.0	-14.7	Average	Vertical
	17813.0	45.3	7.9	53.2	74.0	-20.8	Peak	Vertical
	17813.0	34.2	7.9	42.1	54.0	-11.9	Average	Vertical

Note 1: "\*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Arvin Ding
Test Date	2024-01-25 ~ 2024-01-26	Test Mode	802.11ax-HE40 – Channel 38
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not shown in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9687.0	48.7	-2.0	46.7	68.2	-21.5	Peak	Horizontal
*	14175.0	47.6	3.7	51.3	68.2	-16.9	Peak	Horizontal
	15705.0	46.1	4.9	51.0	74.0	-23.0	Peak	Horizontal
	15705.0	34.2	4.9	39.1	54.0	-14.9	Average	Horizontal
	17906.5	45.1	8.2	53.3	74.0	-20.7	Peak	Horizontal
	17906.5	33.2	8.2	41.4	54.0	-12.6	Average	Horizontal
*	9976.0	49.1	-1.5	47.6	68.2	-20.6	Peak	Vertical
*	14149.5	47.3	3.0	50.3	68.2	-17.9	Peak	Vertical
	15671.0	46.7	4.6	51.3	74.0	-22.7	Peak	Vertical
	15671.0	34.5	4.6	39.1	54.0	-14.9	Average	Vertical
	17983.0	43.0	9.9	52.9	74.0	-21.1	Peak	Vertical
	17983.0	31.2	9.9	41.1	54.0	-12.9	Average	Vertical

Note 1: "\*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Arvin Ding
Test Date	2024-03-05	Test Mode	802.11ax-HE40 – Channel 46
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not shown in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9959.0	48.3	-1.6	46.7	68.2	-21.5	Peak	Horizontal
	11718.5	48.1	-1.7	46.4	74.0	-27.6	Peak	Horizontal
*	14098.5	46.9	2.9	49.8	68.2	-18.4	Peak	Horizontal
	15671.0	45.5	4.6	50.1	74.0	-23.9	Peak	Horizontal
*	10528.5	48.3	-1.3	47.0	68.2	-21.2	Peak	Vertical
	11531.5	49.3	-1.5	47.8	74.0	-26.2	Peak	Vertical
*	14175.0	46.1	3.7	49.8	68.2	-18.4	Peak	Vertical
	15994.0	44.9	5.4	50.3	74.0	-23.7	Peak	Vertical

Note 1: "\*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Arvin Ding
Test Date	2024-03-05	Test Mode	802.11ax-HE40 – Channel 54
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not shown in the report.		

Mark	Frequency (MHz)	Reading Level (dB $\mu$ V)	Factor (dB/m)	Measure Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB/m)	Detector	Polarization
*	10426.5	47.8	-1.4	46.4	68.2	-21.8	Peak	Horizontal
	12305.0	49.2	-1.4	47.8	74.0	-26.2	Peak	Horizontal
*	14260.0	47.2	3.1	50.3	68.2	-17.9	Peak	Horizontal
	15688.0	46.0	4.8	50.8	74.0	-23.2	Peak	Horizontal
*	9891.0	47.8	-1.9	45.9	68.2	-22.3	Peak	Vertical
	11642.0	48.5	-1.7	46.8	74.0	-27.2	Peak	Vertical
*	14064.5	47.5	2.9	50.4	68.2	-17.8	Peak	Vertical
	15654.0	45.0	4.1	49.1	74.0	-24.9	Peak	Vertical

Note 1: "\*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB $\mu$ V/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Arvin Ding
Test Date	2024-01-25 ~ 2024-01-26	Test Mode	802.11ax-HE40 – Channel 62
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not shown in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9942.0	48.4	-1.6	46.8	68.2	-21.4	Peak	Horizontal
*	13860.5	47.7	2.4	50.1	68.2	-18.1	Peak	Horizontal
	15679.5	46.9	4.7	51.6	74.0	-22.4	Peak	Horizontal
	15679.5	34.4	4.7	39.1	54.0	-14.9	Average	Horizontal
	17898.0	44.6	8.1	52.7	74.0	-21.3	Peak	Horizontal
	17898.0	33.1	8.1	41.2	54.0	-12.8	Average	Horizontal
*	10146.0	48.7	-1.6	47.1	68.2	-21.1	Peak	Vertical
*	14039.0	47.4	2.7	50.1	68.2	-18.1	Peak	Vertical
	15773.0	46.9	4.9	51.8	74.0	-22.2	Peak	Vertical
	15773.0	33.6	4.9	38.5	54.0	-15.5	Average	Vertical
	17753.5	46.4	7.6	54.0	74.0	-20.0	Peak	Vertical
	17753.5	33.7	7.6	41.3	54.0	-12.7	Average	Vertical

Note 1: "\*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Arvin Ding
Test Date	2024-03-05	Test Mode	802.11ax-HE40 – Channel 102
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not shown in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9797.5	49.0	-2.0	47.0	68.2	-21.2	Peak	Horizontal
	11914.0	48.5	-1.8	46.7	74.0	-27.3	Peak	Horizontal
*	14166.5	46.9	3.4	50.3	68.2	-17.9	Peak	Horizontal
	15798.5	46.0	4.9	50.9	74.0	-23.1	Peak	Horizontal
*	9967.5	47.4	-1.6	45.8	68.2	-22.4	Peak	Vertical
	11438.0	48.0	-1.4	46.6	74.0	-27.4	Peak	Vertical
*	14166.5	47.0	3.4	50.4	68.2	-17.8	Peak	Vertical
	15688.0	46.1	4.8	50.9	74.0	-23.1	Peak	Vertical

Note 1: "\*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Arvin Ding
Test Date	2024-03-05	Test Mode	802.11ax-HE40 – Channel 110
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not shown in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10443.5	48.1	-1.4	46.7	68.2	-21.5	Peak	Horizontal
	11616.5	48.2	-1.6	46.6	74.0	-27.4	Peak	Horizontal
*	14217.5	46.6	3.0	49.6	68.2	-18.6	Peak	Horizontal
	15688.0	45.7	4.8	50.5	74.0	-23.5	Peak	Horizontal
*	10596.5	48.2	-1.2	47.0	68.2	-21.2	Peak	Vertical
	12509.0	48.2	-1.1	47.1	74.0	-26.9	Peak	Vertical
*	13784.0	47.5	2.1	49.6	68.2	-18.6	Peak	Vertical
	15773.0	45.6	4.9	50.5	74.0	-23.5	Peak	Vertical

Note 1: "\*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Arvin Ding
Test Date	2024-03-05	Test Mode	802.11ax-HE40 – Channel 134
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not shown in the report.		

Mark	Frequency (MHz)	Reading Level (dB $\mu$ V)	Factor (dB/m)	Measure Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB/m)	Detector	Polarization
*	9746.5	48.3	-2.1	46.2	68.2	-22.0	Peak	Horizontal
	11905.5	49.4	-1.8	47.6	74.0	-26.4	Peak	Horizontal
*	14132.5	47.5	2.9	50.4	68.2	-17.8	Peak	Horizontal
	15688.0	45.4	4.8	50.2	74.0	-23.8	Peak	Horizontal
*	10129.0	47.8	-1.4	46.4	68.2	-21.8	Peak	Vertical
	11727.0	49.1	-1.7	47.4	74.0	-26.6	Peak	Vertical
*	14234.5	47.0	2.9	49.9	68.2	-18.3	Peak	Vertical
	15450.0	45.9	4.0	49.9	74.0	-24.1	Peak	Vertical

Note 1: "\*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB $\mu$ V/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)



Test Site	SIP-AC3	Test Engineer	Arvin Ding
Test Date	2024-03-05	Test Mode	802.11ax-HE40 – Channel 142
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not shown in the report.		

Mark	Frequency (MHz)	Reading Level (dB $\mu$ V)	Factor (dB/m)	Measure Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB/m)	Detector	Polarization
*	10137.5	47.6	-1.5	46.1	68.2	-22.1	Peak	Horizontal
	11183.0	49.0	-1.7	47.3	74.0	-26.7	Peak	Horizontal
*	14149.5	46.5	3.0	49.5	68.2	-18.7	Peak	Horizontal
	15688.0	45.9	4.8	50.7	74.0	-23.3	Peak	Horizontal
*	10035.5	47.8	-1.7	46.1	68.2	-22.1	Peak	Vertical
	11769.5	48.5	-1.9	46.6	74.0	-27.4	Peak	Vertical
*	13775.5	47.5	2.1	49.6	68.2	-18.6	Peak	Vertical
	15688.0	45.3	4.8	50.1	74.0	-23.9	Peak	Vertical

Note 1: "\*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB $\mu$ V/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Arvin Ding
Test Date	2024-01-25 ~ 2024-01-26	Test Mode	802.11ax-HE40 – Channel 151
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not shown in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9755.0	48.8	-2.0	46.8	68.2	-21.4	Peak	Horizontal
*	13716.0	48.3	1.9	50.2	68.2	-18.0	Peak	Horizontal
	15773.0	46.3	4.9	51.2	74.0	-22.8	Peak	Horizontal
	15773.0	34.2	4.9	39.1	54.0	-14.9	Average	Horizontal
	17983.0	43.7	9.9	53.6	74.0	-20.4	Peak	Horizontal
	17983.0	31.2	9.9	41.1	54.0	-12.9	Average	Horizontal
*	9576.5	49.0	-1.9	47.1	68.2	-21.1	Peak	Vertical
*	14175.0	46.4	3.7	50.1	68.2	-18.1	Peak	Vertical
	15467.0	46.0	4.6	50.6	74.0	-23.4	Peak	Vertical
	17983.0	42.5	9.9	52.4	74.0	-21.6	Peak	Vertical
	17983.0	31.2	9.9	41.1	54.0	-12.9	Average	Vertical

Note 1: "\*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Arvin Ding
Test Date	2024-03-05	Test Mode	802.11ax-HE40 – Channel 159
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not shown in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9950.5	47.8	-1.6	46.2	68.2	-22.0	Peak	Horizontal
	11914.0	48.9	-1.8	47.1	74.0	-26.9	Peak	Horizontal
*	14226.0	46.9	3.0	49.9	68.2	-18.3	Peak	Horizontal
	15696.5	45.5	4.9	50.4	74.0	-23.6	Peak	Horizontal
*	10392.5	49.0	-1.4	47.6	68.2	-20.6	Peak	Vertical
	11497.5	48.4	-1.7	46.7	74.0	-27.3	Peak	Vertical
*	14166.5	46.7	3.4	50.1	68.2	-18.1	Peak	Vertical
	15705.0	45.2	4.9	50.1	74.0	-23.9	Peak	Vertical

Note 1: "\*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Arvin Ding
Test Date	2024-01-25 ~ 2024-01-26	Test Mode	802.11ax-HE80 – Channel 42
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not shown in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10137.5	48.0	-1.5	46.5	68.2	-21.7	Peak	Horizontal
*	13869.0	48.0	2.5	50.5	68.2	-17.7	Peak	Horizontal
	15892.0	46.2	5.0	51.2	74.0	-22.8	Peak	Horizontal
	15892.0	33.9	5.0	38.9	54.0	-15.1	Average	Horizontal
	17915.0	44.7	8.3	53.0	74.0	-21.0	Peak	Horizontal
	17915.0	32.4	8.3	40.7	54.0	-13.3	Average	Horizontal
*	10112.0	48.2	-1.6	46.6	68.2	-21.6	Peak	Vertical
*	14217.5	47.2	3.0	50.2	68.2	-18.0	Peak	Vertical
	15671.0	46.4	4.6	51.0	74.0	-23.0	Peak	Vertical
	17940.5	44.2	8.5	52.7	74.0	-21.3	Peak	Vertical
	17940.5	32.6	8.5	41.1	54.0	-12.9	Average	Vertical

Note 1: "\*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Arvin Ding
Test Date	2024-01-25 ~ 2024-01-26	Test Mode	802.11ax-HE80 – Channel 58
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not shown in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9950.5	48.4	-1.6	46.8	68.2	-21.4	Peak	Horizontal
*	13767.0	48.6	2.1	50.7	68.2	-17.5	Peak	Horizontal
	15696.5	46.2	4.9	51.1	74.0	-22.9	Peak	Horizontal
	15696.5	34.3	4.9	39.2	54.0	-14.8	Average	Horizontal
	17966.0	44.9	9.4	54.3	74.0	-19.7	Peak	Horizontal
	17966.0	32.3	9.4	41.7	54.0	-12.3	Average	Horizontal
*	9959.0	49.1	-1.6	47.5	68.2	-20.7	Peak	Vertical
*	14166.5	47.1	3.4	50.5	68.2	-17.7	Peak	Vertical
	15688.0	45.7	4.8	50.5	74.0	-23.5	Peak	Vertical
	17804.5	45.6	7.9	53.5	74.0	-20.5	Peak	Vertical
	17804.5	33.3	7.9	41.2	54.0	-12.8	Average	Vertical

Note 1: "\*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Arvin Ding
Test Date	2024-01-25 ~ 2024-01-26	Test Mode	802.11ax-HE80 – Channel 106
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not shown in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10018.5	48.7	-1.8	46.9	68.2	-21.3	Peak	Horizontal
*	13733.0	48.3	1.8	50.1	68.2	-18.1	Peak	Horizontal
	15484.0	46.6	4.5	51.1	74.0	-22.9	Peak	Horizontal
	15484.0	34.6	4.5	39.1	54.0	-14.9	Average	Horizontal
	17915.0	46.2	8.3	54.5	74.0	-19.5	Peak	Horizontal
	17915.0	33.0	8.3	41.3	54.0	-12.7	Average	Horizontal
*	9670.0	48.4	-2.0	46.4	68.2	-21.8	Peak	Vertical
*	14183.5	47.6	3.2	50.8	68.2	-17.4	Peak	Vertical
	15764.5	46.6	4.6	51.2	74.0	-22.8	Peak	Vertical
	15764.5	34.6	4.6	39.2	54.0	-14.8	Average	Vertical
	17974.5	42.8	9.7	52.5	74.0	-21.5	Peak	Vertical
	17974.5	31.8	9.7	41.5	54.0	-12.5	Average	Vertical

Note 1: "\*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Arvin Ding
Test Date	2024-03-05	Test Mode	802.11ax-HE80 – Channel 122
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not shown in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9976.0	48.0	-1.5	46.5	68.2	-21.7	Peak	Horizontal
	11455.0	48.2	-1.5	46.7	74.0	-27.3	Peak	Horizontal
*	14234.5	47.2	2.9	50.1	68.2	-18.1	Peak	Horizontal
	15662.5	46.0	4.3	50.3	74.0	-23.7	Peak	Horizontal
*	10146.0	47.9	-1.6	46.3	68.2	-21.9	Peak	Vertical
	11701.5	48.0	-1.6	46.4	74.0	-27.6	Peak	Vertical
*	13962.5	47.5	2.4	49.9	68.2	-18.3	Peak	Vertical
	15662.5	46.1	4.3	50.4	74.0	-23.6	Peak	Vertical

Note 1: "\*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Arvin Ding
Test Date	2024-03-05	Test Mode	802.11ax-HE80 – Channel 138
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not shown in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9695.5	48.6	-2.1	46.5	68.2	-21.7	Peak	Horizontal
	11914.0	49.5	-1.8	47.7	74.0	-26.3	Peak	Horizontal
*	13860.5	47.7	2.4	50.1	68.2	-18.1	Peak	Horizontal
	15875.0	47.4	5.1	52.5	74.0	-21.5	Peak	Horizontal
	15875.0	34.2	5.1	39.3	54.0	-14.7	Average	Horizontal
*	10137.5	47.9	-1.5	46.4	68.2	-21.8	Peak	Vertical
	11251.0	48.7	-1.7	47.0	74.0	-27.0	Peak	Vertical
*	14175.0	46.2	3.7	49.9	68.2	-18.3	Peak	Vertical
	15705.0	45.9	4.9	50.8	74.0	-23.2	Peak	Vertical

Note 1: "\*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)



Test Site	SIP-AC3	Test Engineer	Arvin Ding
Test Date	2024-01-25 ~ 2024-01-26	Test Mode	802.11ax-HE80 – Channel 155
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not shown in the report.		

Mark	Frequency (MHz)	Reading Level (dB $\mu$ V)	Factor (dB/m)	Measure Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB/m)	Detector	Polarization
*	10248.0	47.9	-1.5	46.4	68.2	-21.8	Peak	Horizontal
*	14132.5	48.0	2.9	50.9	68.2	-17.3	Peak	Horizontal
	15883.5	46.9	5.1	52.0	74.0	-22.0	Peak	Horizontal
	15883.5	34.1	5.1	39.2	54.0	-14.8	Average	Horizontal
	17974.5	43.3	9.7	53.0	74.0	-21.0	Peak	Horizontal
	17974.5	32.2	9.7	41.9	54.0	-12.1	Average	Horizontal
*	10044.0	49.5	-1.8	47.7	68.2	-20.5	Peak	Vertical
*	14175.0	46.6	3.7	50.3	68.2	-17.9	Peak	Vertical
	15875.0	46.0	5.1	51.1	74.0	-22.9	Peak	Vertical
	15875.0	34.1	5.1	39.2	54.0	-14.8	Average	Vertical
	17957.5	44.2	9.0	53.2	74.0	-20.8	Peak	Vertical
	17957.5	32.5	9.0	41.5	54.0	-12.5	Average	Vertical

Note 1: "\*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB $\mu$ V/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Arvin Ding
Test Date	2024-01-25 ~ 2024-01-26	Test Mode	802.11ax-HE160 – Channel 50
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not shown in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9661.5	49.0	-2.0	47.0	68.2	-21.2	Peak	Horizontal
*	14073.0	47.3	2.9	50.2	68.2	-18.0	Peak	Horizontal
	15688.0	45.9	4.8	50.7	74.0	-23.3	Peak	Horizontal
	17728.0	47.0	7.4	54.4	74.0	-19.6	Peak	Horizontal
	17728.0	33.9	7.4	41.3	54.0	-12.7	Average	Horizontal
*	10180.0	48.3	-1.6	46.7	68.2	-21.5	Peak	Vertical
*	14192.0	47.7	2.7	50.4	68.2	-17.8	Peak	Vertical
	15722.0	46.6	4.6	51.2	74.0	-22.8	Peak	Vertical
	15722.0	34.5	4.6	39.1	54.0	-14.9	Average	Vertical
	17974.5	43.0	9.7	52.7	74.0	-21.3	Peak	Vertical
	17974.5	31.6	9.7	41.3	54.0	-12.7	Average	Vertical

Note 1: "\*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Arvin Ding
Test Date	2024-01-25 ~ 2024-01-26	Test Mode	802.11ax-HE160 – Channel 114
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not shown in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10222.5	48.4	-1.5	46.9	68.2	-21.3	Peak	Horizontal
*	14226.0	47.5	3.0	50.5	68.2	-17.7	Peak	Horizontal
	15730.5	46.7	4.2	50.9	74.0	-23.1	Peak	Horizontal
	15730.5	34.1	4.2	38.3	54.0	-15.7	Average	Horizontal
	17940.5	44.7	8.5	53.2	74.0	-20.8	Peak	Horizontal
	17940.5	32.6	8.5	41.1	54.0	-12.9	Average	Horizontal
*	9950.5	48.4	-1.6	46.8	68.2	-21.4	Peak	Vertical
*	14141.0	47.8	2.9	50.7	68.2	-17.5	Peak	Vertical
	15926.0	47.2	5.1	52.3	74.0	-21.7	Peak	Vertical
	15926.0	33.7	5.1	38.8	54.0	-15.2	Average	Vertical
	17974.5	42.8	9.7	52.5	74.0	-21.5	Peak	Vertical
	17974.5	31.7	9.7	41.4	54.0	-12.6	Average	Vertical

Note 1: "\*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Arvin Ding
Test Date	2024-01-25 ~ 2024-01-26	Test Mode	802.11be-EHT20 – Channel 36
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not shown in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10494.5	48.8	-1.3	47.5	68.2	-20.7	Peak	Horizontal
*	14192.0	47.3	2.7	50.0	68.2	-18.2	Peak	Horizontal
	15671.0	46.3	4.6	50.9	74.0	-23.1	Peak	Horizontal
	17949.0	44.7	8.7	53.4	74.0	-20.6	Peak	Horizontal
	17949.0	33.5	8.7	42.2	54.0	-11.8	Average	Horizontal
*	10503.0	48.5	-1.3	47.2	68.2	-21.0	Peak	Vertical
*	13971.0	47.6	2.6	50.2	68.2	-18.0	Peak	Vertical
	15679.5	45.9	4.7	50.6	74.0	-23.4	Peak	Vertical
	17779.0	46.2	7.5	53.7	74.0	-20.3	Peak	Vertical
	17779.0	33.5	7.5	41.0	54.0	-13.0	Average	Vertical

Note 1: "\*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Arvin Ding
Test Date	2024-03-05	Test Mode	802.11be-EHT20 – Channel 44
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not shown in the report.		

Mark	Frequency (MHz)	Reading Level (dB $\mu$ V)	Factor (dB/m)	Measure Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB/m)	Detector	Polarization
*	10069.5	48.7	-1.5	47.2	68.2	-21.0	Peak	Horizontal
	12279.5	49.0	-1.7	47.3	74.0	-26.7	Peak	Horizontal
*	13869.0	47.3	2.5	49.8	68.2	-18.4	Peak	Horizontal
	15484.0	45.8	4.5	50.3	74.0	-23.7	Peak	Horizontal
*	10154.5	48.2	-1.6	46.6	68.2	-21.6	Peak	Vertical
	10987.5	48.4	-1.6	46.8	74.0	-27.2	Peak	Vertical
*	14090.0	46.6	3.0	49.6	68.2	-18.6	Peak	Vertical
	15467.0	45.3	4.6	49.9	74.0	-24.1	Peak	Vertical

Note 1: "\*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB $\mu$ V/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Arvin Ding
Test Date	2024-03-05	Test Mode	802.11be-EHT20 – Channel 48
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not shown in the report.		

Mark	Frequency (MHz)	Reading Level (dB $\mu$ V)	Factor (dB/m)	Measure Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB/m)	Detector	Polarization
*	10171.5	48.2	-1.6	46.6	68.2	-21.6	Peak	Horizontal
	11429.5	48.9	-1.5	47.4	74.0	-26.6	Peak	Horizontal
*	13818.0	47.5	2.1	49.6	68.2	-18.6	Peak	Horizontal
	15467.0	45.7	4.6	50.3	74.0	-23.7	Peak	Horizontal
*	9976.0	47.9	-1.5	46.4	68.2	-21.8	Peak	Vertical
	12415.5	48.4	-1.0	47.4	74.0	-26.6	Peak	Vertical
*	13741.5	48.4	1.9	50.3	68.2	-17.9	Peak	Vertical
	15875.0	45.8	5.1	50.9	74.0	-23.1	Peak	Vertical

Note 1: "\*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB $\mu$ V/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Arvin Ding
Test Date	2024-03-05	Test Mode	802.11be-EHT20 – Channel 52
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not shown in the report.		

Mark	Frequency (MHz)	Reading Level (dB $\mu$ V)	Factor (dB/m)	Measure Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB/m)	Detector	Polarization
*	9738.0	48.5	-2.1	46.4	68.2	-21.8	Peak	Horizontal
	11582.5	48.3	-1.8	46.5	74.0	-27.5	Peak	Horizontal
*	13656.5	48.1	1.1	49.2	68.2	-19.0	Peak	Horizontal
	15467.0	45.5	4.6	50.1	74.0	-23.9	Peak	Horizontal
*	9942.0	47.8	-1.6	46.2	68.2	-22.0	Peak	Vertical
	11183.0	49.5	-1.7	47.8	74.0	-26.2	Peak	Vertical
*	14217.5	46.7	3.0	49.7	68.2	-18.5	Peak	Vertical
	15875.0	45.7	5.1	50.8	74.0	-23.2	Peak	Vertical

Note 1: "\*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB $\mu$ V/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Arvin Ding
Test Date	2024-03-05	Test Mode	802.11be-EHT20 – Channel 60
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not shown in the report.		

Mark	Frequency (MHz)	Reading Level (dB $\mu$ V)	Factor (dB/m)	Measure Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB/m)	Detector	Polarization
*	10120.5	48.8	-1.5	47.3	68.2	-20.9	Peak	Horizontal
	11914.0	49.5	-1.8	47.7	74.0	-26.3	Peak	Horizontal
*	13818.0	47.7	2.1	49.8	68.2	-18.4	Peak	Horizontal
	15688.0	46.2	4.8	51.0	74.0	-23.0	Peak	Horizontal
*	10154.5	48.0	-1.6	46.4	68.2	-21.8	Peak	Vertical
	11778.0	48.7	-1.9	46.8	74.0	-27.2	Peak	Vertical
*	14166.5	46.8	3.4	50.2	68.2	-18.0	Peak	Vertical
	15688.0	45.7	4.8	50.5	74.0	-23.5	Peak	Vertical

Note 1: "\*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB $\mu$ V/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)



Test Site	SIP-AC3	Test Engineer	Arvin Ding
Test Date	2024-03-05	Test Mode	802.11be-EHT20 – Channel 64
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not shown in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9755.0	49.3	-2.0	47.3	68.2	-20.9	Peak	Horizontal
	12203.0	49.1	-1.6	47.5	74.0	-26.5	Peak	Horizontal
*	13750.0	47.8	2.0	49.8	68.2	-18.4	Peak	Horizontal
	15679.5	46.2	4.7	50.9	74.0	-23.1	Peak	Horizontal
*	10112.0	48.2	-1.6	46.6	68.2	-21.6	Peak	Vertical
	11693.0	48.6	-1.6	47.0	74.0	-27.0	Peak	Vertical
*	14081.5	47.5	2.9	50.4	68.2	-17.8	Peak	Vertical
	15671.0	45.6	4.6	50.2	74.0	-23.8	Peak	Vertical

Note 1: "\*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Arvin Ding
Test Date	2024-03-05	Test Mode	802.11be-EHT20 – Channel 100
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not shown in the report.		

Mark	Frequency (MHz)	Reading Level (dB $\mu$ V)	Factor (dB/m)	Measure Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB/m)	Detector	Polarization
*	10511.5	48.9	-1.3	47.6	68.2	-20.6	Peak	Horizontal
	11718.5	48.5	-1.7	46.8	74.0	-27.2	Peak	Horizontal
*	14124.0	47.6	2.9	50.5	68.2	-17.7	Peak	Horizontal
	15688.0	46.2	4.8	51.0	74.0	-23.0	Peak	Horizontal
*	10129.0	48.1	-1.4	46.7	68.2	-21.5	Peak	Vertical
	11948.0	48.6	-1.6	47.0	74.0	-27.0	Peak	Vertical
*	14175.0	46.1	3.7	49.8	68.2	-18.4	Peak	Vertical
	15679.5	44.9	4.7	49.6	74.0	-24.4	Peak	Vertical

Note 1: "\*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB $\mu$ V/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Arvin Ding
Test Date	2024-03-05	Test Mode	802.11be-EHT20 – Channel 116
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not shown in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10231.0	48.5	-1.4	47.1	68.2	-21.1	Peak	Horizontal
	11438.0	48.5	-1.4	47.1	74.0	-26.9	Peak	Horizontal
*	14175.0	46.8	3.7	50.5	68.2	-17.7	Peak	Horizontal
	15679.5	45.9	4.7	50.6	74.0	-23.4	Peak	Horizontal
*	10027.0	48.0	-1.7	46.3	68.2	-21.9	Peak	Vertical
	11633.5	49.6	-1.7	47.9	74.0	-26.1	Peak	Vertical
*	13758.5	47.4	2.1	49.5	68.2	-18.7	Peak	Vertical
	15679.5	45.9	4.7	50.6	74.0	-23.4	Peak	Vertical

Note 1: "\*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Arvin Ding
Test Date	2024-03-05	Test Mode	802.11be-EHT20 – Channel 140
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not shown in the report.		

Mark	Frequency (MHz)	Reading Level (dB $\mu$ V)	Factor (dB/m)	Measure Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB/m)	Detector	Polarization
*	10545.5	48.9	-1.5	47.4	68.2	-20.8	Peak	Horizontal
	11914.0	49.3	-1.8	47.5	74.0	-26.5	Peak	Horizontal
*	13792.5	47.4	2.1	49.5	68.2	-18.7	Peak	Horizontal
	15518.0	45.9	4.0	49.9	74.0	-24.1	Peak	Horizontal
*	9585.0	48.6	-1.8	46.8	68.2	-21.4	Peak	Vertical
	11344.5	48.5	-1.5	47.0	74.0	-27.0	Peak	Vertical
*	13758.5	48.3	2.1	50.4	68.2	-17.8	Peak	Vertical
	15458.5	44.9	4.3	49.2	74.0	-24.8	Peak	Vertical

Note 1: "\*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB $\mu$ V/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Arvin Ding
Test Date	2024-03-05	Test Mode	802.11be-EHT20 – Channel 144
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not shown in the report.		

Mark	Frequency (MHz)	Reading Level (dB $\mu$ V)	Factor (dB/m)	Measure Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB/m)	Detector	Polarization
*	10061.0	48.5	-1.5	47.0	68.2	-21.2	Peak	Horizontal
	11701.5	48.8	-1.6	47.2	74.0	-26.8	Peak	Horizontal
*	14234.5	46.8	2.9	49.7	68.2	-18.5	Peak	Horizontal
	15696.5	45.9	4.9	50.8	74.0	-23.2	Peak	Horizontal
*	10409.5	47.6	-1.4	46.2	68.2	-22.0	Peak	Vertical
	10809.0	48.2	-1.5	46.7	74.0	-27.3	Peak	Vertical
*	14158.0	46.4	3.1	49.5	68.2	-18.7	Peak	Vertical
	15467.0	45.0	4.6	49.6	74.0	-24.4	Peak	Vertical

Note 1: "\*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB $\mu$ V/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Arvin Ding
Test Date	2024-03-05	Test Mode	802.11be-EHT20 – Channel 149
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not shown in the report.		

Mark	Frequency (MHz)	Reading Level (dB $\mu$ V)	Factor (dB/m)	Measure Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB/m)	Detector	Polarization
*	10027.0	48.3	-1.7	46.6	68.2	-21.6	Peak	Horizontal
	11846.0	48.9	-1.9	47.0	74.0	-27.0	Peak	Horizontal
*	13784.0	47.9	2.1	50.0	68.2	-18.2	Peak	Horizontal
	15467.0	45.3	4.6	49.9	74.0	-24.1	Peak	Horizontal
*	10120.5	48.3	-1.5	46.8	68.2	-21.4	Peak	Vertical
	10826.0	48.0	-1.5	46.5	74.0	-27.5	Peak	Vertical
*	13911.5	47.5	2.5	50.0	68.2	-18.2	Peak	Vertical
	15671.0	45.7	4.6	50.3	74.0	-23.7	Peak	Vertical

Note 1: "\*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB $\mu$ V/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Arvin Ding
Test Date	2024-03-05	Test Mode	802.11be-EHT20 – Channel 157
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not shown in the report.		

Mark	Frequency (MHz)	Reading Level (dB $\mu$ V)	Factor (dB/m)	Measure Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB/m)	Detector	Polarization
*	10222.5	47.5	-1.5	46.0	68.2	-22.2	Peak	Horizontal
	11463.5	48.8	-1.6	47.2	74.0	-26.8	Peak	Horizontal
*	14098.5	47.2	2.9	50.1	68.2	-18.1	Peak	Horizontal
	15713.5	45.3	4.8	50.1	74.0	-23.9	Peak	Horizontal
*	9942.0	48.8	-1.6	47.2	68.2	-21.0	Peak	Vertical
	11089.5	48.5	-1.7	46.8	74.0	-27.2	Peak	Vertical
*	14064.5	46.6	2.9	49.5	68.2	-18.7	Peak	Vertical
	15688.0	45.6	4.8	50.4	74.0	-23.6	Peak	Vertical

Note 1: "\*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB $\mu$ V/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Arvin Ding
Test Date	2024-01-25 ~ 2024-01-26	Test Mode	802.11be-EHT20 – Channel 165
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not shown in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10120.5	48.5	-1.5	47.0	68.2	-21.2	Peak	Horizontal
*	14226.0	48.0	3.0	51.0	68.2	-17.2	Peak	Horizontal
	15849.5	47.2	4.4	51.6	74.0	-22.4	Peak	Horizontal
	15849.5	34.6	4.4	39.0	54.0	-15.0	Average	Horizontal
	17830.0	45.2	8.1	53.3	74.0	-20.7	Peak	Horizontal
	17830.0	33.7	8.1	41.8	54.0	-12.2	Average	Horizontal
*	9976.0	48.7	-1.5	47.2	68.2	-21.0	Peak	Vertical
*	14251.5	47.7	3.0	50.7	68.2	-17.5	Peak	Vertical
	15909.0	46.0	5.2	51.2	74.0	-22.8	Peak	Vertical
	15909.0	33.9	5.2	39.1	54.0	-14.9	Average	Vertical
	17974.5	43.9	9.7	53.6	74.0	-20.4	Peak	Vertical
	17974.5	32.9	9.7	42.6	54.0	-11.4	Average	Vertical

Note 1: "\*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)



Test Site	SIP-AC3	Test Engineer	Arvin Ding
Test Date	2024-01-25 ~ 2024-01-26	Test Mode	802.11be-EHT40 – Channel 38
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not shown in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9678.5	49.4	-2.0	47.4	68.2	-20.8	Peak	Horizontal
*	14047.5	47.1	2.8	49.9	68.2	-18.3	Peak	Horizontal
	15722.0	46.5	4.6	51.1	74.0	-22.9	Peak	Horizontal
	15722.0	34.3	4.6	38.9	54.0	-15.1	Average	Horizontal
	17804.5	45.5	7.9	53.4	74.0	-20.6	Peak	Horizontal
	17804.5	33.6	7.9	41.5	54.0	-12.5	Average	Horizontal
*	9959.0	48.3	-1.6	46.7	68.2	-21.5	Peak	Vertical
*	14200.5	47.4	2.9	50.3	68.2	-17.9	Peak	Vertical
	15883.5	45.9	5.1	51.0	74.0	-23.0	Peak	Vertical
	17915.0	45.2	8.3	53.5	74.0	-20.5	Peak	Vertical
	17915.0	33.0	8.3	41.3	54.0	-12.7	Average	Vertical

Note 1: "\*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Arvin Ding
Test Date	2024-03-05	Test Mode	802.11be-EHT40 – Channel 46
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not shown in the report.		

Mark	Frequency (MHz)	Reading Level (dB $\mu$ V)	Factor (dB/m)	Measure Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB/m)	Detector	Polarization
*	9882.5	48.7	-1.9	46.8	68.2	-21.4	Peak	Horizontal
	11914.0	49.4	-1.8	47.6	74.0	-26.4	Peak	Horizontal
*	14141.0	47.1	2.9	50.0	68.2	-18.2	Peak	Horizontal
	15688.0	45.3	4.8	50.1	74.0	-23.9	Peak	Horizontal
*	10163.0	47.9	-1.7	46.2	68.2	-22.0	Peak	Vertical
	11523.0	48.4	-1.5	46.9	74.0	-27.1	Peak	Vertical
*	14149.5	46.9	3.0	49.9	68.2	-18.3	Peak	Vertical
	15688.0	46.0	4.8	50.8	74.0	-23.2	Peak	Vertical

Note 1: "\*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB $\mu$ V/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Arvin Ding
Test Date	2024-03-05	Test Mode	802.11be-EHT40 – Channel 54
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not shown in the report.		

Mark	Frequency (MHz)	Reading Level (dB $\mu$ V)	Factor (dB/m)	Measure Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB/m)	Detector	Polarization
*	10137.5	47.7	-1.5	46.2	68.2	-22.0	Peak	Horizontal
	11336.0	48.5	-1.4	47.1	74.0	-26.9	Peak	Horizontal
*	14149.5	47.0	3.0	50.0	68.2	-18.2	Peak	Horizontal
	15671.0	45.7	4.6	50.3	74.0	-23.7	Peak	Horizontal
*	10163.0	47.8	-1.7	46.1	68.2	-22.1	Peak	Vertical
	11710.0	48.3	-1.6	46.7	74.0	-27.3	Peak	Vertical
*	14175.0	46.5	3.7	50.2	68.2	-18.0	Peak	Vertical
	15773.0	45.0	4.9	49.9	74.0	-24.1	Peak	Vertical

Note 1: "\*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB $\mu$ V/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Arvin Ding
Test Date	2024-01-25 ~ 2024-01-26	Test Mode	802.11be-EHT40 – Channel 62
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not shown in the report.		

Mark	Frequency (MHz)	Reading Level (dB $\mu$ V)	Factor (dB/m)	Measure Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB/m)	Detector	Polarization
*	10384.0	48.9	-1.5	47.4	68.2	-20.8	Peak	Horizontal
*	13852.0	47.5	2.4	49.9	68.2	-18.3	Peak	Horizontal
	15722.0	47.3	4.6	51.9	74.0	-22.1	Peak	Horizontal
	15722.0	34.6	4.6	39.2	54.0	-14.8	Average	Horizontal
	17966.0	43.4	9.4	52.8	74.0	-21.2	Peak	Horizontal
	17966.0	32.1	9.4	41.5	54.0	-12.5	Average	Horizontal
*	9933.5	48.3	-1.8	46.5	68.2	-21.7	Peak	Vertical
*	14260.0	47.0	3.1	50.1	68.2	-18.1	Peak	Vertical
	15688.0	46.2	4.8	51.0	74.0	-23.0	Peak	Vertical
	15688.0	34.6	4.8	39.4	54.0	-14.6	Average	Vertical
	17991.5	43.2	9.4	52.6	74.0	-21.4	Peak	Vertical
	17991.5	31.3	9.4	40.7	54.0	-13.3	Average	Vertical

Note 1: "\*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB $\mu$ V/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Arvin Ding
Test Date	2024-03-05	Test Mode	802.11be-EHT40 – Channel 102
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not shown in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10426.5	47.8	-1.4	46.4	68.2	-21.8	Peak	Horizontal
	11914.0	49.5	-1.8	47.7	74.0	-26.3	Peak	Horizontal
*	14064.5	46.7	2.9	49.6	68.2	-18.6	Peak	Horizontal
	15688.0	46.0	4.8	50.8	74.0	-23.2	Peak	Horizontal
*	10163.0	48.6	-1.7	46.9	68.2	-21.3	Peak	Vertical
	12058.5	49.3	-1.7	47.6	74.0	-26.4	Peak	Vertical
*	14166.5	47.6	3.4	51.0	68.2	-17.2	Peak	Vertical
	15713.5	47.0	4.8	51.8	74.0	-22.2	Peak	Vertical
	15713.5	34.1	4.8	38.9	54.0	-15.1	Average	Vertical

Note 1: "\*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Arvin Ding
Test Date	2024-03-05	Test Mode	802.11be-EHT40 – Channel 110
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not shown in the report.		

Mark	Frequency (MHz)	Reading Level (dB $\mu$ V)	Factor (dB/m)	Measure Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB/m)	Detector	Polarization
*	9857.0	48.3	-1.7	46.6	68.2	-21.6	Peak	Horizontal
	11531.5	48.8	-1.5	47.3	74.0	-26.7	Peak	Horizontal
*	14166.5	47.9	3.4	51.3	68.2	-16.9	Peak	Horizontal
	15484.0	45.9	4.5	50.4	74.0	-23.6	Peak	Horizontal
*	10435.0	47.8	-1.3	46.5	68.2	-21.7	Peak	Vertical
	11327.5	48.7	-1.5	47.2	74.0	-26.8	Peak	Vertical
*	14158.0	47.4	3.1	50.5	68.2	-17.7	Peak	Vertical
	15467.0	45.0	4.6	49.6	74.0	-24.4	Peak	Vertical

Note 1: "\*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB $\mu$ V/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Arvin Ding
Test Date	2024-03-05	Test Mode	802.11be-EHT40 – Channel 134
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not shown in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9559.5	48.1	-2.0	46.1	68.2	-22.1	Peak	Horizontal
	12602.5	49.4	-1.0	48.4	74.0	-25.6	Peak	Horizontal
*	14251.5	46.8	3.0	49.8	68.2	-18.4	Peak	Horizontal
	15909.0	46.2	5.2	51.4	74.0	-22.6	Peak	Horizontal
	15909.0	34.0	5.2	39.2	54.0	-14.8	Average	Horizontal
*	9772.0	48.5	-2.0	46.5	68.2	-21.7	Peak	Vertical
	11667.5	49.0	-1.7	47.3	74.0	-26.7	Peak	Vertical
*	14081.5	47.3	2.9	50.2	68.2	-18.0	Peak	Vertical
	15543.5	46.3	4.3	50.6	74.0	-23.4	Peak	Vertical

Note 1: "\*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Arvin Ding
Test Date	2024-03-05	Test Mode	802.11be-EHT40 – Channel 142
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not shown in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9950.5	48.1	-1.6	46.5	68.2	-21.7	Peak	Horizontal
	11344.5	49.1	-1.5	47.6	74.0	-26.4	Peak	Horizontal
*	14183.5	46.4	3.2	49.6	68.2	-18.6	Peak	Horizontal
	15764.5	47.1	4.6	51.7	74.0	-22.3	Peak	Horizontal
	15764.5	34.3	4.6	38.9	54.0	-15.1	Average	Horizontal
*	9967.5	48.1	-1.6	46.5	68.2	-21.7	Peak	Vertical
	12407.0	48.7	-1.2	47.5	74.0	-26.5	Peak	Vertical
*	14175.0	45.9	3.7	49.6	68.2	-18.6	Peak	Vertical
	15705.0	45.4	4.9	50.3	74.0	-23.7	Peak	Vertical

Note 1: "\*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)



Test Site	SIP-AC3	Test Engineer	Arvin Ding
Test Date	2024-01-25 ~ 2024-01-26	Test Mode	802.11be-EHT40 – Channel 151
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not shown in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10222.5	47.9	-1.5	46.4	68.2	-21.8	Peak	Horizontal
*	14166.5	46.8	3.4	50.2	68.2	-18.0	Peak	Horizontal
	15484.0	46.9	4.5	51.4	74.0	-22.6	Peak	Horizontal
	15484.0	34.3	4.5	38.8	54.0	-15.2	Average	Horizontal
	17821.5	46.1	8.0	54.1	74.0	-19.9	Peak	Horizontal
	17821.5	33.5	8.0	41.5	54.0	-12.5	Average	Horizontal
*	9661.5	49.4	-2.0	47.4	68.2	-20.8	Peak	Vertical
*	14047.5	47.0	2.8	49.8	68.2	-18.4	Peak	Vertical
	15875.0	46.7	5.1	51.8	74.0	-22.2	Peak	Vertical
	15875.0	34.5	5.1	39.6	54.0	-14.4	Average	Vertical
	17966.0	43.9	9.4	53.3	74.0	-20.7	Peak	Vertical
	17966.0	32.5	9.4	41.9	54.0	-12.1	Average	Vertical

Note 1: "\*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Arvin Ding
Test Date	2024-03-05	Test Mode	802.11be-EHT40 – Channel 159
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not shown in the report.		

Mark	Frequency (MHz)	Reading Level (dB $\mu$ V)	Factor (dB/m)	Measure Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB/m)	Detector	Polarization
*	10137.5	48.5	-1.5	47.0	68.2	-21.2	Peak	Horizontal
	11191.5	48.4	-1.7	46.7	74.0	-27.3	Peak	Horizontal
*	13996.5	47.1	2.5	49.6	68.2	-18.6	Peak	Horizontal
	15365.0	46.2	4.2	50.4	74.0	-23.6	Peak	Horizontal
*	10384.0	48.4	-1.5	46.9	68.2	-21.3	Peak	Vertical
	11591.0	49.1	-1.7	47.4	74.0	-26.6	Peak	Vertical
*	13826.5	48.3	2.2	50.5	68.2	-17.7	Peak	Vertical
	15696.5	46.0	4.9	50.9	74.0	-23.1	Peak	Vertical

Note 1: "\*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB $\mu$ V/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Arvin Ding
Test Date	2024-01-25 ~ 2024-01-26	Test Mode	802.11be-EHT80 – Channel 42
Remark	3. Average measurement was not performed if peak level lower than average limit. 4. Other frequency was 20dB below limit line within 1-18GHz, there is not shown in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10129.0	48.3	-1.4	46.9	68.2	-21.3	Peak	Horizontal
*	14149.5	47.5	3.0	50.5	68.2	-17.7	Peak	Horizontal
	15713.5	46.2	4.8	51.0	74.0	-23.0	Peak	Horizontal
	17745.0	46.1	7.5	53.6	74.0	-20.4	Peak	Horizontal
	17745.0	33.5	7.5	41.0	54.0	-13.0	Average	Horizontal
*	10188.5	48.9	-1.6	47.3	68.2	-20.9	Peak	Vertical
*	14013.5	47.9	2.6	50.5	68.2	-17.7	Peak	Vertical
	15705.0	46.8	4.9	51.7	74.0	-22.3	Peak	Vertical
	15705.0	34.3	4.9	39.2	54.0	-14.8	Average	Vertical
	17745.0	46.3	7.5	53.8	74.0	-20.2	Peak	Vertical
	17745.0	33.8	7.5	41.3	54.0	-12.7	Average	Vertical

Note 1: "\*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Arvin Ding
Test Date	2024-01-25 ~ 2024-01-26	Test Mode	802.11be-EHT80 – Channel 58
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not shown in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9755.0	49.0	-2.0	47.0	68.2	-21.2	Peak	Horizontal
*	14098.5	47.4	2.9	50.3	68.2	-17.9	Peak	Horizontal
	15773.0	47.3	4.9	52.2	74.0	-21.8	Peak	Horizontal
	15773.0	34.2	4.9	39.1	54.0	-14.9	Average	Horizontal
	17983.0	43.0	9.9	52.9	74.0	-21.1	Peak	Horizontal
	17983.0	31.2	9.9	41.1	54.0	-12.9	Average	Horizontal
*	9959.0	48.2	-1.6	46.6	68.2	-21.6	Peak	Vertical
*	14175.0	47.3	3.7	51.0	68.2	-17.2	Peak	Vertical
	15900.5	46.2	5.1	51.3	74.0	-22.7	Peak	Vertical
	15900.5	34.0	5.1	39.1	54.0	-14.9	Average	Vertical
	17830.0	45.4	8.1	53.5	74.0	-20.5	Peak	Vertical
	17830.0	33.0	8.1	41.1	54.0	-12.9	Average	Vertical

Note 1: "\*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Arvin Ding
Test Date	2024-03-05	Test Mode	802.11be-EHT80 – Channel 106
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not shown in the report.		

Mark	Frequency (MHz)	Reading Level (dB $\mu$ V)	Factor (dB/m)	Measure Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB/m)	Detector	Polarization
*	9959.0	48.4	-1.6	46.8	68.2	-21.4	Peak	Horizontal
	11795.0	48.4	-2.0	46.4	74.0	-27.6	Peak	Horizontal
*	14251.5	47.4	3.0	50.4	68.2	-17.8	Peak	Horizontal
	15569.0	45.7	4.6	50.3	74.0	-23.7	Peak	Horizontal
*	9746.5	48.0	-2.1	45.9	68.2	-22.3	Peak	Vertical
	10970.5	48.4	-1.5	46.9	74.0	-27.1	Peak	Vertical
*	14175.0	47.1	3.7	50.8	68.2	-17.4	Peak	Vertical
	15688.0	45.5	4.8	50.3	74.0	-23.7	Peak	Vertical

Note 1: "\*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB $\mu$ V/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Arvin Ding
Test Date	2024-03-05	Test Mode	802.11be-EHT80 – Channel 122
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not shown in the report.		

Mark	Frequency (MHz)	Reading Level (dB $\mu$ V)	Factor (dB/m)	Measure Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB/m)	Detector	Polarization
*	10154.5	47.7	-1.6	46.1	68.2	-22.1	Peak	Horizontal
	11820.5	49.4	-1.8	47.6	74.0	-26.4	Peak	Horizontal
*	14175.0	46.2	3.7	49.9	68.2	-18.3	Peak	Horizontal
	15654.0	46.8	4.1	50.9	74.0	-23.1	Peak	Horizontal
*	9593.5	49.0	-1.9	47.1	68.2	-21.1	Peak	Vertical
	12092.5	49.0	-1.8	47.2	74.0	-26.8	Peak	Vertical
*	14175.0	47.0	3.7	50.7	68.2	-17.5	Peak	Vertical
	15773.0	45.7	4.9	50.6	74.0	-23.4	Peak	Vertical

Note 1: "\*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB $\mu$ V/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Arvin Ding
Test Date	2024-03-05	Test Mode	802.11be-EHT80 – Channel 138
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not shown in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10392.5	48.8	-1.4	47.4	68.2	-20.8	Peak	Horizontal
	11429.5	49.2	-1.5	47.7	74.0	-26.3	Peak	Horizontal
*	14064.5	46.6	2.9	49.5	68.2	-18.7	Peak	Horizontal
	15679.5	46.0	4.7	50.7	74.0	-23.3	Peak	Horizontal
*	9678.5	48.7	-2.0	46.7	68.2	-21.5	Peak	Vertical
	11701.5	49.4	-1.6	47.8	74.0	-26.2	Peak	Vertical
*	14260.0	46.6	3.1	49.7	68.2	-18.5	Peak	Vertical
	15705.0	46.0	4.9	50.9	74.0	-23.1	Peak	Vertical

Note 1: "\*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Arvin Ding
Test Date	2024-01-25 ~ 2024-01-26	Test Mode	802.11be-EHT80 – Channel 155
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not shown in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10171.5	48.7	-1.6	47.1	68.2	-21.1	Peak	Horizontal
*	14158.0	47.6	3.1	50.7	68.2	-17.5	Peak	Horizontal
	16181.0	46.5	5.2	51.7	74.0	-22.3	Peak	Horizontal
	16181.0	34.6	5.2	39.8	54.0	-14.2	Average	Horizontal
	17915.0	45.0	8.3	53.3	74.0	-20.7	Peak	Horizontal
	17915.0	32.9	8.3	41.2	54.0	-12.8	Average	Horizontal
*	10129.0	48.2	-1.4	46.8	68.2	-21.4	Peak	Vertical
*	14149.5	48.1	3.0	51.1	68.2	-17.1	Peak	Vertical
	15679.5	46.7	4.7	51.4	74.0	-22.6	Peak	Vertical
	15679.5	34.4	4.7	39.1	54.0	-14.9	Average	Vertical
	17906.5	45.2	8.2	53.4	74.0	-20.6	Peak	Vertical
	17906.5	33.2	8.2	41.4	54.0	-12.6	Average	Vertical

Note 1: "\*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)



Test Site	SIP-AC3	Test Engineer	Arvin Ding
Test Date	2024-01-25 ~ 2024-01-26	Test Mode	802.11be-EHT160 – Channel 50
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not shown in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9959.0	49.1	-1.6	47.5	68.2	-20.7	Peak	Horizontal
*	14124.0	47.2	2.9	50.1	68.2	-18.1	Peak	Horizontal
	15892.0	46.7	5.0	51.7	74.0	-22.3	Peak	Horizontal
	15892.0	34.2	5.0	39.2	54.0	-14.8	Average	Horizontal
	17983.0	43.3	9.9	53.2	74.0	-20.8	Peak	Horizontal
	17983.0	31.2	9.9	41.1	54.0	-12.9	Average	Horizontal
*	10384.0	48.8	-1.5	47.3	68.2	-20.9	Peak	Vertical
*	13733.0	48.5	1.8	50.3	68.2	-17.9	Peak	Vertical
	15781.5	46.5	5.0	51.5	74.0	-22.5	Peak	Vertical
	15781.5	34.6	5.0	39.6	54.0	-14.4	Average	Vertical
	17983.0	43.4	9.9	53.3	74.0	-20.7	Peak	Vertical
	17983.0	31.2	9.9	41.1	54.0	-12.9	Average	Vertical

Note 1: "\*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Arvin Ding
Test Date	2024-01-25 ~ 2024-01-26	Test Mode	802.11be-EHT160-Channel 114
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not shown in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10316.0	48.6	-1.1	47.5	68.2	-20.7	Peak	Horizontal
*	14226.0	48.2	3.0	51.2	68.2	-17.0	Peak	Horizontal
	15926.0	46.4	5.1	51.5	74.0	-22.5	Peak	Horizontal
	15926.0	33.8	5.1	38.9	54.0	-15.1	Average	Horizontal
	17966.0	43.2	9.4	52.6	74.0	-21.4	Peak	Horizontal
	17966.0	32.0	9.4	41.4	54.0	-12.6	Average	Horizontal
*	10001.5	48.7	-1.7	47.0	68.2	-21.2	Peak	Vertical
*	14175.0	47.2	3.7	50.9	68.2	-17.3	Peak	Vertical
	15713.5	47.0	4.8	51.8	74.0	-22.2	Peak	Vertical
	15713.5	34.1	4.8	38.9	54.0	-15.1	Average	Vertical
	17957.5	44.4	9.0	53.4	74.0	-20.6	Peak	Vertical
	17957.5	32.4	9.0	41.4	54.0	-12.6	Average	Vertical


Note 1: "\*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

**The Result of Radiated Emission below 1GHz:**

Site: SIP-AC3	Test Date: 2024-01-28
Limit: FCC_Part15.209_RSE(3m)	Engineer: Arvin Ding
Probe: VULB 9168_00997_25-2000MHz	Polarity: Horizontal
EUT: Tri-band Wi-Fi 7 Wireless AP	Power: AC 120V/60Hz
<b>Test Mode:</b> Transmit by 802.11a at 5745MHz	

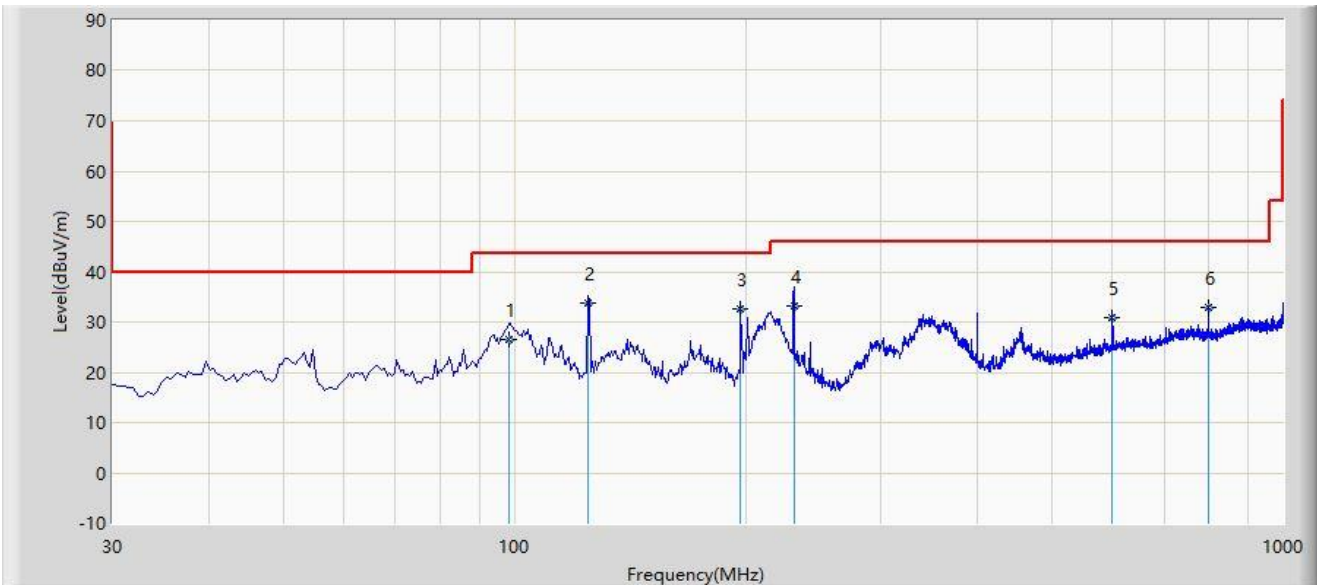

No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		98.385	26.437	13.274	-17.063	43.500	13.163	QP
2	*	124.575	33.863	17.687	-9.637	43.500	16.176	QP
3		196.840	32.710	17.692	-10.790	43.500	15.018	QP
4		231.275	33.047	17.434	-12.953	46.000	15.613	QP
5		599.875	30.779	5.247	-15.221	46.000	25.532	QP
6		800.180	32.813	4.895	-13.187	46.000	27.918	QP

Note 1: " \* ", means this data is the worst emission level.


Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Note 4: The amplitude of radiated emissions (frequency range from 9kHz to 30MHz and 18GHz to 40GHz) is that proximity to ambient noise, which also are attenuated more than 20 dB below the permissible value.

Therefore, the data is not presented in the report.

Site: SIP-AC3	Test Date: 2024-01-28
Limit: FCC_Part15.209_RSE(3m)	Engineer: Arvin Ding
Probe: VULB 9168_00997_25-2000MHz	Polarity: Vertical
EUT: Tri-band Wi-Fi 7 Wireless AP	Power: AC 120V/60Hz
<b>Test Mode:</b> Transmit by 802.11a at 5745MHz	

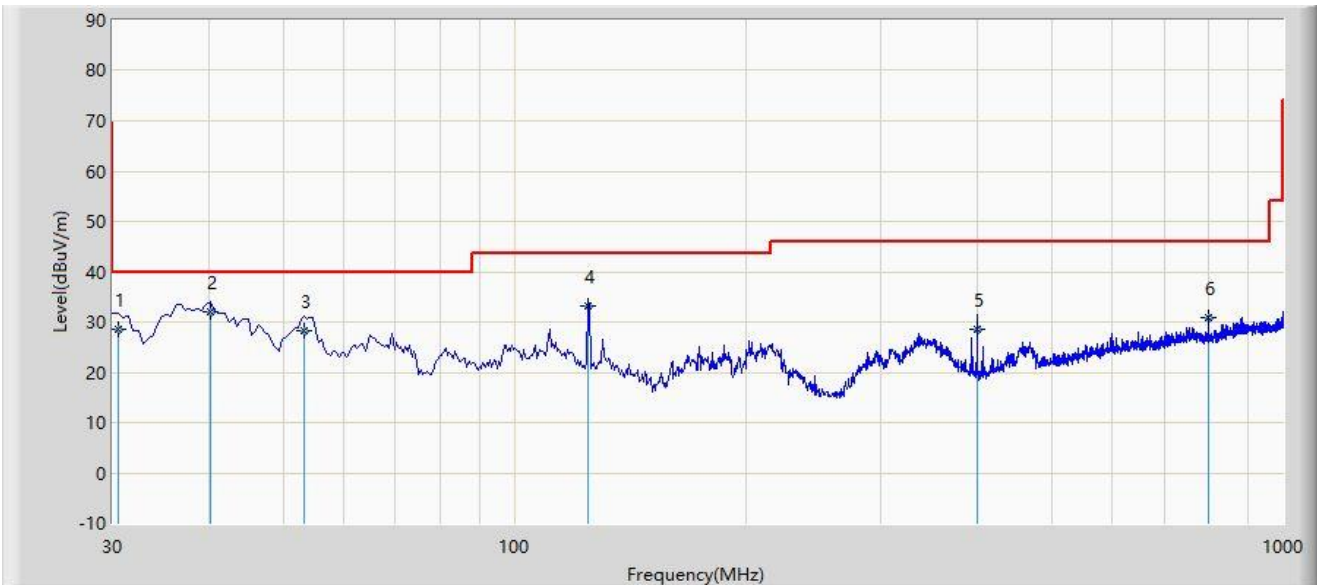

No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		30.485	28.441	12.014	-11.559	40.000	16.427	QP
2	*	40.185	32.055	14.520	-7.945	40.000	17.535	QP
3		53.280	28.271	10.547	-11.729	40.000	17.724	QP
4		124.575	33.050	16.874	-10.450	43.500	16.176	QP
5		400.055	28.499	7.634	-17.501	46.000	20.864	QP
6		800.180	30.788	2.870	-15.212	46.000	27.918	QP

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).


Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Note 4: The amplitude of radiated emissions (frequency range from 9kHz to 30MHz and 18GHz to 40GHz) is that proximity to ambient noise, which also are attenuated more than 20 dB below the permissible value.

Therefore, the data is not presented in the report.

### A.8 Radiated Restricted Band Edge Test Result

Site: SIP-AC3	Test Date: 2024-01-24
Limit: FCC_5G_RE(3m)	Engineer: Arvin Ding
Probe: HF907_102861_1-18GHz	Polarity: Horizontal
EUT: Tri-band Wi-Fi 7 Wireless AP	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at 5180MHz	

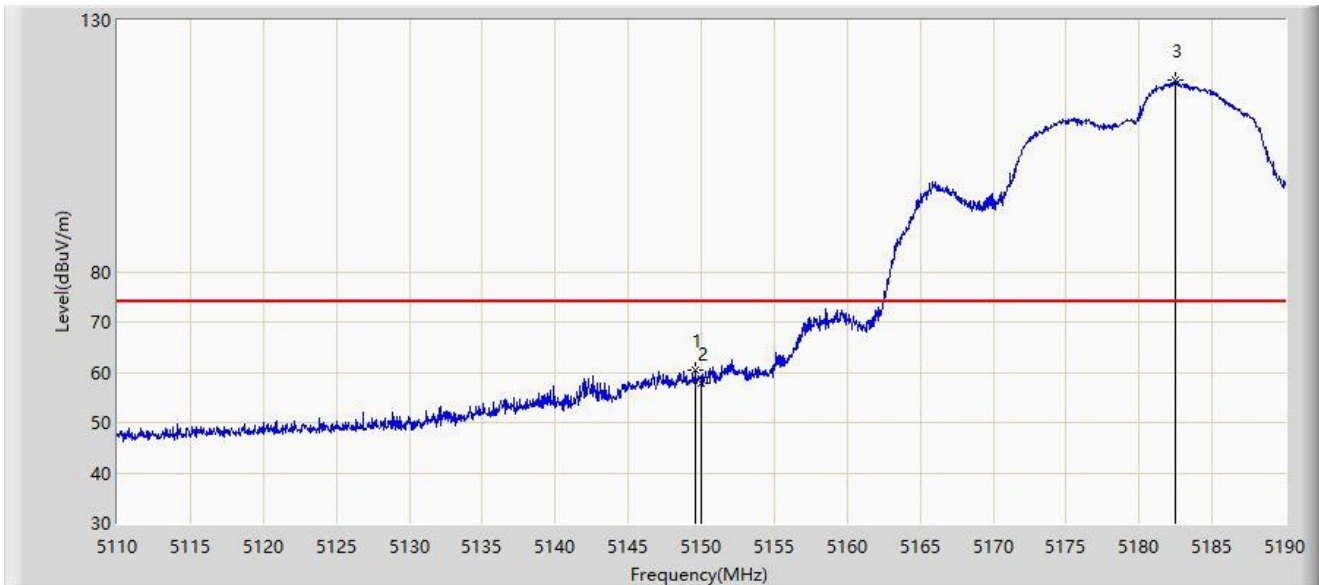


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	5149.560	60.332	63.689	-13.668	74.000	-3.357	PK
2		5150.000	57.830	61.076	-16.170	74.000	-3.246	PK
3		5182.480	118.254	79.605	N/A	N/A	38.648	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2024-01-24
Limit: FCC_5G_RE(3m)	Engineer: Arvin Ding
Probe: HF907_102861_1-18GHz	Polarity: Horizontal
EUT: Tri-band Wi-Fi 7 Wireless AP	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at 5180MHz	

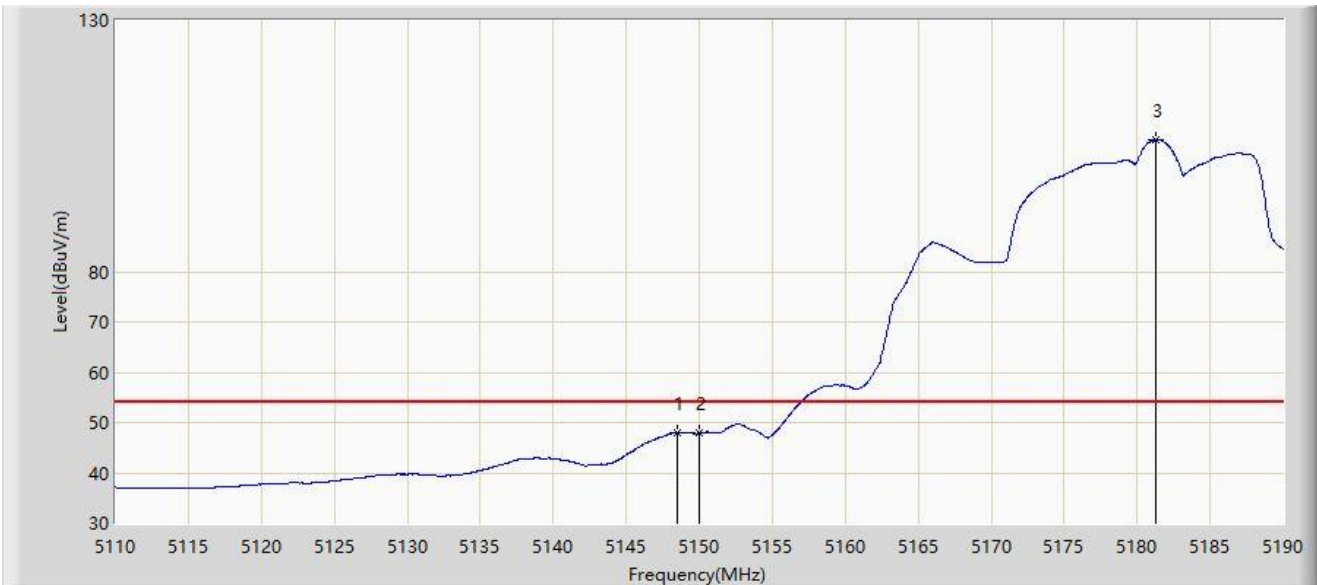


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	5148.480	48.005	51.568	-5.995	54.000	-3.563	AV
2		5150.000	47.858	51.104	-6.142	54.000	-3.246	AV
3		5181.240	106.317	65.451	N/A	N/A	40.866	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2024-01-24
Limit: FCC_5G_RE(3m)	Engineer: Arvin Ding
Probe: HF907_102861_1-18GHz	Polarity: Vertical
EUT: Tri-band Wi-Fi 7 Wireless AP	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at 5180MHz	

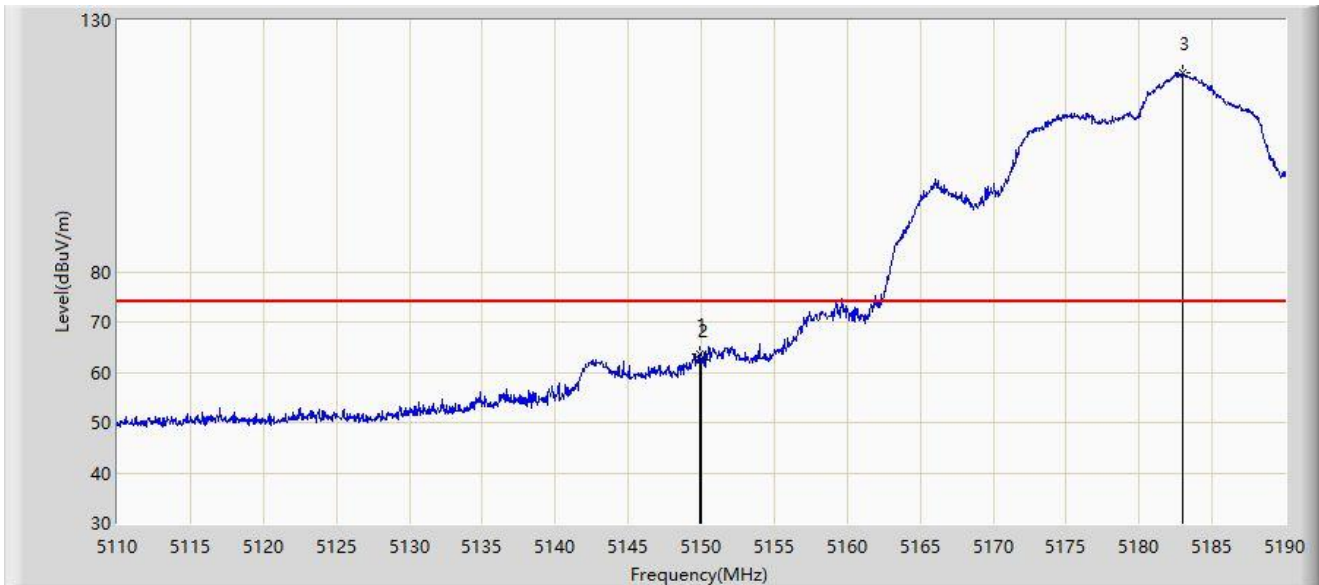


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	5149.880	63.558	66.844	-10.442	74.000	-3.286	PK
2		5150.000	62.605	65.851	-11.395	74.000	-3.246	PK
3		5183.000	119.469	81.892	N/A	N/A	37.577	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2024-01-24
Limit: FCC_5G_RE(3m)	Engineer: Arvin Ding
Probe: HF907_102861_1-18GHz	Polarity: Vertical
EUT: Tri-band Wi-Fi 7 Wireless AP	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at 5180MHz	

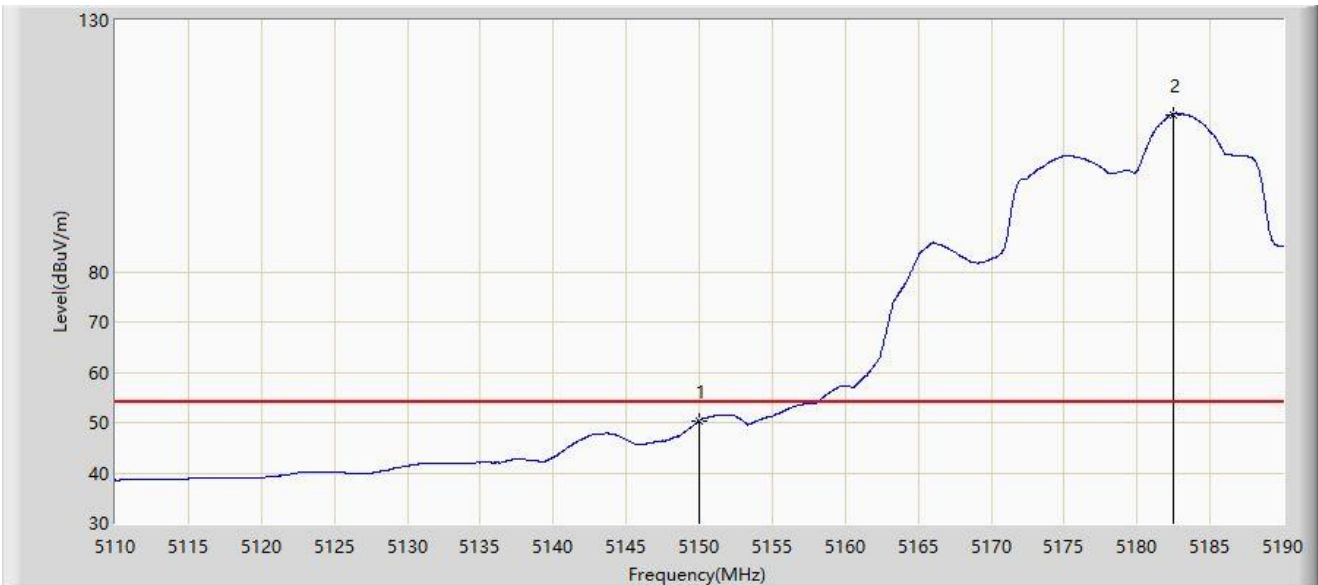

No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5150.000	50.309	53.555	-3.691	54.000	-3.246	AV
2		5182.480	111.286	72.637	N/A	N/A	38.648	AV


Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).



Site: SIP-AC3	Test Date: 2024-02-23
Limit: FCC_5G_RE(3m)	Engineer: Arvin Ding
Probe: HF907_102861_1-18GHz	Polarity: Horizontal
EUT: Tri-band Wi-Fi 7 Wireless AP	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at 5320MHz	

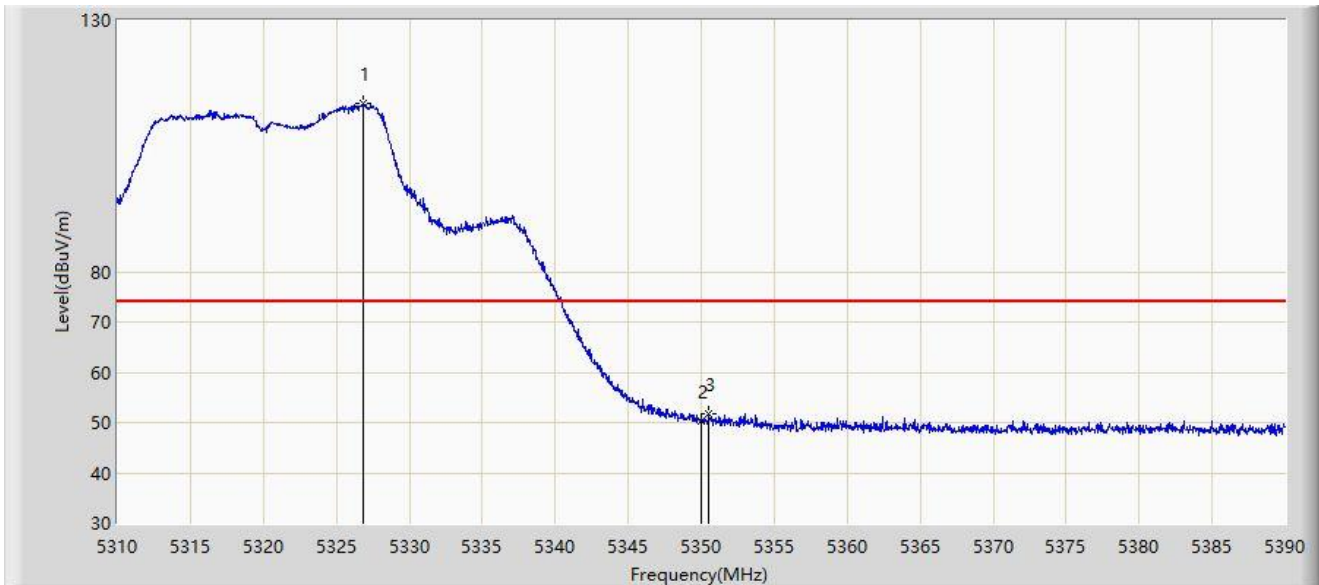


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		5326.800	113.574	74.668	N/A	N/A	38.906	PK
2		5350.000	50.185	51.589	-23.815	74.000	-1.404	PK
3	*	5350.520	51.651	53.332	-22.349	74.000	-1.681	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2024-02-23
Limit: FCC_5G_RE(3m)	Engineer: Arvin Ding
Probe: HF907_102861_1-18GHz	Polarity: Horizontal
EUT: Tri-band Wi-Fi 7 Wireless AP	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at 5320MHz	

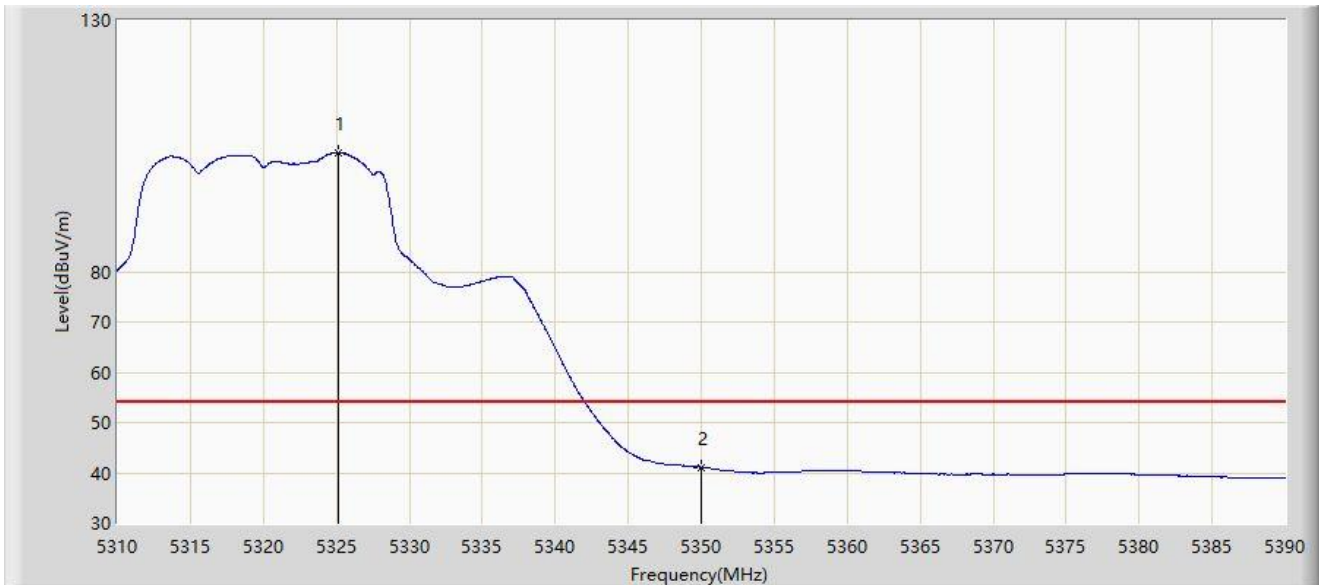


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5325.120	103.670	64.785	N/A	N/A	38.884	AV
2	*	5350.000	41.136	42.540	-12.864	54.000	-1.404	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2024-02-23
Limit: FCC_5G_RE(3m)	Engineer: Arvin Ding
Probe: HF907_102861_1-18GHz	Polarity: Vertical
EUT: Tri-band Wi-Fi 7 Wireless AP	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at 5320MHz	

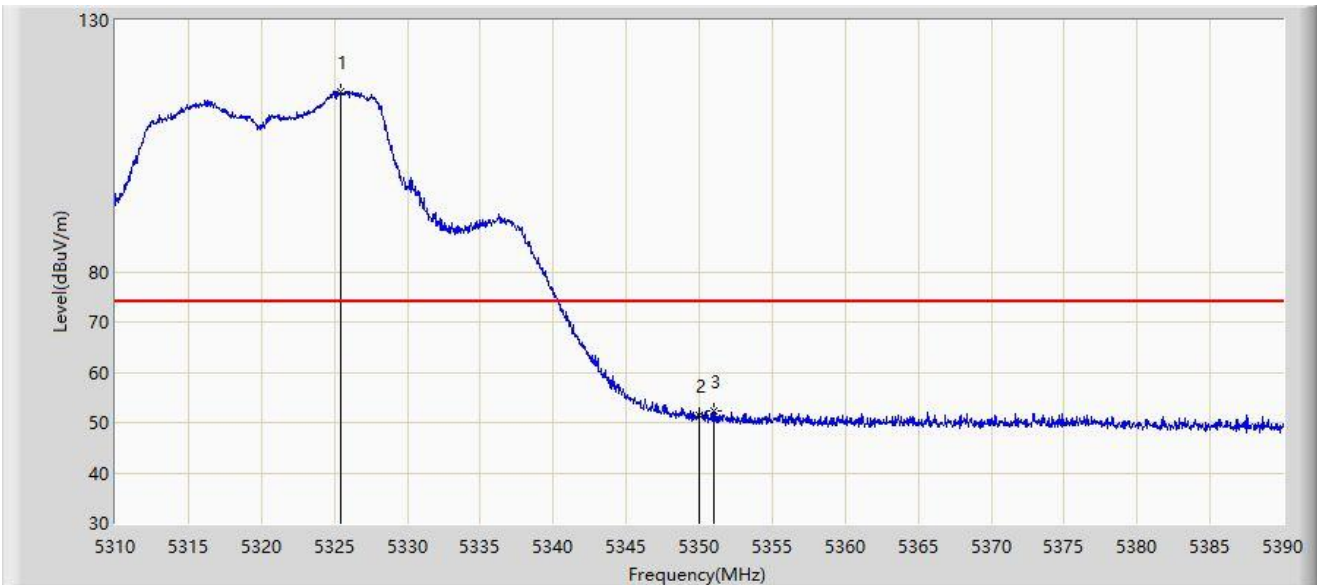


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5325.480	115.913	77.212	N/A	N/A	38.701	PK
2		5350.000	51.367	52.771	-22.633	74.000	-1.404	PK
3	*	5351.000	52.401	54.316	-21.599	74.000	-1.916	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2024-02-23
Limit: FCC_5G_RE(3m)	Engineer: Arvin Ding
Probe: HF907_102861_1-18GHz	Polarity: Vertical
EUT: Tri-band Wi-Fi 7 Wireless AP	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at 5320MHz	

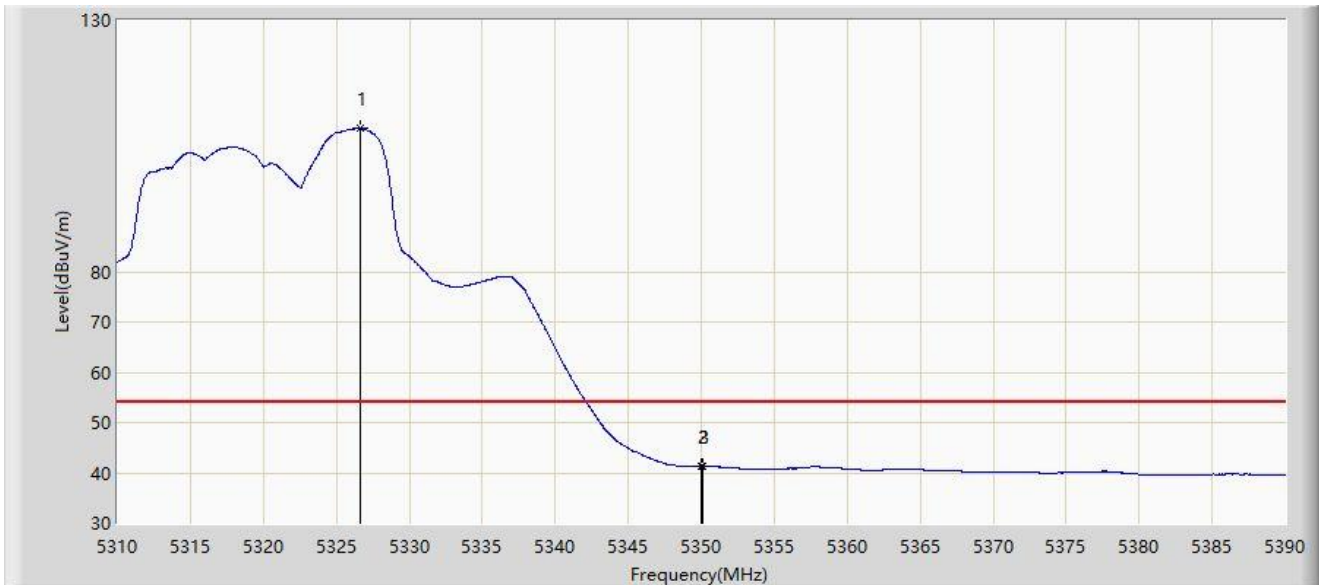


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5326.640	108.502	69.684	N/A	N/A	38.818	AV
2		5350.000	41.312	42.716	-12.688	54.000	-1.404	AV
3	*	5350.080	41.316	42.762	-12.684	54.000	-1.447	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2024-02-23
Limit: FCC_5G_RE(3m)	Engineer: Arvin Ding
Probe: HF907_102861_1-18GHz	Polarity: Horizontal
EUT: Tri-band Wi-Fi 7 Wireless AP	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at 5500MHz	

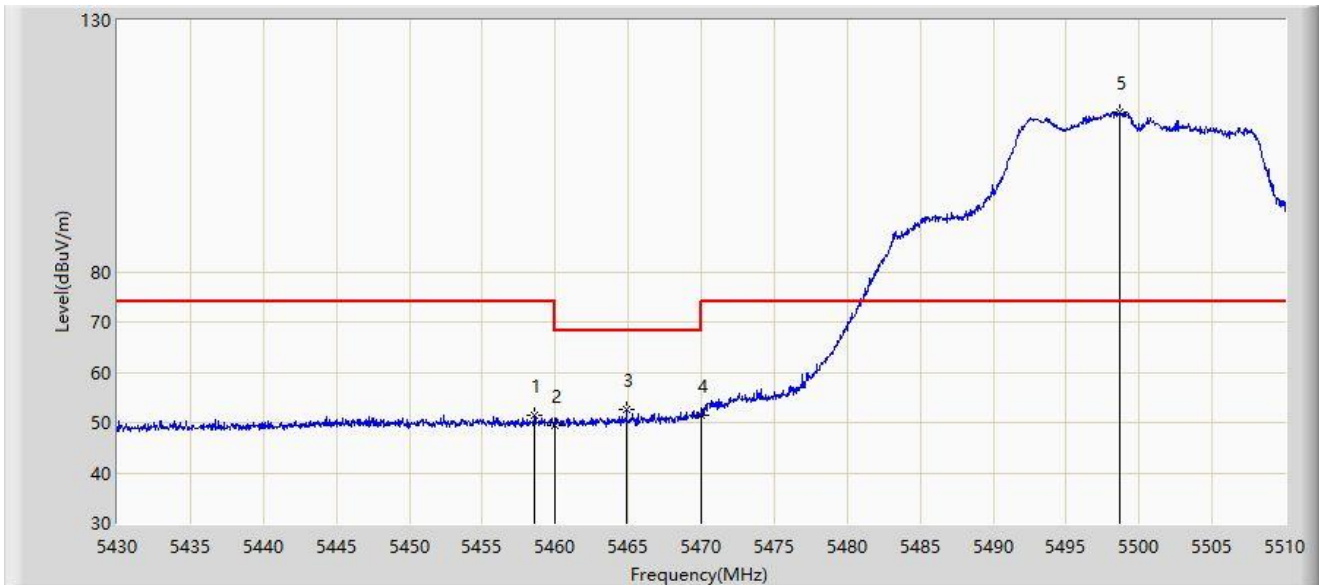


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		5458.560	51.546	55.001	-22.454	74.000	-3.455	PK
2		5460.000	49.366	52.709	-18.834	68.200	-3.343	PK
3	*	5464.880	52.467	55.370	-15.733	68.200	-2.903	PK
4		5470.000	51.333	52.943	-16.867	68.200	-1.610	PK
5		5498.680	111.599	73.928	N/A	N/A	37.671	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2024-02-23
Limit: FCC_5G_RE(3m)	Engineer: Arvin Ding
Probe: HF907_102861_1-18GHz	Polarity: Horizontal
EUT: Tri-band Wi-Fi 7 Wireless AP	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at 5500MHz	

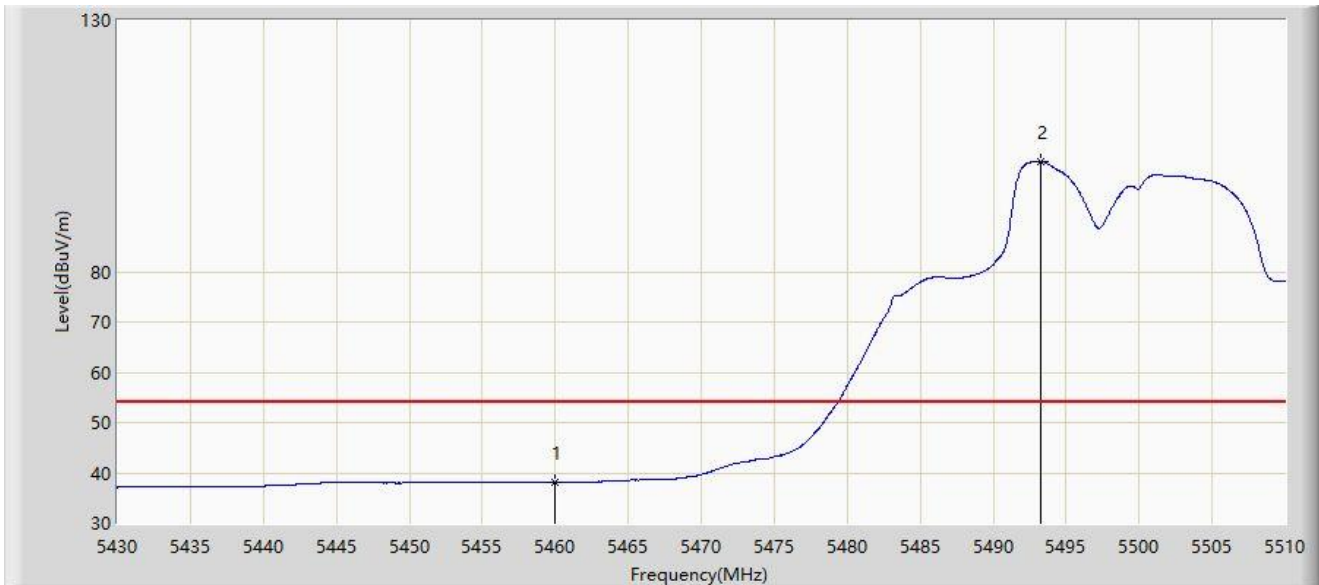


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	5460.000	38.074	41.417	-15.926	54.000	-3.343	AV
2		5493.280	101.905	58.452	N/A	N/A	43.453	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2024-02-23
Limit: FCC_5G_RE(3m)	Engineer: Arvin Ding
Probe: HF907_102861_1-18GHz	Polarity: Vertical
EUT: Tri-band Wi-Fi 7 Wireless AP	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at 5500MHz	

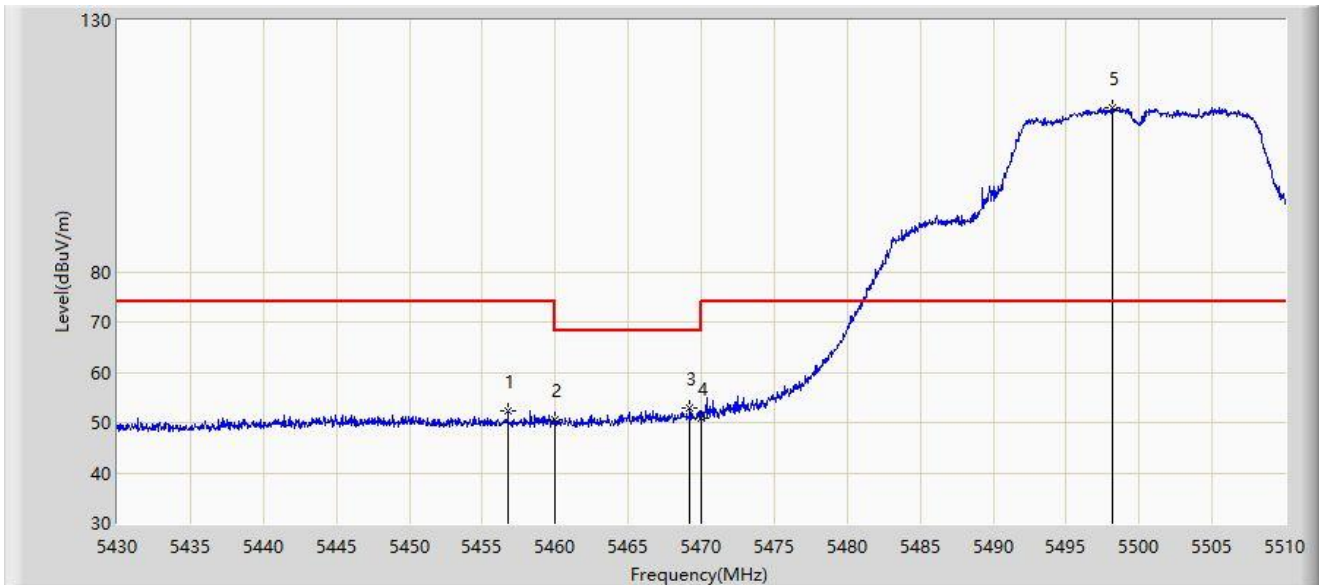


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5456.760	52.460	56.057	-21.540	74.000	-3.597	PK
2		5460.000	50.504	53.847	-17.696	68.200	-3.343	PK
3	*	5469.240	52.766	54.589	-15.434	68.200	-1.823	PK
4		5470.000	50.925	52.535	-17.275	68.200	-1.610	PK
5		5498.200	112.501	74.840	N/A	N/A	37.661	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2024-02-23
Limit: FCC_5G_RE(3m)	Engineer: Arvin Ding
Probe: HF907_102861_1-18GHz	Polarity: Vertical
EUT: Tri-band Wi-Fi 7 Wireless AP	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at 5500MHz	

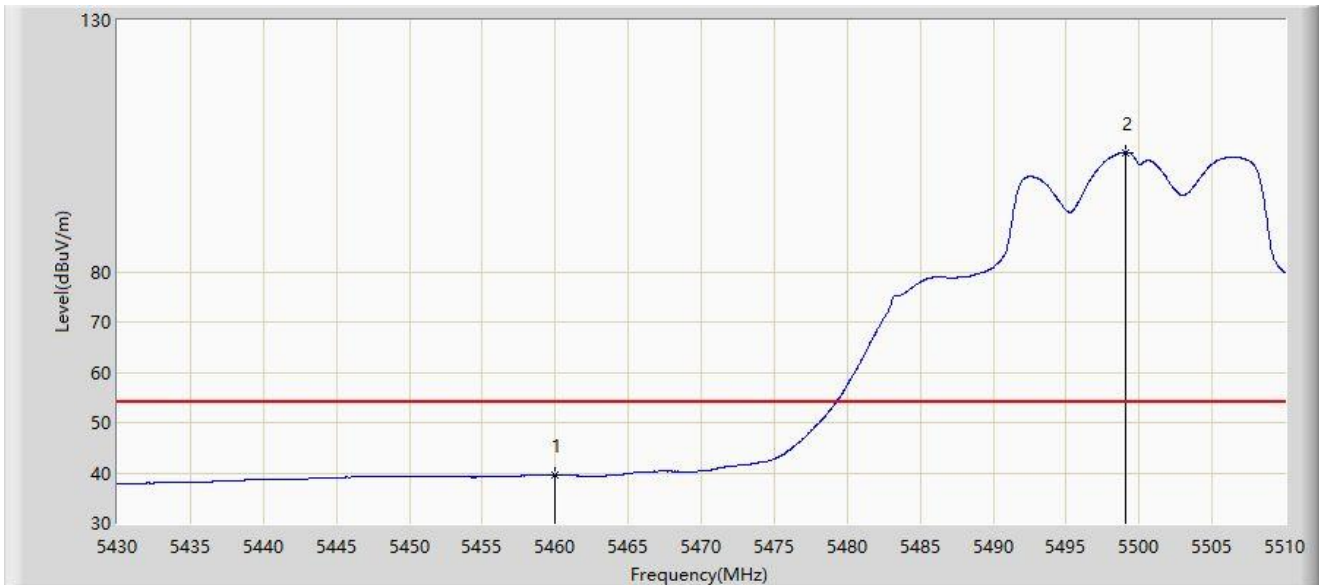

No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	5460.000	39.556	42.899	-14.444	54.000	-3.343	AV
2		5499.040	103.767	66.015	N/A	N/A	37.752	AV


Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).



Site: SIP-AC3	Test Date: 2024-02-23
Limit: FCC_5G_RE(3m)	Engineer: Arvin Ding
Probe: HF907_102861_1-18GHz	Polarity: Horizontal
EUT: Tri-band Wi-Fi 7 Wireless AP	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at 5700MHz	

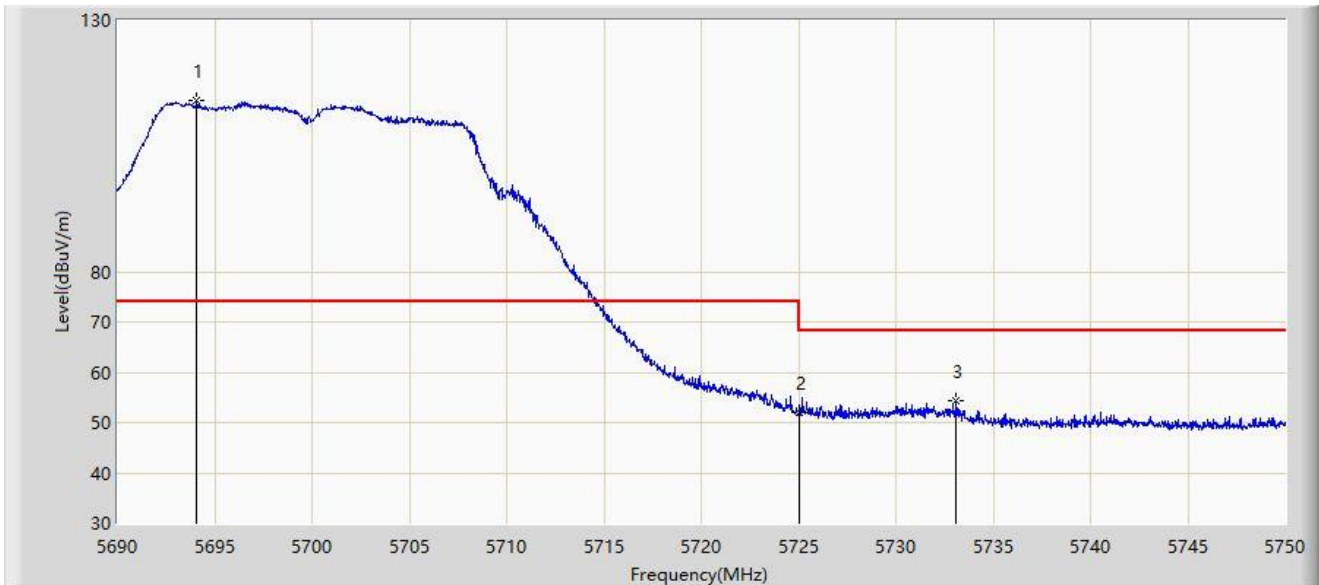


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		5694.080	114.178	72.972	N/A	N/A	41.207	PK
2		5725.000	52.167	54.002	-16.033	68.200	-1.836	PK
3	*	5733.110	54.445	58.555	-13.755	68.200	-4.110	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2024-02-23
Limit: FCC_5G_RE(3m)	Engineer: Arvin Ding
Probe: HF907_102861_1-18GHz	Polarity: Vertical
EUT: Tri-band Wi-Fi 7 Wireless AP	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at 5700MHz	

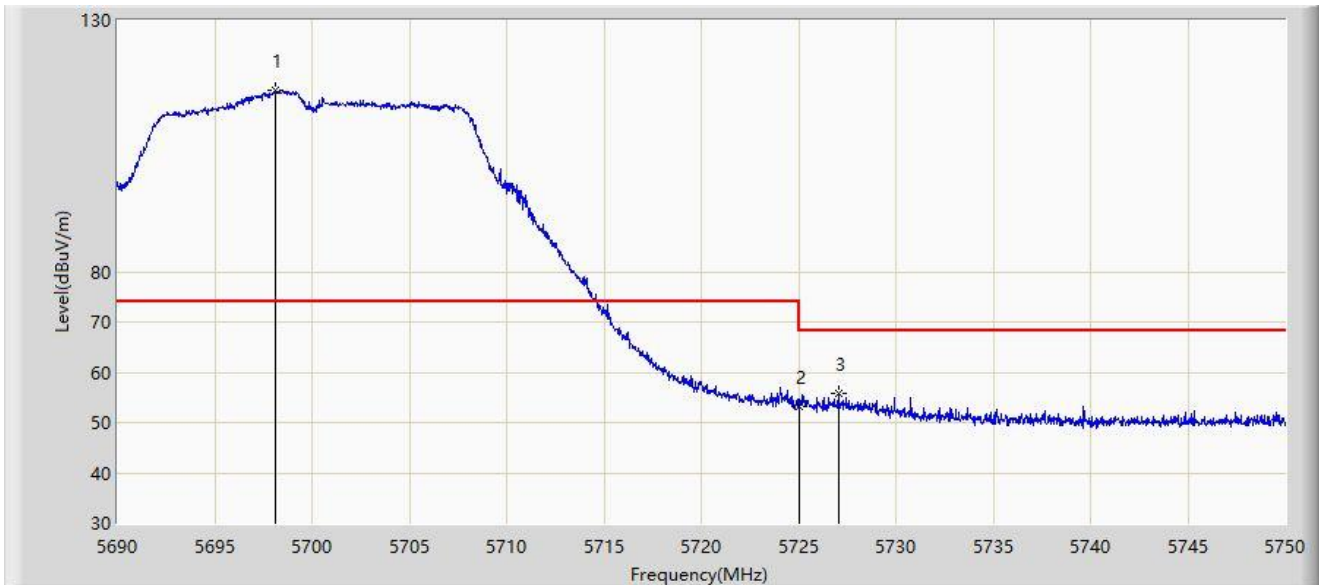


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		5698.100	116.142	80.154	N/A	N/A	35.989	PK
2		5725.000	53.084	54.919	-15.116	68.200	-1.836	PK
3	*	5727.050	55.734	58.559	-12.466	68.200	-2.825	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2024-01-25
Limit: FCC_5.8G_RE(3m)	Engineer: Arvin Ding
Probe: HF907_102861_1-18GHz	Polarity: Horizontal
EUT: Tri-band Wi-Fi 7 Wireless AP	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at 5745MHz	

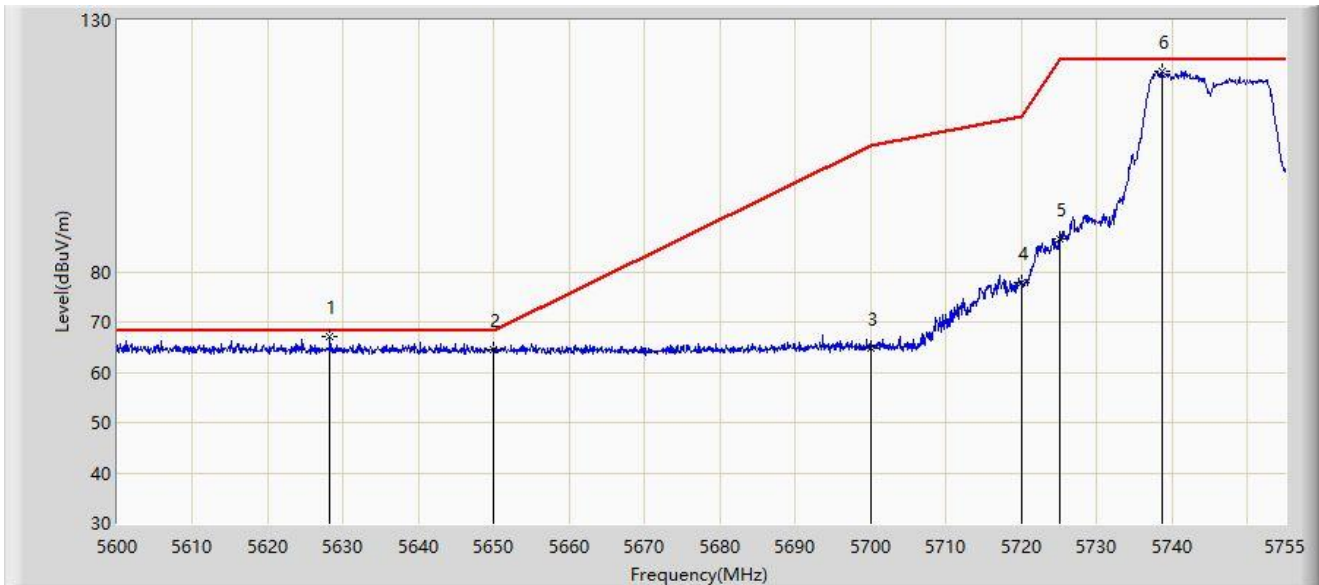


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5628.210	66.971	74.259	-1.229	68.200	-7.287	PK
2		5650.000	64.486	71.806	-3.714	68.200	-7.319	PK
3		5700.000	64.898	72.072	-40.302	105.200	-7.174	PK
4		5720.000	77.738	85.210	-33.062	110.800	-7.472	PK
5		5725.000	86.608	94.069	-35.592	122.200	-7.461	PK
6		5738.725	119.930	127.447	N/A	N/A	-7.517	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2024-01-25
Limit: FCC_5.8G_RE(3m)	Engineer: Arvin Ding
Probe: HF907_102861_1-18GHz	Polarity: Vertical
EUT: Tri-band Wi-Fi 7 Wireless AP	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at 5745MHz	

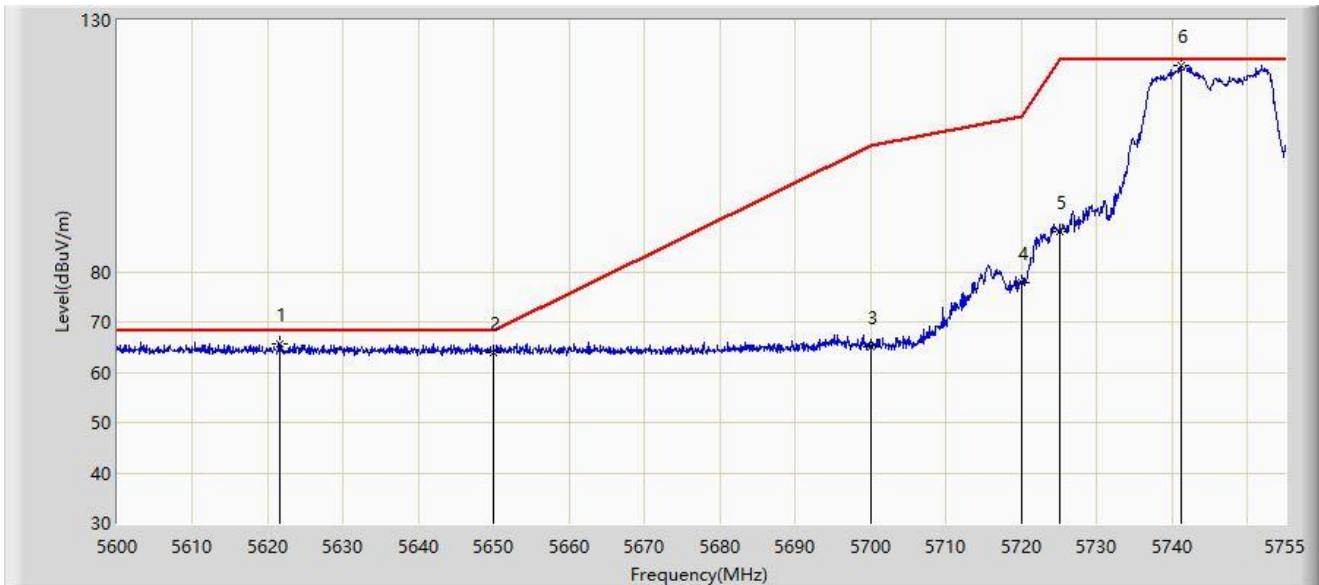


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5621.623	65.571	72.837	-2.629	68.200	-7.266	PK
2		5650.000	63.990	71.310	-4.210	68.200	-7.319	PK
3		5700.000	65.183	72.357	-40.017	105.200	-7.174	PK
4		5720.000	77.950	85.422	-32.850	110.800	-7.472	PK
5		5725.000	87.901	95.362	-34.299	122.200	-7.461	PK
6		5741.205	121.128	128.656	N/A	N/A	-7.528	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2024-01-25
Limit: FCC_5.8G_RE(3m)	Engineer: Arvin Ding
Probe: HF907_102861_1-18GHz	Polarity: Horizontal
EUT: Tri-band Wi-Fi 7 Wireless AP	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at 5825MHz	

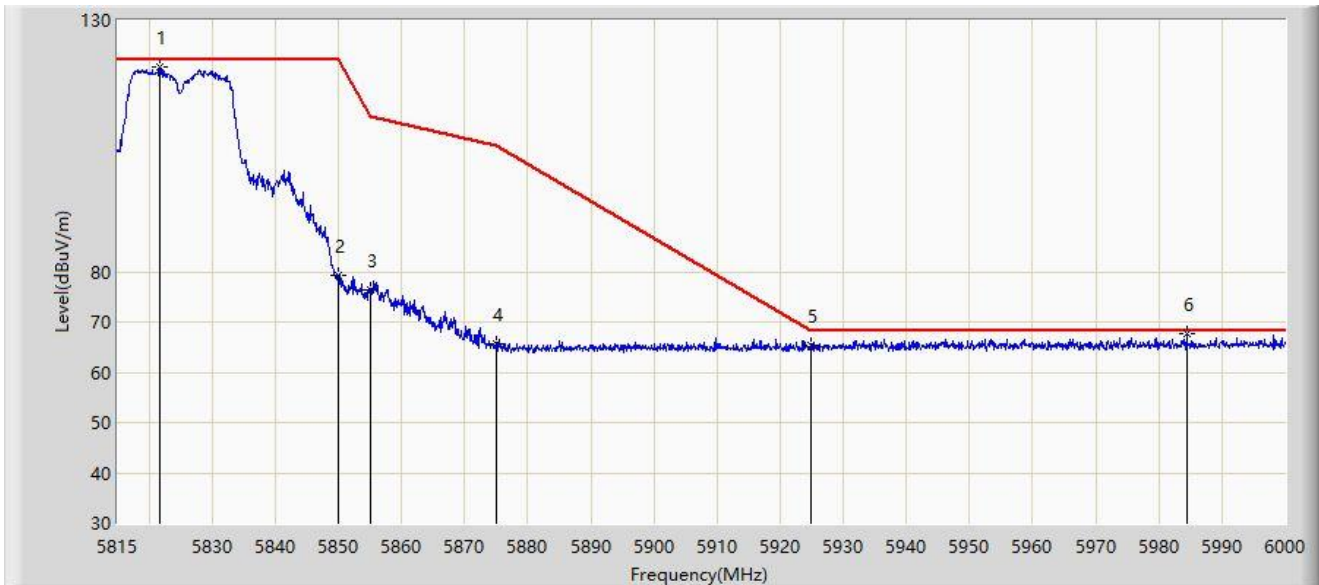


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		5821.752	120.611	127.908	N/A	N/A	-7.297	PK
2		5850.000	79.178	86.415	-43.022	122.200	-7.237	PK
3		5855.000	76.279	83.497	-34.521	110.800	-7.217	PK
4		5875.000	65.638	72.990	-39.562	105.200	-7.352	PK
5		5925.000	65.418	72.544	-2.782	68.200	-7.126	PK
6	*	5984.368	67.821	74.809	-0.379	68.200	-6.988	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2024-01-25
Limit: FCC_5.8G_RE(3m)	Engineer: Arvin Ding
Probe: HF907_102861_1-18GHz	Polarity: Vertical
EUT: Tri-band Wi-Fi 7 Wireless AP	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at 5825MHz	

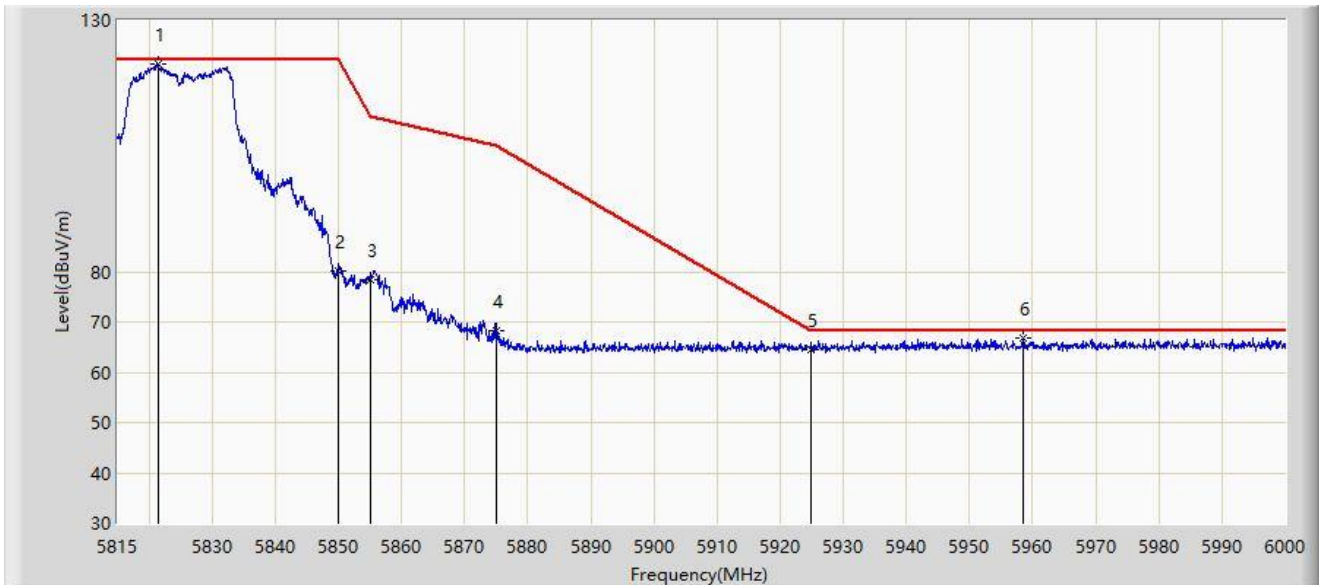


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		5821.567	121.424	128.722	N/A	N/A	-7.298	PK
2		5850.000	80.008	87.245	-42.192	122.200	-7.237	PK
3		5855.000	78.484	85.702	-32.316	110.800	-7.217	PK
4		5875.000	68.328	75.680	-36.872	105.200	-7.352	PK
5		5925.000	64.597	71.723	-3.603	68.200	-7.126	PK
6	*	5958.467	66.840	73.810	-1.360	68.200	-6.970	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2024-01-24
Limit: FCC_5G_RE(3m)	Engineer: Arvin Ding
Probe: HF907_102861_1-18GHz	Polarity: Horizontal
EUT: Tri-band Wi-Fi 7 Wireless AP	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at 5180MHz	

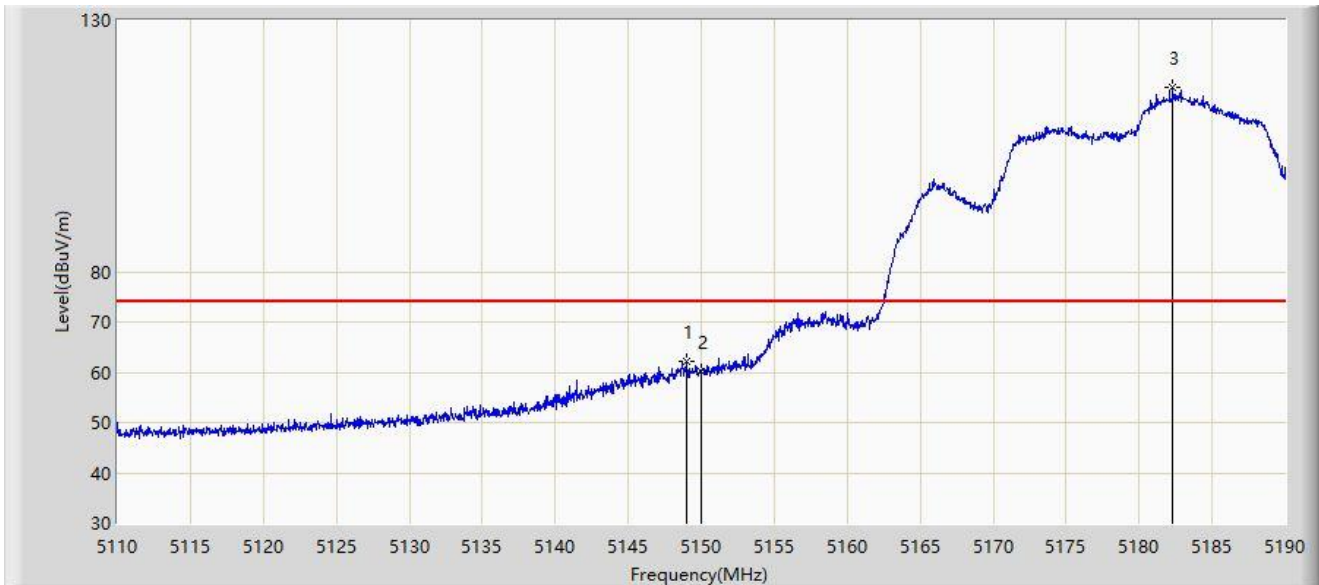

No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	5149.000	62.132	65.593	-11.868	74.000	-3.461	PK
2		5150.000	60.115	63.361	-13.885	74.000	-3.246	PK
3		5182.280	116.688	77.627	N/A	N/A	39.061	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2024-01-24
Limit: FCC_5G_RE(3m)	Engineer: Arvin Ding
Probe: HF907_102861_1-18GHz	Polarity: Horizontal
EUT: Tri-band Wi-Fi 7 Wireless AP	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at 5180MHz	



No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	5150.000	48.036	51.282	-5.964	54.000	-3.246	AV
2		5182.120	107.085	67.717	N/A	N/A	39.368	AV


Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).



Site: SIP-AC3	Test Date: 2024-01-24
Limit: FCC_5G_RE(3m)	Engineer: Arvin Ding
Probe: HF907_102861_1-18GHz	Polarity: Vertical
EUT: Tri-band Wi-Fi 7 Wireless AP	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at 5180MHz	

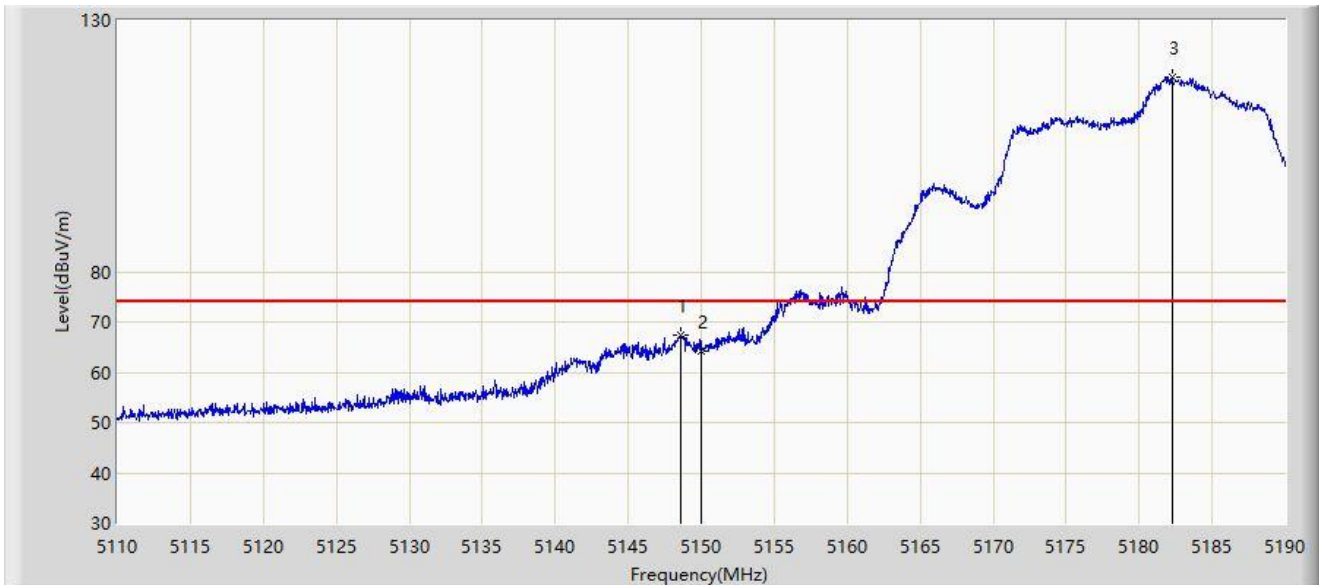

No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	5148.640	67.491	71.022	-6.509	74.000	-3.531	PK
2		5150.000	64.166	67.412	-9.834	74.000	-3.246	PK
3		5182.280	118.722	79.661	N/A	N/A	39.061	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2024-01-24
Limit: FCC_5G_RE(3m)	Engineer: Arvin Ding
Probe: HF907_102861_1-18GHz	Polarity: Vertical
EUT: Tri-band Wi-Fi 7 Wireless AP	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at 5180MHz	




No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	5150.000	52.565	55.811	-1.435	54.000	-3.246	AV
2		5182.120	107.873	68.505	N/A	N/A	39.368	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2024-02-23
Limit: FCC_5G_RE(3m)	Engineer: Arvin Ding
Probe: HF907_102861_1-18GHz	Polarity: Horizontal
EUT: Tri-band Wi-Fi 7 Wireless AP	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at 5320MHz	

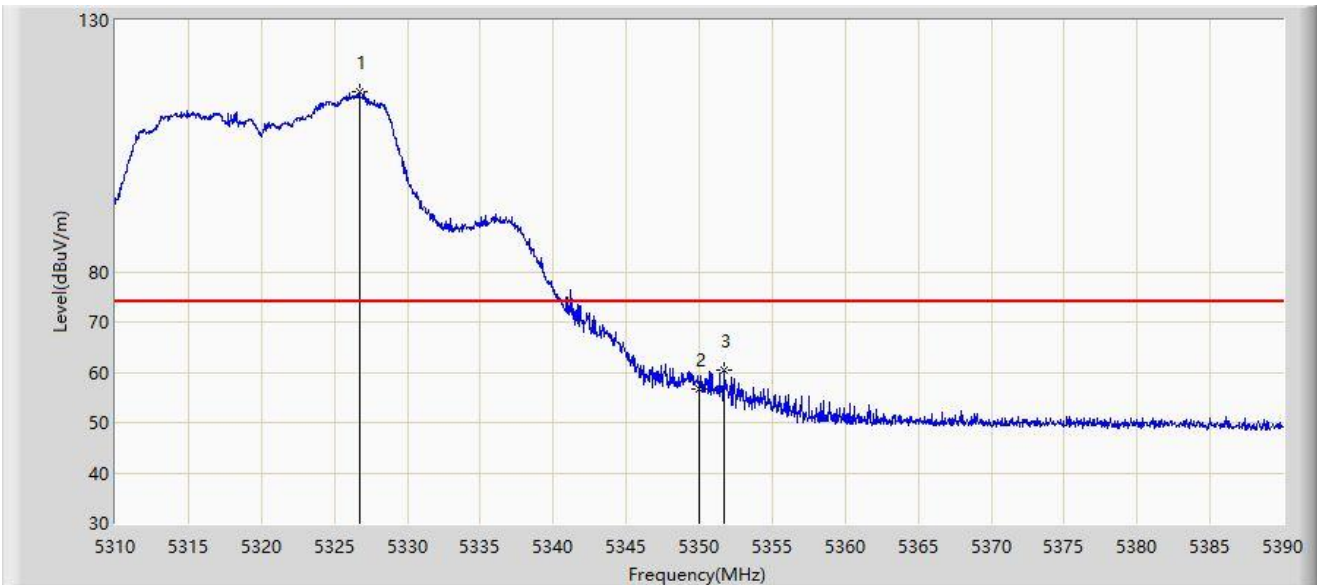


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5326.720	115.914	77.052	N/A	N/A	38.862	PK
2		5350.000	56.775	58.179	-17.225	74.000	-1.404	PK
3	*	5351.720	60.385	62.593	-13.615	74.000	-2.208	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2024-02-23
Limit: FCC_5G_RE(3m)	Engineer: Arvin Ding
Probe: HF907_102861_1-18GHz	Polarity: Horizontal
EUT: Tri-band Wi-Fi 7 Wireless AP	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at 5320MHz	

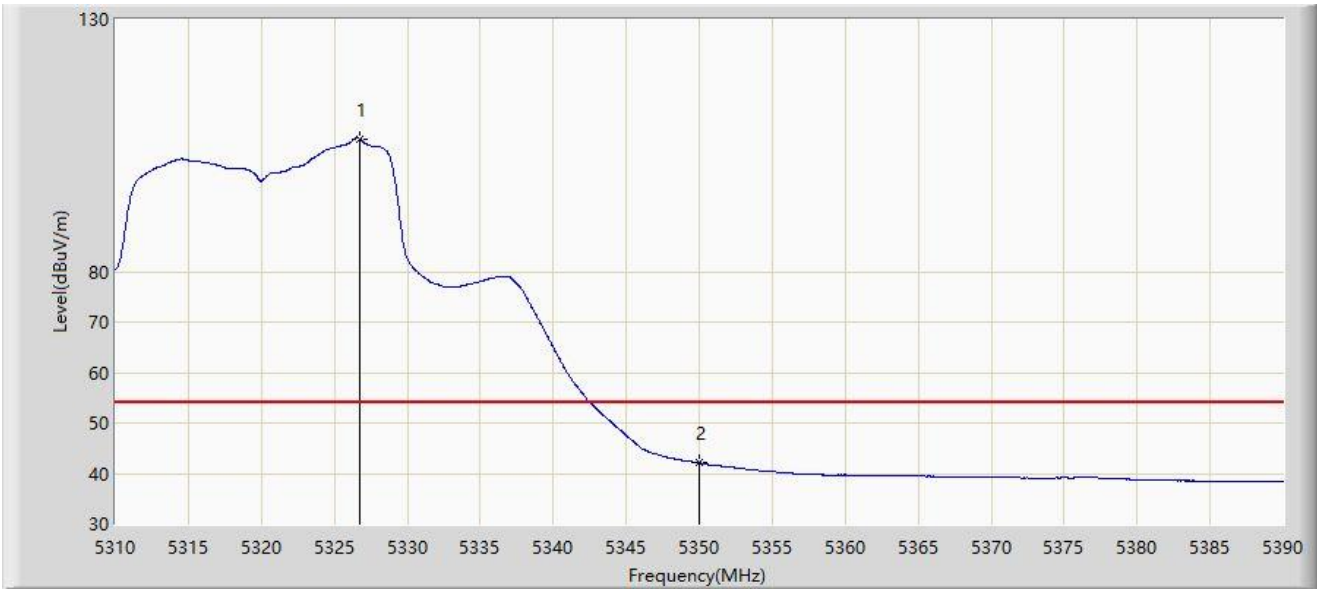


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5326.760	106.254	67.370	N/A	N/A	38.884	AV
2	*	5350.000	42.103	43.507	-11.897	54.000	-1.404	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2024-02-23
Limit: FCC_5G_RE(3m)	Engineer: Arvin Ding
Probe: HF907_102861_1-18GHz	Polarity: Vertical
EUT: Tri-band Wi-Fi 7 Wireless AP	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at 5320MHz	

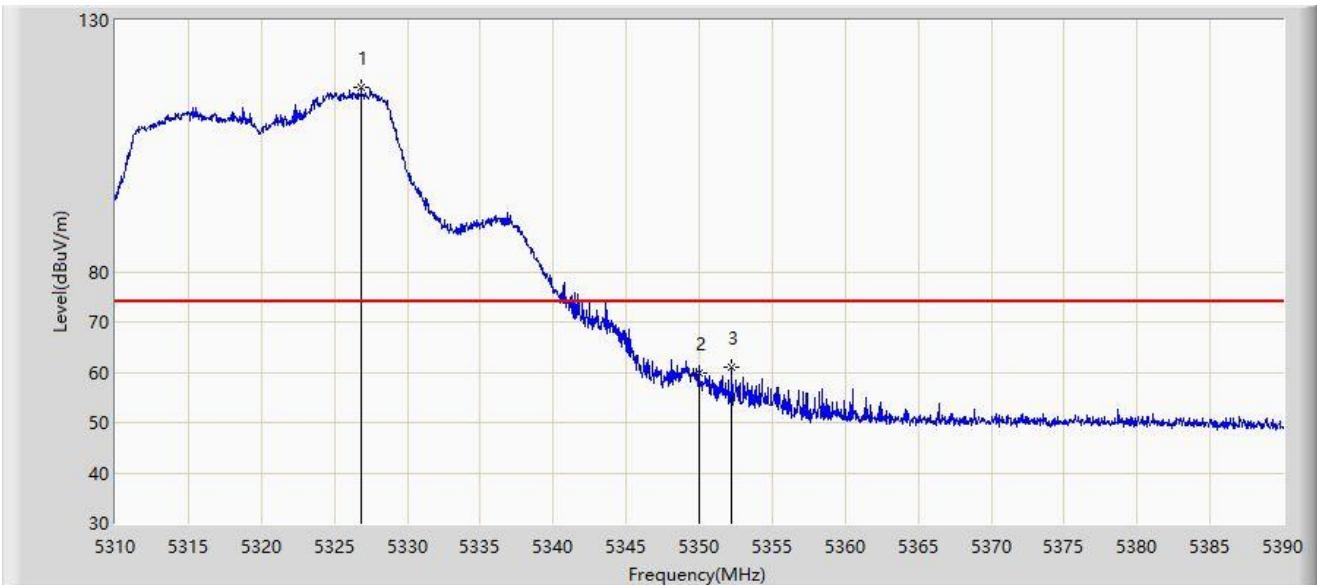


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		5326.840	116.782	77.854	N/A	N/A	38.928	PK
2		5350.000	59.913	61.317	-14.087	74.000	-1.404	PK
3	*	5352.240	60.974	63.340	-13.026	74.000	-2.365	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2024-02-23
Limit: FCC_5G_RE(3m)	Engineer: Arvin Ding
Probe: HF907_102861_1-18GHz	Polarity: Vertical
EUT: Tri-band Wi-Fi 7 Wireless AP	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at 5320MHz	

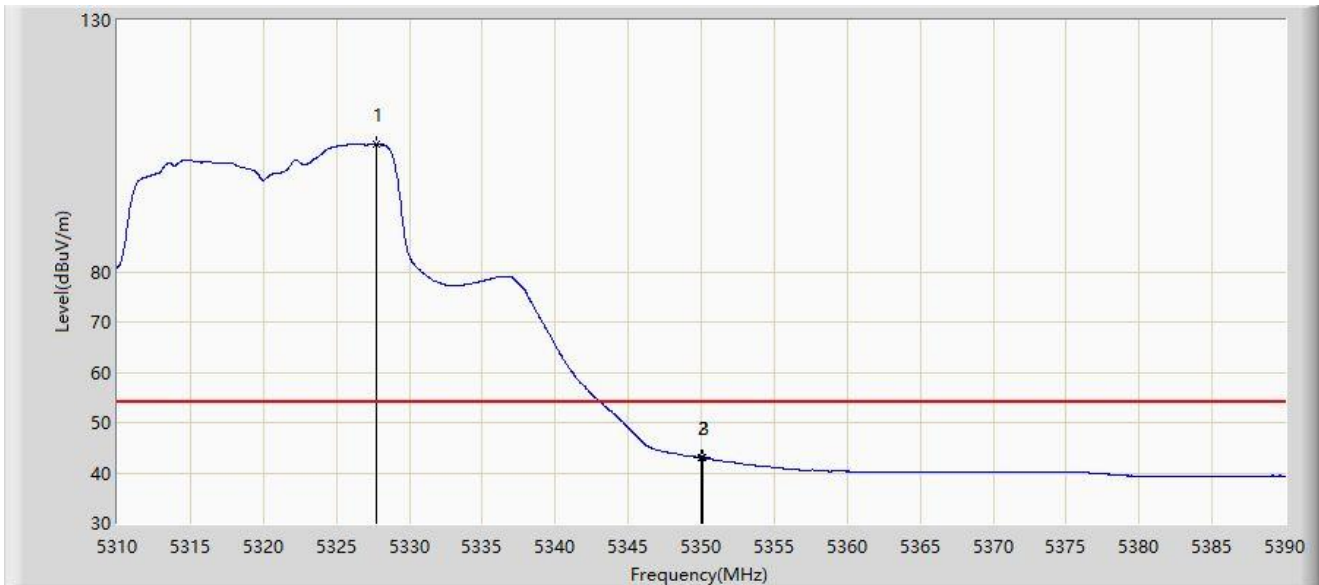


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5327.760	105.322	65.581	N/A	N/A	39.741	AV
2		5350.000	43.029	44.433	-10.971	54.000	-1.404	AV
3	*	5350.080	43.072	44.518	-10.928	54.000	-1.447	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2024-02-23
Limit: FCC_5G_RE(3m)	Engineer: Arvin Ding
Probe: HF907_102861_1-18GHz	Polarity: Horizontal
EUT: Tri-band Wi-Fi 7 Wireless AP	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at 5500MHz	

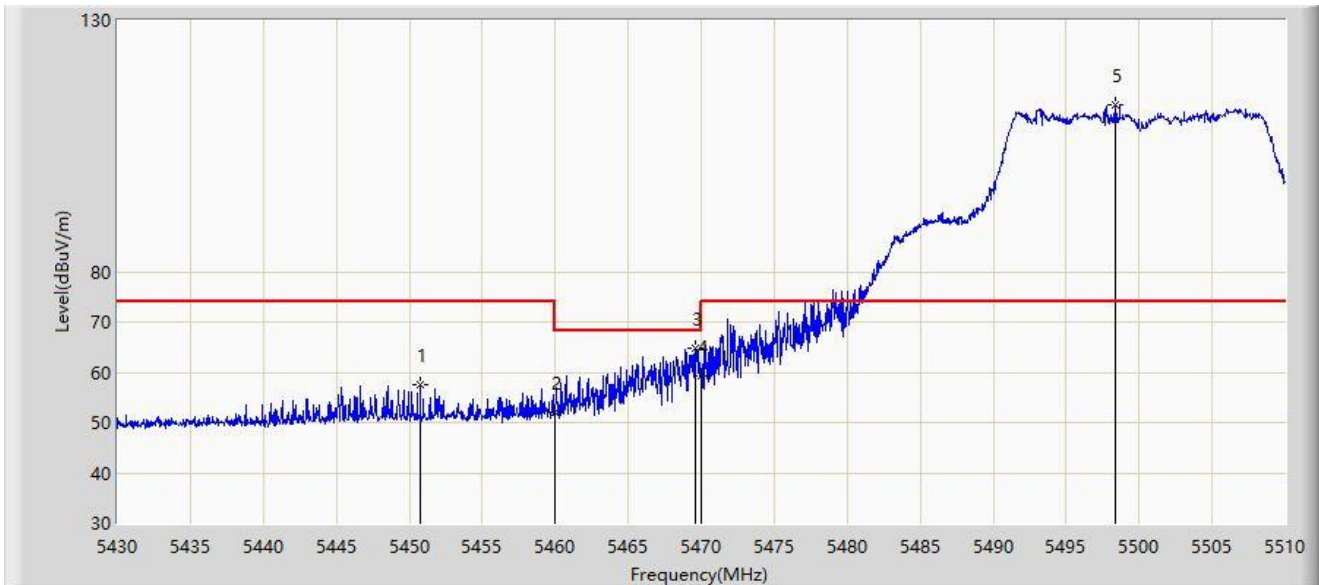


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5450.760	57.493	61.399	-16.507	74.000	-3.906	PK
2		5460.000	52.057	55.400	-16.143	68.200	-3.343	PK
3	*	5469.560	64.778	66.534	-3.422	68.200	-1.755	PK
4		5470.000	59.242	60.852	-8.958	68.200	-1.610	PK
5		5498.360	113.223	75.582	N/A	N/A	37.641	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2024-02-23
Limit: FCC_5G_RE(3m)	Engineer: Arvin Ding
Probe: HF907_102861_1-18GHz	Polarity: Horizontal
EUT: Tri-band Wi-Fi 7 Wireless AP	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at 5500MHz	

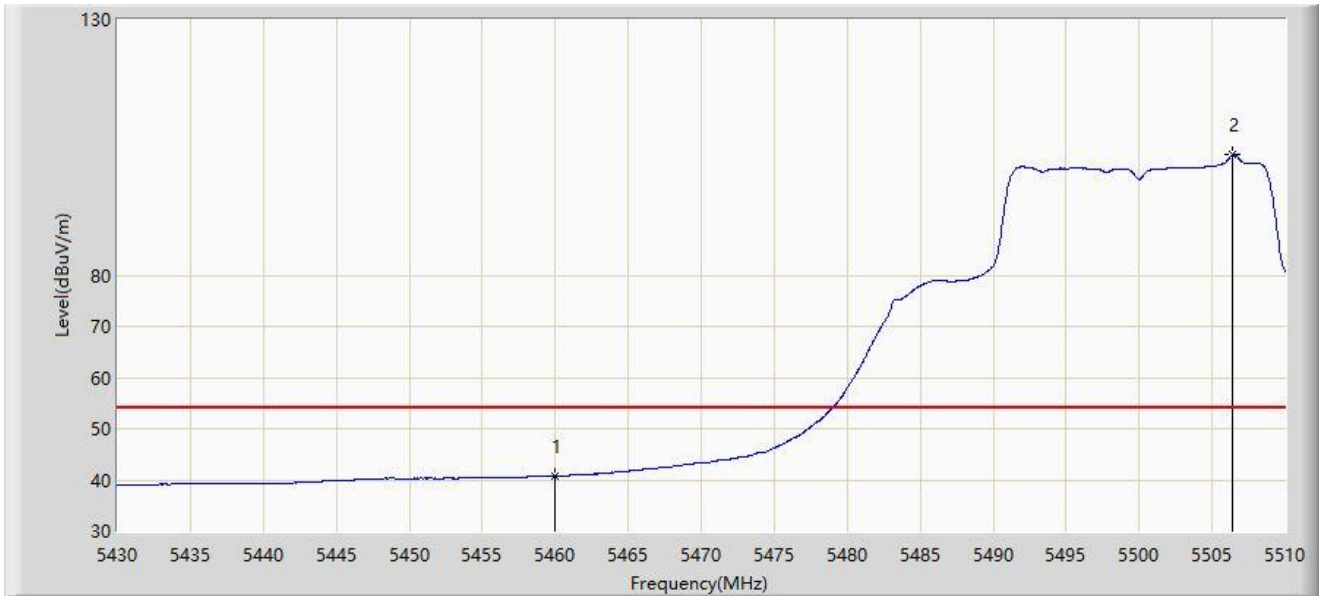

No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	5460.000	40.828	44.171	-13.172	54.000	-3.343	AV
2		5506.400	103.495	61.555	N/A	N/A	41.940	AV


Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).



Site: SIP-AC3	Test Date: 2024-02-23
Limit: FCC_5G_RE(3m)	Engineer: Arvin Ding
Probe: HF907_102861_1-18GHz	Polarity: Vertical
EUT: Tri-band Wi-Fi 7 Wireless AP	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at 5500MHz	

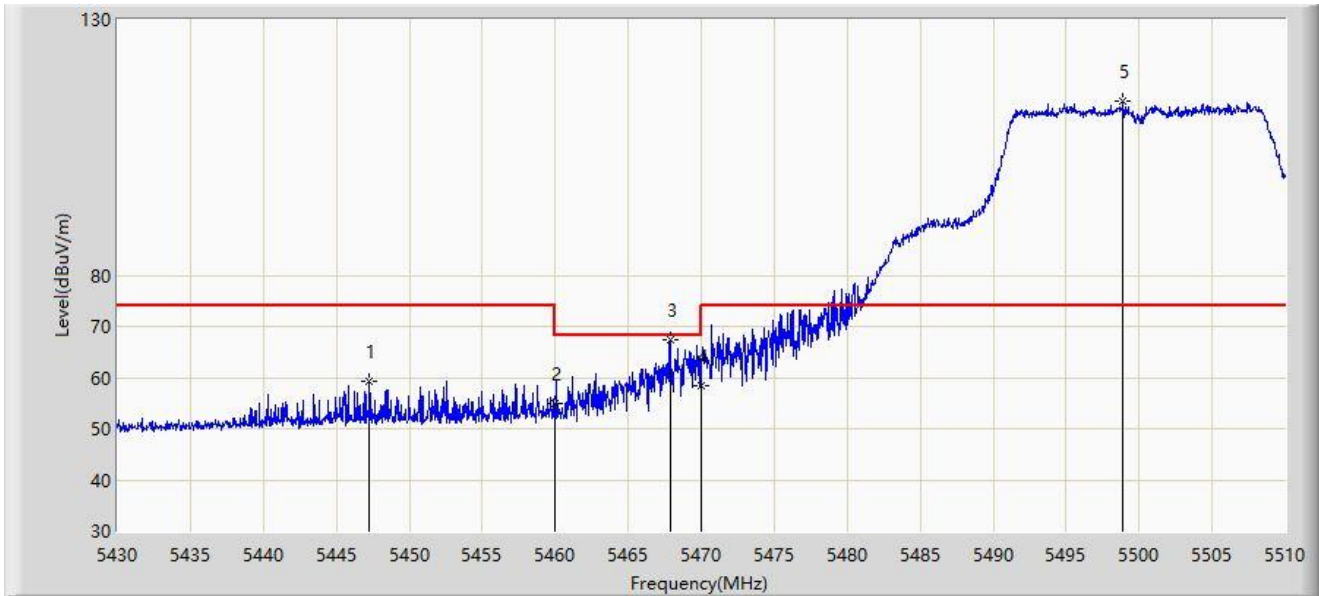


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		5447.240	59.166	63.265	-14.834	74.000	-4.100	PK
2		5460.000	54.976	58.319	-13.224	68.200	-3.343	PK
3	*	5467.880	67.371	69.673	-0.829	68.200	-2.302	PK
4		5470.000	58.336	59.946	-9.864	68.200	-1.610	PK
5		5498.880	113.946	76.237	N/A	N/A	37.709	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2024-02-23
Limit: FCC_5G_RE(3m)	Engineer: Arvin Ding
Probe: HF907_102861_1-18GHz	Polarity: Vertical
EUT: Tri-band Wi-Fi 7 Wireless AP	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at 5500MHz	

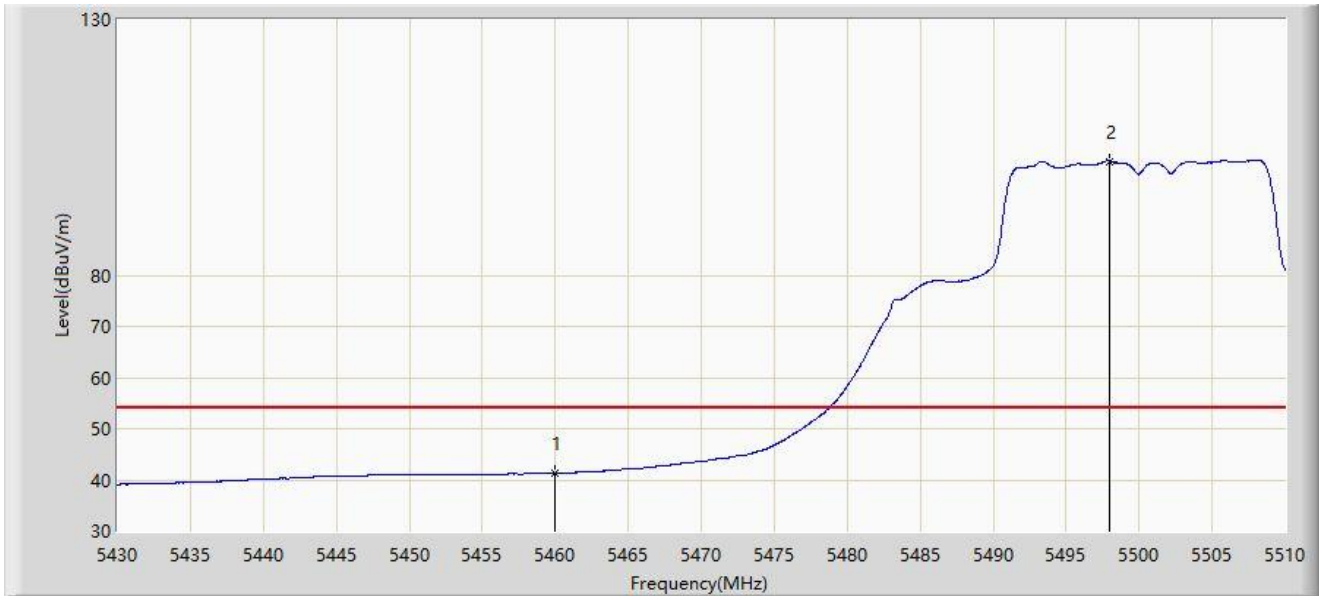


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	5460.000	41.372	44.715	-12.628	54.000	-3.343	AV
2		5497.960	102.308	64.612	N/A	N/A	37.696	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2024-02-26
Limit: FCC_5G_RE(3m)	Engineer: Mero Zhou
Probe: HF907_102861_1-18GHz	Polarity: Horizontal
EUT: WF825	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at 5700MHz	

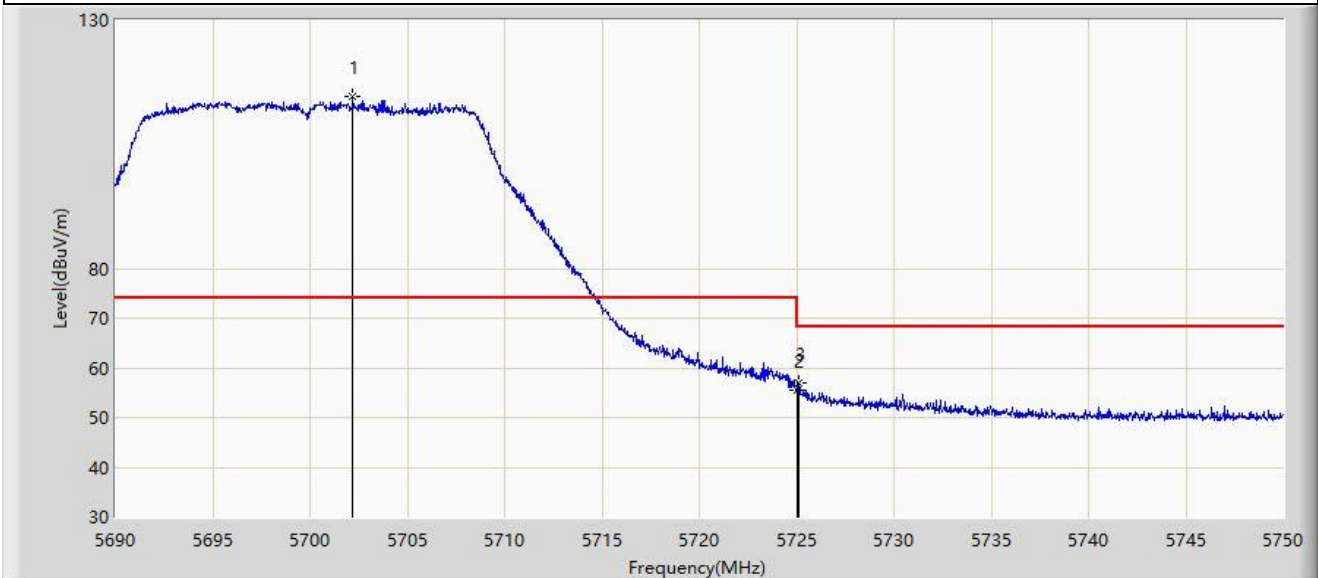


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5702.210	114.734	77.598	N/A	N/A	37.136	PK
2		5725.000	55.604	57.439	-12.596	68.200	-1.836	PK
3	*	5725.100	56.949	58.842	-11.251	68.200	-1.893	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2024-02-26
Limit: FCC_5G_RE(3m)	Engineer: Mero Zhou
Probe: HF907_102861_1-18GHz	Polarity: Vertical
EUT: WF825	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at 5700MHz	

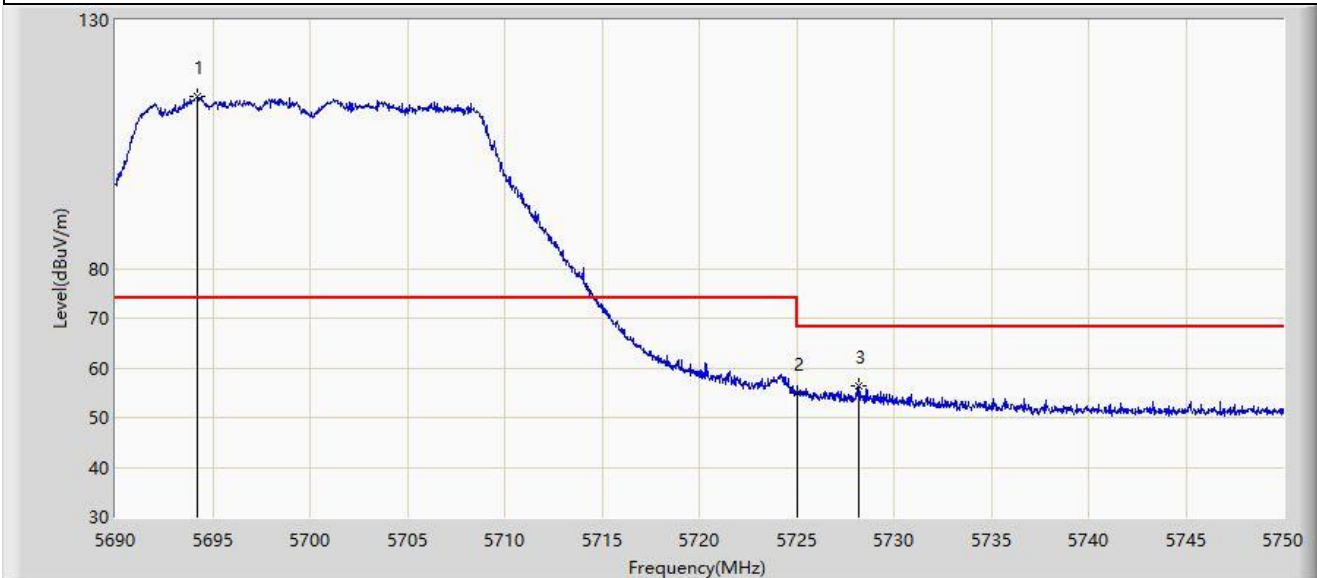


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5694.230	114.719	73.635	N/A	N/A	41.084	PK
2		5725.000	55.047	56.882	-13.153	68.200	-1.836	PK
3	*	5728.160	56.385	59.557	-11.815	68.200	-3.173	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2024-01-25
Limit: FCC_5.8G_RE(3m)	Engineer: Arvin Ding
Probe: HF907_102861_1-18GHz	Polarity: Horizontal
EUT: Tri-band Wi-Fi 7 Wireless AP	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at 5745MHz	

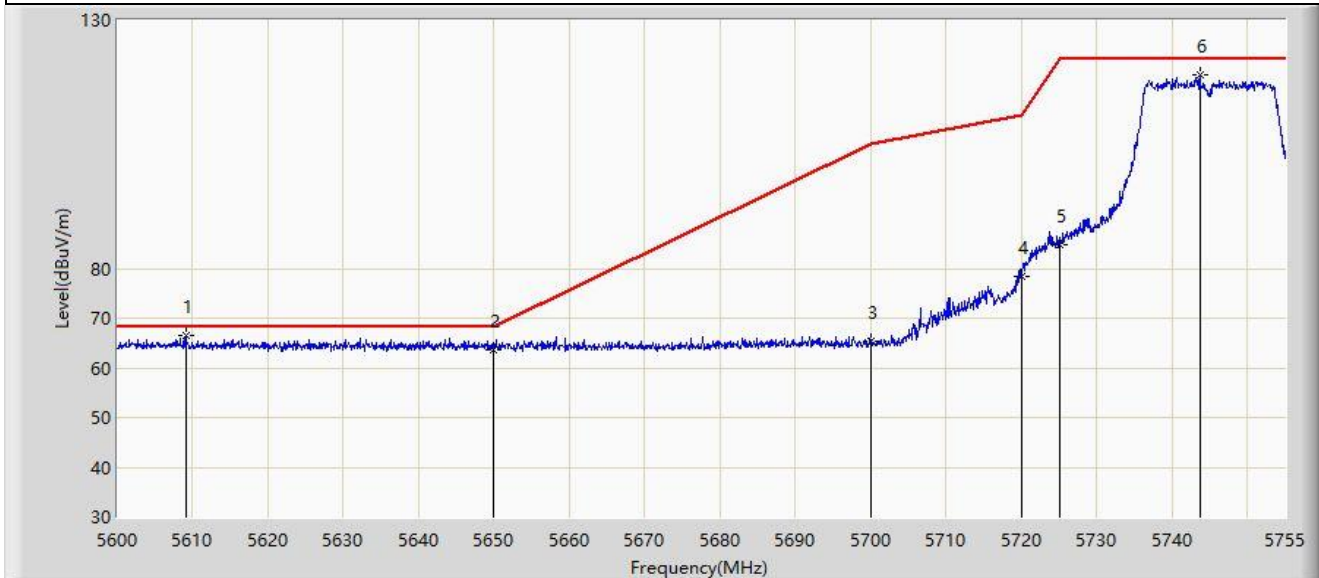


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5609.067	66.638	73.859	-1.562	68.200	-7.220	PK
2		5650.000	63.643	70.963	-4.557	68.200	-7.319	PK
3		5700.000	65.463	72.637	-39.737	105.200	-7.174	PK
4		5720.000	78.467	85.939	-32.333	110.800	-7.472	PK
5		5725.000	84.795	92.256	-37.405	122.200	-7.461	PK
6		5743.685	118.880	126.410	N/A	N/A	-7.530	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2024-01-25
Limit: FCC_5.8G_RE(3m)	Engineer: Arvin Ding
Probe: HF907_102861_1-18GHz	Polarity: Vertical
EUT: Tri-band Wi-Fi 7 Wireless AP	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at 5745MHz	

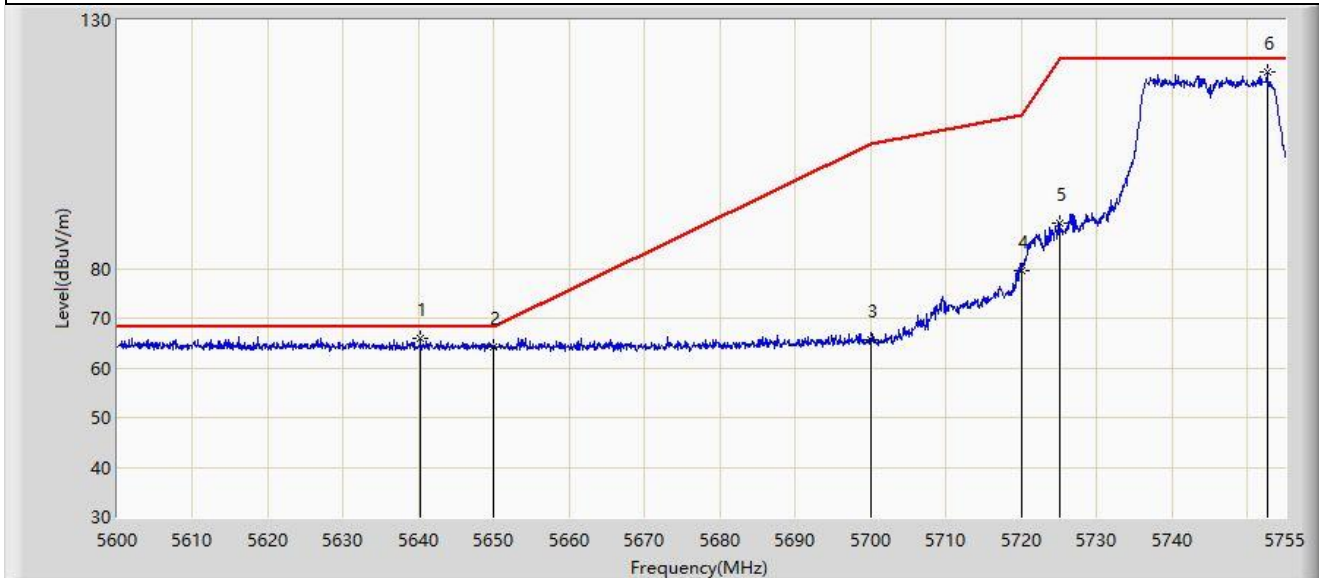


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5640.223	65.979	73.305	-2.221	68.200	-7.325	PK
2		5650.000	64.219	71.539	-3.981	68.200	-7.319	PK
3		5700.000	65.717	72.891	-39.483	105.200	-7.174	PK
4		5720.000	79.633	87.105	-31.167	110.800	-7.472	PK
5		5725.000	89.205	96.666	-32.995	122.200	-7.461	PK
6		5752.598	119.544	126.992	N/A	N/A	-7.448	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2024-01-25
Limit: FCC_5.8G_RE(3m)	Engineer: Arvin Ding
Probe: HF907_102861_1-18GHz	Polarity: Horizontal
EUT: Tri-band Wi-Fi 7 Wireless AP	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at 5825MHz	

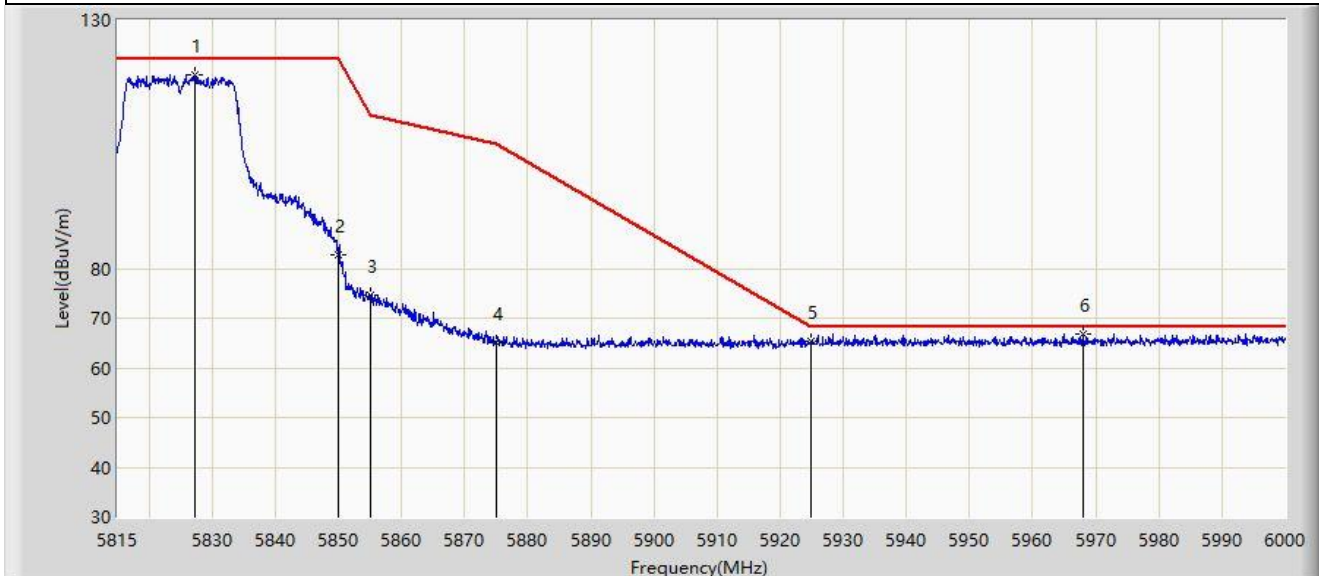


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5827.395	118.978	126.249	N/A	N/A	-7.271	PK
2		5850.000	82.888	90.125	-39.312	122.200	-7.237	PK
3		5855.000	74.524	81.742	-36.276	110.800	-7.217	PK
4		5875.000	65.087	72.439	-40.113	105.200	-7.352	PK
5		5925.000	65.452	72.578	-2.748	68.200	-7.126	PK
6	*	5967.902	66.837	73.812	-1.363	68.200	-6.975	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2024-01-25
Limit: FCC_5.8G_RE(3m)	Engineer: Arvin Ding
Probe: HF907_102861_1-18GHz	Polarity: Vertical
EUT: Tri-band Wi-Fi 7 Wireless AP	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at 5825MHz	

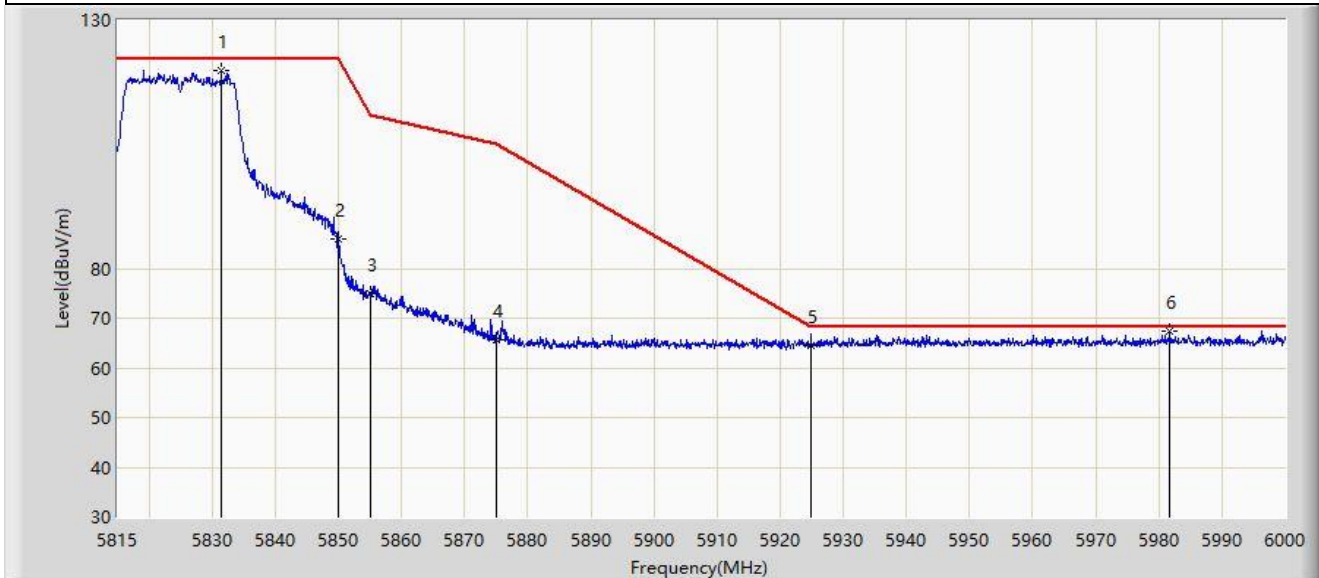

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		5831.465	119.942	127.208	N/A	N/A	-7.265	PK
2		5850.000	85.800	93.037	-36.400	122.200	-7.237	PK
3		5855.000	75.021	82.239	-35.779	110.800	-7.217	PK
4		5875.000	65.665	73.017	-39.535	105.200	-7.352	PK
5		5925.000	64.558	71.684	-3.642	68.200	-7.126	PK
6	*	5981.685	67.300	74.294	-0.900	68.200	-6.994	PK


Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).



Site: SIP-AC3	Test Date: 2024-01-24
Limit: FCC_5G_RE(3m)	Engineer: Arvin Ding
Probe: HF907_102861_1-18GHz	Polarity: Horizontal
EUT: Tri-band Wi-Fi 7 Wireless AP	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at 5190MHz	

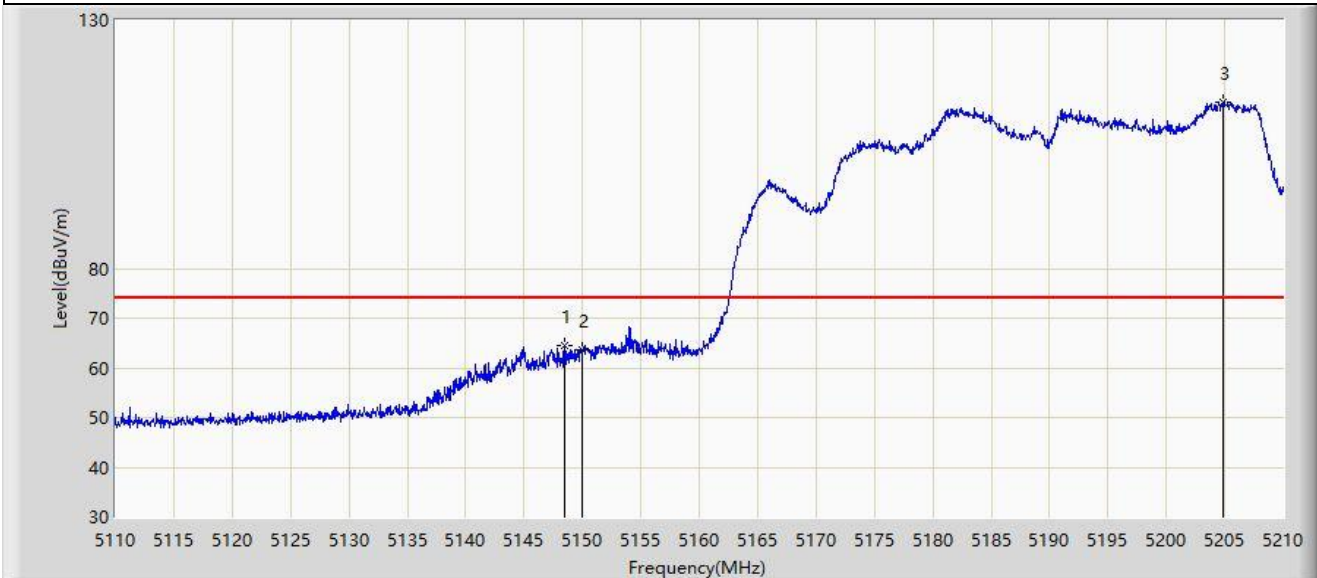


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5148.450	64.467	68.036	-9.533	74.000	-3.568	PK
2		5150.000	63.720	66.966	-10.280	74.000	-3.246	PK
3		5204.900	113.576	72.913	N/A	N/A	40.663	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2024-01-24
Limit: FCC_5G_RE(3m)	Engineer: Arvin Ding
Probe: HF907_102861_1-18GHz	Polarity: Horizontal
EUT: Tri-band Wi-Fi 7 Wireless AP	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at 5190MHz	

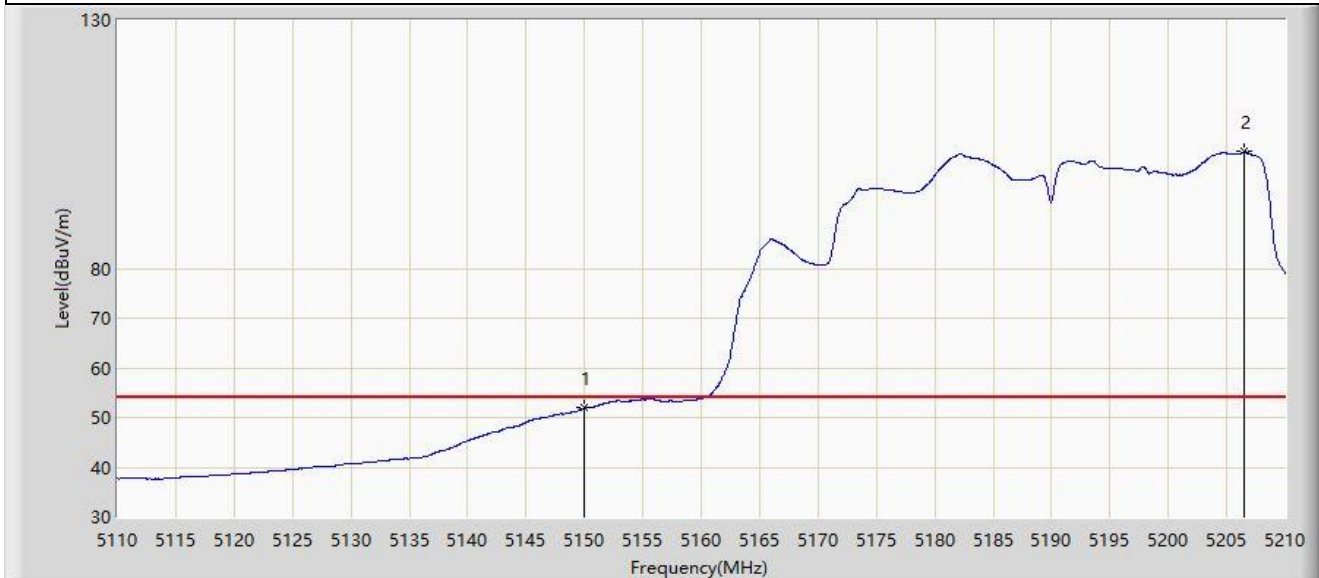


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	5150.000	51.942	55.188	-2.058	54.000	-3.246	AV
2		5206.550	103.532	65.653	N/A	N/A	37.879	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2024-01-24
Limit: FCC_5G_RE(3m)	Engineer: Arvin Ding
Probe: HF907_102861_1-18GHz	Polarity: Vertical
EUT: Tri-band Wi-Fi 7 Wireless AP	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at 5190MHz	

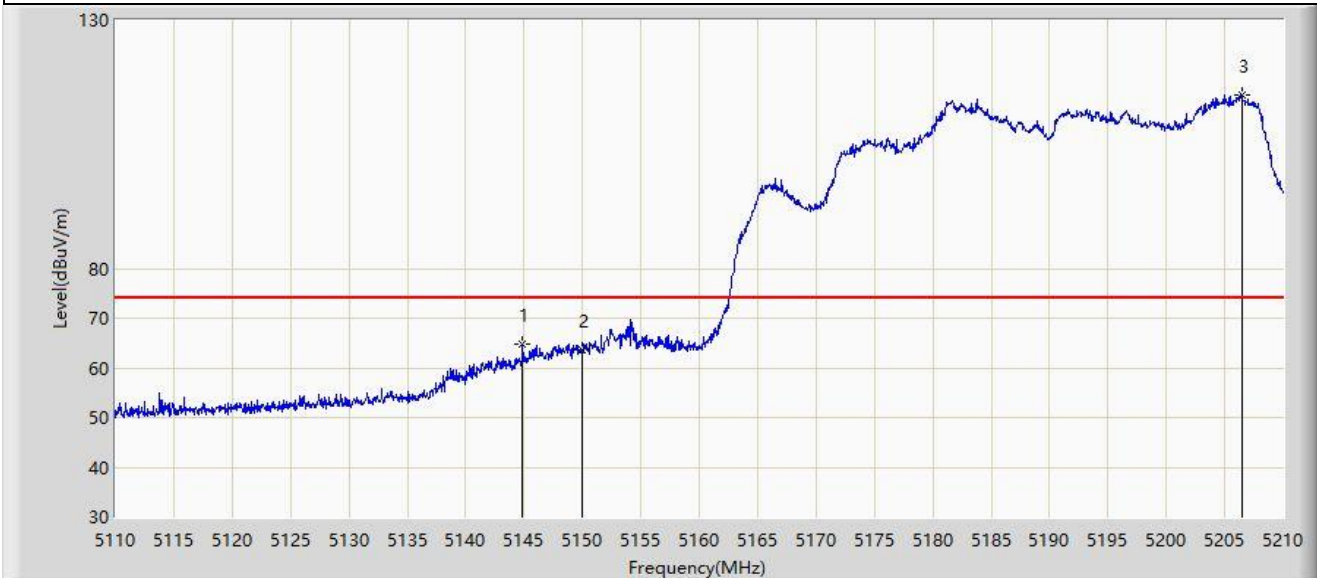


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5144.850	64.813	68.883	-9.187	74.000	-4.069	PK
2		5150.000	63.699	66.945	-10.301	74.000	-3.246	PK
3		5206.450	114.961	76.931	N/A	N/A	38.030	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2024-01-24
Limit: FCC_5G_RE(3m)	Engineer: Arvin Ding
Probe: HF907_102861_1-18GHz	Polarity: Vertical
EUT: Tri-band Wi-Fi 7 Wireless AP	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at 5190MHz	

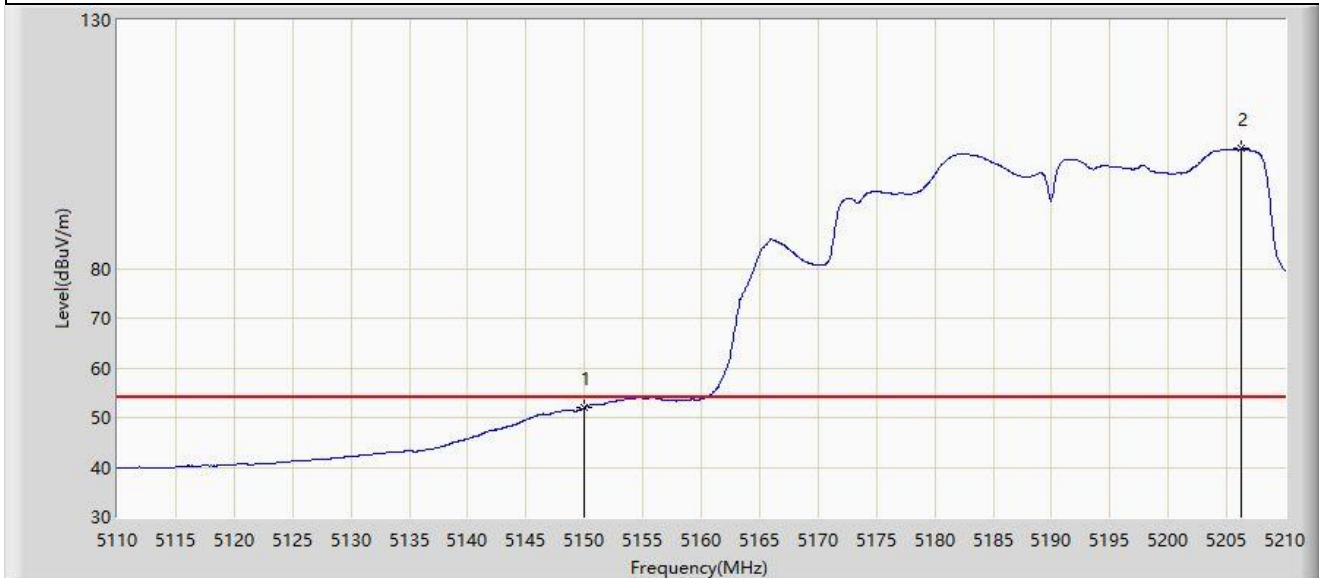


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5150.000	52.091	55.337	-1.909	54.000	-3.246	AV
2		5206.300	104.076	65.803	N/A	N/A	38.273	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2024-01-24
Limit: FCC_5G_RE(3m)	Engineer: Arvin Ding
Probe: HF907_102861_1-18GHz	Polarity: Horizontal
EUT: Tri-band Wi-Fi 7 Wireless AP	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at 5310MHz	

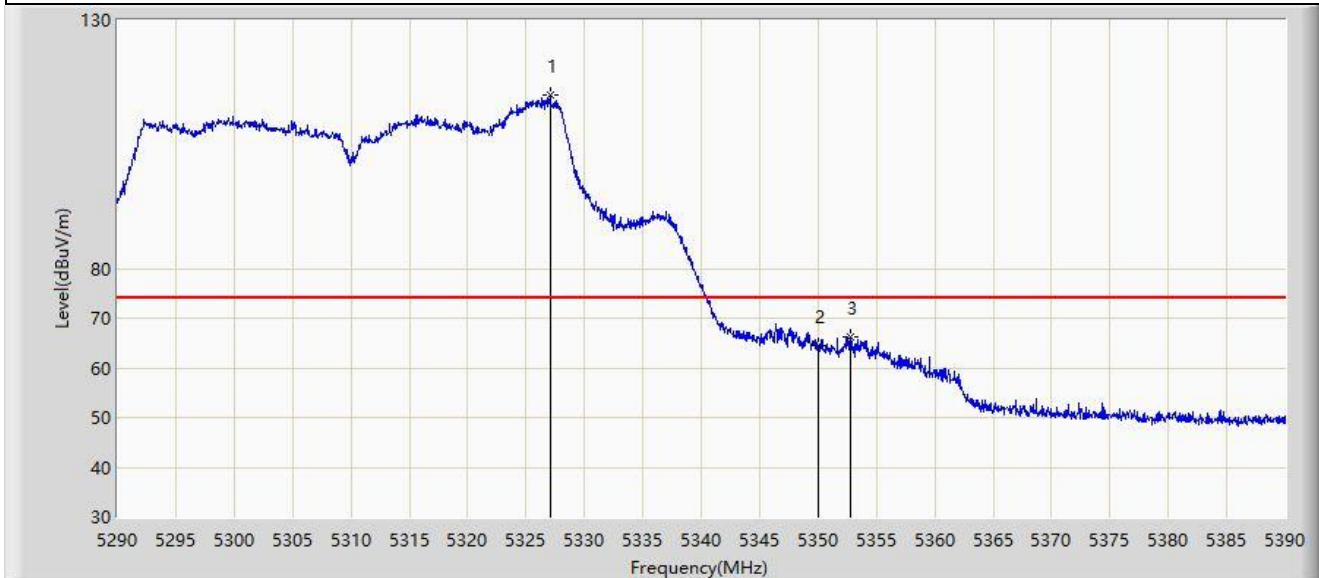


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		5327.050	114.881	75.837	N/A	N/A	39.044	PK
2		5350.000	64.571	65.975	-9.429	74.000	-1.404	PK
3	*	5352.750	66.167	68.714	-7.833	74.000	-2.547	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2024-01-24
Limit: FCC_5G_RE(3m)	Engineer: Arvin Ding
Probe: HF907_102861_1-18GHz	Polarity: Horizontal
EUT: Tri-band Wi-Fi 7 Wireless AP	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at 5310MHz	

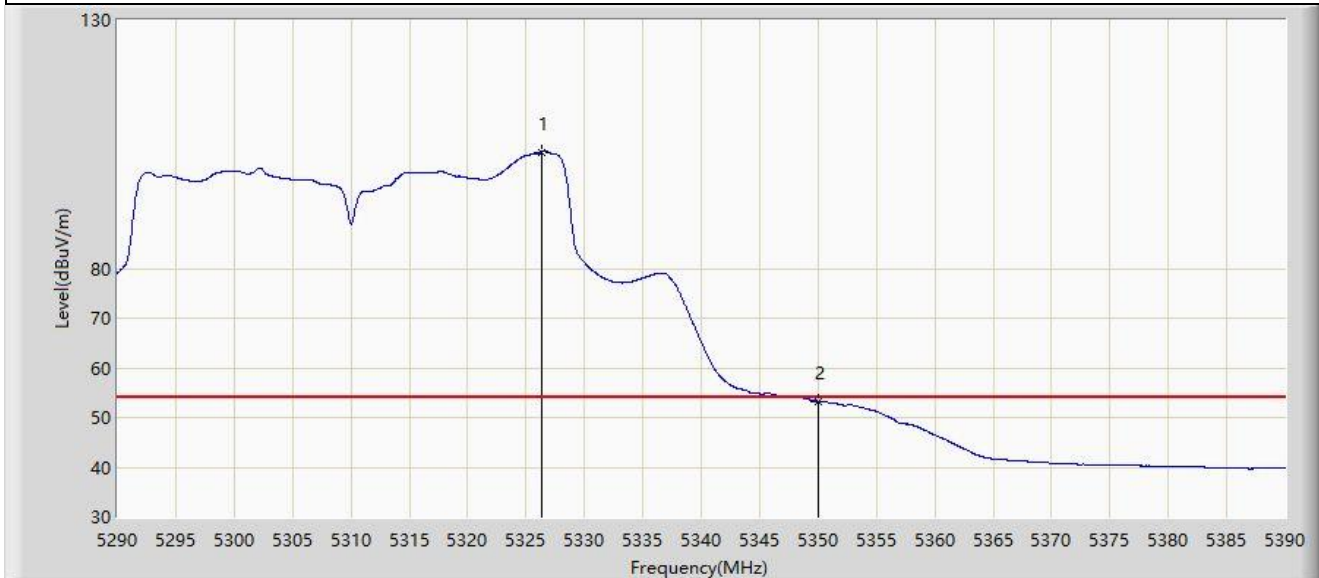


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5326.350	103.471	64.813	N/A	N/A	38.658	AV
2	*	5350.000	53.312	54.716	-0.688	54.000	-1.404	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2024-01-24
Limit: FCC_5G_RE(3m)	Engineer: Arvin Ding
Probe: HF907_102861_1-18GHz	Polarity: Vertical
EUT: Tri-band Wi-Fi 7 Wireless AP	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at 5310MHz	

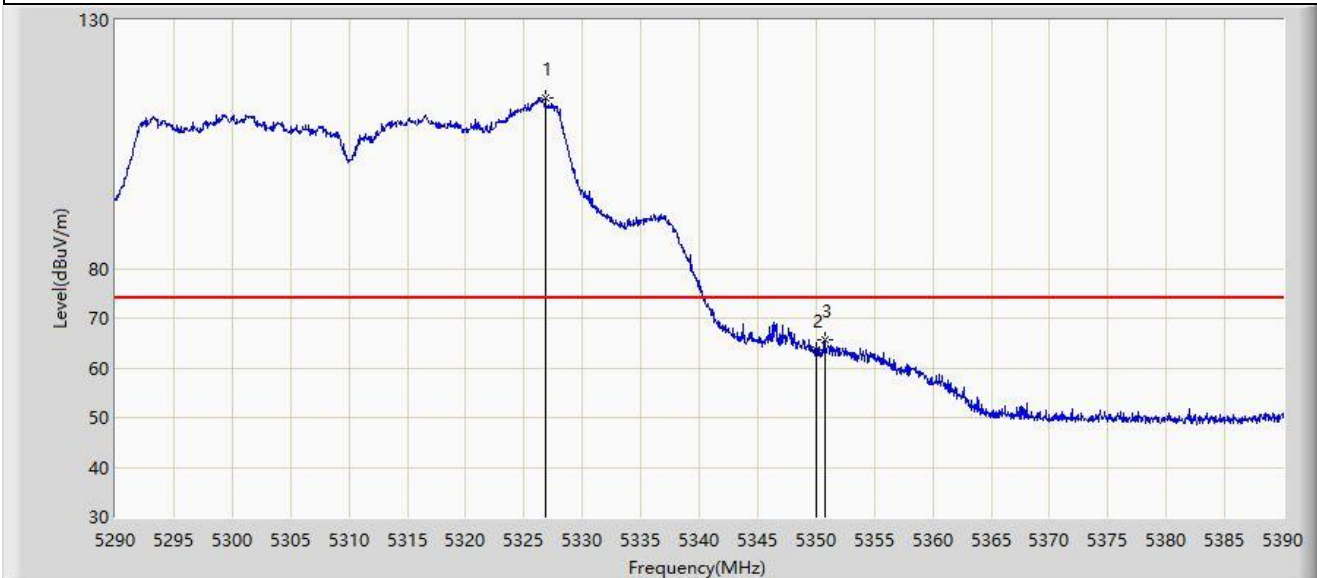


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5326.850	114.362	75.428	N/A	N/A	38.934	PK
2		5350.000	63.602	65.006	-10.398	74.000	-1.404	PK
3	*	5350.750	65.549	67.342	-8.451	74.000	-1.793	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2024-01-24
Limit: FCC_5G_RE(3m)	Engineer: Arvin Ding
Probe: HF907_102861_1-18GHz	Polarity: Vertical
EUT: Tri-band Wi-Fi 7 Wireless AP	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at 5310MHz	

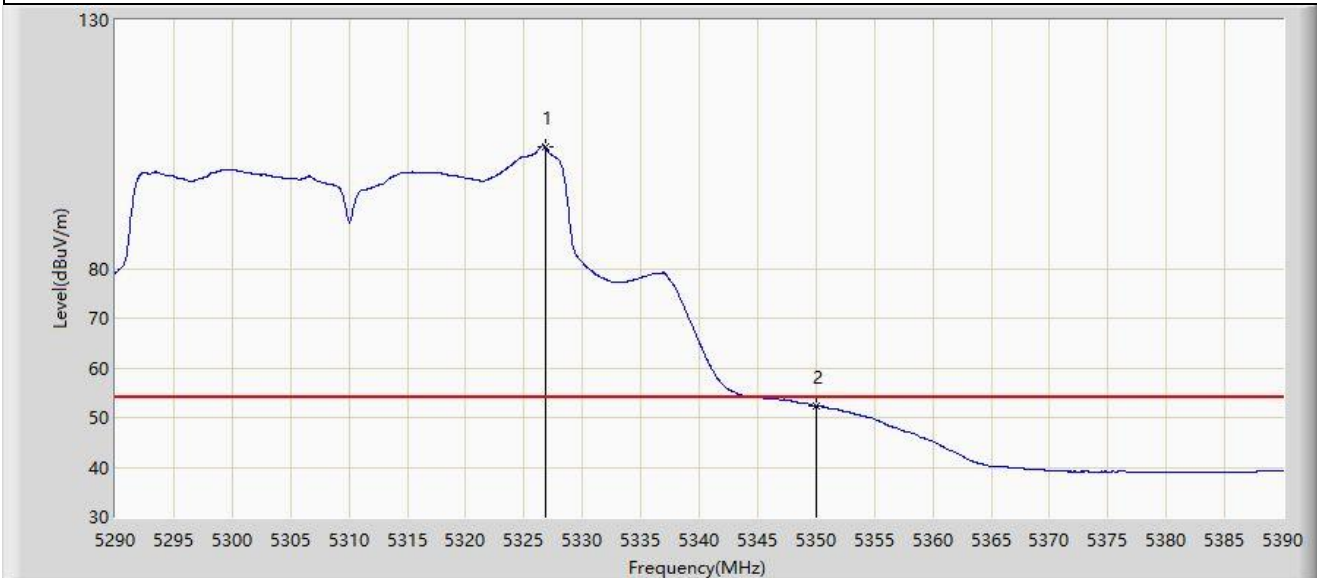

No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5326.800	104.432	65.526	N/A	N/A	38.906	AV
2	*	5350.000	52.339	53.743	-1.661	54.000	-1.404	AV


Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).



Site: SIP-AC3	Test Date: 2024-01-25
Limit: FCC_5G_RE(3m)	Engineer: Arvin Ding
Probe: HF907_102861_1-18GHz	Polarity: Horizontal
EUT: Tri-band Wi-Fi 7 Wireless AP	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at 5510MHz	

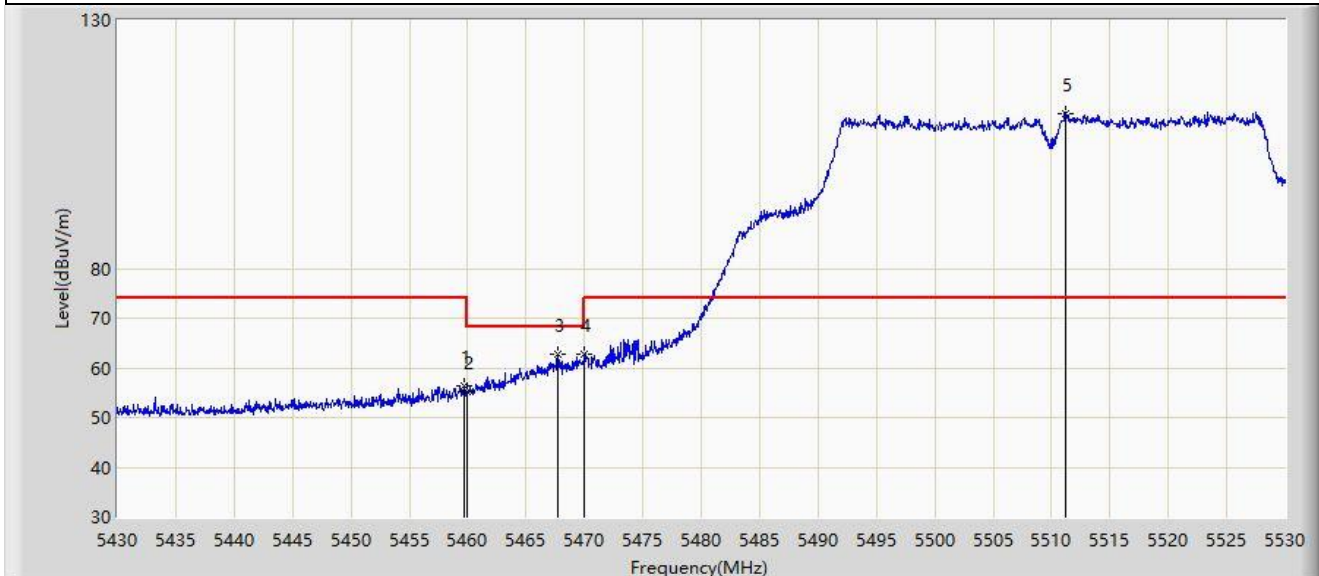


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5459.750	56.282	59.660	-17.718	74.000	-3.377	PK
2		5460.000	55.299	58.642	-12.901	68.200	-3.343	PK
3		5467.750	62.675	65.012	-5.525	68.200	-2.337	PK
4	*	5470.000	62.855	64.465	-5.345	68.200	-1.610	PK
5		5511.150	111.300	71.541	N/A	N/A	39.759	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2024-01-25
Limit: FCC_5G_RE(3m)	Engineer: Arvin Ding
Probe: HF907_102861_1-18GHz	Polarity: Horizontal
EUT: Tri-band Wi-Fi 7 Wireless AP	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at 5510MHz	

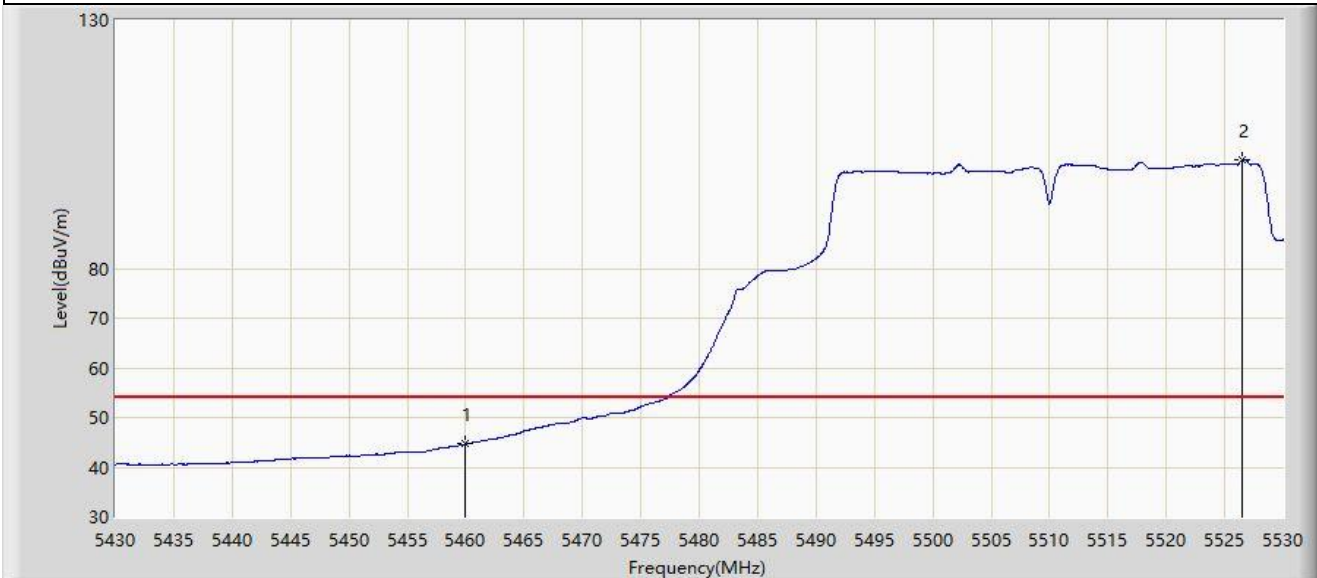


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	5460.000	44.643	47.986	-9.357	54.000	-3.343	AV
2		5526.550	101.972	60.038	N/A	N/A	41.934	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2024-01-25
Limit: FCC_5G_RE(3m)	Engineer: Arvin Ding
Probe: HF907_102861_1-18GHz	Polarity: Vertical
EUT: Tri-band Wi-Fi 7 Wireless AP	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at 5510MHz	

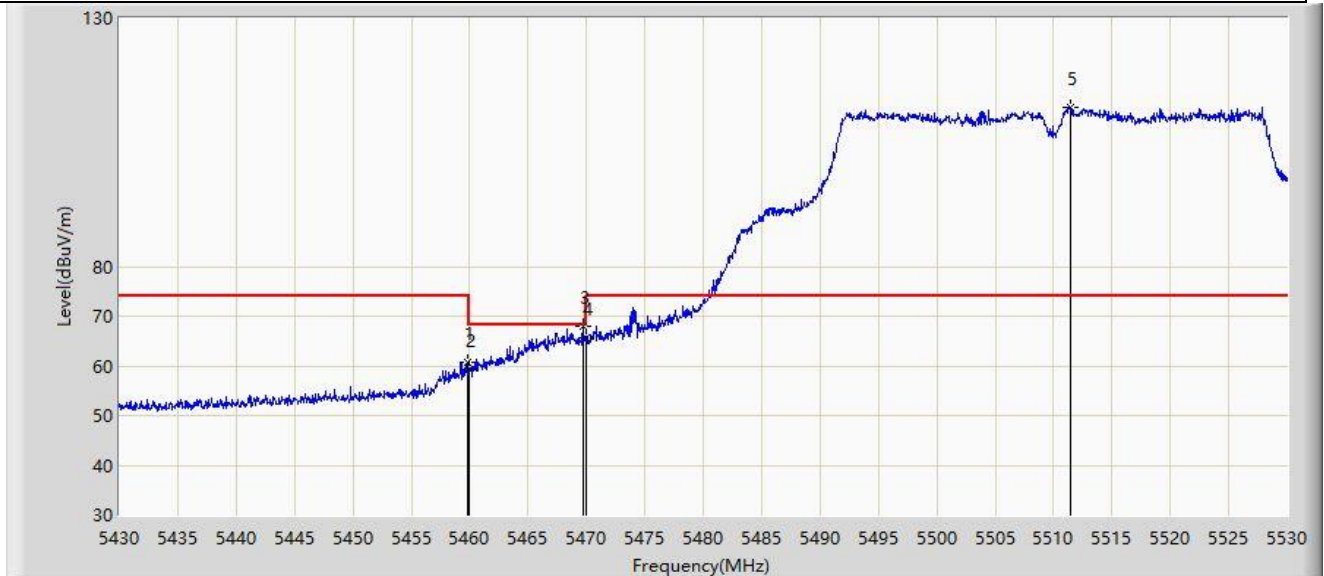


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		5459.800	60.703	64.074	-13.297	74.000	-3.370	PK
2		5460.000	59.140	62.483	-9.060	68.200	-3.343	PK
3	*	5469.700	67.857	69.570	-0.343	68.200	-1.713	PK
4		5470.000	65.796	67.406	-2.404	68.200	-1.610	PK
5		5511.450	112.163	72.279	N/A	N/A	39.884	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2024-01-25
Limit: FCC_5G_RE(3m)	Engineer: Arvin Ding
Probe: HF907_102861_1-18GHz	Polarity: Vertical
EUT: Tri-band Wi-Fi 7 Wireless AP	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at 5510MHz	

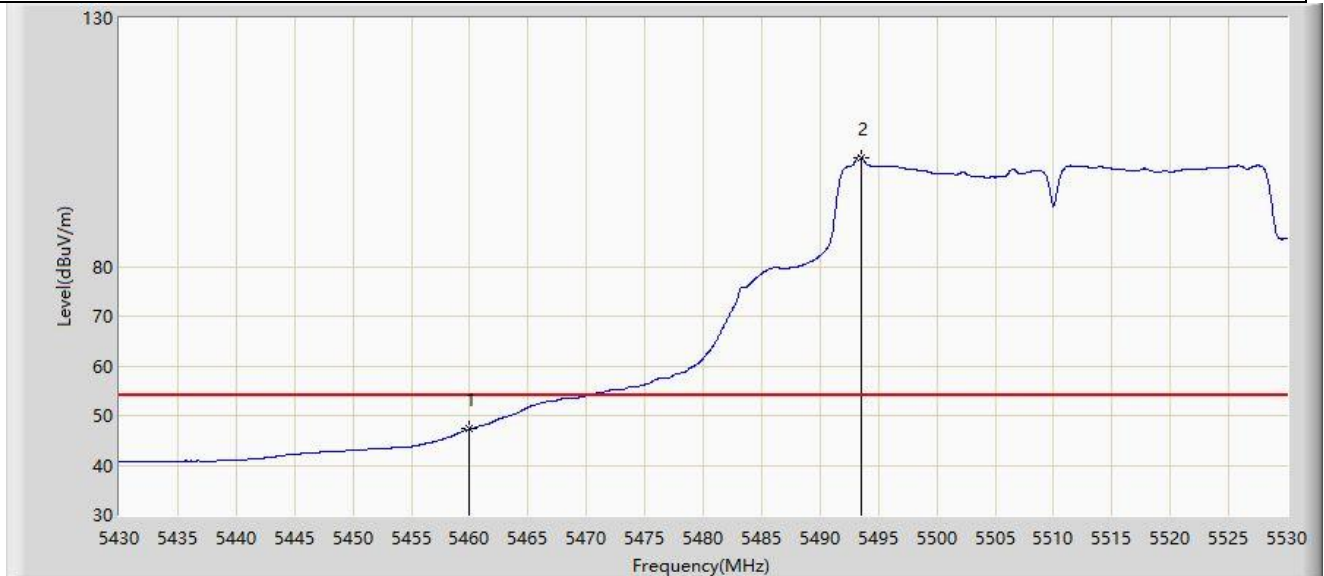


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5460.000	47.271	50.614	-6.729	54.000	-3.343	AV
2		5493.550	101.919	59.010	N/A	N/A	42.910	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2024-02-23
Limit: FCC_5G_RE(3m)	Engineer: Arvin Ding
Probe: HF907_102861_1-18GHz	Polarity: Horizontal
EUT: Tri-band Wi-Fi 7 Wireless AP	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at 5670MHz	

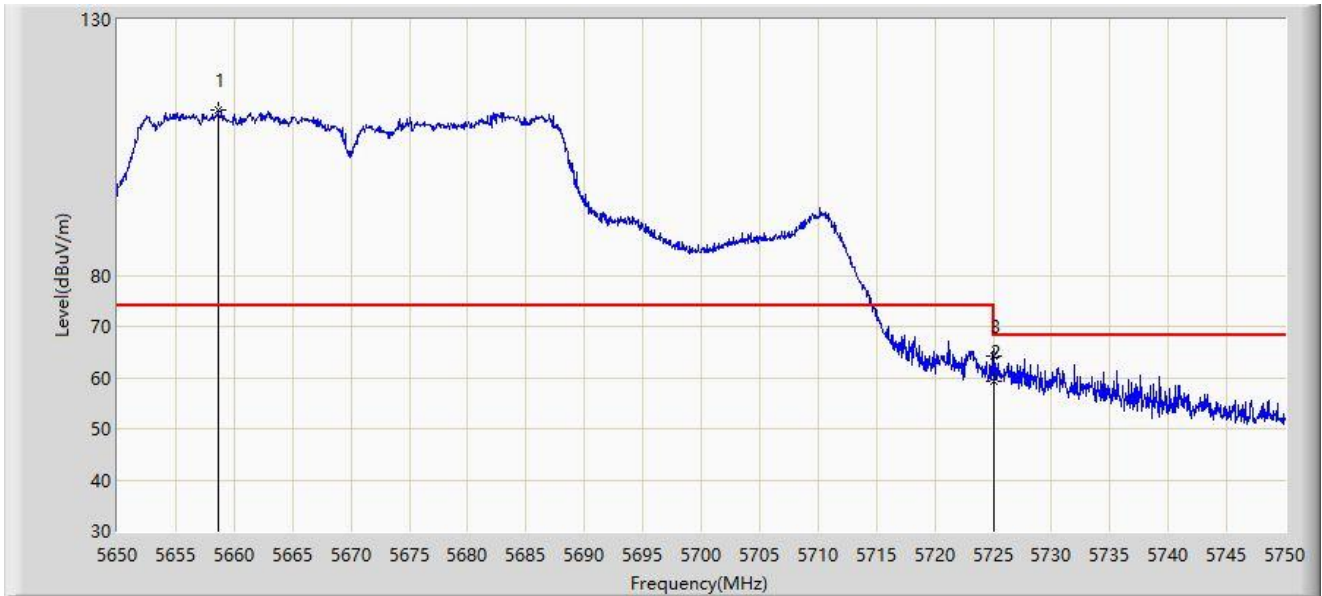


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		5658.650	112.411	74.867	N/A	N/A	37.544	PK
2		5725.000	59.238	61.073	-8.962	68.200	-1.836	PK
3	*	5725.100	64.243	66.136	-3.957	68.200	-1.893	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2024-02-23
Limit: FCC_5G_RE(3m)	Engineer: Arvin Ding
Probe: HF907_102861_1-18GHz	Polarity: Vertical
EUT: Tri-band Wi-Fi 7 Wireless AP	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at 5670MHz	

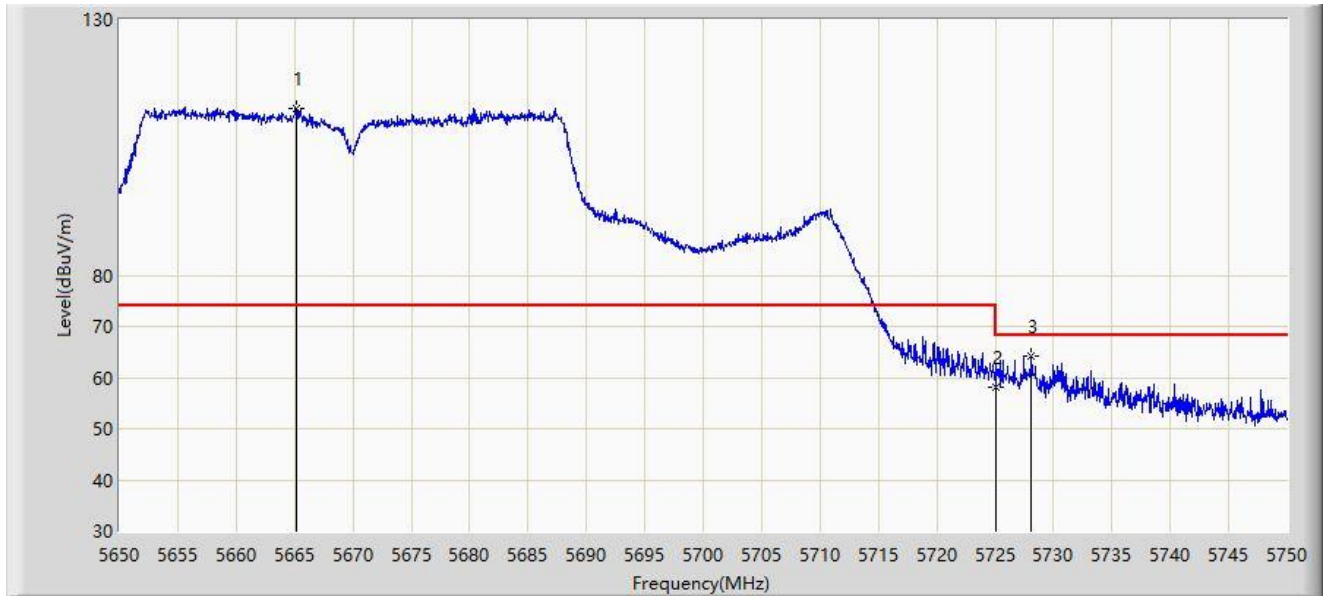


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		5665.200	112.566	70.532	N/A	N/A	42.034	PK
2		5725.000	58.088	59.923	-10.112	68.200	-1.836	PK
3	*	5728.100	64.074	67.233	-4.126	68.200	-3.159	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2024-02-25
Limit: FCC_5.8G_RE(3m)	Engineer: Arvin Ding
Probe: HF907_102861_1-18GHz	Polarity: Horizontal
EUT: Tri-band Wi-Fi 7 Wireless AP	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at 5755MHz	

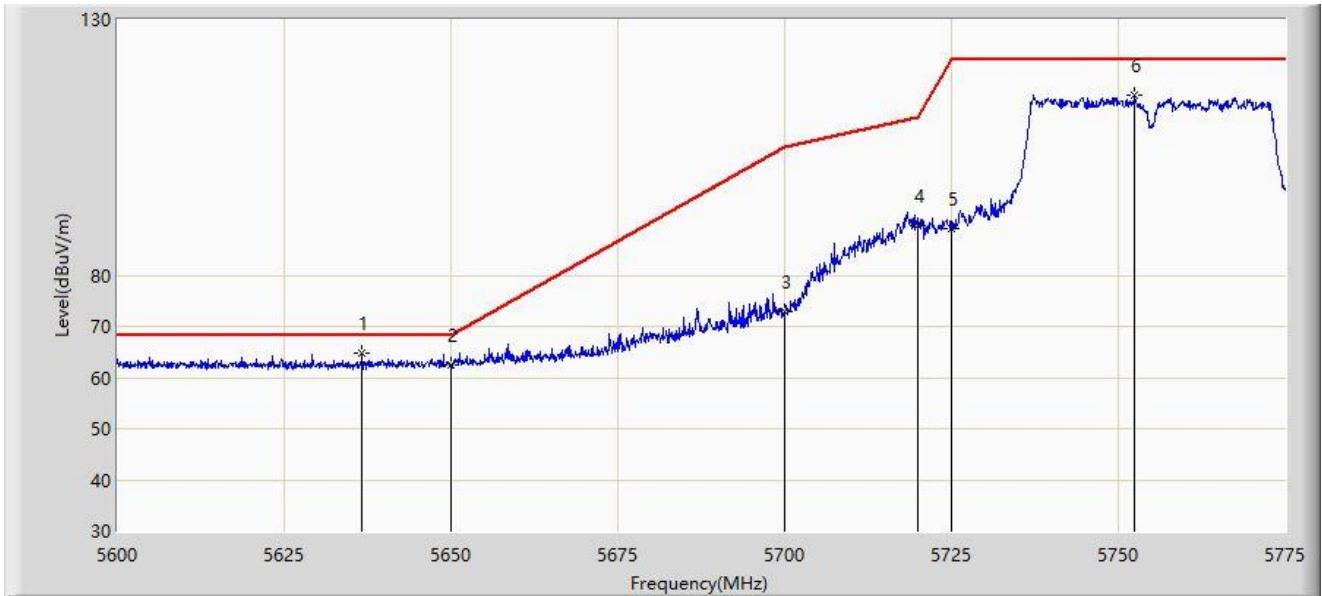


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	5636.663	64.657	71.971	-3.543	68.200	-7.314	PK
2		5650.000	62.440	69.760	-5.760	68.200	-7.319	PK
3		5700.000	72.988	80.162	-32.212	105.200	-7.174	PK
4		5720.000	89.607	97.079	-21.193	110.800	-7.472	PK
5		5725.000	88.995	96.456	-33.205	122.200	-7.461	PK
6		5752.513	115.078	122.527	N/A	N/A	-7.448	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2024-02-25
Limit: FCC_5.8G_RE(3m)	Engineer: Arvin Ding
Probe: HF907_102861_1-18GHz	Polarity: Vertical
EUT: Tri-band Wi-Fi 7 Wireless AP	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at 5755MHz	

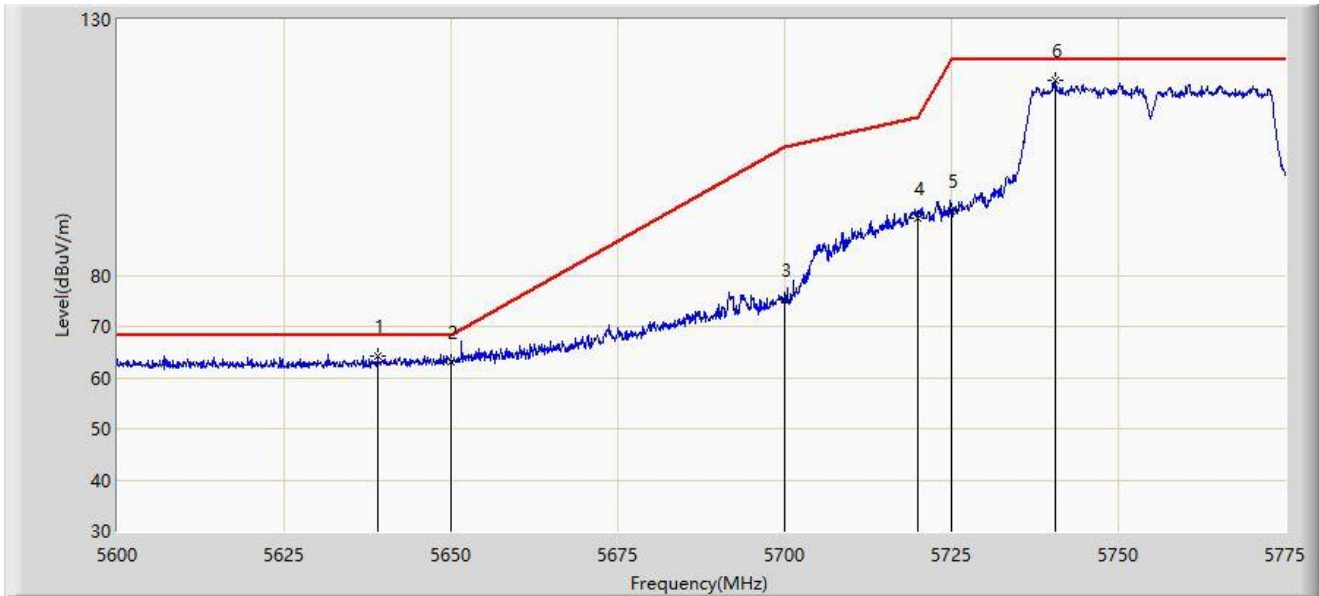

No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	5639.025	64.183	71.505	-4.017	68.200	-7.322	PK
2		5650.000	63.139	70.459	-5.061	68.200	-7.319	PK
3		5700.000	75.150	82.324	-30.050	105.200	-7.174	PK
4		5720.000	91.249	98.721	-19.551	110.800	-7.472	PK
5		5725.000	92.509	99.970	-29.691	122.200	-7.461	PK
6		5740.525	118.244	125.769	N/A	N/A	-7.524	PK


Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).



Site: SIP-AC3	Test Date: 2024-02-25
Limit: FCC_5.8G_RE(3m)	Engineer: Arvin Ding
Probe: HF907_102861_1-18GHz	Polarity: Horizontal
EUT: Tri-band Wi-Fi 7 Wireless AP	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at 5795MHz	

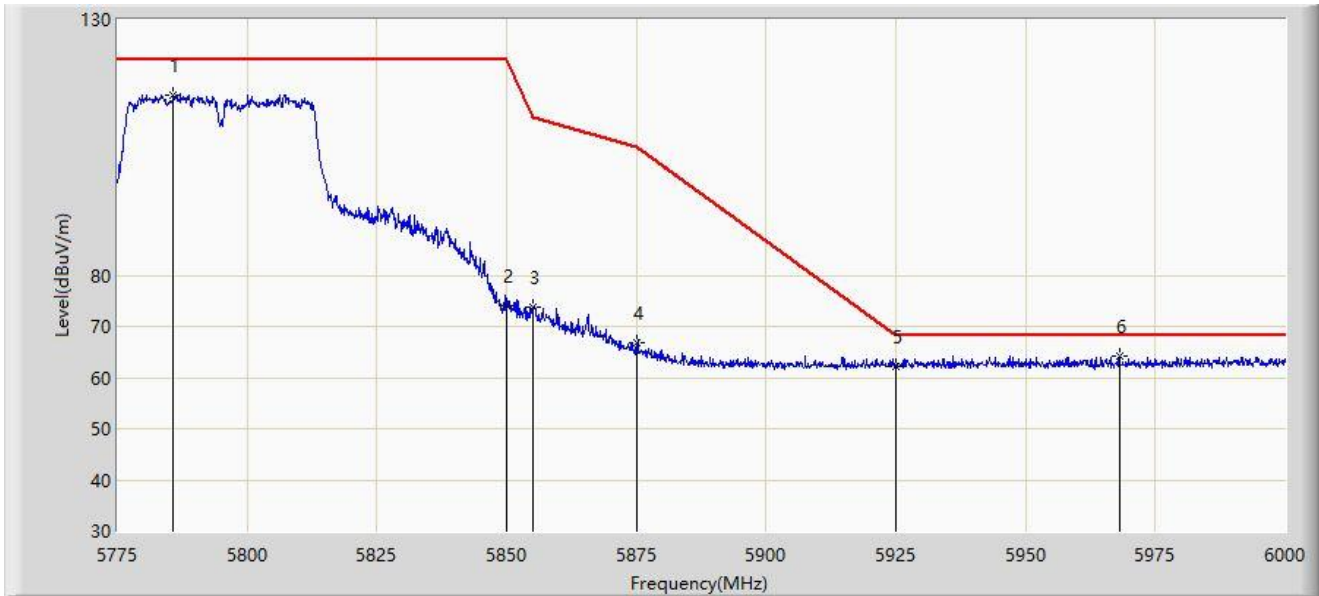


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		5785.687	115.309	122.717	N/A	N/A	-7.408	PK
2		5850.000	74.149	81.386	-48.051	122.200	-7.237	PK
3		5855.000	73.693	80.911	-37.107	110.800	-7.217	PK
4		5875.000	66.667	74.019	-38.533	105.200	-7.352	PK
5		5925.000	62.249	69.375	-5.951	68.200	-7.126	PK
6	*	5968.050	64.059	71.034	-4.141	68.200	-6.975	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2024-02-25
Limit: FCC_5.8G_RE(3m)	Engineer: Arvin Ding
Probe: HF907_102861_1-18GHz	Polarity: Vertical
EUT: Tri-band Wi-Fi 7 Wireless AP	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at 5795MHz	

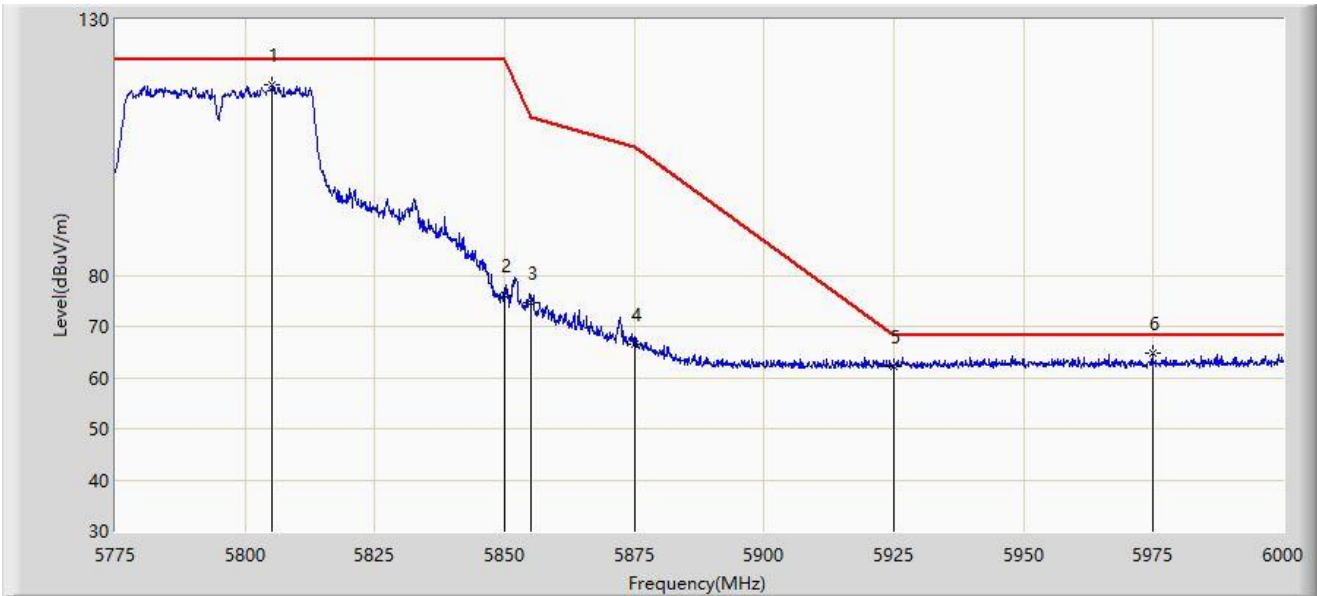


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5805.263	117.186	124.562	N/A	N/A	-7.377	PK
2		5850.000	76.062	83.299	-46.138	122.200	-7.237	PK
3		5855.000	74.719	81.937	-36.081	110.800	-7.217	PK
4		5875.000	66.610	73.962	-38.590	105.200	-7.352	PK
5		5925.000	62.154	69.280	-6.046	68.200	-7.126	PK
6	*	5974.800	64.732	71.718	-3.468	68.200	-6.985	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2024-01-24
Limit: FCC_5G_RE(3m)	Engineer: Arvin Ding
Probe: HF907_102861_1-18GHz	Polarity: Horizontal
EUT: Tri-band Wi-Fi 7 Wireless AP	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at 5210MHz	

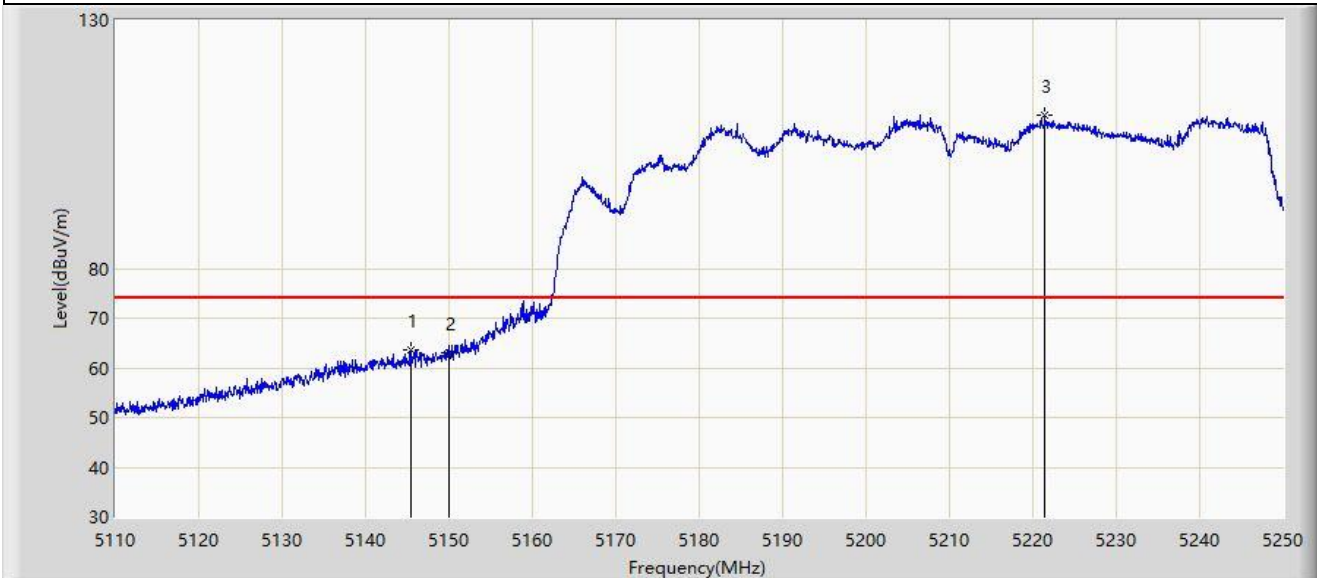


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	5145.490	63.499	67.494	-10.501	74.000	-3.995	PK
2		5150.000	62.957	66.203	-11.043	74.000	-3.246	PK
3		5221.440	110.775	69.016	N/A	N/A	41.758	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2024-01-24
Limit: FCC_5G_RE(3m)	Engineer: Arvin Ding
Probe: HF907_102861_1-18GHz	Polarity: Horizontal
EUT: Tri-band Wi-Fi 7 Wireless AP	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at 5210MHz	

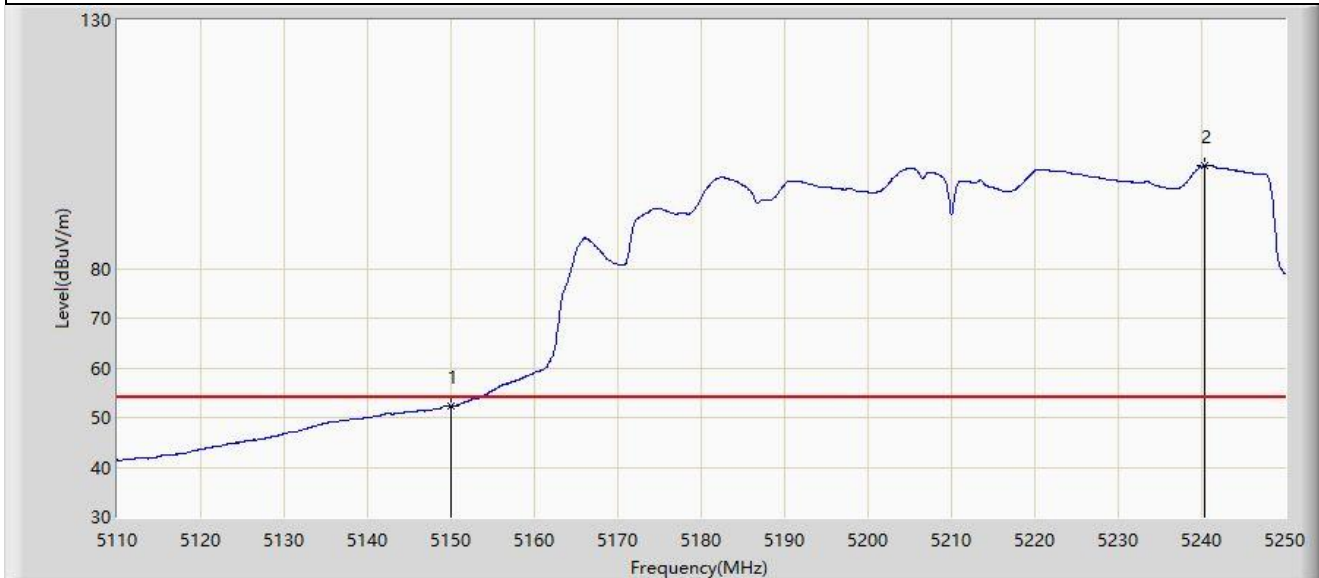


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	5150.000	52.247	55.493	-1.753	54.000	-3.246	AV
2		5240.270	100.653	56.239	N/A	N/A	44.415	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2024-01-24
Limit: FCC_5G_RE(3m)	Engineer: Arvin Ding
Probe: HF907_102861_1-18GHz	Polarity: Vertical
EUT: Tri-band Wi-Fi 7 Wireless AP	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at 5210MHz	

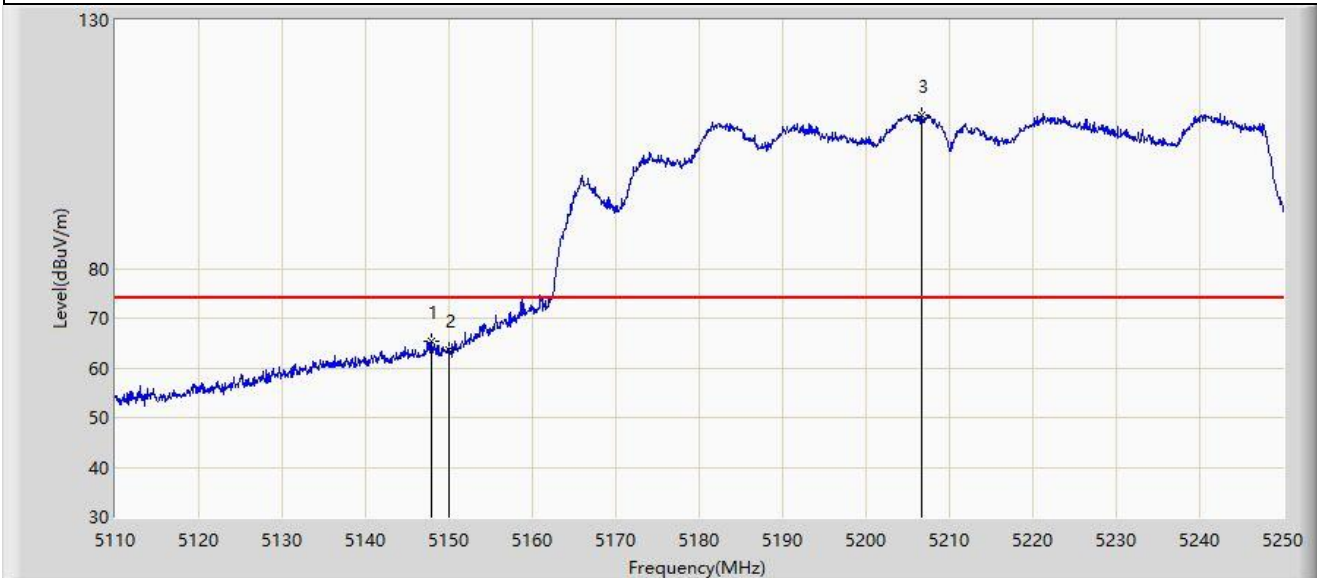


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	5147.870	65.362	69.049	-8.638	74.000	-3.687	PK
2		5150.000	63.635	66.881	-10.365	74.000	-3.246	PK
3		5206.670	110.947	73.236	N/A	N/A	37.711	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2024-01-24
Limit: FCC_5G_RE(3m)	Engineer: Arvin Ding
Probe: HF907_102861_1-18GHz	Polarity: Vertical
EUT: Tri-band Wi-Fi 7 Wireless AP	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at 5210MHz	

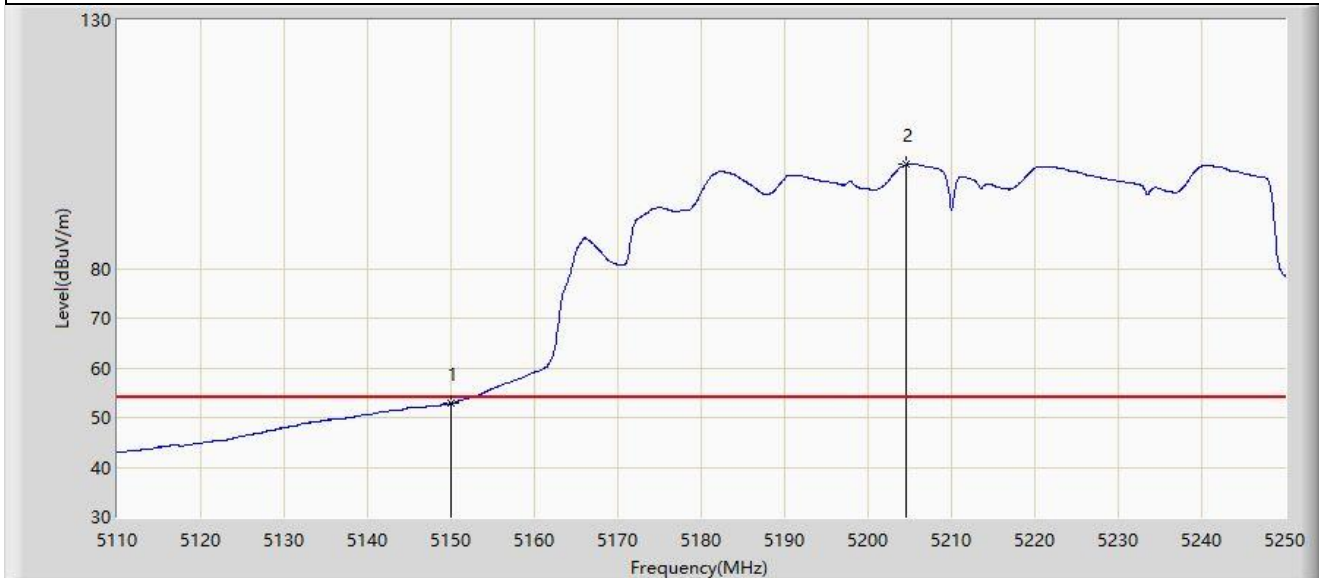


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5150.000	52.789	56.035	-1.211	54.000	-3.246	AV
2		5204.640	100.976	59.864	N/A	N/A	41.112	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2024-01-24
Limit: FCC_5G_RE(3m)	Engineer: Arvin Ding
Probe: HF907_102861_1-18GHz	Polarity: Horizontal
EUT: Tri-band Wi-Fi 7 Wireless AP	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at 5290MHz	

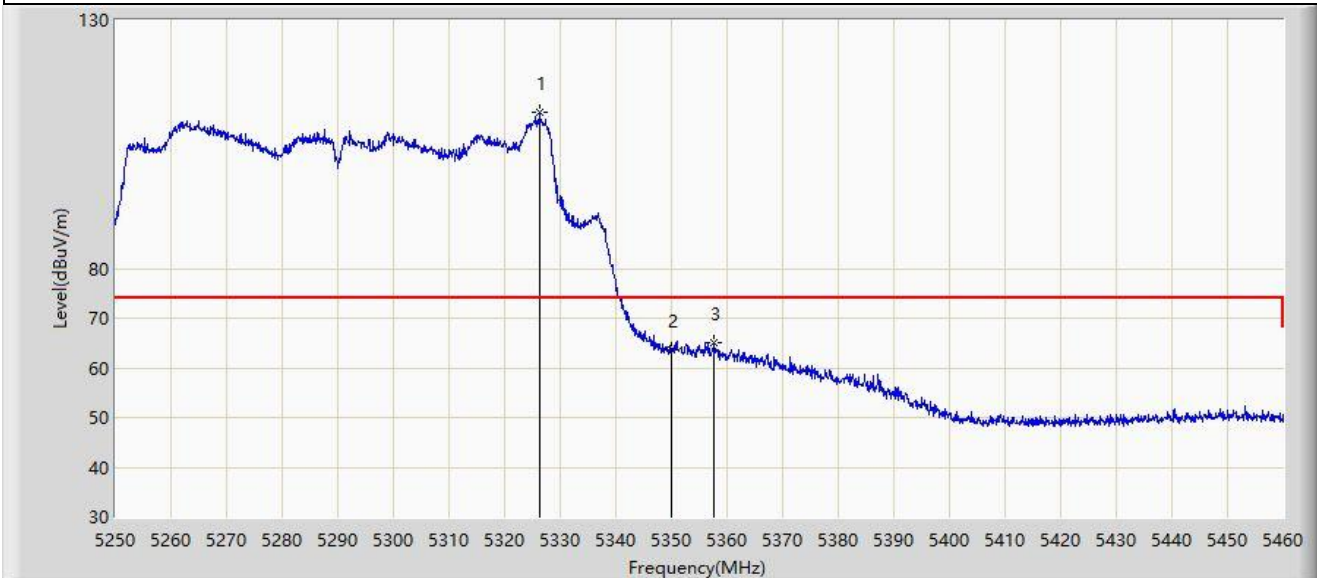


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		5326.335	111.332	72.682	N/A	N/A	38.650	PK
2		5350.000	63.512	64.916	-10.488	74.000	-1.404	PK
3	*	5357.625	65.034	68.725	-8.966	74.000	-3.691	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2024-01-24
Limit: FCC_5G_RE(3m)	Engineer: Arvin Ding
Probe: HF907_102861_1-18GHz	Polarity: Horizontal
EUT: Tri-band Wi-Fi 7 Wireless AP	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at 5290MHz	

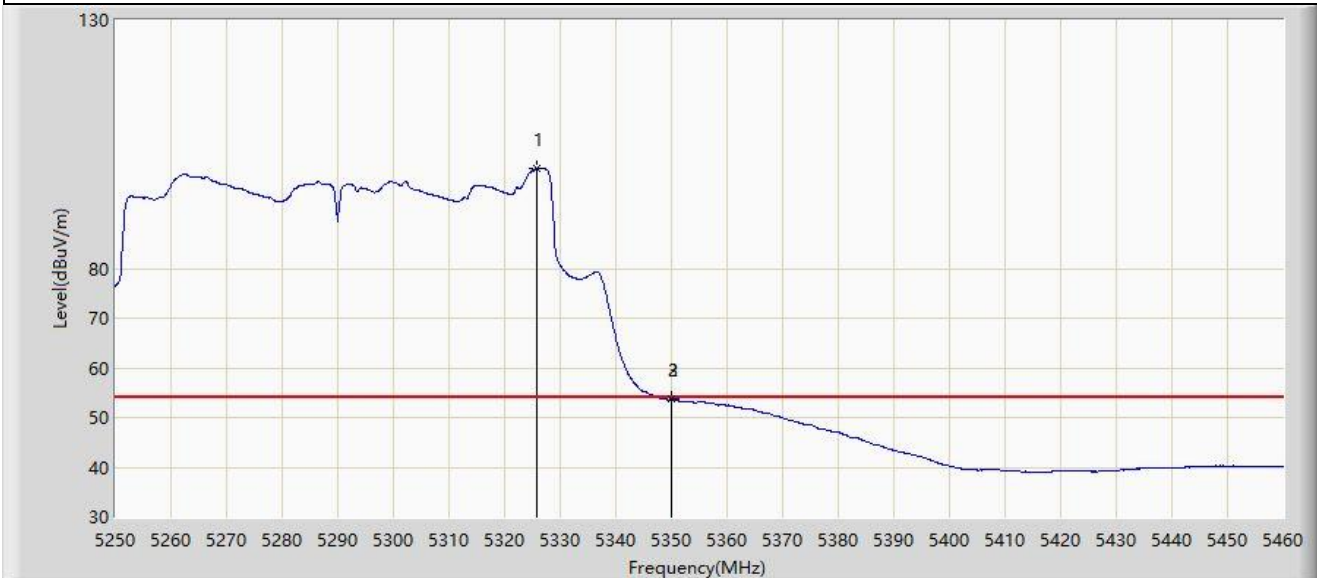

No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		5325.705	100.089	61.427	N/A	N/A	38.662	AV
2		5350.000	53.727	55.131	-0.273	54.000	-1.404	AV
3	*	5350.065	53.771	55.209	-0.229	54.000	-1.439	AV


Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).



Site: SIP-AC3	Test Date: 2024-01-24
Limit: FCC_5G_RE(3m)	Engineer: Arvin Ding
Probe: HF907_102861_1-18GHz	Polarity: Vertical
EUT: Tri-band Wi-Fi 7 Wireless AP	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at 5290MHz	

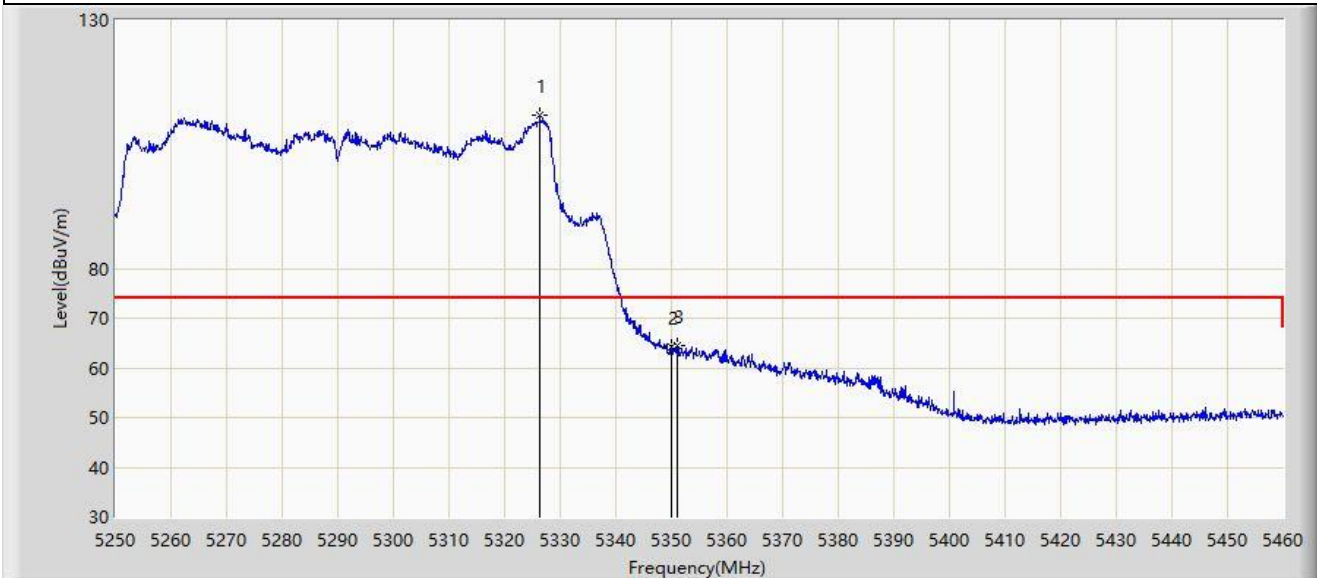


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		5326.335	110.775	72.125	N/A	N/A	38.650	PK
2		5350.000	64.110	65.514	-9.890	74.000	-1.404	PK
3	*	5351.010	64.414	66.334	-9.586	74.000	-1.921	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2024-01-24
Limit: FCC_5G_RE(3m)	Engineer: Arvin Ding
Probe: HF907_102861_1-18GHz	Polarity: Vertical
EUT: Tri-band Wi-Fi 7 Wireless AP	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at 5290MHz	

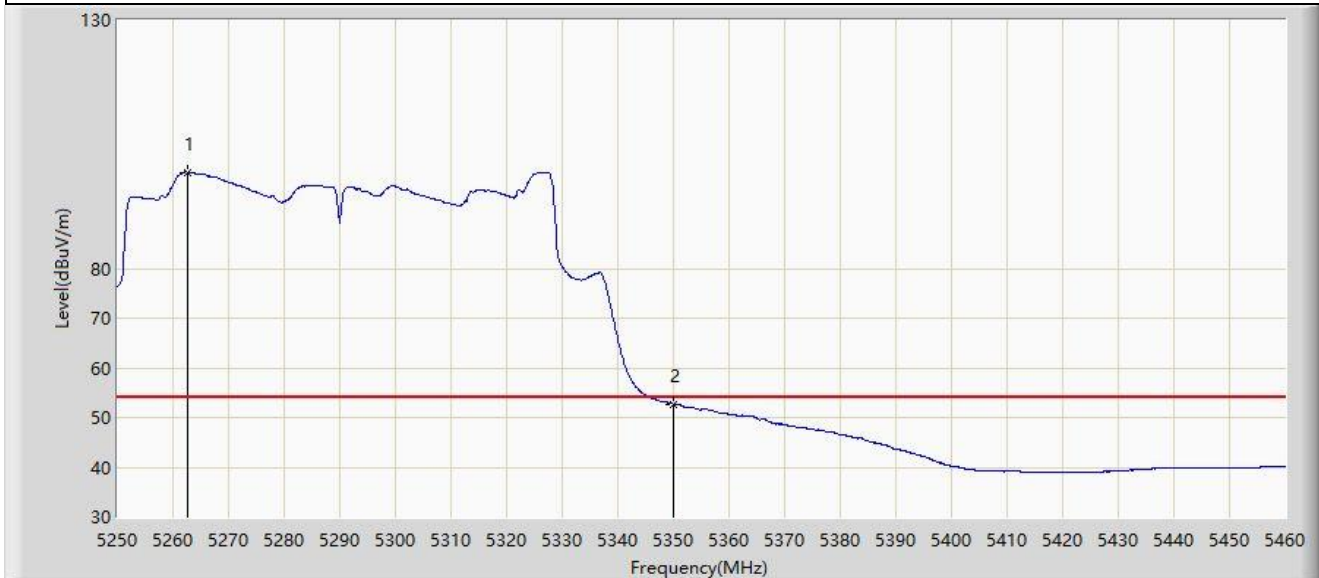


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		5262.600	99.419	55.737	N/A	N/A	43.681	AV
2	*	5350.000	52.683	54.087	-1.317	54.000	-1.404	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2024-02-26
Limit: FCC_5G_RE(3m)	Engineer: Mero Zhou
Probe: HF907_102861_1-18GHz	Polarity: Horizontal
EUT: WF825	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at 5530MHz	

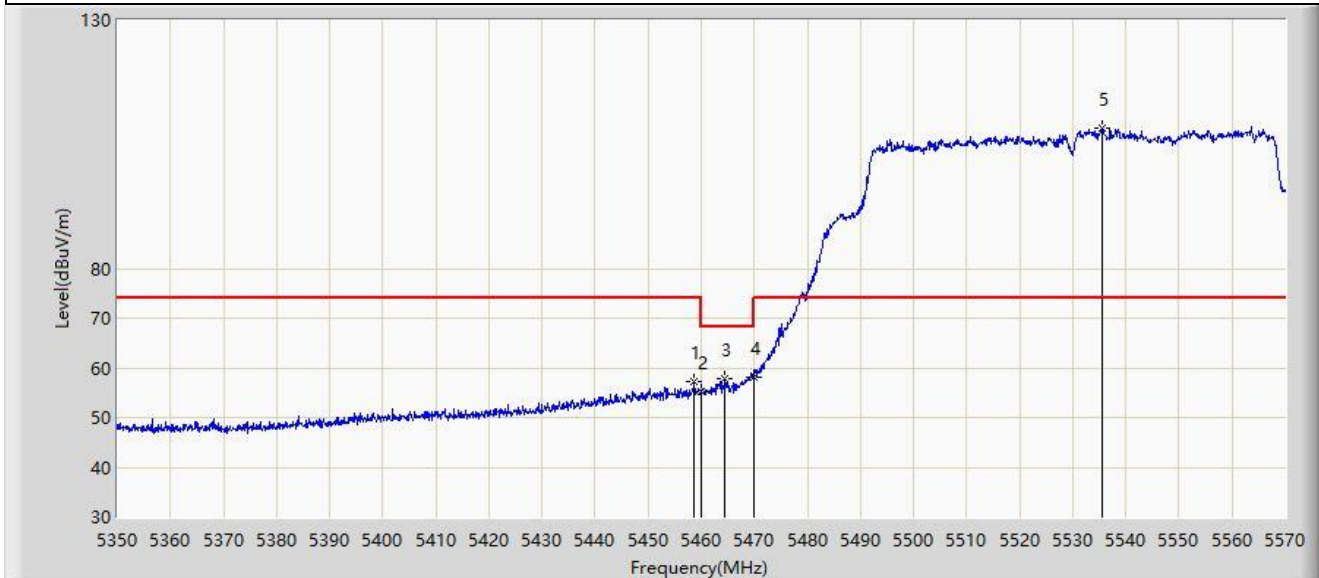


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5458.680	57.261	60.728	-16.739	74.000	-3.466	PK
2		5460.000	55.362	58.705	-12.838	68.200	-3.343	PK
3		5464.400	57.970	60.916	-10.230	68.200	-2.946	PK
4	*	5470.000	58.213	59.823	-9.987	68.200	-1.610	PK
5		5535.570	108.134	66.383	N/A	N/A	41.751	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2024-02-26
Limit: FCC_5G_RE(3m)	Engineer: Mero Zhou
Probe: HF907_102861_1-18GHz	Polarity: Horizontal
EUT: WF825	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at 5530MHz	

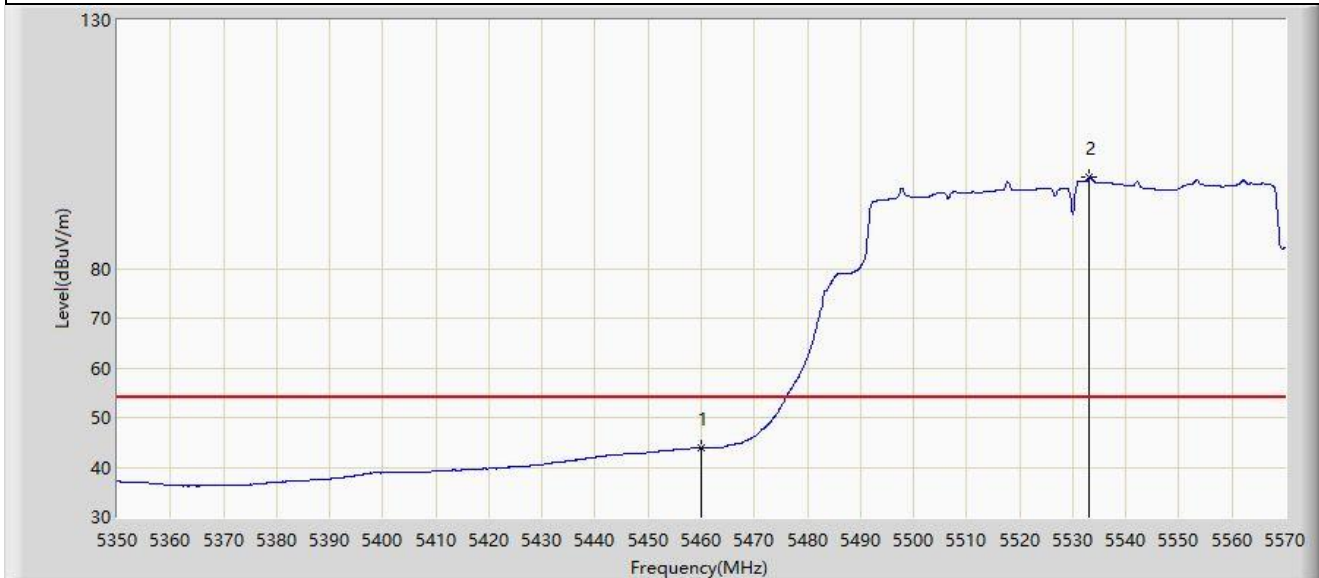


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	5460.000	43.855	47.198	-10.145	54.000	-3.343	AV
2		5533.150	98.300	53.281	N/A	N/A	45.018	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2024-02-26
Limit: FCC_5G_RE(3m)	Engineer: Mero Zhou
Probe: HF907_102861_1-18GHz	Polarity: Vertical
EUT: WF825	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at 5530MHz	

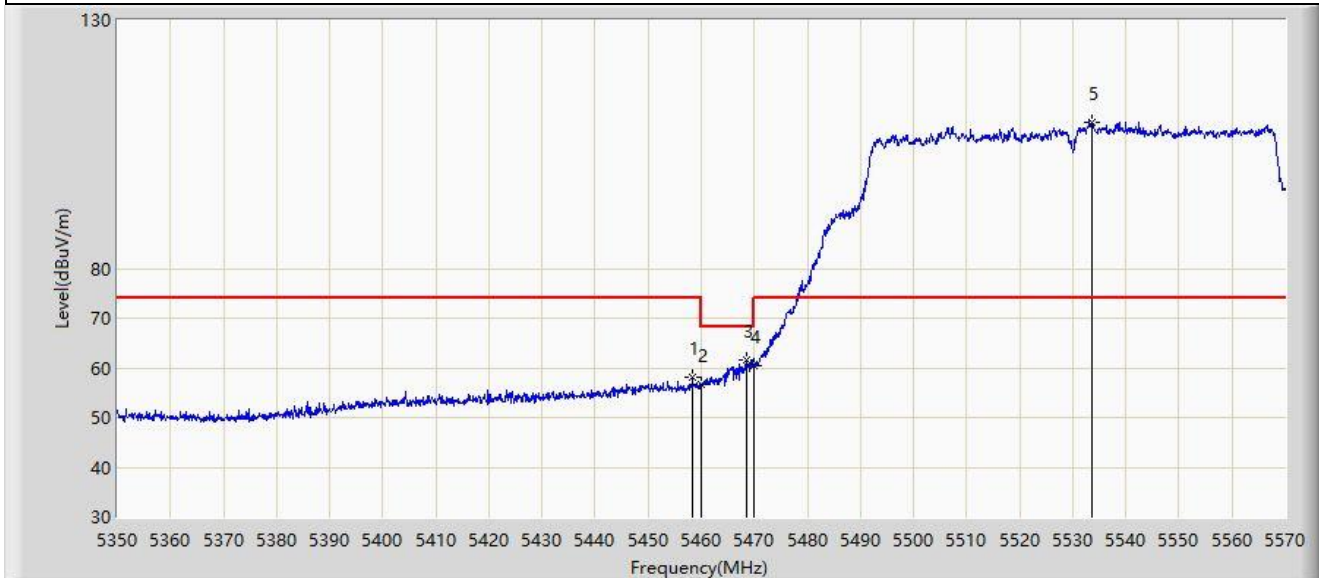

No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		5458.350	57.973	61.421	-16.027	74.000	-3.448	PK
2		5460.000	56.807	60.150	-11.393	68.200	-3.343	PK
3	*	5468.580	61.682	63.761	-6.518	68.200	-2.079	PK
4		5470.000	60.317	61.927	-7.883	68.200	-1.610	PK
5		5533.700	109.355	65.324	N/A	N/A	44.031	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2024-02-26
Limit: FCC_5G_RE(3m)	Engineer: Mero Zhou
Probe: HF907_102861_1-18GHz	Polarity: Vertical
EUT: WF825	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at 5530MHz	




No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5460.000	45.277	48.620	-8.723	54.000	-3.343	AV
2		5533.260	99.367	54.543	N/A	N/A	44.824	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2024-02-23
Limit: FCC_5G_RE(3m)	Engineer: Arvin Ding
Probe: HF907_102861_1-18GHz	Polarity: Horizontal
EUT: Tri-band Wi-Fi 7 Wireless AP	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at 5610MHz	

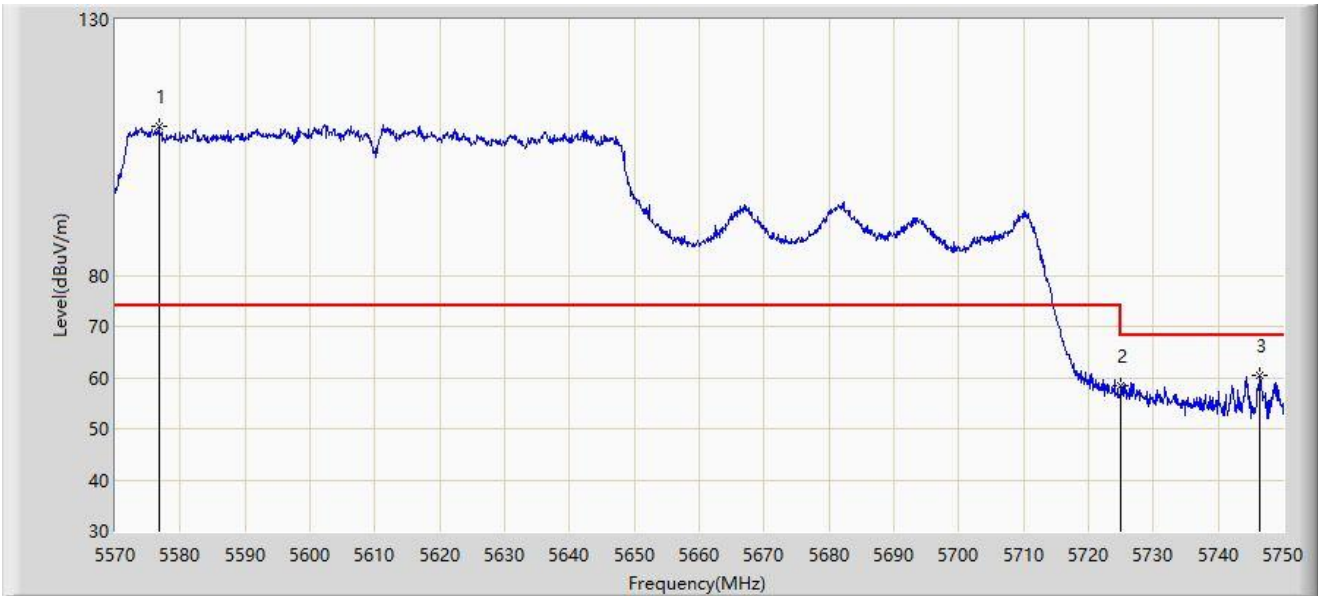


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		5576.660	109.185	68.039	N/A	N/A	41.145	PK
2		5725.000	58.475	60.310	-9.725	68.200	-1.836	PK
3	*	5746.490	60.369	65.341	-7.831	68.200	-4.973	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2024-02-23
Limit: FCC_5G_RE(3m)	Engineer: Arvin Ding
Probe: HF907_102861_1-18GHz	Polarity: Vertical
EUT: Tri-band Wi-Fi 7 Wireless AP	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at 5610MHz	

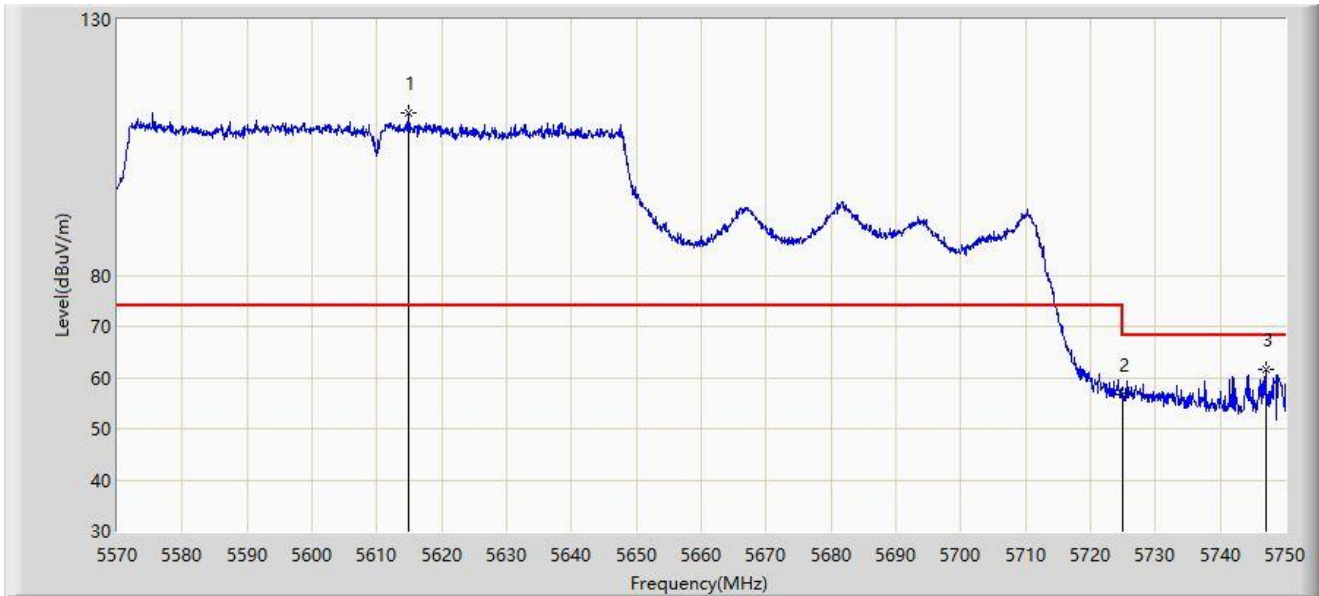

No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		5614.820	111.736	67.278	N/A	N/A	44.458	PK
2		5725.000	56.742	58.577	-11.458	68.200	-1.836	PK
3	*	5747.030	61.615	66.627	-6.585	68.200	-5.011	PK


Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).



Site: SIP-AC3	Test Date: 2024-01-25
Limit: FCC_5.8G_RE(3m)	Engineer: Arvin Ding
Probe: HF907_102861_1-18GHz	Polarity: Horizontal
EUT: Tri-band Wi-Fi 7 Wireless AP	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at 5775MHz	

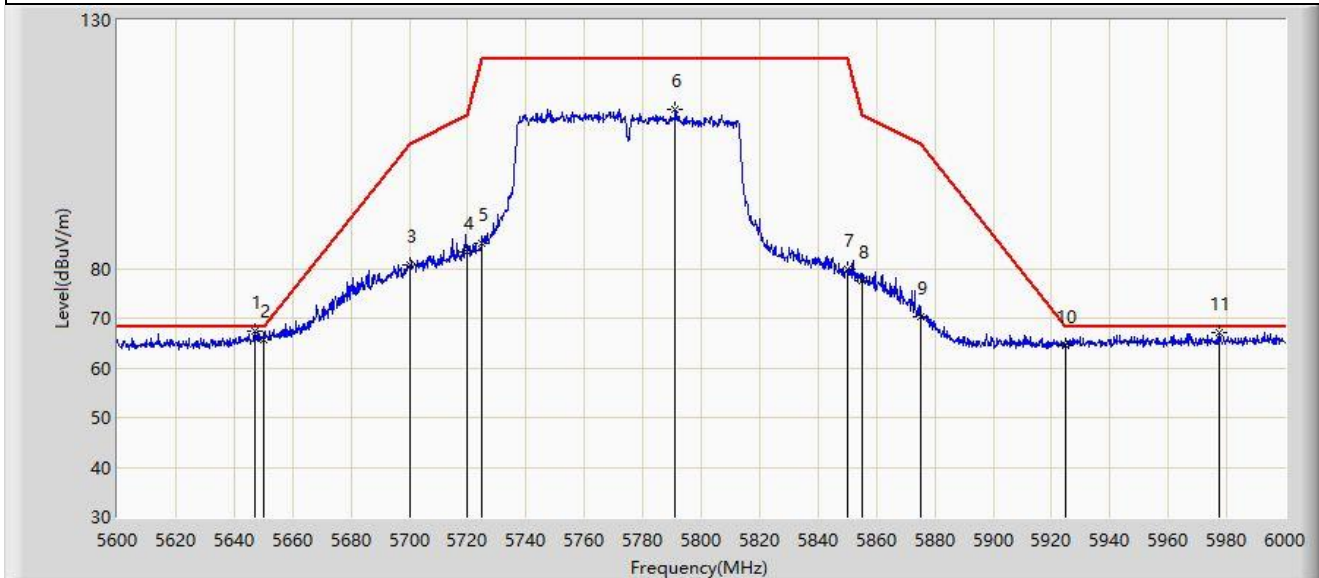


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5647.000	67.484	74.806	-0.716	68.200	-7.323	PK
2		5650.000	65.661	72.981	-2.539	68.200	-7.319	PK
3		5700.000	80.761	87.935	-24.439	105.200	-7.174	PK
4		5720.000	83.410	90.882	-27.390	110.800	-7.472	PK
5		5725.000	85.175	92.636	-37.025	122.200	-7.461	PK
6		5791.200	112.133	119.558	N/A	N/A	-7.425	PK
7		5850.000	79.982	87.219	-42.218	122.200	-7.237	PK
8		5855.000	77.483	84.701	-33.317	110.800	-7.217	PK
9		5875.000	70.432	77.784	-34.768	105.200	-7.352	PK
10		5925.000	64.426	71.552	-3.774	68.200	-7.126	PK
11		5977.200	67.197	74.186	-1.003	68.200	-6.989	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2024-01-25
Limit: FCC_5.8G_RE(3m)	Engineer: Arvin Ding
Probe: HF907_102861_1-18GHz	Polarity: Vertical
EUT: Tri-band Wi-Fi 7 Wireless AP	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at 5775MHz	

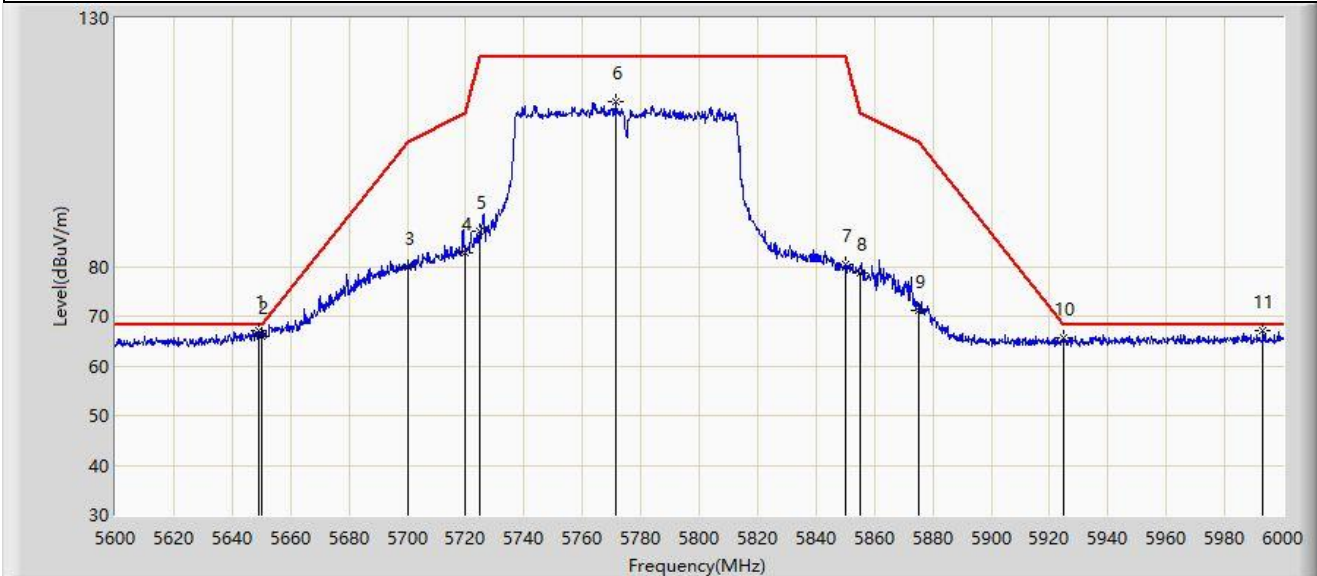


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5649.200	67.227	74.547	-0.973	68.200	-7.320	PK
2		5650.000	65.934	73.254	-2.266	68.200	-7.319	PK
3		5700.000	79.956	87.130	-25.244	105.200	-7.174	PK
4		5720.000	82.768	90.240	-28.032	110.800	-7.472	PK
5		5725.000	87.114	94.575	-35.086	122.200	-7.461	PK
6		5771.200	113.295	120.676	N/A	N/A	-7.381	PK
7		5850.000	80.511	87.748	-41.689	122.200	-7.237	PK
8		5855.000	78.629	85.847	-32.171	110.800	-7.217	PK
9		5875.000	71.059	78.411	-34.141	105.200	-7.352	PK
10		5925.000	65.524	72.650	-2.676	68.200	-7.126	PK
11		5993.200	67.014	73.985	-1.186	68.200	-6.972	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2024-01-24
Limit: FCC_5G_RE(3m)	Engineer: Arvin Ding
Probe: HF907_102861_1-18GHz	Polarity: Horizontal
EUT: Tri-band Wi-Fi 7 Wireless AP	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT160 at 5250MHz	

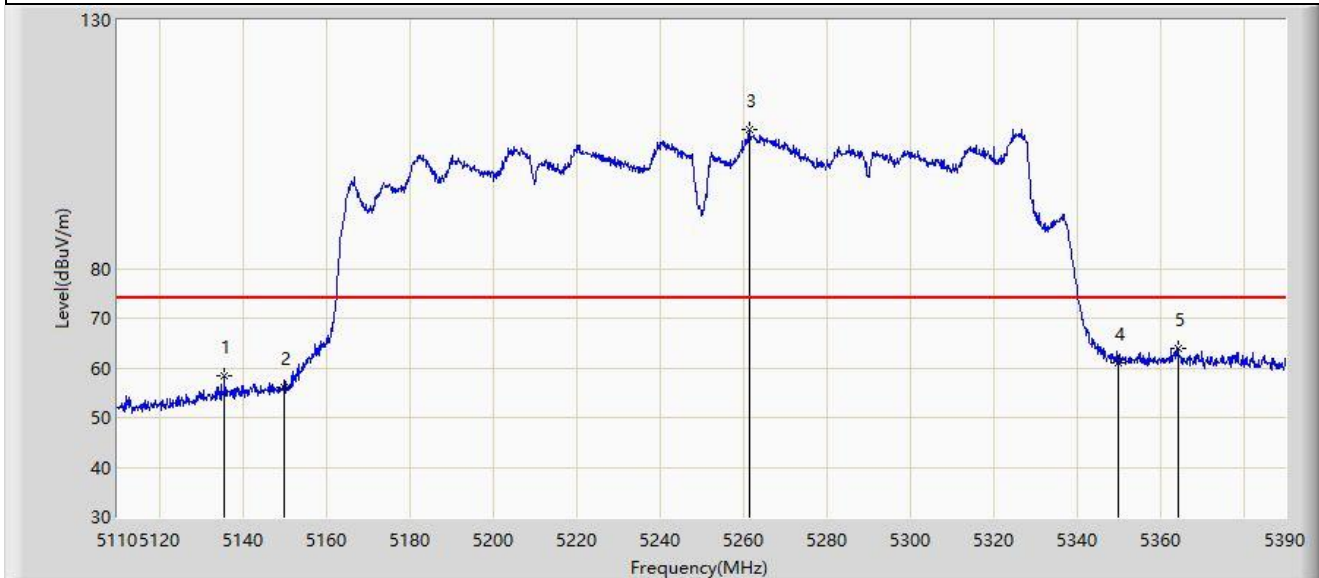

No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5135.760	58.483	62.916	-15.517	74.000	-4.433	PK
2		5150.000	56.226	59.472	-17.774	74.000	-3.246	PK
3		5261.480	107.898	62.521	N/A	N/A	45.377	PK
4		5350.000	61.100	62.504	-12.900	74.000	-1.404	PK
5	*	5364.380	63.920	68.429	-10.080	74.000	-4.509	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2024-01-24
Limit: FCC_5G_RE(3m)	Engineer: Arvin Ding
Probe: HF907_102861_1-18GHz	Polarity: Horizontal
EUT: Tri-band Wi-Fi 7 Wireless AP	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT160 at 5250MHz	




No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5150.000	44.756	48.002	-9.244	54.000	-3.246	AV
2		5327.140	97.754	58.642	N/A	N/A	39.112	AV
3		5350.000	50.997	52.401	-3.003	54.000	-1.404	AV
4	*	5364.380	51.672	56.181	-2.328	54.000	-4.509	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2024-01-24
Limit: FCC_5G_RE(3m)	Engineer: Arvin Ding
Probe: HF907_102861_1-18GHz	Polarity: Vertical
EUT: Tri-band Wi-Fi 7 Wireless AP	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT160 at 5250MHz	

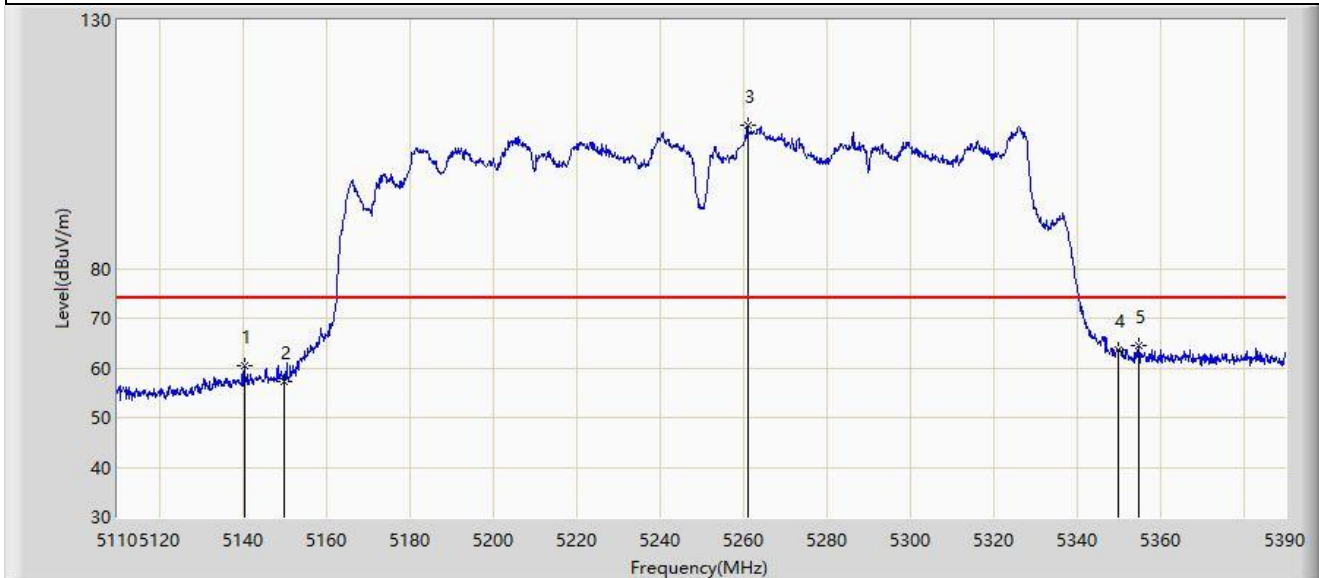


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		5140.380	60.351	64.614	-13.649	74.000	-4.263	PK
2		5150.000	57.380	60.626	-16.620	74.000	-3.246	PK
3		5261.060	108.710	62.868	N/A	N/A	45.843	PK
4		5350.000	63.578	64.982	-10.422	74.000	-1.404	PK
5	*	5355.000	64.589	67.751	-9.411	74.000	-3.162	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2024-01-24
Limit: FCC_5G_RE(3m)	Engineer: Arvin Ding
Probe: HF907_102861_1-18GHz	Polarity: Vertical
EUT: Tri-band Wi-Fi 7 Wireless AP	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT160 at 5250MHz	

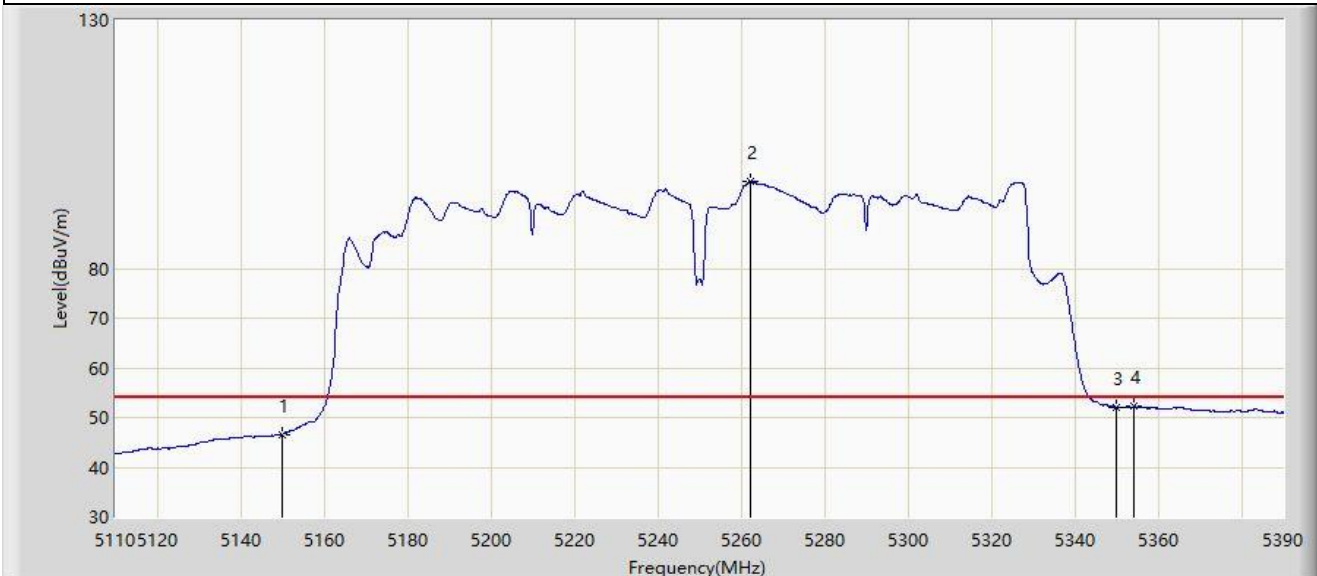


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5150.000	46.605	49.851	-7.395	54.000	-3.246	AV
2		5262.320	97.564	53.317	N/A	N/A	44.247	AV
3		5350.000	52.101	53.505	-1.899	54.000	-1.404	AV
4	*	5354.300	52.177	55.208	-1.823	54.000	-3.031	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2024-01-25
Limit: FCC_5G_RE(3m)	Engineer: Arvin Ding
Probe: HF907_102861_1-18GHz	Polarity: Horizontal
EUT: Tri-band Wi-Fi 7 Wireless AP	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT160 at 5570MHz	

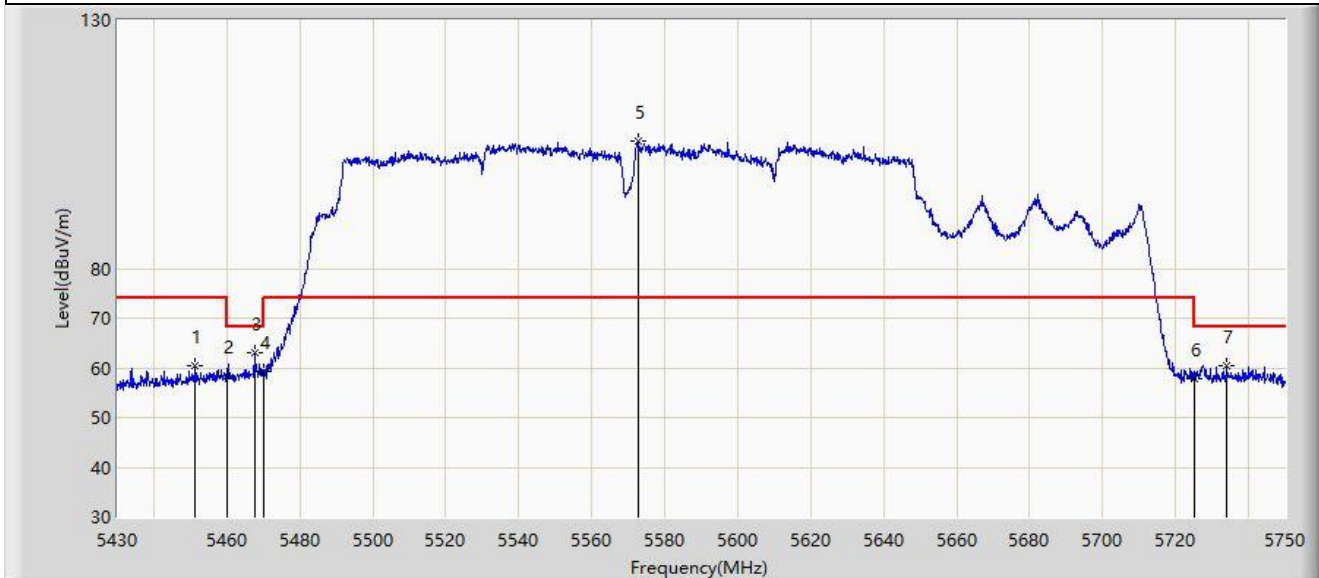


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5451.440	60.368	64.240	-13.632	74.000	-3.872	PK
2		5460.000	58.285	61.628	-9.915	68.200	-3.343	PK
3	*	5467.600	63.069	65.447	-5.131	68.200	-2.378	PK
4		5470.000	59.360	60.970	-8.840	68.200	-1.610	PK
5		5572.560	105.705	59.264	N/A	N/A	46.442	PK
6		5725.000	57.780	59.615	-10.420	68.200	-1.836	PK
7		5734.160	60.345	64.542	-7.855	68.200	-4.197	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2024-01-25
Limit: FCC_5G_RE(3m)	Engineer: Arvin Ding
Probe: HF907_102861_1-18GHz	Polarity: Horizontal
EUT: Tri-band Wi-Fi 7 Wireless AP	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT160 at 5570MHz	

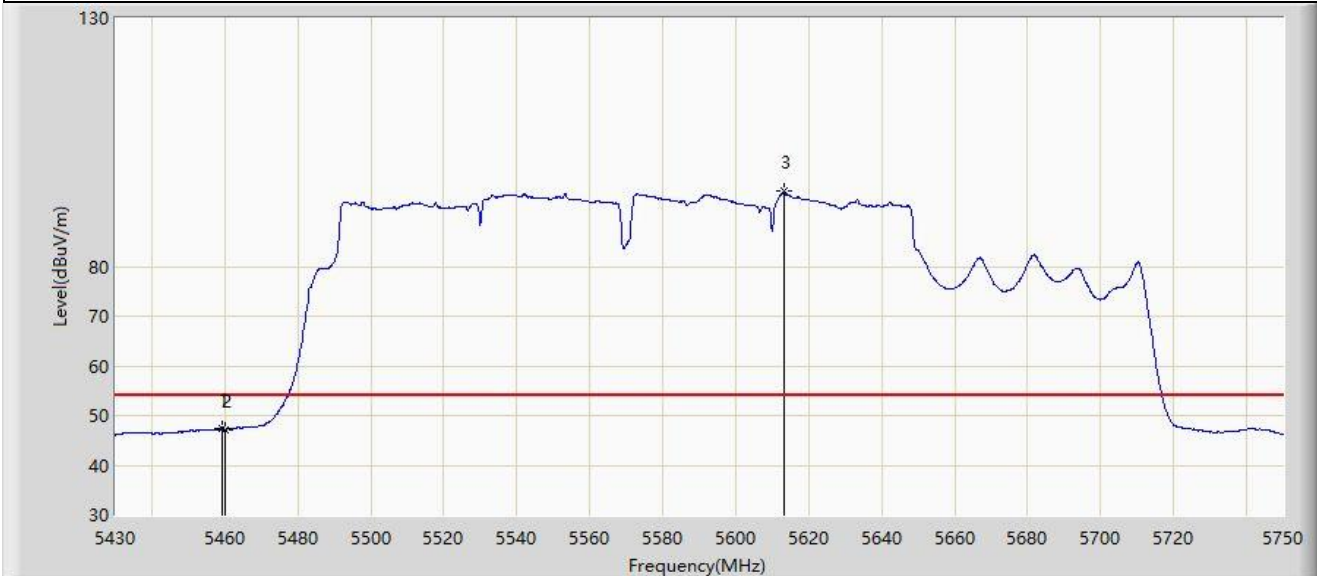

No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5459.280	47.261	50.694	-6.739	54.000	-3.434	AV
2		5460.000	47.226	50.569	-6.774	54.000	-3.343	AV
3		5613.360	95.118	48.391	N/A	N/A	46.727	AV


Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).



Site: SIP-AC3	Test Date: 2024-01-25
Limit: FCC_5G_RE(3m)	Engineer: Arvin Ding
Probe: HF907_102861_1-18GHz	Polarity: Vertical
EUT: Tri-band Wi-Fi 7 Wireless AP	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT160 at 5570MHz	

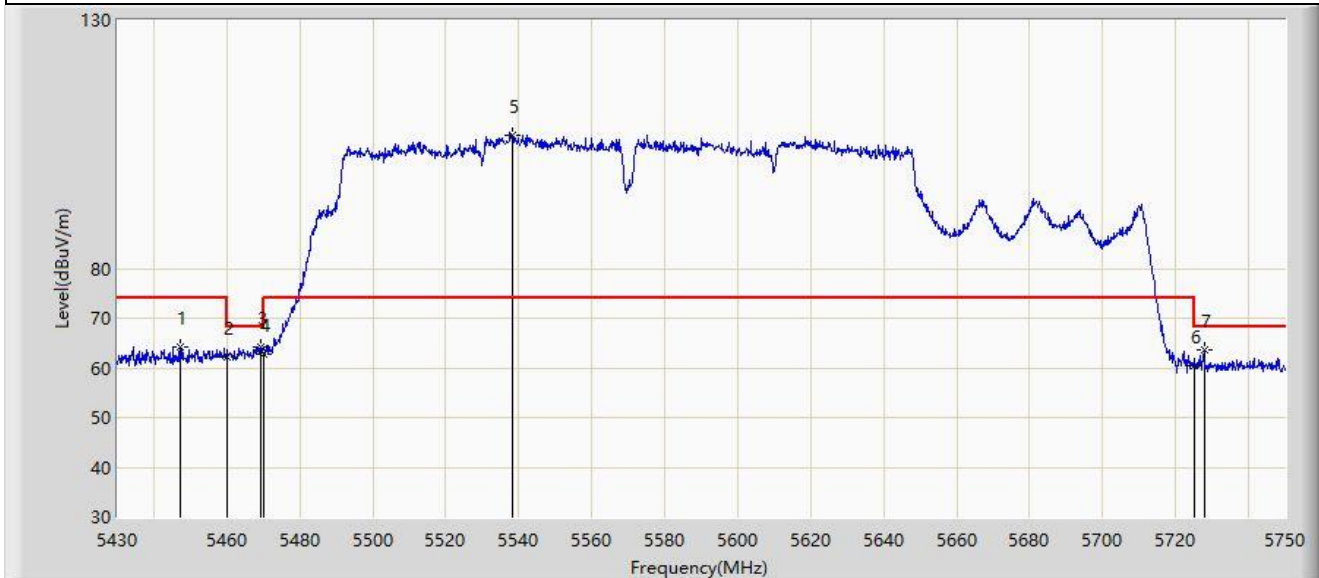


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		5447.440	64.320	68.422	-9.680	74.000	-4.102	PK
2		5460.000	62.317	65.660	-5.883	68.200	-3.343	PK
3	*	5469.360	64.153	65.951	-4.047	68.200	-1.798	PK
4		5470.000	62.852	64.462	-5.348	68.200	-1.610	PK
5		5538.160	106.874	67.186	N/A	N/A	39.687	PK
6		5725.000	60.361	62.196	-7.839	68.200	-1.836	PK
7		5727.760	63.512	66.550	-4.688	68.200	-3.038	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2024-01-25
Limit: FCC_5G_RE(3m)	Engineer: Arvin Ding
Probe: HF907_102861_1-18GHz	Polarity: Vertical
EUT: Tri-band Wi-Fi 7 Wireless AP	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT160 at 5570MHz	

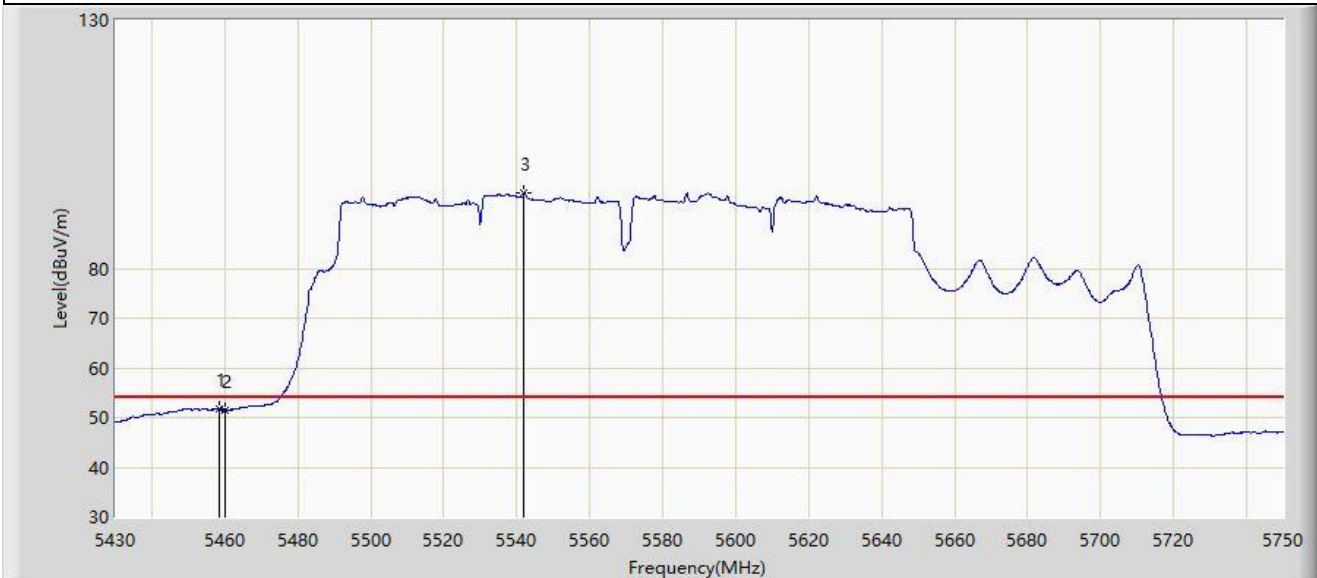


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	5458.480	51.838	55.286	-2.162	54.000	-3.448	AV
2		5460.000	51.532	54.875	-2.468	54.000	-3.343	AV
3		5542.000	95.078	56.283	N/A	N/A	38.794	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2024-01-24
Limit: FCC_5G_RE(3m)	Engineer: Arvin Ding
Probe: HF907_102861_1-18GHz	Polarity: Horizontal
EUT: Tri-band Wi-Fi 7 Wireless AP	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 5180MHz	

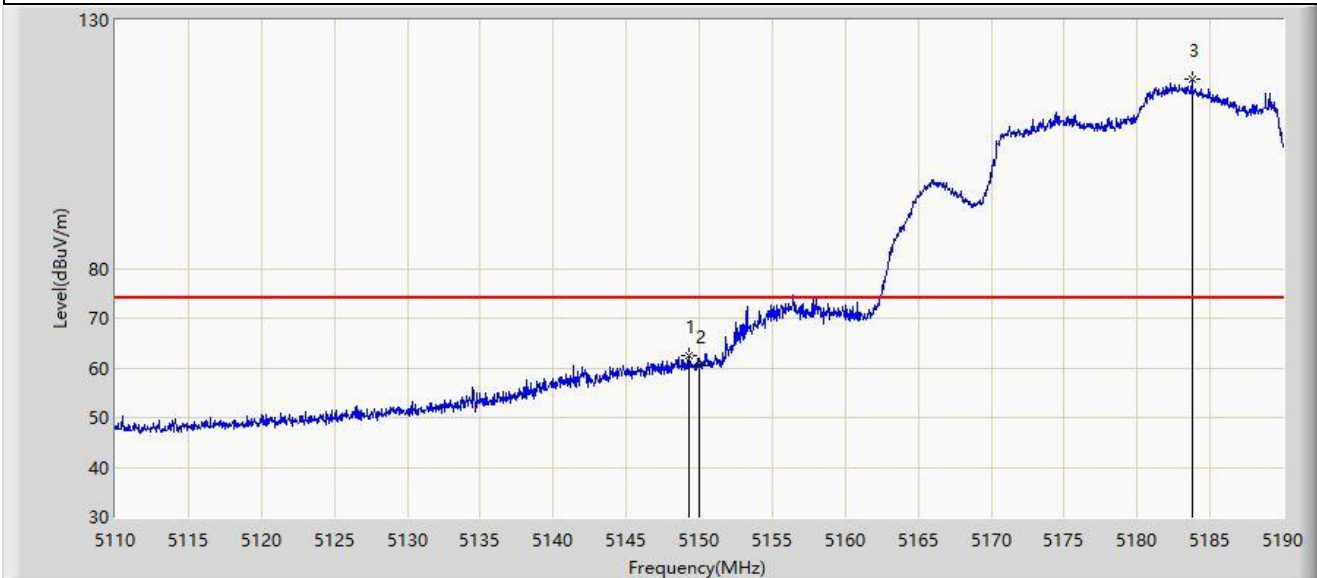


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5149.320	62.356	65.758	-11.644	74.000	-3.401	PK
2		5150.000	60.333	63.579	-13.667	74.000	-3.246	PK
3		5183.760	118.020	81.556	N/A	N/A	36.464	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2024-01-24
Limit: FCC_5G_RE(3m)	Engineer: Arvin Ding
Probe: HF907_102861_1-18GHz	Polarity: Horizontal
EUT: Tri-band Wi-Fi 7 Wireless AP	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 5180MHz	

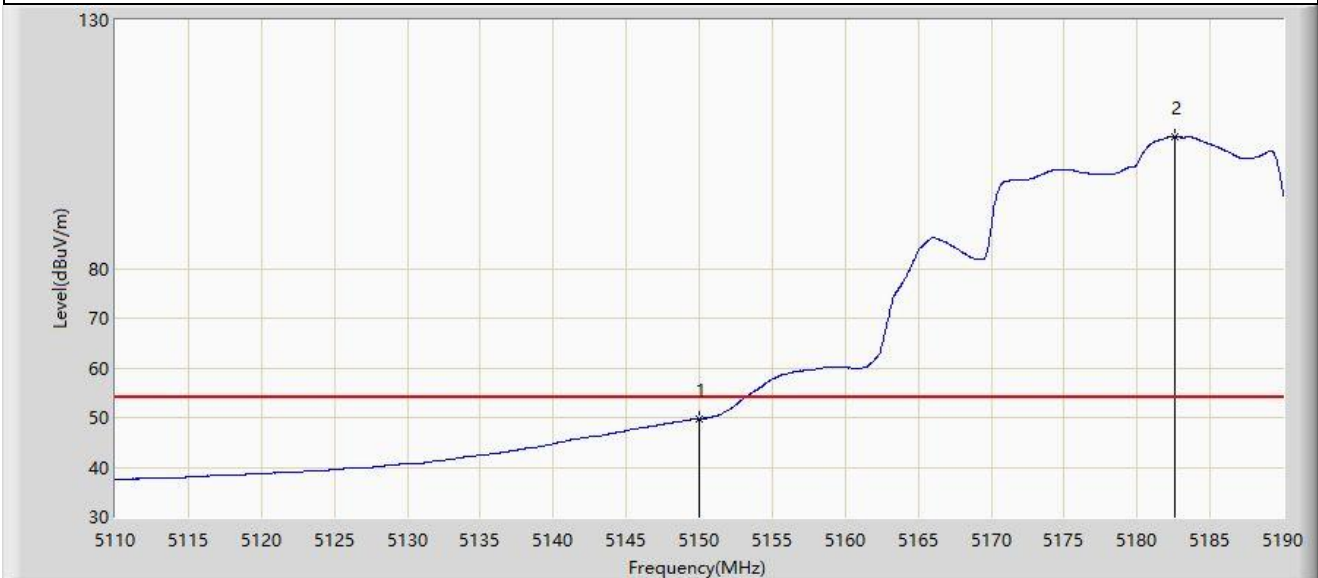


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5150.000	49.781	53.027	-4.219	54.000	-3.246	AV
2		5182.600	106.590	68.189	N/A	N/A	38.401	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2024-01-24
Limit: FCC_5G_RE(3m)	Engineer: Arvin Ding
Probe: HF907_102861_1-18GHz	Polarity: Vertical
EUT: Tri-band Wi-Fi 7 Wireless AP	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 5180MHz	

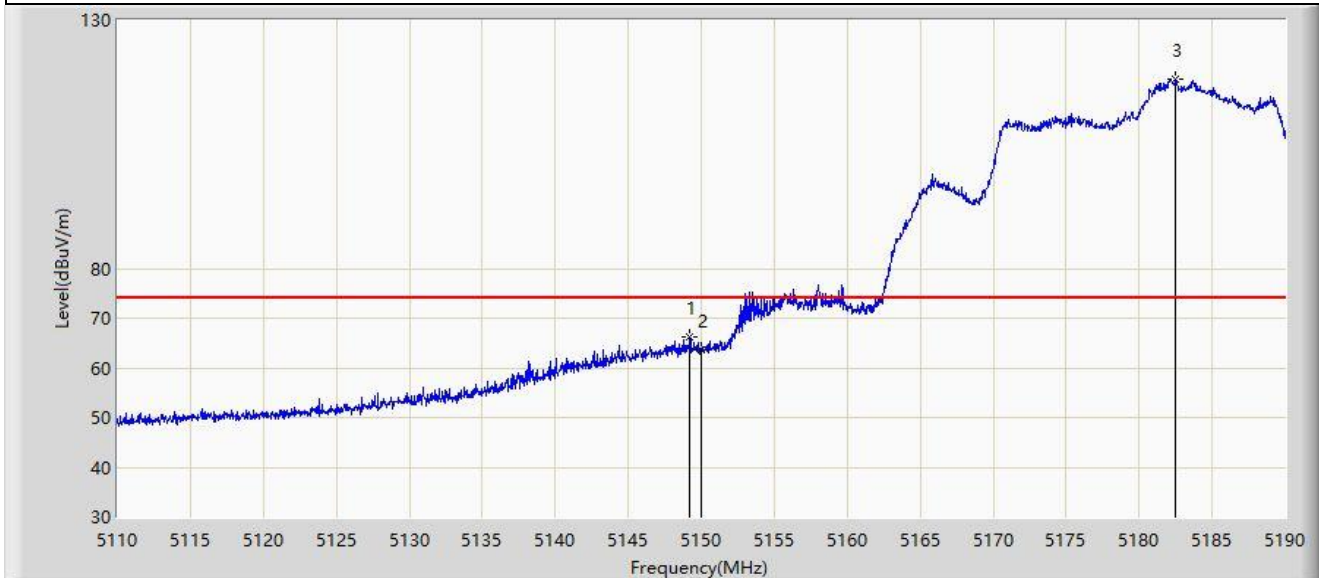


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5149.200	66.243	69.667	-7.757	74.000	-3.424	PK
2		5150.000	63.486	66.732	-10.514	74.000	-3.246	PK
3		5182.480	118.057	79.408	N/A	N/A	38.648	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2024-01-24
Limit: FCC_5G_RE(3m)	Engineer: Arvin Ding
Probe: HF907_102861_1-18GHz	Polarity: Vertical
EUT: Tri-band Wi-Fi 7 Wireless AP	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 5180MHz	

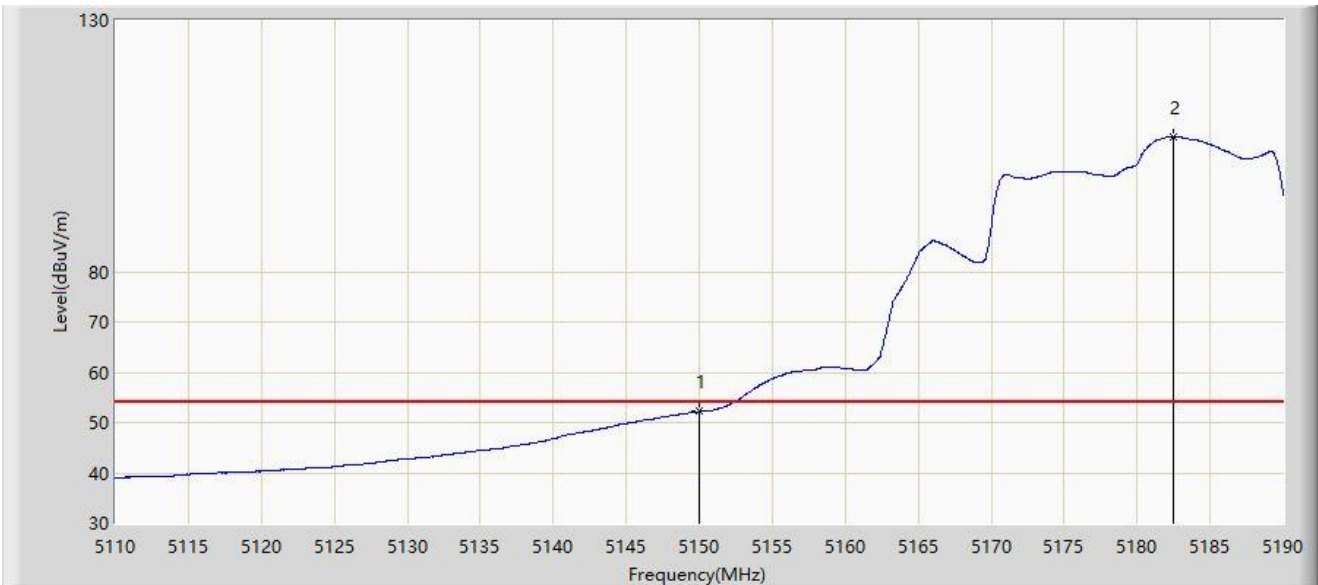


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5150.000	52.186	55.432	-1.814	54.000	-3.246	AV
2		5182.480	106.923	68.274	N/A	N/A	38.648	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2024-02-23
Limit: FCC_5G_RE(3m)	Engineer: Arvin Ding
Probe: HF907_102861_1-18GHz	Polarity: Horizontal
EUT: Tri-band Wi-Fi 7 Wireless AP	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 5320MHz	

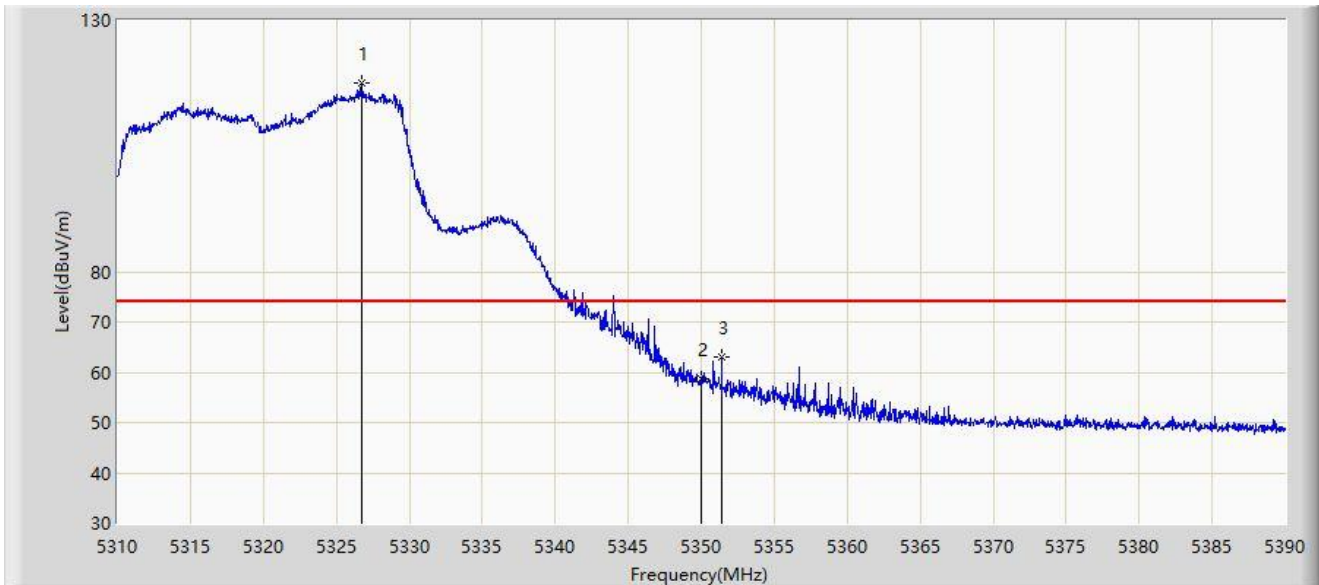


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		5326.760	117.478	78.594	N/A	N/A	38.884	PK
2		5350.000	58.717	60.121	-15.283	74.000	-1.404	PK
3	*	5351.400	62.945	65.056	-11.055	74.000	-2.111	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2024-02-23
Limit: FCC_5G_RE(3m)	Engineer: Arvin Ding
Probe: HF907_102861_1-18GHz	Polarity: Horizontal
EUT: Tri-band Wi-Fi 7 Wireless AP	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 5320MHz	

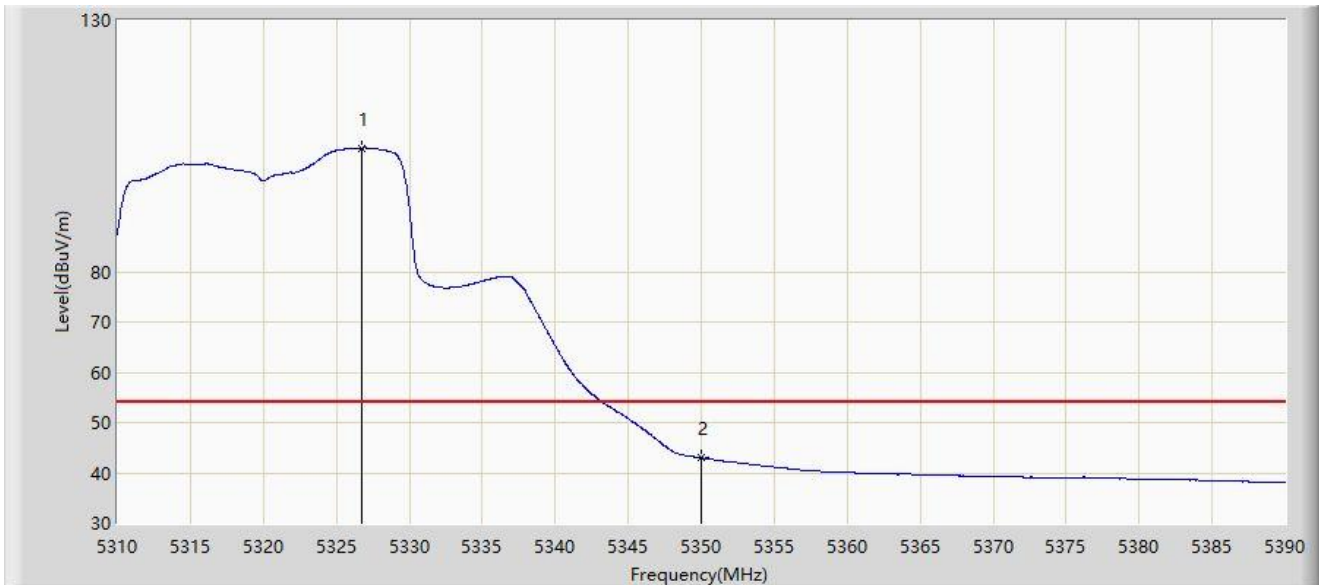

No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		5326.760	104.627	65.743	N/A	N/A	38.884	AV
2	*	5350.000	42.961	44.365	-11.039	54.000	-1.404	AV


Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).



Site: SIP-AC3	Test Date: 2024-02-23
Limit: FCC_5G_RE(3m)	Engineer: Arvin Ding
Probe: HF907_102861_1-18GHz	Polarity: Vertical
EUT: Tri-band Wi-Fi 7 Wireless AP	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 5320MHz	

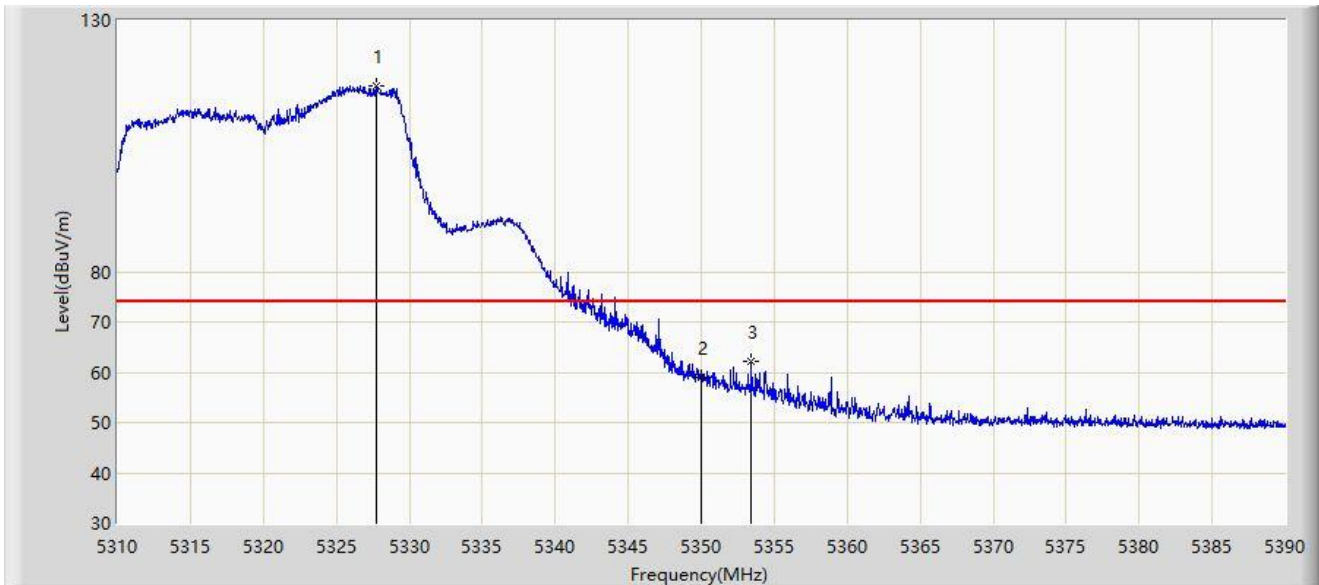


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		5327.760	116.836	77.095	N/A	N/A	39.741	PK
2		5350.000	58.939	60.343	-15.061	74.000	-1.404	PK
3	*	5353.440	62.138	64.924	-11.862	74.000	-2.786	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2024-02-23
Limit: FCC_5G_RE(3m)	Engineer: Arvin Ding
Probe: HF907_102861_1-18GHz	Polarity: Vertical
EUT: Tri-band Wi-Fi 7 Wireless AP	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 5320MHz	

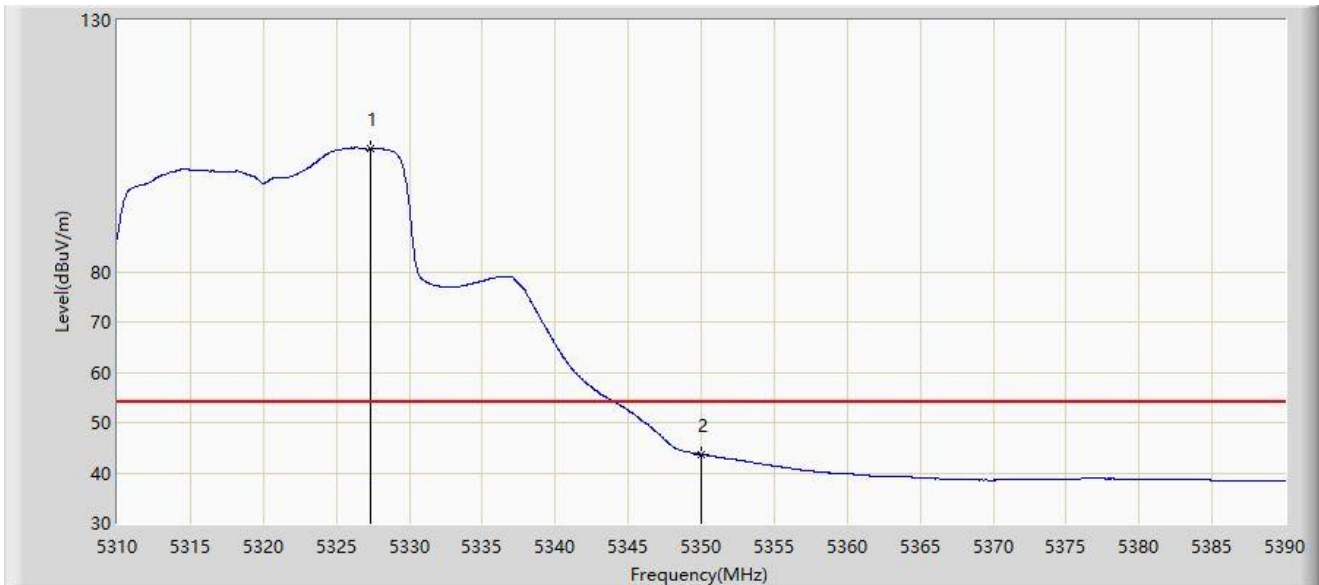


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		5327.360	104.459	65.124	N/A	N/A	39.335	AV
2	*	5350.000	43.651	45.055	-10.349	54.000	-1.404	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2024-02-23
Limit: FCC_5G_RE(3m)	Engineer: Arvin Ding
Probe: HF907_102861_1-18GHz	Polarity: Horizontal
EUT: Tri-band Wi-Fi 7 Wireless AP	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 5500MHz	

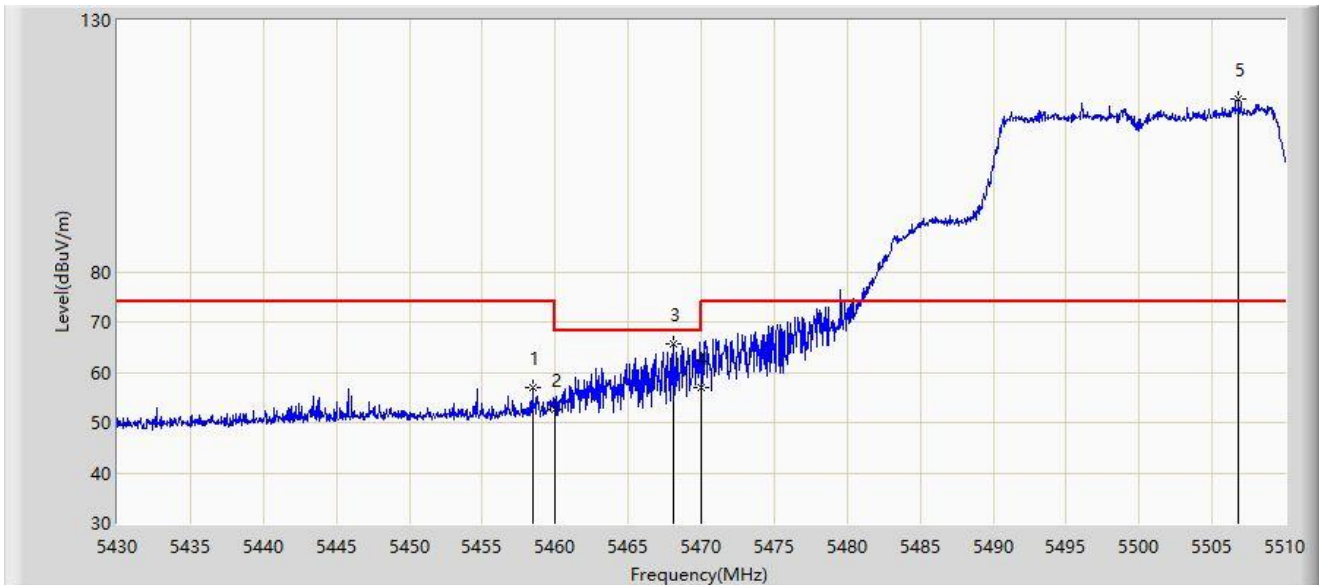


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5458.440	56.868	60.312	-17.132	74.000	-3.444	PK
2		5460.000	52.490	55.833	-15.710	68.200	-3.343	PK
3	*	5468.080	65.646	67.884	-2.554	68.200	-2.238	PK
4		5470.000	57.018	58.628	-11.182	68.200	-1.610	PK
5		5506.800	114.346	73.074	N/A	N/A	41.272	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2024-02-23
Limit: FCC_5G_RE(3m)	Engineer: Arvin Ding
Probe: HF907_102861_1-18GHz	Polarity: Horizontal
EUT: Tri-band Wi-Fi 7 Wireless AP	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 5500MHz	

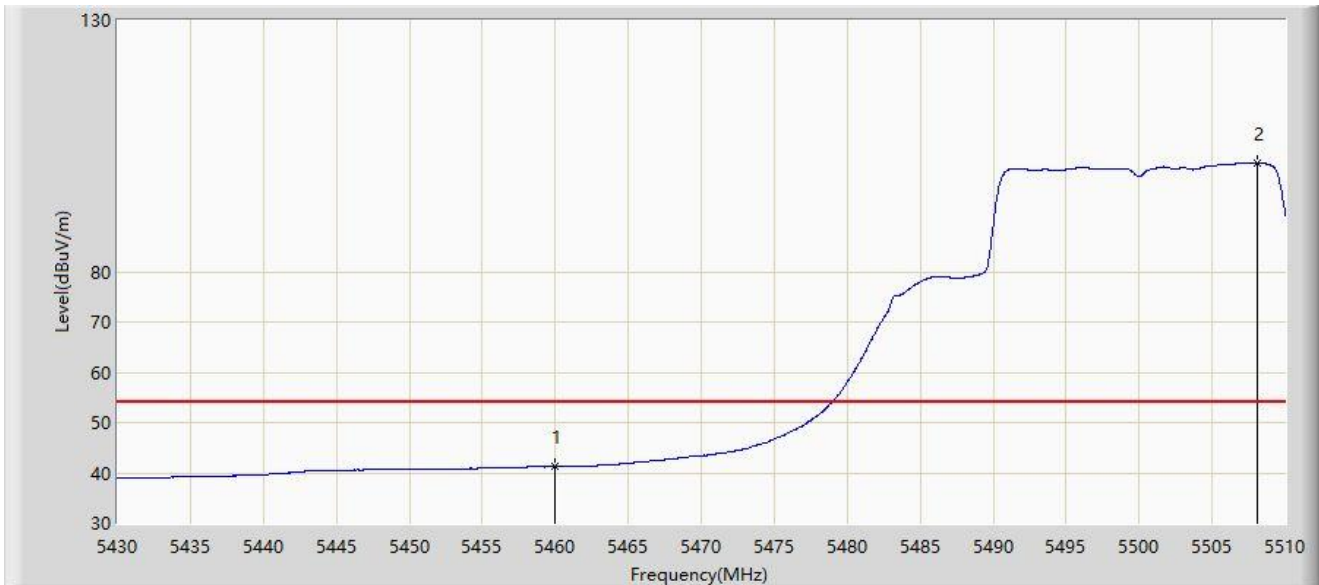


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	5460.000	41.286	44.629	-12.714	54.000	-3.343	AV
2		5508.080	101.726	61.734	N/A	N/A	39.992	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2024-02-23
Limit: FCC_5G_RE(3m)	Engineer: Arvin Ding
Probe: HF907_102861_1-18GHz	Polarity: Vertical
EUT: Tri-band Wi-Fi 7 Wireless AP	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 5500MHz	

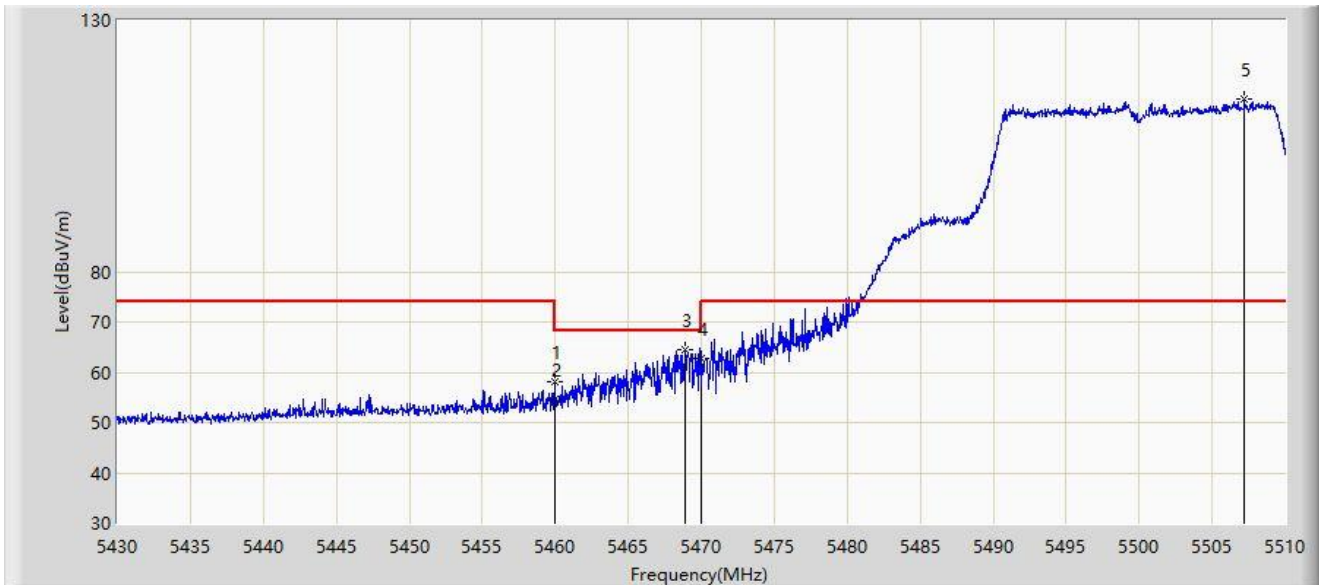


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5459.960	58.195	61.544	-15.805	74.000	-3.348	PK
2		5460.000	54.779	58.122	-13.421	68.200	-3.343	PK
3	*	5468.920	64.610	66.586	-3.590	68.200	-1.976	PK
4		5470.000	62.651	64.261	-5.549	68.200	-1.610	PK
5		5507.240	114.307	73.587	N/A	N/A	40.719	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2024-02-23
Limit: FCC_5G_RE(3m)	Engineer: Arvin Ding
Probe: HF907_102861_1-18GHz	Polarity: Vertical
EUT: Tri-band Wi-Fi 7 Wireless AP	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 5500MHz	

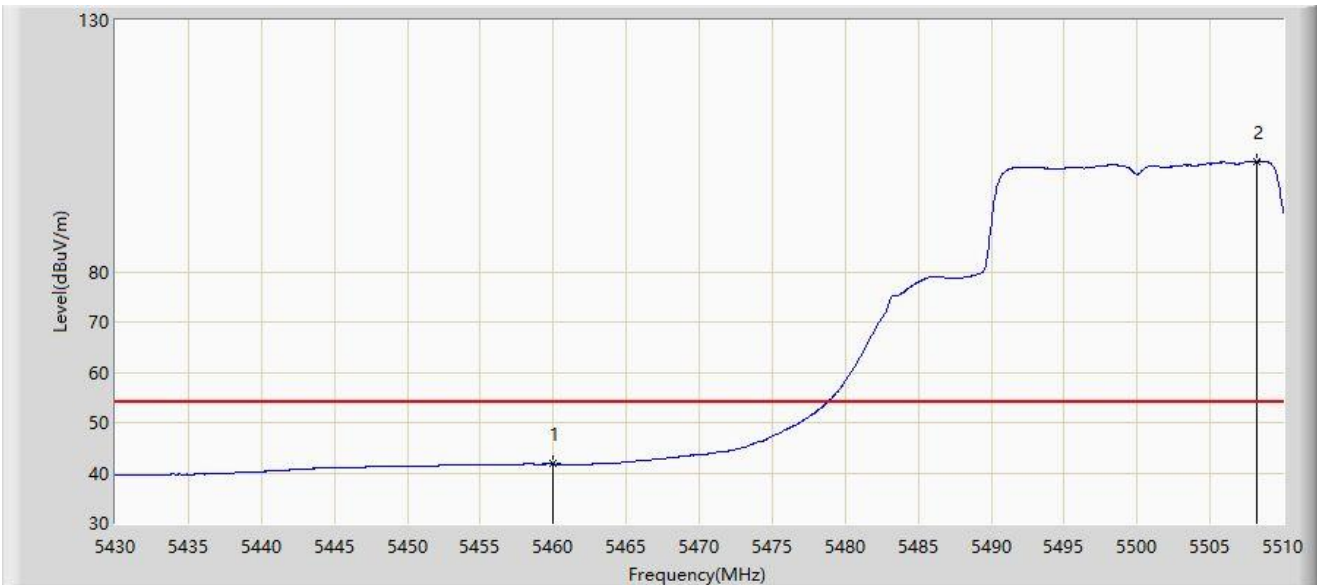


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	5460.000	41.751	45.094	-12.249	54.000	-3.343	AV
2		5508.200	102.004	62.120	N/A	N/A	39.884	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2024-02-26
Limit: FCC_5G_RE(3m)	Engineer: Mero Zhou
Probe: HF907_102861_1-18GHz	Polarity: Horizontal
EUT: WF825	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 5700MHz	

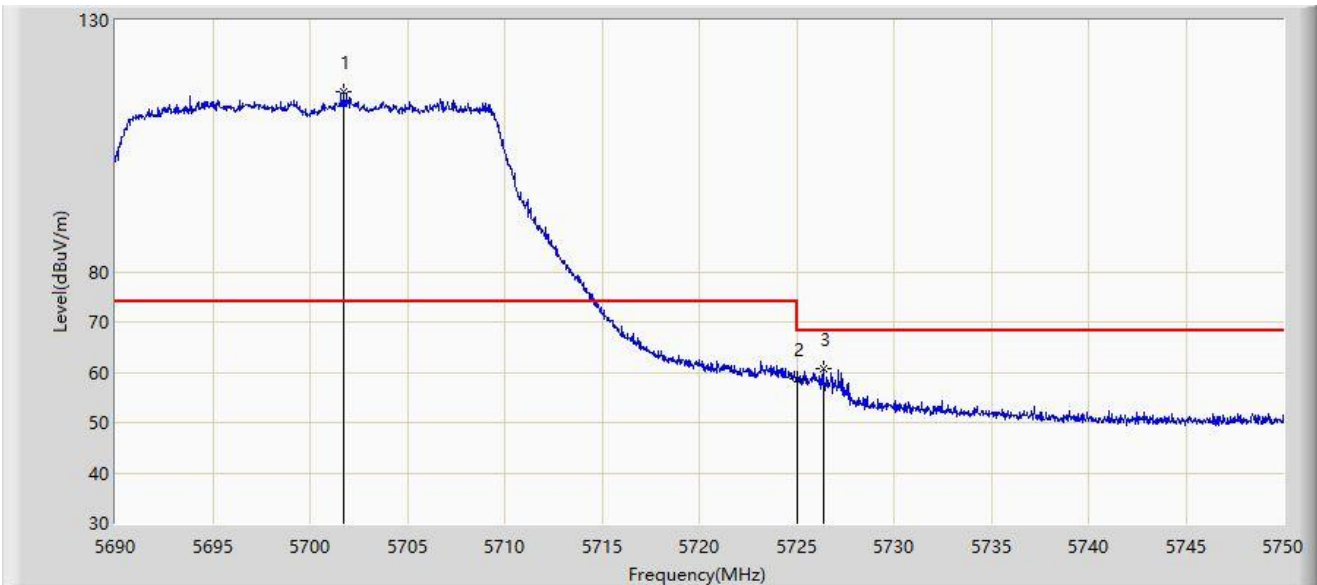


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		5701.730	115.654	79.025	N/A	N/A	36.628	PK
2		5725.000	58.777	60.612	-9.423	68.200	-1.836	PK
3	*	5726.360	60.626	63.144	-7.574	68.200	-2.518	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2024-02-26
Limit: FCC_5G_RE(3m)	Engineer: Mero Zhou
Probe: HF907_102861_1-18GHz	Polarity: Vertical
EUT: WF825	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 5700MHz	

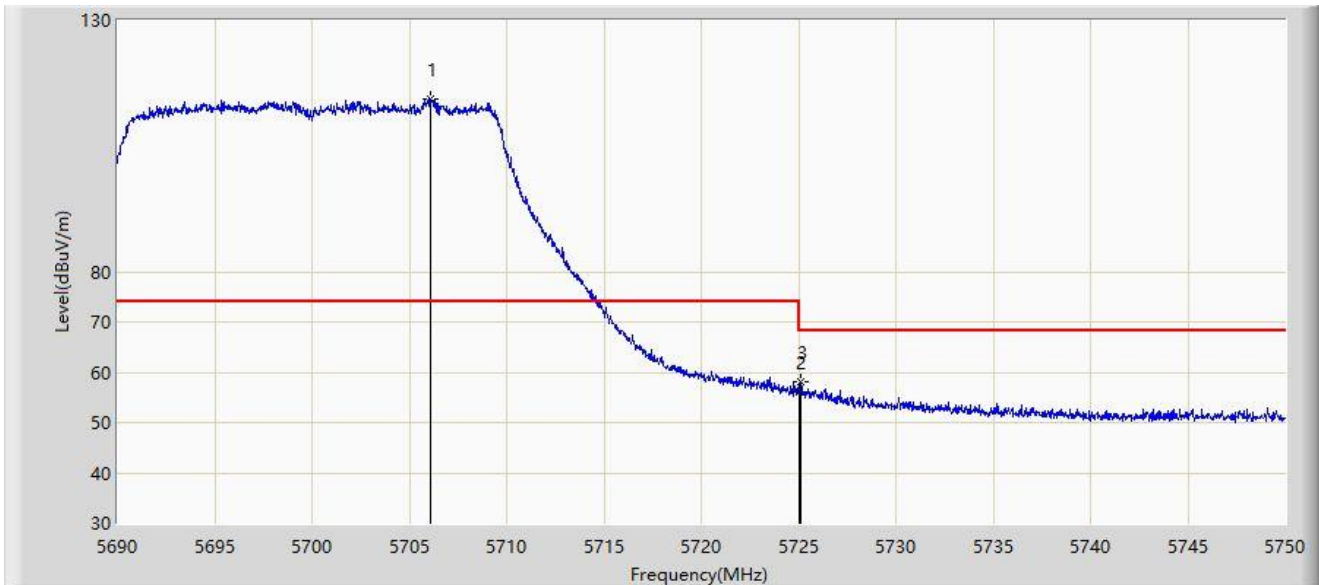

No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		5706.080	114.386	75.739	N/A	N/A	38.648	PK
2		5725.000	56.034	57.869	-12.166	68.200	-1.836	PK
3	*	5725.130	58.093	60.003	-10.107	68.200	-1.910	PK


Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).



Site: SIP-AC3	Test Date: 2024-01-25
Limit: FCC_5.8G_RE(3m)	Engineer: Arvin Ding
Probe: HF907_102861_1-18GHz	Polarity: Horizontal
EUT: Tri-band Wi-Fi 7 Wireless AP	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 5745MHz	

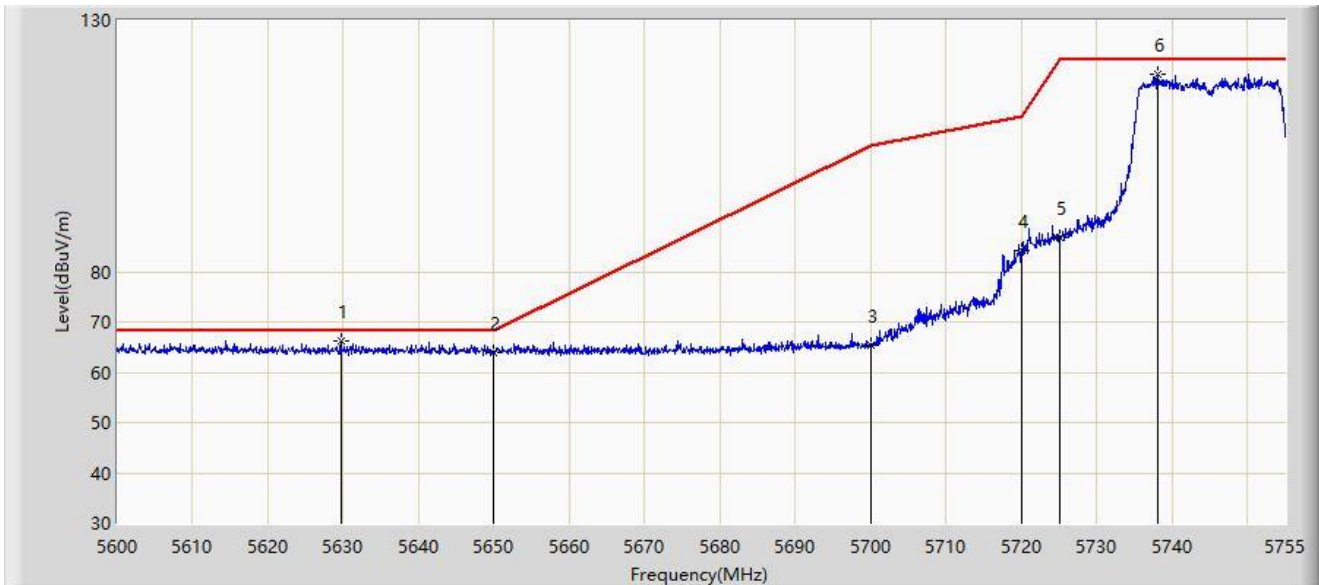


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	5629.683	66.323	73.616	-1.877	68.200	-7.292	PK
2		5650.000	63.836	71.156	-4.364	68.200	-7.319	PK
3		5700.000	65.393	72.567	-39.807	105.200	-7.174	PK
4		5720.000	84.197	91.669	-26.603	110.800	-7.472	PK
5		5725.000	86.821	94.282	-35.379	122.200	-7.461	PK
6		5738.027	119.311	126.824	N/A	N/A	-7.514	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2024-01-25
Limit: FCC_5.8G_RE(3m)	Engineer: Arvin Ding
Probe: HF907_102861_1-18GHz	Polarity: Vertical
EUT: Tri-band Wi-Fi 7 Wireless AP	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 5745MHz	

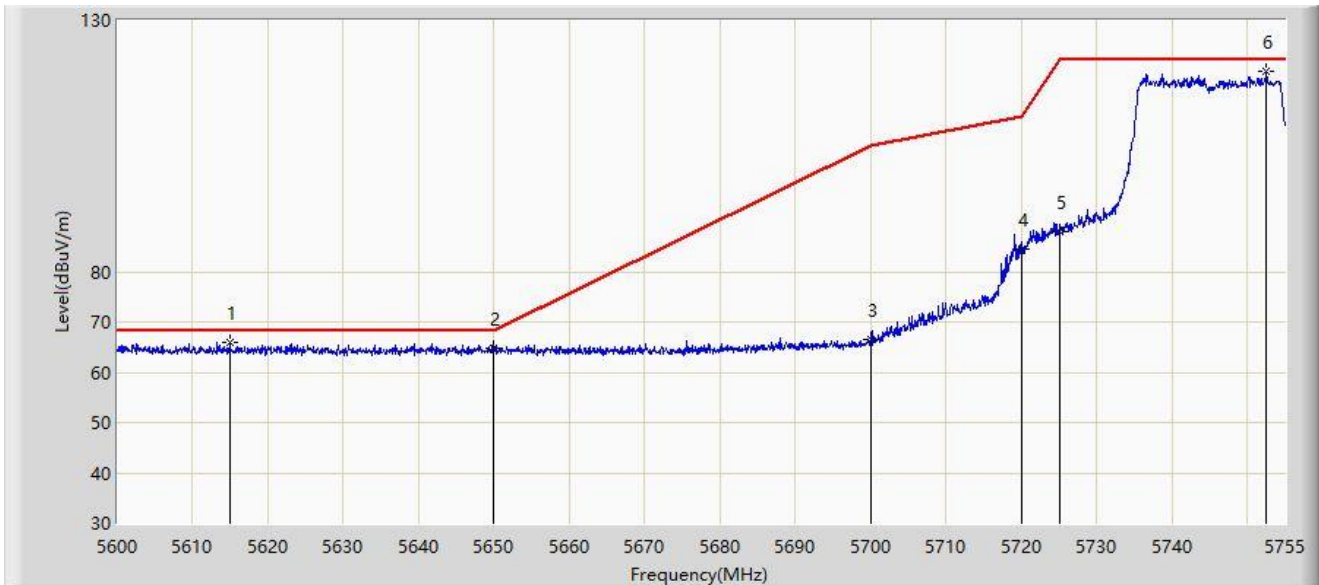


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	5614.958	65.989	73.231	-2.211	68.200	-7.242	PK
2		5650.000	64.725	72.045	-3.475	68.200	-7.319	PK
3		5700.000	66.613	73.787	-38.587	105.200	-7.174	PK
4		5720.000	84.474	91.946	-26.326	110.800	-7.472	PK
5		5725.000	88.010	95.471	-34.190	122.200	-7.461	PK
6		5752.520	119.761	127.210	N/A	N/A	-7.448	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2024-01-25
Limit: FCC_5.8G_RE(3m)	Engineer: Arvin Ding
Probe: HF907_102861_1-18GHz	Polarity: Horizontal
EUT: Tri-band Wi-Fi 7 Wireless AP	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 5825MHz	

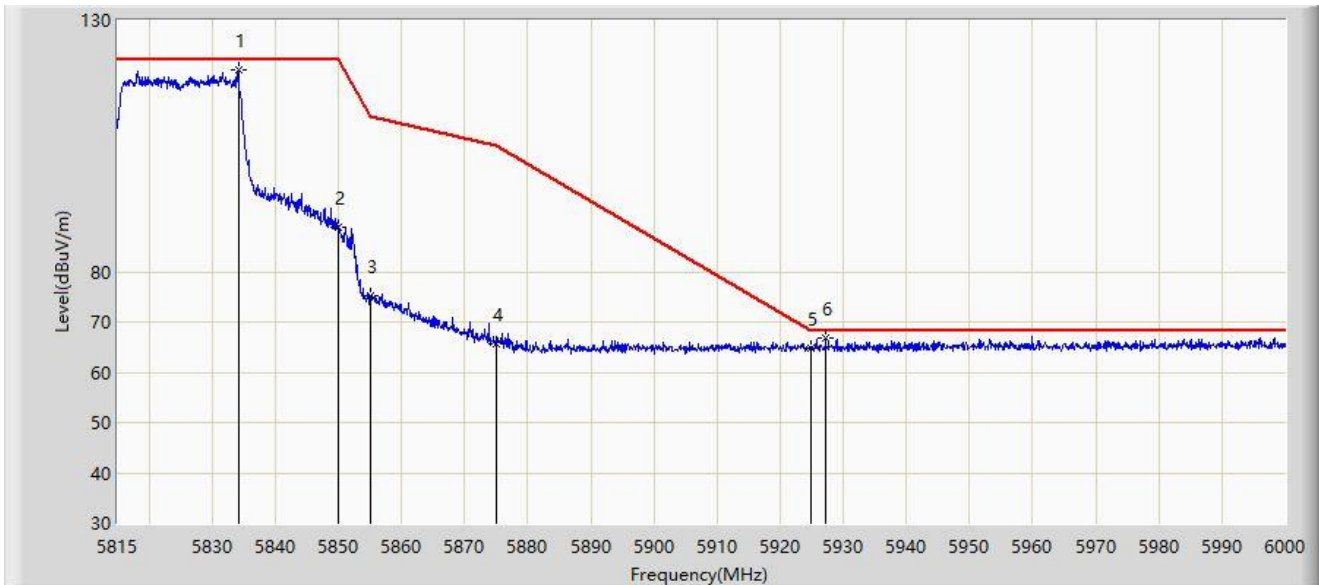


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5834.147	120.281	127.545	N/A	N/A	-7.264	PK
2		5850.000	88.707	95.944	-33.493	122.200	-7.237	PK
3		5855.000	75.074	82.292	-35.726	110.800	-7.217	PK
4		5875.000	65.589	72.941	-39.611	105.200	-7.352	PK
5		5925.000	64.746	71.872	-3.454	68.200	-7.126	PK
6	*	5927.203	66.674	73.789	-1.526	68.200	-7.115	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2024-01-25
Limit: FCC_5.8G_RE(3m)	Engineer: Arvin Ding
Probe: HF907_102861_1-18GHz	Polarity: Vertical
EUT: Tri-band Wi-Fi 7 Wireless AP	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 5825MHz	

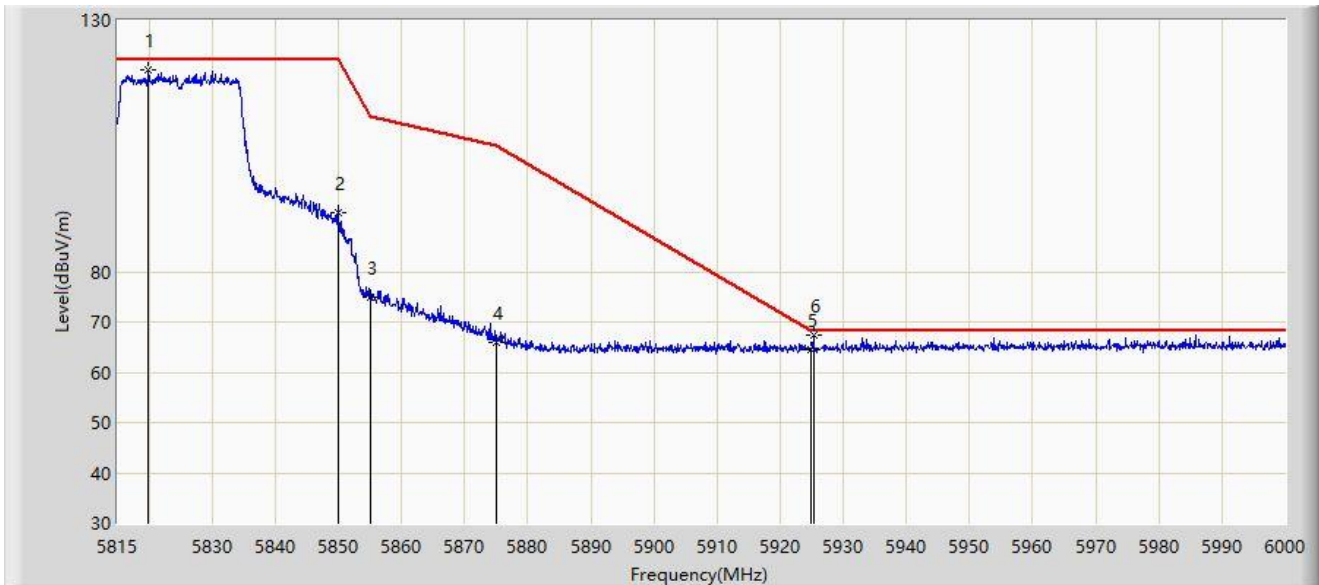


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		5819.902	120.104	127.410	N/A	N/A	-7.306	PK
2		5850.000	91.862	99.099	-30.338	122.200	-7.237	PK
3		5855.000	74.984	82.202	-35.816	110.800	-7.217	PK
4		5875.000	65.985	73.337	-39.215	105.200	-7.352	PK
5		5925.000	64.532	71.658	-3.668	68.200	-7.126	PK
6	*	5925.260	67.359	74.484	-0.841	68.200	-7.125	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2024-01-24
Limit: FCC_5G_RE(3m)	Engineer: Arvin Ding
Probe: HF907_102861_1-18GHz	Polarity: Horizontal
EUT: Tri-band Wi-Fi 7 Wireless AP	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 5190MHz	

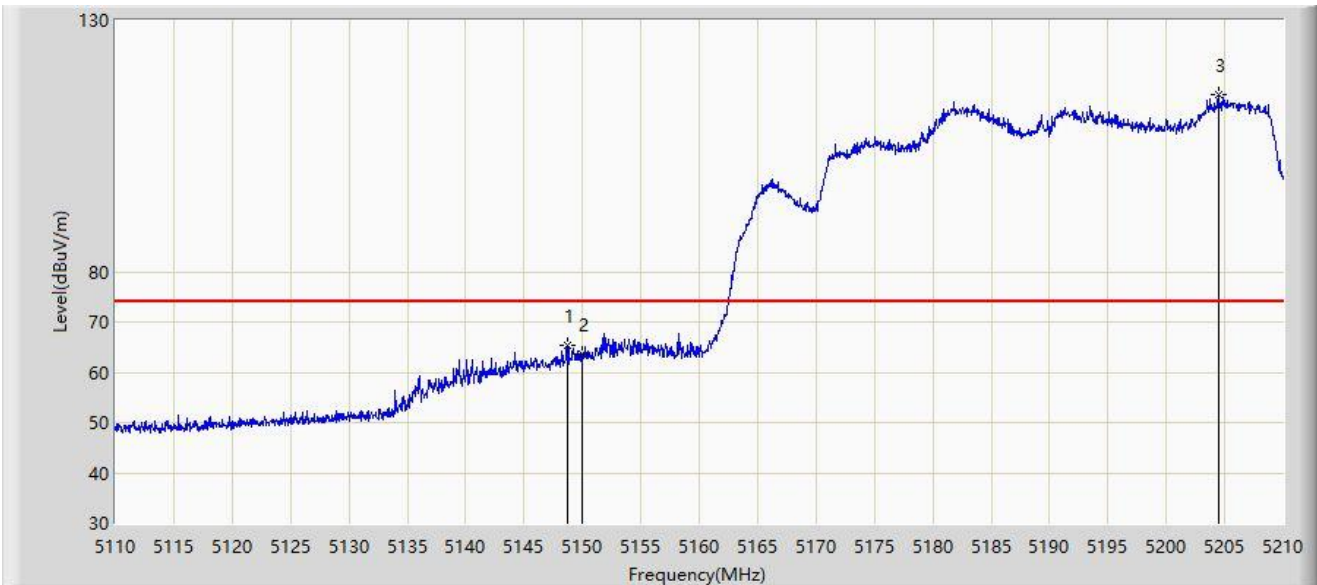


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5148.700	65.283	68.802	-8.717	74.000	-3.519	PK
2		5150.000	63.566	66.812	-10.434	74.000	-3.246	PK
3		5204.450	115.097	73.700	N/A	N/A	41.397	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2024-01-24
Limit: FCC_5G_RE(3m)	Engineer: Arvin Ding
Probe: HF907_102861_1-18GHz	Polarity: Horizontal
EUT: Tri-band Wi-Fi 7 Wireless AP	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 5190MHz	

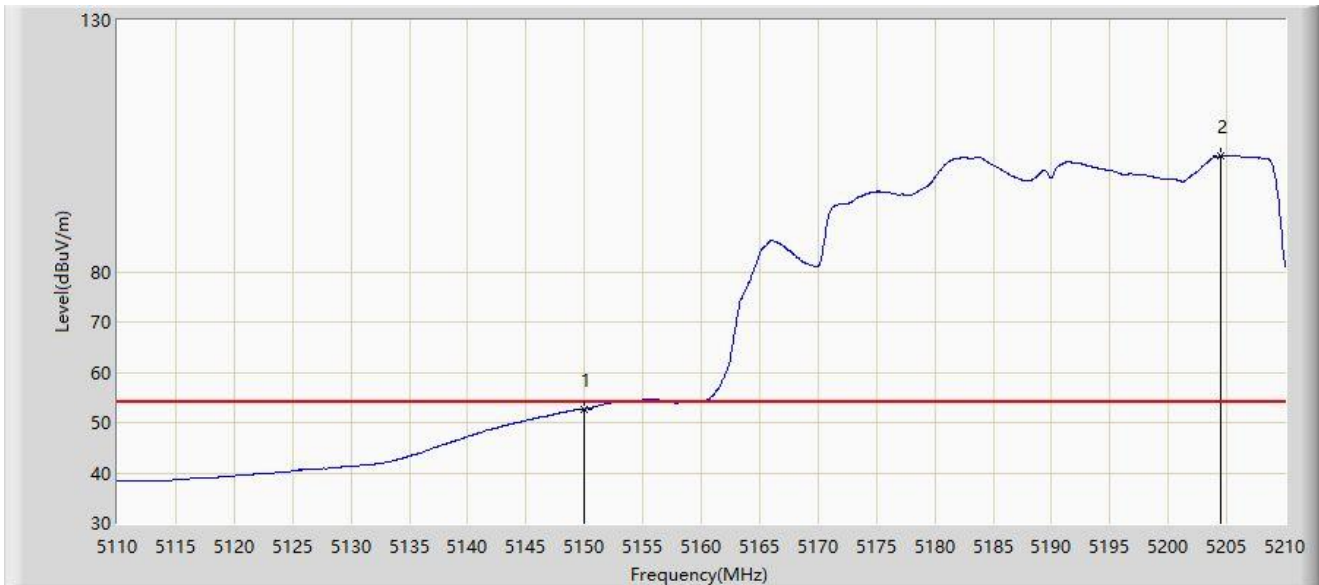


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	5150.000	52.711	55.957	-1.289	54.000	-3.246	AV
2		5204.500	102.941	61.619	N/A	N/A	41.322	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2024-01-24
Limit: FCC_5G_RE(3m)	Engineer: Arvin Ding
Probe: HF907_102861_1-18GHz	Polarity: Vertical
EUT: Tri-band Wi-Fi 7 Wireless AP	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 5190MHz	

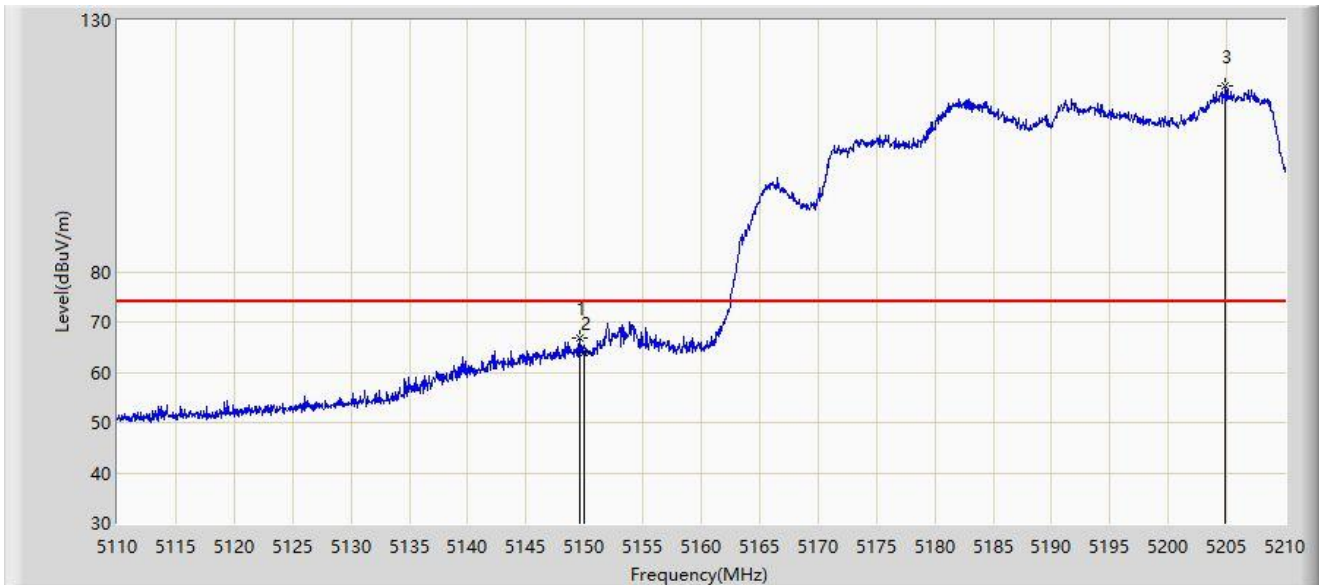


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	5149.550	66.803	70.162	-7.197	74.000	-3.359	PK
2		5150.000	64.019	67.265	-9.981	74.000	-3.246	PK
3		5204.900	116.842	76.179	N/A	N/A	40.663	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2024-01-24
Limit: FCC_5G_RE(3m)	Engineer: Arvin Ding
Probe: HF907_102861_1-18GHz	Polarity: Vertical
EUT: Tri-band Wi-Fi 7 Wireless AP	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 5190MHz	

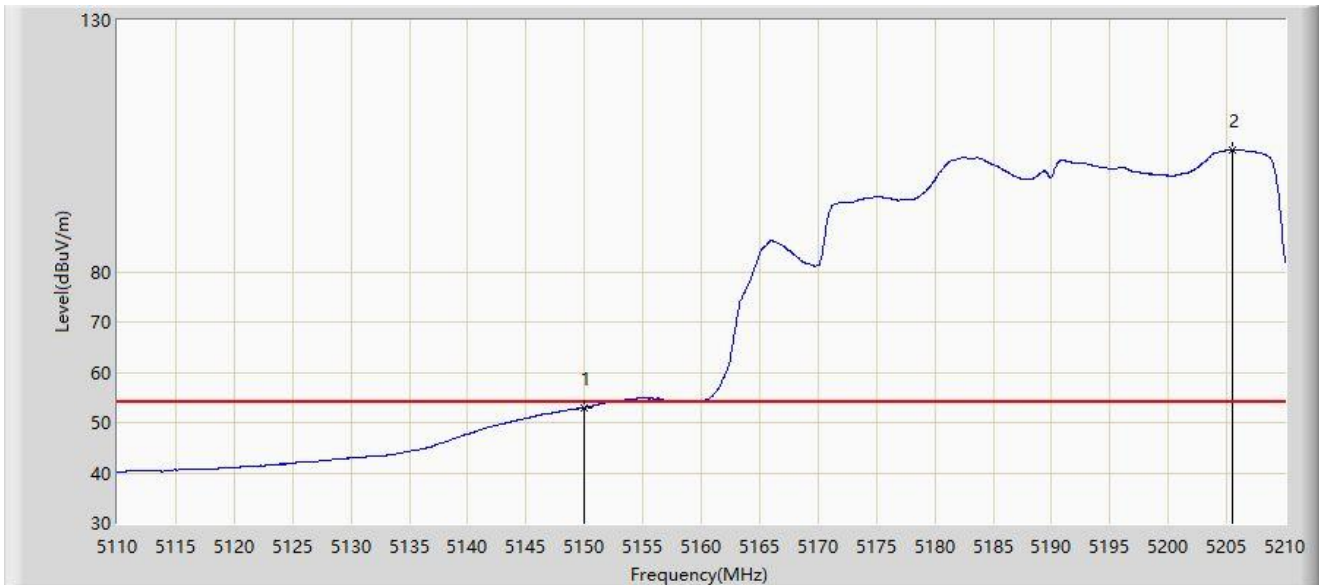

No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5150.000	52.950	56.196	-1.050	54.000	-3.246	AV
2		5205.450	104.139	64.463	N/A	N/A	39.676	AV


Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).



Site: SIP-AC3	Test Date: 2024-01-24
Limit: FCC_5G_RE(3m)	Engineer: Arvin Ding
Probe: HF907_102861_1-18GHz	Polarity: Horizontal
EUT: Tri-band Wi-Fi 7 Wireless AP	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 5310MHz	

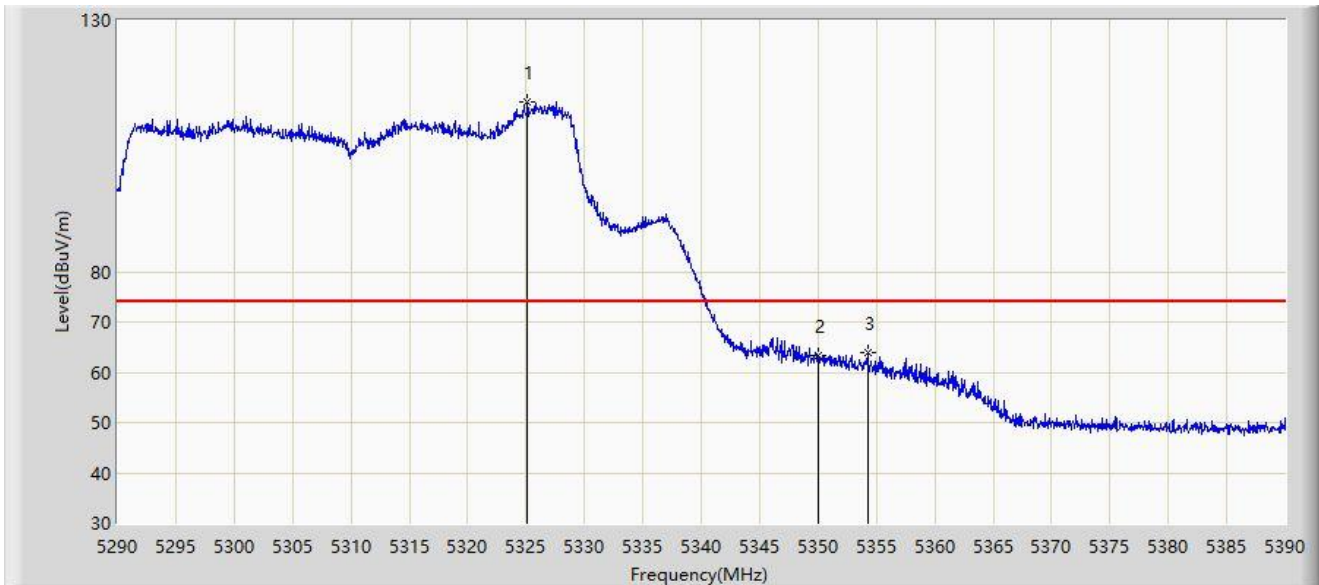


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5325.150	113.847	74.987	N/A	N/A	38.860	PK
2		5350.000	63.401	64.805	-10.599	74.000	-1.404	PK
3	*	5354.250	64.056	67.077	-9.944	74.000	-3.022	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2024-01-24
Limit: FCC_5G_RE(3m)	Engineer: Arvin Ding
Probe: HF907_102861_1-18GHz	Polarity: Horizontal
EUT: Tri-band Wi-Fi 7 Wireless AP	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 5310MHz	

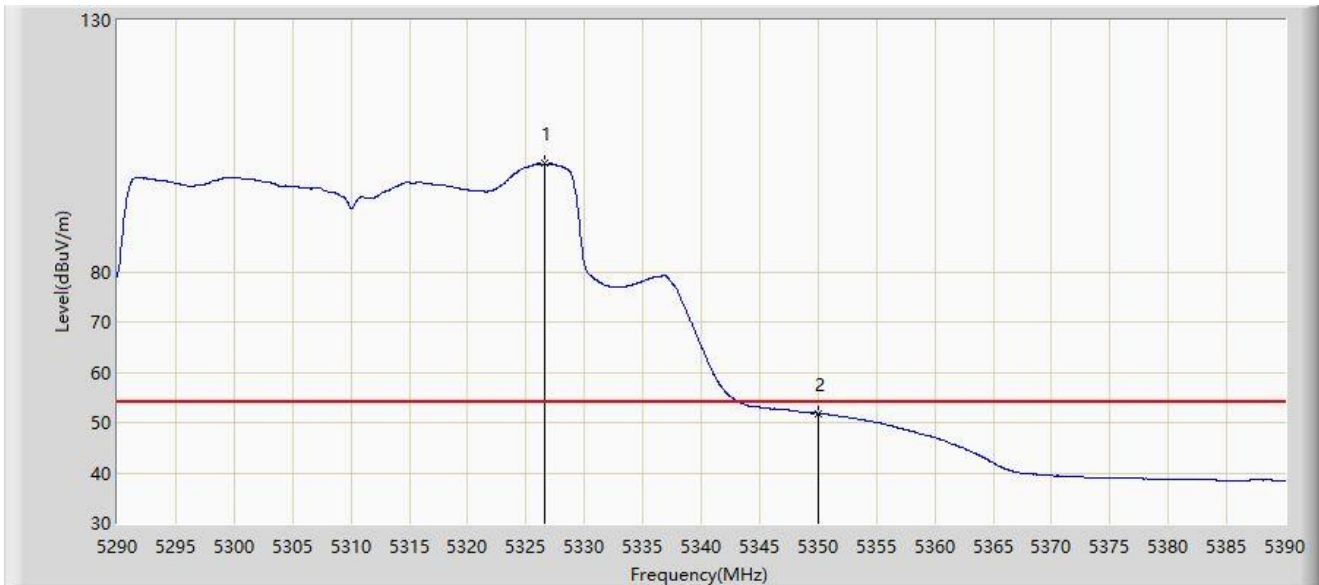


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		5326.650	101.455	62.632	N/A	N/A	38.823	AV
2	*	5350.000	51.788	53.192	-2.212	54.000	-1.404	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2024-01-24
Limit: FCC_5G_RE(3m)	Engineer: Arvin Ding
Probe: HF907_102861_1-18GHz	Polarity: Vertical
EUT: Tri-band Wi-Fi 7 Wireless AP	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 5310MHz	

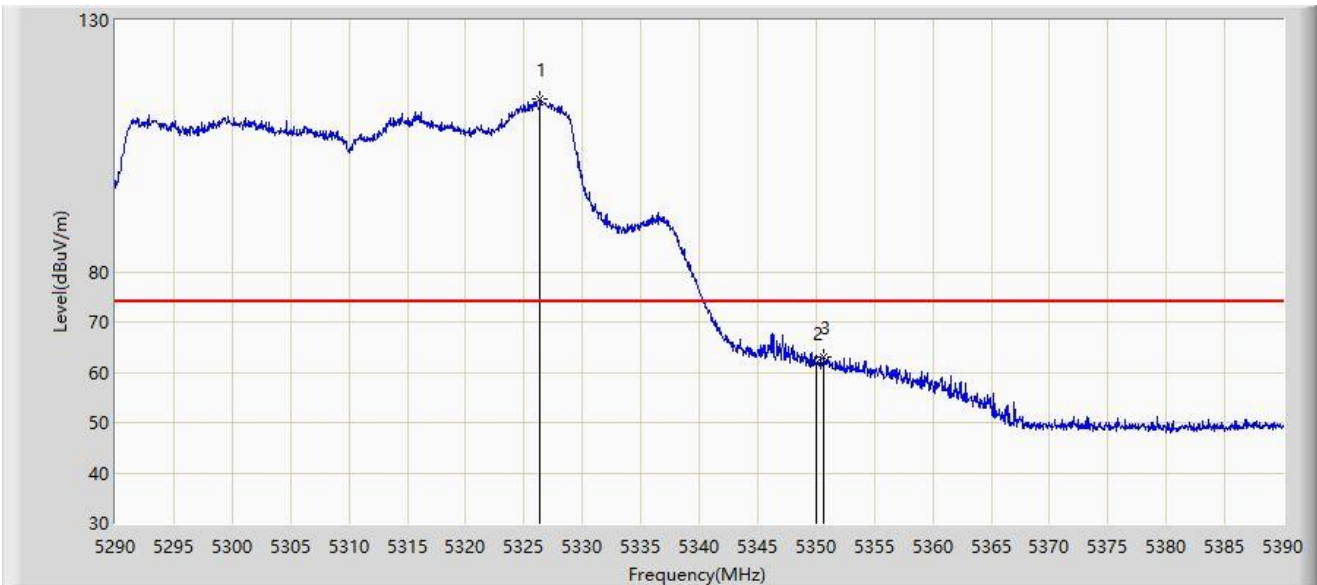


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		5326.350	114.211	75.553	N/A	N/A	38.658	PK
2		5350.000	61.901	63.305	-12.099	74.000	-1.404	PK
3	*	5350.650	63.130	64.874	-10.870	74.000	-1.745	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2024-01-24
Limit: FCC_5G_RE(3m)	Engineer: Arvin Ding
Probe: HF907_102861_1-18GHz	Polarity: Vertical
EUT: Tri-band Wi-Fi 7 Wireless AP	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 5310MHz	

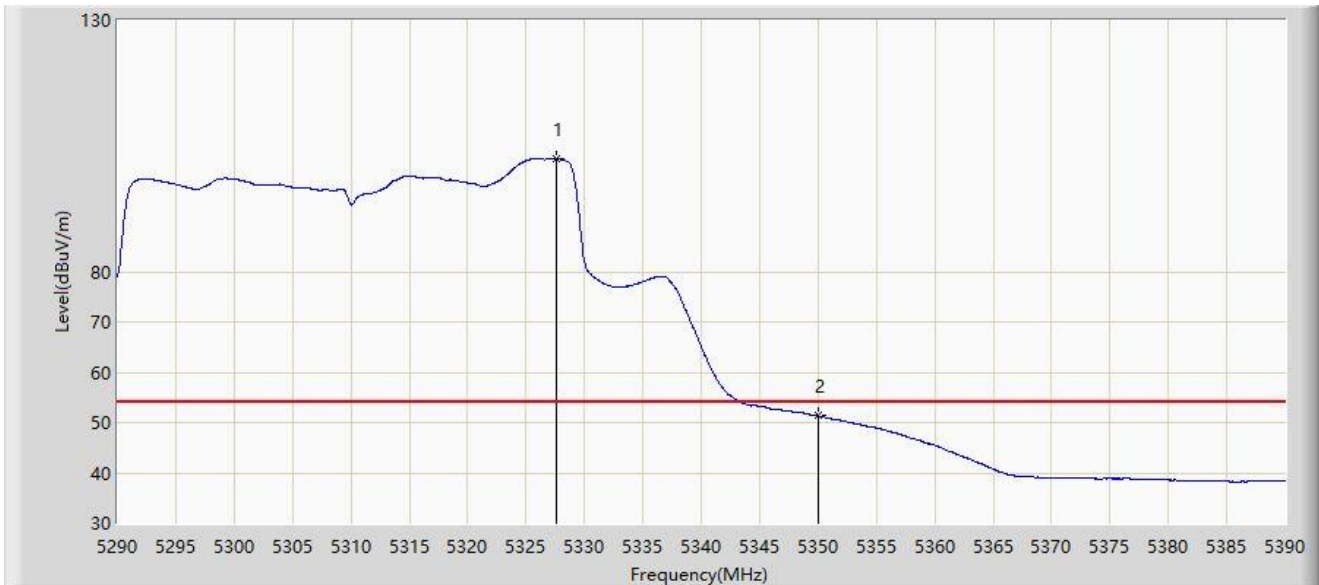


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		5327.600	102.520	62.941	N/A	N/A	39.579	AV
2	*	5350.000	51.340	52.744	-2.660	54.000	-1.404	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2024-02-26
Limit: FCC_5G_RE(3m)	Engineer: Mero Zhou
Probe: HF907_102861_1-18GHz	Polarity: Horizontal
EUT: WF825	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 5510MHz	

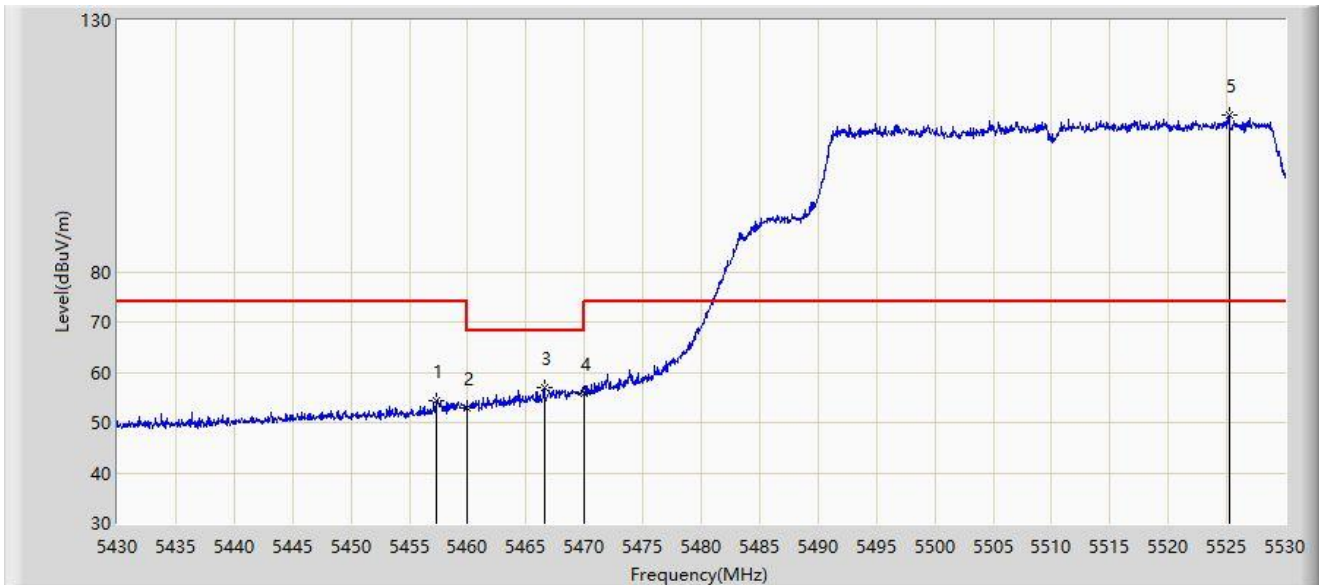


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		5457.350	54.462	58.031	-19.538	74.000	-3.569	PK
2		5460.000	53.015	56.358	-15.185	68.200	-3.343	PK
3	*	5466.550	56.885	59.493	-11.315	68.200	-2.608	PK
4		5470.000	55.653	57.263	-12.547	68.200	-1.610	PK
5		5525.200	111.162	70.942	N/A	N/A	40.221	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2024-02-26
Limit: FCC_5G_RE(3m)	Engineer: Mero Zhou
Probe: HF907_102861_1-18GHz	Polarity: Horizontal
EUT: WF825	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 5510MHz	

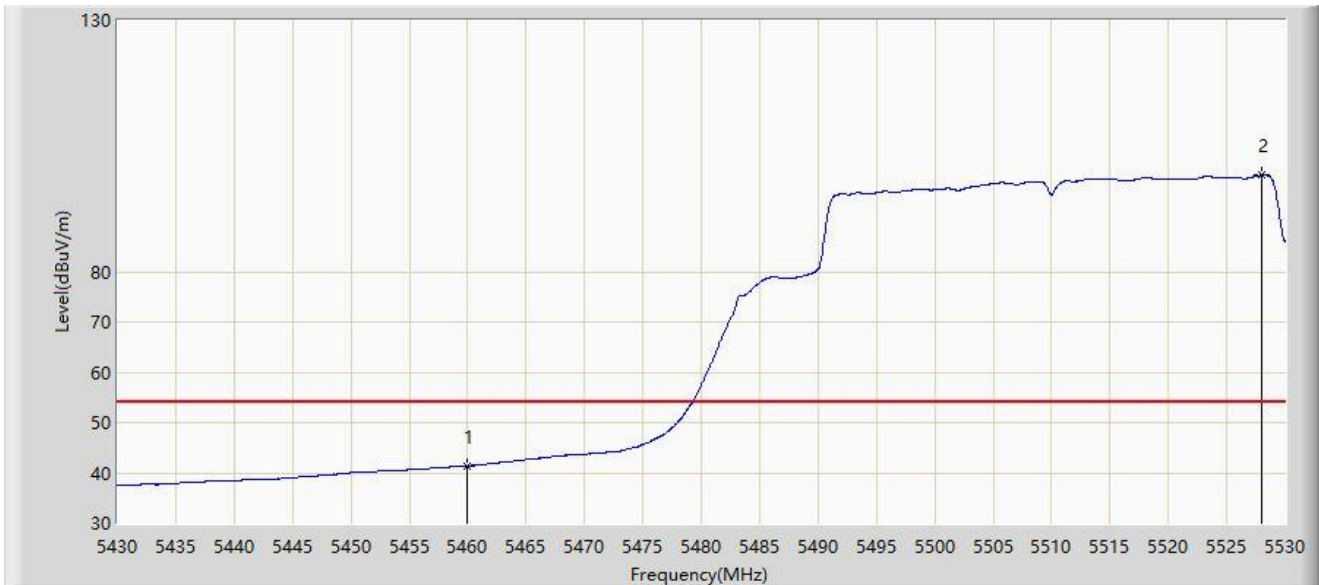


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	5460.000	41.444	44.787	-12.556	54.000	-3.343	AV
2		5527.950	99.168	54.548	N/A	N/A	44.621	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2024-02-26
Limit: FCC_5G_RE(3m)	Engineer: Mero Zhou
Probe: HF907_102861_1-18GHz	Polarity: Vertical
EUT: WF825	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 5510MHz	

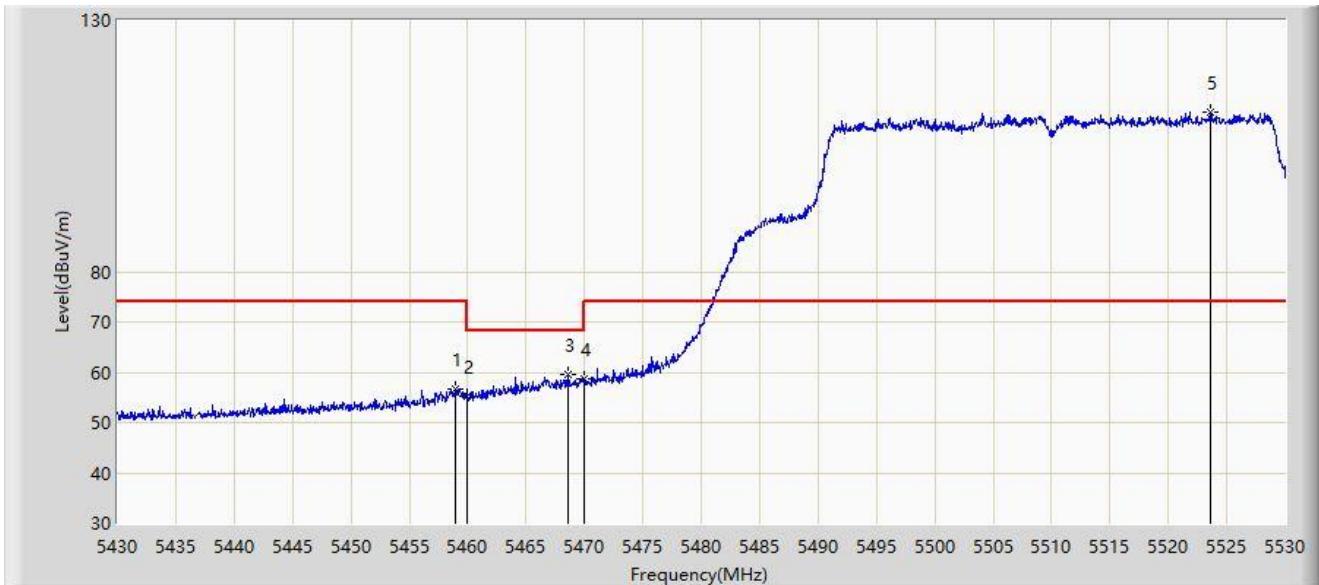


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5459.000	56.581	60.041	-17.419	74.000	-3.460	PK
2		5460.000	55.249	58.592	-12.951	68.200	-3.343	PK
3	*	5468.550	59.446	61.531	-8.754	68.200	-2.084	PK
4		5470.000	58.588	60.198	-9.612	68.200	-1.610	PK
5		5523.550	111.681	72.983	N/A	N/A	38.697	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2024-02-26
Limit: FCC_5G_RE(3m)	Engineer: Mero Zhou
Probe: HF907_102861_1-18GHz	Polarity: Vertical
EUT: WF825	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 5510MHz	

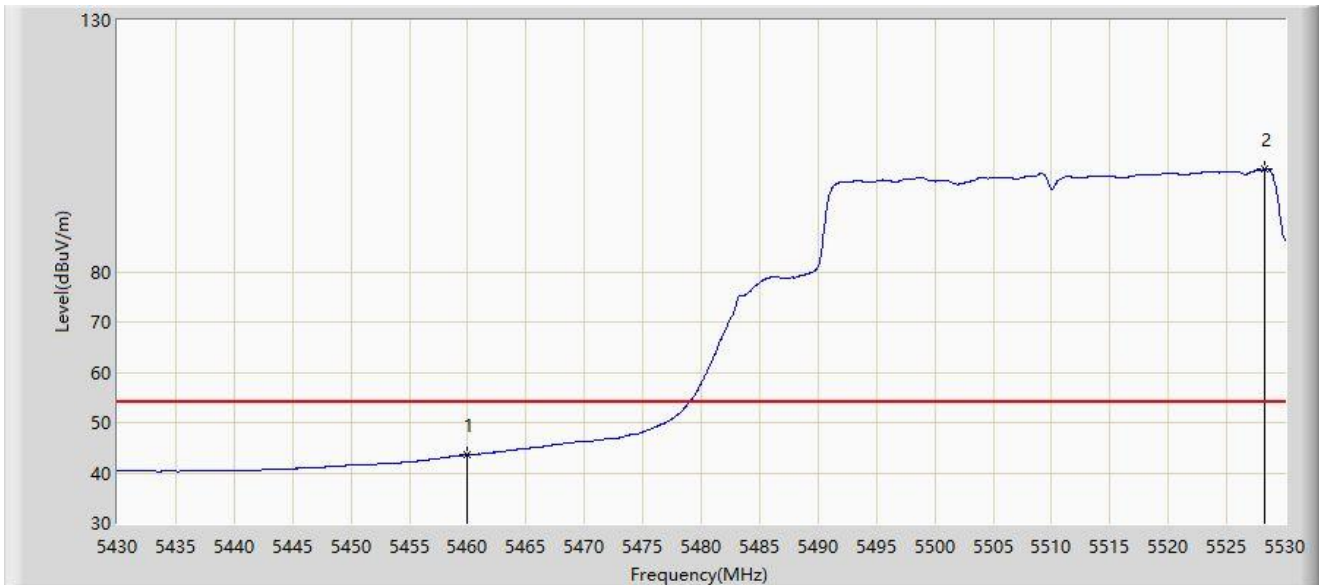

No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	5460.000	43.611	46.954	-10.389	54.000	-3.343	AV
2		5528.300	100.359	55.094	N/A	N/A	45.265	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).