

RF MEASUREMENT REPORT

FCC ID: LNQAPI7220
Applicant: Actiontec Electronics Inc
Product: Wi-Fi Access Point
Model No.: API7220
Brand Name: Actiontec
FCC Classification: Unlicensed National Information Infrastructure (NII)
FCC Rule Part(s): Part 15 Subpart E (Section 15.407)
Result: Complies
Test Date: 2021-10-10 ~ 2022-01-15

Reviewed By:

Kevin Guo

Approved By:

Robin Wu



The test results relate only to the samples tested.

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in KDB789033. Test results reported herein relate only to the item(s) tested.

The test report shall not be reproduced except in full without the written approval of MRT Technology (Suzhou) Co., Ltd.

Revision History

Report No.	Version	Description	Issue Date	Note
2109RSU006-U4	Rev. 01	Initial Report	2022-07-14	Valid

CONTENTS

Description	Page
1. General Information	6
1.1. Applicant	6
1.2. Manufacturer	6
1.3. Testing Facility	6
1.4. Product Information	7
1.5. Radio Specification	7
1.6. Working Frequencies	8
1.7. Antenna Details	9
2. Test Configuration	10
2.1. Test Mode	10
2.2. Test System Connection Diagram	10
2.3. Test Software	11
2.4. Applied Standards	11
2.5. Test Environment Condition	11
3. Antenna Requirements	12
4. Measuring Instrument	13
5. Decision Rules and Measurement Uncertainty	15
5.1. Decision Rules	15
5.2. Measurement Uncertainty	15
6. Test Result	16
6.1. Summary	16
6.2. 26dB & 99% Bandwidth Measurement	17
6.2.1. Test Limit	17
6.2.2. Test Procedure	17
6.2.3. Test Setting	17
6.2.4. Test Setup	18
6.2.5. Test Result	18
6.3. 6dB Bandwidth Measurement	19
6.3.1. Test Limit	19
6.3.2. Test Procedure	19
6.3.3. Test Setting	19
6.3.4. Test Setup	19
6.3.5. Test Result	19
6.4. Output Power Measurement	20
6.4.1. Test Limit	20
6.4.2. Test Procedure	20

6.4.3.	Test Setting	20
6.4.4.	Test Setup	20
6.4.5.	Test Result	20
6.5.	Transmit Power Control Measurement	21
6.5.1.	Test Limit	21
6.5.2.	Test Procedure	21
6.5.3.	Test Setting	21
6.5.4.	Test Setup	21
6.5.5.	Test Result	21
6.6.	Power Spectral Density Measurement	22
6.6.1.	Test Limit	22
6.6.2.	Test Procedure	22
6.6.3.	Test Setting	22
6.6.4.	Test Setup	23
6.6.5.	Test Result	23
6.7.	Frequency Stability Measurement	24
6.7.1.	Test Limit	24
6.7.2.	Test Procedure	24
6.7.3.	Test Setup	24
6.7.4.	Test Result	25
6.8.	Radiated Spurious Emission Measurement.....	26
6.8.1.	Test Limit	26
6.8.2.	Test Procedure	26
6.8.3.	Test Setting	26
6.8.4.	Test Setup	28
6.8.5.	Test Result	28
6.9.	Radiated Restricted Band Edge Measurement	29
6.9.1.	Test Limit	29
6.9.2.	Test Procedure	31
6.9.3.	Test Setting	31
6.9.4.	Test Setup	32
6.9.5.	Test Result	32
6.10.	AC Conducted Emissions Measurement	33
6.10.1.	Test Limit.....	33
6.10.2.	Test Setup.....	33
6.10.3.	Test Result.....	33
Appendix A – Test Result.....		34
A.1	Duty Cycle Test Result	34
A.2	26dB & 99% Bandwidth Test Result	36

A.3	6dB Bandwidth Test Result	51
A.4	Output Power Test Result	56
A.5	Power Spectral Density Test Result.....	59
A.6	Frequency Stability Test Result.....	86
A.7	Radiated Spurious Emission Test Result.....	87
A.8	Radiated Restricted Band Edge Test Result.....	160
A.9	AC Conducted Emissions Test Result	282
Appendix B – Test Setup Photograph		284
Appendix C – EUT Photograph		285

1.4. Product Information

Product Name	Wi-Fi Access Point
Model No.	API7220
Serial No.	WIFI21700294 (Conducted) WIFI21700293 (Radiated)
Wi-Fi Specification	802.11a/b/g/n/ac/ax
Bluetooth Specification	V5.0, Single mode only (LE)
Antenna Information	Refer to section 1.7
Power Type	AC-DC Adapter or PoE Adapter
Remark: The information of EUT was provided by the manufacturer, and the accuracy of the information shall be the responsibility of the manufacturer.	

1.5. Radio Specification

Frequency Range	For 802.11a/n-HT20/ac-VHT20/ax-HE20: 5180~5240MHz, 5260~5320MHz, 5500~5720MHz, 5745~5825MHz For 802.11n-HT40/ac-VHT40/ax-HE40: 5190~5230MHz, 5270~5310MHz, 5510~5710MHz, 5755~5795MHz For 802.11ac-VHT80/ax-HE80: 5210MHz, 5290MHz, 5530MHz, 5610 MHz, 5690MHz, 5775MHz
Type of Modulation	802.11a/n/ac: OFDM 802.11ax: OFDMA
Data Rate	802.11a: 6/9/12/18/24/36/48/54Mbps 802.11n: up to 300Mbps 802.11ac: up to 866.6Mbps 802.11ax: up to 1201Mbps

Note: For other features of this EUT, test report will be issued separately.

1.6. Working Frequencies

802.11a/n-HT20/ac-VHT20/ax-HE20

Channel	Frequency	Channel	Frequency	Channel	Frequency
36	5180 MHz	40	5200 MHz	44	5220 MHz
48	5240 MHz	52	5260 MHz	56	5280 MHz
60	5300 MHz	64	5320 MHz	100	5500 MHz
104	5520 MHz	108	5540 MHz	112	5560 MHz
116	5580 MHz	120	5600 MHz	124	5620 MHz
128	5640 MHz	132	5660 MHz	136	5680 MHz
140	5700 MHz	144	5720 MHz	149	5745 MHz
153	5765 MHz	157	5785 MHz	161	5805 MHz
165	5825 MHz	--	--	--	--

802.11n-HT40/ac-VHT40/ax-HE40

Channel	Frequency	Channel	Frequency	Channel	Frequency
38	5190 MHz	46	5230 MHz	54	5270 MHz
62	5310 MHz	102	5510 MHz	110	5550MHz
118	5590 MHz	126	5630 MHz	134	5670 MHz
142	5710 MHz	151	5755 MHz	159	5795 MHz

802.11ac-VHT80/ax-HE80

Channel	Frequency	Channel	Frequency	Channel	Frequency
42	5210 MHz	58	5290 MHz	106	5530 MHz
122	5610 MHz	138	5690 MHz	155	5775 MHz

1.7. Antenna Details

Antenna Type	Frequency (MHz)	TX Path	Antenna Gain (dBi)		Directional Gain (dBi)	
			Ant 0	Ant 1	Correlated	Uncorrelated
Wi-Fi Antenna						
PIFA	2412 ~ 2462	2	3.1	4.3	6.47	3.46
	5150 ~ 5250	2	4.1	5.1	7.62	4.63
	5250 ~ 5350	2	3.9	4.8	7.37	4.37
	5470 ~ 5725	2	4.3	5.6	7.89	4.91
	5725 ~ 5850	2	3.3	4.0	6.67	3.66
Bluetooth Antenna						
PIFA	2402 ~ 2480	1	-0.6		--	

Remark:

- The antenna gain and directional gain refer to manufacturer's antenna specification.
- The device supports CDD Mode and STBC mode, details refer to the table as below.
- CDD signals are correlated, the directional gain as follows,
For power measurements: Array Gain = 0 dB for $N_{ANT} \leq 4$, the directional gain = max antenna gain + array gain
For power spectral density (PSD) measurements: the max directional gain (each frequency) = $10 \log[(10^{G^1/20} + 10^{G^2/20} + \dots + 10^{G^N/20})^2 / N_{ANT}]$
- STBC signals are uncorrelated, the directional gain as follows,
the max directional gain (each frequency) = $10 \log[(10^{G^1/10} + 10^{G^2/10} + \dots + 10^{G^N/10}) / N_{ANT}]$
- Details refer to the antenna specification.

Test Mode	Tx Paths	CDD Mode	STBC Mode
Wi-Fi 2.4G			
802.11b/g	2	√	X
802.11n/ax	2	X	√
Wi-Fi 5G			
802.11a	2	√	X
802.11n/ac/ax	2	X	√
Remark: "√" means "Support", "X" means "Not support".			


2. Test Configuration

2.1. Test Mode

Mode 1: Transmit by 802.11a (6Mbps) _ Nss=1 (CDD Mode)
Mode 2: Transmit by 802.11ac-VHT20 (MCS0) _ Nss=2 (STBC Mode)
Mode 3: Transmit by 802.11ac-VHT40 (MCS0) _ Nss=2 (STBC Mode)
Mode 4: Transmit by 802.11ac-VHT80 (MCS0) _ Nss=2 (STBC Mode)
Mode 5: Transmit by 802.11ax-HE20 (MCS0) _ Nss=2 (STBC Mode)
Mode 6: Transmit by 802.11ax-HE40 (MCS0) _ Nss=2 (STBC Mode)
Mode 7: Transmit by 802.11ax-HE80 (MCS0) _ Nss=2 (STBC Mode)
Remark: 1. For Radiated emission, the modulation and the data rate picked for testing are determined by the Max. RF conducted power. 2. For CDD mode, this device supports 2 Nss and power level is the same of spatial multiplexing. The worst case is Nss=1. 3. Due to the same modulation between 802.11n and 802.11ac, so 802.11n-HT20 and HT40 are covered by 802.11ac-VHT20 and VHT40 in this report, meanwhile, power level for 802.11n-HT20 and HT40 will not be greater than 802.11ac-VHT20 and VHT40.

2.2. Test System Connection Diagram

The device was tested per the guidance ANSI C63.10: 2013 was used to reference the appropriate EUT setup for radiated emissions testing and AC line conducted testing.

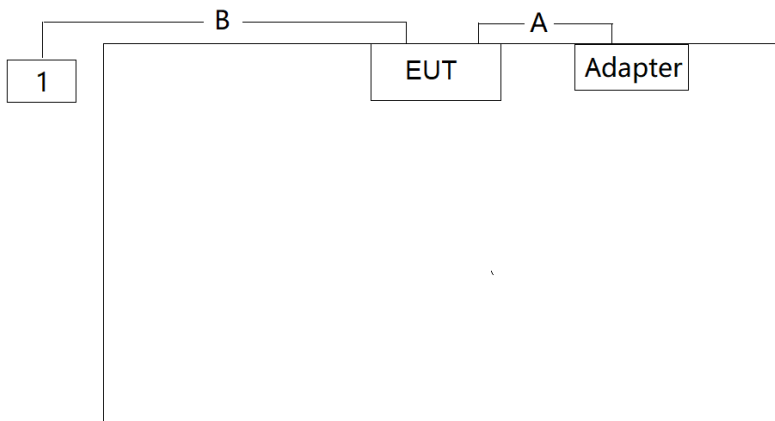Connection Diagram – Radiated Emission testing & AC Conducted Emissions			
			
No.	Product	Manufacturer	Model No.
A	Power Cable	Non-Shielded	1.8m
B	LAN Cable	Non-Shielded	>10 m
No.	Product	Manufacturer	Model No.
1	Notebook	Lenovo	E495

Note: Adapter is provided by manufacturer for test only, it will not be sold with product, the model name of

adapter is CDS036-W120U.

2.3. Test Software

The test utility software used during testing was “QSPR”, and the version was 5.0-00195.

Note: Final power setting please refer to operational description.

2.4. Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- FCC Part 15.407
- KDB 789033 D02v02r01
- KDB 662911 D01v02r01
- ANSI C63.10-2013

2.5. Test Environment Condition

Ambient Temperature	15 ~ 35°C
Relative Humidity	20 ~ 75%RH

3. Antenna Requirements

Excerpt from §15.203 of the FCC Rules/Regulations:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- The antenna of the device is **permanently attached**.
- There are no provisions for connection to an external antenna.

Conclusion:

The unit complies with the requirement of §15.203.

4. Measuring Instrument

Instrument	Manufacturer	Model No.	Asset No.	Cali. Interval	Cali. Due Date	Test Site
Anechoic Chamber	RIKEN	SIP-AC1	MRTSUE06554	1 year	2021-12-24	SIP-AC1
				1 year	2022-12-23	SIP-AC1
Preamplifier	EMCI	EMC051845SE	MRTSUE06600	1 year	2021-11-09	SIP-AC1
				1 year	2022-11-08	SIP-AC1
Horn Antenna	R&S	HF907	MRTSUE06610	1 year	2022-08-05	SIP-AC1
Thermohygrometer	testo	608-H1	MRTSUE06616	1 year	2021-11-25	SIP-AC1
				1 year	2022-11-02	SIP-AC1
Thermohygrometer	testo	608-H1	MRTSUE06620	1 year	2021-12-03	SIP-AC1
				1 year	2022-11-28	SIP-AC1
TRILOG Antenna	Schwarzbeck	VULB 9168	MRTSUE06645	1 year	2022-08-26	SIP-AC1
EMI Test Receiver	R&S	ESR3	MRTSUE06185	1 year	2022-01-29	SIP-AC3
				1 year	2022-12-29	SIP-AC3
Preamplifier	EMCI	EMC001330	MRTSUE06643	1 year	2022-01-14	SIP-AC1/SIP-AC3
				1 year	2023-01-13	SIP-AC1/SIP-AC3
Loop Antenna	Schwarzbeck	FMZB 1519 B	MRTSUE06937	1 year	2022-03-15	SIP-AC1/SIP-AC3
				1 year	2023-03-14	SIP-AC1/SIP-AC3
Signal Analyzer	Keysight	N9010B	MRTSUE06559	1 year	2022-06-24	SIP-AC1/SIP-AC3
Horn Antenna	Schwarzbeck	BBHA 9170	MRTSUE06599	1 year	2021-11-26	SIP-AC2
				1 year	2022-10-20	SIP-AC2
Preamplifier	EMCI	EMC184045SE	MRTSUE06602	1 year	2021-10-12	SIP-AC2
				1 year	2022-10-11	SIP-AC2
Thermohygrometer	testo	608-H1	MRTSUE06623	1 year	2021-12-03	SIP-AC2
				1 year	2022-11-28	SIP-AC2
Thermohygrometer	testo	608-H1	MRTSUE06624	1 year	2021-12-03	SIP-AC2
				1 year	2022-11-28	SIP-AC2
Preamplifier	EMCI	EMC051845SE	MRTSUE06644	1 year	2021-11-09	SIP-AC2
				1 year	2022-11-08	SIP-AC2
TRILOG Antenna	Schwarzbeck	VULB 9168	MRTSUE06647	1 year	2022-08-05	SIP-AC2
Anechoic Chamber	RIKEN	SIP-AC2	MRTSUE06781	1 year	2021-12-24	SIP-AC2
				1 year	2022-12-23	SIP-AC2
Horn Antenna	Schwarzbeck	BBHA 9120D	MRTSUE06648	1 year	2022-11-09	SIP-AC2
				1 year	2022-11-09	SIP-AC2
Preamplifier	Schwarzbeck	BBV 9721	MRTSUE06121	1 year	2022-06-08	SIP-AC3
Horn Antenna	Schwarzbeck	BBHA 9170	MRTSUE06598	1 year	2021-11-26	SIP-AC3
				1 year	2022-11-09	SIP-AC3

Instrument	Manufacturer	Model No.	Asset No.	Cali. Interval	Cali. Due Date	Test Site
Thermohygrometer	testo	608-H1	MRTSUE06619	1 year	2021-11-25	SIP-AC3
				1 year	2022-11-02	SIP-AC3
Thermohygrometer	testo	608-H1	MRTSUE06622	1 year	2021-12-03	SIP-AC3
				1 year	2022-11-28	SIP-AC3
Preamplifier	EMCI	EMC012645SE	MRTSUE06642	1 year	2022-01-14	SIP-AC3
				1 year	2023-01-13	SIP-AC3
TRILOG Antenna	Schwarzbeck	VULB 9168	MRTSUE06646	1 year	2022-08-26	SIP-AC3
Anechoic Chamber	RIKEN	SIP-AC3	MRTSUE06782	1 year	2021-12-24	SIP-AC3
				1 year	2022-12-23	SIP-AC3
Two-Line V-Network	R&S	ENV216	MRTSUE06003	1 year	2022-06-01	SIP-SR2
EMI Test Receiver	R&S	ESR3	MRTSUE06612	1 year	2022-06-01	SIP-SR2
Four-Line V-Network	R&S	ENV432	MRTSUE06614	1 year	2021-10-20	SIP-SR2
				1 year	2022-10-10	SIP-SR2
Thermohygrometer	testo	608-H1	MRTSUE06621	1 year	2021-12-03	SIP-SR2
				1 year	2022-11-28	SIP-SR2
Shielding Room	MIX-BEP	SIP-SR2	MRTSUE06949	N/A	N/A	SIP-SR2
Thermohygrometer	testo	Testo 608-H1	MRTSUE11022	1 year	2021-11-06	SIP-TR1
				1 year	2022-11-02	SIP-TR1
USB Power Sensor	Keysight	U2021XA	MRTSUE06595	1 year	2022-09-07	SIP-TR1
Signal Analyzer	Keysight	N9020B	MRTSUE06604	1 year	2022-09-07	SIP-TR1
Attenuator	MVE	MVE2213	MRTSUE11055	1 year	2022-06-09	SIP-TR1
Attenuator	MVE	MVE2213	MRTSUE11056	1 year	2022-06-09	SIP-TR1

Note: N/A means that it's not applicable.

Software	Version	Function
EMI Software	V3.0.0	EMI Test Software
Agilent Power Panel	V 3.9	Power
Controller_MF 7802BS	1.02	RE Antenna & turntable

5. Decision Rules and Measurement Uncertainty

5.1. Decision Rules

The Decision Rule is based on Simple Acceptance in accordance with ISO Guide 98-4: 2012 Clause 8.2. (Measurement uncertainty is not taken into account when stating conformity with a specified requirement.)

5.2. Measurement Uncertainty

Where relevant, the following test uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k = 2$.

AC Conducted Emission Measurement
Measurement Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$): 9kHz~150kHz: 3.74dB 150kHz~30MHz: 3.44dB
Radiated Disturbance
Measurement Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$): Horizontal: 30MHz~300MHz: 5.04dB 300MHz~1GHz: 4.95dB 1GHz~40GHz: 6.40dB Vertical: 30MHz~300MHz: 5.24dB 300MHz~1GHz: 6.03dB 1GHz~40GHz: 6.40dB
Spurious Emissions, Conducted
Measuring Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$): 0.78dB
Output Power
Measuring Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$): 1.13dB
Power Spectrum Density
Measuring Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$): 1.15dB
Occupied Bandwidth
Measuring Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$): 0.28%

6. Test Result

6.1. Summary

FCC Section(s)	Test Description	Test Condition	Verdict
15.407(a)	26dB Bandwidth	Conducted	Pass
15.407(e)	6dB Bandwidth		Pass
15.407(a)(1)(ii), (2), (3)(i)	Maximum Conducted Output Power		Pass
15.407(h)(1)	Transmit Power Control		Pass
15.407(a)(1)(ii), (2), (3)(i), (12)	Peak Power Spectral Density		Pass
15.407(g)	Frequency Stability		Pass
15.407(b)(1), (2), (3), (4)(i)	Undesirable Emissions	Radiated	Pass
15.205, 15.209	General Field Strength Limits (Restricted Bands and Radiated Emission Limits)		Pass
15.407(b)(8), (9), (10)			
15.207	AC Conducted Emissions 150kHz - 30MHz	Line Conducted	Pass

Remark:

- The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.
- For radiated emission test, every axis (X, Y, Z) was also verified. The test results shown in the following sections represent the worst-case emissions.
- EUT supports one configuration only in 802.11ax full RU mode.
- Test Items "26dB Bandwidth" & "6dB Bandwidth" showed the ant 0 port test data only in this report.

6.2. 26dB & 99% Bandwidth Measurement

6.2.1. Test Limit

N/A

6.2.2. Test Procedure

KDB 789033 D02v02r01- Section II)C)1) (26dB Bandwidth)

KDB 789033 D02v02r01- Section II)D) (99% Bandwidth)

6.2.3. Test Setting

26dB Bandwidth


1. The analyzers' automatic bandwidth measurement capability was used to perform the 26dB bandwidth
2. RBW = approximately 1% of the emission bandwidth.
3. VBW > RBW
4. Detector = Peak.
5. Trace mode = max hold.
6. Measure the maximum width of the emission that is 26 dB down from the maximum of the emission.
Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

99% Bandwidth

1. Set center frequency to the nominal EUT channel center frequency.
2. RBW = 1% to 5% of the OBW
3. VBW $\geq 3 \times$ RBW
4. Span = 1.5 times to 5 times the OBW
5. Detector = peak
6. Trace mode = max hold
7. Allow the trace to stabilize
8. Use the 99% power bandwidth function of the instrument.

6.2.4. Test Setup

Spectrum Analyzer



DC Block
&
Attenuator



6.2.5. Test Result

Refer to Appendix A.2.

6.3. 6dB Bandwidth Measurement

6.3.1. Test Limit

The minimum 6dB bandwidth shall be at least 500 kHz.


6.3.2. Test Procedure

KDB 789033 D02v02r01- Section II)C)2)

6.3.3. Test Setting

1. Set center frequency to the nominal EUT channel center frequency.
2. RBW = 100 kHz.
3. VBW $\geq 3 \times$ RBW.
4. Detector = Peak.
5. Trace mode = max hold.
6. Sweep = auto couple.
7. Allow the trace to stabilize.
8. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

6.3.4. Test Setup

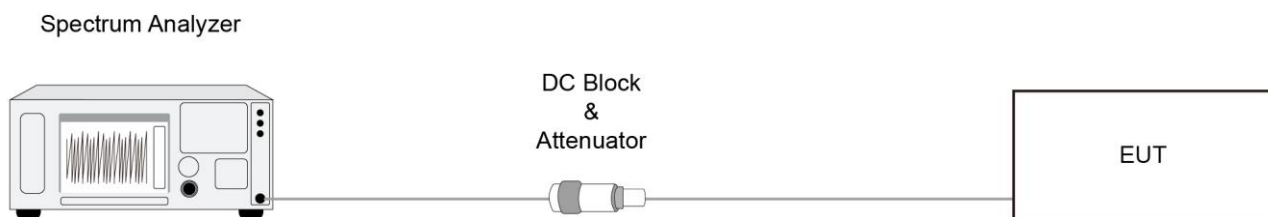

6.3.5. Test Result

Refer to Appendix A.3.

6.4. Output Power Measurement

6.4.1. Test Limit

For the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi.

For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz.

For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W (30dBm).

If transmitting antennas of directional gain greater than 6dBi are used, the maximum conducted output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

6.4.2. Test Procedure

KDB 789033D02v02r01- Section II(E)3)b) Method PM-G

6.4.3. Test Setting

Average Power Measurement

Average power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The power meter implemented triggering and gating capabilities which were set up such that power measurements were recorded only during the ON time of the transmitter.

6.4.4. Test Setup



6.4.5. Test Result

Refer to Appendix A.4.

6.5. Transmit Power Control Measurement

6.5.1. Test Limit

The U-NII device is required to have the capability to operate at least 6 dB below the mean EIRP value of 30 dBm.


6.5.2. Test Procedure

KDB 789033 D02v01- Section II)E)3)b) Method PM-G

6.5.3. Test Setting

Average power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The power meter implemented triggering and gating capabilities which were set up such that power measurements were recorded only during the ON time of the transmitter. The trace was averaged over 100 traces to obtain the final measured average power.

6.5.4. Test Setup

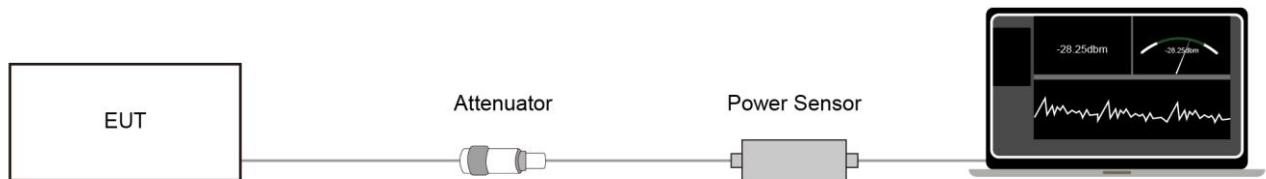

6.5.5. Test Result

Device supports TPC mechanism, details refer to the operational description.

6.6. Power Spectral Density Measurement

6.6.1. Test Limit

For the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band.

For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band.

For the band 5.725-5.85 GHz, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band.

If transmitting antennas of directional gain greater than 6dBi are used, the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

6.6.2. Test Procedure


KDB 789033 D02v02r01-Section II)F)

6.6.3. Test Setting

1. Analyzer was set to the center frequency of the UNII channel under investigation
2. Span was set to encompass the entire 26dB EBW of the signal.
3. RBW = 1MHz (510kHz, if measurement bandwidth of Maximum PSD is specified in 500 kHz)
4. VBW = 3 × RBW
5. Number of sweep points $\geq 2 \times (\text{span} / \text{RBW})$
6. Detector = power averaging (Average)
7. Sweep time = auto
8. Trigger = free run
9. Trace average at least 100 traces in power averaging (rms) mode; however, the number of traces to be averaged shall be increased above 100 as needed to ensure that the average accurately represents the true average over the on and off periods of the transmitter.
10. Use the peak search function on the instrument to find the peak of the spectrum and record its value.
11. Add $10 \cdot \log(1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times (because the measurement represents an average over both the on and off times of the transmission). For example, add $10 \cdot \log(1/0.25) = 6$ dB if the duty cycle is 25 percent.

6.6.4. Test Setup

Spectrum Analyzer



DC Block
&
Attenuator



6.6.5. Test Result

Refer to Appendix A.5.

6.7. Frequency Stability Measurement

6.7.1. Test Limit

Manufactures of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

6.7.2. Test Procedure

Frequency Stability Under Temperature Variations:


The equipment under test was connected to an external AC or DC power supply and input rated voltage. RF output was connected to a frequency counter or spectrum analyzer via feed through attenuators. The EUT was placed inside the temperature chamber. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and measure EUT 20°C operating frequency as reference frequency. Turn EUT off and set the chamber temperature to highest. After the temperature stabilized for approximately 30 minutes recorded the frequency. Repeat step measure with 10°C decreased per stage until the lowest temperature reached.

Frequency Stability Under Voltage Variations:

Set chamber temperature to 20°C. Use a variable AC power supply / DC power source to power the EUT and set the voltage to rated voltage. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and recorded the frequency.

Reduce the input voltage to specify extreme voltage variation ($\pm 15\%$) and endpoint, record the maximum frequency change.

6.7.3. Test Setup

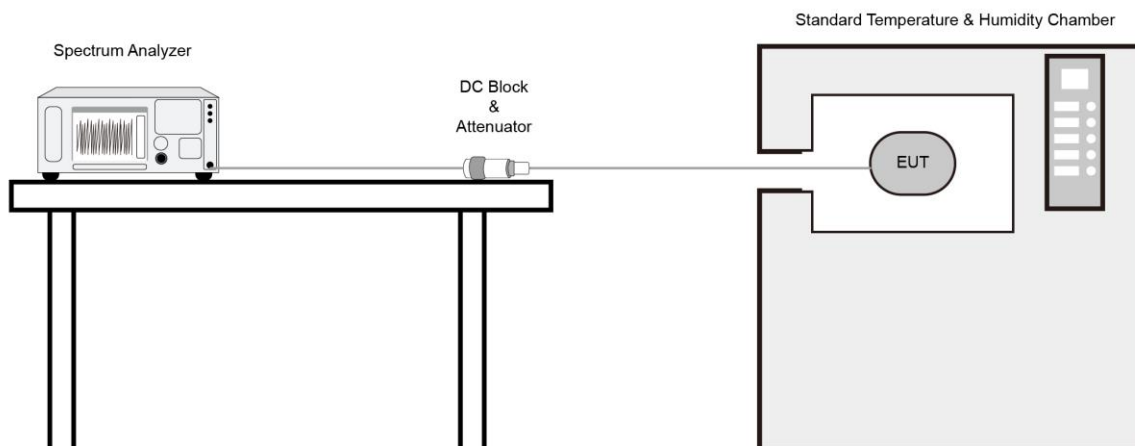

6.7.4. Test Result

Refer to Appendix A.6.

6.8. Radiated Spurious Emission Measurement

6.8.1. Test Limit

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency [MHz]	Field Strength [uV/m]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

6.8.2. Test Procedure

KDB 789033 D02v02r01- Section II)G)

6.8.3. Test Setting

Table 1 - RBW as a function of frequency

Frequency	RBW
9 ~ 150 kHz	200 ~ 300 Hz
0.15 ~ 30 MHz	9 ~ 10 kHz
30 ~ 1000 MHz	100 ~ 120 kHz
> 1000MHz	1MHz

Quasi-Peak Measurements below 1GHz

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. Span was set greater than 1MHz
3. RBW = as specified in Table 1
4. Detector = CISPR quasi-peak
5. Sweep time = auto couple
6. Trace was allowed to stabilize

Peak Measurements above 1GHz


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

Average Measurements above 1GHz (Method VB)


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW; If the EUT is configured to transmit with duty cycle $\geq 98\%$, set VBW = 10 Hz.
If the EUT duty cycle is $< 98\%$, set VBW $\geq 1/T$. T is the minimum transmission duration.
4. Detector = Peak
5. Sweep time = auto
6. Trace mode = max hold
7. Trace was allowed to stabilize

6.8.4. Test Setup

Below 1GHz Test Setup:

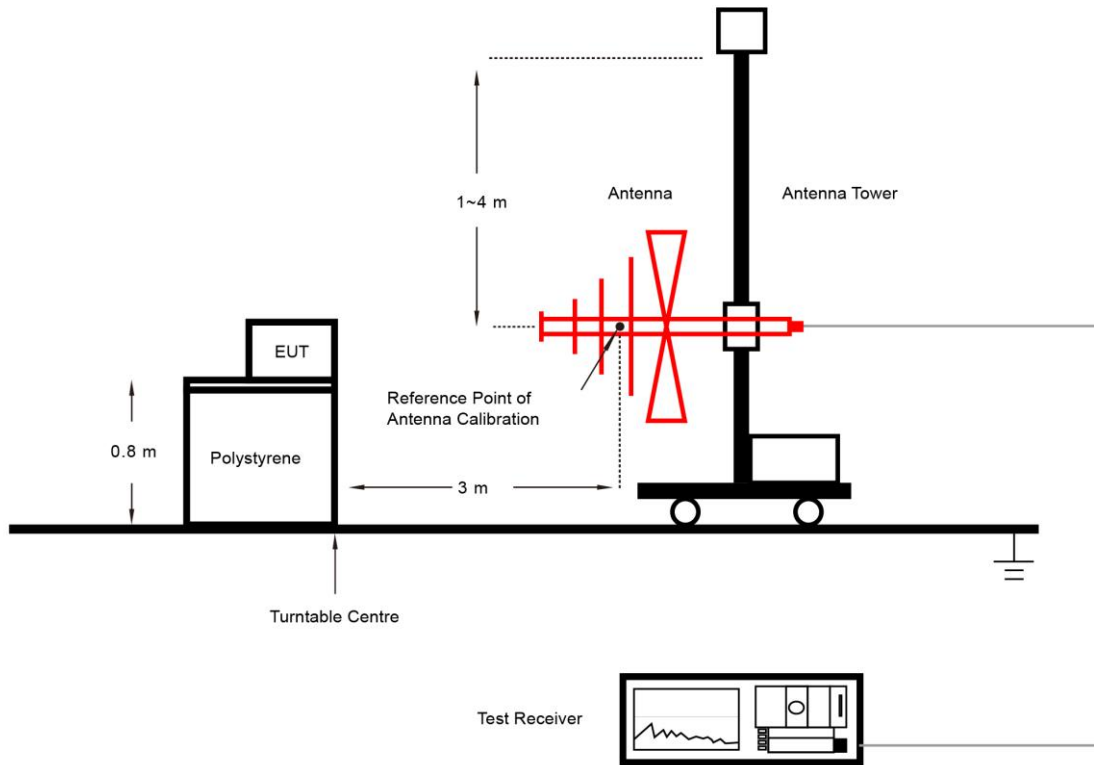

Above 1GHz Test Setup:

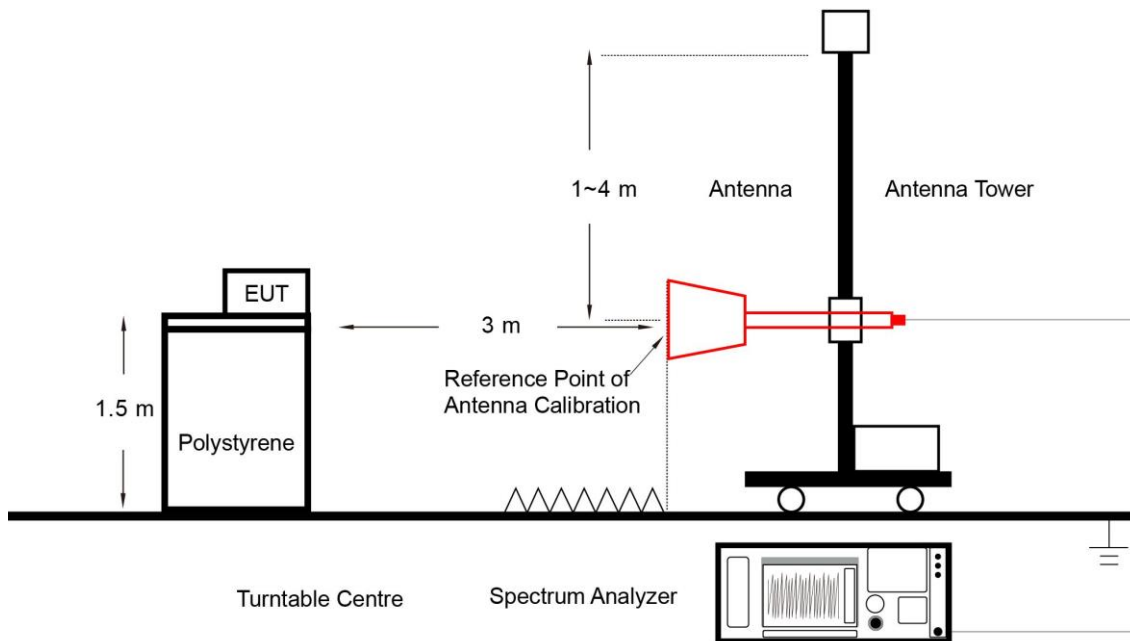

6.8.5. Test Result

Refer to Appendix A.7.

6.9. Radiated Restricted Band Edge Measurement

6.9.1. Test Limit

For 15.205 requirement:

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a) of FCC part 15, must also comply with the radiated emission limits specified in Section 15.209(a).

Frequency (MHz)	Frequency (MHz)	Frequency (MHz)	Frequency (GHz)
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)
13.36 - 13.41	--	--	--

For 15.407(b) requirement:

For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

For transmitters operating in the 5.725-5.85 GHz band: All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level

of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

Refer to KDB 789033 D02v02r01 G)2)c), as specified in § 15.407(b), emissions above 1000 MHz that are outside of the restricted bands are subject to a maximum emission limit of -27 dBm/MHz (or -17 dBm/MHz as specified in § 15.407(b)(4)). However, an out-of-band emission that complies with both the peak and average limits of § 15.209 is not required to satisfy the -27 dBm/MHz or -17 dBm/MHz maximum emission limit.

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency [MHz]	Field Strength [uV/m]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

6.9.2. Test Procedure

KDB 789033 D02v02r01- Section II)G)

6.9.3. Test Setting


Peak Measurements above 1GHz

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = Peak
5. Sweep time = Auto couple
6. Trace mode = Max hold
7. Trace was allowed to stabilize

Average Measurements above 1GHz (Method VB)

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW; if the EUT is configured to transmit with duty cycle $\geq 98\%$, set VBW = 10Hz
4. If the EUT duty cycle is $< 98\%$, set VBW $\geq 1/T$. T is the minimum transmission duration
5. Detector = Peak
6. Sweep time = Auto
7. Trace mode = Max hold
8. Trace was allowed to stabilize

6.9.4. Test Setup

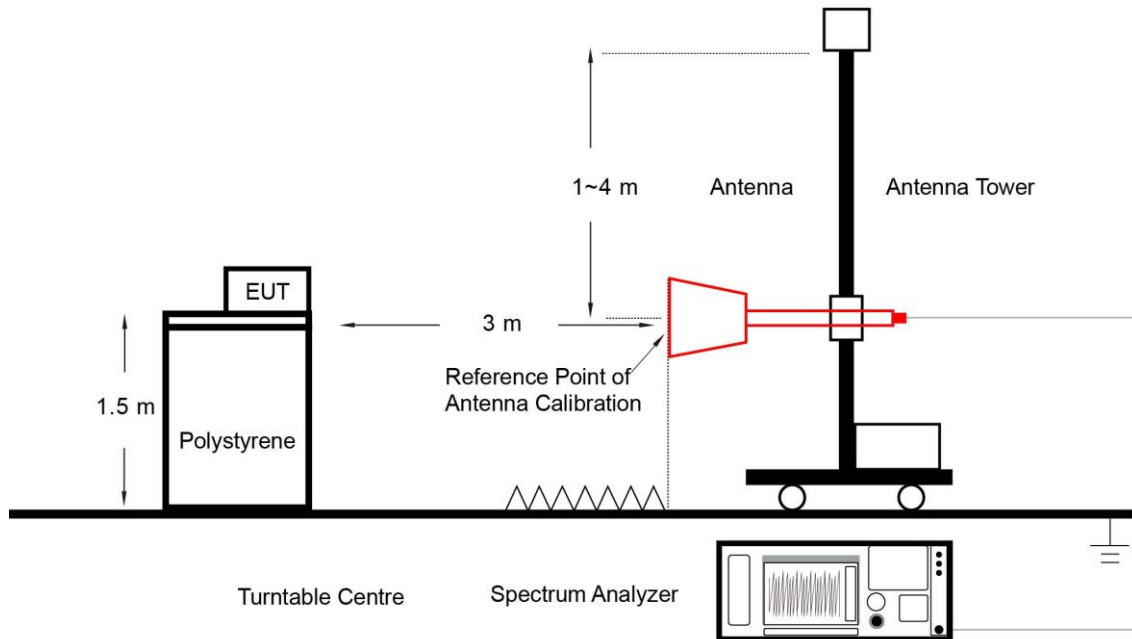

6.9.5. Test Result

Refer to Appendix A.8 and for the channel 138, 142, 144, the output power was not greater than the maximum output power in NII-2c and NII-3 bands, so only the worst-case result was shown in this report.

6.10. AC Conducted Emissions Measurement


6.10.1. Test Limit

FCC Part 15.207 Limits		
Frequency (MHz)	QP (dBuV)	AV (dBuV)
0.15 - 0.50	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30	60	50

Note 1: The lower limit shall apply at the transition frequencies.

Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.

6.10.2. Test Setup

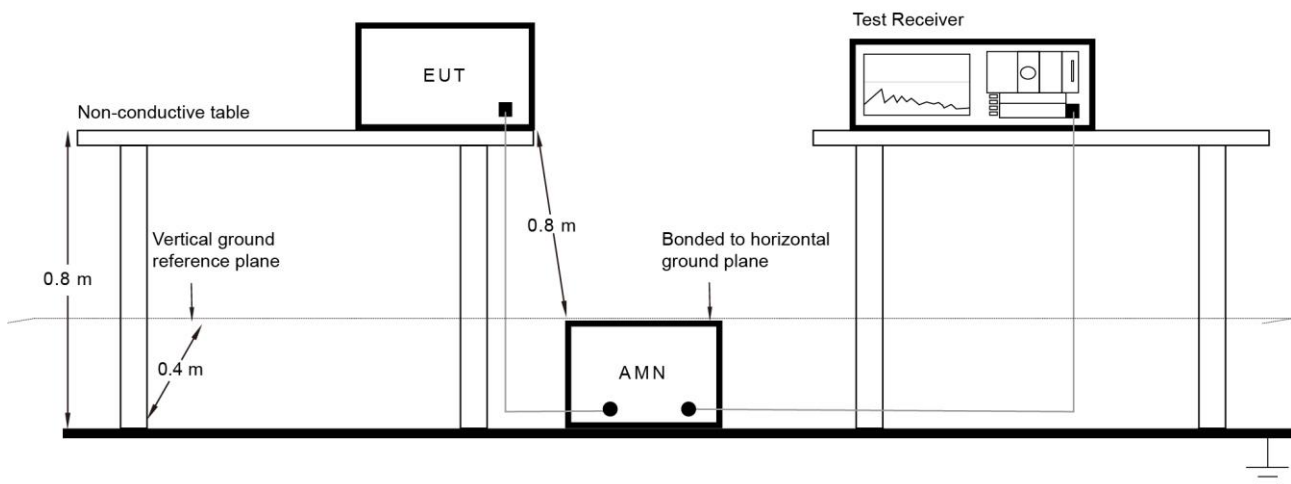

6.10.3. Test Result

Refer to Appendix A.9.

Appendix A – Test Result


A.1 Duty Cycle Test Result

Test Site	SIP-TR1	Test Engineer	Alisa Deng
Test Date	2021/10/20		


Test Mode	Duty Cycle	Test Mode	Duty Cycle
802.11a	91.59%	802.11ax-HE20	88.67%
802.11ac-VHT20	91.37%	802.11ax-HE40	93.75%
802.11ac-VHT40	87.75%	802.11ax-HE80	94.24%
802.11ac-VHT80	88.67%	--	--

Duty Cycle (T = Transmission Duration)


802.11a (T = 1.960ms)

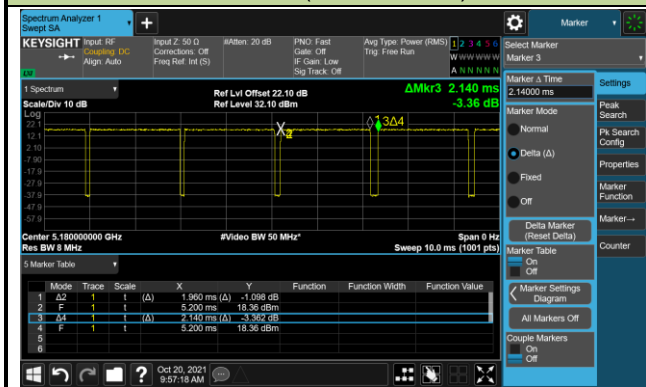


802.11ac-VHT20 (T = 5.400ms)

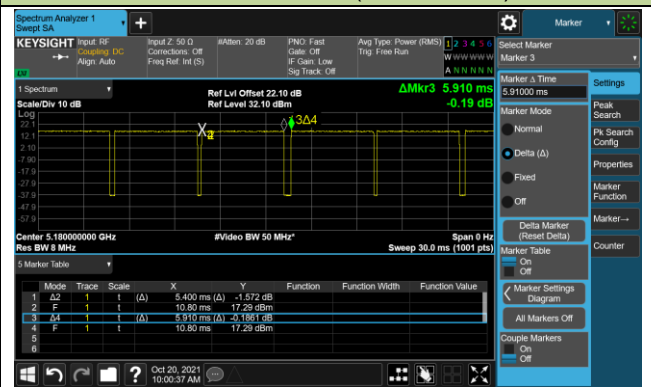


802.11ac-VHT40 (T = 5.370ms)

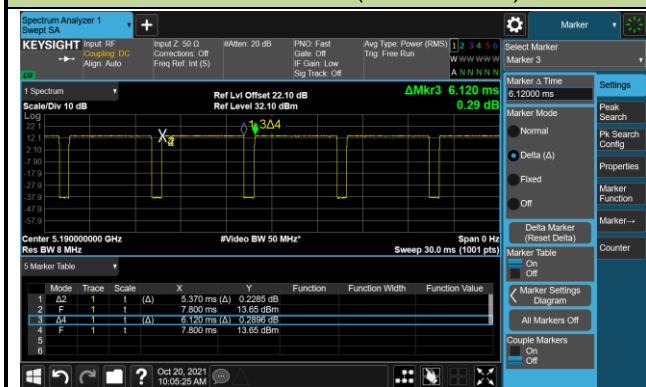


802.11ac-VHT80 (T = 5.400ms)

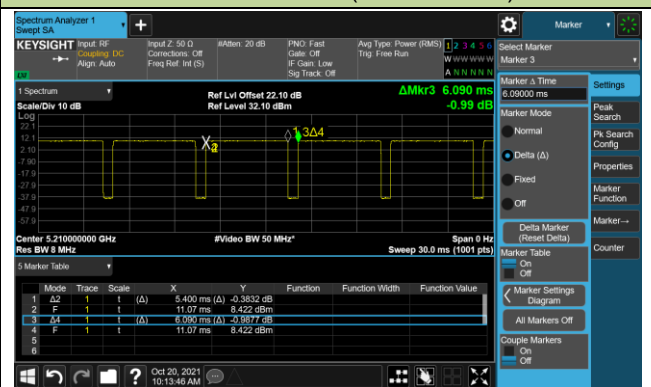


802.11ax-HE20 (T = 5.400ms)

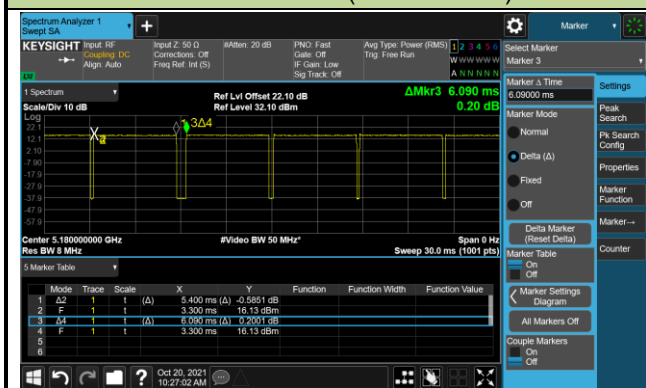

802.11ax-HE40 (T = 5.400ms)

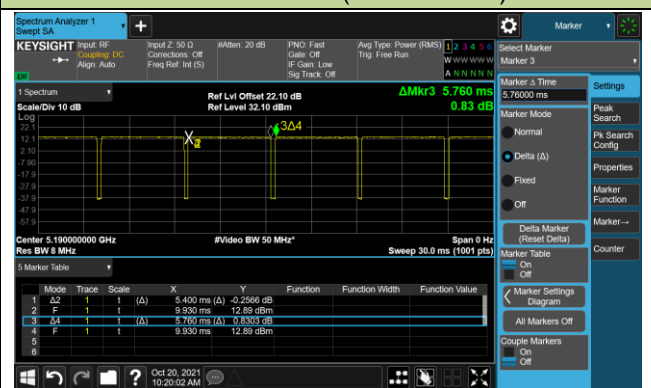

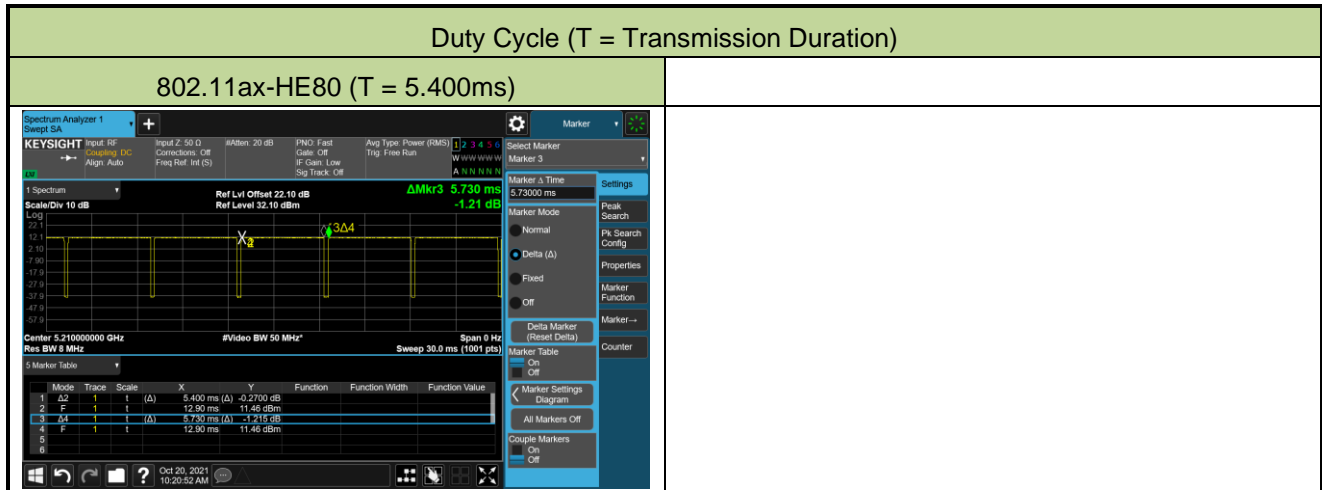

A.2 26dB & 99% Bandwidth Test Result

Test Site	SIP-TR1	Test Engineer	Alisa Deng
Test Date	2022/01/15		

Test Mode	Data Rate	Channel No.	Frequency (MHz)	26dB Bandwidth (MHz)	99% Bandwidth (MHz)
11a	6Mbps	36	5180	20.70	16.434
11a	6Mbps	44	5220	20.56	16.441
11a	6Mbps	48	5240	20.39	16.438
11a	6Mbps	52	5260	20.14	16.431
11a	6Mbps	60	5300	20.45	16.426
11a	6Mbps	64	5320	20.14	16.423
11a	6Mbps	100	5500	20.54	16.455
11a	6Mbps	116	5580	20.43	16.459
11a	6Mbps	140	5700	20.22	16.443
11a	6Mbps	144	5720	20.66	16.449
11a	6Mbps	149	5745	20.72	16.472
11a	6Mbps	157	5785	20.43	16.443
11a	6Mbps	165	5825	20.92	16.439
11ac-VHT20	MCS0	36	5180	21.73	17.648
11ac-VHT20	MCS0	44	5220	21.10	17.663
11ac-VHT20	MCS0	48	5240	21.03	17.655
11ac-VHT20	MCS0	52	5260	21.38	17.608
11ac-VHT20	MCS0	60	5300	20.98	17.649
11ac-VHT20	MCS0	64	5320	21.44	17.621
11ac-VHT20	MCS0	100	5500	20.99	17.644
11ac-VHT20	MCS0	116	5580	21.30	17.634
11ac-VHT20	MCS0	140	5700	21.18	17.641
11ac-VHT20	MCS0	144	5720	20.84	17.668
11ac-VHT20	MCS0	149	5745	21.73	17.634
11ac-VHT20	MCS0	157	5785	20.93	17.662
11ac-VHT20	MCS0	165	5825	21.91	17.693

Test Mode	Data Rate	Channel No.	Frequency (MHz)	26dB Bandwidth (MHz)	99% Bandwidth (MHz)
11ac-VHT40	MCS0	38	5190	40.61	36.108
11ac-VHT40	MCS0	46	5230	40.35	36.095
11ac-VHT40	MCS0	54	5270	39.97	36.080
11ac-VHT40	MCS0	62	5310	40.80	36.079
11ac-VHT40	MCS0	102	5510	41.04	36.148
11ac-VHT40	MCS0	110	5550	40.56	36.126
11ac-VHT40	MCS0	134	5670	40.66	36.138
11ac-VHT40	MCS0	142	5710	41.27	36.174
11ac-VHT40	MCS0	151	5755	41.66	36.113
11ac-VHT40	MCS0	159	5795	40.67	36.124
11ac-VHT80	MCS0	42	5210	81.67	75.352
11ac-VHT80	MCS0	58	5290	81.16	75.368
11ac-VHT80	MCS0	106	5530	81.56	75.348
11ac-VHT80	MCS0	122	5610	81.23	75.343
11ac-VHT80	MCS0	138	5690	82.25	75.425
11ac-VHT80	MCS0	155	5775	81.59	75.435
11ax-HE20	MCS0	36	5180	21.32	18.982
11ax-HE20	MCS0	44	5220	21.12	19.022
11ax-HE20	MCS0	48	5240	21.05	18.924
11ax-HE20	MCS0	52	5260	21.51	18.932
11ax-HE20	MCS0	60	5300	21.27	18.962
11ax-HE20	MCS0	64	5320	21.41	19.012
11ax-HE20	MCS0	100	5500	21.05	18.952
11ax-HE20	MCS0	116	5580	21.70	18.930
11ax-HE20	MCS0	140	5700	21.43	18.949
11ax-HE20	MCS0	144	5720	21.42	18.952
11ax-HE20	MCS0	149	5745	21.22	18.962
11ax-HE20	MCS0	157	5785	21.63	18.962
11ax-HE20	MCS0	165	5825	22.21	18.996

Test Mode	Data Rate	Channel No.	Frequency (MHz)	26dB Bandwidth (MHz)	99% Bandwidth (MHz)
11ax-HE40	MCS0	38	5190	40.51	37.770
11ax-HE40	MCS0	46	5230	40.77	37.747
11ax-HE40	MCS0	54	5270	40.51	37.830
11ax-HE40	MCS0	62	5310	40.39	37.718
11ax-HE40	MCS0	102	5510	41.41	37.748
11ax-HE40	MCS0	110	5550	40.68	37.695
11ax-HE40	MCS0	134	5670	40.37	37.748
11ax-HE40	MCS0	142	5710	40.68	37.678
11ax-HE40	MCS0	151	5755	40.62	37.709
11ax-HE40	MCS0	159	5795	40.25	37.682
11ax-HE80	MCS0	42	5210	82.06	77.051
11ax-HE80	MCS0	58	5290	81.69	77.084
11ax-HE80	MCS0	106	5530	81.39	77.140
11ax-HE80	MCS0	122	5610	81.49	77.084
11ax-HE80	MCS0	138	5690	81.41	77.186
11ax-HE80	MCS0	155	5775	81.70	76.994


Test Mode	Data Rate	Channel No.	Frequency (MHz)	F _H (MHz)	Limit (MHz)
802.11a	6Mbps	48	5240	5248.219	< 5250
802.11ac-VHT20	MCS0	48	5240	5248.828	< 5250
802.11ac-VHT40	MCS0	46	5230	5248.048	< 5250
802.11ac-VHT80	MCS0	42	5210	5247.676	< 5250
802.11ax-HE20	MCS0	48	5240	5249.462	< 5250
802.11ax-HE40	MCS0	46	5230	5248.874	< 5250
802.11ax-HE80	MCS0	42	5210	5248.526	< 5250

Note: $F_H = \text{Centre frequency} + 99\% \text{ OBW} / 2$


For example, 802.11a 5240MHz, $F_H = 5240 \text{ MHz} + 16.438 \text{ MHz} / 2 = 5248.219\text{MHz}$.

802.11a 26dB Bandwidth

Channel 36 (5180MHz)

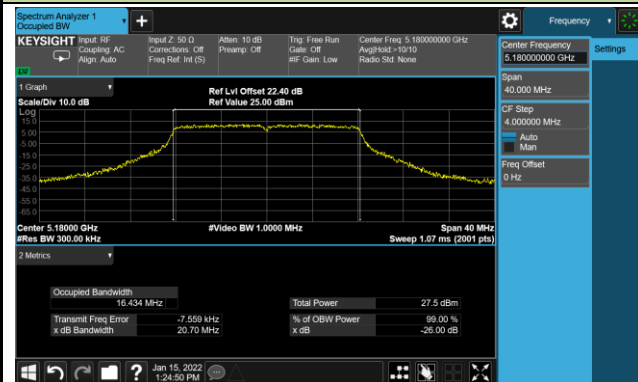


Channel 44 (5220MHz)

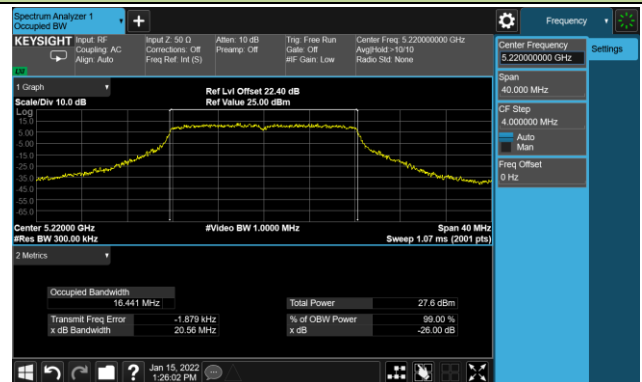


Channel 48 (5240MHz)



Channel 52 (5260MHz)

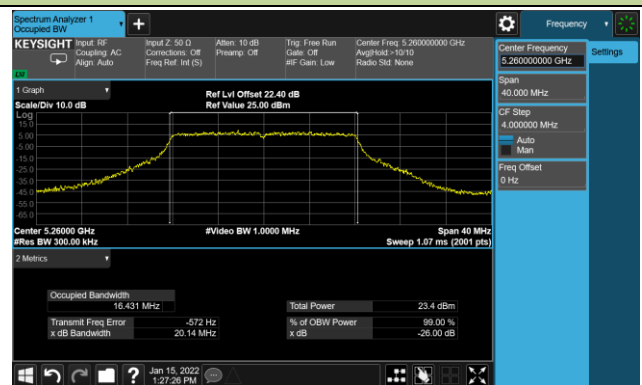


Channel 60 (5300MHz)

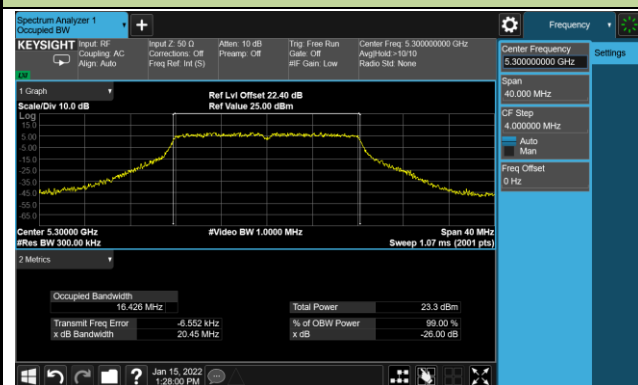


Channel 64 (5320MHz)



Channel 100 (5500MHz)

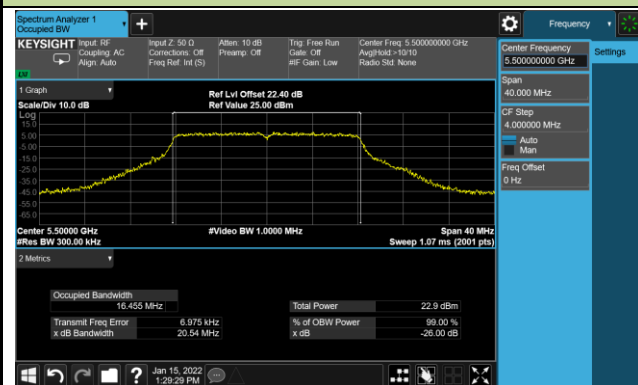

Channel 116 (5580MHz)

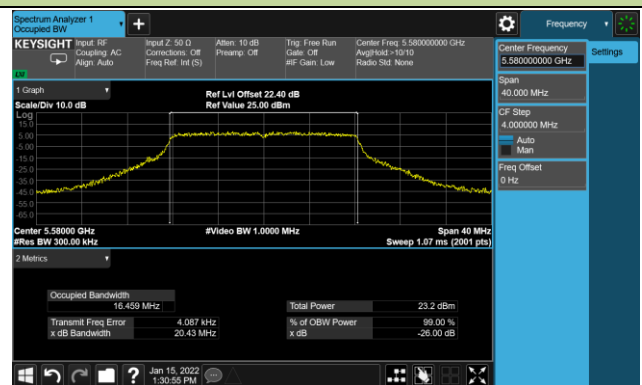


802.11a 26dB Bandwidth


Channel 140 (5700MHz)




Channel 144(5720MHz)

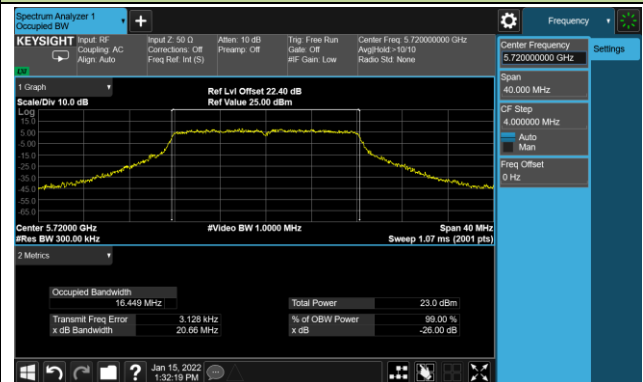


Channel 149 (5745MHz)

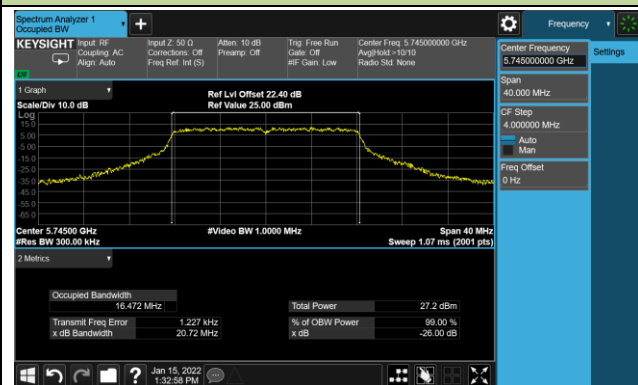

Channel 157 (5785MHz)

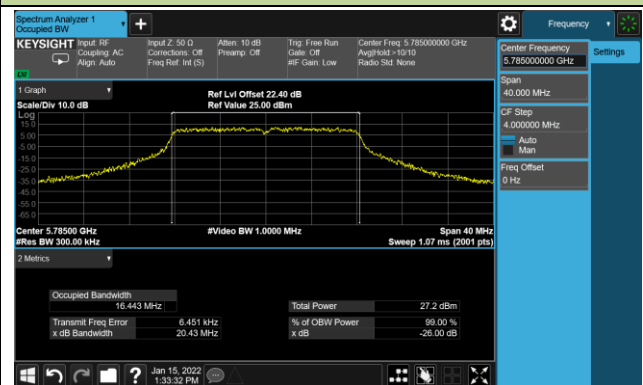

Channel 165 (5825MHz)

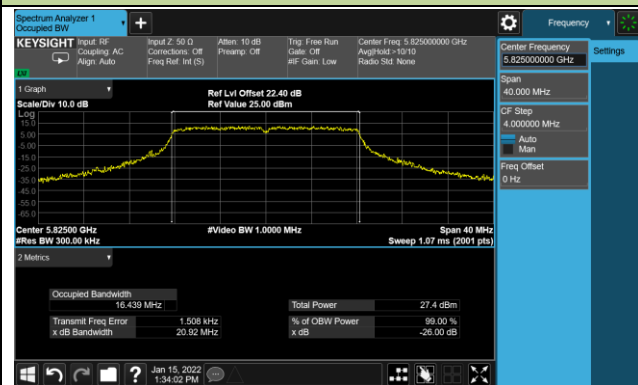

802.11ac-VHT20 26dB Bandwidth


Channel 36 (5180MHz)




Channel 44 (5220MHz)




Channel 48 (5240MHz)

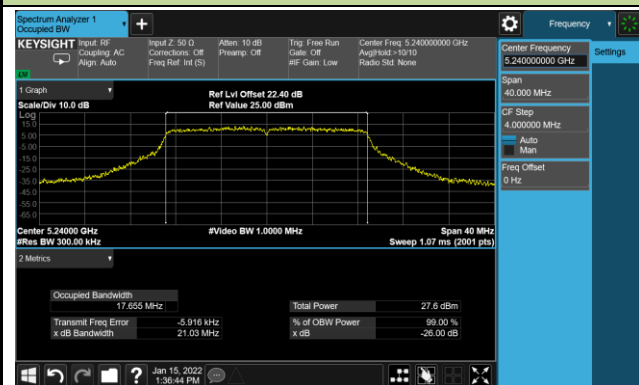

Channel 52 (5260MHz)

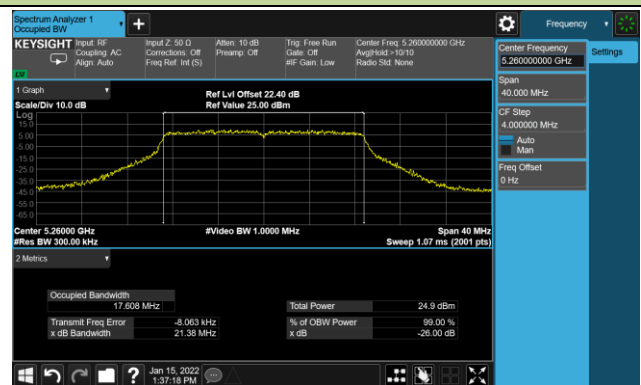


Channel 60 (5300MHz)

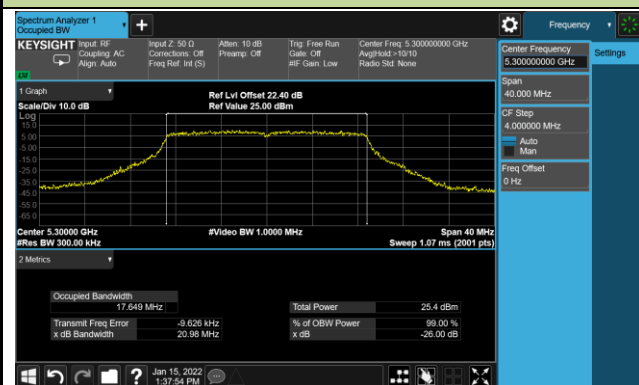


Channel 64 (5320MHz)



Channel 100 (5500MHz)

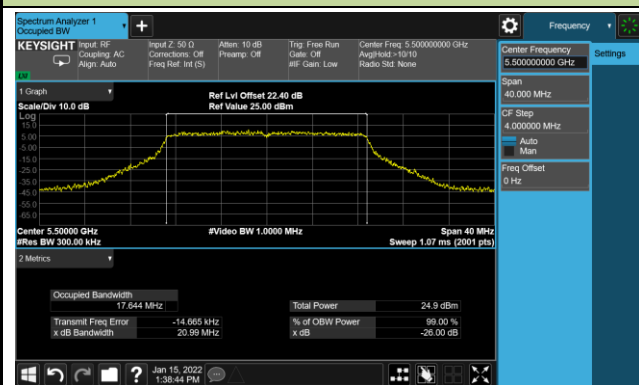


Channel 116 (5580MHz)

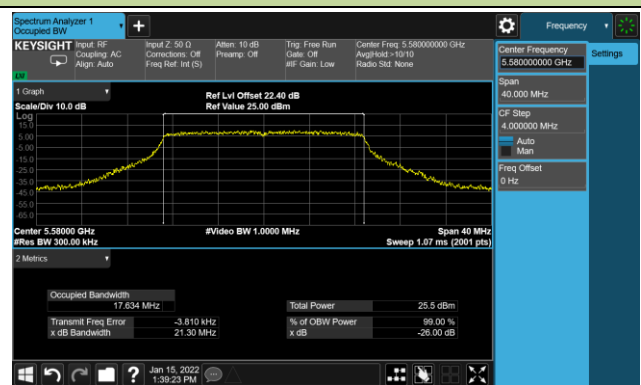


802.11ac-VHT20 26dB Bandwidth


Channel 140 (5700MHz)

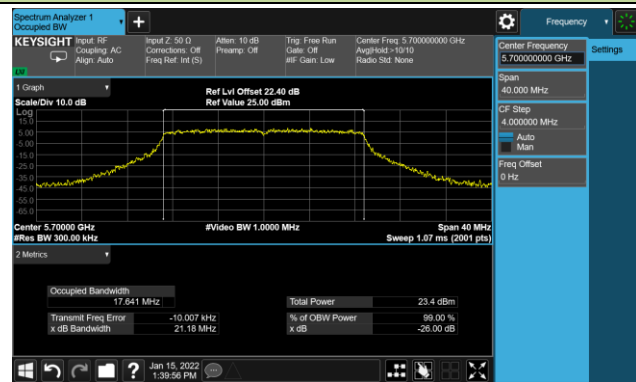


Channel 144(5720MHz)

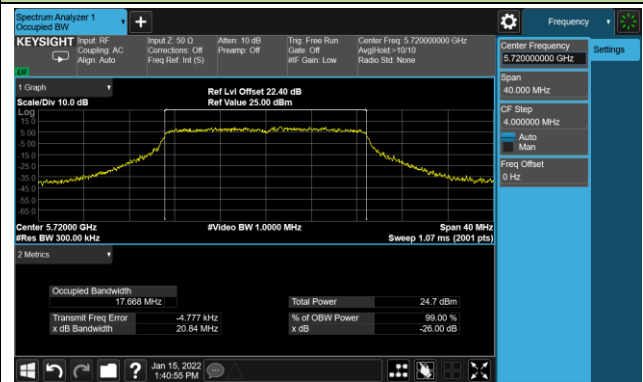


Channel 149 (5745MHz)

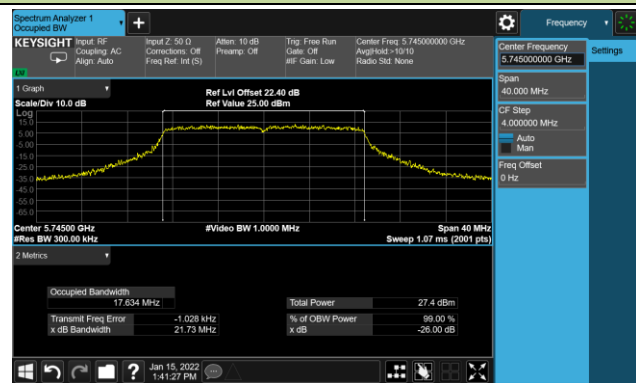

Channel 157 (5785MHz)

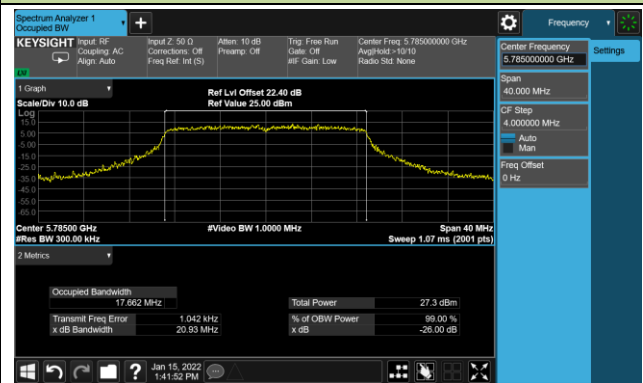


Channel 165 (5825MHz)

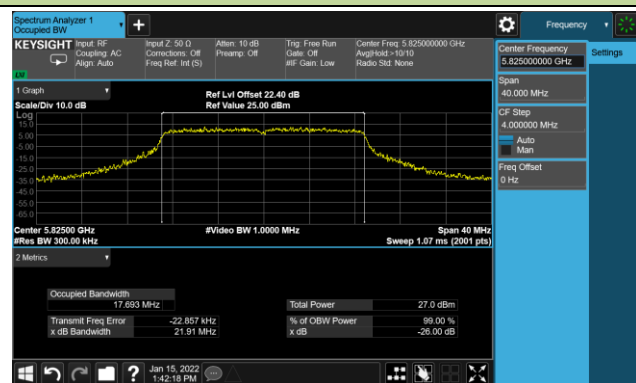


802.11ac-VHT40 26dB Bandwidth


Channel 38 (5190MHz)

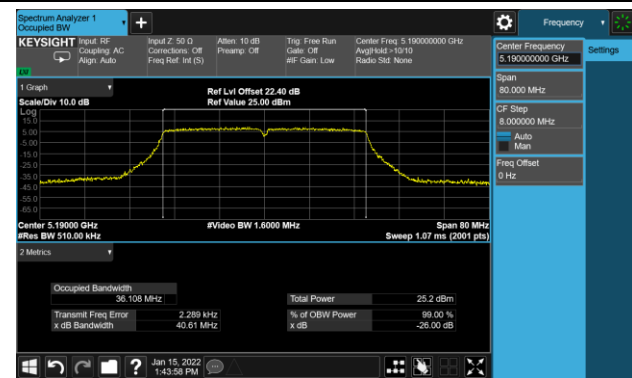


Channel 46 (5230MHz)

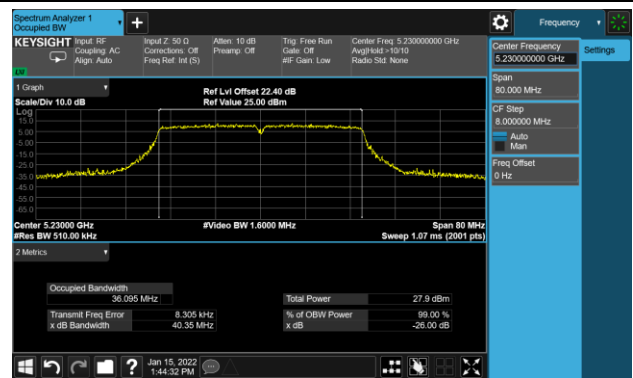

Channel 54 (5270MHz)

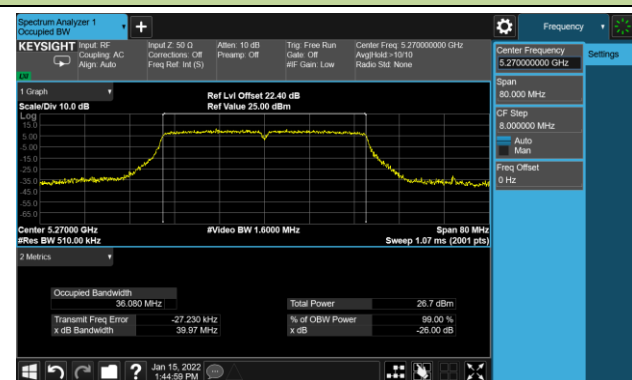


Channel 62 (5310MHz)

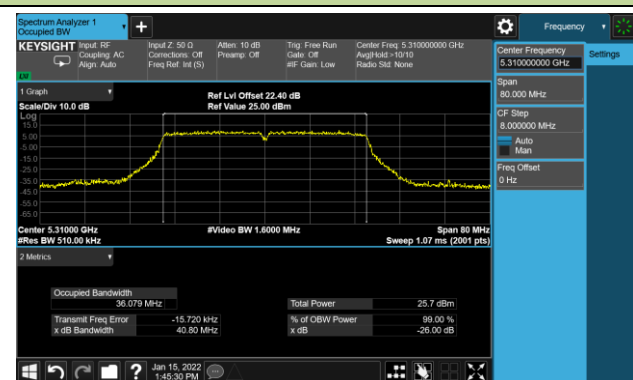


Channel 102 (5510MHz)




Channel 110 (5550MHz)

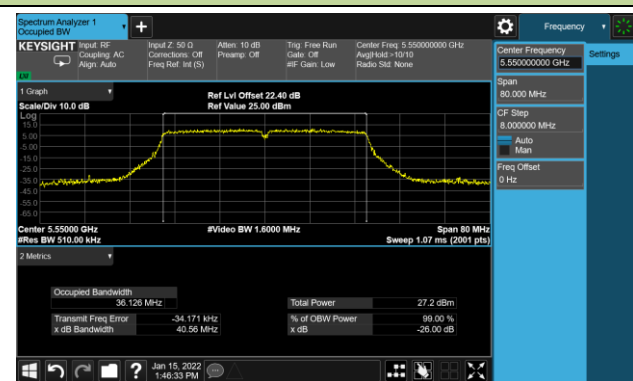


Channel 134 (5670MHz)

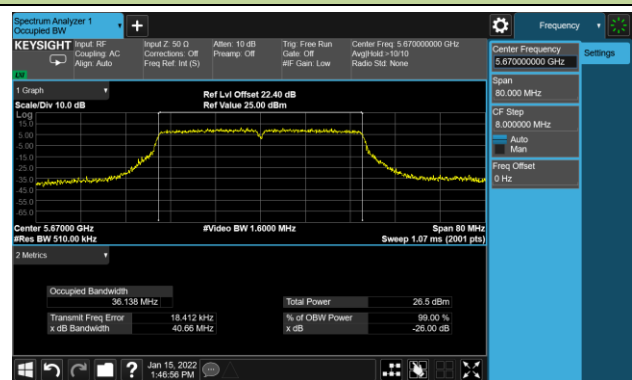


Channel 142 (5710MHz)

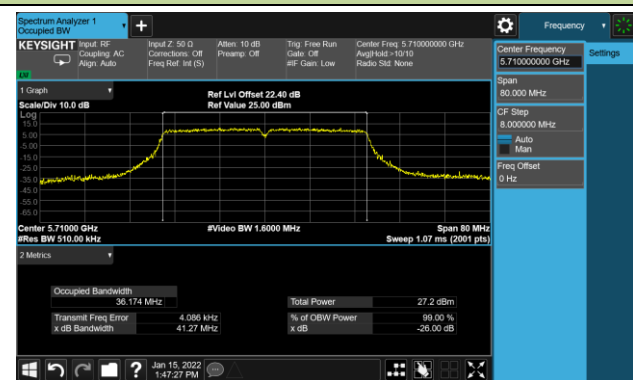

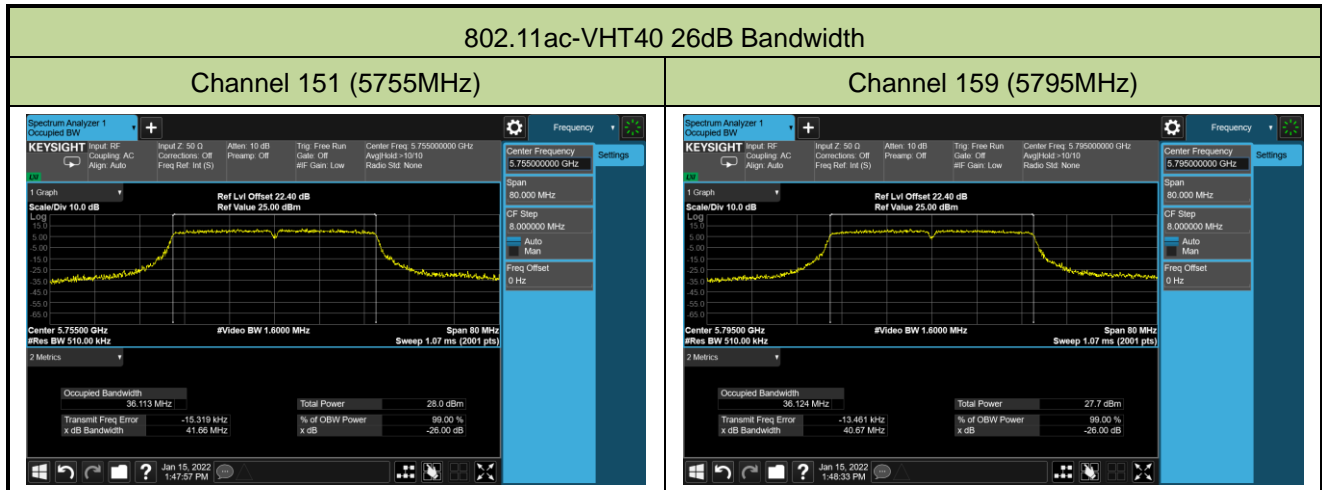


802.11ac-VHT80 26dB Bandwidth


Channel 42 (5210MHz)

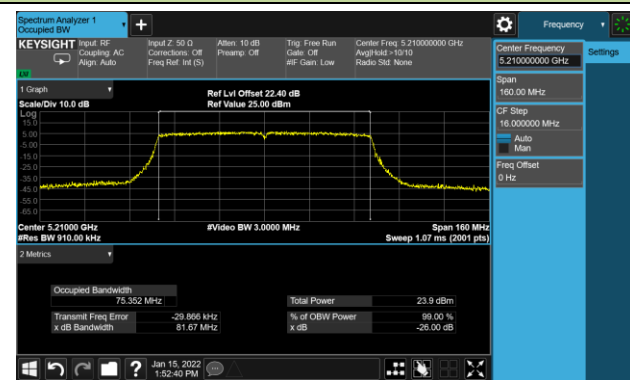


Channel 58 (5290MHz)

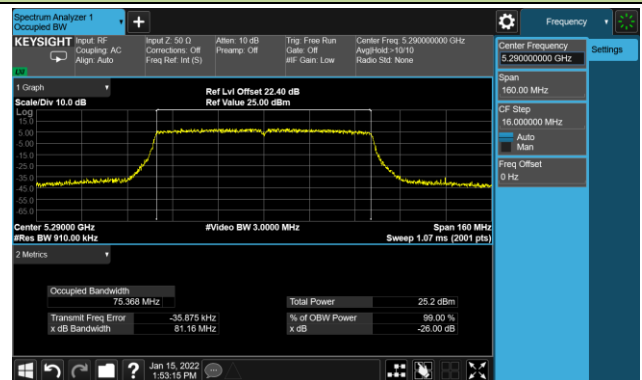


Channel 106 (5530MHz)

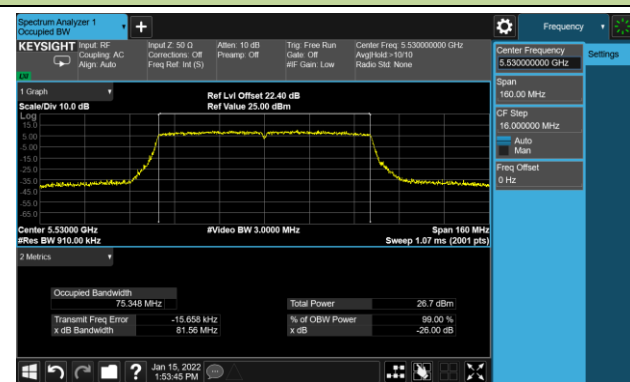

Channel 122 (5610MHz)

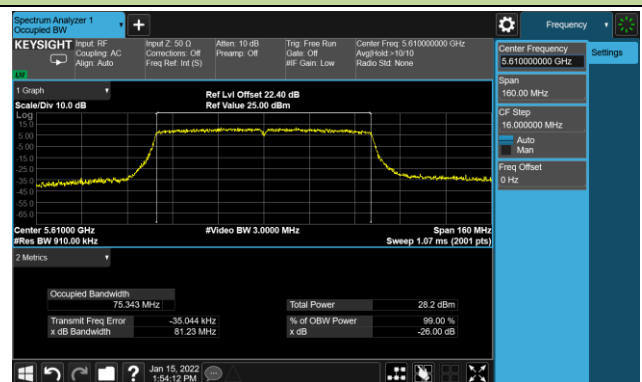

Channel 138 (5690MHz)

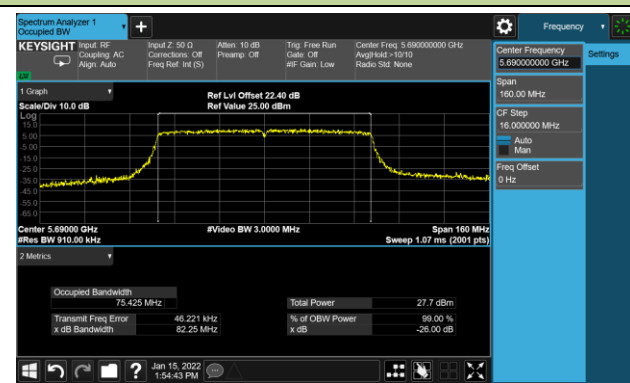

Channel 155 (5775MHz)



802.11ax-HE20 26dB Bandwidth


Channel 36 (5180MHz)




Channel 44 (5220MHz)




Channel 48 (5240MHz)

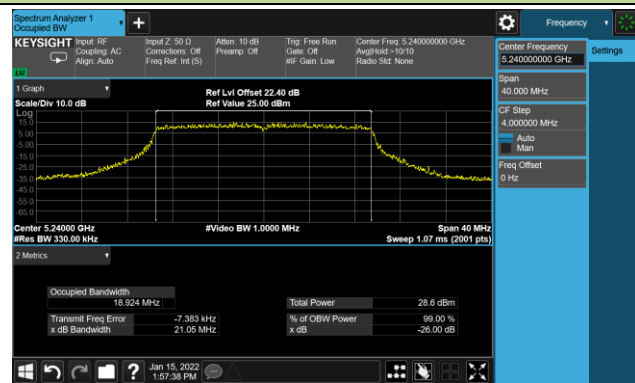


Channel 52 (5260MHz)

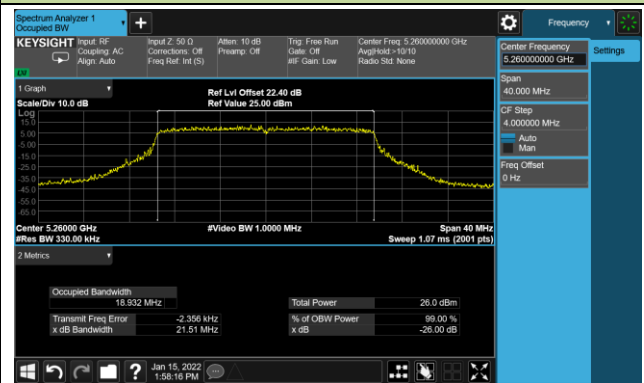


Channel 60 (5300MHz)

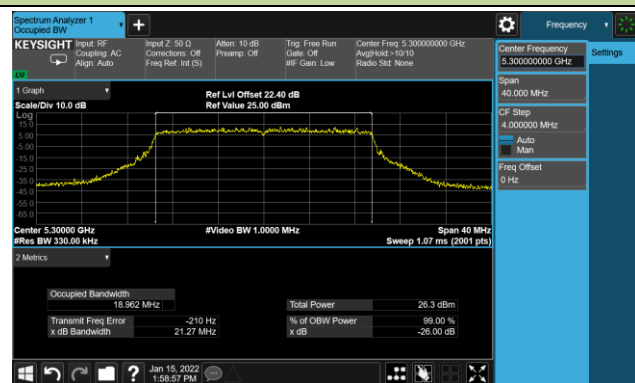


Channel 64 (5320MHz)

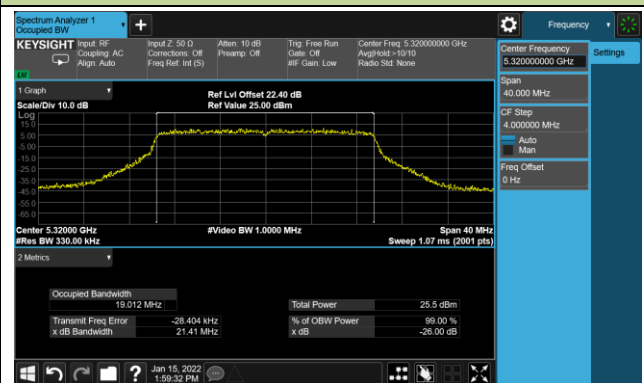

Channel 100 (5500MHz)

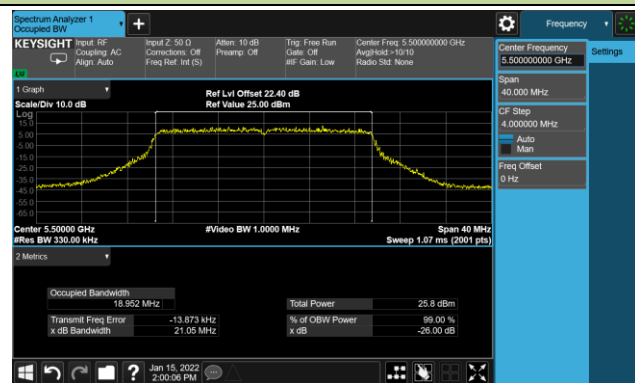


Channel 116 (5580MHz)

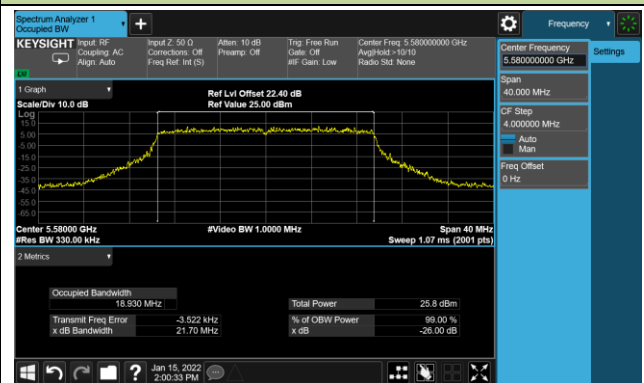


802.11ax-HE20 26dB Bandwidth


Channel 140 (5700MHz)

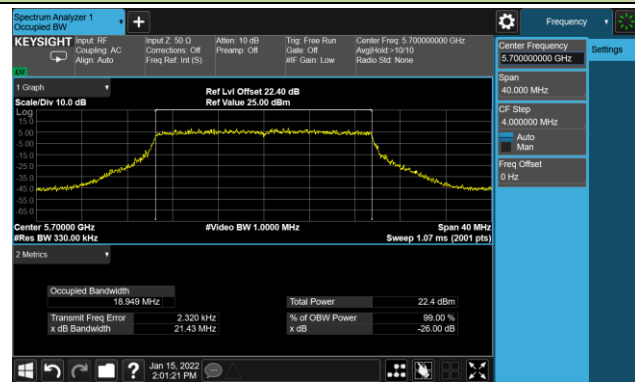


Channel 144(5720MHz)

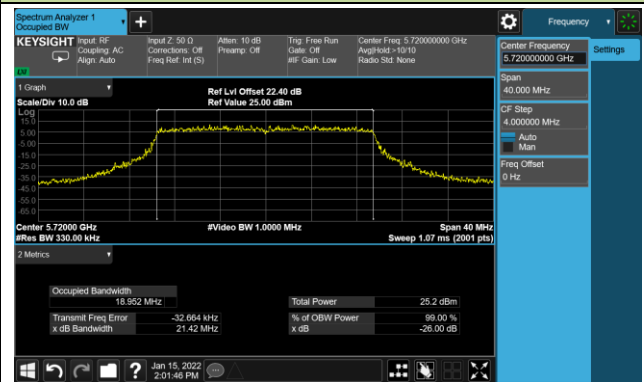

Channel 149 (5745MHz)

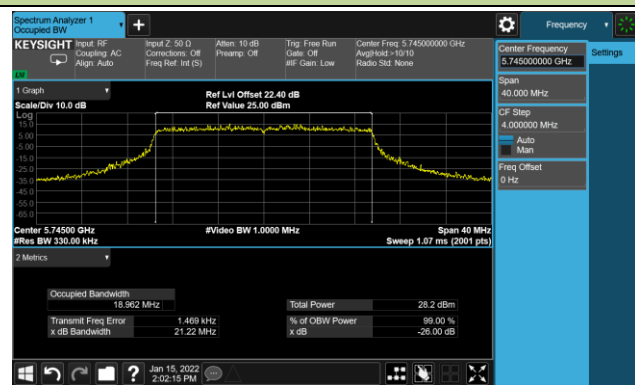

Channel 157 (5785MHz)

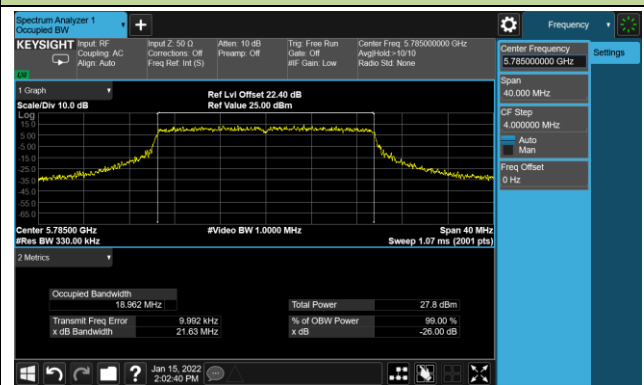


Channel 165 (5825MHz)



802.11ax-HE40 26dB Bandwidth


Channel 38 (5190MHz)

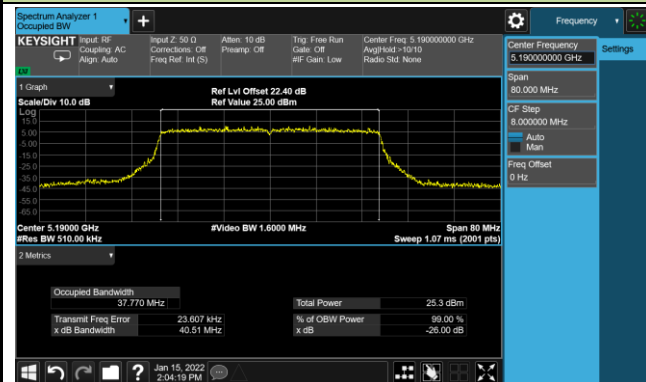


Channel 46 (5230MHz)




Channel 54 (5270MHz)

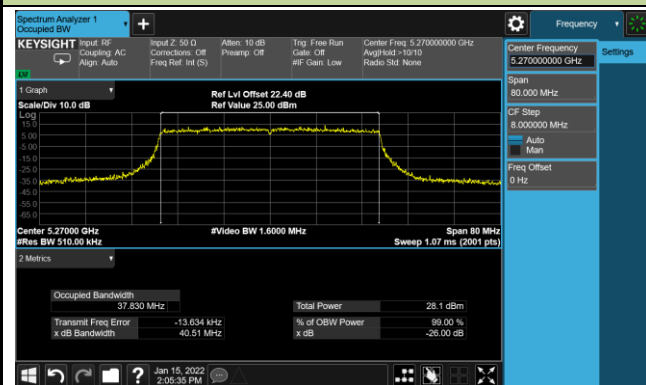

Channel 62 (5310MHz)

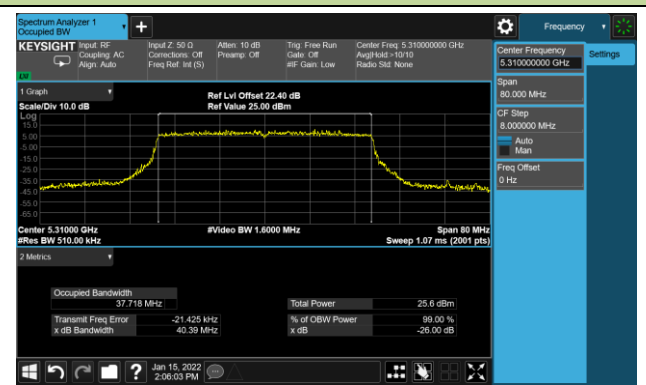


Channel 102 (5510MHz)

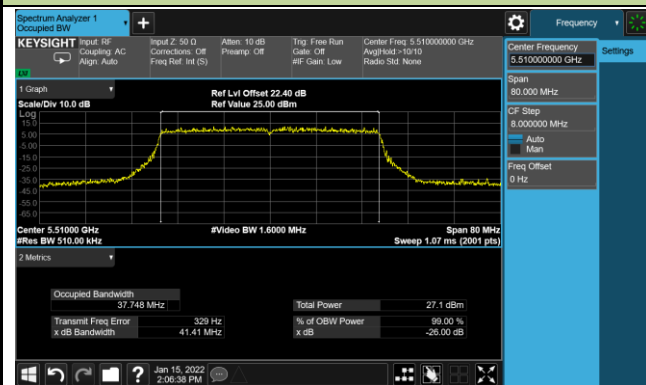


Channel 110 (5550MHz)




Channel 134 (5670MHz)

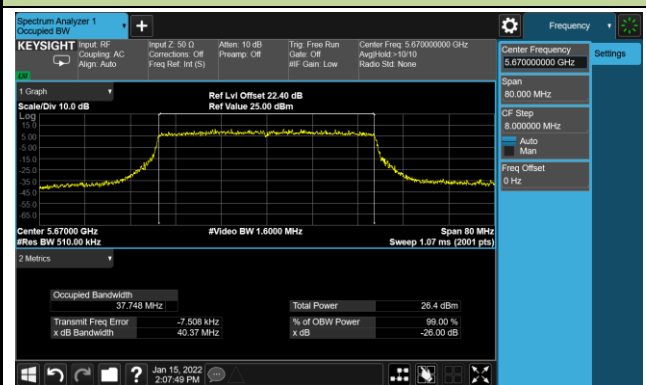


Channel 142(5710MHz)

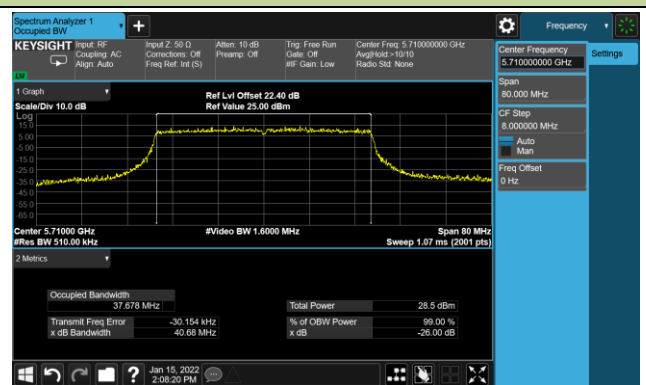

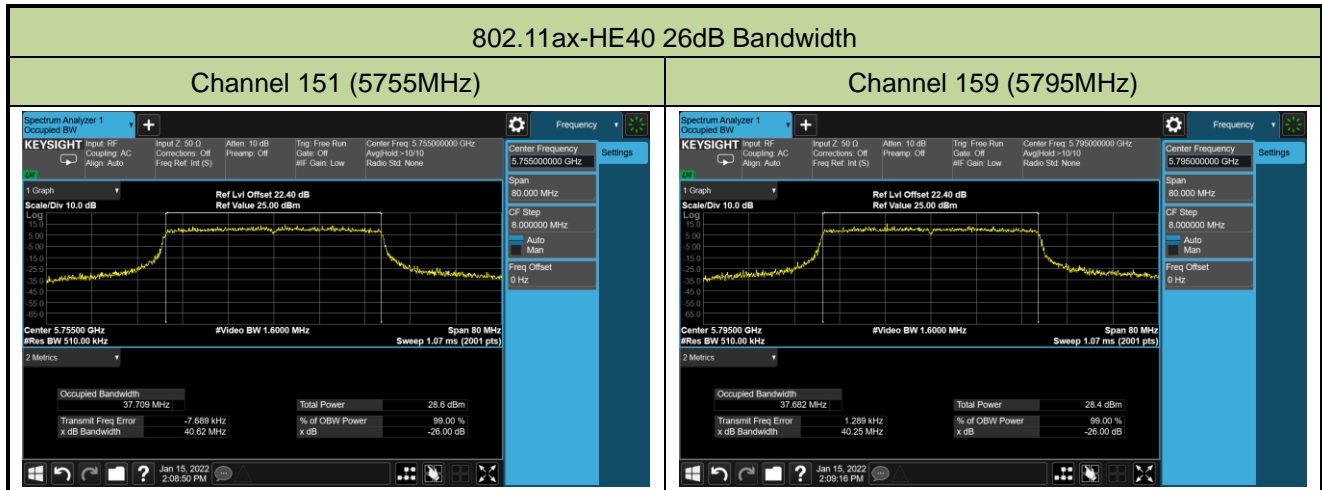


802.11ax-HE80 26dB Bandwidth


Channel 42 (5210MHz)

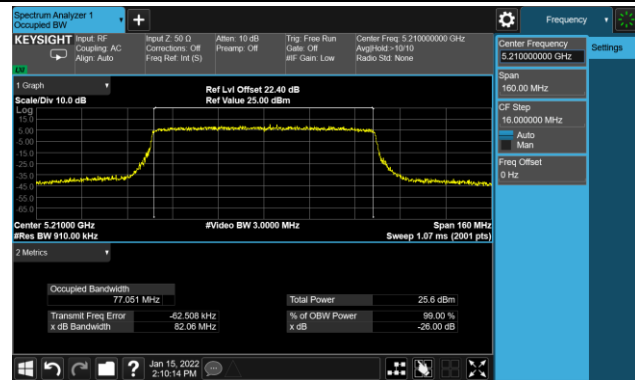


Channel 58 (5290MHz)

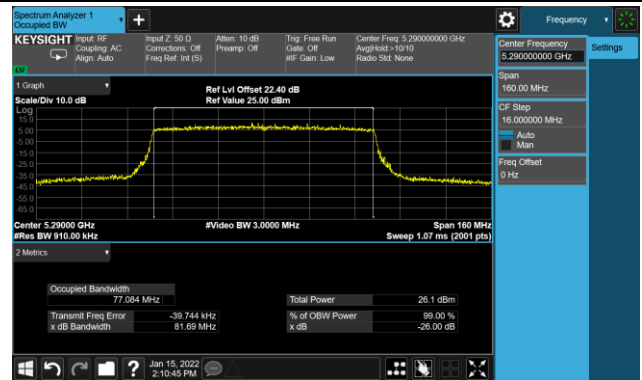


Channel 106 (5530MHz)

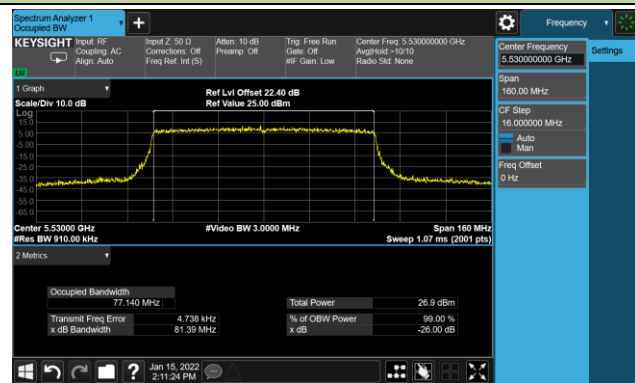


Channel 122 (5610MHz)

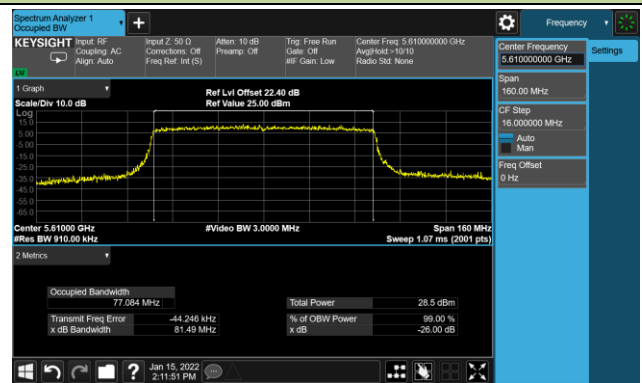

Channel 138 (5690MHz)

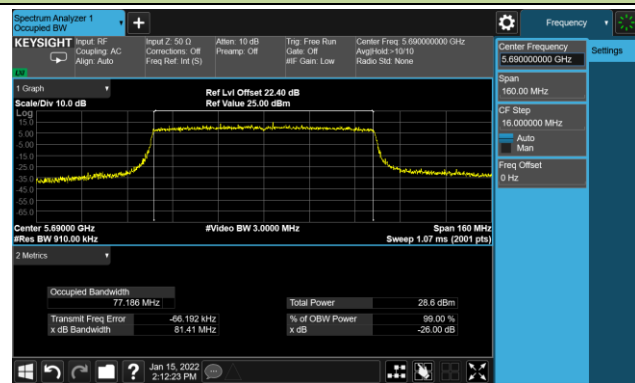

Channel 155 (5775MHz)

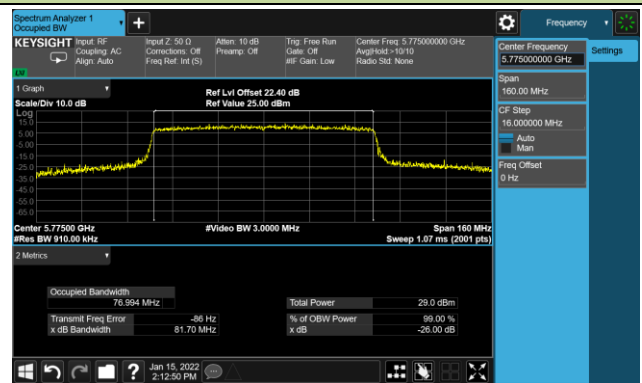

A.3 6dB Bandwidth Test Result

Test Site	SIP-TR1	Test Engineer	Alisa Deng
Test Date	2021/10/22		

Test Mode	Data Rate/ MCS	Channel No.	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (MHz)
11a	6Mbps	149	5745	15.50	≥ 0.5
11a	6Mbps	157	5785	16.27	≥ 0.5
11a	6Mbps	165	5825	16.05	≥ 0.5
11ac-VHT20	MCS0	149	5745	17.63	≥ 0.5
11ac-VHT20	MCS0	157	5785	17.52	≥ 0.5
11ac-VHT20	MCS0	165	5825	16.95	≥ 0.5
11ac-VHT40	MCS0	151	5755	36.34	≥ 0.5
11ac-VHT40	MCS0	159	5795	35.73	≥ 0.5
11ac-VHT80	MCS0	155	5775	76.21	≥ 0.5
11ax-HE20	MCS0	149	5745	17.87	≥ 0.5
11ax-HE20	MCS0	157	5785	18.99	≥ 0.5
11ax-HE20	MCS0	165	5825	15.76	≥ 0.5
11ax-HE40	MCS0	151	5755	37.25	≥ 0.5
11ax-HE40	MCS0	159	5795	37.59	≥ 0.5
11ax-HE80	MCS0	155	5775	73.40	≥ 0.5