


Site: WZ-AC1	Time: 2022/05/27 - 00:21
Limit: FCC_2.4G_RE(3m)	Engineer: Charles Zhang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: Wi-Fi DSL Modem Gateway	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at 2417MHz	

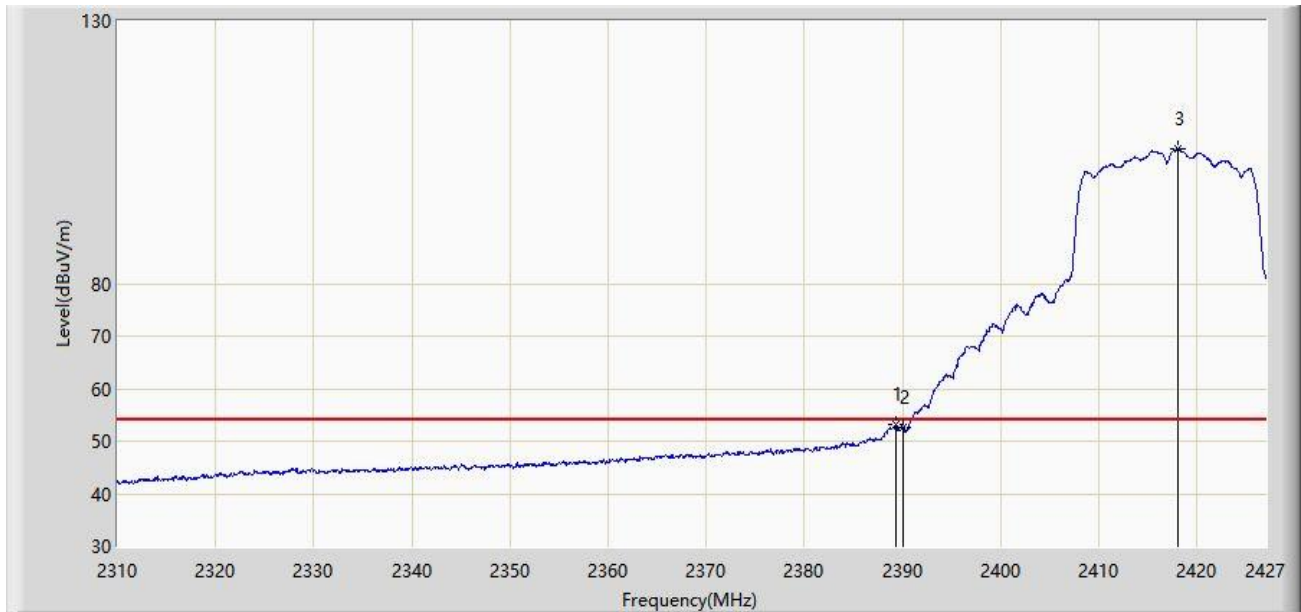


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	2389.326	53.083	22.558	-0.917	54.000	30.525	AV
2		2390.000	52.522	21.996	-1.478	54.000	30.526	AV
3		2418.050	105.637	75.078	N/A	N/A	30.559	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Time: 2022/05/23 - 19:48
Limit: FCC_2.4G_RE(3m)	Engineer: Charles Zhang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: Wi-Fi DSL Modem Gateway	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at 2437MHz	

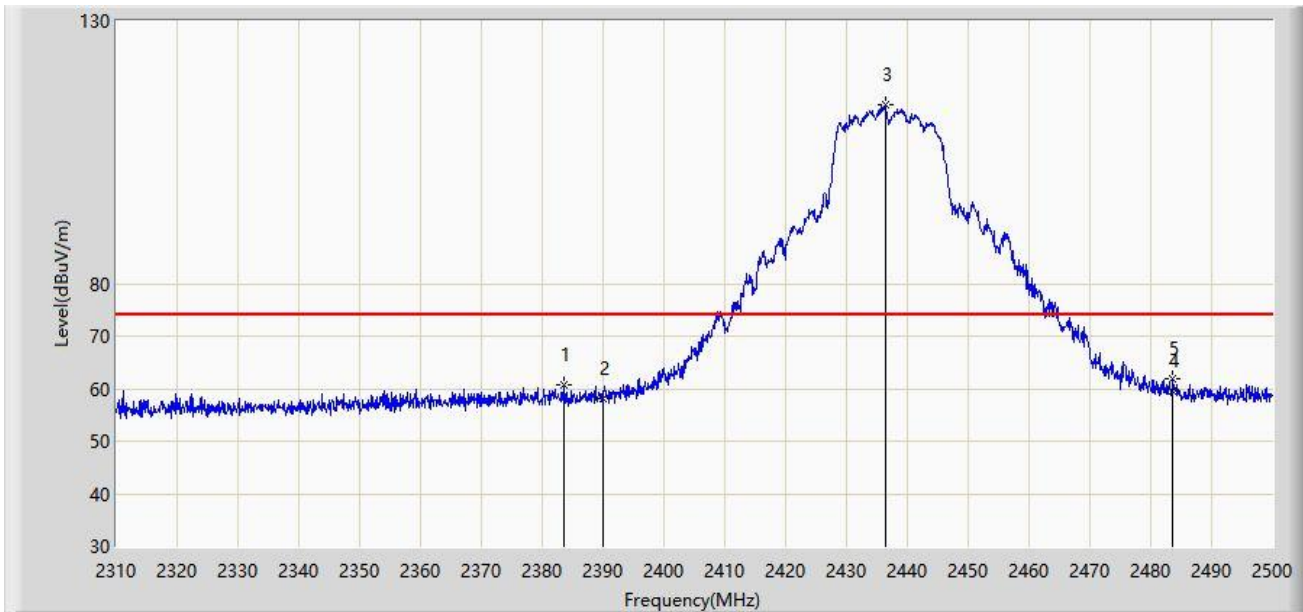


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2383.625	60.699	30.182	-13.301	74.000	30.517	PK
2		2390.000	58.179	27.653	-15.821	74.000	30.526	PK
3		2436.350	114.129	83.584	N/A	N/A	30.546	PK
4		2483.500	59.656	28.953	-14.344	74.000	30.704	PK
5	*	2483.660	61.839	31.135	-12.161	74.000	30.704	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Time: 2022/05/23 - 19:51
Limit: FCC_2.4G_RE(3m)	Engineer: Charles Zhang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: Wi-Fi DSL Modem Gateway	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at 2437MHz	

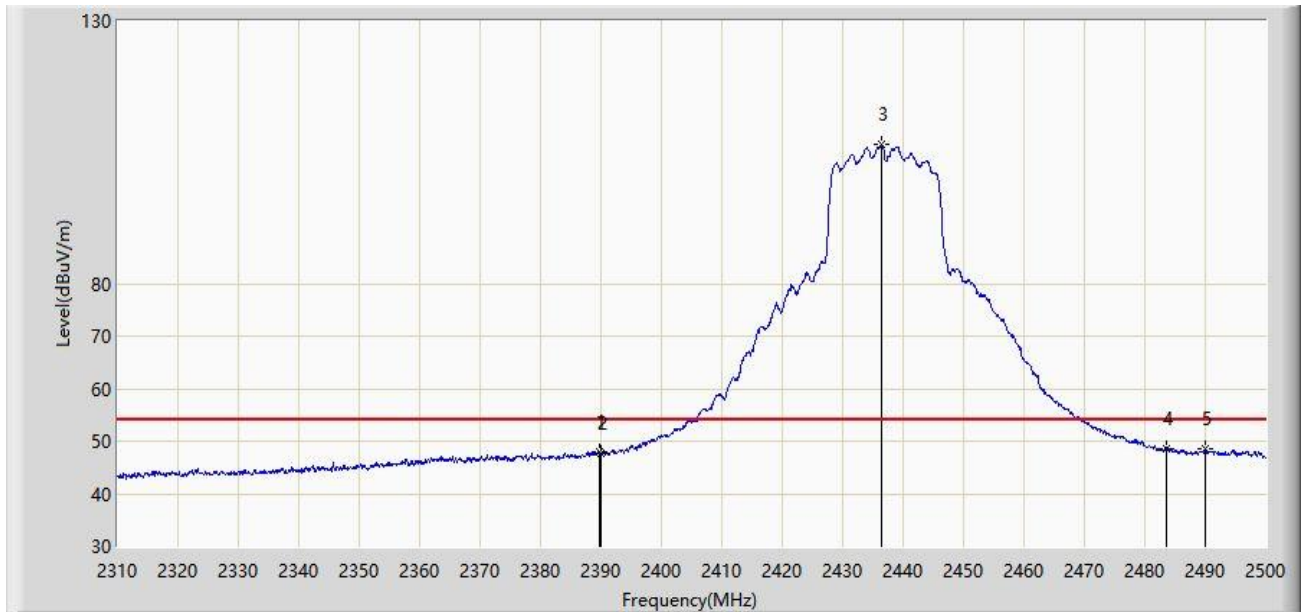


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2389.705	47.947	17.421	-6.053	54.000	30.525	AV
2		2390.000	47.549	17.023	-6.451	54.000	30.526	AV
3		2436.445	106.536	75.991	N/A	N/A	30.545	AV
4		2483.500	48.597	17.894	-5.403	54.000	30.704	AV
5	*	2490.025	48.599	17.892	-5.401	54.000	30.707	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Time: 2022/05/23 - 19:55
Limit: FCC_2.4G_RE(3m)	Engineer: Charles Zhang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: Wi-Fi DSL Modem Gateway	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at 2437MHz	

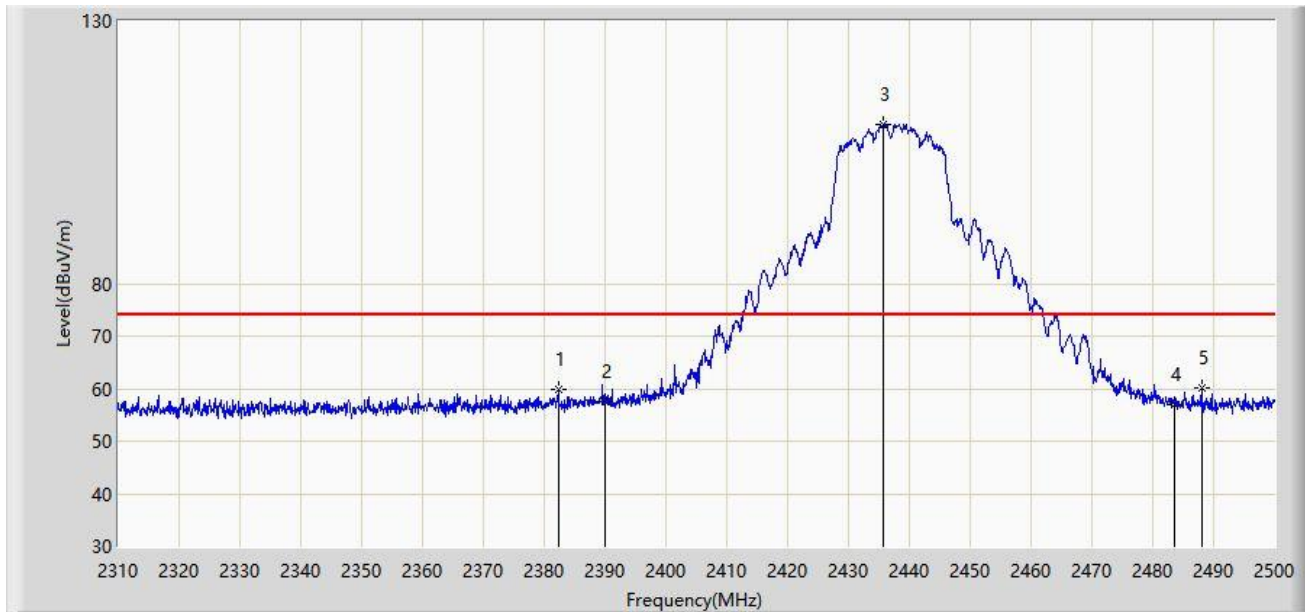


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2382.295	59.778	29.259	-14.222	74.000	30.519	PK
2		2390.000	57.408	26.882	-16.592	74.000	30.526	PK
3		2435.780	110.427	79.881	N/A	N/A	30.546	PK
4		2483.500	57.040	26.337	-16.960	74.000	30.704	PK
5	*	2488.030	60.111	29.405	-13.889	74.000	30.706	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Time: 2022/05/23 - 19:57
Limit: FCC_2.4G_RE(3m)	Engineer: Charles Zhang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: Wi-Fi DSL Modem Gateway	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at 2437MHz	

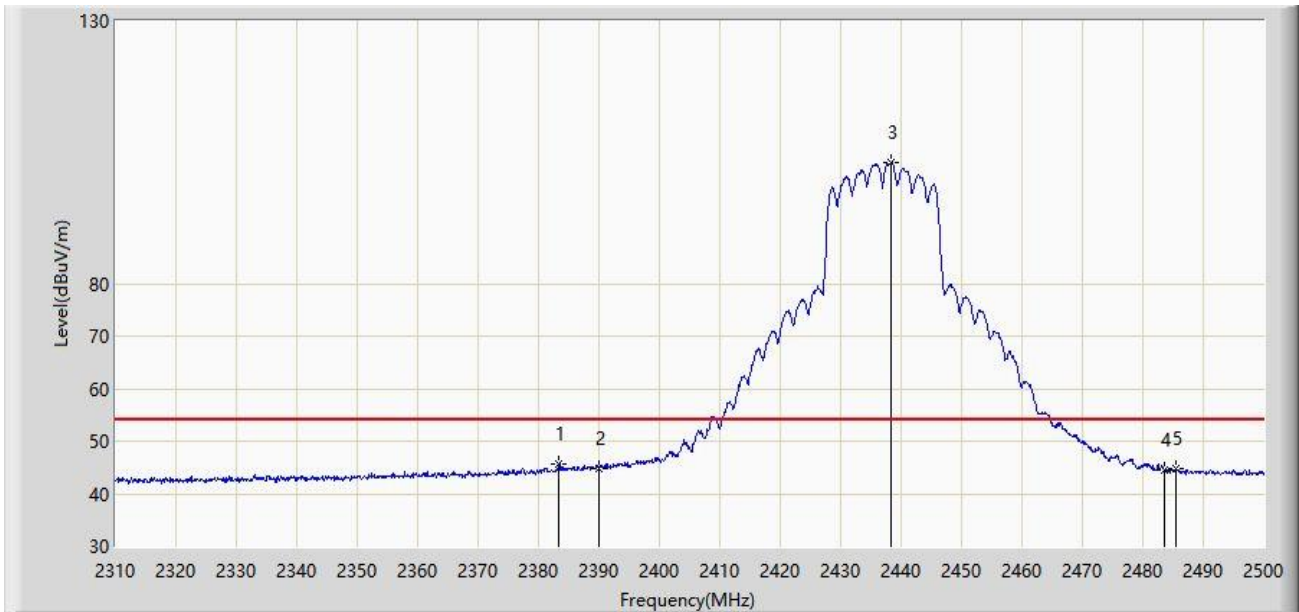

No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	2383.435	45.594	15.077	-8.406	54.000	30.517	AV
2		2390.000	44.870	14.344	-9.130	54.000	30.526	AV
3		2438.440	102.932	72.386	N/A	N/A	30.546	AV
4		2483.500	44.527	13.824	-9.473	54.000	30.704	AV
5		2485.560	44.696	13.991	-9.304	54.000	30.704	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Time: 2022/05/27 - 00:38
Limit: FCC_2.4G_RE(3m)	Engineer: Charles Zhang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: Wi-Fi DSL Modem Gateway	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at 2457MHz	




No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		2456.275	112.770	82.162	N/A	N/A	30.608	PK
2		2483.500	67.518	36.815	-6.482	74.000	30.704	PK
3	*	2483.543	68.742	38.038	-5.258	74.000	30.704	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Time: 2022/05/27 - 00:37
Limit: FCC_2.4G_RE(3m)	Engineer: Charles Zhang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: Wi-Fi DSL Modem Gateway	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at 2457MHz	

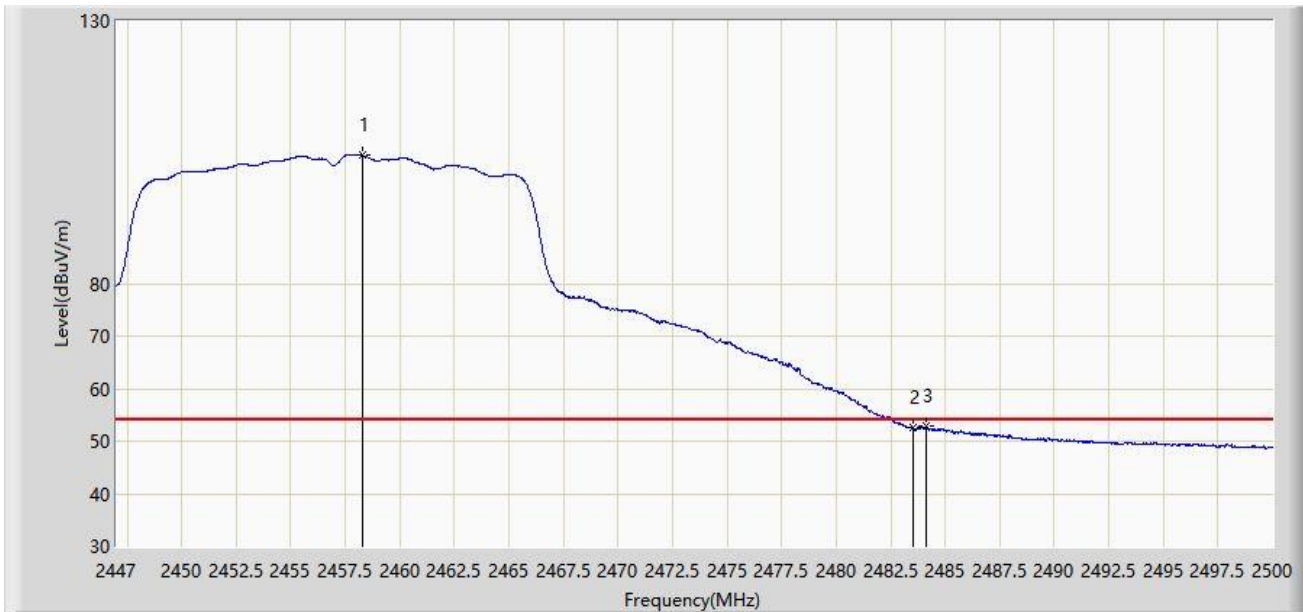

No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		2458.289	104.413	73.795	N/A	N/A	30.618	AV
2		2483.500	52.546	21.843	-1.454	54.000	30.704	AV
3	*	2484.126	52.827	22.123	-1.173	54.000	30.704	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Time: 2022/05/19 - 23:55
Limit: FCC_2.4G_RE(3m)	Engineer: Charles Zhang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: Wi-Fi DSL Modem Gateway	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at 2462MHz	




No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		2461.360	110.485	79.852	N/A	N/A	30.633	PK
2		2483.500	68.014	37.311	-5.986	74.000	30.704	PK
3	*	2483.776	69.198	38.494	-4.802	74.000	30.703	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Time: 2022/05/19 - 23:51
Limit: FCC_2.4G_RE(3m)	Engineer: Charles Zhang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: Wi-Fi DSL Modem Gateway	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at 2462MHz	

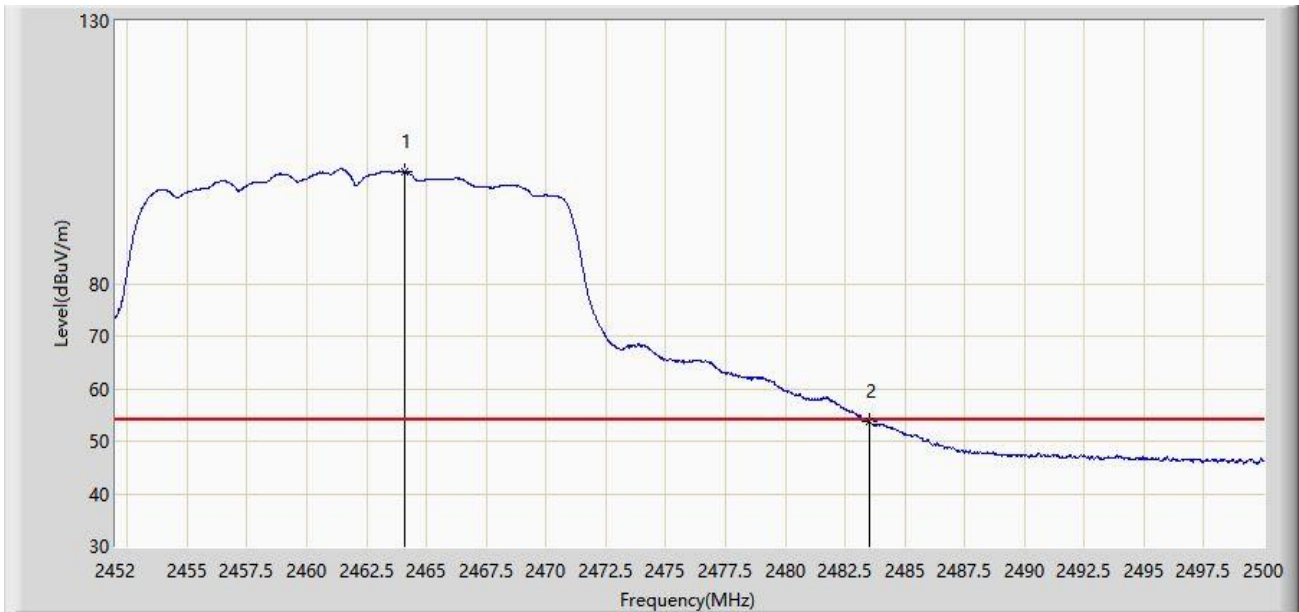

No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		2464.072	101.329	70.683	N/A	N/A	30.646	AV
2	*	2483.500	53.666	22.963	-0.334	54.000	30.704	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Time: 2022/05/19 - 23:58
Limit: FCC_2.4G_RE(3m)	Engineer: Charles Zhang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: Wi-Fi DSL Modem Gateway	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at 2462MHz	




No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		2463.208	106.896	76.254	N/A	N/A	30.642	PK
2		2483.500	63.693	32.990	-10.307	74.000	30.704	PK
3	*	2483.872	64.680	33.976	-9.320	74.000	30.703	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Time: 2022/05/20 - 00:00
Limit: FCC_2.4G_RE(3m)	Engineer: Charles Zhang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: Wi-Fi DSL Modem Gateway	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at 2462MHz	

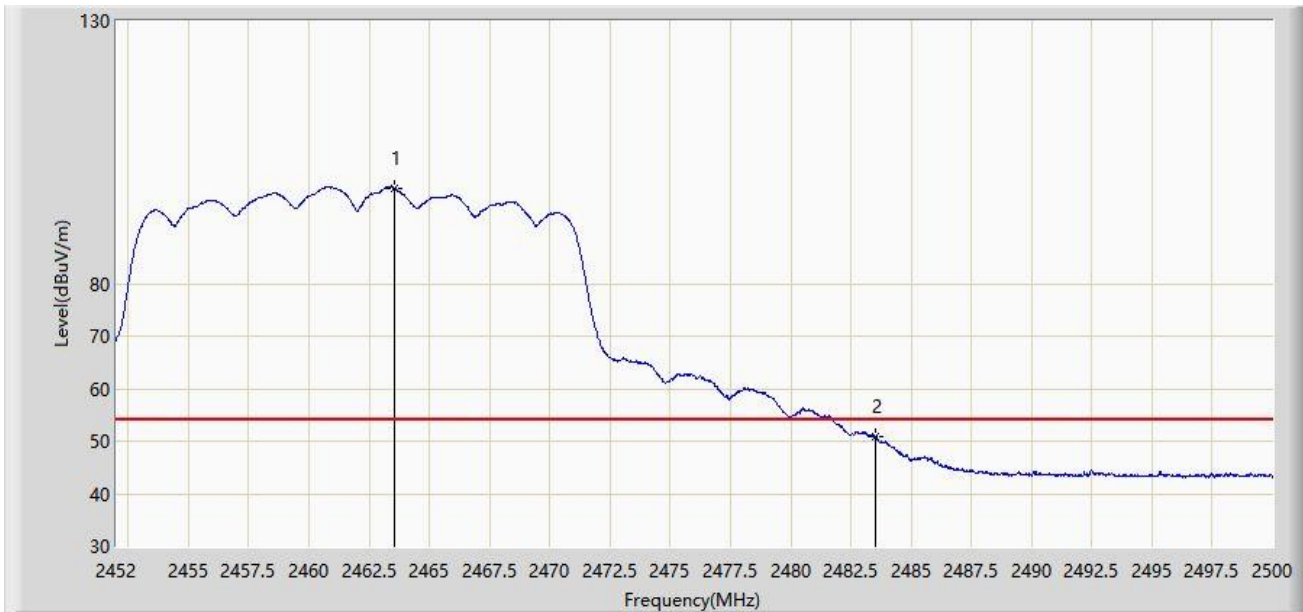


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		2463.568	98.174	67.530	N/A	N/A	30.644	AV
2	*	2483.500	50.811	20.108	-3.189	54.000	30.704	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Time: 2022/05/20 - 20:28
Limit: FCC_2.4G_RE(3m)	Engineer: Charles Zhang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: Wi-Fi DSL Modem Gateway	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at 2422MHz	

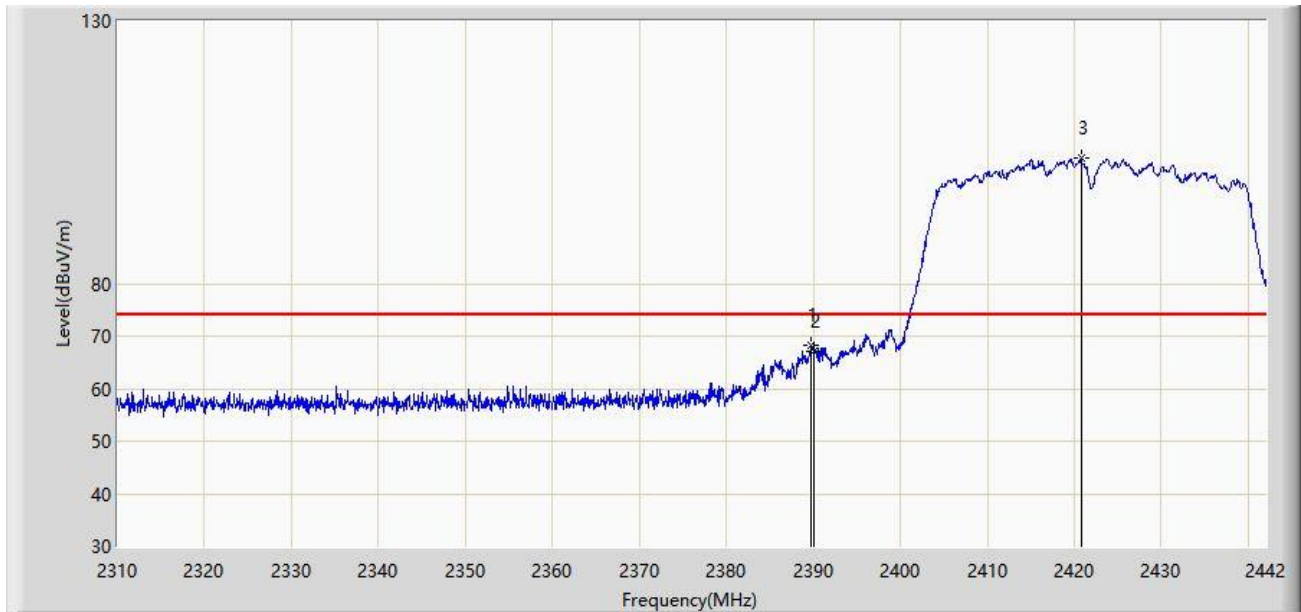


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	2389.728	68.137	37.611	-5.863	74.000	30.526	PK
2		2390.000	67.058	36.532	-6.942	74.000	30.526	PK
3		2420.748	103.784	73.225	N/A	N/A	30.559	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Time: 2022/05/20 - 20:25
Limit: FCC_2.4G_RE(3m)	Engineer: Charles Zhang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: Wi-Fi DSL Modem Gateway	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at 2422MHz	

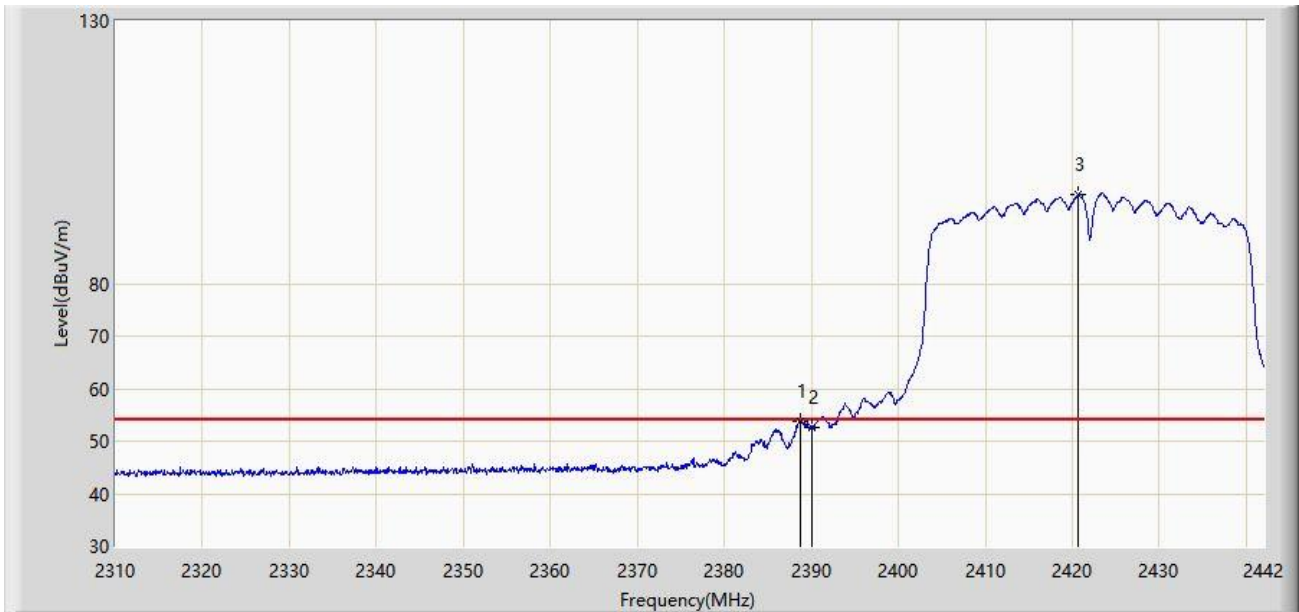


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	2388.804	53.829	23.305	-0.171	54.000	30.524	AV
2		2390.000	52.703	22.177	-1.297	54.000	30.526	AV
3		2420.682	96.984	66.425	N/A	N/A	30.559	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Time: 2022/05/20 - 20:31
Limit: FCC_2.4G_RE(3m)	Engineer: Charles Zhang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: Wi-Fi DSL Modem Gateway	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at 2422MHz	

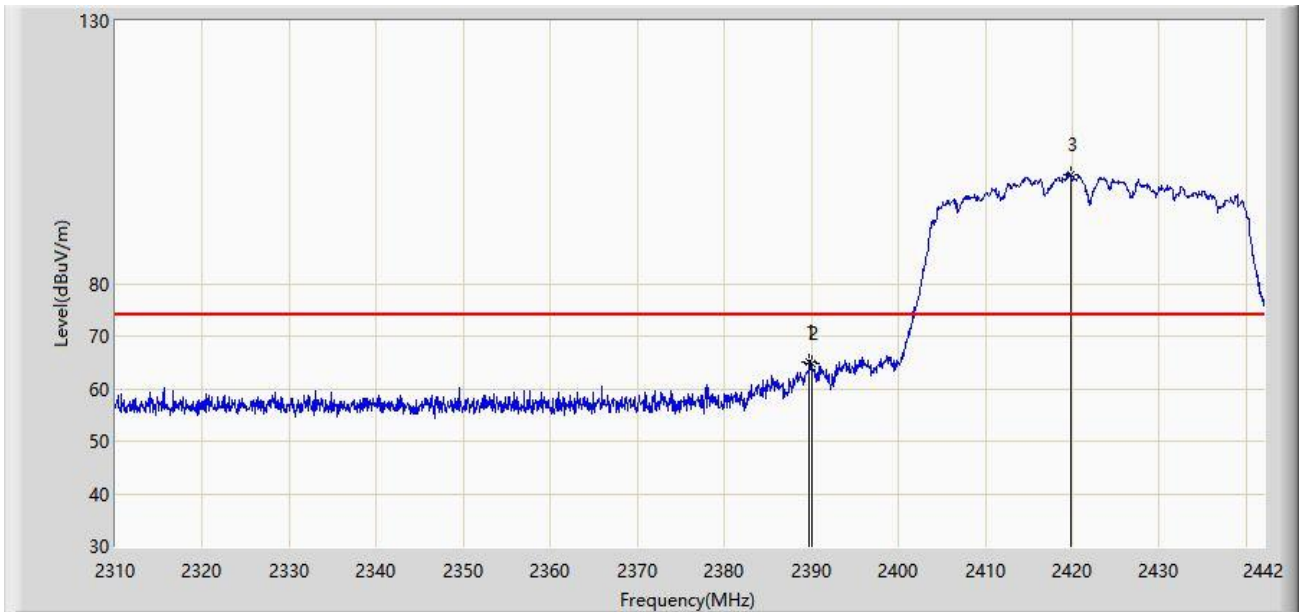


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	2389.794	65.087	34.561	-8.913	74.000	30.526	PK
2		2390.000	64.744	34.218	-9.256	74.000	30.526	PK
3		2419.758	100.685	70.125	N/A	N/A	30.560	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Time: 2022/05/20 - 20:32
Limit: FCC_2.4G_RE(3m)	Engineer: Charles Zhang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: Wi-Fi DSL Modem Gateway	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at 2422MHz	

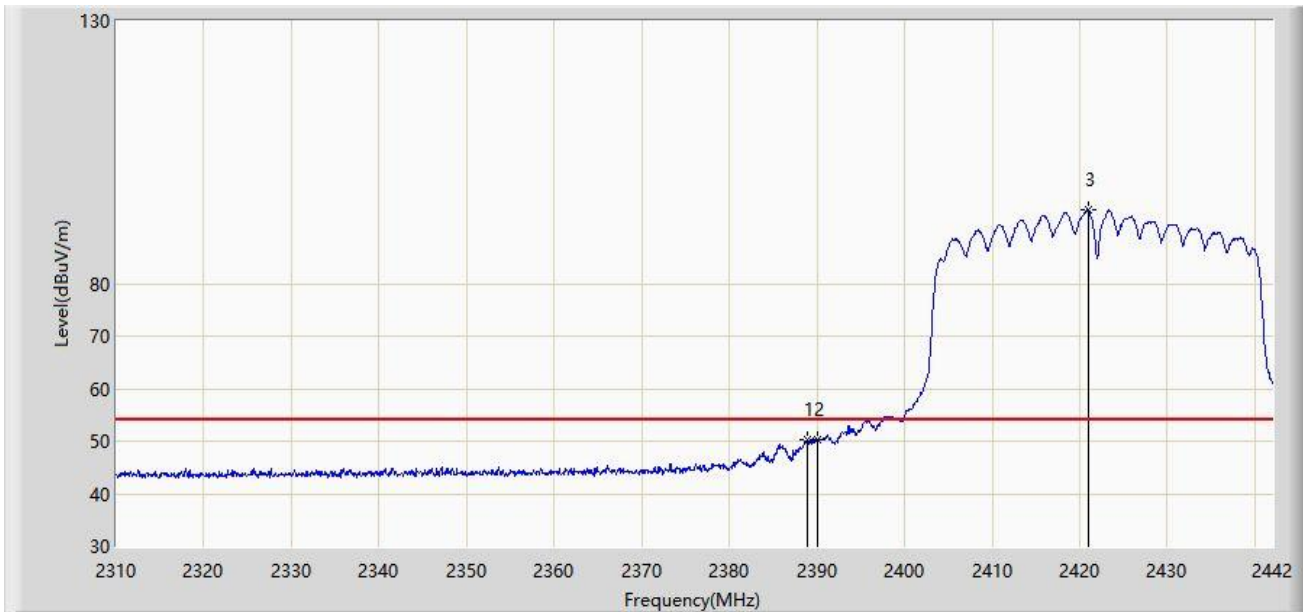


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	2388.936	50.294	19.770	-3.706	54.000	30.524	AV
2		2390.000	50.255	19.729	-3.745	54.000	30.526	AV
3		2420.946	94.024	63.465	N/A	N/A	30.559	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Time: 2022/05/27 - 00:52
Limit: FCC_2.4G_RE(3m)	Engineer: Charles Zhang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: Wi-Fi DSL Modem Gateway	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at 2427MHz	

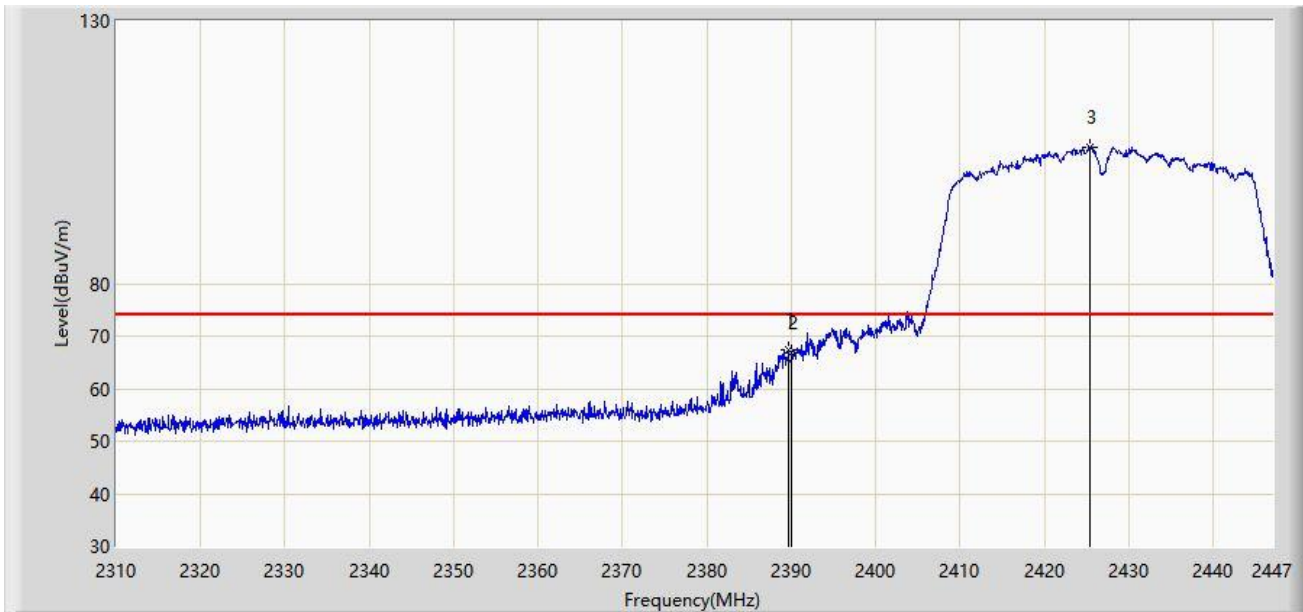


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	2389.666	67.448	36.922	-6.552	74.000	30.525	PK
2		2390.000	66.873	36.347	-7.127	74.000	30.526	PK
3		2425.285	105.977	75.424	N/A	N/A	30.552	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Time: 2022/05/27 - 00:49
Limit: FCC_2.4G_RE(3m)	Engineer: Charles Zhang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: Wi-Fi DSL Modem Gateway	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at 2427MHz	

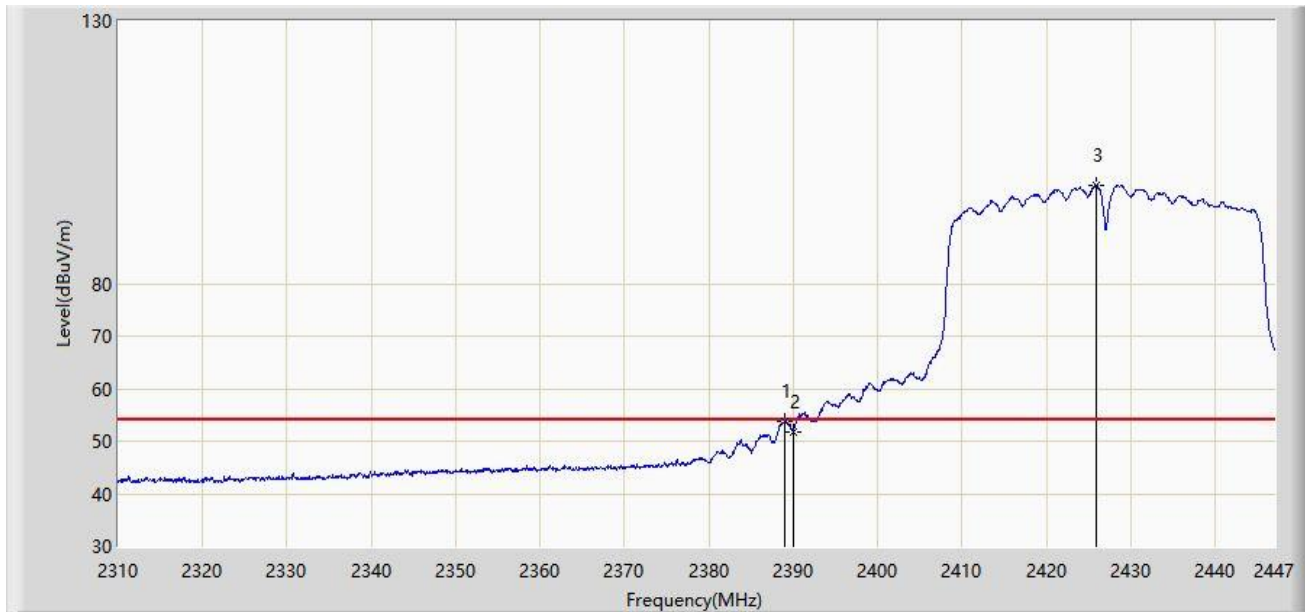


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	2388.912	53.667	23.143	-0.333	54.000	30.524	AV
2		2390.000	51.868	21.342	-2.132	54.000	30.526	AV
3		2425.833	98.797	68.245	N/A	N/A	30.552	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Time: 2022/05/23 - 20:16
Limit: FCC_2.4G_RE(3m)	Engineer: Charles Zhang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: Wi-Fi DSL Modem Gateway	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at 2437MHz	

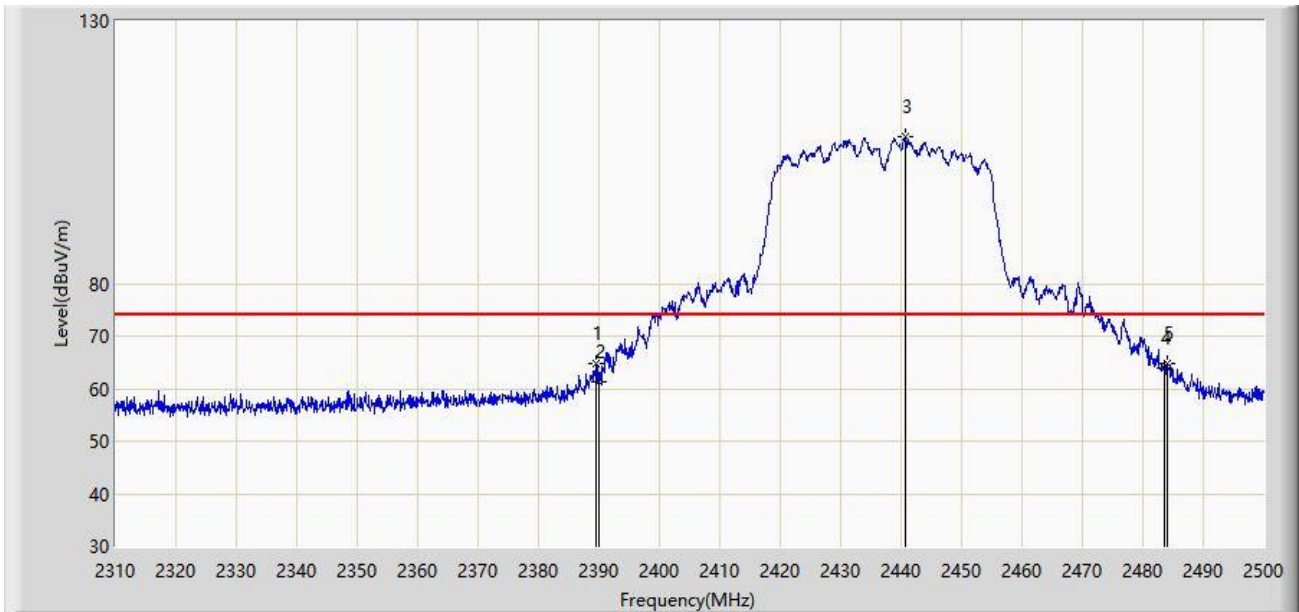


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2389.610	64.709	34.183	-9.291	74.000	30.525	PK
2		2390.000	61.284	30.758	-12.716	74.000	30.526	PK
3		2440.625	107.879	77.326	N/A	N/A	30.554	PK
4		2483.500	63.927	33.224	-10.073	74.000	30.704	PK
5	*	2483.945	64.839	34.135	-9.161	74.000	30.704	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Time: 2022/05/23 - 20:14
Limit: FCC_2.4G_RE(3m)	Engineer: Charles Zhang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: Wi-Fi DSL Modem Gateway	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at 2437MHz	

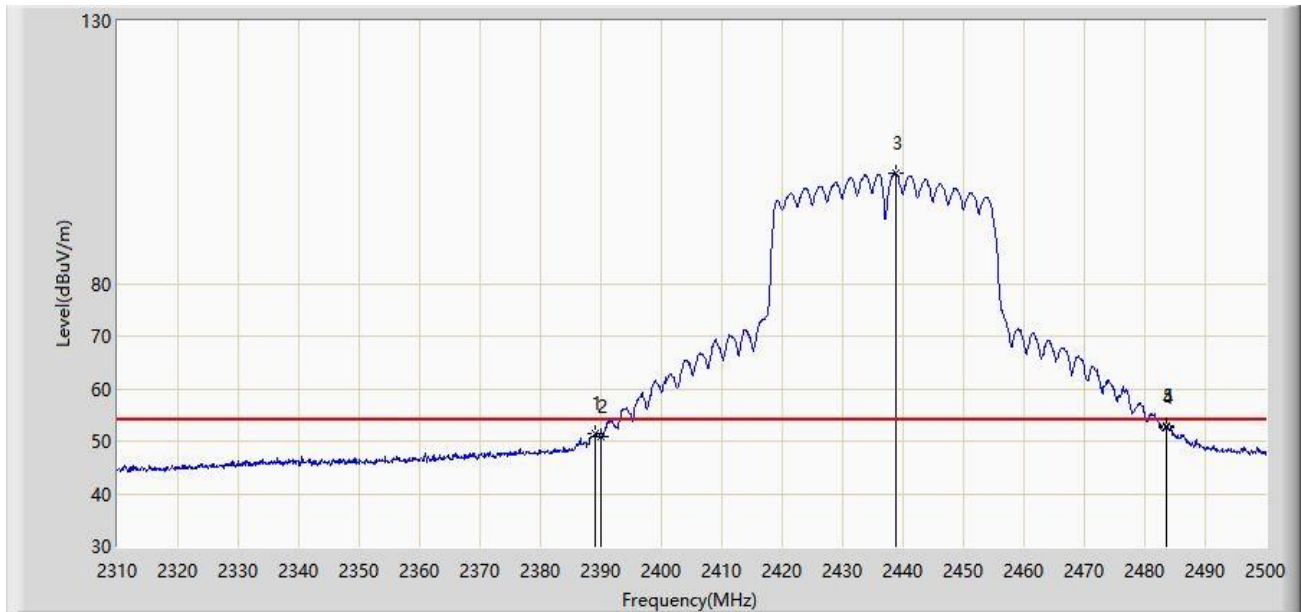


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		2388.945	51.517	20.993	-2.483	54.000	30.525	AV
2		2390.000	50.799	20.273	-3.201	54.000	30.526	AV
3		2438.725	100.975	70.428	N/A	N/A	30.547	AV
4		2483.500	52.555	21.852	-1.445	54.000	30.704	AV
5	*	2483.565	52.784	22.080	-1.216	54.000	30.704	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Time: 2022/05/23 - 20:18
Limit: FCC_2.4G_RE(3m)	Engineer: Charles Zhang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: Wi-Fi DSL Modem Gateway	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at 2437MHz	

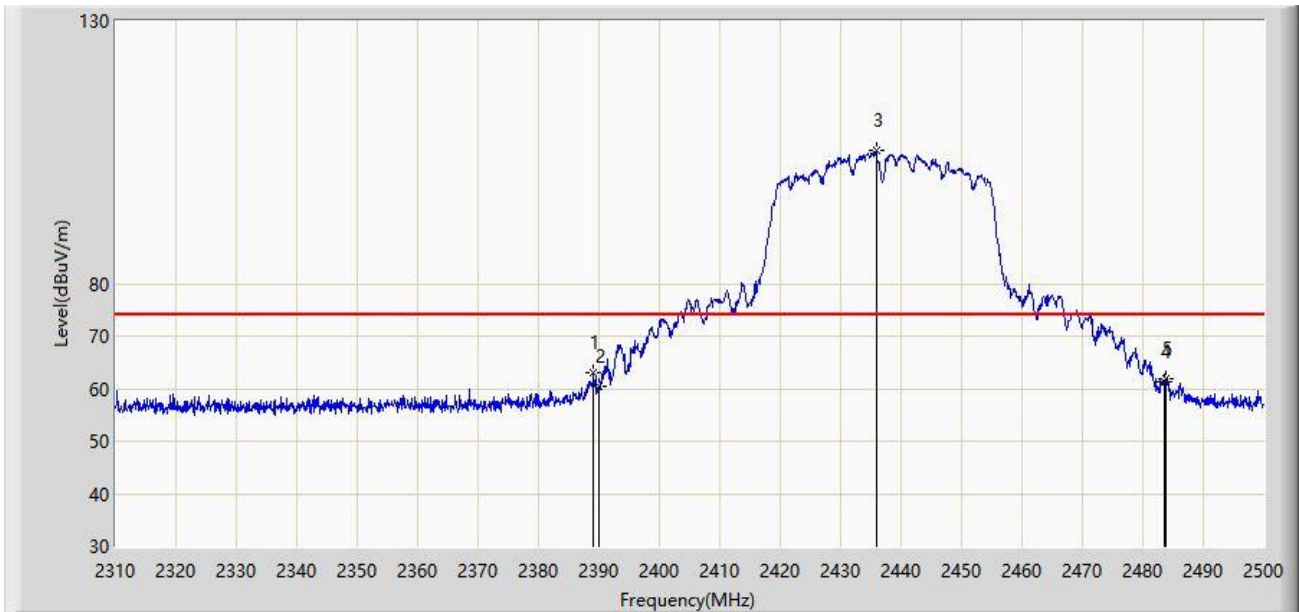


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	2389.040	62.914	32.389	-11.086	74.000	30.525	PK
2		2390.000	60.313	29.787	-13.687	74.000	30.526	PK
3		2435.875	105.237	74.691	N/A	N/A	30.546	PK
4		2483.500	61.387	30.684	-12.613	74.000	30.704	PK
5		2483.755	61.976	31.272	-12.024	74.000	30.703	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Time: 2022/05/23 - 20:20
Limit: FCC_2.4G_RE(3m)	Engineer: Charles Zhang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: Wi-Fi DSL Modem Gateway	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at 2437MHz	

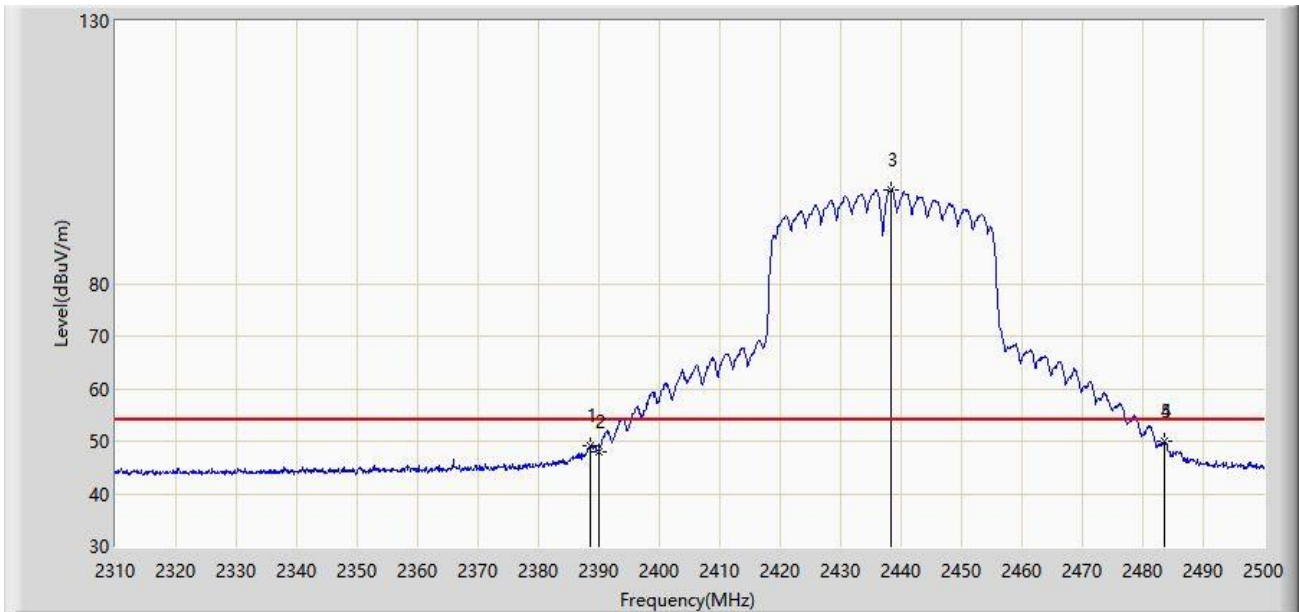

No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		2388.660	49.172	18.648	-4.828	54.000	30.524	AV
2		2390.000	47.949	17.423	-6.051	54.000	30.526	AV
3		2438.345	97.917	67.371	N/A	N/A	30.545	AV
4		2483.500	49.860	19.157	-4.140	54.000	30.704	AV
5	*	2483.660	49.997	19.293	-4.003	54.000	30.704	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Time: 2022/05/27 - 01:19
Limit: FCC_2.4G_RE(3m)	Engineer: Charles Zhang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: Wi-Fi DSL Modem Gateway	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at 2442MHz	




No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		2443.840	107.126	76.562	N/A	N/A	30.564	PK
2		2483.500	65.333	34.630	-8.667	74.000	30.704	PK
3	*	2485.141	66.563	35.859	-7.437	74.000	30.704	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Time: 2022/05/27 - 01:17
Limit: FCC_2.4G_RE(3m)	Engineer: Charles Zhang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: Wi-Fi DSL Modem Gateway	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at 2442MHz	

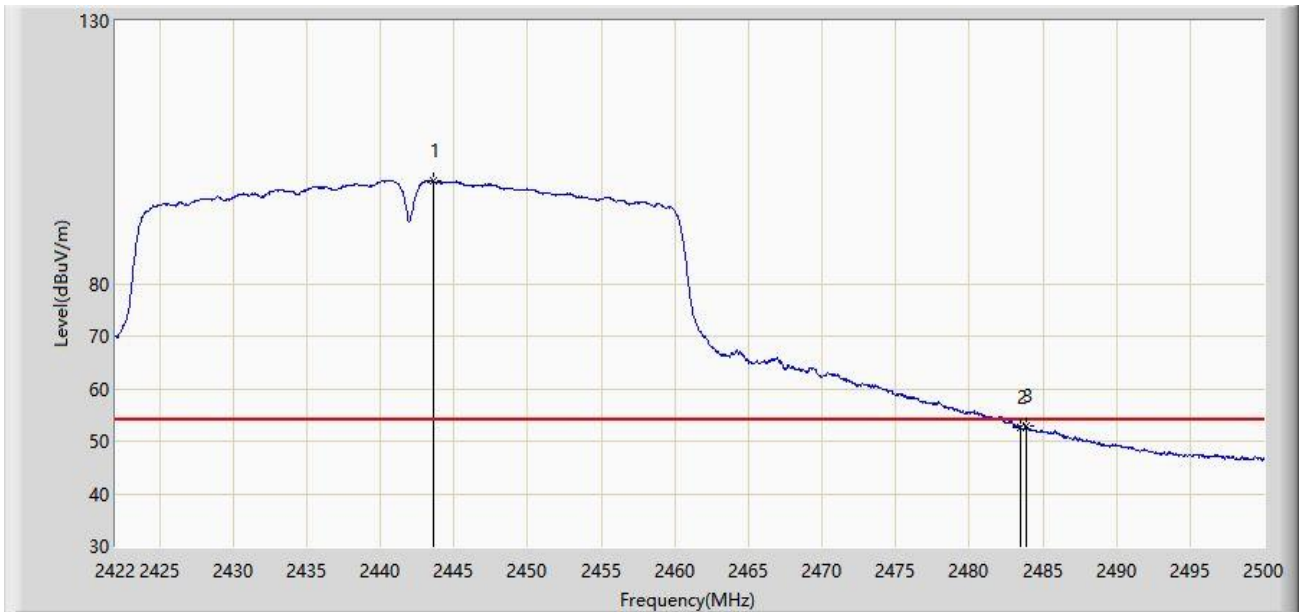


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		2443.567	99.500	68.937	N/A	N/A	30.563	AV
2		2483.500	52.591	21.888	-1.409	54.000	30.704	AV
3	*	2483.854	52.788	22.084	-1.212	54.000	30.703	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Time: 2022/05/27 - 01:10
Limit: FCC_2.4G_RE(3m)	Engineer: Charles Zhang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: Wi-Fi DSL Modem Gateway	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at 2447MHz	

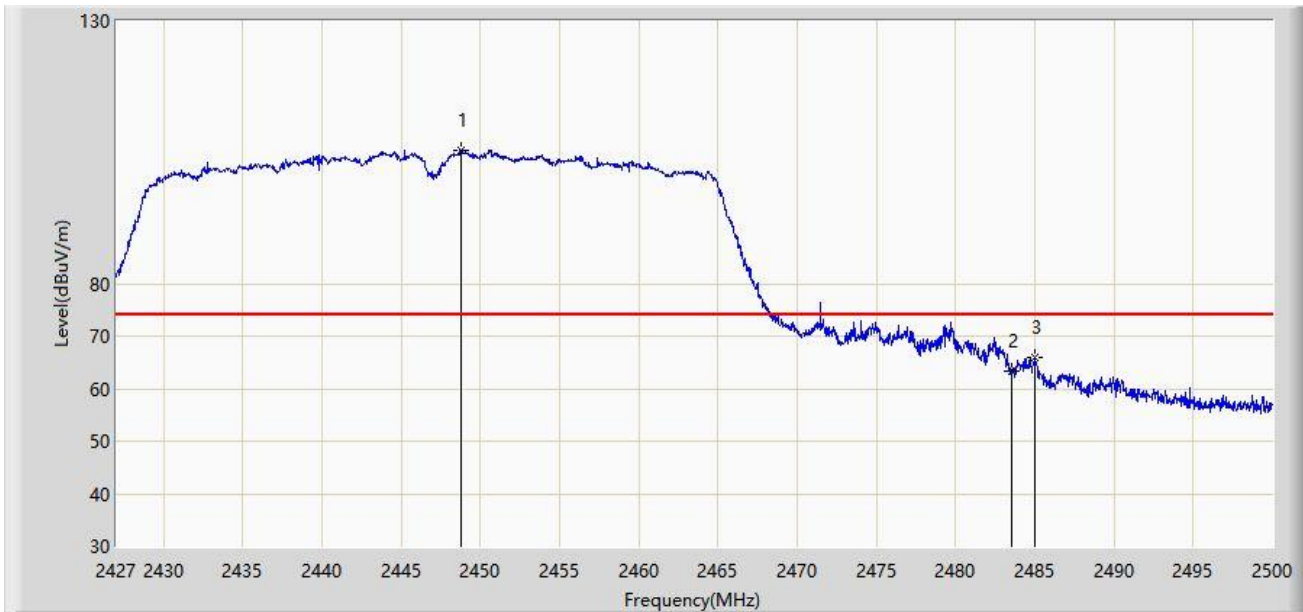


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		2448.754	105.365	74.784	N/A	N/A	30.581	PK
2		2483.500	63.445	32.742	-10.555	74.000	30.704	PK
3	*	2484.962	66.019	35.315	-7.981	74.000	30.704	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Time: 2022/05/27 - 01:08
Limit: FCC_2.4G_RE(3m)	Engineer: Charles Zhang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: Wi-Fi DSL Modem Gateway	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at 2447MHz	

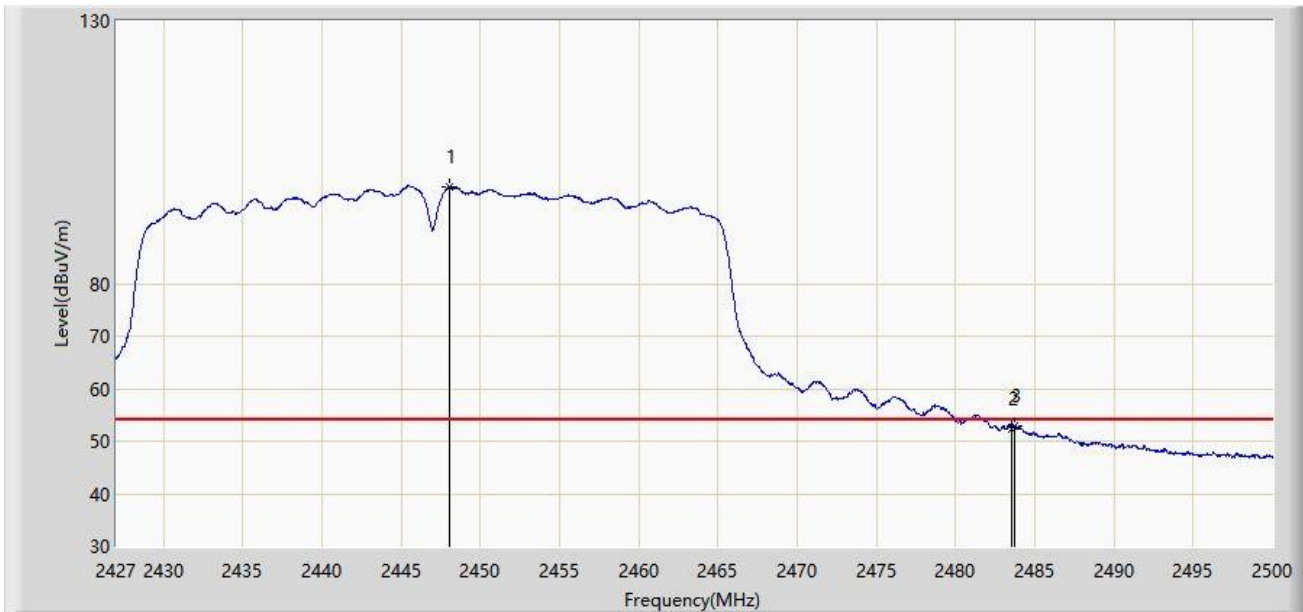


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		2448.024	98.497	67.918	N/A	N/A	30.578	AV
2		2483.500	52.405	21.702	-1.595	54.000	30.704	AV
3	*	2483.758	52.773	22.069	-1.227	54.000	30.703	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Time: 2022/05/20 - 20:56
Limit: FCC_2.4G_RE(3m)	Engineer: Charles Zhang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: Wi-Fi DSL Modem Gateway	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at 2452MHz	

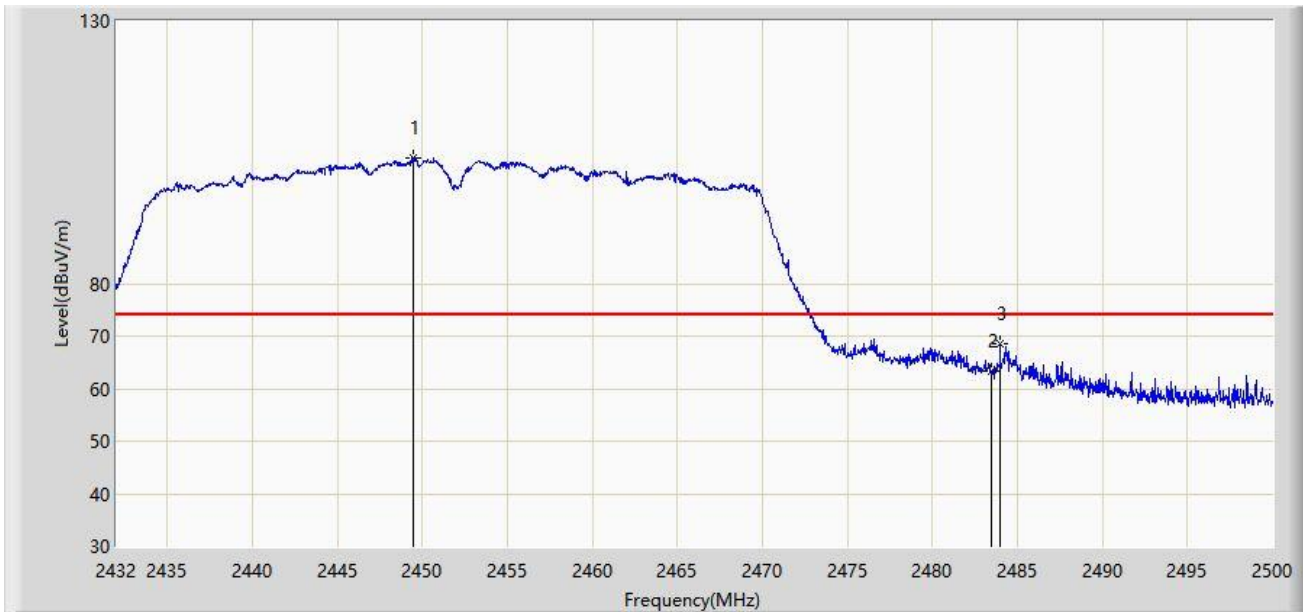


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		2449.510	103.778	73.194	N/A	N/A	30.584	PK
2		2483.500	63.201	32.498	-10.799	74.000	30.704	PK
3	*	2483.986	68.668	37.964	-5.332	74.000	30.704	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Time: 2022/05/20 - 20:53
Limit: FCC_2.4G_RE(3m)	Engineer: Charles Zhang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: Wi-Fi DSL Modem Gateway	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at 2452MHz	

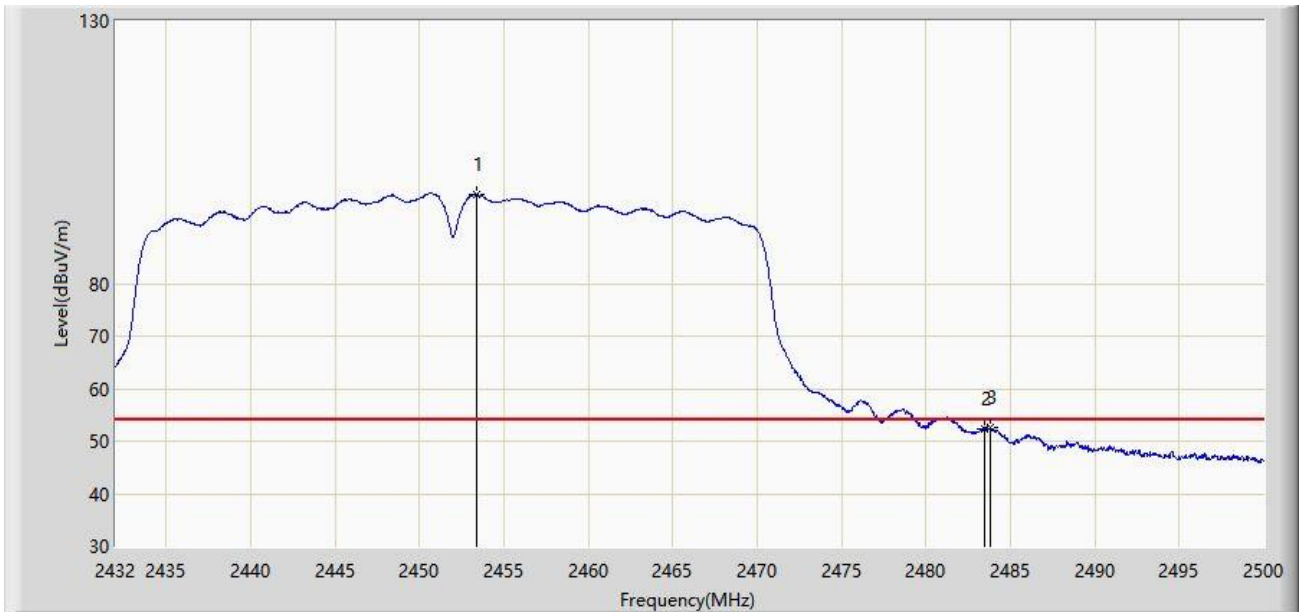


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		2453.420	97.057	66.459	N/A	N/A	30.598	AV
2		2483.500	52.358	21.655	-1.642	54.000	30.704	AV
3	*	2483.782	52.532	21.828	-1.468	54.000	30.703	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Time: 2022/05/20 - 20:59
Limit: FCC_2.4G_RE(3m)	Engineer: Charles Zhang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: Wi-Fi DSL Modem Gateway	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at 2452MHz	

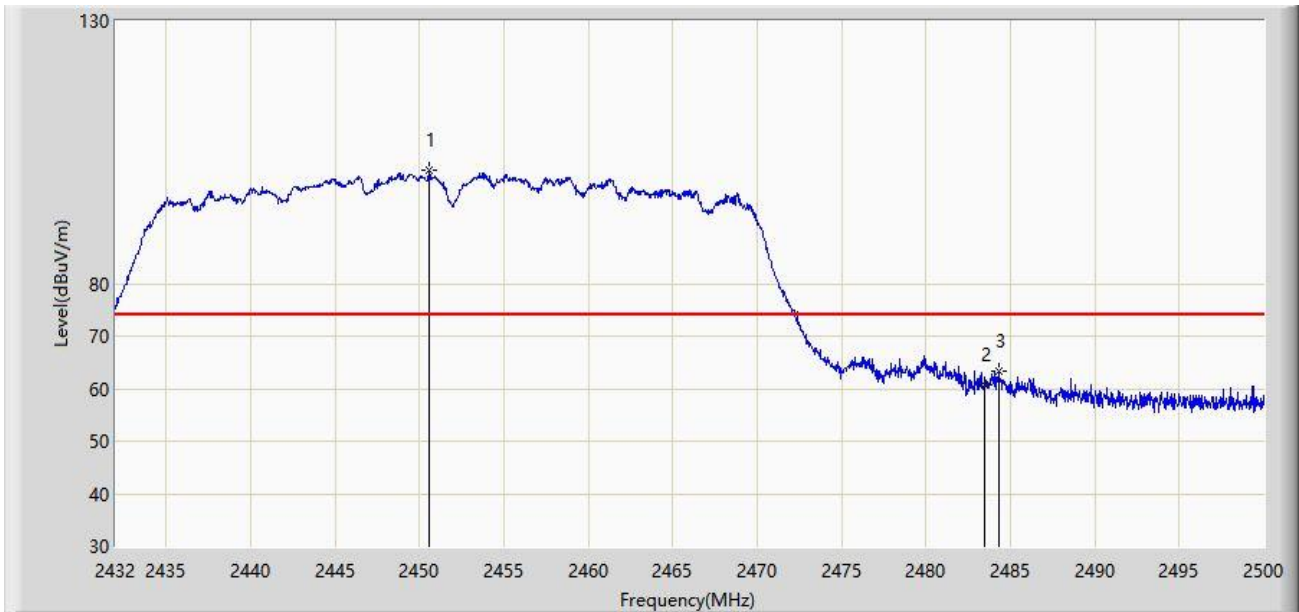


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		2450.564	101.594	71.006	N/A	N/A	30.588	PK
2		2483.500	60.709	30.006	-13.291	74.000	30.704	PK
3	*	2484.326	63.221	32.517	-10.779	74.000	30.704	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Time: 2022/05/20 - 21:01
Limit: FCC_2.4G_RE(3m)	Engineer: Charles Zhang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: Wi-Fi DSL Modem Gateway	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at 2452MHz	

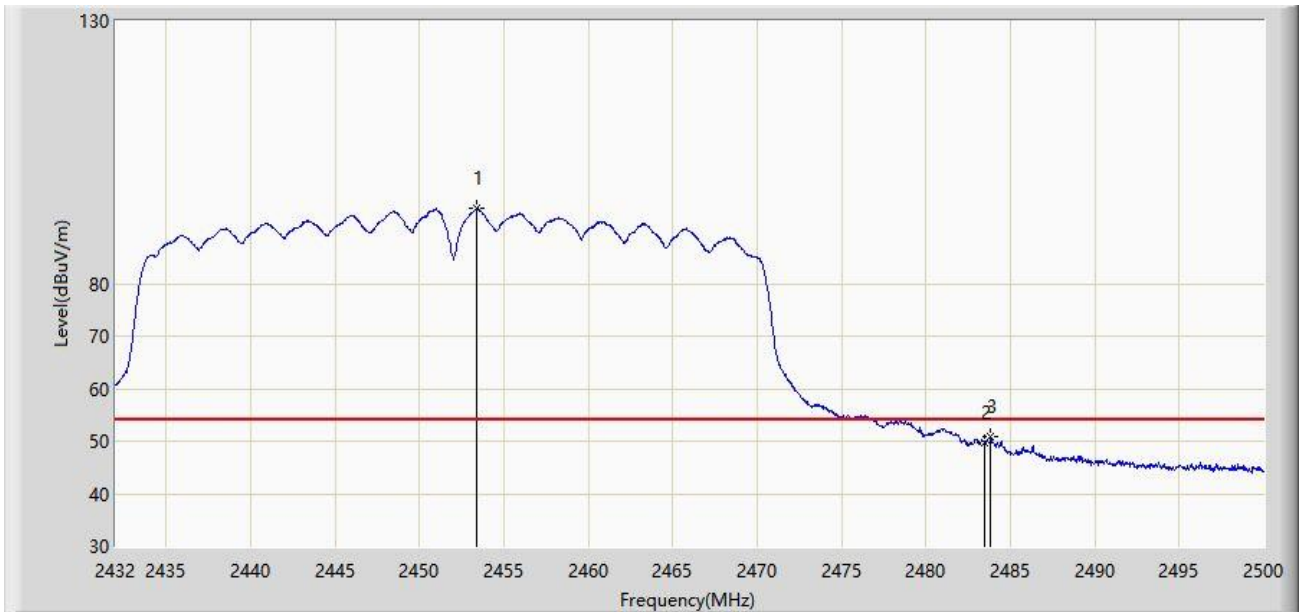

No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		2453.420	94.317	63.719	N/A	N/A	30.598	AV
2		2483.500	49.700	18.997	-4.300	54.000	30.704	AV
3	*	2483.850	50.777	20.073	-3.223	54.000	30.703	AV


Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

A.8 AC Conducted Emissions Test Result

Site: WZ-SR2	Test Date: 2022/05/25
Limit: FCC_Part15.207_CE_AC Power	Engineer: Alin Zhou
Probe: ENV216_101683_Filter Off_E	Polarity: Line
EUT: Wi-Fi DSL Modem Gateway	Power: 120V/60Hz
Test Mode: Transmit by 802.11b at channel 2462MHz	

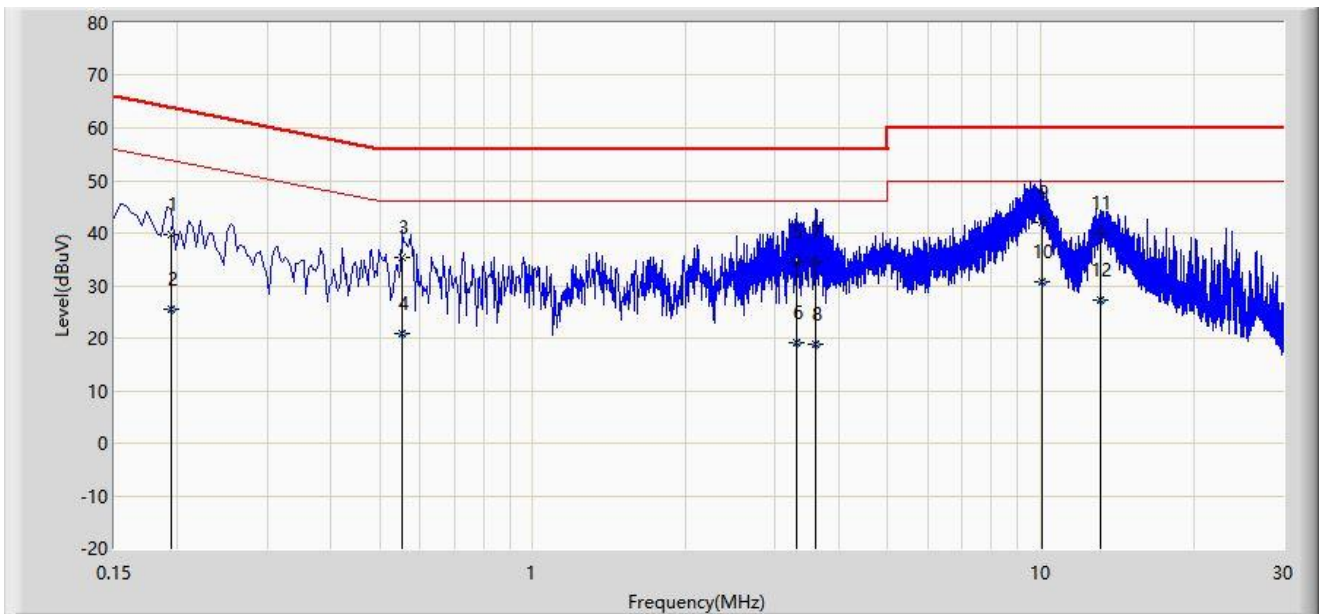


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV)	Factor (dB)	Type
1			0.194	39.841	29.941	-24.022	63.864	9.900	QP
2			0.194	25.499	15.599	-28.364	53.864	9.900	AV
3			0.554	35.447	25.525	-20.553	56.000	9.922	QP
4			0.554	20.989	11.066	-25.011	46.000	9.922	AV
5			3.306	34.511	24.302	-21.489	56.000	10.210	QP
6			3.306	19.173	8.963	-26.827	46.000	10.210	AV
7			3.610	34.545	24.279	-21.455	56.000	10.265	QP
8			3.610	18.799	8.534	-27.201	46.000	10.265	AV
9		*	10.061	41.895	31.052	-18.105	60.000	10.842	QP
10			10.061	30.772	19.930	-19.228	50.000	10.842	AV
11			13.078	40.045	29.106	-19.955	60.000	10.939	QP
12			13.078	27.106	16.167	-22.894	50.000	10.939	AV

Note: Measure Level (dBμV) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + LISN Factor (dB)

Site: WZ-SR2	Test Date: 2022/05/25
Limit: FCC_Part15.207_CE_AC Power	Engineer: Alin Zhou
Probe: ENV216_101683_Filter Off_E	Polarity: Neutral
EUT: Wi-Fi DSL Modem Gateway	Power: 120V/60Hz
Test Mode: Transmit by 802.11b at channel 2462MHz	

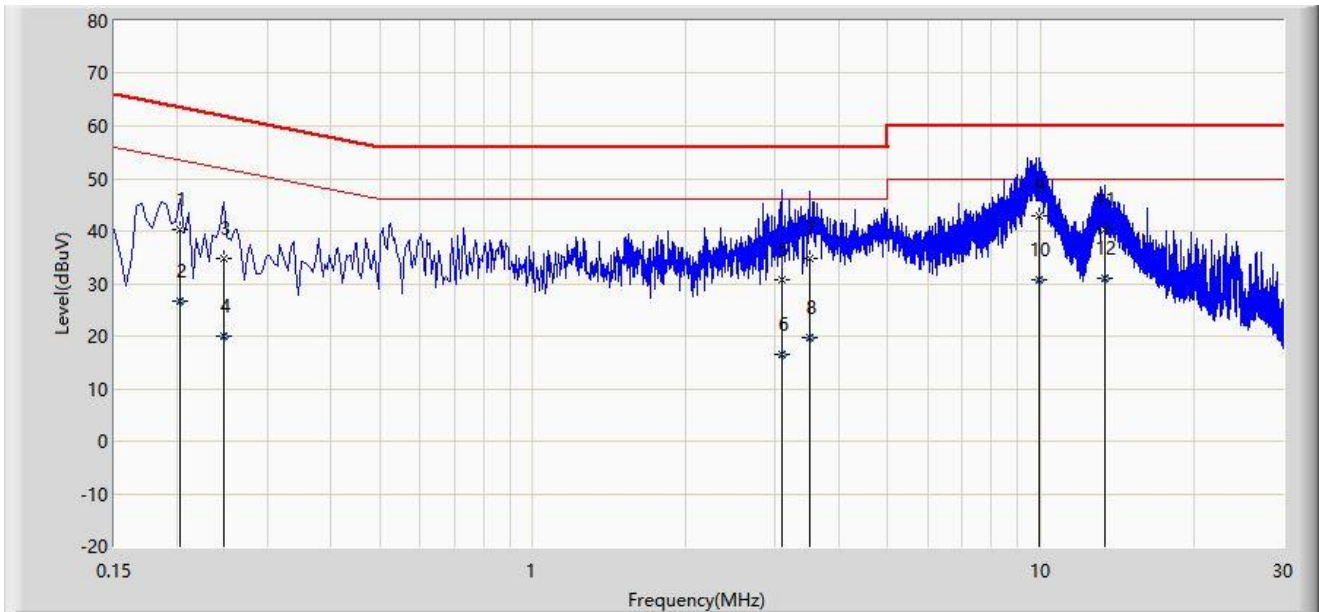

No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV)	Factor (dB)	Type
1			0.202	40.285	30.373	-23.243	63.528	9.911	QP
2			0.202	26.620	16.709	-26.908	53.528	9.911	AV
3			0.246	34.726	24.814	-27.165	61.891	9.913	QP
4			0.246	20.113	10.200	-31.778	51.891	9.913	AV
5			3.090	30.727	20.541	-25.273	56.000	10.187	QP
6			3.090	16.560	6.374	-29.440	46.000	10.187	AV
7			3.506	34.811	24.550	-21.189	56.000	10.262	QP
8			3.506	19.816	9.554	-26.184	46.000	10.262	AV
9		*	9.922	42.916	32.072	-17.084	60.000	10.845	QP
10			9.922	30.692	19.847	-19.308	50.000	10.845	AV
11			13.358	40.182	29.225	-19.818	60.000	10.957	QP
12			13.358	31.020	20.063	-18.980	50.000	10.957	AV

Note: Measure Level (dBμV) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + LISN Factor (dB)

Appendix B – Test Setup Photograph

Refer to “2205RSU024-UT” file.

Appendix C – EUT Photograph

Refer to “2205RSU024-UE” file.

————— The End —————