

Company: Actiontec Electronics Inc.

Test of: M6240V

To: FCC CFR 47 Part 15 Subpart C 15.247 (DTS)

Report No.: ATEC06-U5b Rev A

RADIATED TEST REPORT



RADIATED TEST REPORT



Test of: Actiontec Electronics Inc. M6240V
to

To: FCC CFR 47 Part 15 Subpart C 15.247 (DTS)

Test Report Serial No.: ATEC06-U5b Rev A

Note: this report is one of a set of two reports that together address the requirements for FCC 15.247

| Report Number | Test Report Type |
|---------------|-----------------------|
| ATEC06-U5a | Conducted Test Report |
| ATEC06-U5b | Radiated Test Report |

This report supersedes: NONE

Applicant: Actiontec Electronics Inc.
760 N Mary Avenue
Sunnyvale, 94085
USA

Product Function: Gigabit Wireless Router

Issue Date: 28th July 2015

This Test Report is Issued Under the Authority of:

MiCOM Labs, Inc.
575 Boulder Court
Pleasanton California 94566
USA
Phone: +1 (925) 462-0304
Fax: +1 (925) 462-0306
www.micomlabs.com



MiCOM Labs is an ISO 17025 Accredited Testing Laboratory



Title: Actiontec Electronics Inc. M6240V
To: FCC CFR 47 Part 15 Subpart C 15.247 (DTS)
Serial #: ATEC06-U5b Rev A
Issue Date: 28th July 2015
Page: 3 of 50

Table of Contents

| | |
|---|-----------|
| 1. ACCREDITATION, LISTINGS & RECOGNITION..... | 4 |
| 1.1. TESTING ACCREDITATION..... | 4 |
| 1.2. RECOGNITION | 5 |
| 1.3. PRODUCT CERTIFICATION | 6 |
| 2. DOCUMENT HISTORY | 7 |
| 3. TEST RESULT CERTIFICATE..... | 8 |
| 4. REFERENCES AND MEASUREMENT UNCERTAINTY | 9 |
| 4.1. Normative References | 9 |
| 4.2. Test and Uncertainty Procedure | 10 |
| 5. PRODUCT DETAILS AND TEST CONFIGURATIONS..... | 11 |
| 5.1. Technical Details | 11 |
| 5.2. Scope Of Test Program | 12 |
| 5.3. Equipment Model(s) and Serial Number(s) | 14 |
| 5.4. Antenna Details | 14 |
| 5.5. Cabling and I/O Ports | 14 |
| 5.6. Test Configurations..... | 15 |
| 5.7. Equipment Modifications | 16 |
| 5.8. Deviations from the Test Standard | 16 |
| 6. TEST SUMMARY | 17 |
| 7. TEST EQUIPMENT CONFIGURATION(S) | 18 |
| 8. MEASUREMENT AND PRESENTATION OF TEST DATA | 21 |
| 9. TEST RESULTS | 22 |
| 9.1. Emissions | 22 |
| 9.1.1. <i>Radiated Emissions</i> | 22 |
| 9.1.1.1. Restricted Band Emissions | 22 |
| 9.1.1.2. Restricted Band-Edge Emissions..... | 28 |
| 9.1.2. <i>Digital Emissions (0.03 - 1 GHz)</i> | 36 |
| A. APPENDIX - GRAPHICAL IMAGES | 38 |
| A.1. Emissions | 39 |
| A.1.1. <i>Radiated Emissions</i> | 39 |
| A.1.2. <i>Restricted Band-Edge Emissions</i> | 42 |

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

1. ACCREDITATION, LISTINGS & RECOGNITION

1.1. TESTING ACCREDITATION

MiCOM Labs, Inc. is an accredited Electrical testing laboratory per the international standard ISO/IEC 17025:2005. The company is accredited by the American Association for Laboratory Accreditation (A2LA) www.a2la.org test laboratory number 2381.01. MiCOM Labs test schedule is available at the following URL; <http://www.a2la.org/scopepdf/2381-01.pdf>





1.2. RECOGNITION

MiCOM Labs, Inc has widely recognized wireless testing capabilities. Our international recognition includes Conformity Assessment Body designation by APEC MRA countries. MiCOM Labs test reports are accepted globally.

| Country | Recognition Body | Status | Phase | Identification No. |
|-----------|--|--------|------------|---|
| USA | Federal Communications Commission (FCC) | TCB | - | US0159 Listing #: 102167 |
| Canada | Industry Canada (IC) | FCB | APEC MRA 2 | US0159 Listing #: 4143A-2 4143A-3 |
| Japan | MIC (Ministry of Internal Affairs and Communication) | CAB | APEC MRA 2 | RCB 210 |
| | VCCI | -- | -- | A-0012 |
| Europe | European Commission | NB | EU MRA | NB 2280 |
| Australia | Australian Communications and Media Authority (ACMA) | CAB | APEC MRA 1 | US0159 |
| Hong Kong | Office of the Telecommunication Authority (OFTA) | CAB | APEC MRA 1 | |
| Korea | Ministry of Information and Communication Radio Research Laboratory (RRL) | CAB | APEC MRA 1 | |
| Singapore | Infocomm Development Authority (IDA) | CAB | APEC MRA 1 | |
| Taiwan | National Communications Commission (NCC) Bureau of Standards, Metrology and Inspection (BSMI) | CAB | APEC MRA 1 | |
| Vietnam | Ministry of Communication (MIC) | CAB | APEC MRA 1 | |

EU MRA – European Union Mutual Recognition Agreement.

NB – Notified Body

APEC MRA – Asia Pacific Economic Community Mutual Recognition Agreement. Recognition agreement under which test lab is accredited to regulatory standards of the APEC member countries.

Phase I - recognition for product testing

Phase II – recognition for both product testing and certification

1.3. PRODUCT CERTIFICATION

MiCOM Labs, Inc. is an accredited Product Certification Body per the international standard ISO/IEC 17065:2012. The company is accredited by the American Association for Laboratory Accreditation (A2LA) www.a2la.org test laboratory number 2381.02. MiCOM Labs test schedule is available at the following URL; <http://www.a2la.org/scopepdf/2381-02.pdf>



United States of America – Telecommunication Certification Body (TCB)

Industry Canada – Certification Body, CAB Identifier – US0159

Europe – Notified Body (NB), NB Identifier - 2280

Japan – Recognized Certification Body (RCB), RCB Identifier - 210



Title: Actiontec Electronics Inc. M6240V
To: FCC CFR 47 Part 15 Subpart C 15.247 (DTS)
Serial #: ATEC06-U5b Rev A
Issue Date: 28th July 2015
Page: 7 of 50

2. DOCUMENT HISTORY

| Document History | | |
|------------------|----------------------------|------------------|
| Revision | Date | Comments |
| Draft | | |
| Rev A | 28 th July 2015 | Initial release. |
| . | | |
| . | | |
| . | | |
| . | | |
| . | | |

In the above table the latest report revision will replace all earlier versions.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Actiontec Electronics Inc. M6240V
To: FCC CFR 47 Part 15 Subpart C 15.247 (DTS)
Serial #: ATEC06-U5b Rev A
Issue Date: 28th July 2015
Page: 8 of 50

3. TEST RESULT CERTIFICATE

| | |
|--|---|
| Manufacturer: Actiontec Electronics Inc. 760 N Mary Avenue Sunnyvale 94085 USA | Tested By: MiCOM Labs, Inc. 575 Boulder Court Pleasanton California 94566 USA |
| Model: M6240V | Telephone: +1 925 462 0304 Fax: +1 925 462 0306 |
| Type Of Equipment: Gigabit Wireless Router | |
| S/N's: SB32522060009 | |
| Test Date(s): 19 - 19 June 2015 | Website: www.micomlabs.com |

| STANDARD(S) | TEST RESULTS |
|--|--------------------|
| FCC CFR 47 Part 15 Subpart C 15.247 (DTS) Radiated RF Emission Requirements | EQUIPMENT COMPLIES |


MiCOM Labs, Inc. tested the equipment mentioned in accordance with the requirements set forth in the above standards. Test results indicate that the equipment tested is capable of demonstrating compliance with the requirements as documented within this report.

Notes:


1. This document reports conditions under which testing was conducted and the results of testing performed.
2. Details of test methods used have been recorded and kept on file by the laboratory.
3. Test results apply only to the item(s) tested.

Approved & Released for MiCOM Labs, Inc. by:



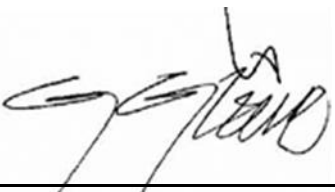

Graeme Grieve
Quality Manager MiCOM Labs, Inc.

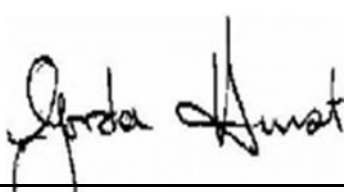

Gordon Hurst
President & CEO MiCOM Labs, Inc.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

4. REFERENCES AND MEASUREMENT UNCERTAINTY

4.1. Normative References

| REF. | PUBLICATION | YEAR | TITLE |
|------|------------------------|---------------------|---|
| I | KDB 662911 | Oct 31 2013 | Guidance for measurement of output emission of devices that employ single transmitter with multiple outputs or systems with multiple transmitters operating simultaneously in the same frequency band |
| II | KDB 558074 D01 V03r03 | June 9,2015 | DTS Meas Guidance v03r02 Guidance for performing compliance measurements on Digital Transmission Systems (DTS) operating under section 15.247. |
| III | A2LA | June 2015 | Reference to A2LA Accreditation Status – A2LA Advertising Policy |
| IV | ANSI C63.10 | 2013 | American National Standard for Testing Unlicensed Wireless Devices |
| V | ANSI C63.4 | 2014 | American National Standards for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz |
| VI | CISPR 22 | 2008 | Information technology equipment - Radio disturbance characteristics - Limits and methods of measurement |
| VII | ETSI TR 100 028 | 2001-12 | Parts 1 and 2 Electromagnetic compatibility and Radio Spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics |
| VIII | FCC 47 CFR Part 15.247 | 2014 | Radio Frequency Devices; Subpart C – Intentional Radiators |
| IX | ICES-003 | Issue 5 2012 | Spectrum Management and Telecommunications; Interference-Causing Equipment Standard. Information Technology Equipment (ITE) – Limits and methods of measurement. |
| X | M 3003 | Edition 3 Nov. 2012 | Expression of Uncertainty and Confidence in Measurements |
| XI | KDB 644545 D03 v01 | August 14th 2014 | Guidance for IEEE 802.11ac New Rules v01 |
| XII | FCC 47 CFR Part 2.1033 | 2014 | FCC requirements and rules regarding photographs and test setup diagrams. |



Title: Actiontec Electronics Inc. M6240V
To: FCC CFR 47 Part 15 Subpart C 15.247 (DTS)
Serial #: ATEC06-U5b Rev A
Issue Date: 28th July 2015
Page: 10 of 50

4.2. Test and Uncertainty Procedure

Conducted and radiated emission measurements were conducted in accordance with American National Standards Institute ANSI C63.4, listed in the Normative References section of this report.

Measurement uncertainty figures are calculated in accordance with ETSI TR 100 028 Parts 1 and 2.

Measurement uncertainties stated are based on a standard uncertainty multiplied by a coverage factor $k = 2$, providing a level of confidence of approximately 95 % in accordance with UKAS document M 3003 listed in the Normative References section of this report.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Actiontec Electronics Inc. M6240V
To: FCC CFR 47 Part 15 Subpart C 15.247 (DTS)
Serial #: ATEC06-U5b Rev A
Issue Date: 28th July 2015
Page: 11 of 50

5. PRODUCT DETAILS AND TEST CONFIGURATIONS

5.1. Technical Details

| Details | Description |
|--------------------------------------|--|
| Purpose: | Test of the Actiontec Electronics Inc. M6240V to FCC CFR 47 Part 15 Subpart C 15.247 (DTS). Radio Frequency Devices; Subpart C – Intentional Radiators |
| Applicant: | Actiontec Electronics Inc. 760 N Mary Avenue Sunnyvale 94085 USA |
| Manufacturer: | As Applicant |
| Laboratory performing the tests: | MiCOM Labs, Inc. 575 Boulder Court Pleasanton California 94566 USA |
| Test report reference number: | ATEC06-U5b Rev A |
| Date EUT received: | 15 th June 2015 |
| Standard(s) applied: | FCC CFR 47 Part 15 Subpart C 15.247 (DTS) |
| Dates of test (from - to): | 19th June 2015 |
| No of Units Tested: | 2 |
| Type of Equipment: | Gigabit Wireless Router |
| Product Family Name: | GbE 11ac Fiber Gateway |
| Model(s): | M6240V (Device tested) M6240 M6240L |
| Location for use: | Indoor |
| Declared Frequency Range(s): | 2400 - 2483.5 MHz; |
| Primary function of equipment: | Gigabit Wireless Router |
| Secondary function of equipment: | Residential Gateway |
| Type of Modulation: | OFDM |
| EUT Modes of Operation: | 2400 - 2483.5 MHz: 802.11b; 802.11g; 802.11n HT-20; 802.11n HT-40; |
| Declared Nominal Output Power (Ave): | 2400 - 2483.5 MHz: 802.11b: -; 802.11g: -; 802.11n HT-20: -; 802.11n HT-40: |
| Transmit/Receive Operation: | Transceiver - Half Duplex |
| Rated Input Voltage and Current: | AC/ DC adaptor (adaptor sold with unit) 12 V DC/3.5A |
| Operating Temperature Range: | Declared Range 0°C to 40°C |
| ITU Emission Designator: | 802.11b 12M1G1D 802.11g 16M5D1D 802.11n HT-20 17M7D1D 802.11n HT-40 36M4D1D |
| Equipment Dimensions: | 11.0 x 1.5 x 7 inches |
| Weight: | 1.6 lbs |
| Hardware Rev: | AM3 |
| Software Rev: | 62.0.10 |

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Actiontec Electronics Inc. M6240V
To: FCC CFR 47 Part 15 Subpart C 15.247 (DTS)
Serial #: ATEC06-U5b Rev A
Issue Date: 28th July 2015
Page: 12 of 50

5.2. Scope Of Test Program

Actiontec Electronics Inc. M6240V

The scope of the test program was to test the Actiontec Electronics Inc. M6240V configurations in the frequency ranges 2400 - 2483.5 MHz; for compliance against the following specification:

FCC CFR 47 Part 15 Subpart C 15.247 (DTS)

Radio Frequency Devices; Subpart C – Intentional Radiators

Manufacturers Declaration of Similarity

Re: FCC ID: LNQM6240V

Actiontec Models: M6240V, M6240, M6240L

To whom it may concern:

We, Actiontec Electronics, Inc., hereby declare the above mentioned 3 models have electrically identical Wireless circuitry with the same electromagnetic emissions and electromagnetic compatibility characteristics.

The differences among these 3 models are as follows –

M6240V – GbE 11ac Fiber Gateway with MoCA LAN/WAN and VoIP

M6240 – GbE 11ac Fiber Gateway with MoCA LAN, without MoCA WAN/VoIP

M6240L – GbE 11ac Fiber Gateway with MoCA LAN/VoIP, without MoCA WAN

Actiontec Electronics Inc. M6240V

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Actiontec Electronics Inc. M6240V
To: FCC CFR 47 Part 15 Subpart C 15.247 (DTS)
Serial #: ATEC06-U5b Rev A
Issue Date: 28th July 2015
Page: 14 of 50

5.3. Equipment Model(s) and Serial Number(s)

| Type (EUT/Support) | Equipment Description (Including Brand Name) | Mfr | Model No. | Serial No. |
|--------------------|---|-----------|----------------|------------|
| EUT | Wireless Router | Actiontec | M6240V | 5190700005 |
| EUT | Power Adapter 100 - 240Vac 50/60Hz 1.0A 12 Vdc 3.5 A | Actiontec | NBS40C120350VU | 1512 |
| Support | Laptop PC | IBM | Thinkpad | None |

5.4. Antenna Details

| Type | Manufacturer | Model | Family | Gain (dBi) | BF Gain | Dir BW | X-Pol | Frequency Band (MHz) |
|----------|--------------|------------|--------|------------|---------|--------|-------|----------------------|
| integral | Galtronics | Custom PCB | Dipole | 3.0 | 2.0 | 360 | - | 5725 - 5850 |
| integral | Galtronics | Custom PCB | Dipole | 4.0 | - | 360 | - | 2400 - 2483.5 |

BF Gain - Beamforming Gain
Dir BW - Directional BeamWidth
X-Pol - Cross Polarization

5.5. Cabling and I/O Ports

| Port Type | Max Cable Length | # Of Ports | Screened | Conn Type | Data Type |
|-----------|------------------|------------|----------|-----------|-------------|
| Ethernet | 100m | 4 | N | RJ45 | Packet Data |
| Ethernet | 100m | 1 | N | RJ45 | Packet Data |
| USB | 15m | 2 | N | USB 3.0 | Digital |
| Optical | SFP | 1 | N | | Digital |

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



5.6. Test Configurations

Results for the following configurations are provided in this report:

| Operational Mode(s) (802.11a/b/g/n/ac) | Data Rate with Highest Power MBit/s | Channel Frequency (MHz) | | |
|---|--|-------------------------|----------|----------|
| | | Low | Mid | High |
| 2400 - 2483.5 MHz | | | | |
| 802.11b | 1 | 2,412.00 | 2,437.00 | 2,462.00 |
| 802.11g | 6 | 2,412.00 | -- | 2,462.00 |
| 802.11n HT-20 | 6.5 | 2,412.00 | -- | 2,462.00 |
| 802.11n HT-40 | 13.5 | 2,422.00 | -- | 2,452.00 |

Antenna Test Configurations for Radiated Emissions

Results for the following configurations are provided in this report.

Radiated emissions testing was performed for all possible configurations on the integral antenna, the table below identifies all radiated testing completed on the device.

| 15.247 | |
|-----------------------------|-----------|
| 802.11b,g, 802.11n HT-20 | SE 2412 |
| | SE 2437 |
| | SE 2462 |
| | BE 2390 |
| | BE 2483.5 |
| | |
| 802.11n HT-40 | SE 2422 |
| | SE 2437 |
| | SE 2452 |
| | BE 2390 |
| | BE 2483.5 |

KEY:-

SE – Spurious Emission BE
– Band-Edge



Title: Actiontec Electronics Inc. M6240V
To: FCC CFR 47 Part 15 Subpart C 15.247 (DTS)
Serial #: ATEC06-U5b Rev A
Issue Date: 28th July 2015
Page: 16 of 50

5.7. Equipment Modifications

The following modifications were required to bring the equipment into compliance:

1. NONE

5.8. Deviations from the Test Standard

The following deviations from the test standard were required in order to complete the test program:

1. NONE



Title: Actiontec Electronics Inc. M6240V
To: FCC CFR 47 Part 15 Subpart C 15.247 (DTS)
Serial #: ATEC06-U5b Rev A
Issue Date: 28th July 2015
Page: 17 of 50

6. TEST SUMMARY


List of Measurements

| Test Header | Result | Data Link |
|---|----------|---------------------------|
| 15.247(d) Emissions | - | - |
| (2) Radiated Emissions | - | - |
| (i) 15.205 Restricted Band Emissions | Complies | View Data |
| (ii) 15.205 Restricted Band-Edge Emissions | Complies | View Data |
| (3) 15.209 Digital Emissions (0.03 - 1 GHz) | Complies | - |

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

7. TEST EQUIPMENT CONFIGURATION(S)

Radiated Emissions testing was performed using the set-up shown in the diagram below.

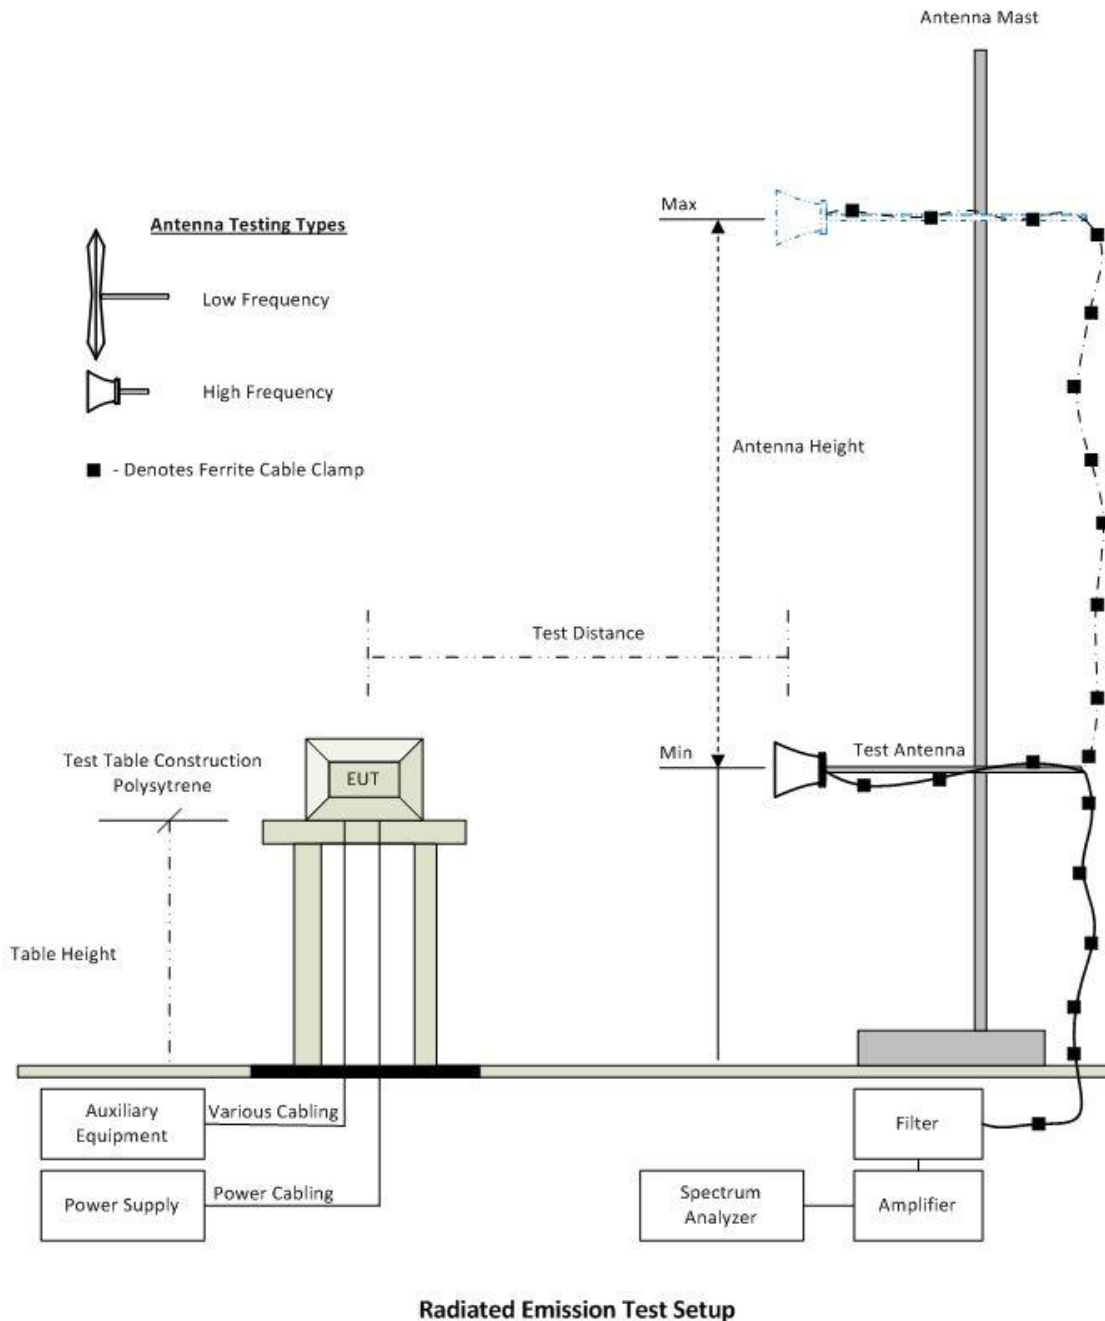

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Actiontec Electronics Inc. M6240V
To: FCC CFR 47 Part 15 Subpart C 15.247 (DTS)
Serial #: ATEC06-U5b Rev A
Issue Date: 28th July 2015
Page: 19 of 50

A full system calibration was performed on the test station and any resulting system losses (or gains) were taken into account in the production of all final measurement data.

| Asset# | Description | Manufacturer | Model# | Serial# | Calibration Due Date |
|--------|---|-----------------|-----------------------|------------|----------------------|
| 158 | Barometer/Thermometer | Control Company | 4196 | E2846 | 04 Dec 2015 |
| 170 | Video System Controller for Semi Anechoic Chamber | Panasonic | WV-CY101 | 04R08507 | Not Required |
| 193 | Receiver 20 Hz to 7 GHz | Rhode & Schwarz | ESI 7 | 838496/007 | 14 Jan 2016 |
| 287 | Rohde & Schwarz 40 GHz Receiver | Rhode & Schwarz | ESIB40 | 100201 | 31 Jul 2015 |
| 301 | 5470 to 5725 MHz Notch Filter | Microtronics | RBC50704 | 001 | 08 Oct 2015 |
| 302 | 5150 to 5350 MHz Notch Filter | Microtronics | BRC50703 | 002 | 08 Oct 2015 |
| 303 | 5725 to 5875 MHz Notch filter | Microtronics | BRC50705 | 003 | 08 Oct 2015 |
| 310 | SMA Cable | Micro-Coax | UFA210A-0-0787-3G03G0 | 209089-001 | 30 Oct 2015 |
| 330 | Variac 0-280 Vac | Staco Energy Co | 3PN1020B | 0546 | Cal when used |
| 338 | Sunol 30 to 3000 MHz Antenna | Sunol | JB3 | A052907 | 14 Aug 2015 |
| 341 | 900MHz Notch Filter | EWT | EWT-14-0199 | H1 | 08 Oct 2015 |
| 342 | 2.4 GHz Notch Filter | EWT | EWT-14-0203 | H1 | 08 Oct 2015 |
| 343 | 5.15 GHz Notch Filter | EWT | EWT-14-0200 | H1 | 08 Oct 2015 |
| 344 | 5.35 GHz Notch Filter | EWT | EWT-14-0201 | H1 | 08 Oct 2015 |
| 345 | 5.46 GHz Notch Filter | EWT | EWT-14-0202 | H1 | 08 Oct 2015 |
| 346 | 1.6 TO 10GHz High Pass Filter | EWT | EWT-57-0112 | H1 | 07 Oct 2015 |
| 377 | Band Rejection Filter 5150 to 5880MHz | Microtronics | BRM50716 | 034 | 08 Oct 2015 |
| 378 | Rohde & Schwarz 40 GHz Receiver with Generator | Rhode & Schwarz | ESIB40 | 100107/040 | 17 Jul 2015 |
| 393 | DC - 1050 MHz Low Pass Filter | Microcircuits | VLFX-1050 | N/A | 08 Oct 2015 |
| 396 | 2.4 GHz Notch Filter | Microtronics | BRM50701 | 001 | 07 Oct 2015 |
| 397 | Amp 10 - 2500MHz | MiCOM Labs | Amp 10 - 2500 MHz | NA | 23 Oct 2015 |
| 399 | ETS 1-18 GHz Horn Antenna | ETS | 3117 | 00154575 | 10 Oct 2015 |
| 406 | Amplifier for Radiated Emissions | MiCOM Labs | 40dB 1 to 18GHz Amp | 0406 | 28 May 2016 |
| 410 | Desktop Computer | Dell | Inspiron 620 | WS38 | Not Required |

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Actiontec Electronics Inc. M6240V
To: FCC CFR 47 Part 15 Subpart C 15.247 (DTS)
Serial #: ATEC06-U5b Rev A
Issue Date: 28th July 2015
Page: 20 of 50

| | | | | | |
|----------|---|----------------------|----------------------|--------------------|---------------|
| 411 | Mast/Turntable Controller | Sunol Sciences | SC98V | 060199-1D | Not Required |
| 412 | USB to GPIB Interface | National Instruments | GPIB-USB HS | 11B8DC2 | Not Required |
| 413 | Mast Controller | Sunol Science | TWR95-4 | 030801-3 | Not Required |
| 414 | DC Power Supply 0-60V | HP | 6274 | 1029A01285 | Cal when used |
| 415 | Turntable Controller | Sunol Sciences | Turntable Controller | None | Not Required |
| 416 | Gigabit ethernet filter | ETS-Lingren | Gigafoil 260366 | None | Not Required |
| 462 | Schwarzbeck cable from Antenna to Amplifier. | Schwarzbeck | AK 9513 | 462 | 25 Aug 2015 |
| 463 | Schwarzbeck cable from Amplifier to Bulkhead. | Schwarzbeck | AK 9513 | 463 | 25 Aug 2015 |
| 464 | Schwarzbeck cable from Bulkhead to Receiver | Schwarzbeck | AK 9513 | 464 | 25 Aug 2015 |
| 465 | Low Pass Filter DC-1000 MHz | Mini-Circuits | NLP-1200+ | VUU01901402 | 25 Aug 2015 |
| 466 | Low Pass Filter DC-1500 MHz | Mini-Circuits | NLP-1750+ | VUU10401438 | 25 Aug 2015 |
| 467 | 2495 to 2650 MHz notch filter | MicroTronics | BRM50709 | 011 | 05 Sep 2015 |
| 468 | Low pass filter | Mini Circuits | SLP-550 | None | 30 Sep 2015 |
| 469 | Low pass filter | Mini Circuit | SLP-1000 | None | 30 Sep 2015 |
| 470 | High Pass filter | Mini Circuits | SHP-700 | None | 30 Sep 2015 |
| 502 | Test Software for Radiated Emissions | EMISoft | Vasona | Version 5 Build 59 | Not Required |
| 87 | Uninterruptible Power Supply | Falcon Electric | ED2000-1/2LC | F3471 02/01 | Cal when used |
| CC05 | Confidence Check | MiCOM | CC05 | None | 01 Aug 2015 |
| VLF-1700 | Low pass filter DC-1700 MHz | Mini Circuits | VLF-1700 | None | 30 Sep 2015 |

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

8. MEASUREMENT AND PRESENTATION OF TEST DATA

The measurement and graphical data presented in this test report was generated automatically using state-of-the-art technology creating an easy to read report structure. Numerical measurement data is separated from supporting graphical data (plots) through hyperlinks. Numerical measurement data can be reviewed without scrolling through numerous graphical pages to arrive at the next data matrix.

Plots have been relegated into the Appendix 'Graphical Data'.

Test and report automation was performed by [MiTest](#). [MiTest](#) is an automated test system developed by MiCOM Labs. [MiTest](#) is the first cloud based modular test system enabling end-to-end automation of regulatory compliance testing for conducted RF testing.



The MiCOM Labs "[MiTest](#)" Automated Test System" (Patent Pending)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Actiontec Electronics Inc. M6240V
To: FCC CFR 47 Part 15 Subpart C 15.247 (DTS)
Serial #: ATEC06-U5b Rev A
Issue Date: 28th July 2015
Page: 22 of 50

9. TEST RESULTS

9.1. Emissions

9.1.1. Radiated Emissions

9.1.1.1. Restricted Band Emissions

| Radiated Test Conditions for Radiated Spurious and Band-Edge Emissions (Restricted Bands) | | | |
|---|---|---------------------|-------------|
| Standard: | FCC CFR 47:15.247 | Ambient Temp. (°C): | 20.0 - 24.5 |
| Test Heading: | Radiated Spurious and Band-Edge Emissions | Rel. Humidity (%): | 32 - 45 |
| Standard Section(s): | 15.205, 15.209 | Pressure (mBars): | 999 - 1001 |
| Reference Document(s): | See Normative References | | |

Test Procedure for Radiated Spurious and Band-Edge Emissions ([Restricted Bands](#))

Radiated emissions for restricted bands above 1 GHz are measured in the anechoic chamber at a 3-meter distance on every azimuth in both horizontal and vertical polarities. The emissions are recorded and maximized as a function of azimuth by rotation through 360° with a spectrum analyzer in peak hold mode. Depending on the frequency band spanned a notch filter and waveguide filter was used to remove the fundamental frequency. The highest emissions relative to the limit are listed for each frequency spanned. Measurements on any restricted band frequency or frequencies above 1 GHz are based on the use of measurement instrumentation employing peak and average detectors. All measurements were performed using a resolution bandwidth of 1 MHz.

Test configuration and setup for Radiated Spurious and Band-Edge Measurement were per the Radiated Test Set-up specified in this document.

Limits for [Restricted Bands](#)
Peak emission: 74 dBuV/m
Average emission: 54 dBuV/m

Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Loss, and subtracting Amplifier Gain from the measured reading. All factors are included in the reported data.

FS = R + AF + CORR - FO

where:

FS = Field Strength
R = Measured Spectrum analyzer Input Amplitude
AF = Antenna Factor
CORR = Correction Factor = CL – AG + NFL
CL = Cable Loss
AG = Amplifier Gain
FO = Distance Falloff Factor
NFL = Notch Filter Loss or Waveguide Loss

Example:

Given receiver input reading of 51.5 dBmV; Antenna Factor of 8.5 dB; Cable Loss of 1.3 dB; Falloff Factor of 0 dB, an Amplifier Gain of 26 dB and Notch Filter Loss of 1 dB. The Field Strength (FS) of the measured emission is:

FS = 51.5 + 8.5 + 1.3 - 26.0 +1 = 36.3 dBmV/m

Conversion between dBmV/m (or dBmV) and mV/m (or mV) are as follows:

Level (dBmV/m) = 20 * Log (level (mV/m))

40 dBmV/m = 100 mV/m
48 dBmV/m = 250 mV/m

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Actiontec Electronics Inc. M6240V
To: FCC CFR 47 Part 15 Subpart C 15.247 (DTS)
Serial #: ATEC06-U5b Rev A
Issue Date: 28th July 2015
Page: 23 of 50

Restricted Bands of Operation (15.205)

(a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

| Frequency Band | | | |
|-------------------|---------------------|---------------|-------------|
| MHz | MHz | MHz | GHz |
| 0.090-0.110 | 16.42-16.423 | 399.9-410 | 4.5-5.15 |
| 0.495-0.505 | 16.69475-16.69525 | 608-614 | 5.35-5.46 |
| 2.1735-2.1905 | 16.80425-16.80475 | 960-1240 | 7.25-7.75 |
| 4.125-4.128 | 25.5-25.67 | 1300-1427 | 8.025-8.5 |
| 4.17725-4.17775 | 37.5-38.25 | 1435-1626.5 | 9.0-9.2 |
| 4.20725-4.20775 | 73-74.6 | 1645.5-1646.5 | 9.3-9.5 |
| 6.215-6.218 | 74.8-75.2 | 1660-1710 | 10.6-12.7 |
| 6.26775-6.26825 | 108-121.94 | 1718.8-1722.2 | 13.25-13.4 |
| 6.31175-6.31225 | 123-138 | 2200-2300 | 14.47-14.5 |
| 8.291-8.294 | 149.9-150.05 | 2310-2390 | 15.35-16.2 |
| 8.362-8.366 | 156.52475-156.52525 | 2483.5-2500 | 17.7-21.4 |
| 8.37625-8.38675 | 156.7-156.9 | 2690-2900 | 22.01-23.12 |
| 8.41425-8.41475 | 162.0125-167.17 | 3260-3267 | 23.6-24.0 |
| 12.29-12.293 | 167.72-173.2 | 3332-3339 | 31.2-31.8 |
| 12.51975-12.52025 | 240-285 | 3345.8-3358 | 36.43-36.5 |
| 12.57675-12.57725 | 322-335.4 | 3600-4400 | Above 38.6 |
| 13.36-13.41 | | | |

(b) Except as provided in paragraphs (d) and (e) of this section, the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in §15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in §15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in §15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in §15.35 apply to these measurements.

(c) Except as provided in paragraphs (d) and (e) of this section, regardless of the field strength limits specified elsewhere in this subpart, the provisions of this section apply to emissions from any intentional radiator.

(d) The following devices are exempt from the requirements of this section:

(1) Swept frequency field disturbance sensors operating between 1.705 and 37 MHz provided their emissions only sweep through the bands listed in paragraph (a) of this section, the sweep is never stopped with the fundamental emission within the bands listed in paragraph (a) of this section, and the fundamental emission is outside of the bands listed in paragraph (a) of this section more than 99% of the time the device is actively transmitting, without compensation for duty cycle.

(2) Transmitters used to detect buried electronic markers at 101.4 kHz which are employed by telephone companies.

(3) Cable locating equipment operated pursuant to §15.213.

(4) Any equipment operated under the provisions of §15.253, 15.255, and 15.256 in the frequency band 75-85 GHz, or §15.257 of this part.

(5) Biomedical telemetry devices operating under the provisions of §15.242 of this part are not subject to the restricted band 608-614 MHz but are subject to compliance within the other restricted bands.

(6) Transmitters operating under the provisions of subparts D or F of this part.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Actiontec Electronics Inc. M6240V
To: FCC CFR 47 Part 15 Subpart C 15.247 (DTS)
Serial #: ATEC06-U5b Rev A
Issue Date: 28th July 2015
Page: 24 of 50

(7) Devices operated pursuant to §15.225 are exempt from complying with this section for the 13.36-13.41 MHz band only.

(8) Devices operated in the 24.075-24.175 GHz band under §15.245 are exempt from complying with the requirements of this section for the 48.15-48.35 GHz and 72.225-72.525 GHz bands only, and shall not exceed the limits specified in §15.245(b).

(9) Devices operated in the 24.0-24.25 GHz band under §15.249 are exempt from complying with the requirements of this section for the 48.0-48.5 GHz and 72.0-72.75 GHz bands only, and shall not exceed the limits specified in §15.249(a).

(e) Harmonic emissions appearing in the restricted bands above 17.7 GHz from field disturbance sensors operating under the provisions of §15.245 shall not exceed the limits specified in §15.245(b).

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Actiontec Electronics Inc. M6240V
To: FCC CFR 47 Part 15 Subpart C 15.247 (DTS)
Serial #: ATEC06-U5b Rev A
Issue Date: 28th July 2015
Page: 25 of 50

Equipment Configuration for Radiated Spurious - Restricted Band Emissions

| | | | |
|---------------------------------|----------|-------------------------------|----------------|
| Variant: | 802.11b | Duty Cycle (%): | 99 |
| Data Rate: | 1 Mbit/s | Antenna Gain (dBi): | 4.00 |
| Modulation: | CCK | Beam Forming Gain (Y): | Not Applicable |
| Channel Frequency (MHz): | 2412 MHz | Tested By: | SB |
| Engineering Test Notes: | | | |

Test Measurement Results

| Num | Frequency MHz | Raw dBμV | Cable Loss | AF dB | Level dBμV/m | Measurement Type | Pol | Hgt cm | Azt Deg | Limit dBμV/m | Margin dB | Pass /Fail |
|-----|---------------|----------|------------|--------|--------------|------------------|------------|--------|---------|--------------|-----------|------------|
| #1 | 1124.90 | 45.42 | 2.74 | -16.90 | 31.26 | Peak (Scan) | Vertical | 100 | 0 | 0.0 | -- | |
| #2 | 1124.90 | 36.74 | 2.74 | -16.90 | 22.58 | Max Avg | Vertical | 100 | 121 | 54.0 | -31.4 | Pass |
| #3 | 1124.90 | 45.52 | 2.74 | -16.90 | 31.36 | Max Peak | Vertical | 100 | 121 | 68.2 | -36.9 | Pass |
| #4 | 4824.14 | 42.77 | 5.83 | -11.15 | 37.45 | Max Avg | Horizontal | 100 | 95 | 54.0 | -16.6 | Pass |
| #5 | 4824.14 | 48.98 | 5.83 | -11.15 | 43.66 | Max Peak | Horizontal | 100 | 95 | 68.2 | -24.6 | Pass |
| #6 | 4824.14 | 46.22 | 5.83 | -11.15 | 40.90 | Peak (Scan) | Horizontal | 100 | 0 | 0.0 | -- | |
| #7 | 9647.90 | 41.52 | 8.71 | -6.08 | 44.15 | Peak (Scan) | Horizontal | 100 | 0 | 0.0 | -- | |
| #8 | 9647.90 | 27.11 | 8.71 | -6.08 | 29.74 | Max Avg | Horizontal | 128 | 62 | 54.0 | -24.3 | Pass |
| #9 | 9647.90 | 39.16 | 8.71 | -6.08 | 41.79 | Max Peak | Horizontal | 128 | 62 | 68.2 | -26.4 | Pass |

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Actiontec Electronics Inc. M6240V
To: FCC CFR 47 Part 15 Subpart C 15.247 (DTS)
Serial #: ATEC06-U5b Rev A
Issue Date: 28th July 2015
Page: 26 of 50

Equipment Configuration for Radiated Spurious - Restricted Band Emissions

| | | | |
|---------------------------------|----------|-------------------------------|----------------|
| Variant: | 802.11b | Duty Cycle (%): | 99 |
| Data Rate: | 1 Mbit/s | Antenna Gain (dBi): | 4.00 |
| Modulation: | CCK | Beam Forming Gain (Y): | Not Applicable |
| Channel Frequency (MHz): | 2437 MHz | Tested By: | SB |
| Engineering Test Notes: | | | |

Test Measurement Results

| Num | Frequency MHz | Raw dBμV | Cable Loss | AF dB | Level dBμV/m | Measurement Type | Pol | Hgt cm | Azt Deg | Limit dBμV/m | Margin dB | Pass /Fail |
|-----|---------------|----------|------------|--------|--------------|------------------|------------|--------|---------|--------------|-----------|------------|
| 1 | 1125.16 | 44.91 | 2.74 | -16.90 | 30.75 | Peak (Scan) | Vertical | 100 | 0 | 0.0 | -- | |
| 2 | 1125.16 | 33.00 | 2.74 | -16.90 | 18.84 | Max Avg | Vertical | 100 | 128 | 54.0 | -35.2 | Pass |
| 3 | 1125.16 | 43.81 | 2.74 | -16.90 | 29.65 | Max Peak | Vertical | 100 | 128 | 68.2 | -38.6 | Pass |
| 4 | 4884.01 | 55.39 | 5.87 | -11.27 | 49.99 | Max Avg | Horizontal | 119 | 97 | 54.0 | -4.0 | Pass |
| 5 | 4884.01 | 56.71 | 5.87 | -11.27 | 51.31 | Max Peak | Horizontal | 119 | 97 | 68.2 | -16.9 | Pass |
| 6 | 4884.01 | 51.96 | 5.87 | -11.27 | 46.56 | Peak (Scan) | Horizontal | 100 | 0 | 0.0 | -- | |
| 7 | 7390.32 | 26.31 | 7.43 | -7.17 | 26.57 | Max Avg | Vertical | 110 | 3 | 54.0 | -27.4 | Pass |
| 8 | 7390.32 | 38.03 | 7.43 | -7.17 | 38.29 | Max Peak | Vertical | 110 | 3 | 68.2 | -29.9 | Pass |
| 9 | 7390.32 | 41.87 | 7.43 | -7.17 | 42.13 | Peak (Scan) | Vertical | 100 | 0 | 0.0 | -- | |
| 10 | 9768.02 | 46.63 | 8.64 | -6.20 | 49.07 | Peak (Scan) | Horizontal | 100 | 0 | 0.0 | -- | |
| 11 | 9768.02 | 49.22 | 8.64 | -6.20 | 51.66 | Max Avg | Horizontal | 103 | 162 | 54.0 | -2.3 | Pass |
| 12 | 9768.02 | 52.71 | 8.64 | -6.20 | 55.15 | Max Peak | Horizontal | 103 | 162 | 68.2 | -13.1 | Pass |

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Actiontec Electronics Inc. M6240V
To: FCC CFR 47 Part 15 Subpart C 15.247 (DTS)
Serial #: ATEC06-U5b Rev A
Issue Date: 28th July 2015
Page: 27 of 50

Equipment Configuration for Radiated Spurious - Restricted Band Emissions

| | | | |
|---------------------------------|----------|-------------------------------|----------------|
| Variant: | 802.11b | Duty Cycle (%): | 99 |
| Data Rate: | 1 Mbit/s | Antenna Gain (dBi): | 4.00 |
| Modulation: | CCK | Beam Forming Gain (Y): | Not Applicable |
| Channel Frequency (MHz): | 2462 MHz | Tested By: | SB |
| Engineering Test Notes: | | | |

Test Measurement Results

| Num | Frequency MHz | Raw dBμV | Cable Loss | AF dB | Level dBμV/m | Measurement Type | Pol | Hgt cm | Azt Deg | Limit dBμV/m | Margin dB | Pass /Fail |
|-----|---------------|----------|------------|--------|--------------|------------------|------------|--------|---------|--------------|-----------|------------|
| 1 | 1125.18 | 45.08 | 2.74 | -16.90 | 30.92 | Peak (Scan) | Horizontal | 100 | 0 | 0.0 | -- | |
| 2 | 1125.18 | 31.54 | 2.74 | -16.90 | 17.38 | Max Avg | Horizontal | 118 | 246 | 54.0 | -36.6 | Pass |
| 3 | 1125.18 | 43.61 | 2.74 | -16.90 | 29.45 | Max Peak | Horizontal | 118 | 246 | 68.2 | -38.8 | Pass |
| 4 | 1375.09 | 47.09 | 3.00 | -15.38 | 34.71 | Peak (Scan) | Horizontal | 100 | 0 | 0.0 | -- | |
| 5 | 1375.09 | 42.25 | 3.00 | -15.38 | 29.87 | Max Avg | Horizontal | 100 | 279 | 54.0 | -24.1 | Pass |
| 6 | 1375.09 | 48.76 | 3.00 | -15.38 | 36.38 | Max Peak | Horizontal | 100 | 279 | 68.2 | -31.9 | Pass |
| 7 | 2155.05 | 28.08 | 3.79 | -12.52 | 19.35 | Max Avg | Vertical | 134 | 0 | 54.0 | -34.7 | Pass |
| 8 | 2155.05 | 40.52 | 3.79 | -12.52 | 31.79 | Max Peak | Vertical | 134 | 0 | 68.2 | -36.4 | Pass |
| 9 | 2155.05 | 43.83 | 3.79 | -12.52 | 35.10 | Peak (Scan) | Vertical | 100 | 0 | 0.0 | -- | |

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Actiontec Electronics Inc. M6240V
To: FCC CFR 47 Part 15 Subpart C 15.247 (DTS)
Serial #: ATEC06-U5b Rev A
Issue Date: 28th July 2015
Page: 28 of 50

9.1.1.2. Restricted Band-Edge Emissions

| Radiated Test Conditions for Radiated Spurious and Band-Edge Emissions (Restricted Bands) | | | |
|---|---|---------------------|-------------|
| Standard: | FCC CFR 47:15.247 | Ambient Temp. (°C): | 20.0 - 24.5 |
| Test Heading: | Radiated Spurious and Band-Edge Emissions | Rel. Humidity (%): | 32 - 45 |
| Standard Section(s): | 15.205, 15.209 | Pressure (mBars): | 999 - 1001 |
| Reference Document(s): | See Normative References | | |

Test Procedure for Radiated Spurious and Band-Edge Emissions ([Restricted Bands](#))
Radiated emissions for restricted bands above 1 GHz are measured in the anechoic chamber at a 3-meter distance on every azimuth in both horizontal and vertical polarities. The emissions are recorded and maximized as a function of azimuth by rotation through 360° with a spectrum analyzer in peak hold mode. Depending on the frequency band spanned a notch filter and waveguide filter was used to remove the fundamental frequency. The highest emissions relative to the limit are listed for each frequency spanned. Measurements on any restricted band frequency or frequencies above 1 GHz are based on the use of measurement instrumentation employing peak and average detectors. All measurements were performed using a resolution bandwidth of 1 MHz.

Test configuration and setup for Radiated Spurious and Band-Edge Measurement were per the Radiated Test Set-up specified in this document.

Limits for [Restricted Bands](#)
Peak emission: 74 dBuV/m
Average emission: 54 dBuV/m

Field Strength Calculation
The field strength is calculated by adding the Antenna Factor and Cable Loss, and subtracting Amplifier Gain from the measured reading. All factors are included in the reported data.
FS = R + AF + CORR - FO

where:
FS = Field Strength
R = Measured Spectrum analyzer Input Amplitude
AF = Antenna Factor
CORR = Correction Factor = CL – AG + NFL
CL = Cable Loss
AG = Amplifier Gain
FO = Distance Falloff Factor
NFL = Notch Filter Loss or Waveguide Loss

Example:
Given receiver input reading of 51.5 dBmV; Antenna Factor of 8.5 dB; Cable Loss of 1.3 dB; Falloff Factor of 0 dB, an Amplifier Gain of 26 dB and Notch Filter Loss of 1 dB. The Field Strength (FS) of the measured emission is:

FS = 51.5 + 8.5 + 1.3 - 26.0 +1 = 36.3 dBmV/m

Conversion between dBmV/m (or dBmV) and mV/m (or mV) are as follows:
Level (dBmV/m) = 20 * Log (level (mV/m))

40 dBmV/m = 100 mV/m
48 dBmV/m = 250 mV/m

Restricted Bands of Operation (15.205)
(a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Actiontec Electronics Inc. M6240V
To: FCC CFR 47 Part 15 Subpart C 15.247 (DTS)
Serial #: ATEC06-U5b Rev A
Issue Date: 28th July 2015
Page: 29 of 50

| Frequency Band | | | |
|-------------------|---------------------|---------------|-------------|
| MHz | MHz | MHz | GHz |
| 0.090-0.110 | 16.42-16.423 | 399.9-410 | 4.5-5.15 |
| 0.495-0.505 | 16.69475-16.69525 | 608-614 | 5.35-5.46 |
| 2.1735-2.1905 | 16.80425-16.80475 | 960-1240 | 7.25-7.75 |
| 4.125-4.128 | 25.5-25.67 | 1300-1427 | 8.025-8.5 |
| 4.17725-4.17775 | 37.5-38.25 | 1435-1626.5 | 9.0-9.2 |
| 4.20725-4.20775 | 73-74.6 | 1645.5-1646.5 | 9.3-9.5 |
| 6.215-6.218 | 74.8-75.2 | 1660-1710 | 10.6-12.7 |
| 6.26775-6.26825 | 108-121.94 | 1718.8-1722.2 | 13.25-13.4 |
| 6.31175-6.31225 | 123-138 | 2200-2300 | 14.47-14.5 |
| 8.291-8.294 | 149.9-150.05 | 2310-2390 | 15.35-16.2 |
| 8.362-8.366 | 156.52475-156.52525 | 2483.5-2500 | 17.7-21.4 |
| 8.37625-8.38675 | 156.7-156.9 | 2690-2900 | 22.01-23.12 |
| 8.41425-8.41475 | 162.0125-167.17 | 3260-3267 | 23.6-24.0 |
| 12.29-12.293 | 167.72-173.2 | 3332-3339 | 31.2-31.8 |
| 12.51975-12.52025 | 240-285 | 3345.8-3358 | 36.43-36.5 |
| 12.57675-12.57725 | 322-335.4 | 3600-4400 | Above 38.6 |
| 13.36-13.41 | | | |

(b) Except as provided in paragraphs (d) and (e) of this section, the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in §15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in §15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in §15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in §15.35 apply to these measurements.

(c) Except as provided in paragraphs (d) and (e) of this section, regardless of the field strength limits specified elsewhere in this subpart, the provisions of this section apply to emissions from any intentional radiator.

(d) The following devices are exempt from the requirements of this section:

(1) Swept frequency field disturbance sensors operating between 1.705 and 37 MHz provided their emissions only sweep through the bands listed in paragraph (a) of this section, the sweep is never stopped with the fundamental emission within the bands listed in paragraph (a) of this section, and the fundamental emission is outside of the bands listed in paragraph (a) of this section more than 99% of the time the device is actively transmitting, without compensation for duty cycle.

(2) Transmitters used to detect buried electronic markers at 101.4 kHz which are employed by telephone companies.

(3) Cable locating equipment operated pursuant to §15.213.

(4) Any equipment operated under the provisions of §15.253, 15.255, and 15.256 in the frequency band 75-85 GHz, or §15.257 of this part.

(5) Biomedical telemetry devices operating under the provisions of §15.242 of this part are not subject to the restricted band 608-614 MHz but are subject to compliance within the other restricted bands.

(6) Transmitters operating under the provisions of subparts D or F of this part.

(7) Devices operated pursuant to §15.225 are exempt from complying with this section for the 13.36-13.41 MHz band only.

(8) Devices operated in the 24.075-24.175 GHz band under §15.245 are exempt from complying with the requirements of this section for the 48.15-48.35 GHz and 72.225-72.525 GHz bands only, and shall not exceed the limits specified in §15.245(b).

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Actiontec Electronics Inc. M6240V
To: FCC CFR 47 Part 15 Subpart C 15.247 (DTS)
Serial #: ATEC06-U5b Rev A
Issue Date: 28th July 2015
Page: 30 of 50

(9) Devices operated in the 24.0-24.25 GHz band under §15.249 are exempt from complying with the requirements of this section for the 48.0-48.5 GHz and 72.0-72.75 GHz bands only, and shall not exceed the limits specified in §15.249(a).

(e) Harmonic emissions appearing in the restricted bands above 17.7 GHz from field disturbance sensors operating under the provisions of §15.245 shall not exceed the limits specified in §15.245(b).

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Actiontec Electronics Inc. M6240V
To: FCC CFR 47 Part 15 Subpart C 15.247 (DTS)
Serial #: ATEC06-U5b Rev A
Issue Date: 28th July 2015
Page: 31 of 50

Summary of Power Setting used for Band Edge Measurements

Peak Limit 74 dB μ V, Average Limit 54.0 dB μ V

| Galtronics Custom PCB | | BandEdge Freq | Peak | Average | Power Setting |
|-----------------------|---------------------------|---------------|------------|------------|---------------|
| Operational Mode | Operating Frequency (MHz) | MHz | dB μ V | dB μ V | |
| 802.11b | 2412 | 2390.00 | 43.72 | 34.63 | 25 |
| 802.11g | 2412 | 2390.00 | 72.82 | 51.74 | 21 |
| 802.11n HT-20 | 2412 | 2390.00 | 73.69 | 53.44 | 21 |
| 802.11n HT-40 | 2412 | 2390.00 | 66.44 | 51.85 | 22 |
| 802.11b | 2462 | 2383.50 | 61.92 | 52.74 | 25 |
| 802.11g | 2462 | 2383.50 | 70.93 | 51.74 | 21 |
| 802.11n HT-20 | 2462 | 2383.50 | 69.88 | 52.58 | 22 |
| 802.11n HT-40 | 2452 | 2383.50 | 65.39 | 50.08 | 18 |

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Actiontec Electronics Inc. M6240V
To: FCC CFR 47 Part 15 Subpart C 15.247 (DTS)
Serial #: ATEC06-U5b Rev A
Issue Date: 28th July 2015
Page: 32 of 50

Equipment Configuration for Radiated - Lower Restricted Band-Edge Emissions

| | | | |
|--------------------------------|----------------|-------------------------------|----------------|
| Variant: | 802.11b | Duty Cycle (%): | 99 |
| Data Rate: | 1 Mbit/s | Antenna Gain (dBi): | 4.00 |
| Modulation: | CCK | Beam Forming Gain (Y): | Not Applicable |
| TPC: | Not Applicable | Tested By: | SB |
| Engineering Test Notes: | | | |

Test Measurement Results

| Num | Frequency MHz | Raw dBμV | Cable Loss | AF dB | Level dBμV/m | Measurement Type | Pol | Hgt cm | Azt Deg | Limit dBμV/m | Margin dB | Pass /Fail |
|-----|---------------|----------|------------|--------|--------------|------------------|------------|--------|---------|--------------|-----------|------------|
| #1 | 2375.03 | 51.73 | 4.04 | -12.05 | 43.72 | Max Peak | Horizontal | 126 | 99 | 74.0 | -30.3 | Pass |
| #2 | 2375.21 | 42.64 | 4.04 | -12.05 | 34.63 | Max Avg | Horizontal | 126 | 99 | 54.0 | -19.4 | Pass |

Equipment Configuration for Radiated - Lower Restricted Band-Edge Emissions

| | | | |
|--------------------------------|----------------|-------------------------------|----------------|
| Variant: | 802.11g | Duty Cycle (%): | 99 |
| Data Rate: | 6 Mbit/s | Antenna Gain (dBi): | 4.00 |
| Modulation: | OFDM | Beam Forming Gain (Y): | Not Applicable |
| TPC: | Not Applicable | Tested By: | SB |
| Engineering Test Notes: | | | |

Test Measurement Results

| Num | Frequency MHz | Raw dBμV | Cable Loss | AF dB | Level dBμV/m | Measurement Type | Pol | Hgt cm | Azt Deg | Limit dBμV/m | Margin dB | Pass /Fail |
|-----|---------------|----------|------------|--------|--------------|------------------|------------|--------|---------|--------------|-----------|------------|
| #1 | 2390.00 | 59.62 | 4.04 | -11.92 | 51.74 | Max Avg | Horizontal | 126 | -4 | 54.0 | -2.3 | Pass |
| #2 | 2390.00 | 80.70 | 4.04 | -11.92 | 72.82 | Max Peak | Horizontal | 126 | -4 | 74.0 | -1.2 | Pass |

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Actiontec Electronics Inc. M6240V
To: FCC CFR 47 Part 15 Subpart C 15.247 (DTS)
Serial #: ATEC06-U5b Rev A
Issue Date: 28th July 2015
Page: 33 of 50

Equipment Configuration for Radiated - Lower Restricted Band-Edge Emissions

| | | | |
|--------------------------------|----------------|-------------------------------|----------------|
| Variant: | 802.11n HT-20 | Duty Cycle (%): | 99 |
| Data Rate: | 6.5 Mbit/s | Antenna Gain (dBi): | 4.00 |
| Modulation: | OFDM | Beam Forming Gain (Y): | Not Applicable |
| TPC: | Not Applicable | Tested By: | SB |
| Engineering Test Notes: | | | |

Test Measurement Results

| Num | Frequency MHz | Raw dBμV | Cable Loss | AF dB | Level dBμV/m | Measurement Type | Pol | Hgt cm | Azt Deg | Limit dBμV/m | Margin dB | Pass /Fail |
|-----|---------------|----------|------------|--------|--------------|------------------|------------|--------|---------|--------------|-----------|------------|
| #1 | 2388.92 | 61.32 | 4.04 | -11.92 | 53.44 | Max Avg | Horizontal | 126 | -4 | 54.0 | -0.6 | Pass |
| #2 | 2388.92 | 81.57 | 4.04 | -11.92 | 73.69 | Max Peak | Horizontal | 126 | -4 | 74.0 | -0.3 | Pass |

Equipment Configuration for Radiated - Lower Restricted Band-Edge Emissions

| | | | |
|--------------------------------|----------------|-------------------------------|----------------|
| Variant: | 802.11n HT-40 | Duty Cycle (%): | 99 |
| Data Rate: | 13.5 Mbit/s | Antenna Gain (dBi): | 4.00 |
| Modulation: | OFDM | Beam Forming Gain (Y): | Not Applicable |
| TPC: | Not Applicable | Tested By: | SB |
| Engineering Test Notes: | | | |

Test Measurement Results

| Num | Frequency MHz | Raw dBμV | Cable Loss | AF dB | Level dBμV/m | Measurement Type | Pol | Hgt cm | Azt Deg | Limit dBμV/m | Margin dB | Pass /Fail |
|-----|---------------|----------|------------|--------|--------------|------------------|------------|--------|---------|--------------|-----------|------------|
| #1 | 2388.56 | 59.73 | 4.04 | -11.92 | 51.85 | Max Avg | Horizontal | 126 | -4 | 54.0 | -2.2 | Pass |
| #2 | 2388.92 | 74.32 | 4.04 | -11.92 | 66.44 | Max Peak | Horizontal | 126 | -4 | 74.0 | -7.6 | Pass |

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Actiontec Electronics Inc. M6240V
To: FCC CFR 47 Part 15 Subpart C 15.247 (DTS)
Serial #: ATEC06-U5b Rev A
Issue Date: 28th July 2015
Page: 34 of 50

Equipment Configuration for Radiated - Upper Restricted Band-Edge Emissions

| | | | |
|--------------------------------|----------------|-------------------------------|----------------|
| Variant: | 802.11b | Duty Cycle (%): | 99 |
| Data Rate: | 1 Mbit/s | Antenna Gain (dBi): | 4.00 |
| Modulation: | CCK | Beam Forming Gain (Y): | Not Applicable |
| TPC: | Not Applicable | Tested By: | SB |
| Engineering Test Notes: | | | |

Test Measurement Results

| Num | Frequency MHz | Raw dBμV | Cable Loss | AF dB | Level dBμV/m | Measurement Type | Pol | Hgt cm | Azt Deg | Limit dBμV/m | Margin dB | Pass /Fail |
|-----|---------------|----------|------------|--------|--------------|------------------|----------|--------|---------|--------------|-----------|------------|
| #1 | 2483.50 | 60.28 | 4.10 | -11.64 | 52.74 | Max Avg | Vertical | 126 | 293 | 54.0 | -1.3 | Pass |
| #2 | 2483.50 | 69.46 | 4.10 | -11.64 | 61.92 | Max Peak | Vertical | 126 | 293 | 74.0 | -12.1 | Pass |

Equipment Configuration for Radiated - Upper Restricted Band-Edge Emissions

| | | | |
|--------------------------------|----------------|-------------------------------|----------------|
| Variant: | 802.11g | Duty Cycle (%): | 99 |
| Data Rate: | 6 Mbit/s | Antenna Gain (dBi): | 4.00 |
| Modulation: | OFDM | Beam Forming Gain (Y): | Not Applicable |
| TPC: | Not Applicable | Tested By: | SB |
| Engineering Test Notes: | | | |

Test Measurement Results

| Num | Frequency MHz | Raw dBμV | Cable Loss | AF dB | Level dBμV/m | Measurement Type | Pol | Hgt cm | Azt Deg | Limit dBμV/m | Margin dB | Pass /Fail |
|-----|---------------|----------|------------|--------|--------------|------------------|------------|--------|---------|--------------|-----------|------------|
| #1 | 2483.50 | 78.47 | 4.10 | -11.64 | 70.93 | Max Peak | Horizontal | 126 | -4 | 74.0 | -3.1 | Pass |
| #2 | 2483.63 | 59.28 | 4.10 | -11.64 | 51.74 | Max Avg | Horizontal | 126 | -4 | 54.0 | -2.3 | Pass |

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Actiontec Electronics Inc. M6240V
To: FCC CFR 47 Part 15 Subpart C 15.247 (DTS)
Serial #: ATEC06-U5b Rev A
Issue Date: 28th July 2015
Page: 35 of 50

Equipment Configuration for Radiated - Upper Restricted Band-Edge Emissions

| | | | |
|--------------------------------|----------------|-------------------------------|----------------|
| Variant: | 802.11n HT-20 | Duty Cycle (%): | 99 |
| Data Rate: | 6.5 Mbit/s | Antenna Gain (dBi): | 4.00 |
| Modulation: | OFDM | Beam Forming Gain (Y): | Not Applicable |
| TPC: | Not Applicable | Tested By: | SB |
| Engineering Test Notes: | | | |

Test Measurement Results

| Num | Frequency MHz | Raw dBμV | Cable Loss | AF dB | Level dBμV/m | Measurement Type | Pol | Hgt cm | Azt Deg | Limit dBμV/m | Margin dB | Pass /Fail |
|-----|---------------|----------|------------|--------|--------------|------------------|------------|--------|---------|--------------|-----------|------------|
| #1 | 2484.57 | 60.12 | 4.10 | -11.64 | 52.58 | Max Avg | Horizontal | 126 | -4 | 54.0 | -1.4 | Pass |
| #2 | 2484.97 | 77.42 | 4.10 | -11.64 | 69.88 | Max Peak | Horizontal | 126 | -4 | 74.0 | -4.1 | Pass |

Equipment Configuration for Radiated - Upper Restricted Band-Edge Emissions

| | | | |
|--------------------------------|----------------|-------------------------------|----------------|
| Variant: | 802.11n HT-40 | Duty Cycle (%): | 99 |
| Data Rate: | 6.5 Mbit/s | Antenna Gain (dBi): | 4.00 |
| Modulation: | OFDM | Beam Forming Gain (Y): | Not Applicable |
| TPC: | Not Applicable | Tested By: | SB |
| Engineering Test Notes: | | | |

Test Measurement Results

| Num | Frequency MHz | Raw dBμV | Cable Loss | AF dB | Level dBμV/m | Measurement Type | Pol | Hgt cm | Azt Deg | Limit dBμV/m | Margin dB | Pass /Fail |
|-----|---------------|----------|------------|--------|--------------|------------------|------------|--------|---------|--------------|-----------|------------|
| #1 | 2485.23 | 57.62 | 4.10 | -11.64 | 50.08 | Max Avg | Horizontal | 126 | -4 | 54.0 | -3.9 | Pass |
| #2 | 2485.37 | 72.93 | 4.10 | -11.64 | 65.39 | Max Peak | Horizontal | 126 | -4 | 74.0 | -8.6 | Pass |

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



9.1.2. Digital Emissions (0.03 - 1 GHz)

FCC, Part 15 Subpart C §15.205/ §15.209

Test Procedure

Testing 30M-1 GHz was performed in a 3-meter anechoic chamber using a CISPR compliant receiver. Preliminary radiated emissions were measured on every azimuth and with the receiving antenna in both horizontal and vertical polarizations. To further maximize emissions the receive antenna was varied between 1 and 4 meters. The emissions are recorded with receiver in peak hold mode. Emissions closest to the limits are measured in the quasi-peak mode with the tuned receiver using a bandwidth of 120 kHz. Only the highest emissions relative to the limit are listed. The anechoic chamber test set-up is identified in Section 6 Test Set-Up Photographs.

Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Loss, and subtracting Amplifier Gain from the measured reading. In this test facility, the Antenna Factor, Cable Loss, and Amplifier Gains are loaded into the Rohde & Schwarz Receiver and the corrected field strength can be read directly on the receiver.

$$FS = R + AF + CORR$$

where:

FS = Field Strength

R = Measured Receiver Input Amplitude

AF = Antenna Factor

CORR = Correction Factor = CL – AG + NFL

CL = Cable Loss

AG = Amplifier Gain

For example:

Given a Receiver input reading of 51.5dBμV; Antenna Factor of 8.5dB; Cable Loss of 1.3dB; Falloff Factor of 0dB, an Amplifier Gain of 26dB and Notch Filter Loss of 1dB. The Field Strength of the measured emission is:

$$FS = 51.5 + 8.5 + 1.3 - 26.0 + 1 = 36.3\text{dB}\mu\text{V/m}$$

Conversion between dBμV/m (or dBμV) and μV/m (or μV) are done as:

$$\text{Level (dB}\mu\text{V/m)} = 20 * \text{Log (level (}\mu\text{V/m))}$$


$$40 \text{ dB}\mu\text{V/m} = 100\mu\text{V/m}$$

$$48 \text{ dB}\mu\text{V/m} = 250\mu\text{V/m}$$



Title: Actiontec Electronics Inc. M6240V
To: FCC CFR 47 Part 15 Subpart C 15.247 (DTS)
Serial #: ATEC06-U5b Rev A
Issue Date: 28th July 2015
Page: 37 of 50

| | | | |
|---------------|--|----------------|------|
| Test Freq. | 2.4/5GHz | Engineer | SB |
| Variant | Digital Emissions | Temp (°C) | 19.5 |
| Freq. Range | 30 MHz - 1000 MHz | Rel. Hum.(%) | 49 |
| Power Setting | idle | Press. (mBars) | 998 |
| Antenna | Integral | | |
| Test Notes 1 | S/N:GBEA5190700001:Model:M6240V; Part 15B; | | |
| Test Notes 2 | F/W: | | |

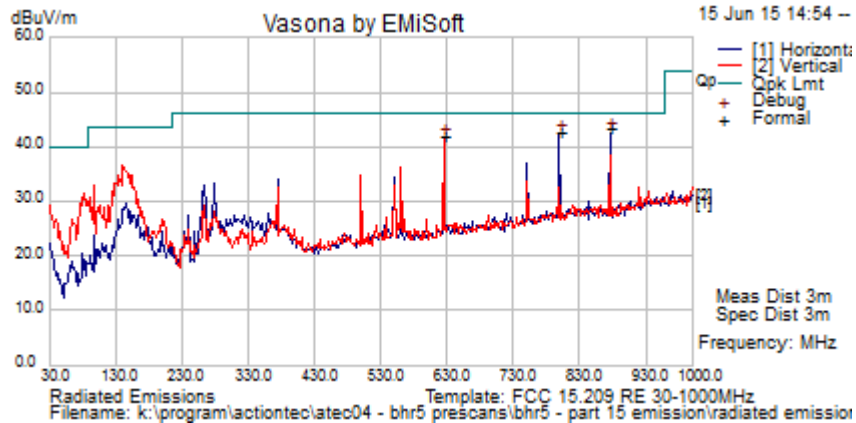

Formally measured emission peaks

| Frequency MHz | Raw dBuV | Cable Loss | AF dB | Level dBuV/m | Measurement Type | Pol | Hgt cm | Azt Deg | Limit dBuV/m | Margin dB | Pass /Fail | Comments |
|--|----------|------------|-------|--------------|------------------|-----|--------|---------|--------------|-----------|------------|----------|
| 874.995 | 45.1 | 6.3 | -8.0 | 43.3 | Quasi Max | H | 99 | 266 | 46 | -2.7 | Pass | |
| 799.204 | 45.5 | 6.1 | -8.8 | 42.8 | Quasi Max | H | 99 | 320 | 46 | -3.2 | Pass | |
| 624.995 | 47.3 | 5.7 | -10.9 | 42.0 | Quasi Max | V | 100 | 280 | 46 | -4.0 | Pass | |
| Legend: DIG = Digital Device Emission; TX = Transmitter Emission; FUND = Fundamental Frequency | | | | | | | | | | | | |
| NRB = Non-Restricted Band, Limit is 20 dB below Fundamental; RB = Restricted Band | | | | | | | | | | | | |

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Actiontec Electronics Inc. M6240V
To: FCC CFR 47 Part 15 Subpart C 15.247 (DTS)
Serial #: ATEC06-U5b Rev A
Issue Date: 28th July 2015
Page: 38 of 50

A. APPENDIX - GRAPHICAL IMAGES

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Actiontec Electronics Inc. M6240V
To: FCC CFR 47 Part 15 Subpart C 15.247 (DTS)
Serial #: ATEC06-U5b Rev A
Issue Date: 28th July 2015
Page: 39 of 50

A.1. Emissions

A.1.1. Radiated Emissions




RADIATED SPURIOUS - RESTRICTED BAND EMISSIONS

Variant: 802.11b, Test Freq: 2412.00 MHz, Antenna: Galtronics Custom PCB, Power Setting: 25

Measurement Distance: 3m

Sweep Time: 170 ms

RBW: 1 MHz
VBW: 3 MHz

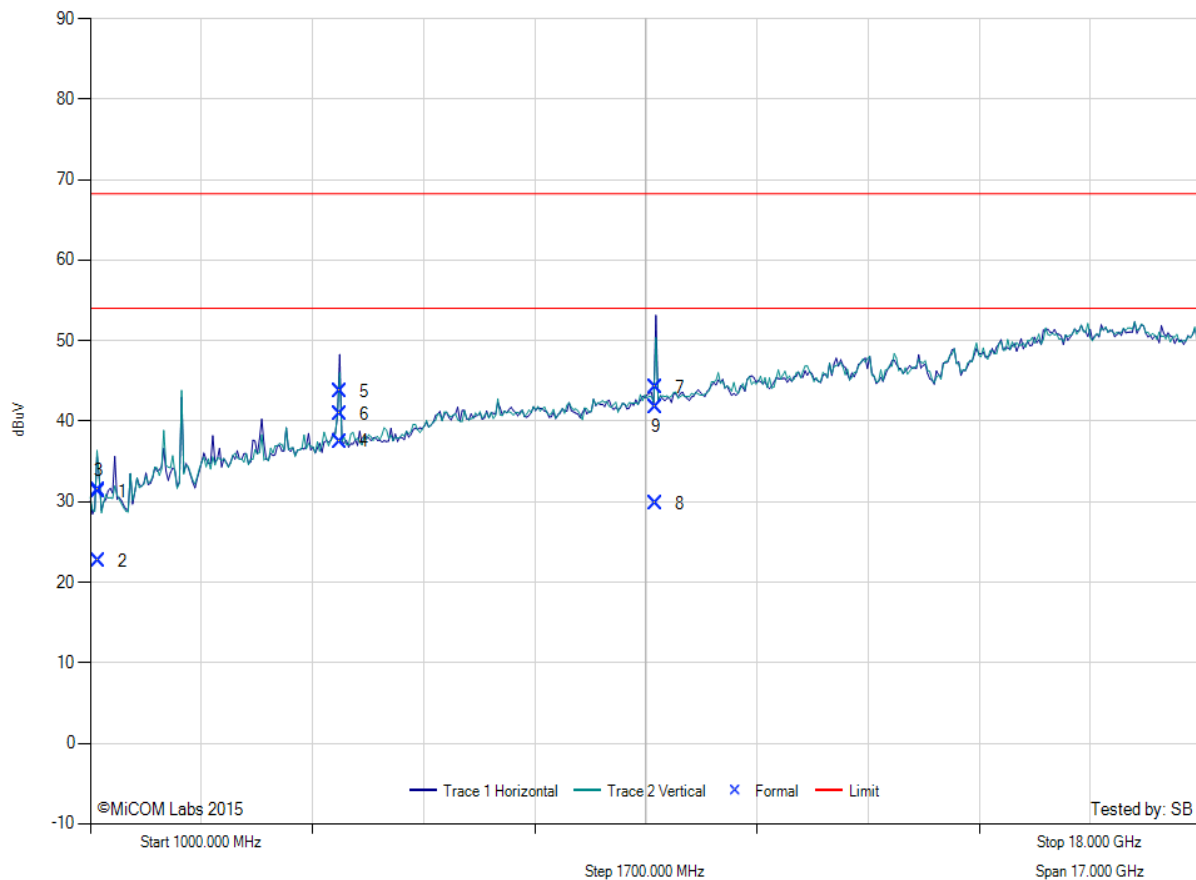

| Num | Frequency MHz | Raw dBμV | Cable Loss | AF dB | Level dBμV/m | Measurement Type | Pol | Hgt cm | Azt Deg | Limit dBμV/m | Margin dB | Pass /Fail |
|-----|---------------|----------|------------|--------|--------------|------------------|------------|--------|---------|--------------|-----------|------------|
| 1 | 1124.90 | 45.42 | 2.74 | -16.90 | 31.26 | Peak (Scan) | Vertical | 100 | 0 | 0.0 | -- | |
| 2 | 1124.90 | 36.74 | 2.74 | -16.90 | 22.58 | Max Avg | Vertical | 100 | 121 | 54.0 | -31.4 | Pass |
| 3 | 1124.90 | 45.52 | 2.74 | -16.90 | 31.36 | Max Peak | Vertical | 100 | 121 | 68.2 | -36.9 | Pass |
| 4 | 4824.14 | 42.77 | 5.83 | -11.15 | 37.45 | Max Avg | Horizontal | 100 | 95 | 54.0 | -16.6 | Pass |
| 5 | 4824.14 | 48.98 | 5.83 | -11.15 | 43.66 | Max Peak | Horizontal | 100 | 95 | 68.2 | -24.6 | Pass |
| 6 | 4824.14 | 46.22 | 5.83 | -11.15 | 40.90 | Peak (Scan) | Horizontal | 100 | 0 | 0.0 | -- | |
| 7 | 9647.90 | 41.52 | 8.71 | -6.08 | 44.15 | Peak (Scan) | Horizontal | 100 | 0 | 0.0 | -- | |
| 8 | 9647.90 | 27.11 | 8.71 | -6.08 | 29.74 | Max Avg | Horizontal | 128 | 62 | 54.0 | -24.3 | Pass |
| 9 | 9647.90 | 39.16 | 8.71 | -6.08 | 41.79 | Max Peak | Horizontal | 128 | 62 | 68.2 | -26.4 | Pass |

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Actiontec Electronics Inc. M6240V
To: FCC CFR 47 Part 15 Subpart C 15.247 (DTS)
Serial #: ATEC06-U5b Rev A
Issue Date: 28th July 2015
Page: 40 of 50




RADIATED SPURIOUS - RESTRICTED BAND EMISSIONS

Variant: 802.11b, Test Freq: 2437.00 MHz, Antenna: Galtronics Custom PCB, Power Setting: 25

Measurement Distance: 3m

Sweep Time: 170 ms

RBW: 1 MHz
VBW: 3 MHz

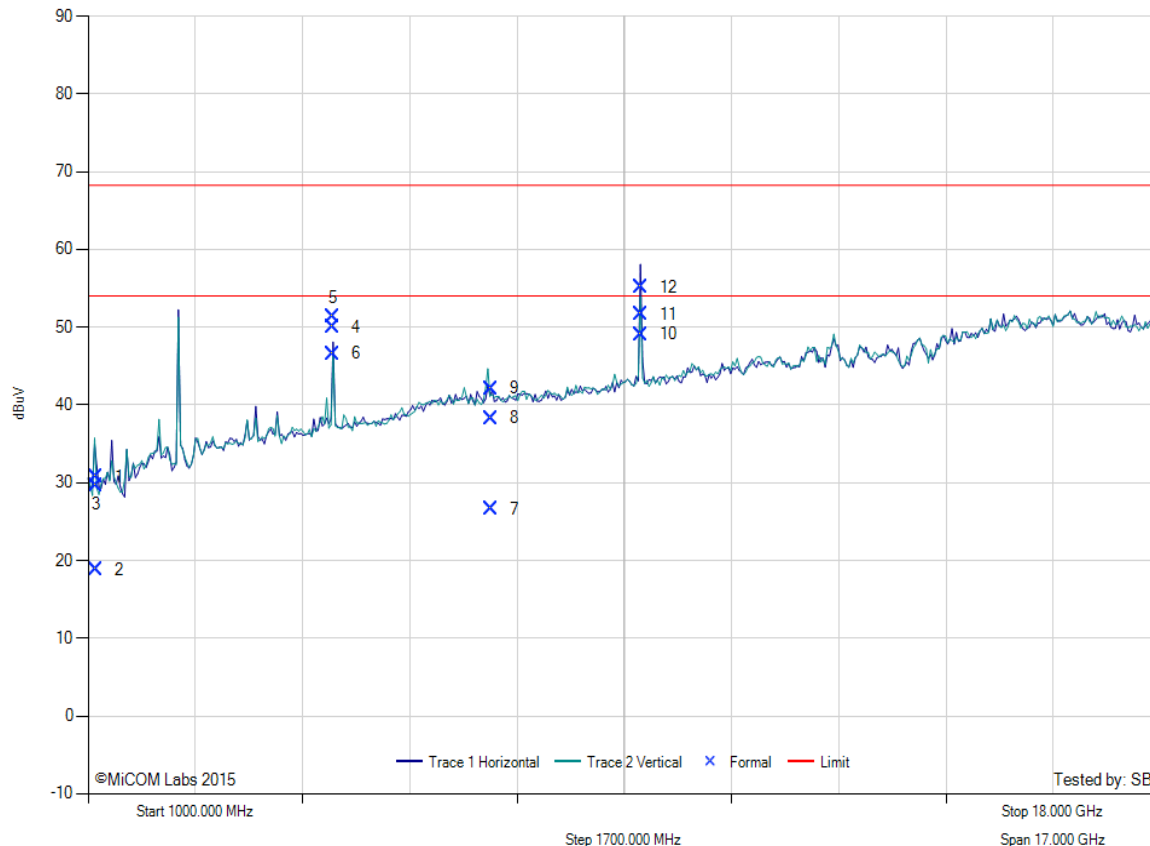

| Step 1700.000 MHz | | | | | | | | | | | Span 17.000 GHz | |
|-------------------|---------------|----------|------------|--------|--------------|------------------|------------|--------|---------|--------------|-----------------|------------|
| Num | Frequency MHz | Raw dBuV | Cable Loss | AF dB | Level dBuV/m | Measurement Type | Pol | Hgt cm | Azt Deg | Limit dBuV/m | Margin dB | Pass /Fail |
| 1 | 1125.16 | 44.91 | 2.74 | -16.90 | 30.75 | Peak (Scan) | Vertical | 100 | 0 | 0.0 | -- | |
| 2 | 1125.16 | 33.00 | 2.74 | -16.90 | 18.84 | Max Avg | Vertical | 100 | 128 | 54.0 | -35.2 | Pass |
| 3 | 1125.16 | 43.81 | 2.74 | -16.90 | 29.65 | Max Peak | Vertical | 100 | 128 | 68.2 | -38.6 | Pass |
| 4 | 4884.01 | 55.39 | 5.87 | -11.27 | 49.99 | Max Avg | Horizontal | 119 | 97 | 54.0 | -4.0 | Pass |
| 5 | 4884.01 | 56.71 | 5.87 | -11.27 | 51.31 | Max Peak | Horizontal | 119 | 97 | 68.2 | -16.9 | Pass |
| 6 | 4884.01 | 51.96 | 5.87 | -11.27 | 46.56 | Peak (Scan) | Horizontal | 100 | 0 | 0.0 | -- | |
| 7 | 7390.32 | 26.31 | 7.43 | -7.17 | 26.57 | Max Avg | Vertical | 110 | 3 | 54.0 | -27.4 | Pass |
| 8 | 7390.32 | 38.03 | 7.43 | -7.17 | 38.29 | Max Peak | Vertical | 110 | 3 | 68.2 | -29.9 | Pass |
| 9 | 7390.32 | 41.87 | 7.43 | -7.17 | 42.13 | Peak (Scan) | Vertical | 100 | 0 | 0.0 | -- | |
| 10 | 9768.02 | 46.63 | 8.64 | -6.20 | 49.07 | Peak (Scan) | Horizontal | 100 | 0 | 0.0 | -- | |
| 11 | 9768.02 | 49.22 | 8.64 | -6.20 | 51.66 | Max Avg | Horizontal | 103 | 162 | 54.0 | -2.3 | Pass |
| 12 | 9768.02 | 52.71 | 8.64 | -6.20 | 55.15 | Max Peak | Horizontal | 103 | 162 | 68.2 | -13.1 | Pass |

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Actiontec Electronics Inc. M6240V
To: FCC CFR 47 Part 15 Subpart C 15.247 (DTS)
Serial #: ATEC06-U5b Rev A
Issue Date: 28th July 2015
Page: 41 of 50




RADIATED SPURIOUS - RESTRICTED BAND EMISSIONS

Variant: 802.11b, Test Freq: 2462.00 MHz, Antenna: Galtronics Custom PCB, Power Setting: 25

Measurement Distance: 3m

Sweep Time: 170 ms

RBW: 1 MHz
VBW: 3 MHz

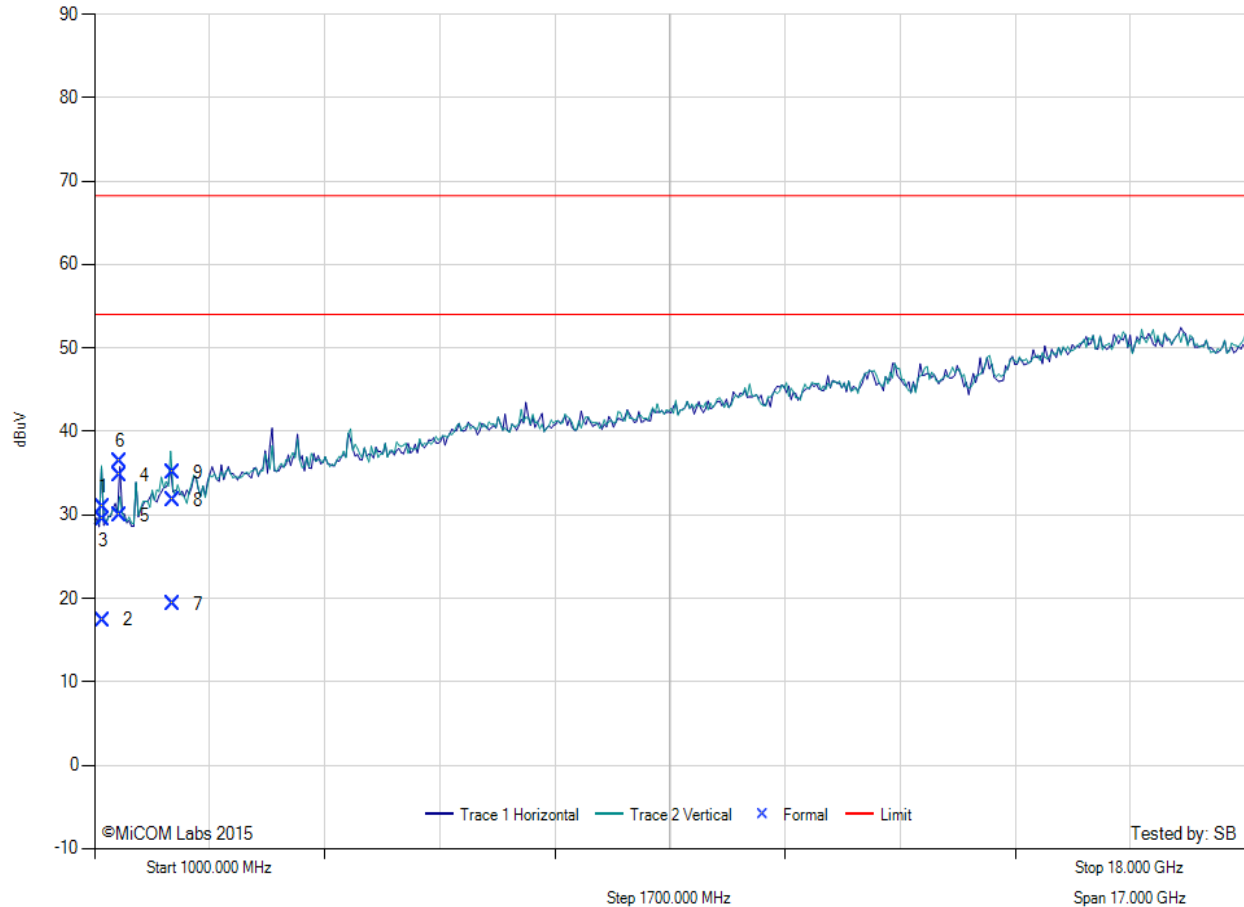

| Step 1700.000 MHz | | | | | | | | | | | | |
|-------------------|---------------|----------|------------|--------|--------------|------------------|------------|--------|---------|--------------|-----------|------------|
| Num | Frequency MHz | Raw dBuV | Cable Loss | AF dB | Level dBuV/m | Measurement Type | Pol | Hgt cm | Azt Deg | Limit dBuV/m | Margin dB | Pass /Fail |
| 1 | 1125.18 | 45.08 | 2.74 | -16.90 | 30.92 | Peak (Scan) | Horizontal | 100 | 0 | 0.0 | -- | |
| 2 | 1125.18 | 31.54 | 2.74 | -16.90 | 17.38 | Max Avg | Horizontal | 118 | 246 | 54.0 | -36.6 | Pass |
| 3 | 1125.18 | 43.61 | 2.74 | -16.90 | 29.45 | Max Peak | Horizontal | 118 | 246 | 68.2 | -38.8 | Pass |
| 4 | 1375.09 | 47.09 | 3.00 | -15.38 | 34.71 | Peak (Scan) | Horizontal | 100 | 0 | 0.0 | -- | |
| 5 | 1375.09 | 42.25 | 3.00 | -15.38 | 29.87 | Max Avg | Horizontal | 100 | 279 | 54.0 | -24.1 | Pass |
| 6 | 1375.09 | 48.76 | 3.00 | -15.38 | 36.38 | Max Peak | Horizontal | 100 | 279 | 68.2 | -31.9 | Pass |
| 7 | 2155.05 | 28.08 | 3.79 | -12.52 | 19.35 | Max Avg | Vertical | 134 | 0 | 54.0 | -34.7 | Pass |
| 8 | 2155.05 | 40.52 | 3.79 | -12.52 | 31.79 | Max Peak | Vertical | 134 | 0 | 68.2 | -36.4 | Pass |
| 9 | 2155.05 | 43.83 | 3.79 | -12.52 | 35.10 | Peak (Scan) | Vertical | 100 | 0 | 0.0 | -- | |

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Actiontec Electronics Inc. M6240V
To: FCC CFR 47 Part 15 Subpart C 15.247 (DTS)
Serial #: ATEC06-U5b Rev A
Issue Date: 28th July 2015
Page: 42 of 50

A.1.2. Restricted Band-Edge Emissions




RADIATED - LOWER RESTRICTED BAND-EDGE EMISSIONS

Variant: 802.11b, Test Freq: 2412.00 MHz, Antenna: Galtronics Custom PCB, Power Setting: 25

Measurement Distance: 3m

Sweep Time: 20.0 s

RBW: 1 MHz
VBW: 1 MHz

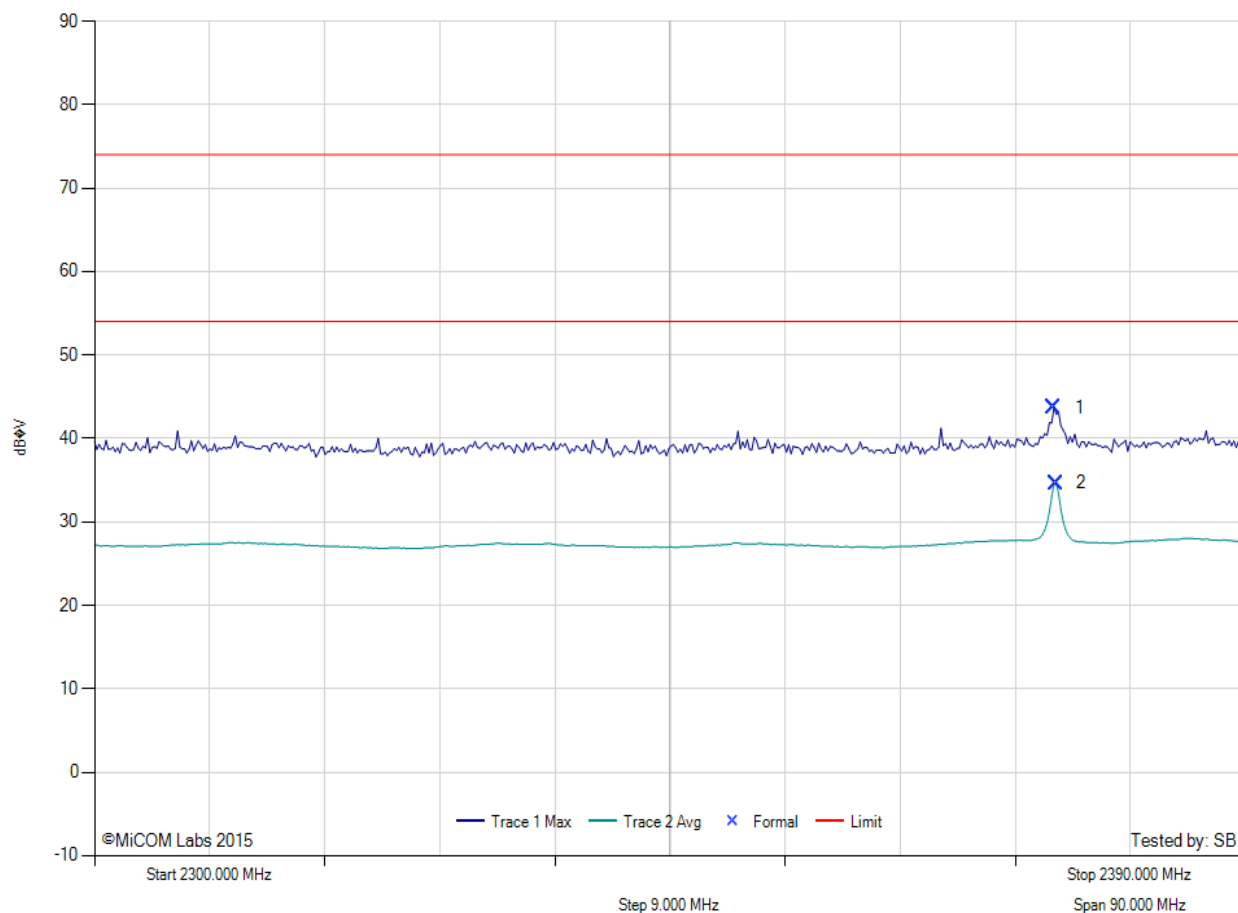

| Num | Frequency MHz | Raw dBμV | Cable Loss | AF dB | Level dBμV/m | Measurement Type | Pol | Hgt cm | Azt Deg | Limit dBμV/m | Margin dB | Pass /Fail |
|-----|---------------|----------|------------|--------|--------------|------------------|-------------|--------|---------|--------------|-----------|------------|
| 1 | 2375.03 | 51.73 | 4.04 | -12.05 | 43.72 | Max Peak | Horizaontal | 126 | 99 | 74.0 | -30.3 | Pass |
| 2 | 2375.21 | 42.64 | 4.04 | -12.05 | 34.63 | Max Avg | Horizaontal | 126 | 99 | 54.0 | -19.4 | Pass |

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.


RADIATED - LOWER RESTRICTED BAND-EDGE EMISSIONS

Variant: 802.11g, Test Freq: 2412.00 MHz, Antenna: Galtronics Custom PCB, Power Setting: 21

Measurement Distance: 3m

Sweep Time: 20.0 s

RBW: 1 MHz
VBW: 1 MHz

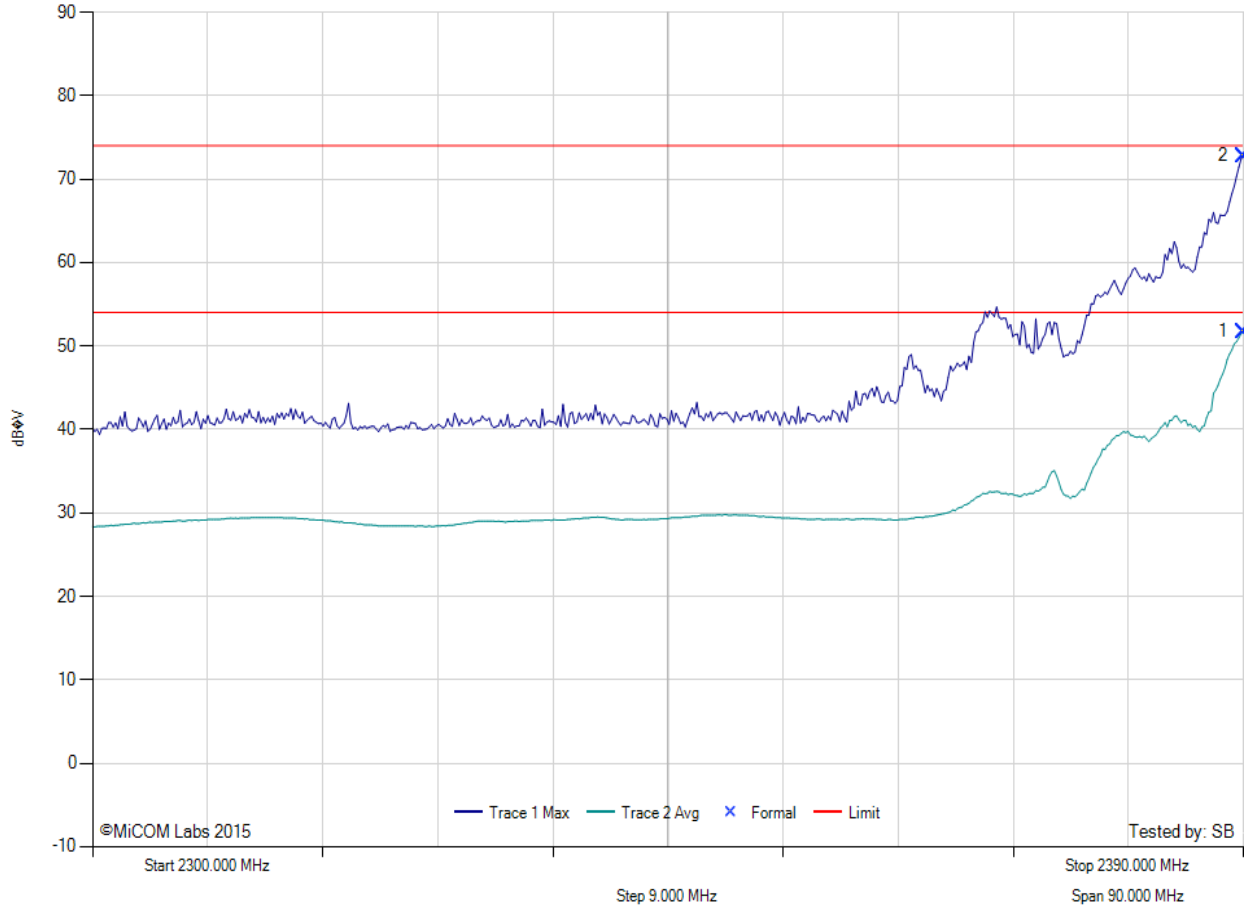

| Num | Frequency MHz | Raw dBμV | Cable Loss | AF dB | Level dBμV/m | Measurement Type | Pol | Hgt cm | Azt Deg | Limit dBμV/m | Margin dB | Pass /Fail |
|-----|---------------|----------|------------|--------|--------------|------------------|------------|--------|---------|--------------|-----------|------------|
| 1 | 2390.00 | 59.62 | 4.04 | -11.92 | 51.74 | Max Avg | Horizontal | 126 | -4 | 54.0 | -2.3 | Pass |
| 2 | 2390.00 | 80.70 | 4.04 | -11.92 | 72.82 | Max Peak | Horizontal | 126 | -4 | 74.0 | -1.2 | Pass |

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.


RADIATED - LOWER RESTRICTED BAND-EDGE EMISSIONS

Variant: 802.11n HT-20, Test Freq: 2412.00 MHz, Antenna: Galtronics Custom PCB, Power Setting: 21

Measurement Distance: 3m

Sweep Time: 20.0 s

RBW: 1 MHz
VBW: 1 MHz

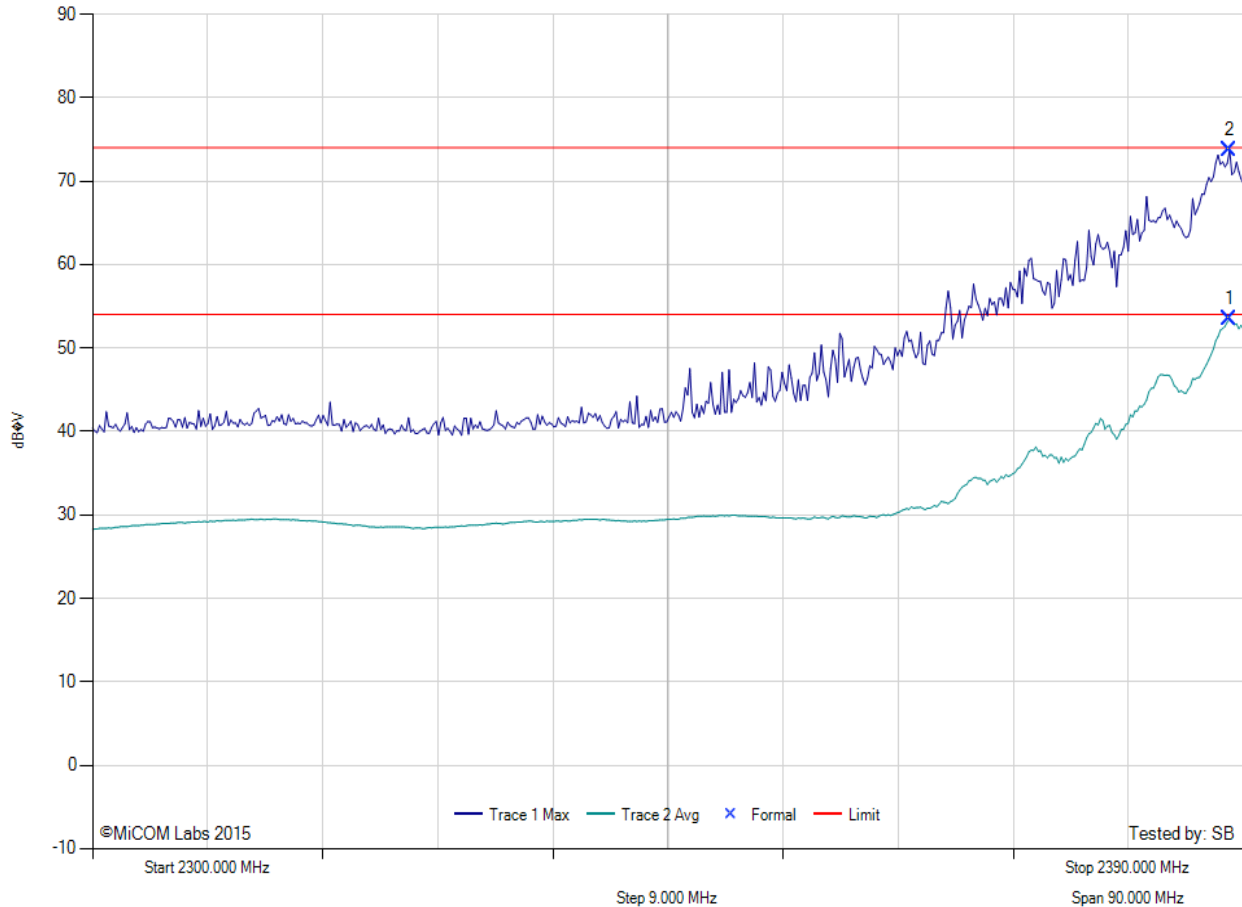

| Num | Frequency MHz | Raw dBμV | Cable Loss | AF dB | Level dBμV/m | Measurement Type | Pol | Hgt cm | Azt Deg | Limit dBμV/m | Margin dB | Pass /Fail |
|-----|---------------|----------|------------|--------|--------------|------------------|------------|--------|---------|--------------|-----------|------------|
| 1 | 2388.92 | 61.32 | 4.04 | -11.92 | 53.44 | Max Avg | Horizontal | 126 | -4 | 54.0 | -0.6 | Pass |
| 2 | 2388.92 | 81.57 | 4.04 | -11.92 | 73.69 | Max Peak | Horizontal | 126 | -4 | 74.0 | -0.3 | Pass |

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Actiontec Electronics Inc. M6240V
To: FCC CFR 47 Part 15 Subpart C 15.247 (DTS)
Serial #: ATEC06-U5b Rev A
Issue Date: 28th July 2015
Page: 45 of 50




RADIATED - LOWER RESTRICTED BAND-EDGE EMISSIONS

Variant: 802.11n HT-40, Test Freq: 2422.00 MHz, Antenna: Galtronics Custom PCB, Power Setting: 22

Measurement Distance: 3m

Sweep Time: 20.0 s

RBW: 1 MHz
VBW: 1 MHz

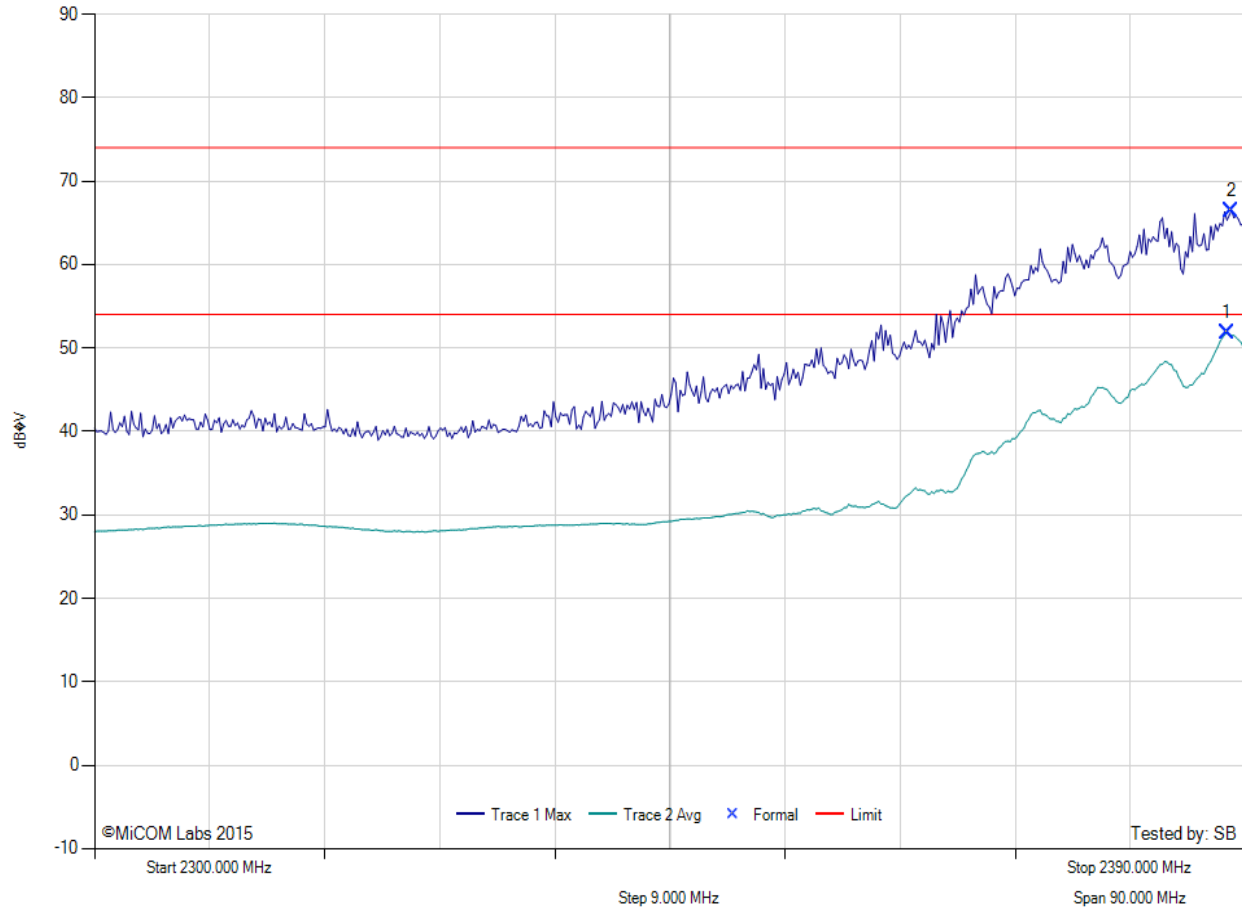

| Num | Frequency MHz | Raw dBμV | Cable Loss | AF dB | Level dBμV/m | Measurement Type | Pol | Hgt cm | Azt Deg | Limit dBμV/m | Margin dB | Pass /Fail |
|-----|---------------|----------|------------|--------|--------------|------------------|-------------|--------|---------|--------------|-----------|------------|
| 1 | 2388.56 | 59.73 | 4.04 | -11.92 | 51.85 | Max Avg | Horizaontal | 126 | -4 | 54.0 | -2.2 | Pass |
| 2 | 2388.92 | 74.32 | 4.04 | -11.92 | 66.44 | Max Peak | Horizaontal | 126 | -4 | 74.0 | -7.6 | Pass |

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Actiontec Electronics Inc. M6240V
To: FCC CFR 47 Part 15 Subpart C 15.247 (DTS)
Serial #: ATEC06-U5b Rev A
Issue Date: 28th July 2015
Page: 46 of 50




RADIATED - UPPER RESTRICTED BAND-EDGE EMISSIONS

Variant: 802.11b, Test Freq: 2462.00 MHz, Antenna: Galtronics Custom PCB, Power Setting: 25

Measurement Distance: 3m

Sweep Time: 20.0 s

RBW: 1 MHz
VBW: 1 MHz

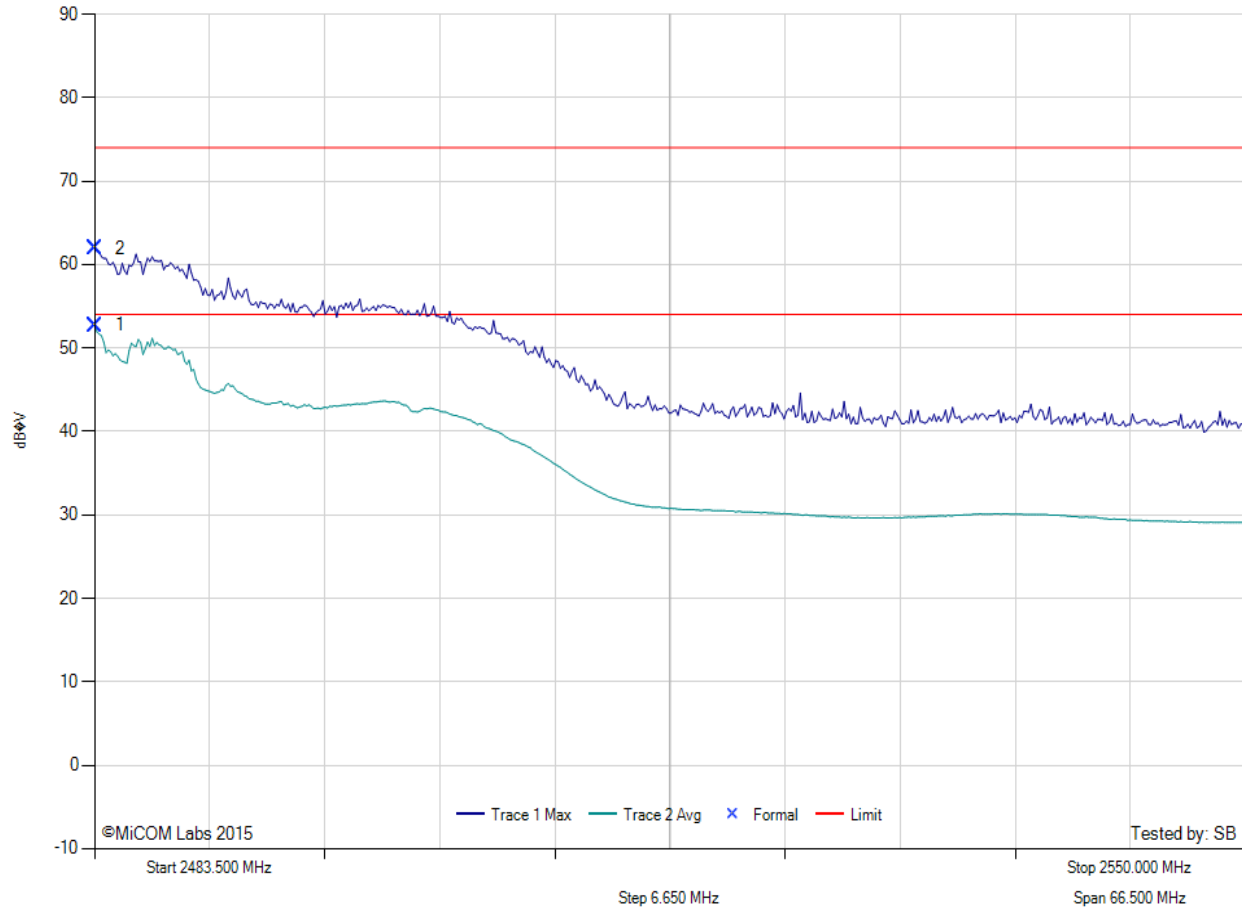

| Num | Frequency MHz | Raw dBμV | Cable Loss | AF dB | Level dBμV/m | Measurement Type | Pol | Hgt cm | Azt Deg | Limit dBμV/m | Margin dB | Pass /Fail |
|-----|---------------|----------|------------|--------|--------------|------------------|----------|--------|---------|--------------|-----------|------------|
| 1 | 2483.50 | 60.28 | 4.10 | -11.64 | 52.74 | Max Avg | Vertical | 126 | 293 | 54.0 | -1.3 | Pass |
| 2 | 2483.50 | 69.46 | 4.10 | -11.64 | 61.92 | Max Peak | Vertical | 126 | 293 | 74.0 | -12.1 | Pass |

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.


RADIATED - UPPER RESTRICTED BAND-EDGE EMISSIONS

Variant: 802.11g, Test Freq: 2462.00 MHz, Antenna: Galtronics Custom PCB, Power Setting: 21

Measurement Distance: 3m

Sweep Time: 20.0 s

RBW: 1 MHz
VBW: 1 MHz

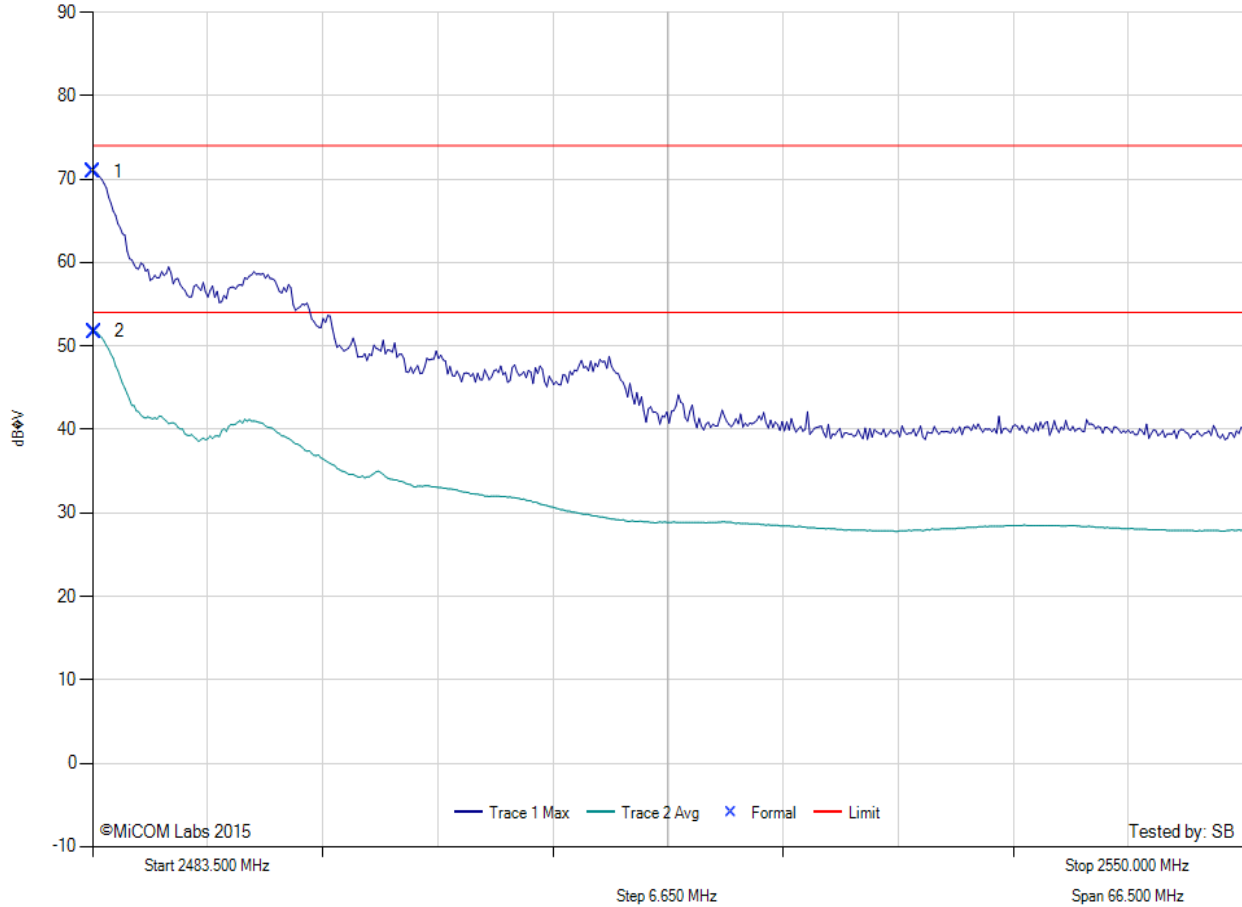

| Num | Frequency MHz | Raw dBμV | Cable Loss | AF dB | Level dBμV/m | Measurement Type | Pol | Hgt cm | Azt Deg | Limit dBμV/m | Margin dB | Pass /Fail |
|-----|---------------|----------|------------|--------|--------------|------------------|------------|--------|---------|--------------|-----------|------------|
| 1 | 2483.50 | 78.47 | 4.10 | -11.64 | 70.93 | Max Peak | Horizontal | 126 | -4 | 74.0 | -3.1 | Pass |
| 2 | 2483.63 | 59.28 | 4.10 | -11.64 | 51.74 | Max Avg | Horizontal | 126 | -4 | 54.0 | -2.3 | Pass |

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

RADIATED - UPPER RESTRICTED BAND-EDGE EMISSIONS

Variant: 802.11n HT-20, Test Freq: 2462.00 MHz, Antenna: Galtronics Custom PCB, Power Setting: 22

Measurement Distance: 3m

Sweep Time: 20.0 s

RBW: 1 MHz
VBW: 1 MHz



| Num | Frequency MHz | Raw dBμV | Cable Loss | AF dB | Level dBμV/m | Measurement Type | Pol | Hgt cm | Azt Deg | Limit dBμV/m | Margin dB | Pass /Fail |
|-----|---------------|----------|------------|--------|--------------|------------------|------------|--------|---------|--------------|-----------|------------|
| 1 | 2484.57 | 60.12 | 4.10 | -11.64 | 52.58 | Max Avg | Horizontal | 126 | -4 | 54.0 | -1.4 | Pass |
| 2 | 2484.97 | 77.42 | 4.10 | -11.64 | 69.88 | Max Peak | Horizontal | 126 | -4 | 74.0 | -4.1 | Pass |

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Actiontec Electronics Inc. M6240V
To: FCC CFR 47 Part 15 Subpart C 15.247 (DTS)
Serial #: ATEC06-U5b Rev A
Issue Date: 28th July 2015
Page: 49 of 50



RADIATED - UPPER RESTRICTED BAND-EDGE EMISSIONS

Variant: 802.11n HT-40, Test Freq: 2452.00 MHz, Antenna: Galtronics Custom PCB, Power Setting: 18

Measurement Distance: 3m

Sweep Time: 20.0 s

RBW: 1 MHz
VBW: 1 MHz



| Num | Frequency MHz | Raw dBμV | Cable Loss | AF dB | Level dBμV/m | Measurement Type | Pol | Hgt cm | Azt Deg | Limit dBμV/m | Margin dB | Pass /Fail |
|-----|---------------|----------|------------|--------|--------------|------------------|------------|--------|---------|--------------|-----------|------------|
| 1 | 2485.23 | 57.62 | 4.10 | -11.64 | 50.08 | Max Avg | Horizontal | 126 | -4 | 54.0 | -3.9 | Pass |
| 2 | 2485.37 | 72.93 | 4.10 | -11.64 | 65.39 | Max Peak | Horizontal | 126 | -4 | 74.0 | -8.6 | Pass |

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



575 Boulder Court
Pleasanton, California 94566, USA
Tel: +1 (925) 462 0304
Fax: +1 (925) 462 0306
www.micomlabs.com