

Company: Actiontec Electronics Inc.

Test of: M6240V

To: FCC CFR 47 Part 15 Subpart E 15.407

Report No.: ATEC06-11b Rev A

## RADIATED TEST REPORT



# RADIATED TEST REPORT

FROM



Test of: Actiontec Electronics Inc. M6240V  
to

To: FCC CFR 47 Part 15 Subpart E 15.407

Test Report Serial No.: ATEC06-11b Rev A

Note: this report is one of a set of three reports that together address the requirements for FCC 15.407

Report Number	Test Report Type
ATEC06-U11a	Conducted Test Report
ATEC06-U11b	Radiated Test Report
ATEC06-U11c	DFS Test Report

This report supersedes: NONE

Applicant: Actiontec Electronics Inc.  
760 N Mary Avenue  
Sunnyvale, 94085  
USA

Product Function: Gigabit Wireless Router

Issue Date: 28th July 2015

## **This Test Report is Issued Under the Authority of:**

**MiCOM Labs, Inc.**  
575 Boulder Court  
Pleasanton California 94566  
USA  
Phone: +1 (925) 462-0304  
Fax: +1 (925) 462-0306  
[www.micomlabs.com](http://www.micomlabs.com)



**MiCOM Labs is an ISO 17025 Accredited Testing Laboratory**



**Title:** Actiontec Electronics Inc. M6240V  
**To:** FCC CFR 47 Part 15 Subpart E 15.407  
**Serial #:** ATEC06-11b Rev A  
**Issue Date:** 28th July 2015  
**Page:** 3 of 60

---

## Table of Contents

<b>1. ACCREDITATION, LISTINGS &amp; RECOGNITION.....</b>	<b>4</b>
1.1. TESTING ACCREDITATION.....	4
1.2. RECOGNITION .....	5
1.3. PRODUCT CERTIFICATION .....	6
<b>2. DOCUMENT HISTORY .....</b>	<b>7</b>
<b>3. TEST RESULT CERTIFICATE.....</b>	<b>8</b>
<b>4. REFERENCES AND MEASUREMENT UNCERTAINTY .....</b>	<b>9</b>
4.1. Normative References .....	9
4.2. Test and Uncertainty Procedure .....	10
<b>5. PRODUCT DETAILS AND TEST CONFIGURATIONS.....</b>	<b>11</b>
5.1. Technical Details .....	11
5.2. Scope Of Test Program .....	12
5.3. Equipment Model(s) and Serial Number(s) .....	14
5.4. Antenna Details .....	14
5.5. Cabling and I/O Ports .....	14
5.6. Test Configurations.....	15
5.7. Equipment Modifications .....	15
5.8. Deviations from the Test Standard .....	15
<b>6. TEST SUMMARY .....</b>	<b>16</b>
<b>7. TEST EQUIPMENT CONFIGURATION(S) .....</b>	<b>17</b>
<b>8. MEASUREMENT AND PRESENTATION OF TEST DATA .....</b>	<b>20</b>
<b>9. TEST RESULTS .....</b>	<b>21</b>
9.1. Radiated .....	21
9.1.1. Radiated Spurious Emissions .....	21
9.1.2. Restricted Band-Edge Emissions .....	33
9.1.3. Digital Emissions.....	45
<b>A. APPENDIX - GRAPHICAL IMAGES .....</b>	<b>47</b>
A.1. Radiated .....	48
A.1.1. Restricted Band Emissions.....	48

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

## 1. ACCREDITATION, LISTINGS & RECOGNITION

### 1.1. TESTING ACCREDITATION

MiCOM Labs, Inc. is an accredited Electrical testing laboratory per the international standard ISO/IEC 17025:2005. The company is accredited by the American Association for Laboratory Accreditation (A2LA) [www.a2la.org](http://www.a2la.org) test laboratory number 2381.01. MiCOM Labs test schedule is available at the following URL; <http://www.a2la.org/scopepdf/2381-01.pdf>



---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



**Title:** Actiontec Electronics Inc. M6240V  
**To:** FCC CFR 47 Part 15 Subpart E 15.407  
**Serial #:** ATEC06-11b Rev A  
**Issue Date:** 28th July 2015  
**Page:** 5 of 60

## 1.2. RECOGNITION

MiCOM Labs, Inc has widely recognized wireless testing capabilities. Our international recognition includes Conformity Assessment Body designation by APEC MRA countries. MiCOM Labs test reports are accepted globally.

Country	Recognition Body	Status	Phase	Identification No.
USA	Federal Communications Commission (FCC)	TCB	-	US0159 Listing #: 102167
Canada	Industry Canada (IC)	FCB	APEC MRA 2	US0159 Listing #: 4143A-2 4143A-3
Japan	MIC (Ministry of Internal Affairs and Communication)	CAB	APEC MRA 2	RCB 210
	VCCI	--	--	A-0012
Europe	European Commission	NB	EU MRA	NB 2280
Australia	Australian Communications and Media Authority (ACMA)	CAB	APEC MRA 1	US0159
Hong Kong	Office of the Telecommunication Authority (OFTA)	CAB	APEC MRA 1	
Korea	Ministry of Information and Communication Radio Research Laboratory (RRL)	CAB	APEC MRA 1	
Singapore	Infocomm Development Authority (IDA)	CAB	APEC MRA 1	
Taiwan	National Communications Commission (NCC) Bureau of Standards, Metrology and Inspection (BSMI)	CAB	APEC MRA 1	
Vietnam	Ministry of Communication (MIC)	CAB	APEC MRA 1	

EU MRA – European Union Mutual Recognition Agreement.

NB – Notified Body

APEC MRA – Asia Pacific Economic Community Mutual Recognition Agreement. Recognition agreement under which test lab is accredited to regulatory standards of the APEC member countries.

Phase I - recognition for product testing

Phase II – recognition for both product testing and certification

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

### 1.3. PRODUCT CERTIFICATION

MiCOM Labs, Inc. is an accredited Product Certification Body per the international standard ISO/IEC 17065:2012. The company is accredited by the American Association for Laboratory Accreditation (A2LA) [www.a2la.org](http://www.a2la.org) test laboratory number 2381.02. MiCOM Labs test schedule is available at the following URL; <http://www.a2la.org/scopepdf/2381-02.pdf>



United States of America – Telecommunication Certification Body (TCB)

Industry Canada – Certification Body, CAB Identifier – US0159

Europe – Notified Body (NB), NB Identifier – 2280

Japan – Recognized Certification Body (RCB), RCB Identifier - 210



**Title:** Actiontec Electronics Inc. M6240V  
**To:** FCC CFR 47 Part 15 Subpart E 15.407  
**Serial #:** ATEC06-11b Rev A  
**Issue Date:** 28th July 2015  
**Page:** 7 of 60

---

## 2. DOCUMENT HISTORY

Document History		
Revision	Date	Comments
Draft		
Rev A	28 <sup>th</sup> July 2015	Initial release.
.		
.		
.		
.		
.		

In the above table the latest report revision will replace all earlier versions.

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



**Title:** Actiontec Electronics Inc. M6240V  
**To:** FCC CFR 47 Part 15 Subpart E 15.407  
**Serial #:** ATEC06-11b Rev A  
**Issue Date:** 28th July 2015  
**Page:** 8 of 60

### 3. TEST RESULT CERTIFICATE

<b>Manufacturer:</b> Actiontec Electronics Inc. 760 N Mary Avenue Sunnyvale 94085 USA	<b>Tested By:</b> MiCOM Labs, Inc. 575 Boulder Court Pleasanton California 94566 USA
<b>Model:</b> M6240V	<b>Telephone:</b> +1 925 462 0304 <b>Fax:</b> +1 925 462 0306
<b>Type Of Equipment:</b> Gigabit Wireless Router	
<b>S/N's:</b> SB32522060009	
<b>Test Date(s):</b> 19 - 22 June 2015	<b>Website:</b> www.micomlabs.com

STANDARD(S)	TEST RESULTS
FCC CFR 47 Part 15 Subpart E 15.407 Radiated RF Requirements	EQUIPMENT COMPLIES


MiCOM Labs, Inc. tested the equipment mentioned in accordance with the requirements set forth in the above standards. Test results indicate that the equipment tested is capable of demonstrating compliance with the requirements as documented within this report.


#### Notes:

1. This document reports conditions under which testing was conducted and the results of testing performed.
2. Details of test methods used have been recorded and kept on file by the laboratory.
3. Test results apply only to the item(s) tested.

**Approved & Released for MiCOM Labs, Inc. by:**



  
\_\_\_\_\_  
Graeme Grieve  
Quality Manager MiCOM Labs, Inc.

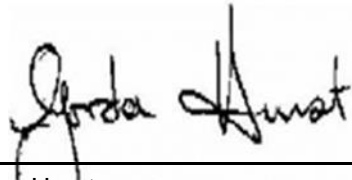  
\_\_\_\_\_  
Gordon Hurst  
President & CEO MiCOM Labs, Inc.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



## 4. REFERENCES AND MEASUREMENT UNCERTAINTY

### 4.1. Normative References

REF.	PUBLICATION	YEAR	TITLE
I	KDB 662911	Oct 31 2013	Guidance for measurement of output emission of devices that employ single transmitter with multiple outputs or systems with multiple transmitters operating simultaneously in the same frequency band
II	KDB 905462 D07 v01	10 <sup>th</sup> June 2015	Test guidance to demonstrate compliance for U-NII devices subject to DFS requirements.
III	KDB 926956 D01 v01r02	June 3,2014	U-NII Device Transition Plan
IV	KDB 443999 V01r3	17 <sup>th</sup> October 2014	Approval of DFS UNII The current interim procedures to approve UNII devices operating in the 5470 - 5725 MHz band with radar detection and DFS capabilities
V	KDB 789033 D02 v01	6 <sup>th</sup> June 2014	General UNII Test Procedures New Rules V01
VI	A2LA	June 2015	R105 - Requirement's When Making Reference to A2LA Accreditation Status
VII	ANSI C63.10	2013	American National Standard for Testing Unlicensed Wireless Devices
VIII	ANSI C63.4	2014	American National Standards for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz
IX	CISPR 22	2008	Information technology equipment - Radio disturbance characteristics - Limits and methods of measurement
X	ETSI TR 100 028	2001-12	Parts 1 and 2 Electromagnetic compatibility and Radio Spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics
XI	FCC 06-96	Jun 3 2006	Memorandum Opinion and Order
XII	FCC 47 CFR Part 15.407	2014	Radio Frequency Devices; Subpart E –Unlicensed National Information Infrastructure Devices
XIII	ICES-003	Issue 5 2012	Spectrum Management and Telecommunications; Interference-Causing Equipment Standard. Information Technology Equipment (ITE) – Limits and methods of measurement.
XIV	M 3003	Edition 3 Nov. 2012	Expression of Uncertainty and Confidence in Measurements
XV	RSS-Gen Issue 4	November 2014	General Requirements and Information for the Certification of Radiocommunication Equipment
XVI	KDB 644545 D03 v01	August 14th 2014	Guidance for IEEE 802.11ac New Rules v01
XVII	FCC 47 CFR Part 2.1033	2014	FCC requirements and rules regarding photographs and test setup diagrams.



**Title:** Actiontec Electronics Inc. M6240V  
**To:** FCC CFR 47 Part 15 Subpart E 15.407  
**Serial #:** ATEC06-11b Rev A  
**Issue Date:** 28th July 2015  
**Page:** 10 of 60

---

#### **4.2. Test and Uncertainty Procedure**

Conducted and radiated emission measurements were conducted in accordance with American National Standards Institute ANSI C63.4, listed in the Normative References section of this report.

Measurement uncertainty figures are calculated in accordance with ETSI TR 100 028 Parts 1 and 2.

Measurement uncertainties stated are based on a standard uncertainty multiplied by a coverage factor  $k = 2$ , providing a level of confidence of approximately 95 % in accordance with UKAS document M 3003 listed in the Normative References section of this report.

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



**Title:** Actiontec Electronics Inc. M6240V  
**To:** FCC CFR 47 Part 15 Subpart E 15.407  
**Serial #:** ATEC06-11b Rev A  
**Issue Date:** 28th July 2015  
**Page:** 11 of 60

## 5. PRODUCT DETAILS AND TEST CONFIGURATIONS

### 5.1. Technical Details

Details	Description
Purpose:	Test of the Actiontec Electronics Inc. M6240V to FCC CFR 47 Part 15 Subpart E 15.407. Radio Frequency Devices; Subpart E –Unlicensed National Information Infrastructure Devices
Applicant:	Actiontec Electronics Inc. 760 N Mary Avenue Sunnyvale 94085 USA
Manufacturer:	As Applicant
Laboratory performing the tests:	MiCOM Labs, Inc. 575 Boulder Court Pleasanton California 94566 USA
Test report reference number:	ATEC06-11b Rev A
Date EUT received:	15 <sup>th</sup> June 2015
Standard(s) applied:	FCC CFR 47 Part 15 Subpart E 15.407
Dates of test (from - to):	19 - 22 June 2015
No of Units Tested:	2
Type of Equipment:	Gigabit Wireless Router
Product Family Name:	GbE 11ac Fiber Gateway
Model(s):	M6240V (device tested) M6240 M6240
Location for use:	Indoor
Declared Frequency Range(s):	5150 - 5250 MHz; 5250 - 5350 MHz; 5470 - 5725 MHz; 5725 - 5850 MHz;
Primary function of equipment:	Gigabit Wireless Router
Secondary function of equipment:	Residential Gateway
Type of Modulation:	OFDM
EUT Modes of Operation:	802.11a; 802.11ac-80; 802.11n HT-20; 802.11n HT-40;
Transmit/Receive Operation:	Transceiver - Half Duplex
Rated Input Voltage and Current:	AC/ DC adaptor (adaptor sold with unit) 12 V DC/3.5A
Operating Temperature Range:	Declared Range 0°C to 40°C
ITU Emission Designator:	802.11a: 16M4D1D 802.11ac-80: 75M9D1D 802.11n HT-20: 17M7D1D 802.11n HT-40: 36M2D1D
Equipment Dimensions:	11.0 x 1.5 x 7 inches
Weight:	1.6 lbs
Hardware Rev:	AM3
Software Rev:	62.0.10

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



**Title:** Actiontec Electronics Inc. M6240V  
**To:** FCC CFR 47 Part 15 Subpart E 15.407  
**Serial #:** ATEC06-11b Rev A  
**Issue Date:** 28th July 2015  
**Page:** 12 of 60

---

## **5.2. Scope Of Test Program**

### **Actiontec Electronics Inc. M6240V**

The scope of the test program was to test the Actiontec Electronics Inc. M6240V, configurations in the frequency ranges 5150 - 5250 MHz; 5250 - 5350 MHz; 5470 - 5725 MHz; 5725 - 5850 MHz; for compliance against the following specification:

### **FCC CFR 47 Part 15 Subpart E 15.407**

Radio Frequency Devices; Subpart E –Unlicensed National Information Infrastructure Devices

### **Manufacturers Declaration of Similarity**

Re: FCC ID: LNQM6240V

Actiontec Models: M6240V, M6240, M6240L

To whom it may concern:

We, Actiontec Electronics, Inc., hereby declare the above mentioned 3 models have electrically identical Wireless circuitry with the same electromagnetic emissions and electromagnetic compatibility characteristics.

The differences among these 3 models are as follows –

M6240V – GbE 11ac Fiber Gateway with MoCA LAN/WAN and VoIP

M6240 – GbE 11ac Fiber Gateway with MoCA LAN, without MoCA WAN/VoIP

M6240L – GbE 11ac Fiber Gateway with MoCA LAN/VoIP, without MoCA WAN

**Actiontec Electronics Inc. M6240V**





**Title:** Actiontec Electronics Inc. M6240V  
**To:** FCC CFR 47 Part 15 Subpart E 15.407  
**Serial #:** ATEC06-11b Rev A  
**Issue Date:** 28th July 2015  
**Page:** 14 of 60

### 5.3. Equipment Model(s) and Serial Number(s)

Type (EUT/Support)	Equipment Description (Including Brand Name)	Mfr	Model No.	Serial No.
EUT	Wireless Router	Actiontec	M6240V	SB32522060009
EUT	Power Adapter 100 - 240Vac 50/60Hz 1.0A 12 Vdc 3.5 A	Actiontec	NBS40C120350VU	1512
Support	Laptop PC	IBM	Thinkpad	None

### 5.4. Antenna Details

Type	Manufacturer	Model	Family	Gain (dBi)	BF Gain	Dir BW	X-Pol	Frequency Band (MHz)
integral	Galtronics	Custom PCB	Dipole	3.0	2.9	360	-	5150 - 5250
integral	Galtronics	Custom PCB	Dipole	3.0	2.8	360	-	5250 - 5350
integral	Galtronics	Custom PCB	Dipole	3.0	2.6	360	-	5470 - 5725
integral	Galtronics	Custom PCB	Dipole	3.0	2.0	360	-	5725 - 5850

BF Gain - Beamforming Gain  
Dir BW - Directional BeamWidth  
X-Pol - Cross Polarization

### 5.5. Cabling and I/O Ports

Port Type	Max Cable Length	# Of Ports	Screened	Conn Type	Data Type
Ethernet	100m	4	N	RJ45	Packet Data
Ethernet	100m	1	N	RJ45	Packet Data
USB	15m	2	N	USB 3.0	Digital
Optical	SFP	1	N		Digital

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



**Title:** Actiontec Electronics Inc. M6240V  
**To:** FCC CFR 47 Part 15 Subpart E 15.407  
**Serial #:** ATEC06-11b Rev A  
**Issue Date:** 28th July 2015  
**Page:** 15 of 60

## 5.6. Test Configurations

Results for the following configurations are provided in this report:

Operational Mode(s) (802.11a/b/g/n/ac)	Data Rate with Highest Power MBit/s	Channel Frequency (MHz)		
		Low	Mid	High
5150 - 5250 MHz				
802.11a	6	5,180.00	5,200.00	5,240.00
802.11ac-80	29.3	5,210.00	--	5,210.00
802.11n HT-20	6.5	5,180.00	--	--
802.11n HT-40	13.5	5,190.00	--	--
5250 - 5350 MHz				
802.11a	6	5,260.00	5,300.00	5,320.00
802.11ac-80	29.3	--	--	5,290.00
802.11n HT-20	6.5	--	--	5,320.00
802.11n HT-40	13.5	--	--	5,310.00
5470 - 5725 MHz				
802.11a	6	5,500.00	5,580.00	5,720.00
802.11ac-80	29.3	5,530.00	--	--
802.11n HT-20	6.5	5,500.00	--	--
802.11n HT-40	13.5	5,510.00	--	--
5725 - 5850 MHz				
802.11a	6	5,745.00	5,785.00	5,825.00

## 5.7. Equipment Modifications

The following modifications were required to bring the equipment into compliance:

1. NONE

## 5.8. Deviations from the Test Standard

The following deviations from the test standard were required in order to complete the test program:

1. NONE

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



**Title:** Actiontec Electronics Inc. M6240V  
**To:** FCC CFR 47 Part 15 Subpart E 15.407  
**Serial #:** ATEC06-11b Rev A  
**Issue Date:** 28th July 2015  
**Page:** 16 of 60

---

## 6. TEST SUMMARY

List of Measurements

Test Header	Result	Data Link
(b)(2) Radiated	Complies	-
i).. Restricted Band Emissions	Complies	<a href="#">View Data</a>
ii).. Restricted Band-Edge Emissions	Complies	<a href="#">View Data</a>
iii).. 5.8 GHz Band-Edge Emissions	Complies	-
iv).. Digital Emissions	Complies	-


---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



## 7. TEST EQUIPMENT CONFIGURATION(S)

Radiated Emissions testing was performed using the set-up shown in the diagram below.

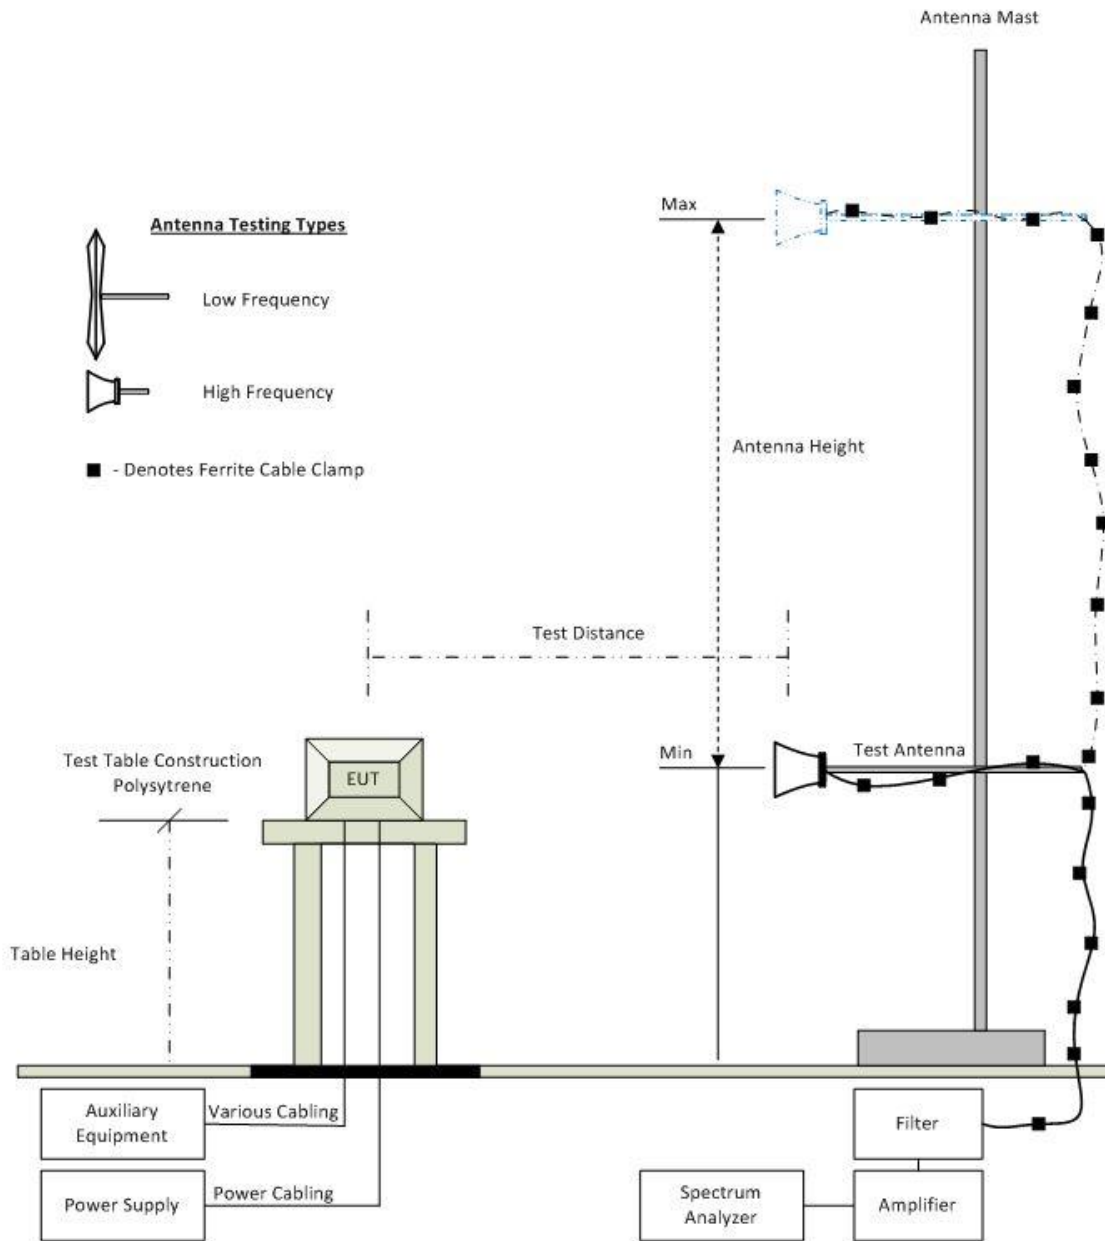

**Radiated Emission Test Setup**

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



**Title:** Actiontec Electronics Inc. M6240V  
**To:** FCC CFR 47 Part 15 Subpart E 15.407  
**Serial #:** ATEC06-11b Rev A  
**Issue Date:** 28th July 2015  
**Page:** 18 of 60

A full system calibration was performed on the test station and any resulting system losses (or gains) were taken into account in the production of all final measurement data.

Asset#	Description	Manufacturer	Model#	Serial#	Calibration Due Date
158	Barometer/Thermometer	Control Company	4196	E2846	04 Dec 2015
170	Video System Controller for Semi Anechoic Chamber	Panasonic	WV-CY101	04R08507	Not Required
193	Receiver 20 Hz to 7 GHz	Rhode & Schwarz	ESI 7	838496/007	14 Jan 2016
287	Rohde & Schwarz 40 GHz Receiver	Rhode & Schwarz	ESIB40	100201	31 Jul 2015
301	5470 to 5725 MHz Notch Filter	Microtronics	RBC50704	001	08 Oct 2015
302	5150 to 5350 MHz Notch Filter	Microtronics	BRC50703	002	08 Oct 2015
303	5725 to 5875 MHz Notch filter	Microtronics	BRC50705	003	08 Oct 2015
310	SMA Cable	Micro-Coax	UFA210A-0-0787-3G03G0	209089-001	30 Oct 2015
330	Variac 0-280 Vac	Staco Energy Co	3PN1020B	0546	Cal when used
338	Sunol 30 to 3000 MHz Antenna	Sunol	JB3	A052907	14 Aug 2015
341	900MHz Notch Filter	EWT	EWT-14-0199	H1	08 Oct 2015
342	2.4 GHz Notch Filter	EWT	EWT-14-0203	H1	08 Oct 2015
343	5.15 GHz Notch Filter	EWT	EWT-14-0200	H1	08 Oct 2015
344	5.35 GHz Notch Filter	EWT	EWT-14-0201	H1	08 Oct 2015
345	5.46 GHz Notch Filter	EWT	EWT-14-0202	H1	08 Oct 2015
346	1.6 TO 10GHz High Pass Filter	EWT	EWT-57-0112	H1	07 Oct 2015
377	Band Rejection Filter 5150 to 5880MHz	Microtronics	BRM50716	034	08 Oct 2015
378	Rohde & Schwarz 40 GHz Receiver with Generator	Rhode & Schwarz	ESIB40	100107/040	17 Jul 2015
393	DC - 1050 MHz Low Pass Filter	Microcircuits	VLFX-1050	N/A	08 Oct 2015
396	2.4 GHz Notch Filter	Microtronics	BRM50701	001	07 Oct 2015
397	Amp 10 - 2500MHz	MiCOM Labs	Amp 10 - 2500 MHz	NA	23 Oct 2015
399	ETS 1-18 GHz Horn Antenna	ETS	3117	00154575	10 Oct 2015
406	Amplifier for Radiated Emissions	MiCOM Labs	40dB 1 to 18GHz Amp	0406	28 May 2016
410	Desktop Computer	Dell	Inspiron 620	WS38	Not Required

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



**Title:** Actiontec Electronics Inc. M6240V  
**To:** FCC CFR 47 Part 15 Subpart E 15.407  
**Serial #:** ATEC06-11b Rev A  
**Issue Date:** 28th July 2015  
**Page:** 19 of 60

411	Mast/Turntable Controller	Sunol Sciences	SC98V	060199-1D	Not Required
412	USB to GPIB Interface	National Instruments	GPIB-USB HS	11B8DC2	Not Required
413	Mast Controller	Sunol Science	TWR95-4	030801-3	Not Required
414	DC Power Supply 0-60V	HP	6274	1029A01285	Cal when used
415	Turntable Controller	Sunol Sciences	Turntable Controller	None	Not Required
416	Gigabit ethernet filter	ETS-Lingren	Gigafoil 260366	None	Not Required
462	Schwarzbeck cable from Antenna to Amplifier.	Schwarzbeck	AK 9513	462	25 Aug 2015
463	Schwarzbeck cable from Amplifier to Bulkhead.	Schwarzbeck	AK 9513	463	25 Aug 2015
464	Schwarzbeck cable from Bulkhead to Receiver	Schwarzbeck	AK 9513	464	25 Aug 2015
465	Low Pass Filter DC-1000 MHz	Mini-Circuits	NLP-1200+	VUU01901402	25 Aug 2015
466	Low Pass Filter DC-1500 MHz	Mini-Circuits	NLP-1750+	VUU10401438	25 Aug 2015
467	2495 to 2650 MHz notch filter	MicroTronics	BRM50709	011	05 Sep 2015
468	Low pass filter	Mini Circuits	SLP-550	None	30 Sep 2015
469	Low pass filter	Mini Circuit	SLP-1000	None	30 Sep 2015
470	High Pass filter	Mini Circuits	SHP-700	None	30 Sep 2015
502	Test Software for Radiated Emissions	EMISoft	Vasona	Version 5 Build 59	Not Required
87	Uninterruptible Power Supply	Falcon Electric	ED2000-1/2LC	F3471 02/01	Cal when used
CC05	Confidence Check	MiCOM	CC05	None	01 Aug 2015
VLF-1700	Low pass filter DC-1700 MHz	Mini Circuits	VLF-1700	None	30 Sep 2015

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

## 8. MEASUREMENT AND PRESENTATION OF TEST DATA

The measurement and graphical data presented in this test report was generated automatically using state-of-the-art technology creating an easy to read report structure. Numerical measurement data is separated from supporting graphical data (plots) through hyperlinks. Numerical measurement data can be reviewed without scrolling through numerous graphical pages to arrive at the next data matrix.

Plots have been relegated into the Appendix 'Graphical Data'.

Test and report automation was performed by [MiTest](#). [MiTest](#) is an automated test system developed by MiCOM Labs. [MiTest](#) is the first cloud based modular test system enabling end-to-end automation of regulatory compliance testing for conducted RF testing.



The MiCOM Labs "[MiTest](#)" Automated Test System" (Patent Pending)

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



## 9. TEST RESULTS

### 9.1. Radiated

#### 9.1.1. Radiated Spurious Emissions

Radiated Test Conditions for Radiated Spurious and Band-Edge Emissions			
Standard:	FCC CFR 47:15.407	Ambient Temp. (°C):	20.0 - 24.5
Test Heading:	Radiated Spurious and Band-Edge Emissions	Rel. Humidity (%):	32 - 45
Standard Section(s):	15.407 (b), 15.205, 15.209	Pressure (mBars):	999 - 1001
Reference Document(s):	See Normative References		

**Test Procedure for Radiated Spurious and Band-Edge Emissions**

Radiated emissions for restricted bands above 1 GHz are measured in the anechoic chamber at a 3-meter distance on every azimuth in both horizontal and vertical polarities. The emissions are recorded and maximized as a function of azimuth by rotation through 360° with a spectrum analyzer in peak hold mode. Depending on the frequency band spanned a notch filter and waveguide filter was used to remove the fundamental frequency. The highest emissions relative to the limit are listed for each frequency spanned. Measurements on any restricted band frequency or frequencies above 1 GHz are based on the use of measurement instrumentation employing peak and average detectors. All measurements were performed using a resolution bandwidth of 1 MHz.

Test configuration and setup for Undesirable Measurement were per the Radiated Test Set-up specified in this document.

15.407 (b) Undesirable emission limits. Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

(1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(4) For transmitters operating in the 5.725-5.85 GHz band: All emissions within the frequency range from the band edge to 10 MHz above or below the band edge shall not exceed an e.i.r.p. of -17 dBm/MHz; for frequencies 10 MHz or greater above or below the band edge, emissions shall not exceed an e.i.r.p. of -27 dBm/MHz.

(5) The emission measurements shall be performed using a minimum resolution bandwidth of 1 MHz. A lower resolution bandwidth may be employed near the band edge, when necessary, provided the measured energy is integrated to show the total power over 1 MHz.

(6) Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in §15.209. Further, any U-NII devices using an AC power line are required to comply also with the conducted limits set forth in §15.207.

(7) The provisions of §15.205 apply to intentional radiators operating under this section.

(8) When measuring the emission limits, the nominal carrier frequency shall be adjusted as close to the upper and lower frequency band edges as the design of the equipment permits.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



**Title:** Actiontec Electronics Inc. M6240V  
**To:** FCC CFR 47 Part 15 Subpart E 15.407  
**Serial #:** ATEC06-11b Rev A  
**Issue Date:** 28th July 2015  
**Page:** 22 of 60

---

**Limits for Restricted Bands (15.205, 15.209)**

**Peak emission:** 74 dBuV/m

**Average emission:** 54 dBuV/m

**Field Strength Calculation**

The field strength is calculated by adding the Antenna Factor and Cable Loss, and subtracting Amplifier Gain from the measured reading. All factors are included in the reported data.

$$FS = R + AF + CORR - FO$$

where:

**FS** = Field Strength

**R** = Measured Spectrum analyzer Input Amplitude

**AF** = Antenna Factor

**CORR** = Correction Factor = CL – AG + NFL

**CL** = Cable Loss

**AG** = Amplifier Gain

**FO** = Distance Falloff Factor

**NFL** = Notch Filter Loss or Waveguide Loss

**Example:**

The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength (dBuV/m);

$$E = 1000000 \times \sqrt{30P} / 3 \text{ } \mu\text{V/m}$$

where P is the EIRP in Watts

Therefore: -27 dBm/MHz equates to 68.23 dBuV/m

Conversion between dBmV/m (or dBmV) and mV/m (or mV) are as follows:

$$\text{Level (dBmV/m)} = 20 * \text{Log (level (mV/m))}$$

$$40 \text{ dBmV/m} = 100 \text{ mV/m}$$

$$48 \text{ dBmV/m} = 250 \text{ mV/m}$$

**Restricted Bands of Operation (15.205)**

(a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:



**Title:** Actiontec Electronics Inc. M6240V  
**To:** FCC CFR 47 Part 15 Subpart E 15.407  
**Serial #:** ATEC06-11b Rev A  
**Issue Date:** 28th July 2015  
**Page:** 23 of 60

Frequency Band			
MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	Above 38.6
13.36-13.41			

(b) Except as provided in paragraphs (d) and (e) of this section, the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in §15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in §15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in §15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in §15.35 apply to these measurements.

(c) Except as provided in paragraphs (d) and (e) of this section, regardless of the field strength limits specified elsewhere in this subpart, the provisions of this section apply to emissions from any intentional radiator.

(d) The following devices are exempt from the requirements of this section:

- (1) Swept frequency field disturbance sensors operating between 1.705 and 37 MHz provided their emissions only sweep through the bands listed in paragraph (a) of this section, the sweep is never stopped with the fundamental emission within the bands listed in paragraph (a) of this section, and the fundamental emission is outside of the bands listed in paragraph (a) of this section more than 99% of the time the device is actively transmitting, without compensation for duty cycle.
- (2) Transmitters used to detect buried electronic markers at 101.4 kHz which are employed by telephone companies.
- (3) Cable locating equipment operated pursuant to §15.213.
- (4) Any equipment operated under the provisions of §15.253, 15.255, and 15.256 in the frequency band 75-85 GHz, or §15.257 of this part.
- (5) Biomedical telemetry devices operating under the provisions of §15.242 of this part are not subject to the restricted band

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



**Title:** Actiontec Electronics Inc. M6240V  
**To:** FCC CFR 47 Part 15 Subpart E 15.407  
**Serial #:** ATEC06-11b Rev A  
**Issue Date:** 28th July 2015  
**Page:** 24 of 60

---

608-614 MHz but are subject to compliance within the other restricted bands.

(6) Transmitters operating under the provisions of subparts D or F of this part.

(7) Devices operated pursuant to §15.225 are exempt from complying with this section for the 13.36-13.41 MHz band only.

(8) Devices operated in the 24.075-24.175 GHz band under §15.245 are exempt from complying with the requirements of this section for the 48.15-48.35 GHz and 72.225-72.525 GHz bands only, and shall not exceed the limits specified in §15.245(b).

(9) Devices operated in the 24.0-24.25 GHz band under §15.249 are exempt from complying with the requirements of this section for the 48.0-48.5 GHz and 72.0-72.75 GHz bands only, and shall not exceed the limits specified in §15.249(a).

(e) Harmonic emissions appearing in the restricted bands above 17.7 GHz from field disturbance sensors operating under the provisions of §15.245 shall not exceed the limits specified in §15.245(b).

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.





**Title:** Actiontec Electronics Inc. M6240V  
**To:** FCC CFR 47 Part 15 Subpart E 15.407  
**Serial #:** ATEC06-11b Rev A  
**Issue Date:** 28th July 2015  
**Page:** 25 of 60

#### Equipment Configuration for Radiated Spurious - Restricted Band Emissions

<b>Variant:</b>	802.11a	<b>Duty Cycle (%):</b>	99
<b>Data Rate:</b>	6 Mbit/s	<b>Antenna Gain (dBi):</b>	5.90
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y):</b>	Not Applicable
<b>Channel Frequency (MHz):</b>	5180.0	<b>Tested By:</b>	SB
<b>Engineering Test Notes:</b>			

#### Test Measurement Results

Num	Frequency MHz	Raw dBμV	Cable Loss	AF dB	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
#1	6906.58	48.54	7.15	-7.54	48.15	Peak (Scan)	Horizontal	100	0	0.0	--	
#2	6906.58	51.77	7.15	-7.54	51.38	Max Avg	Horizontal	103	331	54.0	-2.6	Pass
#3	6906.58	53.83	7.15	-7.54	53.44	Max Peak	Horizontal	103	331	68.2	-14.8	Pass
#4	10366.21	32.51	9.03	-5.23	36.31	Max Avg	Horizontal	100	287	54.0	-17.7	Pass
#5	10366.21	44.12	9.03	-5.23	47.92	Max Peak	Horizontal	100	287	68.2	-20.3	Pass
#6	10366.21	43.38	9.03	-5.23	47.18	Peak (Scan)	Horizontal	100	0	0.0	--	

#### Equipment Configuration for Radiated Spurious - Restricted Band Emissions

<b>Variant:</b>	802.11a	<b>Duty Cycle (%):</b>	99
<b>Data Rate:</b>	6 Mbit/s	<b>Antenna Gain (dBi):</b>	5.90
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y):</b>	Not Applicable
<b>Channel Frequency (MHz):</b>	5200.0	<b>Tested By:</b>	SB
<b>Engineering Test Notes:</b>			

#### Test Measurement Results

Num	Frequency MHz	Raw dBμV	Cable Loss	AF dB	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
1	6933.35	47.88	7.13	-7.49	47.52	Peak (Scan)	Horizontal	100	0	0.0	--	
2	10406.86	41.15	9.17	-4.99	45.33	Peak (Scan)	Horizontal	100	0	0.0	--	

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



**Title:** Actiontec Electronics Inc. M6240V  
**To:** FCC CFR 47 Part 15 Subpart E 15.407  
**Serial #:** ATEC06-11b Rev A  
**Issue Date:** 28th July 2015  
**Page:** 26 of 60

---

<b>Equipment Configuration for Radiated Spurious - Restricted Band Emissions</b>
--

<b>Variant:</b>	802.11a	<b>Duty Cycle (%):</b>	99
<b>Data Rate:</b>	6 Mbit/s	<b>Antenna Gain (dBi):</b>	5.90
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y):</b>	Not Applicable
<b>Channel Frequency (MHz):</b>	5240.0	<b>Tested By:</b>	SB
<b>Engineering Test Notes:</b>			

<b>Test Measurement Results</b>
---------------------------------

Num	Frequency MHz	Raw dBμV	Cable Loss	AF dB	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
1	6960.04	47.30	7.33	-7.45	47.18	Peak (Scan)	Horizontal	100	0	0.0	--	
2	10440.20	41.56	9.09	-4.75	45.90	Peak (Scan)	Horizontal	100	0	0.0	--	

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



**Title:** Actiontec Electronics Inc. M6240V  
**To:** FCC CFR 47 Part 15 Subpart E 15.407  
**Serial #:** ATEC06-11b Rev A  
**Issue Date:** 28th July 2015  
**Page:** 27 of 60

#### Equipment Configuration for Radiated Spurious - Restricted Band Emissions

<b>Variant:</b>	802.11a	<b>Duty Cycle (%):</b>	99
<b>Data Rate:</b>	6 Mbit/s	<b>Antenna Gain (dBi):</b>	5.90
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y):</b>	Not Applicable
<b>Channel Frequency (MHz):</b>	5260.0	<b>Tested By:</b>	SB
<b>Engineering Test Notes:</b>			

#### Test Measurement Results

Num	Frequency MHz	Raw dBμV	Cable Loss	AF dB	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
#1	2397.30	47.17	4.03	-11.85	39.35	Peak (Scan)	Horizontal	100	0	0.0	--	
#2	2397.30	34.73	4.03	-11.85	26.91	Max Avg	Horizontal	126	297	54.0	-27.1	Pass
#3	2397.30	45.76	4.03	-11.85	37.94	Max Peak	Horizontal	126	297	68.2	-30.3	Pass
#4	7013.42	34.42	7.21	-7.42	34.21	Max Avg	Horizontal	100	86	54.0	-19.8	Pass
#5	7013.42	42.65	7.21	-7.42	42.44	Max Peak	Horizontal	100	86	68.2	-25.8	Pass
#6	7013.42	45.73	7.21	-7.42	45.52	Peak (Scan)	Horizontal	100	0	0.0	--	
#7	10515.75	34.86	9.21	-4.23	39.84	Max Avg	Horizontal	100	237	54.0	-14.2	Pass
#8	10515.75	44.43	9.21	-4.23	49.41	Max Peak	Horizontal	100	237	68.2	-18.8	Pass
#9	10515.75	42.85	9.21	-4.23	47.83	Peak (Scan)	Horizontal	100	0	0.0	--	

#### Equipment Configuration for Radiated Spurious - Restricted Band Emissions

<b>Variant:</b>	802.11a	<b>Duty Cycle (%):</b>	99
<b>Data Rate:</b>	6 Mbit/s	<b>Antenna Gain (dBi):</b>	5.90
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y):</b>	Not Applicable
<b>Channel Frequency (MHz):</b>	5300.0	<b>Tested By:</b>	SB
<b>Engineering Test Notes:</b>			

#### Test Measurement Results

Num	Frequency MHz	Raw dBμV	Cable Loss	AF dB	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
1	2397.55	47.31	4.02	-11.85	39.48	Peak (Scan)	Horizontal	100	0	0.0	--	
2	2397.55	43.20	4.02	-11.85	35.37	Max Avg	Horizontal	120	314	54.0	-18.6	Pass
3	2397.55	51.45	4.02	-11.85	43.62	Max Peak	Horizontal	120	314	68.2	-24.6	Pass
4	7066.73	38.33	7.22	-7.34	38.21	Max Avg	Horizontal	104	103	54.0	-15.8	Pass
5	7066.73	43.99	7.22	-7.34	43.87	Max Peak	Horizontal	104	103	68.2	-24.4	Pass
6	7066.73	44.25	7.22	-7.34	44.13	Peak (Scan)	Horizontal	100	0	0.0	--	
7	10603.60	32.14	9.33	-3.92	37.55	Max Avg	Horizontal	138	241	54.0	-16.5	Pass
8	10603.60	43.58	9.33	-3.92	48.99	Max Peak	Horizontal	138	241	68.2	-19.2	Pass
9	10603.60	42.76	9.33	-3.92	48.17	Peak (Scan)	Horizontal	100	0	0.0	--	

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



**Title:** Actiontec Electronics Inc. M6240V  
**To:** FCC CFR 47 Part 15 Subpart E 15.407  
**Serial #:** ATEC06-11b Rev A  
**Issue Date:** 28th July 2015  
**Page:** 28 of 60

#### Equipment Configuration for Radiated Spurious - Restricted Band Emissions

<b>Variant:</b>	802.11a	<b>Duty Cycle (%):</b>	99
<b>Data Rate:</b>	6 Mbit/s	<b>Antenna Gain (dBi):</b>	5.90
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y):</b>	Not Applicable
<b>Channel Frequency (MHz):</b>	5320.0	<b>Tested By:</b>	SB
<b>Engineering Test Notes:</b>			

#### Test Measurement Results

Num	Frequency MHz	Raw dBμV	Cable Loss	AF dB	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
1	2397.78	45.98	4.02	-11.85	38.15	Peak (Scan)	Horizontal	100	0	0.0	--	
2	7093.39	46.59	7.23	-7.33	46.49	Peak (Scan)	Horizontal	100	0	0.0	--	
3	10642.08	34.14	9.11	-3.89	39.36	Max Avg	Horizontal	100	241	54.0	-14.6	Pass
4	10642.08	46.77	9.11	-3.89	51.99	Max Peak	Horizontal	100	241	68.2	-16.2	Pass
5	10642.08	43.05	9.11	-3.89	48.27	Peak (Scan)	Horizontal	100	0	0.0	--	

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



**Title:** Actiontec Electronics Inc. M6240V  
**To:** FCC CFR 47 Part 15 Subpart E 15.407  
**Serial #:** ATEC06-11b Rev A  
**Issue Date:** 28th July 2015  
**Page:** 29 of 60

#### Equipment Configuration for Radiated Spurious - Restricted Band Emissions

<b>Variant:</b>	802.11a	<b>Duty Cycle (%):</b>	99
<b>Data Rate:</b>	6 Mbit/s	<b>Antenna Gain (dBi):</b>	5.90
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y):</b>	Not Applicable
<b>Channel Frequency (MHz):</b>	5500.0	<b>Tested By:</b>	SB
<b>Engineering Test Notes:</b>			

#### Test Measurement Results

Num	Frequency MHz	Raw dBμV	Cable Loss	AF dB	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
#1	2397.55	46.78	4.02	-11.85	38.95	Peak (Scan)	Horizontal	100	0	0.0	--	
#2	2397.55	46.78	4.02	-11.85	38.95	Peak (Scan)	Horizontal	100	0	0.0	--	
#3	2397.55	43.28	4.02	-11.85	35.45	Max Avg	Horizontal	120	321	54.0	-18.6	Pass
#4	2397.55	52.03	4.02	-11.85	44.20	Max Peak	Horizontal	120	321	68.2	-24.0	Pass
#5	11000.08	44.15	9.24	-4.24	49.15	Peak (Scan)	Horizontal	100	0	0.0	--	
#6	11000.08	34.05	9.24	-4.24	39.05	Max Avg	Horizontal	100	209	54.0	-15.0	Pass
#7	11000.08	45.10	9.24	-4.24	50.10	Max Peak	Horizontal	100	209	68.2	-18.1	Pass

#### Equipment Configuration for Radiated Spurious - Restricted Band Emissions

<b>Variant:</b>	802.11a	<b>Duty Cycle (%):</b>	99
<b>Data Rate:</b>	6 Mbit/s	<b>Antenna Gain (dBi):</b>	5.90
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y):</b>	Not Applicable
<b>Channel Frequency (MHz):</b>	5580.0	<b>Tested By:</b>	SB
<b>Engineering Test Notes:</b>			

#### Test Measurement Results

Num	Frequency MHz	Raw dBμV	Cable Loss	AF dB	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
1	2397.70	47.56	4.02	-11.85	39.73	Peak (Scan)	Horizontal	100	0	0.0	--	
2	2397.70	49.79	4.02	-11.85	41.96	Max Avg	Horizontal	123	297	54.0	-12.0	Pass
3	2397.70	54.58	4.02	-11.85	46.75	Max Peak	Horizontal	123	297	68.2	-21.5	Pass
4	11166.21	43.78	9.37	-4.07	49.08	Peak (Scan)	Horizontal	148	0	0.0	--	
5	11166.21	36.97	9.37	-4.07	42.27	Max Avg	Horizontal	117	229	54.0	-11.7	Pass
6	11166.21	47.96	9.37	-4.07	53.26	Max Peak	Horizontal	117	229	68.2	-15.0	Pass

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



**Title:** Actiontec Electronics Inc. M6240V  
**To:** FCC CFR 47 Part 15 Subpart E 15.407  
**Serial #:** ATEC06-11b Rev A  
**Issue Date:** 28th July 2015  
**Page:** 30 of 60

#### Equipment Configuration for Radiated Spurious - Restricted Band Emissions

<b>Variant:</b>	802.11a	<b>Duty Cycle (%):</b>	99
<b>Data Rate:</b>	6 Mbit/s	<b>Antenna Gain (dBi):</b>	5.90
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y):</b>	Not Applicable
<b>Channel Frequency (MHz):</b>	5720.0	<b>Tested By:</b>	SB
<b>Engineering Test Notes:</b>			

#### Test Measurement Results

Num	Frequency MHz	Raw dBμV	Cable Loss	AF dB	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
1	2397.70	46.83	4.02	-11.85	39.00	Peak (Scan)	Horizontal	100	0	0.0	--	
2	2397.70	47.21	4.02	-11.85	39.38	Max Avg	Horizontal	100	282	54.0	-14.6	Pass
3	2397.70	52.09	4.02	-11.85	44.26	Max Peak	Horizontal	100	282	68.2	-24.0	Pass
4	5713.65	57.00	6.40	-10.76	52.64	Peak (Scan)	Horizontal	100	0	0.0	--	
5	11440.16	37.88	9.47	-4.93	42.42	Max Avg	Horizontal	107	75	54.0	-11.6	Pass
6	11440.16	48.62	9.47	-4.93	53.16	Max Peak	Horizontal	107	75	68.2	-15.1	Pass
7	11440.16	48.09	9.47	-4.93	52.63	Peak (Scan)	Horizontal	100	0	0.0	--	

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



**Title:** Actiontec Electronics Inc. M6240V  
**To:** FCC CFR 47 Part 15 Subpart E 15.407  
**Serial #:** ATEC06-11b Rev A  
**Issue Date:** 28th July 2015  
**Page:** 31 of 60

#### Equipment Configuration for Radiated Spurious - Restricted Band Emissions

<b>Variant:</b>	802.11a	<b>Duty Cycle (%):</b>	99
<b>Data Rate:</b>	6 Mbit/s	<b>Antenna Gain (dBi):</b>	5.90
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y):</b>	Not Applicable
<b>Channel Frequency (MHz):</b>	5745.0	<b>Tested By:</b>	SB
<b>Engineering Test Notes:</b>			

#### Test Measurement Results

Num	Frequency MHz	Raw dBμV	Cable Loss	AF dB	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
#1	11494.83	36.53	9.46	-4.83	41.16	Max Avg	Horizontal	100	192	54.0	-12.8	Pass
#2	11494.83	47.99	9.46	-4.83	52.62	Max Peak	Horizontal	100	192	68.2	-15.6	Pass
#3	11494.83	48.54	9.46	-4.83	53.17	Peak (Scan)	Horizontal	151	0	0.0	--	

#### Equipment Configuration for Radiated Spurious - Restricted Band Emissions

<b>Variant:</b>	802.11a	<b>Duty Cycle (%):</b>	99
<b>Data Rate:</b>	6 Mbit/s	<b>Antenna Gain (dBi):</b>	5.90
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y):</b>	Not Applicable
<b>Channel Frequency (MHz):</b>	5785.0	<b>Tested By:</b>	SB
<b>Engineering Test Notes:</b>			

#### Test Measurement Results

Num	Frequency MHz	Raw dBμV	Cable Loss	AF dB	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
1	5777.80	55.00	6.49	-10.48	51.01	Peak (Scan)	Horizontal	200	0	0.0	--	
2	11571.86	41.70	9.59	-4.63	46.66	Max Avg	Horizontal	110	46	54.0	-7.3	Pass
3	11571.86	53.42	9.59	-4.63	58.38	Max Peak	Horizontal	110	46	68.2	-9.9	Pass
4	11571.86	51.87	9.59	-4.63	56.83	Peak (Scan)	Horizontal	100	0	0.0	--	

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



**Title:** Actiontec Electronics Inc. M6240V  
**To:** FCC CFR 47 Part 15 Subpart E 15.407  
**Serial #:** ATEC06-11b Rev A  
**Issue Date:** 28th July 2015  
**Page:** 32 of 60

#### Equipment Configuration for Radiated Spurious - Restricted Band Emissions

<b>Variant:</b>	802.11a	<b>Duty Cycle (%):</b>	99
<b>Data Rate:</b>	6 Mbit/s	<b>Antenna Gain (dBi):</b>	5.90
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y):</b>	Not Applicable
<b>Channel Frequency (MHz):</b>	5825.0	<b>Tested By:</b>	SB
<b>Engineering Test Notes:</b>			

#### Test Measurement Results

Num	Frequency MHz	Raw dBμV	Cable Loss	AF dB	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
1	5823.73	46.25	6.53	-10.25	42.53	Max Avg	Horizontal	177	24	54.0	-11.5	Pass
2	5823.73	56.47	6.53	-10.25	52.75	Max Peak	Horizontal	177	24	68.2	-15.5	Pass
3	5823.73	45.20	6.53	-10.25	41.48	Max Avg	Horizontal	100	20	54.0	-12.5	Pass
4	5823.73	55.76	6.53	-10.25	52.04	Max Peak	Horizontal	100	20	68.2	-16.2	Pass
5	5823.73	49.91	6.53	-10.25	46.19	Peak (Scan)	Horizontal	200	0	0.0	--	
6	11654.79	42.16	9.65	-4.46	47.35	Max Avg	Horizontal	135	48	54.0	-6.7	Pass
7	11654.79	52.97	9.65	-4.46	58.16	Max Peak	Horizontal	135	48	68.2	-10.1	Pass
8	11654.79	52.59	9.65	-4.46	57.78	Peak (Scan)	Horizontal	148	0	0.0	--	

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.





**Title:** Actiontec Electronics Inc. M6240V  
**To:** FCC CFR 47 Part 15 Subpart E 15.407  
**Serial #:** ATEC06-11b Rev A  
**Issue Date:** 28th July 2015  
**Page:** 33 of 60

### 9.1.2. Restricted Band-Edge Emissions

Radiated Test Conditions for Radiated Spurious and Band-Edge Emissions			
<b>Standard:</b>	FCC CFR 47:15.407	<b>Ambient Temp. (°C):</b>	20.0 - 24.5
<b>Test Heading:</b>	Radiated Spurious and Band-Edge Emissions	<b>Rel. Humidity (%):</b>	32 - 45
<b>Standard Section(s):</b>	15.407 (b), 15.205, 15.209	<b>Pressure (mBars):</b>	999 - 1001
<b>Reference Document(s):</b>	See Normative References		

#### Test Procedure for Radiated Spurious and Band-Edge Emissions

Radiated emissions for restricted bands above 1 GHz are measured in the anechoic chamber at a 3-meter distance on every azimuth in both horizontal and vertical polarities. The emissions are recorded and maximized as a function of azimuth by rotation through 360° with a spectrum analyzer in peak hold mode. Depending on the frequency band spanned a notch filter and waveguide filter was used to remove the fundamental frequency. The highest emissions relative to the limit are listed for each frequency spanned. Measurements on any restricted band frequency or frequencies above 1 GHz are based on the use of measurement instrumentation employing peak and average detectors. All measurements were performed using a resolution bandwidth of 1 MHz.

Test configuration and setup for Undesirable Measurement were per the Radiated Test Set-up specified in this document.

15.407 (b) Undesirable emission limits. Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

- (1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (4) For transmitters operating in the 5.725-5.85 GHz band: All emissions within the frequency range from the band edge to 10 MHz above or below the band edge shall not exceed an e.i.r.p. of -17 dBm/MHz; for frequencies 10 MHz or greater above or below the band edge, emissions shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (5) The emission measurements shall be performed using a minimum resolution bandwidth of 1 MHz. A lower resolution bandwidth may be employed near the band edge, when necessary, provided the measured energy is integrated to show the total power over 1 MHz.
- (6) Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in §15.209. Further, any U-NII devices using an AC power line are required to comply also with the conducted limits set forth in §15.207.
- (7) The provisions of §15.205 apply to intentional radiators operating under this section.
- (8) When measuring the emission limits, the nominal carrier frequency shall be adjusted as close to the upper and lower frequency band edges as the design of the equipment permits.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



**Title:** Actiontec Electronics Inc. M6240V  
**To:** FCC CFR 47 Part 15 Subpart E 15.407  
**Serial #:** ATEC06-11b Rev A  
**Issue Date:** 28th July 2015  
**Page:** 34 of 60

---

**Limits for Restricted Bands (15.205, 15.209)**

**Peak emission:** 74 dBuV/m

**Average emission:** 54 dBuV/m

**Field Strength Calculation**

The field strength is calculated by adding the Antenna Factor and Cable Loss, and subtracting Amplifier Gain from the measured reading. All factors are included in the reported data.

**FS = R + AF + CORR - FO**

where:

**FS = Field Strength**

**R = Measured Spectrum analyzer Input Amplitude**

**AF = Antenna Factor**

**CORR = Correction Factor = CL - AG + NFL**

**CL = Cable Loss**

**AG = Amplifier Gain**

**FO = Distance Falloff Factor**

**NFL = Notch Filter Loss or Waveguide Loss**

**Example:**

The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength (dBuV/m);

$$E = 1000000 \times \sqrt[3]{30P} \text{ } \mu\text{V/m}$$

where P is the EIRP in Watts

Therefore: -27 dBm/MHz equates to 68.23 dBuV/m

Conversion between dBmV/m (or dBmV) and mV/m (or mV) are as follows:

Level (dBmV/m) = 20 \* Log (level (mV/m))

40 dBmV/m = 100 mV/m

48 dBmV/m = 250 mV/m



**Title:** Actiontec Electronics Inc. M6240V  
**To:** FCC CFR 47 Part 15 Subpart E 15.407  
**Serial #:** ATEC06-11b Rev A  
**Issue Date:** 28th July 2015  
**Page:** 35 of 60

#### Restricted Bands of Operation (15.205)

(a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

Frequency Band			
MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	Above 38.6
13.36-13.41			

(b) Except as provided in paragraphs (d) and (e) of this section, the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in §15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in §15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in §15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in §15.35 apply to these measurements.

(c) Except as provided in paragraphs (d) and (e) of this section, regardless of the field strength limits specified elsewhere in this subpart, the provisions of this section apply to emissions from any intentional radiator.

(d) The following devices are exempt from the requirements of this section:

- (1) Swept frequency field disturbance sensors operating between 1.705 and 37 MHz provided their emissions only sweep through the bands listed in paragraph (a) of this section, the sweep is never stopped with the fundamental emission within the bands listed in paragraph (a) of this section, and the fundamental emission is outside of the bands listed in paragraph (a) of this section more than 99% of the time the device is actively transmitting, without compensation for duty cycle.
- (2) Transmitters used to detect buried electronic markers at 101.4 kHz which are employed by telephone companies.
- (3) Cable locating equipment operated pursuant to §15.213.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



**Title:** Actiontec Electronics Inc. M6240V  
**To:** FCC CFR 47 Part 15 Subpart E 15.407  
**Serial #:** ATEC06-11b Rev A  
**Issue Date:** 28th July 2015  
**Page:** 36 of 60

---

- (4) Any equipment operated under the provisions of §15.253, 15.255, and 15.256 in the frequency band 75-85 GHz, or §15.257 of this part.
- (5) Biomedical telemetry devices operating under the provisions of §15.242 of this part are not subject to the restricted band 608-614 MHz but are subject to compliance within the other restricted bands.
- (6) Transmitters operating under the provisions of subparts D or F of this part.
- (7) Devices operated pursuant to §15.225 are exempt from complying with this section for the 13.36-13.41 MHz band only.
- (8) Devices operated in the 24.075-24.175 GHz band under §15.245 are exempt from complying with the requirements of this section for the 48.15-48.35 GHz and 72.225-72.525 GHz bands only, and shall not exceed the limits specified in §15.245(b).
- (9) Devices operated in the 24.0-24.25 GHz band under §15.249 are exempt from complying with the requirements of this section for the 48.0-48.5 GHz and 72.0-72.75 GHz bands only, and shall not exceed the limits specified in §15.249(a).
- (e) Harmonic emissions appearing in the restricted bands above 17.7 GHz from field disturbance sensors operating under the provisions of §15.245 shall not exceed the limits specified in §15.245(b).

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



**Title:** Actiontec Electronics Inc. M6240V  
**To:** FCC CFR 47 Part 15 Subpart E 15.407  
**Serial #:** ATEC06-11b Rev A  
**Issue Date:** 28th July 2015  
**Page:** 37 of 60

---

Peak Limit 74 dB $\mu$ V, Average Limit 54.0 dB $\mu$ V

Galtronics Custom PCB		BandEdge Freq	Peak	Average	Power Setting
Operational Mode	Operating Frequency (MHz)	MHz	dB $\mu$ V	dB $\mu$ V	
802.11a	5180	5150.00	62.61	49.95	23
802.11ac-80	5210	5150.00	67.00	53.13	15
802.11n HT-20	5180	5150.00	61.31	48.79	23
802.11n HT-40	5190	5150.00	64.71	51.47	23
802.11a	5320	5350.00	65.35	52.03	23
802.11ac-80	5290	5350.00	68.12	53.39	16
802.11n HT-20	5320	5350.00	66.49	51.94	23
802.11n HT-40	5310	5350.00	67.40	51.81	23
802.11a	5500	5470.00	62.09	49.64	23
802.11ac-80	5530	5470.00	67.28	53.32	17
802.11n HT-20	5500	5470.00	61.4	49.14	23
802.11n HT-40	5510	5470.00	59.48	45.89	23

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



**Title:** Actiontec Electronics Inc. M6240V  
**To:** FCC CFR 47 Part 15 Subpart E 15.407  
**Serial #:** ATEC06-11b Rev A  
**Issue Date:** 28th July 2015  
**Page:** 38 of 60

#### Equipment Configuration for Restricted Lower Band-Edge Emissions

<b>Variant:</b>	802.11a	<b>Duty Cycle (%):</b>	99
<b>Data Rate:</b>	6 Mbit/s	<b>Antenna Gain (dBi):</b>	5.90
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y):</b>	Not Applicable
<b>Channel frequency (MHz):</b>	5180.0	<b>Tested By:</b>	SB
<b>Engineering Test Notes:</b>			

#### Test Measurement Results

Num	Frequency MHz	Raw dBμV	Cable Loss	AF dB	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
#1	5148.70	55.46	6.08	-11.59	49.95	Max Avg	Vertical	110	87	54.0	-4.1	Pass
#2	5150.00	68.12	6.08	-11.59	62.61	Max Peak	Vertical	110	87	74.0	-11.4	Pass

#### Equipment Configuration for Restricted Lower Band-Edge Emissions

<b>Variant:</b>	802.11ac-80	<b>Duty Cycle (%):</b>	99
<b>Data Rate:</b>	29.3 Mbit/s	<b>Antenna Gain (dBi):</b>	5.90
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y):</b>	Not Applicable
<b>Channel frequency (MHz):</b>	5210.0	<b>Tested By:</b>	SB
<b>Engineering Test Notes:</b>			

#### Test Measurement Results

Num	Frequency MHz	Raw dBμV	Cable Loss	AF dB	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
#1	5150.00	58.64	6.08	-11.59	53.13	Max Avg	Vertical	95	-4	54.0	-0.9	Pass
#2	5150.00	72.51	6.08	-11.59	67.00	Max Peak	Vertical	95	-4	74.0	-7.0	Pass

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



**Title:** Actiontec Electronics Inc. M6240V  
**To:** FCC CFR 47 Part 15 Subpart E 15.407  
**Serial #:** ATEC06-11b Rev A  
**Issue Date:** 28th July 2015  
**Page:** 39 of 60

#### Equipment Configuration for Restricted Lower Band-Edge Emissions

<b>Variant:</b>	802.11n HT-20	<b>Duty Cycle (%):</b>	99
<b>Data Rate:</b>	6.5 Mbit/s	<b>Antenna Gain (dBi):</b>	5.90
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y):</b>	Not Applicable
<b>Channel frequency (MHz):</b>	5180.0	<b>Tested By:</b>	SB
<b>Engineering Test Notes:</b>			

#### Test Measurement Results

Num	Frequency MHz	Raw dBμV	Cable Loss	AF dB	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
#1	5150.00	54.30	6.08	-11.59	48.79	Max Avg	Vertical	108	88	54.0	-5.2	Pass
#2	5150.00	66.82	6.08	-11.59	61.31	Max Peak	Vertical	108	88	74.0	-12.7	Pass

#### Equipment Configuration for Restricted Lower Band-Edge Emissions

<b>Variant:</b>	802.11n HT-40	<b>Duty Cycle (%):</b>	99
<b>Data Rate:</b>	13.5 Mbit/s	<b>Antenna Gain (dBi):</b>	5.90
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y):</b>	Not Applicable
<b>Channel frequency (MHz):</b>	5190.0	<b>Tested By:</b>	SB
<b>Engineering Test Notes:</b>			

#### Test Measurement Results

Num	Frequency MHz	Raw dBμV	Cable Loss	AF dB	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
#1	5148.70	70.22	6.08	-11.59	64.71	Max Peak	Vertical	108	88	74.0	-9.3	Pass
#2	5150.00	56.98	6.08	-11.59	51.47	Max Avg	Vertical	108	88	54.0	-2.5	Pass

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



**Title:** Actiontec Electronics Inc. M6240V  
**To:** FCC CFR 47 Part 15 Subpart E 15.407  
**Serial #:** ATEC06-11b Rev A  
**Issue Date:** 28th July 2015  
**Page:** 40 of 60

#### Equipment Configuration for Restricted Lower Band-Edge Emissions

<b>Variant:</b>	802.11a	<b>Duty Cycle (%):</b>	99
<b>Data Rate:</b>	6 Mbit/s	<b>Antenna Gain (dBi):</b>	5.90
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y):</b>	Not Applicable
<b>Channel frequency (MHz):</b>	5320.0	<b>Tested By:</b>	SB
<b>Engineering Test Notes:</b>			

#### Test Measurement Results

Num	Frequency MHz	Raw dBμV	Cable Loss	AF dB	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
#1	5454.27	67.07	6.25	-11.23	62.09	Max Peak	Vertical	95	-4	74.0	-11.9	Pass
#2	5460.00	54.60	6.26	-11.22	49.64	Max Avg	Vertical	95	-4	54.0	-4.4	Pass

#### Equipment Configuration for Restricted Lower Band-Edge Emissions

<b>Variant:</b>	802.11ac-80	<b>Duty Cycle (%):</b>	99
<b>Data Rate:</b>	29.30 Mbit/s	<b>Antenna Gain (dBi):</b>	5.90
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y):</b>	Not Applicable
<b>Channel frequency (MHz):</b>	5290.0	<b>Tested By:</b>	SB
<b>Engineering Test Notes:</b>			

#### Test Measurement Results

Num	Frequency MHz	Raw dBμV	Cable Loss	AF dB	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
#1	5456.69	71.25	6.26	-11.23	66.28	Max Peak	Vertical	95	-4	74.0	-7.7	Pass
#2	5459.34	57.28	6.26	-11.22	52.32	Max Avg	Vertical	95	-4	54.0	-1.7	Pass

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.





**Title:** Actiontec Electronics Inc. M6240V  
**To:** FCC CFR 47 Part 15 Subpart E 15.407  
**Serial #:** ATEC06-11b Rev A  
**Issue Date:** 28th July 2015  
**Page:** 41 of 60

#### Equipment Configuration for Restricted Lower Band-Edge Emissions

<b>Variant:</b>	802.11n HT-20	<b>Duty Cycle (%):</b>	99
<b>Data Rate:</b>	6.5 Mbit/s	<b>Antenna Gain (dBi):</b>	5.90
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y):</b>	Not Applicable
<b>Channel frequency (MHz):</b>	5320.0	<b>Tested By:</b>	SB
<b>Engineering Test Notes:</b>			

#### Test Measurement Results

Num	Frequency MHz	Raw dBμV	Cable Loss	AF dB	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
#1	5459.78	66.36	6.26	-11.22	61.40	Max Peak	Vertical	95	-4	74.0	-12.6	Pass
#2	5460.00	54.10	6.26	-11.22	49.14	Max Avg	Vertical	95	-4	54.0	-4.9	Pass

#### Equipment Configuration for Restricted Lower Band-Edge Emissions

<b>Variant:</b>	802.11n HT-40	<b>Duty Cycle (%):</b>	99
<b>Data Rate:</b>	13.5 Mbit/s	<b>Antenna Gain (dBi):</b>	5.90
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y):</b>	Not Applicable
<b>Channel frequency (MHz):</b>	5310.0	<b>Tested By:</b>	SB
<b>Engineering Test Notes:</b>			

#### Test Measurement Results

Num	Frequency MHz	Raw dBμV	Cable Loss	AF dB	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
#1	5460.00	50.85	6.26	-11.22	45.89	Max Avg	Vertical	95	-4	54.0	-8.1	Pass
#2	5460.00	64.44	6.26	-11.22	59.48	Max Peak	Vertical	95	-4	74.0	-14.5	Pass

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



**Title:** Actiontec Electronics Inc. M6240V  
**To:** FCC CFR 47 Part 15 Subpart E 15.407  
**Serial #:** ATEC06-11b Rev A  
**Issue Date:** 28th July 2015  
**Page:** 42 of 60

#### Equipment Configuration for Restricted Upper Band-Edge Emissions

<b>Variant:</b>	802.11a	<b>Duty Cycle (%):</b>	99
<b>Data Rate:</b>	6 Mbit/s	<b>Antenna Gain (dBi):</b>	5.90
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y):</b>	Not Applicable
<b>Channel frequency (MHz):</b>	5500.0	<b>Tested By:</b>	SB
<b>Engineering Test Notes:</b>			

#### Test Measurement Results

Num	Frequency MHz	Raw dBμV	Cable Loss	AF dB	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
#1	5351.76	70.22	6.16	-11.03	65.35	Max Peak	Vertical	112	308	74.0	-8.7	Pass
#2	5353.53	56.91	6.16	-11.04	52.03	Max Avg	Vertical	112	308	54.0	-2.0	Pass

#### Equipment Configuration for Restricted Upper Band-Edge Emissions

<b>Variant:</b>	802.11ac 80	<b>Duty Cycle (%):</b>	99
<b>Data Rate:</b>	29.30 Mbit/s	<b>Antenna Gain (dBi):</b>	5.90
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y):</b>	Not Applicable
<b>Channel frequency (MHz):</b>	5530.0	<b>Tested By:</b>	SB
<b>Engineering Test Notes:</b>			

#### Test Measurement Results

Num	Frequency MHz	Raw dBμV	Cable Loss	AF dB	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
#1	5350.00	57.25	6.16	-11.02	52.39	Max Avg	Vertical	112	308	54.0	-1.6	Pass
#2	5361.24	72.01	6.17	-11.06	67.12	Max Peak	Vertical	112	308	74.0	-6.9	Pass

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



**Title:** Actiontec Electronics Inc. M6240V  
**To:** FCC CFR 47 Part 15 Subpart E 15.407  
**Serial #:** ATEC06-11b Rev A  
**Issue Date:** 28th July 2015  
**Page:** 43 of 60

#### Equipment Configuration for Restricted Upper Band-Edge Emissions

<b>Variant:</b>	802.11n HT-20	<b>Duty Cycle (%):</b>	99
<b>Data Rate:</b>	6.5 Mbit/s	<b>Antenna Gain (dBi):</b>	5.90
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y):</b>	Not Applicable
<b>Channel frequency (MHz):</b>	5500.0	<b>Tested By:</b>	SB
<b>Engineering Test Notes:</b>			

#### Test Measurement Results

Num	Frequency MHz	Raw dBμV	Cable Loss	AF dB	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
#1	5351.76	71.36	6.16	-11.03	66.49	Max Peak	Vertical	112	308	74.0	-7.5	Pass
#2	5352.42	56.81	6.16	-11.03	51.94	Max Avg	Vertical	112	308	54.0	-2.1	Pass

#### Equipment Configuration for Restricted Upper Band-Edge Emissions

<b>Variant:</b>	802.11n HT-40	<b>Duty Cycle (%):</b>	99
<b>Data Rate:</b>	13.5 Mbit/s	<b>Antenna Gain (dBi):</b>	5.90
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y):</b>	Not Applicable
<b>Channel frequency (MHz):</b>	5510.0	<b>Tested By:</b>	SB
<b>Engineering Test Notes:</b>			

#### Test Measurement Results

Num	Frequency MHz	Raw dBμV	Cable Loss	AF dB	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
#1	5350.00	56.67	6.16	-11.02	51.81	Max Avg	Vertical	112	308	54.0	-2.2	Pass
#2	5350.00	72.26	6.16	-11.02	67.40	Max Peak	Vertical	112	308	74.0	-6.6	Pass

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



**Title:** Actiontec Electronics Inc. M6240V  
**To:** FCC CFR 47 Part 15 Subpart E 15.407  
**Serial #:** ATEC06-11b Rev A  
**Issue Date:** 28th July 2015  
**Page:** 44 of 60

---

### 5.8 GHz Band-Edge Emissions

Emissions for EUT operating in Frequency Band 5725 – 5850 MHz

**Limit -27 dBm/MHz**

	5725 MHz		5850 MHz	
	Emission level (dBm/MHz)	Power Setting	Emission level (dBm/MHz)	Power Setting
Operational Mode				
<b>a</b>	-40.00	23	-38.66	23
<b>n HT-20</b>	-40.00	23	-38.66	23
<b>n HT-40</b>	-38.66	23	-38.66	23
<b>ac-80</b>	-40.00	23	-40.00	23

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



### 9.1.3. Digital Emissions

#### **FCC, Part 15 Subpart C §15.205/ §15.209**

##### **Test Procedure**

Testing 30M-1 GHz was performed in a 3-meter anechoic chamber using a CISPR compliant receiver. Preliminary radiated emissions were measured on every azimuth and with the receiving antenna in both horizontal and vertical polarizations. To further maximize emissions the receive antenna was varied between 1 and 4 meters. The emissions are recorded with receiver in peak hold mode. Emissions closest to the limits are measured in the quasi-peak mode with the tuned receiver using a bandwidth of 120 kHz. Only the highest emissions relative to the limit are listed. The anechoic chamber test set-up is identified in Section 6 Test Set-Up Photographs.

##### **Field Strength Calculation**

The field strength is calculated by adding the Antenna Factor and Cable Loss, and subtracting Amplifier Gain from the measured reading. In this test facility, the Antenna Factor, Cable Loss, and Amplifier Gains are loaded into the Rohde & Schwarz Receiver and the corrected field strength can be read directly on the receiver.

$$FS = R + AF + CORR$$

where:

FS = Field Strength

R = Measured Receiver Input Amplitude

AF = Antenna Factor

CORR = Correction Factor = CL – AG + NFL

CL = Cable Loss

AG = Amplifier Gain

For example:

Given a Receiver input reading of 51.5dB $\mu$ V; Antenna Factor of 8.5dB; Cable Loss of 1.3dB; Falloff Factor of 0dB, an Amplifier Gain of 26dB and Notch Filter Loss of 1dB. The Field Strength of the measured emission is:

$$FS = 51.5 + 8.5 + 1.3 - 26.0 + 1 = 36.3\text{dB}\mu\text{V/m}$$

Conversion between dB $\mu$ V/m (or dB $\mu$ V) and  $\mu$ V/m (or  $\mu$ V) are done as:

$$\text{Level (dB}\mu\text{V/m)} = 20 * \text{Log (level (}\mu\text{V/m))}$$


$$40 \text{ dB}\mu\text{V/m} = 100\mu\text{V/m}$$

$$48 \text{ dB}\mu\text{V/m} = 250\mu\text{V/m}$$



**Title:** Actiontec Electronics Inc. M6240V  
**To:** FCC CFR 47 Part 15 Subpart E 15.407  
**Serial #:** ATEC06-11b Rev A  
**Issue Date:** 28th July 2015  
**Page:** 46 of 60

Test Freq.	2.4/5GHz	Engineer	SB
Variant	Digital Emissions	Temp (°C)	19.5
Freq. Range	30 MHz - 1000 MHz	Rel. Hum.(%)	49
Power Setting	idle	Press. (mBars)	998
Antenna	Integral		
Test Notes 1	S/N:GBEA5190700001:Model:M6240V; Part 15B;		
Test Notes 2	F/W:		

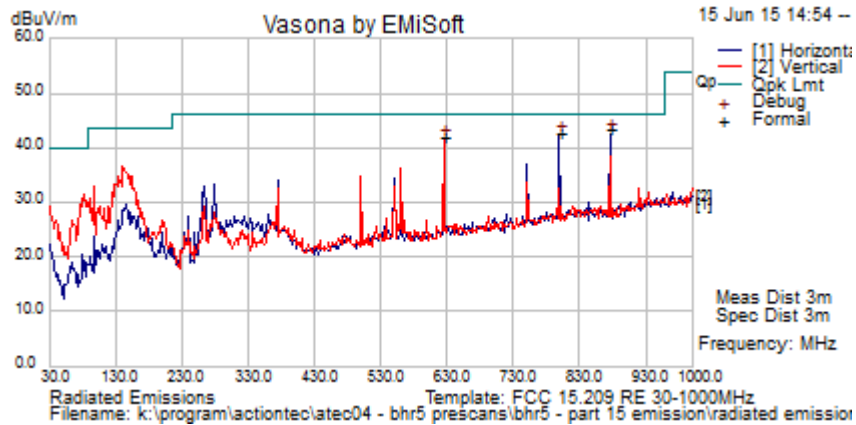

#### Formally measured emission peaks

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
874.995	45.1	6.3	-8.0	43.3	Quasi Max	H	99	266	46	-2.7	Pass	
799.204	45.5	6.1	-8.8	42.8	Quasi Max	H	99	320	46	-3.2	Pass	
624.995	47.3	5.7	-10.9	42.0	Quasi Max	V	100	280	46	-4.0	Pass	
Legend: DIG = Digital Device Emission; TX = Transmitter Emission; FUND = Fundamental Frequency												
NRB = Non-Restricted Band, Limit is 20 dB below Fundamental; RB = Restricted Band												

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



**Title:** Actiontec Electronics Inc. M6240V  
**To:** FCC CFR 47 Part 15 Subpart E 15.407  
**Serial #:** ATEC06-11b Rev A  
**Issue Date:** 28th July 2015  
**Page:** 47 of 60

---

## **A. APPENDIX - GRAPHICAL IMAGES**

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

## A.1. Radiated

### A.1.1. Restricted Band Emissions




#### RADIATED SPURIOUS - RESTRICTED BAND EMISSIONS

Variant: 802.11a, Test Freq: 5180.00 MHz, Antenna: Galtronics Custom PCB, Power Setting: 23

Measurement Distance: 3m

Sweep Time: 170 ms

RBW: 1 MHz  
VBW: 3 MHz

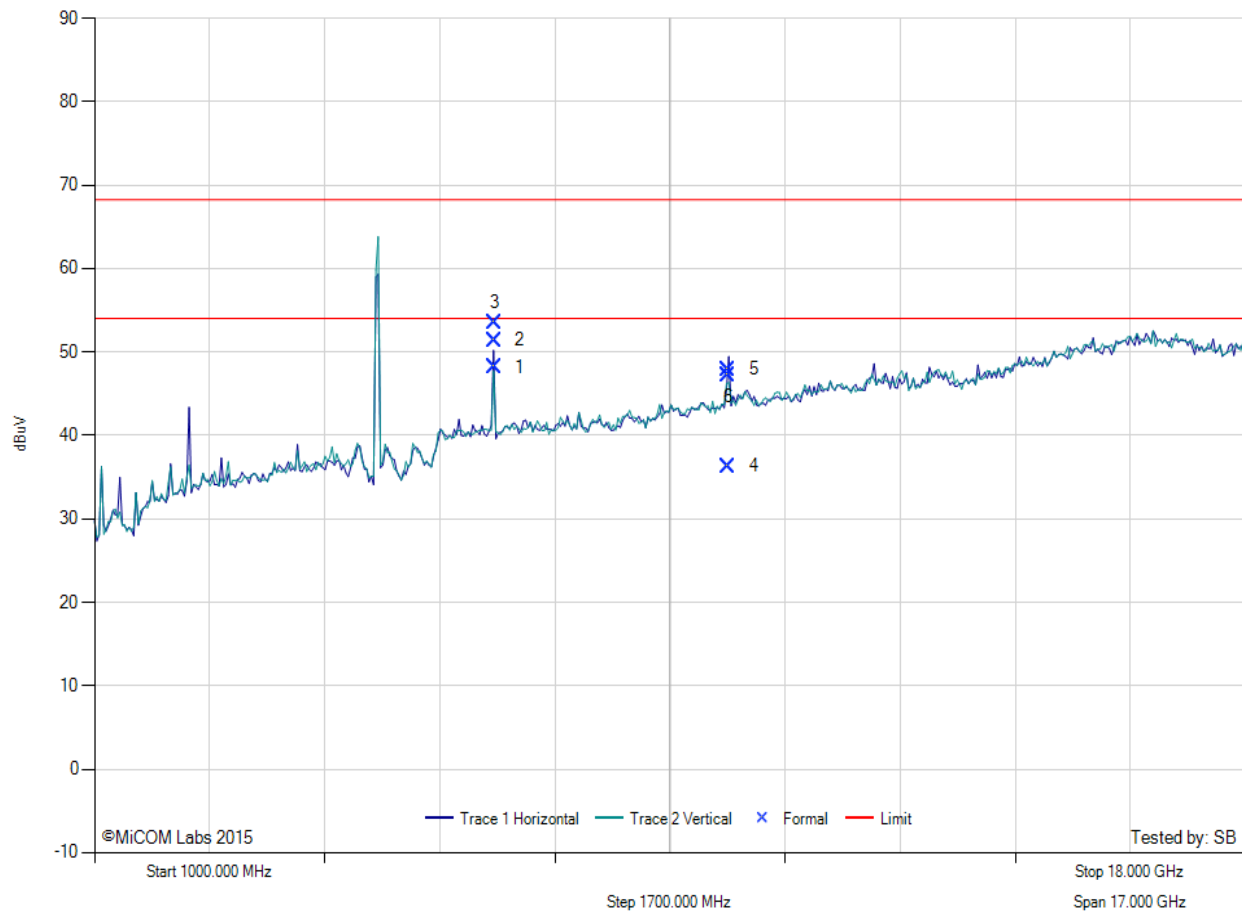

Num	Frequency MHz	Raw dBμV	Cable Loss	AF dB	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
1	6906.58	48.54	7.15	-7.54	48.15	Peak (Scan)	Horizontal	100	0	0.0	--	
2	6906.58	51.77	7.15	-7.54	51.38	Max Avg	Horizontal	103	331	54.0	-2.6	Pass
3	6906.58	53.83	7.15	-7.54	53.44	Max Peak	Horizontal	103	331	68.2	-14.8	Pass
4	10366.21	32.51	9.03	-5.23	36.31	Max Avg	Horizontal	100	287	54.0	-17.7	Pass
5	10366.21	44.12	9.03	-5.23	47.92	Max Peak	Horizontal	100	287	68.2	-20.3	Pass
6	10366.21	43.38	9.03	-5.23	47.18	Peak (Scan)	Horizontal	100	0	0.0	--	

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




### RADIATED SPURIOUS - RESTRICTED BAND EMISSIONS

Variant: 802.11a, Test Freq: 5200.00 MHz, Antenna: Galtronics Custom PCB, Power Setting: 23

Measurement Distance: 3m

Sweep Time: 170 ms

RBW: 1 MHz  
VBW: 3 MHz

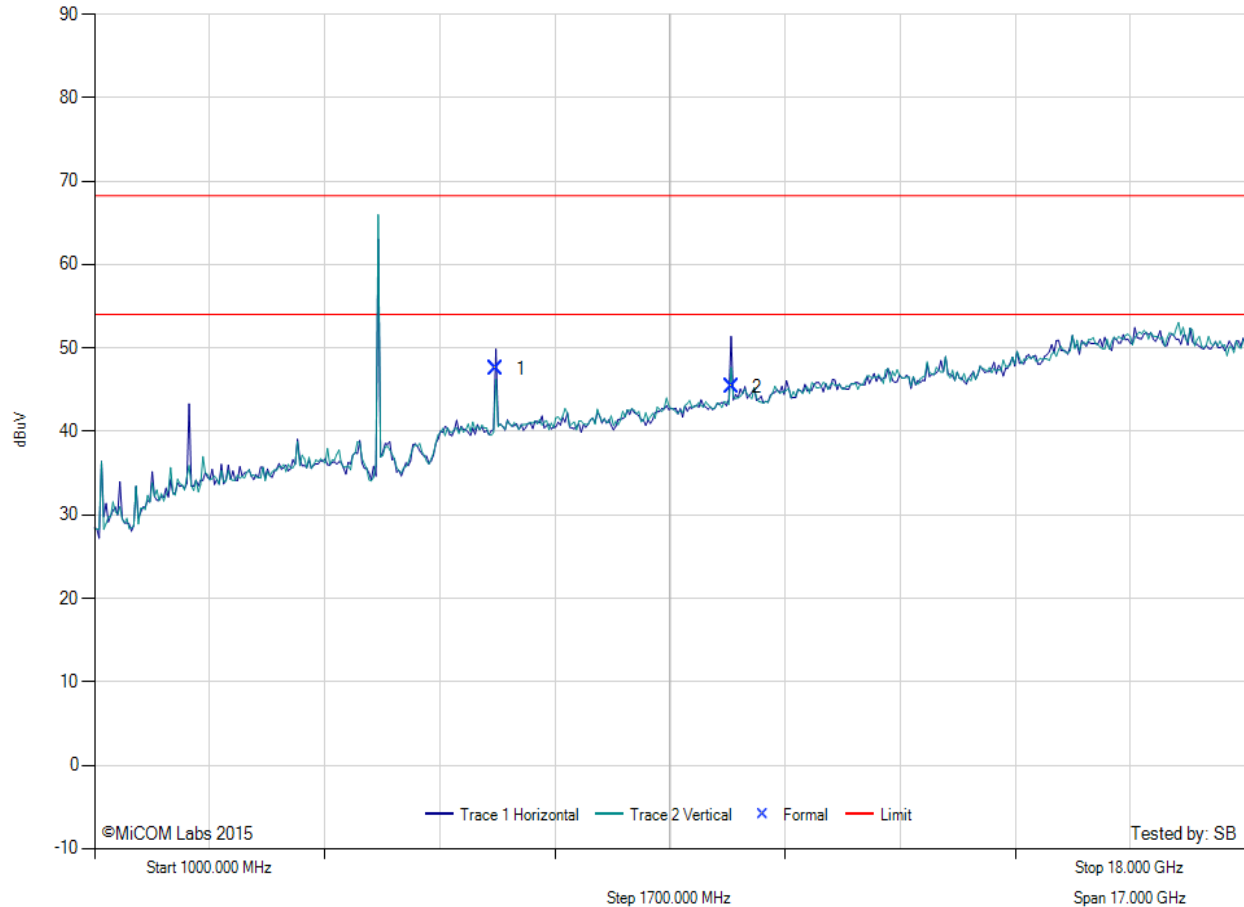

Num	Frequency MHz	Raw dBμV	Cable Loss	AF dB	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
1	6933.35	47.88	7.13	-7.49	47.52	Peak (Scan)	Horizontal	100	0	0.0	--	
2	10406.86	41.15	9.17	-4.99	45.33	Peak (Scan)	Horizontal	100	0	0.0	--	

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.


# RADIATED SPURIOUS - RESTRICTED BAND EMISSIONS

Variant: 802.11a, Test Freq: 5240.00 MHz, Antenna: Galtronics Custom PCB, Power Setting: 23

Measurement Distance: 3m

Sweep Time: 170 ms

RBW: 1 MHz  
VBW: 3 MHz

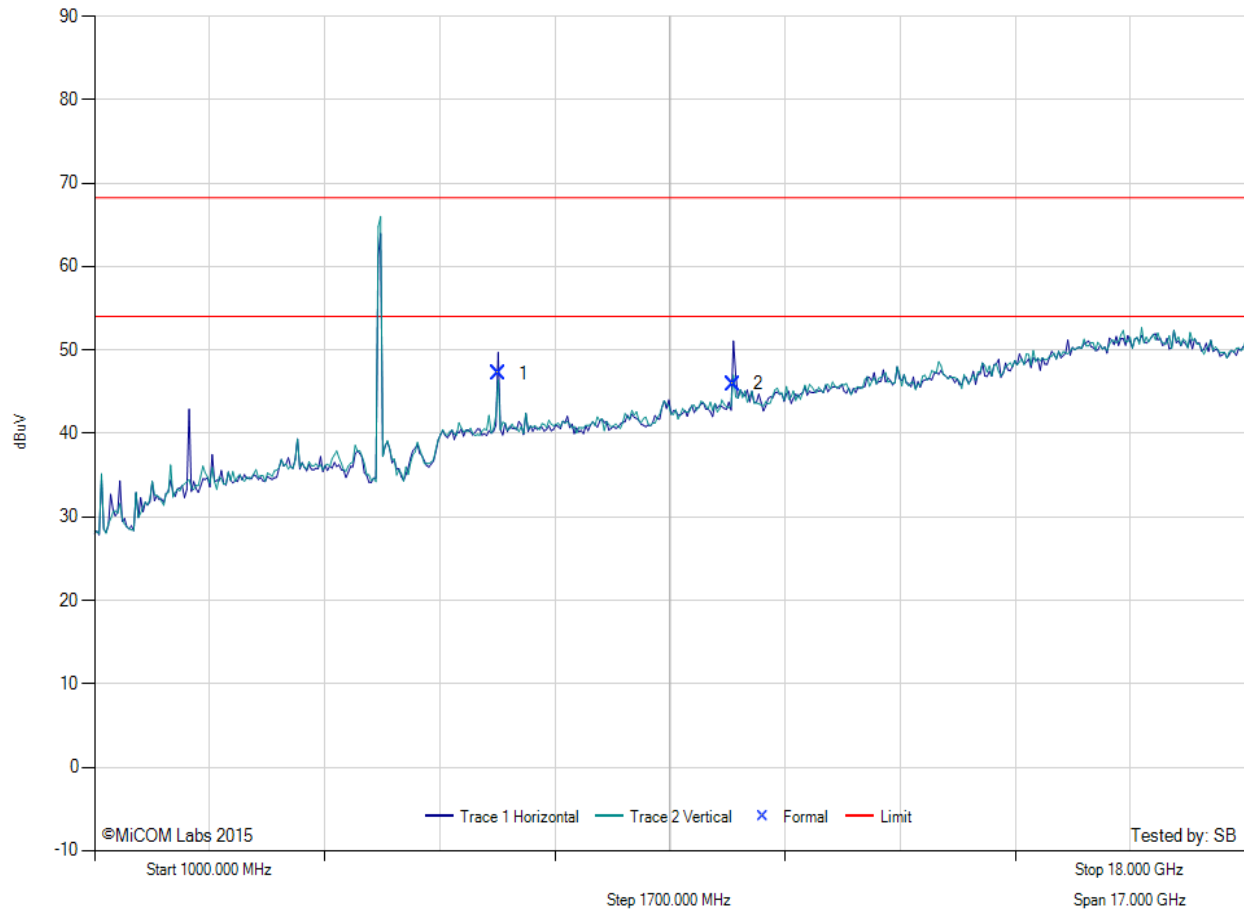

Num	Frequency MHz	Raw dBμV	Cable Loss	AF dB	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
1	6960.04	47.30	7.33	-7.45	47.18	Peak (Scan)	Horizontal	100	0	0.0	--	
2	10440.20	41.56	9.09	-4.75	45.90	Peak (Scan)	Horizontal	100	0	0.0	--	

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.


### RADIATED SPURIOUS - RESTRICTED BAND EMISSIONS

Variant: 802.11a, Test Freq: 5260.00 MHz, Antenna: Galtronics Custom PCB, Power Setting: 23

Measurement Distance: 3m

Sweep Time: 170 ms

RBW: 1 MHz  
VBW: 3 MHz

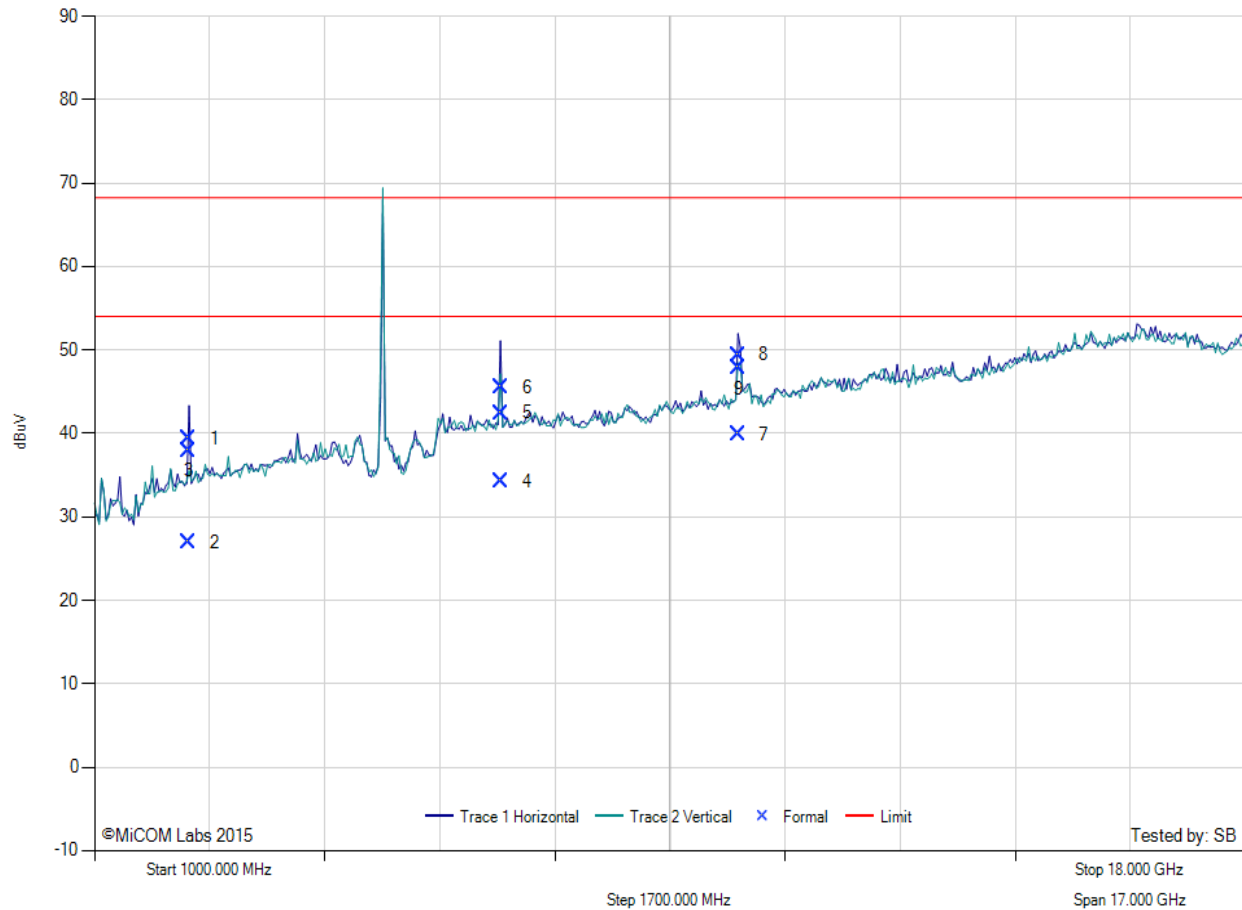

Num	Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail
1	2397.30	47.17	4.03	-11.85	39.35	Peak (Scan)	Horizontal	100	0	0.0	--	
2	2397.30	34.73	4.03	-11.85	26.91	Max Avg	Horizontal	126	297	54.0	-27.1	Pass
3	2397.30	45.76	4.03	-11.85	37.94	Max Peak	Horizontal	126	297	68.2	-30.3	Pass
4	7013.42	34.42	7.21	-7.42	34.21	Max Avg	Horizontal	100	86	54.0	-19.8	Pass
5	7013.42	42.65	7.21	-7.42	42.44	Max Peak	Horizontal	100	86	68.2	-25.8	Pass
6	7013.42	45.73	7.21	-7.42	45.52	Peak (Scan)	Horizontal	100	0	0.0	--	
7	10515.75	34.86	9.21	-4.23	39.84	Max Avg	Horizontal	100	237	54.0	-14.2	Pass
8	10515.75	44.43	9.21	-4.23	49.41	Max Peak	Horizontal	100	237	68.2	-18.8	Pass
9	10515.75	42.85	9.21	-4.23	47.83	Peak (Scan)	Horizontal	100	0	0.0	--	

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.


### RADIATED SPURIOUS - RESTRICTED BAND EMISSIONS

Variant: 802.11a, Test Freq: 5300.00 MHz, Antenna: Galtronics Custom PCB, Power Setting: 23

Measurement Distance: 3m

Sweep Time: 170 ms

RBW: 1 MHz  
VBW: 3 MHz

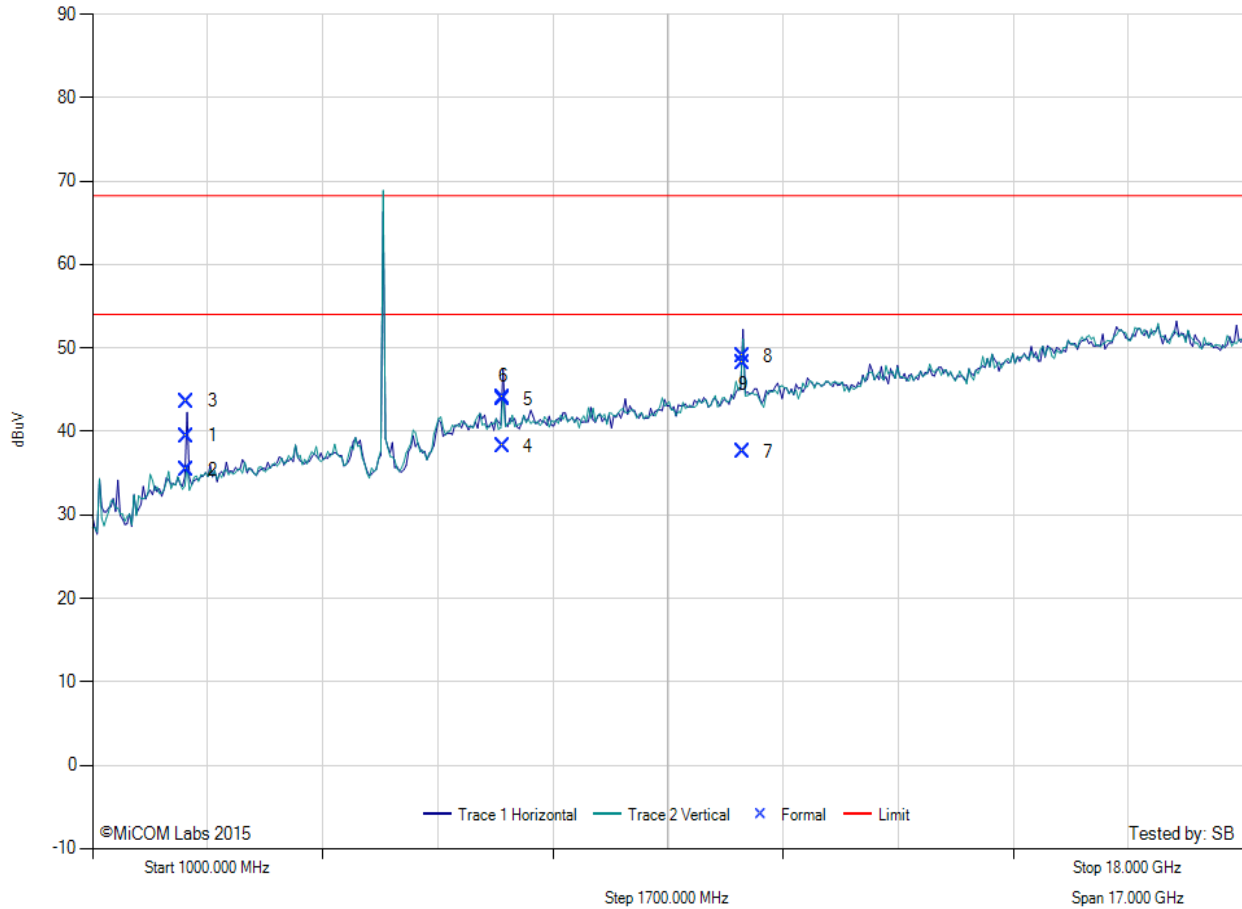

Num	Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail
1	2397.55	47.31	4.02	-11.85	39.48	Peak (Scan)	Horizontal	100	0	0.0	--	
2	2397.55	43.20	4.02	-11.85	35.37	Max Avg	Horizontal	120	314	54.0	-18.6	Pass
3	2397.55	51.45	4.02	-11.85	43.62	Max Peak	Horizontal	120	314	68.2	-24.6	Pass
4	7066.73	38.33	7.22	-7.34	38.21	Max Avg	Horizontal	104	103	54.0	-15.8	Pass
5	7066.73	43.99	7.22	-7.34	43.87	Max Peak	Horizontal	104	103	68.2	-24.4	Pass
6	7066.73	44.25	7.22	-7.34	44.13	Peak (Scan)	Horizontal	100	0	0.0	--	
7	10603.60	32.14	9.33	-3.92	37.55	Max Avg	Horizontal	138	241	54.0	-16.5	Pass
8	10603.60	43.58	9.33	-3.92	48.99	Max Peak	Horizontal	138	241	68.2	-19.2	Pass
9	10603.60	42.76	9.33	-3.92	48.17	Peak (Scan)	Horizontal	100	0	0.0	--	

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.


### RADIATED SPURIOUS - RESTRICTED BAND EMISSIONS

Variant: 802.11a, Test Freq: 5320.00 MHz, Antenna: Galtronics Custom PCB, Power Setting: 23

Measurement Distance: 3m

Sweep Time: 170 ms

RBW: 1 MHz  
VBW: 3 MHz

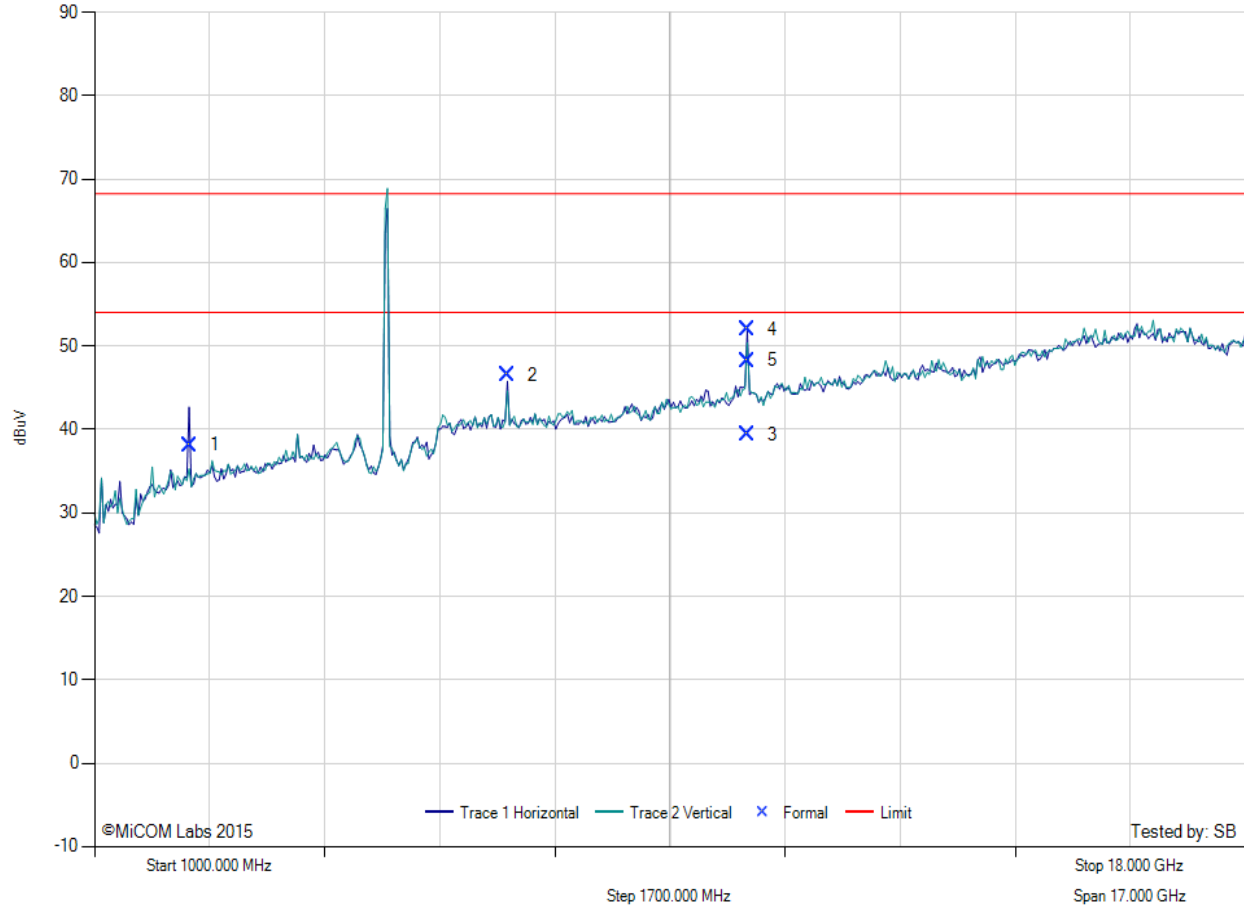

Num	Frequency MHz	Raw dBμV	Cable Loss	AF dB	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
1	2397.78	45.98	4.02	-11.85	38.15	Peak (Scan)	Horizontal	100	0	0.0	--	
2	7093.39	46.59	7.23	-7.33	46.49	Peak (Scan)	Horizontal	100	0	0.0	--	
3	10642.08	34.14	9.11	-3.89	39.36	Max Avg	Horizontal	100	241	54.0	-14.6	Pass
4	10642.08	46.77	9.11	-3.89	51.99	Max Peak	Horizontal	100	241	68.2	-16.2	Pass
5	10642.08	43.05	9.11	-3.89	48.27	Peak (Scan)	Horizontal	100	0	0.0	--	

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



**Title:** Actiontec Electronics Inc. M6240V  
**To:** FCC CFR 47 Part 15 Subpart E 15.407  
**Serial #:** ATEC06-11b Rev A  
**Issue Date:** 28th July 2015  
**Page:** 54 of 60




#### RADIATED SPURIOUS - RESTRICTED BAND EMISSIONS

Variant: 802.11a, Test Freq: 5500.00 MHz, Antenna: Galtronics Custom PCB, Power Setting: 23

Measurement Distance: 3m

Sweep Time: 170 ms

RBW: 1 MHz  
VBW: 3 MHz

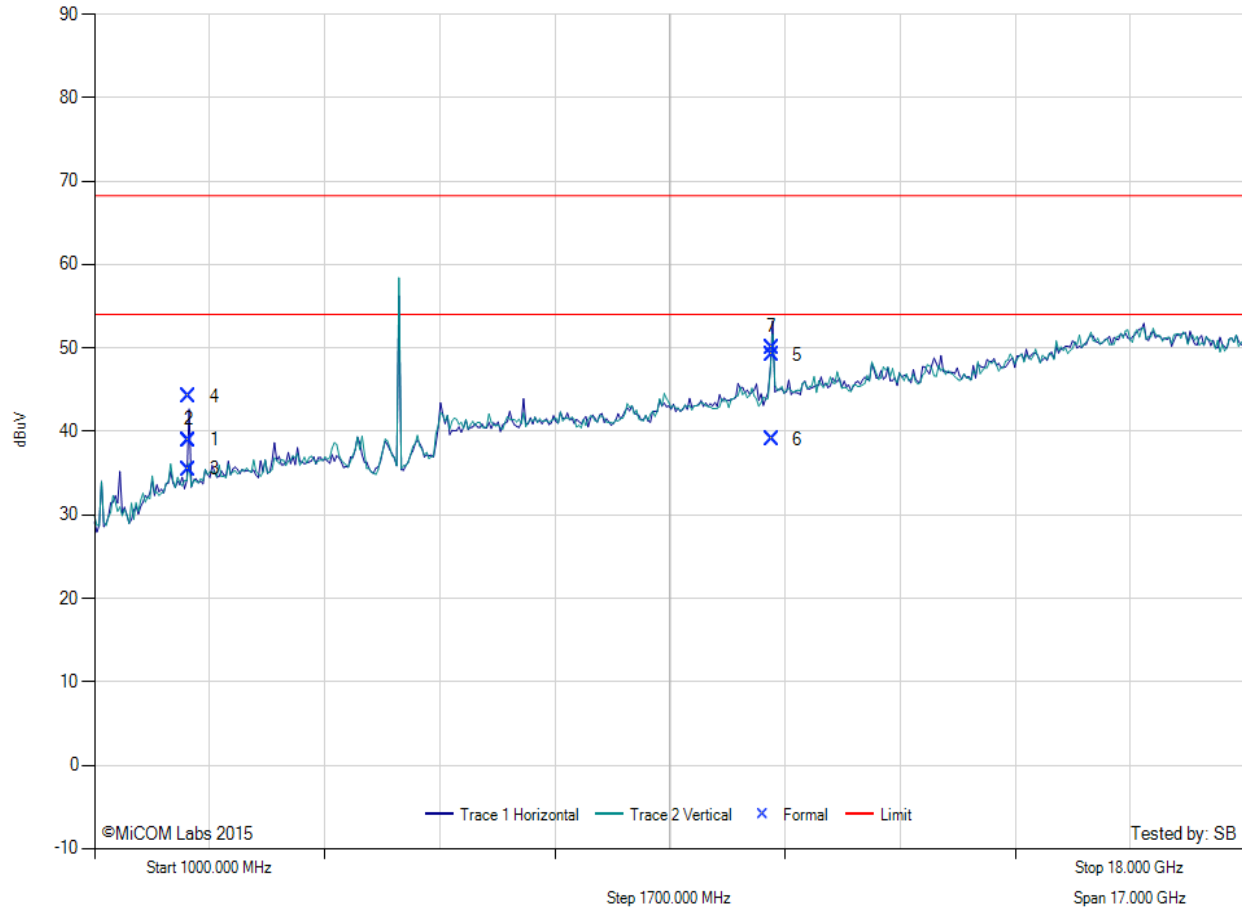

Num	Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail
1	2397.55	46.78	4.02	-11.85	38.95	Peak (Scan)	Horizontal	100	0	0.0	--	
2	2397.55	46.78	4.02	-11.85	38.95	Peak (Scan)	Horizontal	100	0	0.0	--	
3	2397.55	43.28	4.02	-11.85	35.45	Max Avg	Horizontal	120	321	54.0	-18.6	Pass
4	2397.55	52.03	4.02	-11.85	44.20	Max Peak	Horizontal	120	321	68.2	-24.0	Pass
5	11000.08	44.15	9.24	-4.24	49.15	Peak (Scan)	Horizontal	100	0	0.0	--	
6	11000.08	34.05	9.24	-4.24	39.05	Max Avg	Horizontal	100	209	54.0	-15.0	Pass
7	11000.08	45.10	9.24	-4.24	50.10	Max Peak	Horizontal	100	209	68.2	-18.1	Pass

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.


# RADIATED SPURIOUS - RESTRICTED BAND EMISSIONS

Variant: 802.11a, Test Freq: 5580.00 MHz, Antenna: Galtronics Custom PCB, Power Setting: 23

Measurement Distance: 3m

Sweep Time: 170 ms

RBW: 1 MHz  
VBW: 3 MHz

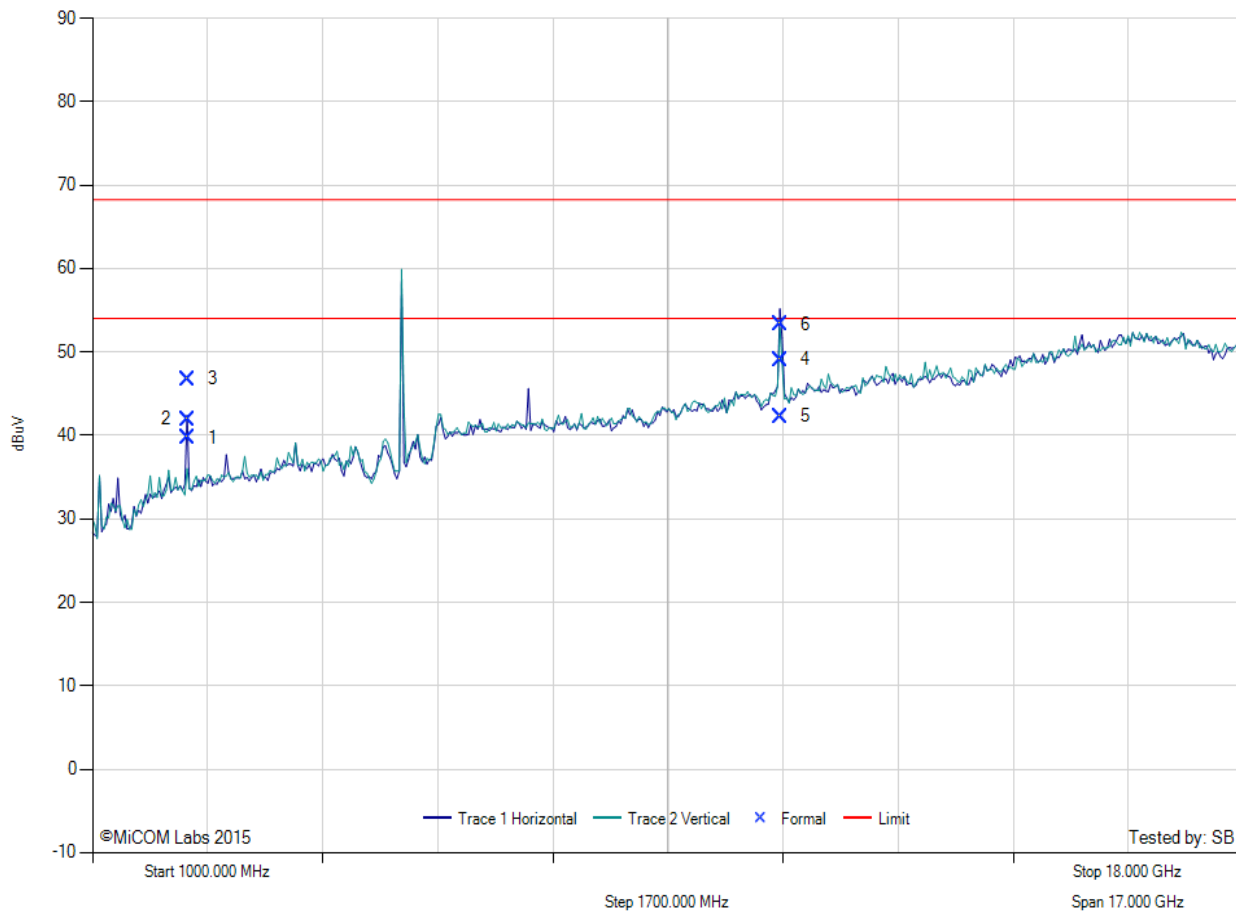

Num	Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail
1	2397.70	47.56	4.02	-11.85	39.73	Peak (Scan)	Horizontal	100	0	0.0	--	
2	2397.70	49.79	4.02	-11.85	41.96	Max Avg	Horizontal	123	297	54.0	-12.0	Pass
3	2397.70	54.58	4.02	-11.85	46.75	Max Peak	Horizontal	123	297	68.2	-21.5	Pass
4	11166.21	43.78	9.37	-4.07	49.08	Peak (Scan)	Horizontal	148	0	0.0	--	
5	11166.21	36.97	9.37	-4.07	42.27	Max Avg	Horizontal	117	229	54.0	-11.7	Pass
6	11166.21	47.96	9.37	-4.07	53.26	Max Peak	Horizontal	117	229	68.2	-15.0	Pass

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



**Title:** Actiontec Electronics Inc. M6240V  
**To:** FCC CFR 47 Part 15 Subpart E 15.407  
**Serial #:** ATEC06-11b Rev A  
**Issue Date:** 28th July 2015  
**Page:** 56 of 60




#### RADIATED SPURIOUS - RESTRICTED BAND EMISSIONS

Variant: 802.11a, Test Freq: 5720.00 MHz, Antenna: Galtronics Custom PCB, Power Setting: 23

Measurement Distance: 3m

Sweep Time: 170 ms

RBW: 1 MHz  
VBW: 3 MHz

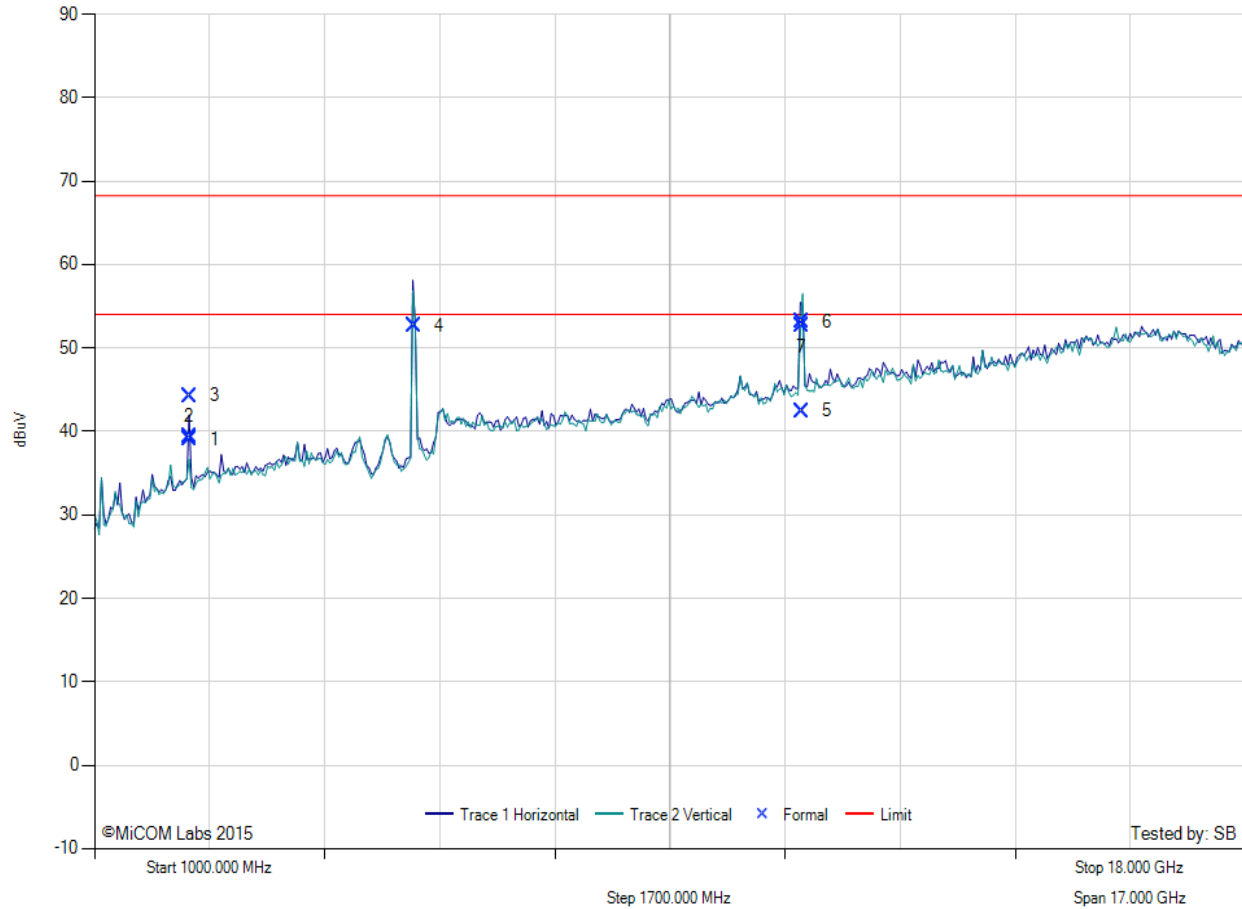

Num	Frequency MHz	Raw dBμV	Cable Loss	AF dB	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
1	2397.70	46.83	4.02	-11.85	39.00	Peak (Scan)	Horizontal	100	0	0.0	--	
2	2397.70	47.21	4.02	-11.85	39.38	Max Avg	Horizontal	100	282	54.0	-14.6	Pass
3	2397.70	52.09	4.02	-11.85	44.26	Max Peak	Horizontal	100	282	68.2	-24.0	Pass
4	5713.65	57.00	6.40	-10.76	52.64	Peak (Scan)	Horizontal	100	0	0.0	--	
5	11440.16	37.88	9.47	-4.93	42.42	Max Avg	Horizontal	107	75	54.0	-11.6	Pass
6	11440.16	48.62	9.47	-4.93	53.16	Max Peak	Horizontal	107	75	68.2	-15.1	Pass
7	11440.16	48.09	9.47	-4.93	52.63	Peak (Scan)	Horizontal	100	0	0.0	--	

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




### RADIATED SPURIOUS - RESTRICTED BAND EMISSIONS

Variant: 802.11a, Test Freq: 5745.00 MHz, Antenna: Galtronics Custom PCB, Power Setting: 23

Measurement Distance: 3m

Sweep Time: 170 ms

RBW: 1 MHz  
VBW: 3 MHz

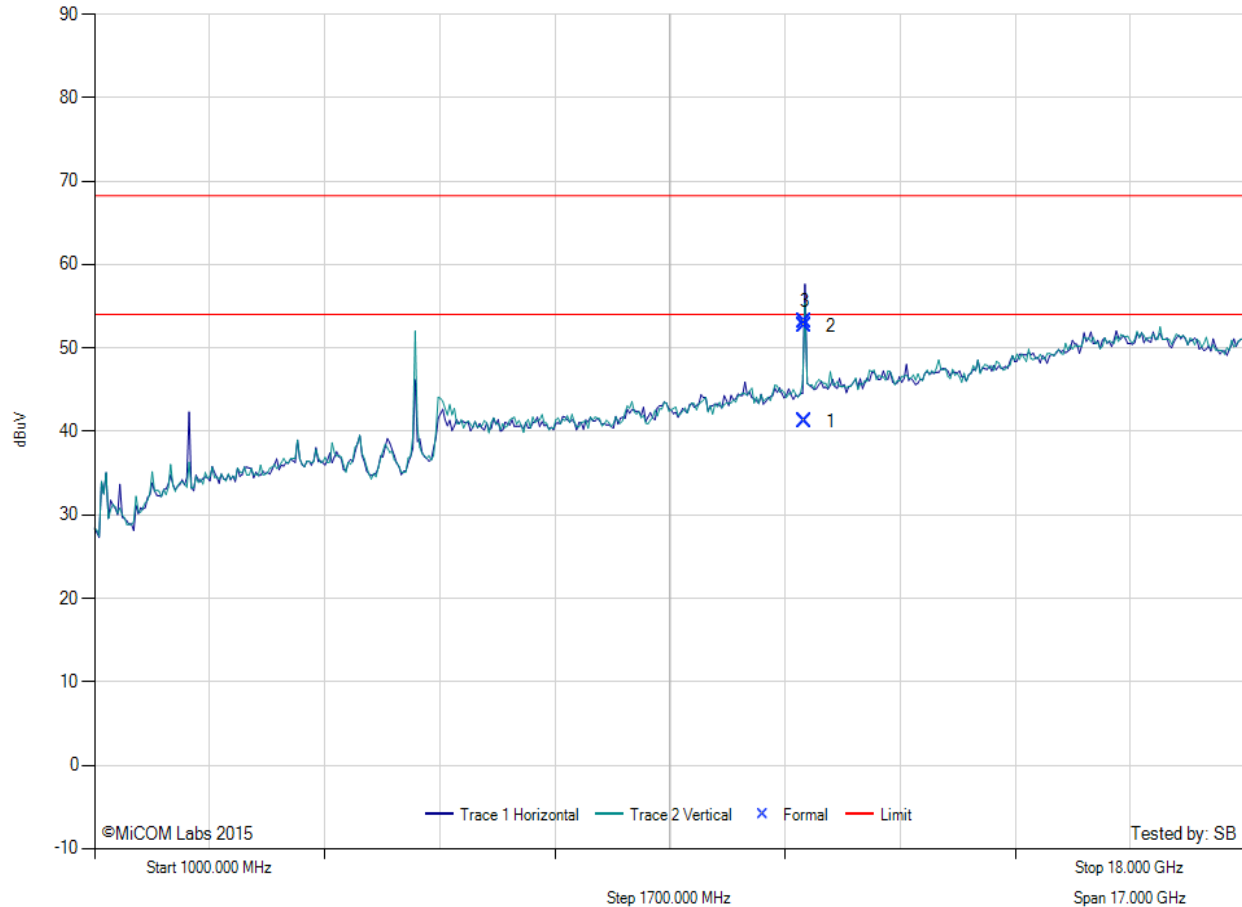

Num	Frequency MHz	Raw dBμV	Cable Loss	AF dB	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
1	11494.83	36.53	9.46	-4.83	41.16	Max Avg	Horizontal	100	192	54.0	-12.8	Pass
2	11494.83	47.99	9.46	-4.83	52.62	Max Peak	Horizontal	100	192	68.2	-15.6	Pass
3	11494.83	48.54	9.46	-4.83	53.17	Peak (Scan)	Horizontal	151	0	0.0	--	

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.


# RADIATED SPURIOUS - RESTRICTED BAND EMISSIONS

Variant: 802.11a, Test Freq: 5785.00 MHz, Antenna: Galtronics Custom PCB, Power Setting: 23

Measurement Distance: 3m

Sweep Time: 170 ms

RBW: 1 MHz  
VBW: 3 MHz

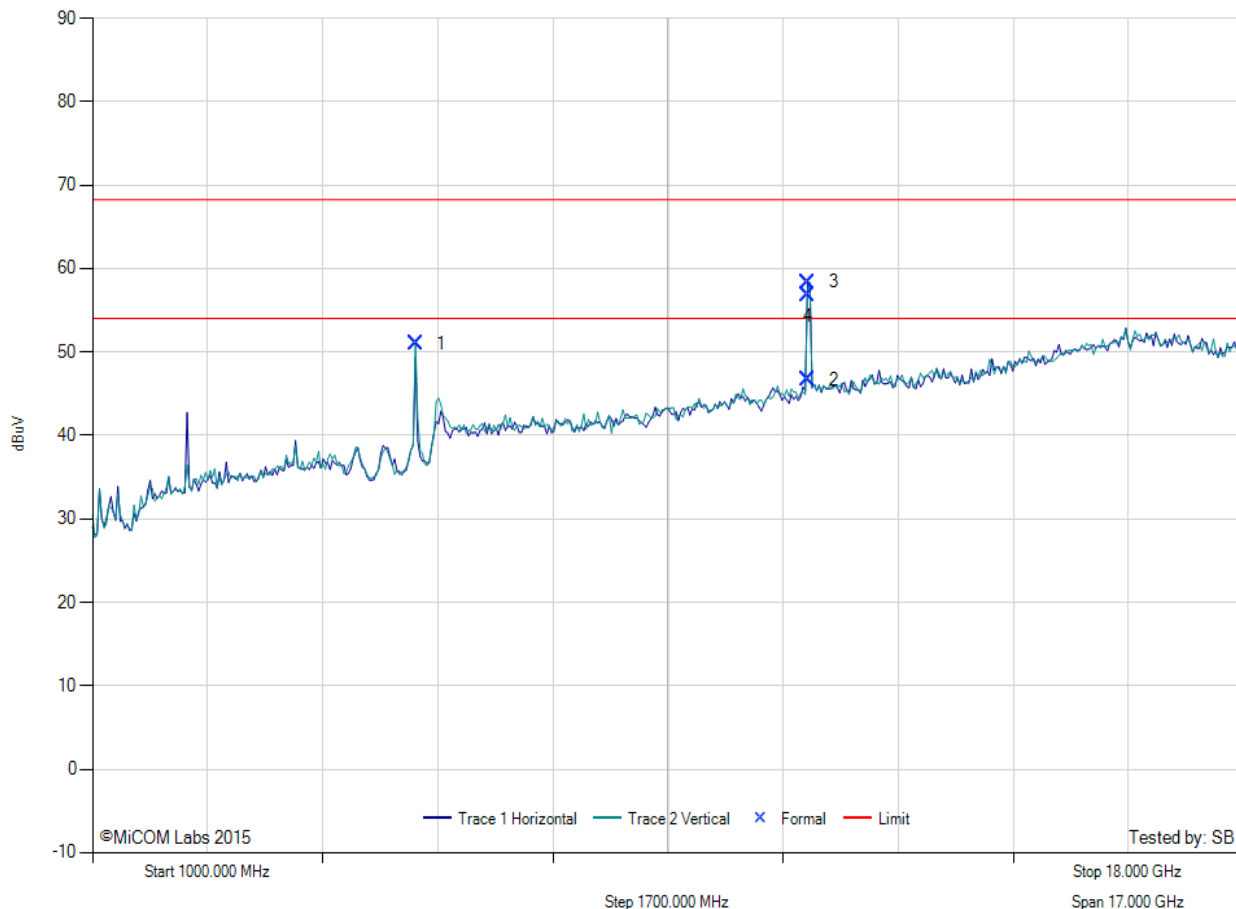

Num	Frequency MHz	Raw dBμV	Cable Loss	AF dB	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
1	5777.80	55.00	6.49	-10.48	51.01	Peak (Scan)	Horizontal	200	0	0.0	--	
2	11571.86	41.70	9.59	-4.63	46.66	Max Avg	Horizontal	110	46	54.0	-7.3	Pass
3	11571.86	53.42	9.59	-4.63	58.38	Max Peak	Horizontal	110	46	68.2	-9.9	Pass
4	11571.86	51.87	9.59	-4.63	56.83	Peak (Scan)	Horizontal	100	0	0.0	--	

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.


### RADIATED SPURIOUS - RESTRICTED BAND EMISSIONS

Variant: 802.11a, Test Freq: 5825.00 MHz, Antenna: Galtronics Custom PCB, Power Setting: 23

Measurement Distance: 3m

Sweep Time: 170 ms

RBW: 1 MHz  
VBW: 3 MHz

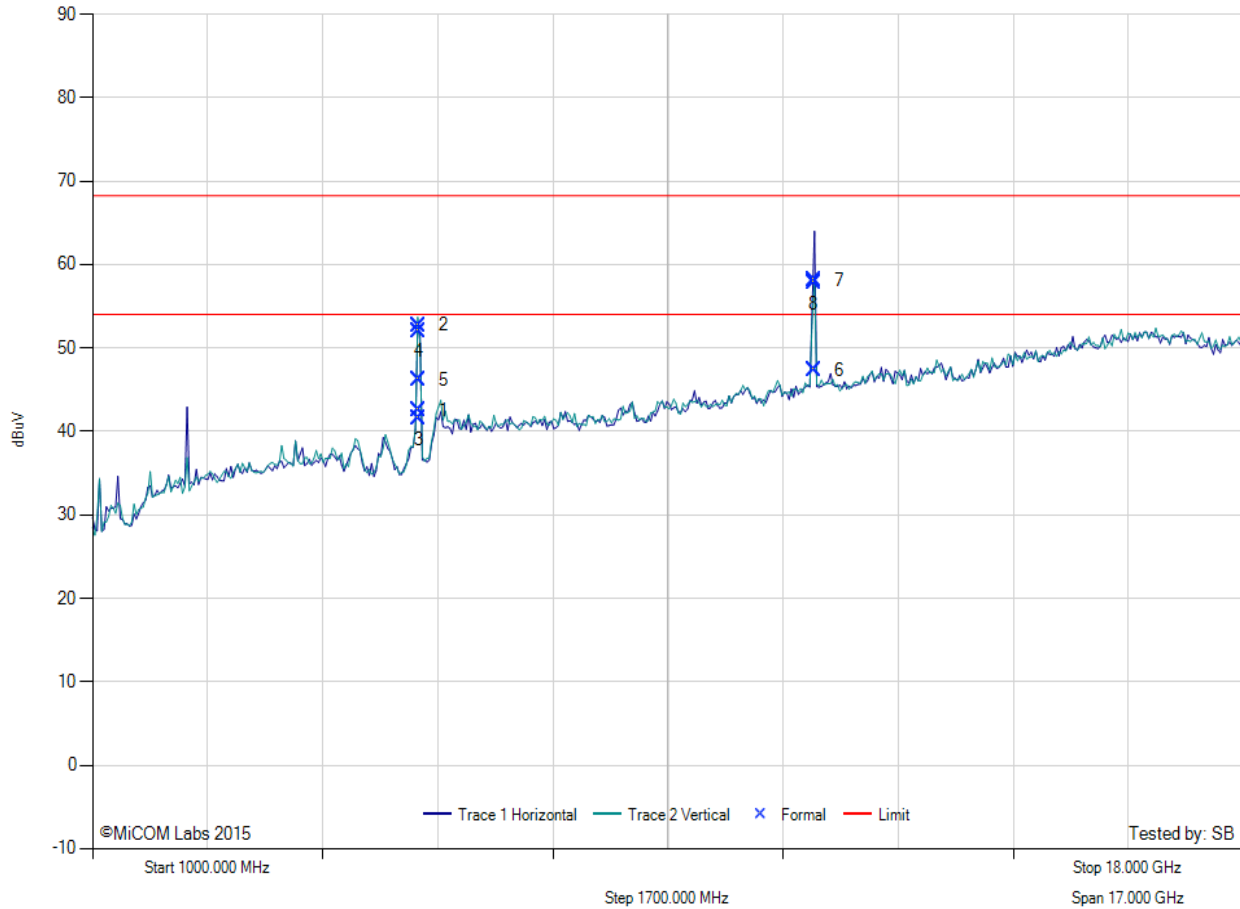

Num	Frequency MHz	Raw dBμV	Cable Loss	AF dB	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
1	5823.73	46.25	6.53	-10.25	42.53	Max Avg	Horizontal	177	24	54.0	-11.5	Pass
2	5823.73	56.47	6.53	-10.25	52.75	Max Peak	Horizontal	177	24	68.2	-15.5	Pass
3	5823.73	45.20	6.53	-10.25	41.48	Max Avg	Horizontal	100	20	54.0	-12.5	Pass
4	5823.73	55.76	6.53	-10.25	52.04	Max Peak	Horizontal	100	20	68.2	-16.2	Pass
5	5823.73	49.91	6.53	-10.25	46.19	Peak (Scan)	Horizontal	200	0	0.0	--	
6	11654.79	42.16	9.65	-4.46	47.35	Max Avg	Horizontal	135	48	54.0	-6.7	Pass
7	11654.79	52.97	9.65	-4.46	58.16	Max Peak	Horizontal	135	48	68.2	-10.1	Pass
8	11654.79	52.59	9.65	-4.46	57.78	Peak (Scan)	Horizontal	148	0	0.0	--	

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



575 Boulder Court  
Pleasanton, California 94566, USA  
Tel: +1 (925) 462 0304  
Fax: +1 (925) 462 0306  
[www.micomlabs.com](http://www.micomlabs.com)