

6. Band Edge Emissions

6.1 Test Standard and Limit

6.1.1 Test Standard
FCC Part 15.407(b)

6.1.2 Test Limit


Limits of unwanted emission out of the restricted bands

Frequency (MHz)	EIRP Limits (dBm)	Equivalent Field Strength at 3m (dBuV/m)
5150~5250	-27	68.3
5250~5350	-27	68.3
5470~5725	-27	68.3
5725~5825	-27(beyond 10MHz of the Band edge)	68.3
	-17(within 10MHz of the Band edge)	78.3

NOTE: The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength:

$$E = \frac{1000000 \sqrt{30P}}{3} \text{ uV/m, where P is the eirp (Watts)}$$

6.2 Test Setup

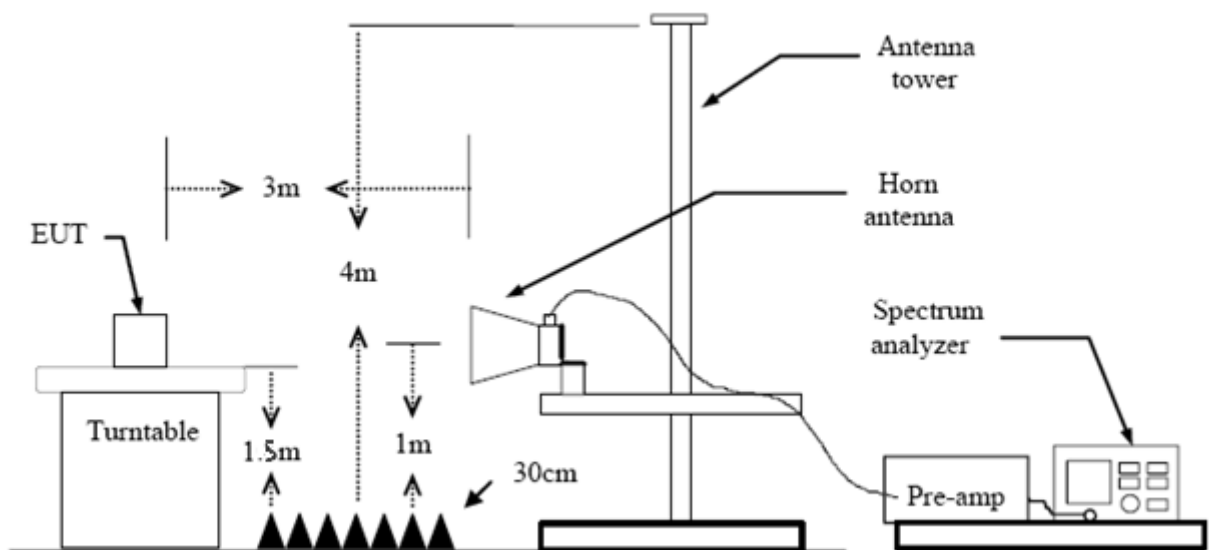

6.3 Test Procedure

(1) The measuring distance of 3m shall be used for measurements at frequency up to 1GHz. The

EUT was placed on a rotating 0.8m high above the ground, the table was rotated 360 degrees to determine the position of the highest radiation.

- (2) Measurements at frequency above 1GHz. The EUT was placed on a rotating 1.5m high above the ground. RF absorbers covered the ground plane with a minimum area of 3.0m by 3.0m between the EUT and measurement receiver antenna. The RF absorber shall not exceed 30cm in high above the conducting floor. The table was rotated 360 degrees to determine the position of the highest radiation.
- (3) The Test antenna shall vary between 1m and 4m, Both Horizontal and Vertical antenna are set to make measurement.
- (4) The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- (5) If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit Bellow 1 GHz, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed. But the Peak Value and average value both need to comply with applicable limit above 1 GHz.
- (6) Testing frequency range below 1GHz the measuring instrument use VBW=120 kHz with Quasi-peak detection.
- (7) Testing frequency range above 1GHz the measuring instrument use RBW=1 MHz and VBW=3 MHz with Peak Detector for Peak Values, and use RBW=1 MHz and VBW=10 Hz with Peak Detector for Average Values.
- (8) For the actual test configuration, please see the test setup photo.

6.4 EUT Operating Condition


The Equipment Under Test was set to Continual Transmitting in maximum power.

6.5 Test Data

Please see the next page.

(1) Radiation Test


EUT:	ScreenBeam 802.11 a/b/g/n/ac WiFi Module	Model Name :	SBRT8812AU
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 5V		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11a Mode5180 MHz (U-NII-1)		
Remark:	N/A		

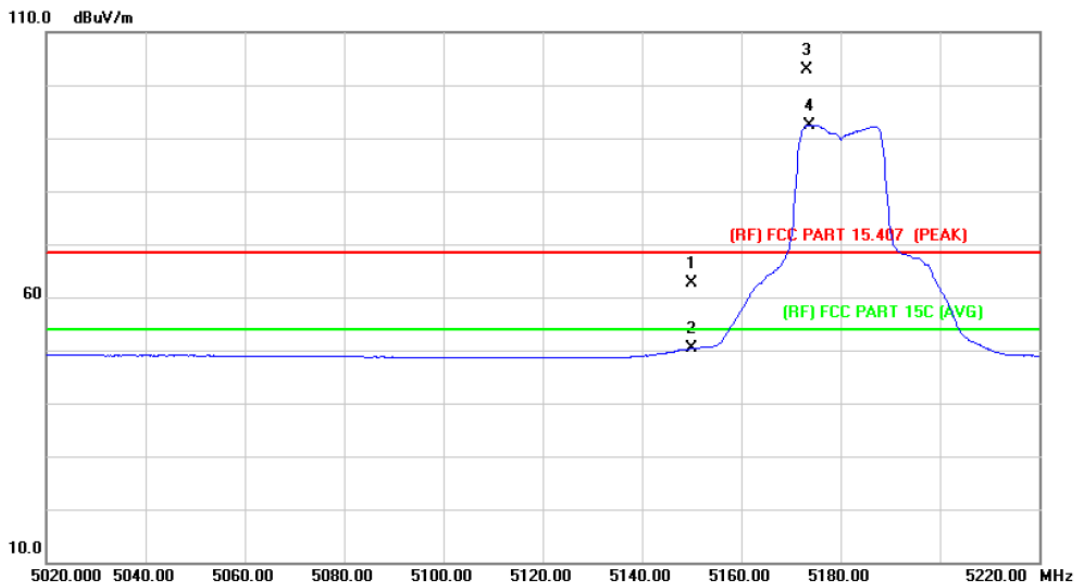

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1		5150.000	48.16	14.49	62.65	68.30	-5.65	peak
2		5150.000	35.89	14.49	50.38	54.00	-3.62	AVG
3	X	5173.200	88.33	14.47	102.80	Fundamental Frequency		peak
4	*	5173.600	77.98	14.46	92.44	Fundamental Frequency		AVG

Emission Level= Read Level+ Correct Factor


EUT:	ScreenBeam 802.11 a/b/g/n/ac WiFi Module	Model Name :	SBRT8812AU
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 5V		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11a Mode5180 MHz (U-NII-1)		
Remark:	N/A		

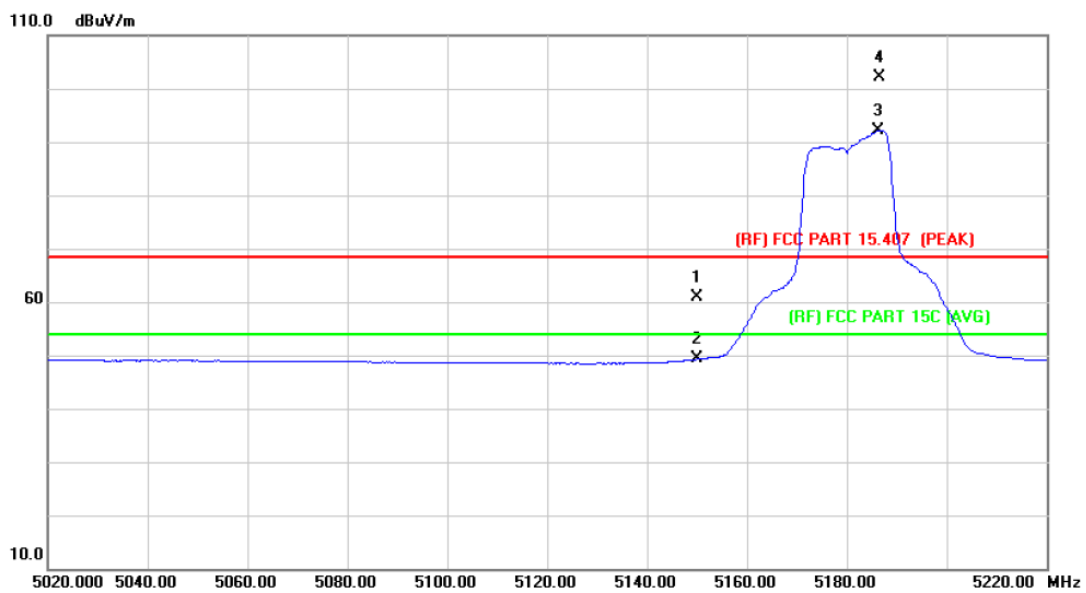

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1		5150.000	46.41	14.49	60.90	68.30	-7.40	peak
2		5150.000	34.77	14.49	49.26	54.00	-4.74	AVG
3	*	5186.400	77.71	14.45	92.16	Fundamental Frequency		AVG
4	X	5186.600	87.79	14.45	102.24	Fundamental Frequency		peak

Emission Level= Read Level+ Correct Factor


EUT:	ScreenBeam 802.11 a/b/g/n/ac WiFi Module	Model Name :	SBRT8812AU
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 5V		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11a Mode5240 MHz (U-NII-1)		
Remark:	N/A		

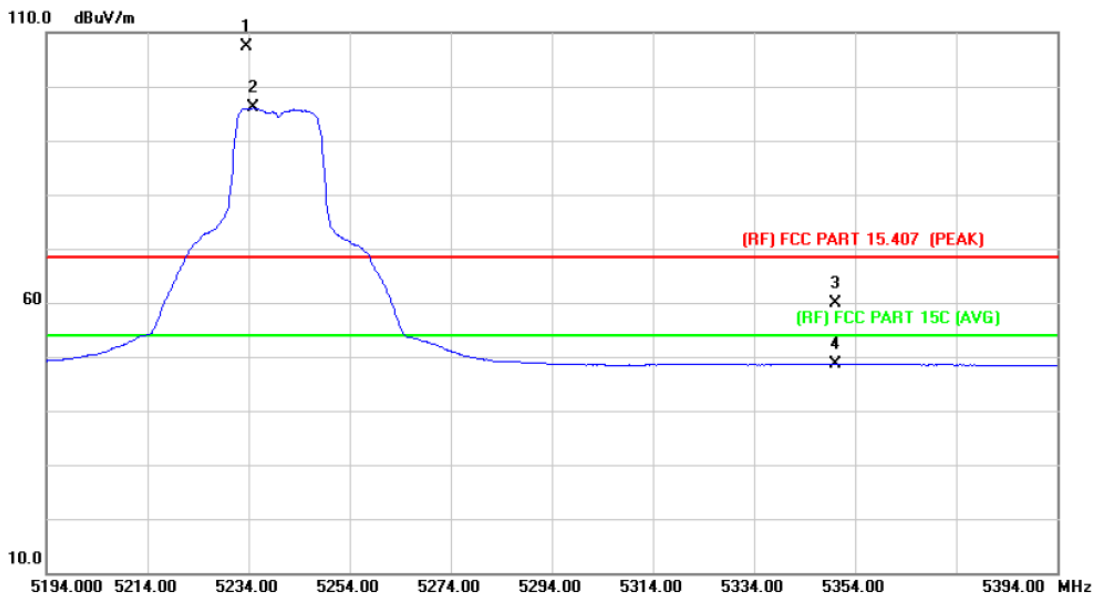

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1	X	5233.600	92.91	14.41	107.32			peak
2	*	5235.000	81.61	14.41	96.02			AVG
3		5350.000	45.55	14.31	59.86	68.30	-8.44	peak
4		5350.000	34.26	14.31	48.57	54.00	-5.43	AVG

Emission Level= Read Level+ Correct Factor


EUT:	ScreenBeam 802.11 a/b/g/n/ac WiFi Module	Model Name :	SBRT8812AU
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 5V		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11a Mode5240 MHz (U-NII-1)		
Remark:	N/A		

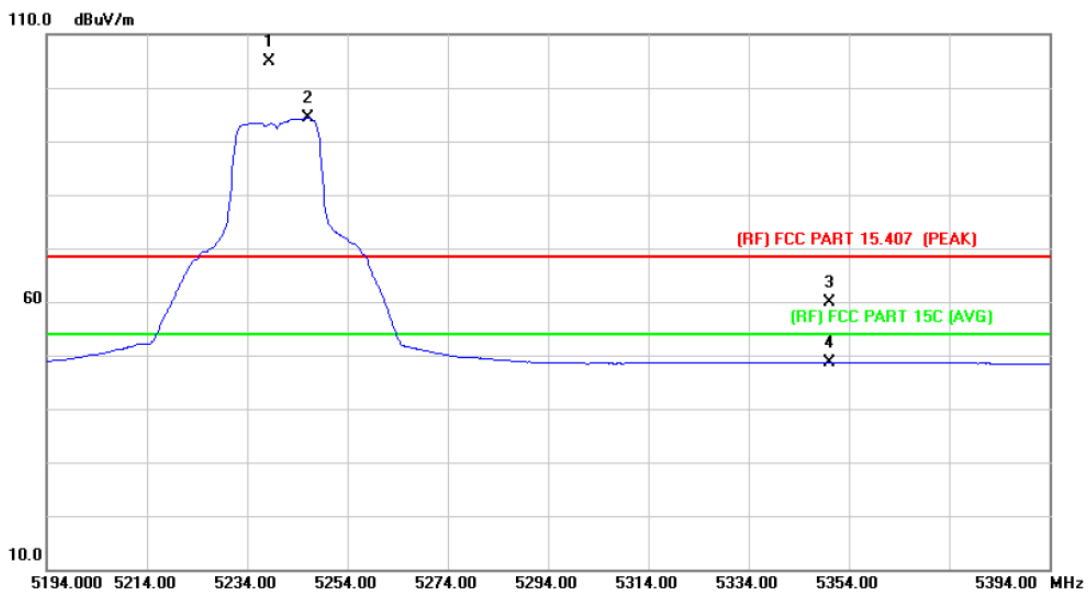

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	X	5238.400	90.39	14.40	104.79	Fundamental Frequency		peak
2	*	5246.000	79.91	14.40	94.31	Fundamental Frequency		AVG
3		5350.000	45.51	14.31	59.82	68.30	-8.48	peak
4		5350.000	34.31	14.31	48.62	54.00	-5.38	AVG

Emission Level= Read Level+ Correct Factor


EUT:	ScreenBeam 802.11 a/b/g/n/ac WiFi Module	Model Name :	SBRT8812AU
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 5V		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11n(20) Mode5180 MHz (U-NII-1)		
Remark:	N/A		

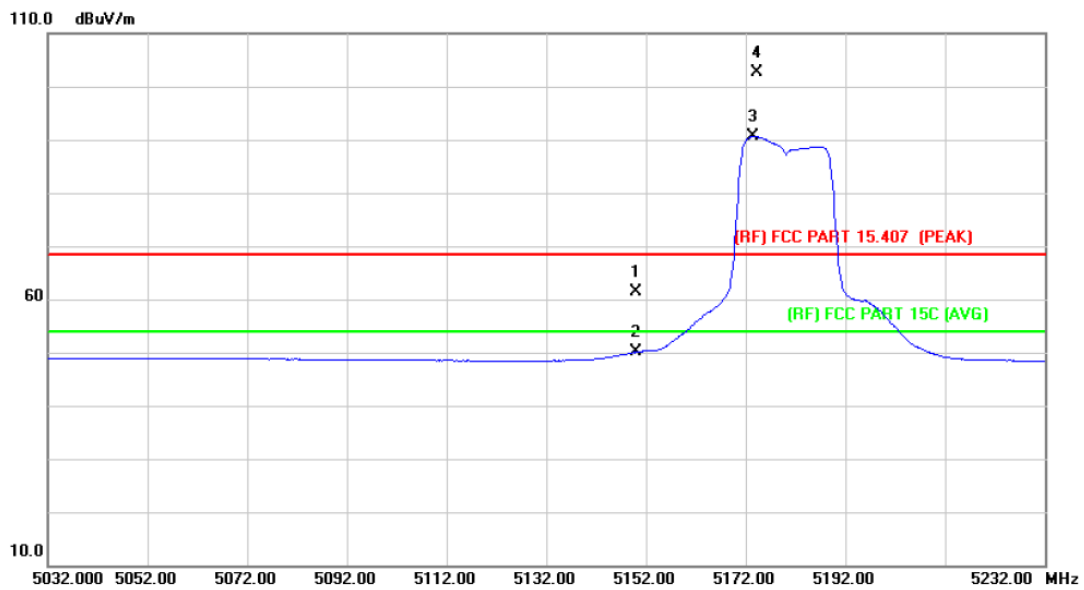

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1		5150.000	46.87	14.49	61.36	68.30	-6.94	peak
2		5150.000	35.54	14.49	50.03	54.00	-3.97	AVG
3	*	5173.400	76.11	14.46	90.57	Fundamental Frequency		AVG
4	X	5174.400	88.06	14.46	102.52	Fundamental Frequency		peak

Emission Level= Read Level+ Correct Factor


EUT:	ScreenBeam 802.11 a/b/g/n/ac WiFi Module	Model Name :	SBRT8812AU
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 5V		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11n(20) Mode5180 MHz (U-NII-1)		
Remark:	N/A		

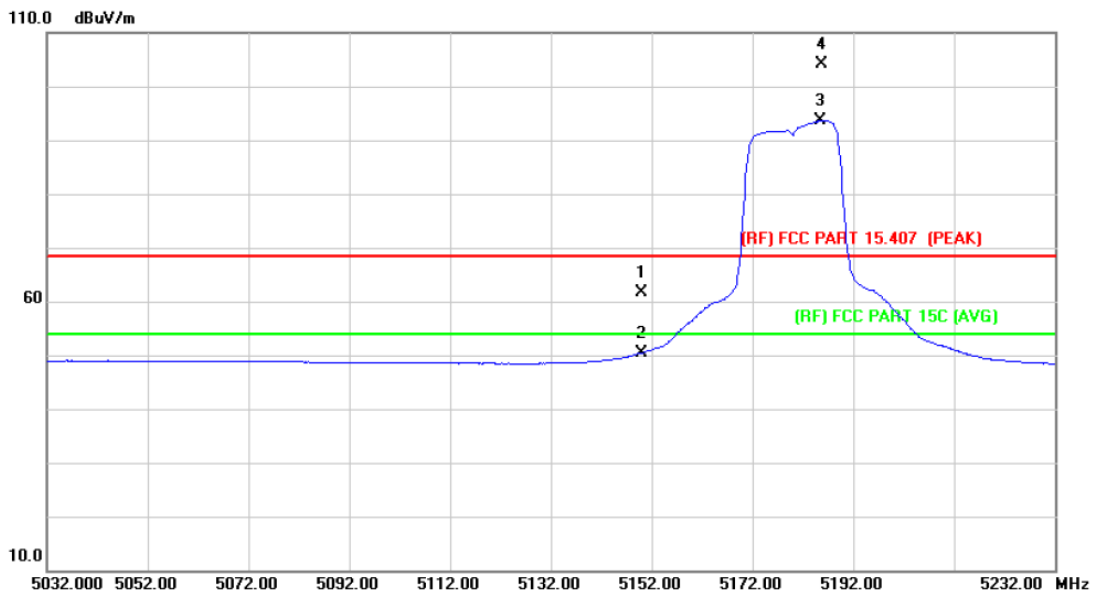

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1		5150.000	47.14	14.49	61.63	68.30	-6.67	peak
2		5150.000	35.94	14.49	50.43	54.00	-3.57	AVG
3	*	5185.400	79.24	14.45	93.69	Fundamental Frequency		AVG
4	X	5185.600	89.76	14.45	104.21	Fundamental Frequency		peak

Emission Level= Read Level+ Correct Factor


EUT:	ScreenBeam 802.11 a/b/g/n/ac WiFi Module	Model Name :	SBRT8812AU
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 5V		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11n(20) Mode5240 MHz (U-NII-1)		
Remark:	N/A		

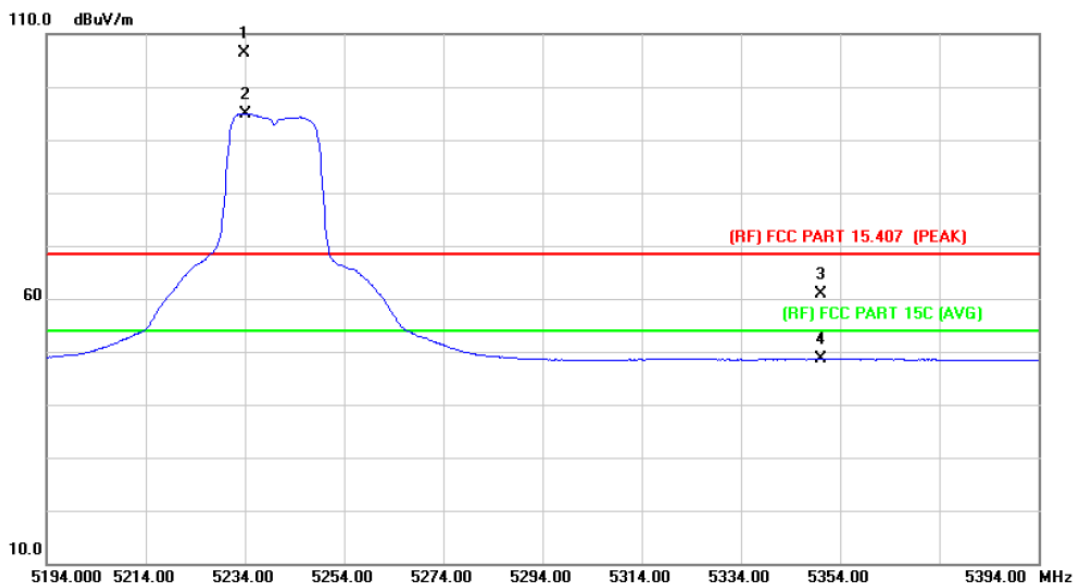

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	X	5233.800	91.98	14.41	106.39	Fundamental Frequency		peak
2	*	5234.000	80.53	14.41	94.94	Fundamental Frequency		AVG
3		5350.000	46.56	14.31	60.87	68.30	-7.43	peak
4		5350.000	34.25	14.31	48.56	54.00	-5.44	AVG

Emission Level= Read Level+ Correct Factor


EUT:	ScreenBeam 802.11 a/b/g/n/ac WiFi Module	Model Name :	SBRT8812AU
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 5V		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11n(20) Mode5240 MHz (U-NII-1)		
Remark:	N/A		

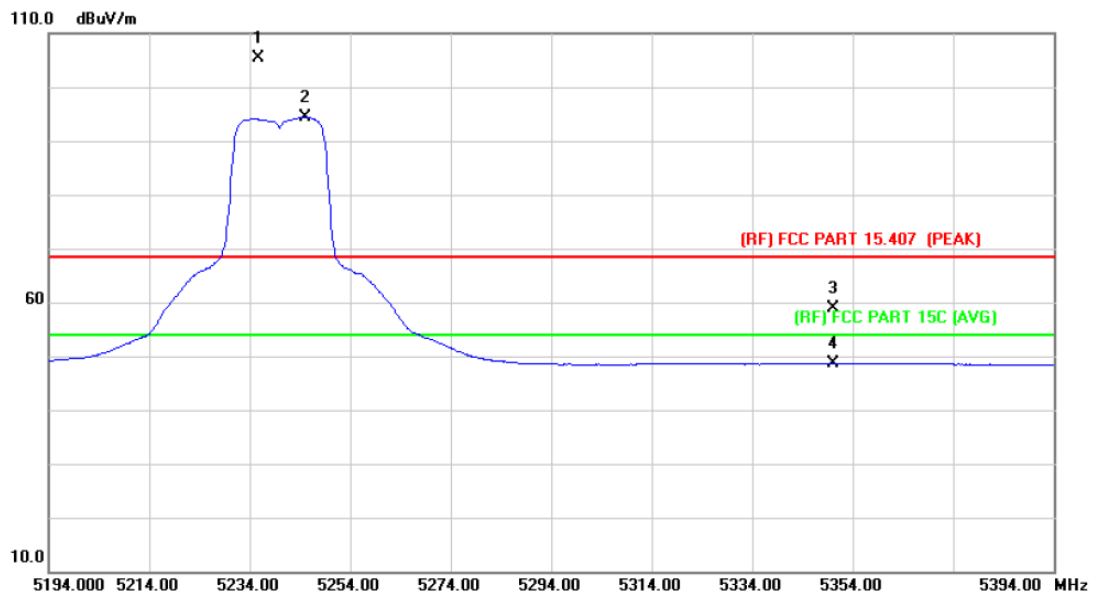

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1	X	5235.600	90.93	14.41	105.34			peak
2	*	5245.200	80.05	14.40	94.45			AVG
3		5350.000	44.66	14.31	58.97	68.30	-9.33	peak
4		5350.000	34.28	14.31	48.59	54.00	-5.41	AVG

Emission Level= Read Level+ Correct Factor


EUT:	ScreenBeam 802.11 a/b/g/n/ac WiFi Module	Model Name :	SBRT8812AU
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 5V		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11ac(20) Mode5180 MHz (U-NII-1)		
Remark:	N/A		

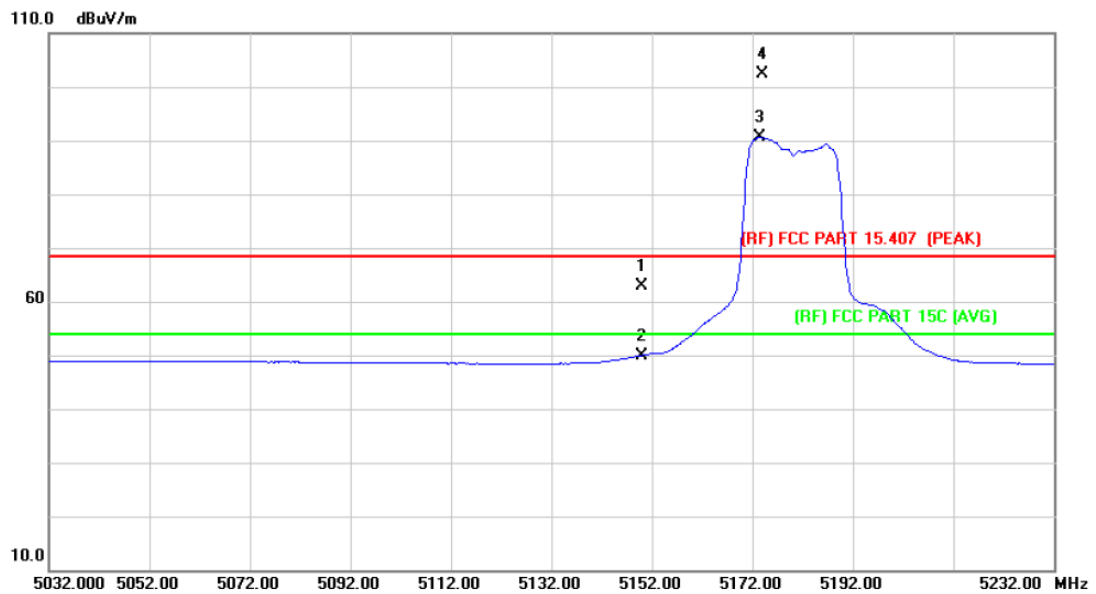

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5150.000	48.36	14.49	62.85	Fundamental Frequency		peak
2		5150.000	35.51	14.49	50.00	Fundamental Frequency		AVG
3	*	5173.400	76.21	14.46	90.67	54.00	36.67	AVG
4	X	5174.000	87.82	14.46	102.28	68.30	33.98	peak

Emission Level= Read Level+ Correct Factor


EUT:	ScreenBeam 802.11 a/b/g/n/ac WiFi Module	Model Name :	SBRT8812AU
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 5V		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11ac(20) Mode5180 MHz (U-NII-1)		
Remark:	N/A		

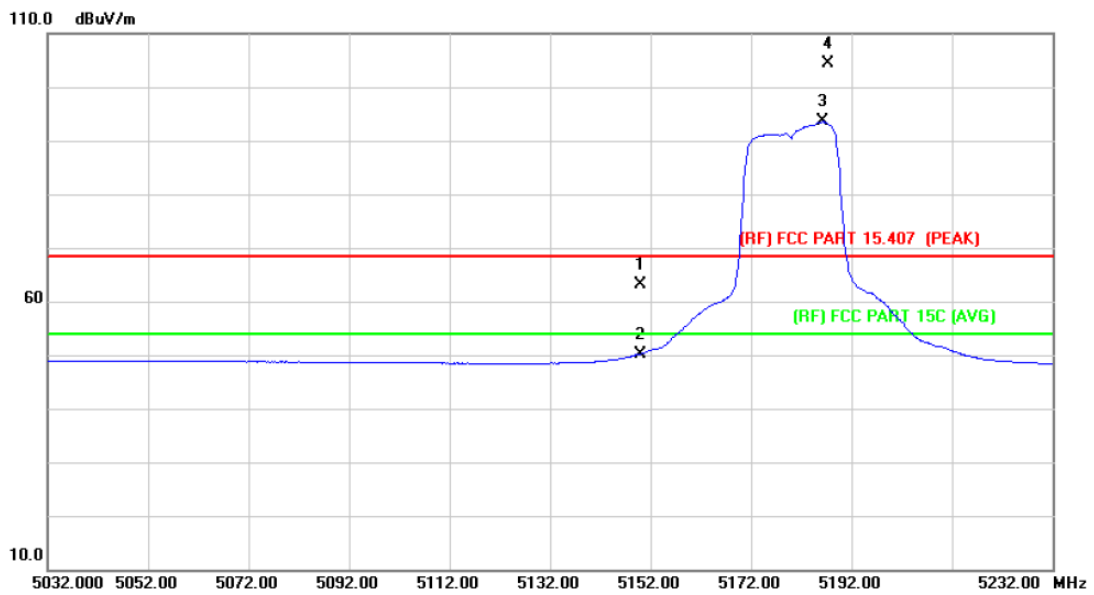

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1		5150.000	48.54	14.49	63.03	Fundamental Frequency		peak
2		5150.000	35.74	14.49	50.23	Fundamental Frequency		AVG
3	*	5186.400	79.06	14.45	93.51	54.00	39.51	AVG
4	X	5187.400	90.04	14.45	104.49	68.30	36.19	peak

Emission Level= Read Level+ Correct Factor


EUT:	ScreenBeam 802.11 a/b/g/n/ac WiFi Module	Model Name :	SBRT8812AU
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 5V		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11ac(20) Mode5240 MHz (U-NII-1)		
Remark:	N/A		

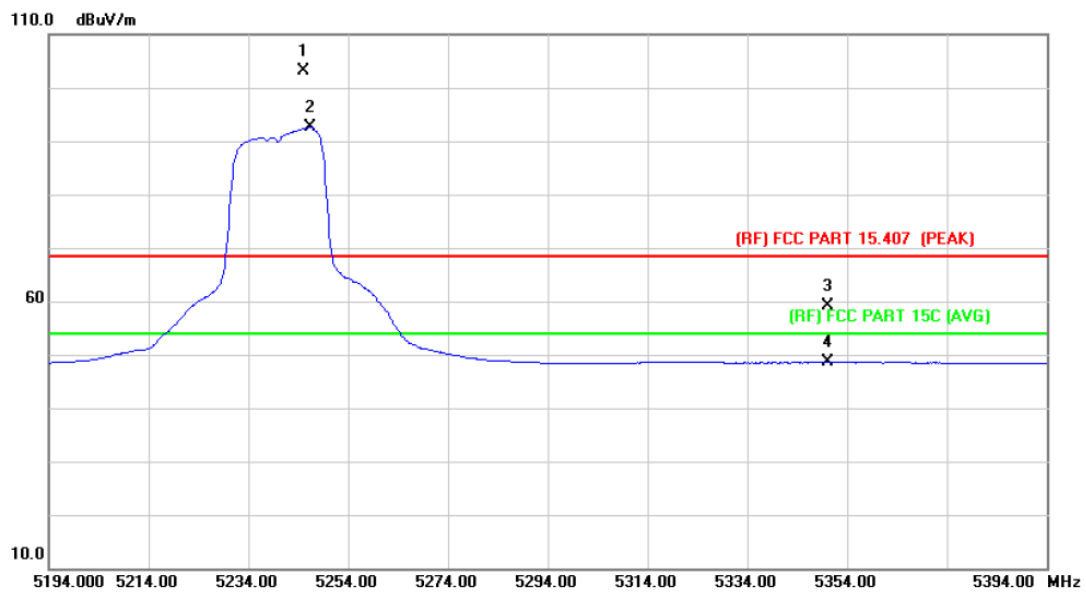

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	X	5245.200	88.80	14.40	103.20	Fundamental Frequency		peak
2	*	5246.400	78.29	14.40	92.69	Fundamental Frequency		AVG
3		5350.000	44.87	14.31	59.18	68.30	-9.12	peak
4		5350.000	34.22	14.31	48.53	54.00	-5.47	AVG

Emission Level= Read Level+ Correct Factor


EUT:	ScreenBeam 802.11 a/b/g/n/ac WiFi Module	Model Name :	SBRT8812AU
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 5V		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11ac(20) Mode5240 MHz (U-NII-1)		
Remark:	N/A		

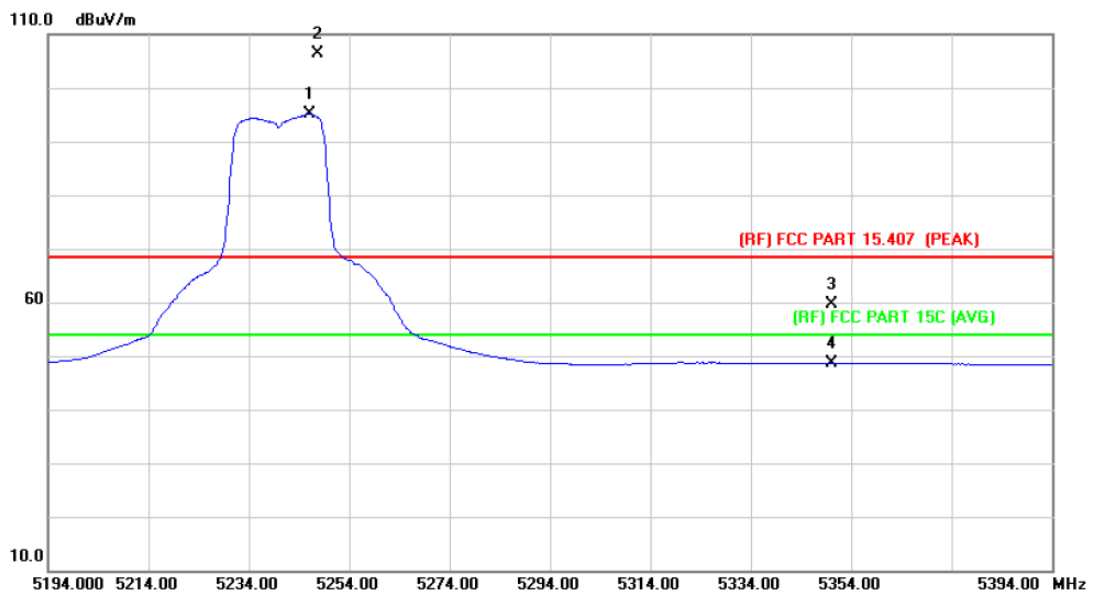

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	*	5246.200	80.71	14.40	95.11	Fundamental Frequency		AVG
2	X	5247.600	91.90	14.39	106.29	Fundamental Frequency		peak
3		5350.000	45.32	14.31	59.63	68.30	-8.67	peak
4		5350.000	34.27	14.31	48.58	54.00	-5.42	AVG

Emission Level= Read Level+ Correct Factor


EUT:	ScreenBeam 802.11 a/b/g/n/ac WiFi Module	Model Name :	SBRT8812AU
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 5V		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11n(40) Mode5190 MHz (U-NII-1)		
Remark:	N/A		

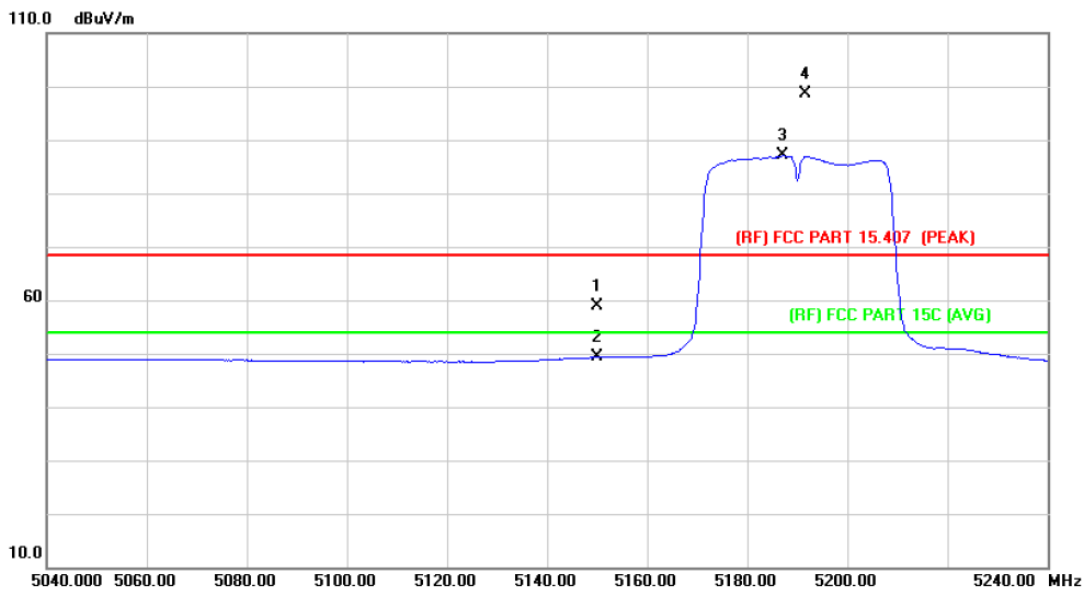

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5150.000	44.30	14.49	58.79	68.30	-9.51	peak
2		5150.000	34.84	14.49	49.33	54.00	-4.67	AVG
3	*	5187.000	72.59	14.45	87.04	Fundamental Frequency		AVG
4	X	5191.600	84.19	14.44	98.63	Fundamental Frequency		peak

Emission Level= Read Level+ Correct Factor


EUT:	ScreenBeam 802.11 a/b/g/n/ac WiFi Module	Model Name :	SBRT8812AU
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 5V		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11n(40) Mode5190 MHz (U-NII-1)		
Remark:	N/A		

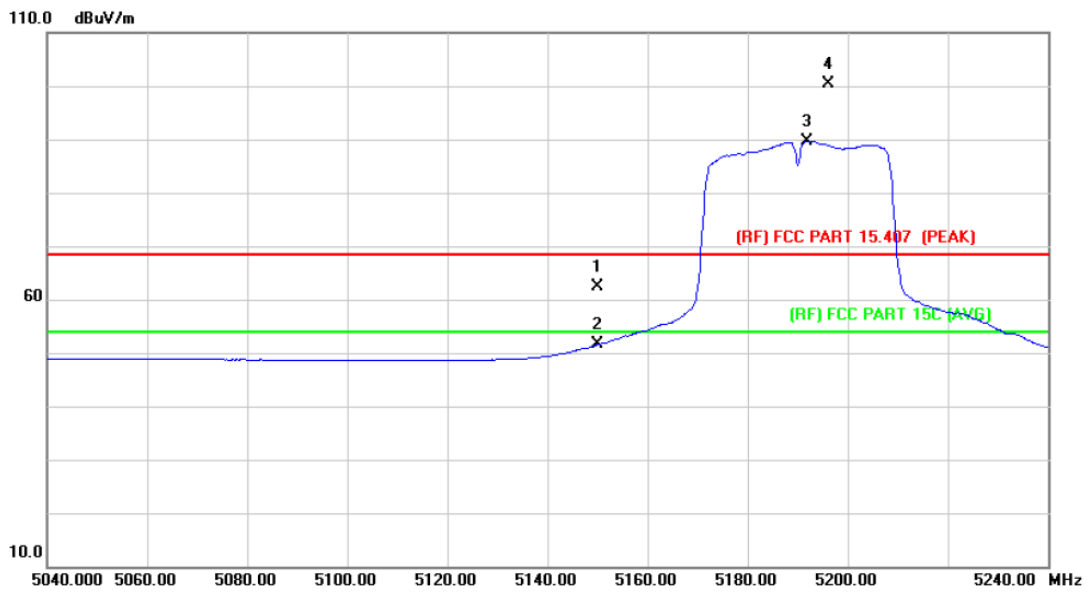

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5150.000	47.98	14.49	62.47	68.30	-5.83	peak
2		5150.000	37.06	14.49	51.55	54.00	-2.45	AVG
3	*	5191.800	75.20	14.44	89.64	Fundamental Frequency		AVG
4	X	5196.000	86.03	14.45	100.48	Fundamental Frequency		peak

Emission Level= Read Level+ Correct Factor


EUT:	ScreenBeam 802.11 a/b/g/n/ac WiFi Module	Model Name :	SBRT8812AU
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 5V		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11n(40) Mode5230 MHz (U-NII-1)		
Remark:	N/A		

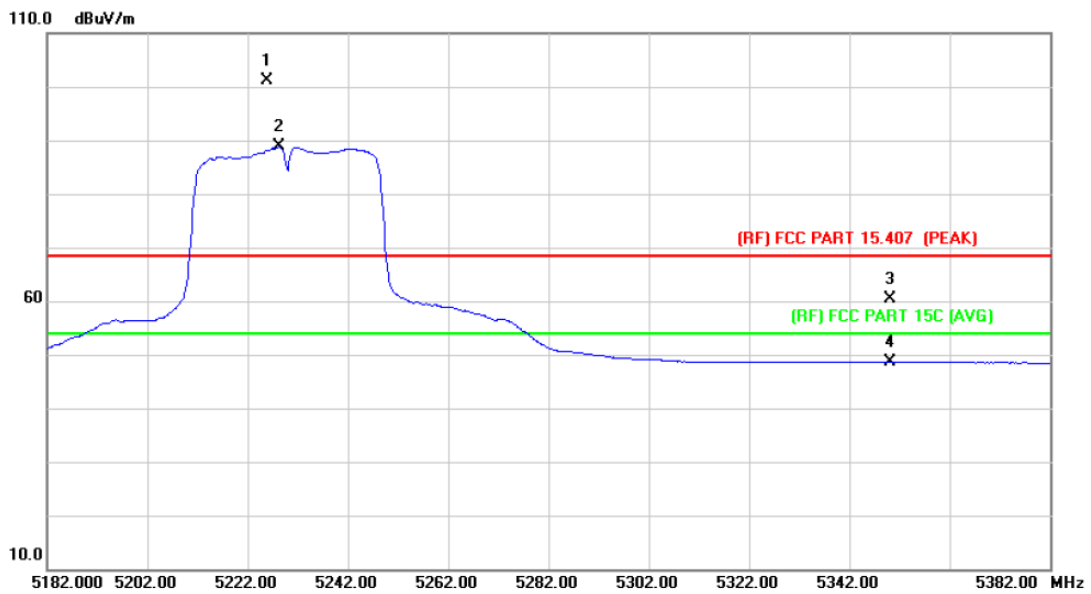

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1	X	5225.800	86.82	14.41	101.23	Fundamental Frequency		peak
2	*	5228.200	74.35	14.42	88.77	Fundamental Frequency		AVG
3		5350.000	46.02	14.31	60.33	68.30	-7.97	peak
4		5350.000	34.25	14.31	48.56	54.00	-5.44	AVG

Emission Level= Read Level+ Correct Factor


EUT:	ScreenBeam 802.11 a/b/g/n/ac WiFi Module	Model Name :	SBRT8812AU
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 5V		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11n(40) Mode5230 MHz (U-NII-1)		
Remark:	N/A		

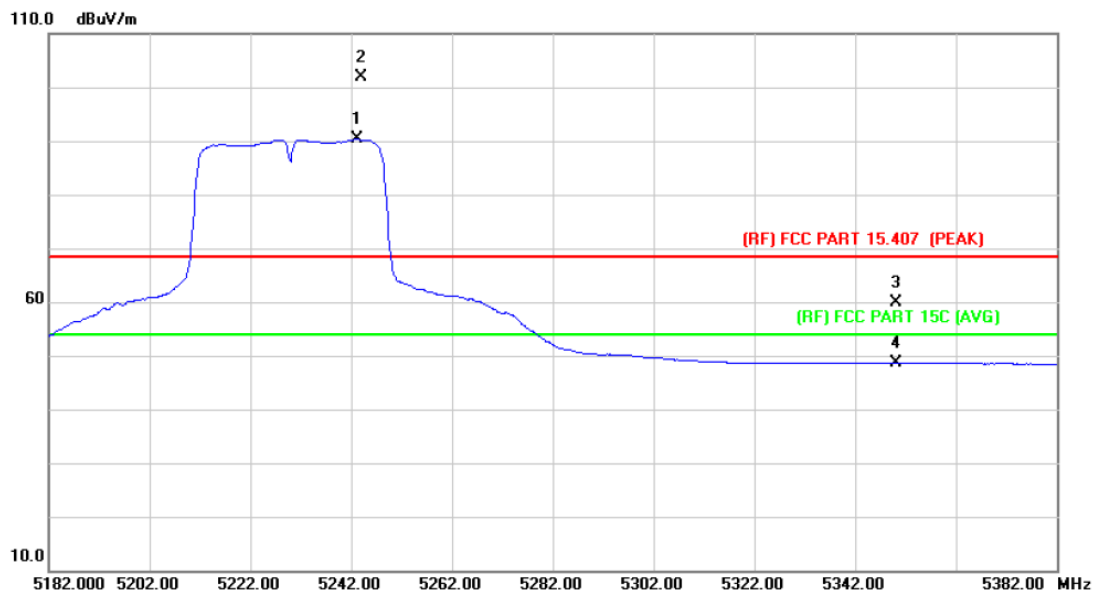

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1	*	5243.200	75.97	14.40	90.37	Fundamental Frequency		AVG
2	X	5244.000	87.39	14.40	101.79	Fundamental Frequency		peak
3		5350.000	45.52	14.31	59.83	68.30	-8.47	peak
4		5350.000	34.27	14.31	48.58	54.00	-5.42	AVG

Emission Level= Read Level+ Correct Factor


EUT:	ScreenBeam 802.11 a/b/g/n/ac WiFi Module	Model Name :	SBRT8812AU
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 5V		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11ac(40) Mode5190 MHz (U-NII-1)		
Remark:	N/A		

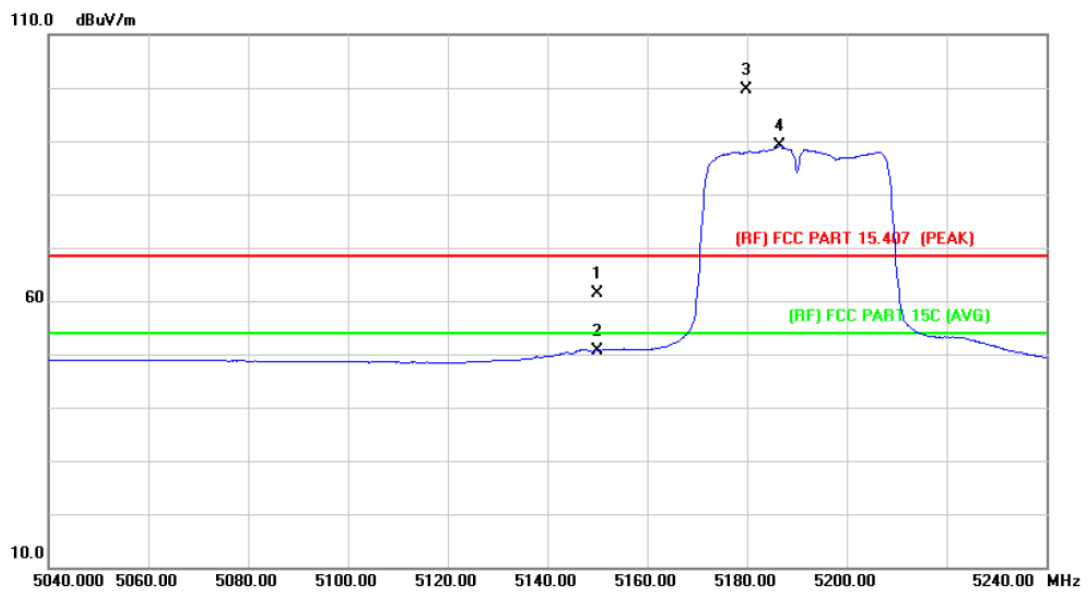

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1		5150.000	46.98	14.49	61.47	68.30	-6.83	peak
2		5150.000	36.23	14.49	50.72	54.00	-3.28	AVG
3	X	5179.800	85.15	14.45	99.60	Fundamental Frequency		peak
4	*	5186.600	74.63	14.45	89.08	Fundamental Frequency		AVG

Emission Level= Read Level+ Correct Factor


EUT:	ScreenBeam 802.11 a/b/g/n/ac WiFi Module	Model Name :	SBRT8812AU
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 5V		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11ac(40) Mode5190 MHz (U-NII-1)		
Remark:	N/A		

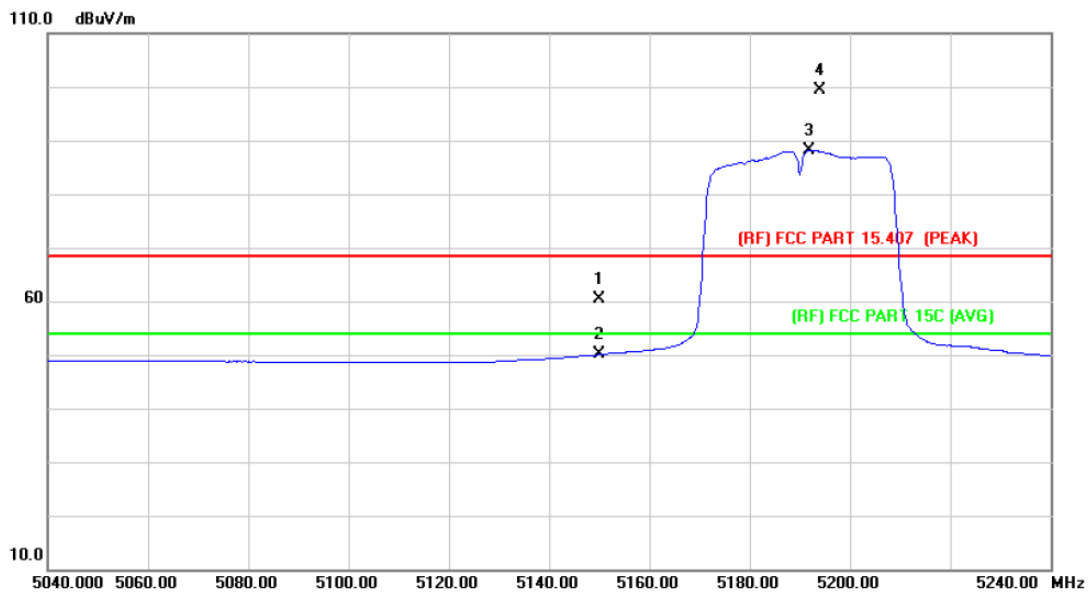

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5150.000	45.79	14.49	60.28	68.30	-8.02	peak
2		5150.000	35.55	14.49	50.04	54.00	-3.96	AVG
3	*	5191.800	73.75	14.44	88.19	Fundamental Frequency		AVG
4	X	5194.000	85.01	14.44	99.45	Fundamental Frequency		peak

Emission Level= Read Level+ Correct Factor


EUT:	ScreenBeam 802.11 a/b/g/n/ac WiFi Module	Model Name :	SBRT8812AU
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 5V		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11ac(40) Mode5230 MHz (U-NII-1)		
Remark:	N/A		

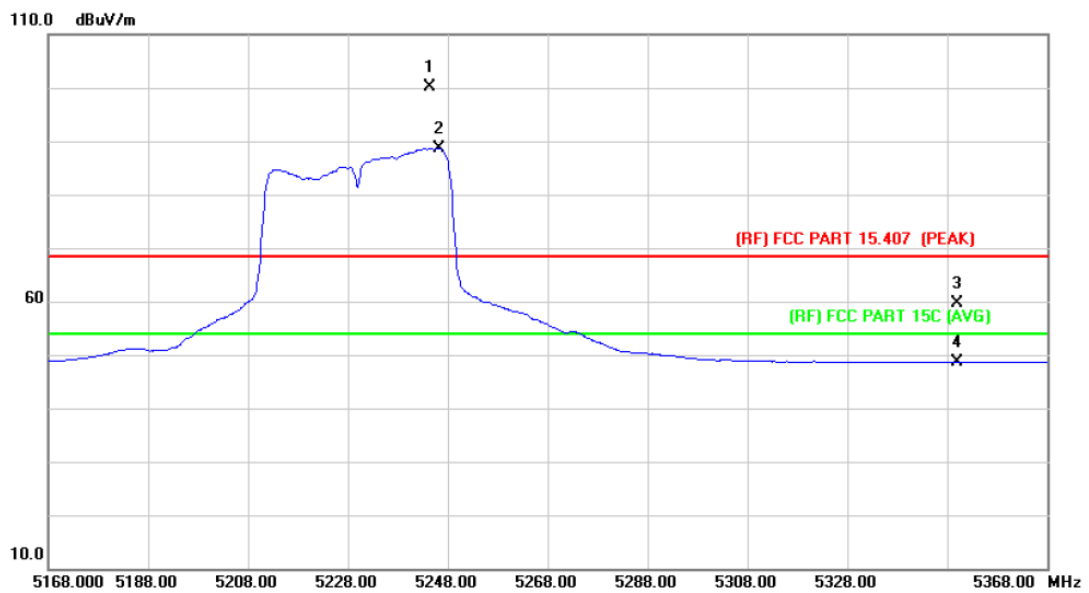

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	X	5244.400	85.83	14.40	100.23	Fundamental Frequency		peak
2	*	5246.400	74.22	14.40	88.62	Fundamental Frequency		AVG
3		5350.000	45.26	14.31	59.57	68.30	-8.73	peak
4		5350.000	34.28	14.31	48.59	54.00	-5.41	AVG

Emission Level= Read Level+ Correct Factor


EUT:	ScreenBeam 802.11 a/b/g/n/ac WiFi Module	Model Name :	SBRT8812AU
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 5V		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11ac(40) Mode5230 MHz (U-NII-1)		
Remark:	N/A		

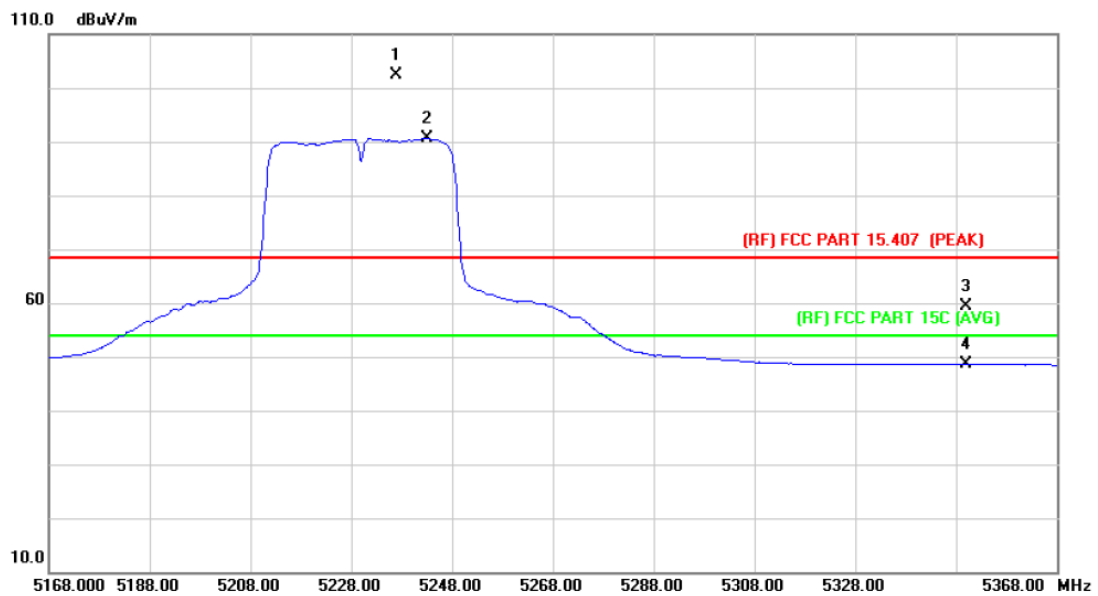

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	X	5237.000	88.03	14.40	102.43	Fundamental Frequency		peak
2	*	5243.200	76.25	14.40	90.65	Fundamental Frequency		AVG
3		5350.000	45.15	14.31	59.46	68.30	-8.84	peak
4		5350.000	34.23	14.31	48.54	54.00	-5.46	AVG

Emission Level= Read Level+ Correct Factor


EUT:	ScreenBeam 802.11 a/b/g/n/ac WiFi Module	Model Name :	SBRT8812AU
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 5V		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11ac(80) Mode5210 MHz (U-NII-1)		
Remark:	N/A		

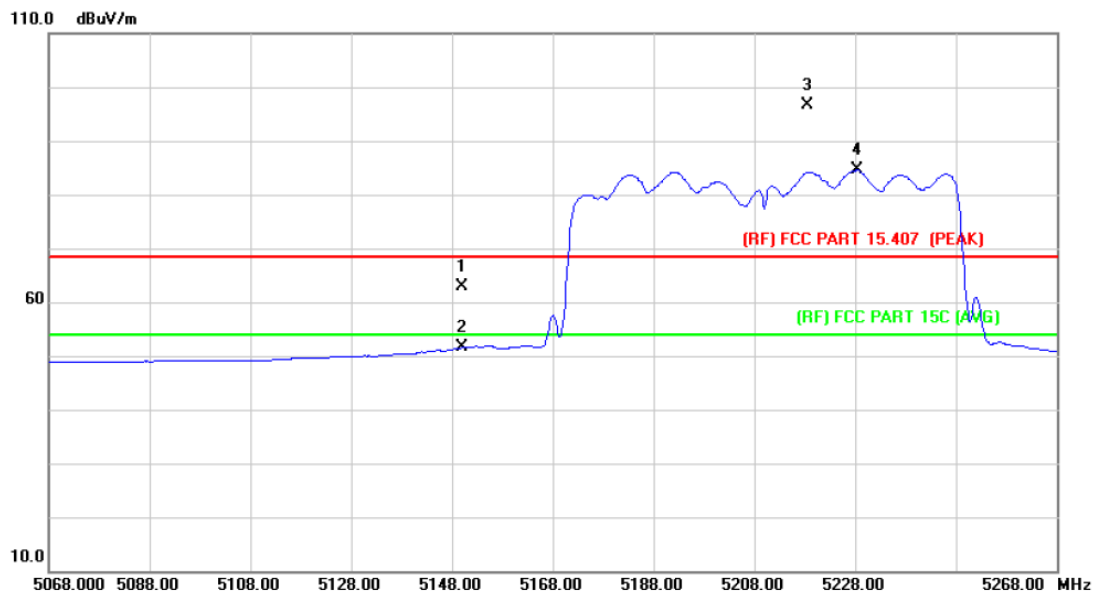

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5150.000	48.30	14.49	62.79	68.30	-5.51	peak
2		5150.000	37.05	14.49	51.54	54.00	-2.46	AVG
3	X	5218.600	82.14	14.43	96.57	Fundamental Frequency		peak
4	*	5228.400	70.15	14.42	84.57	Fundamental Frequency		AVG

Emission Level= Read Level+ Correct Factor


EUT:	ScreenBeam 802.11 a/b/g/n/ac WiFi Module	Model Name :	SBRT8812AU
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 5V		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11ac(80) Mode5210 MHz (U-NII-1)		
Remark:	N/A		

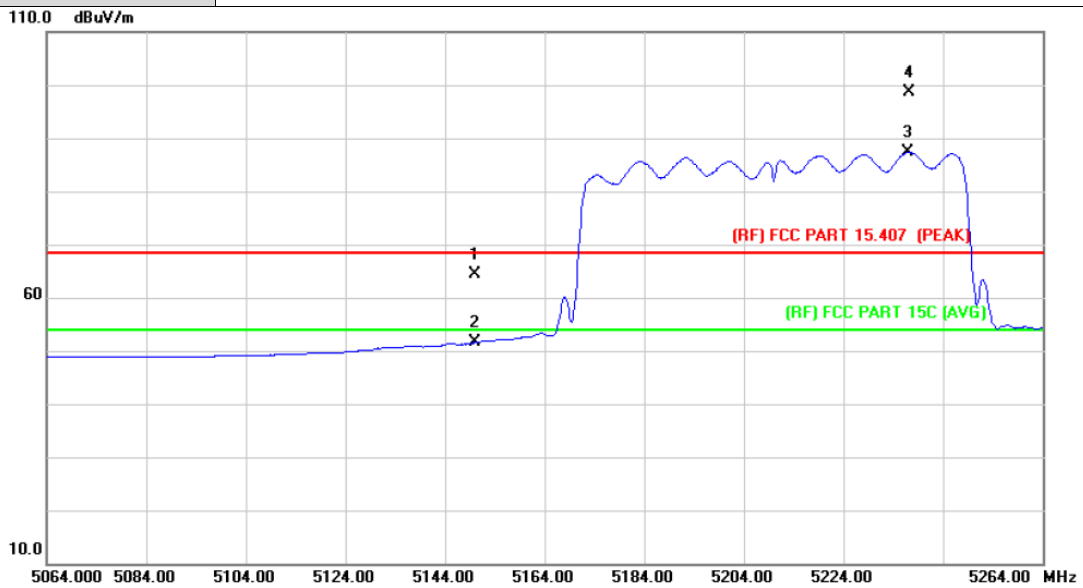

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5150.000	49.89	14.49	64.38	68.30	-3.92	peak
2		5150.000	37.08	14.49	51.57	54.00	-2.43	AVG
3	*	5237.000	73.00	14.40	87.40	Fundamental Frequency		AVG
4	X	5237.200	84.14	14.40	98.54	Fundamental Frequency		peak

Emission Level= Read Level+ Correct Factor


EUT:	ScreenBeam 802.11 a/b/g/n/ac WiFi Module	Model Name :	SBRT8812AU
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 5V		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11ac(80) Mode5210 MHz (U-NII-1)		
Remark:	N/A		

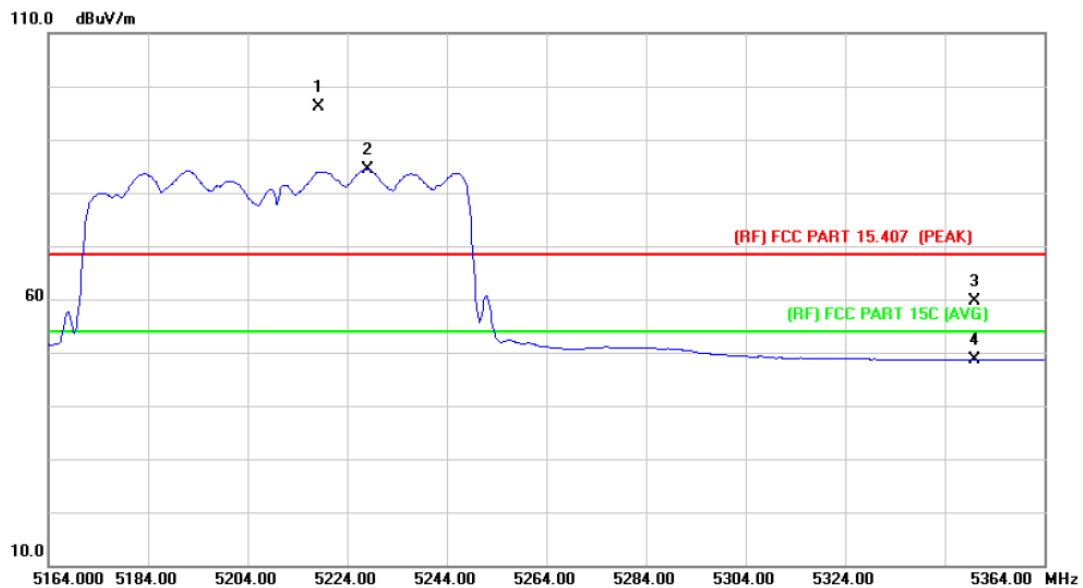

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	X	5218.200	81.72	14.43	96.15	Fundamental Frequency		peak
2	*	5228.200	70.04	14.42	84.46	Fundamental Frequency		AVG
3		5350.000	45.20	14.31	59.51	68.30	-8.79	peak
4		5350.000	34.30	14.31	48.61	54.00	-5.39	AVG

Emission Level= Read Level+ Correct Factor


EUT:	ScreenBeam 802.11 a/b/g/n/ac WiFi Module	Model Name :	SBRT8812AU
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 5V		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11ac(80) Mode5210 MHz (U-NII-1)		
Remark:	N/A		

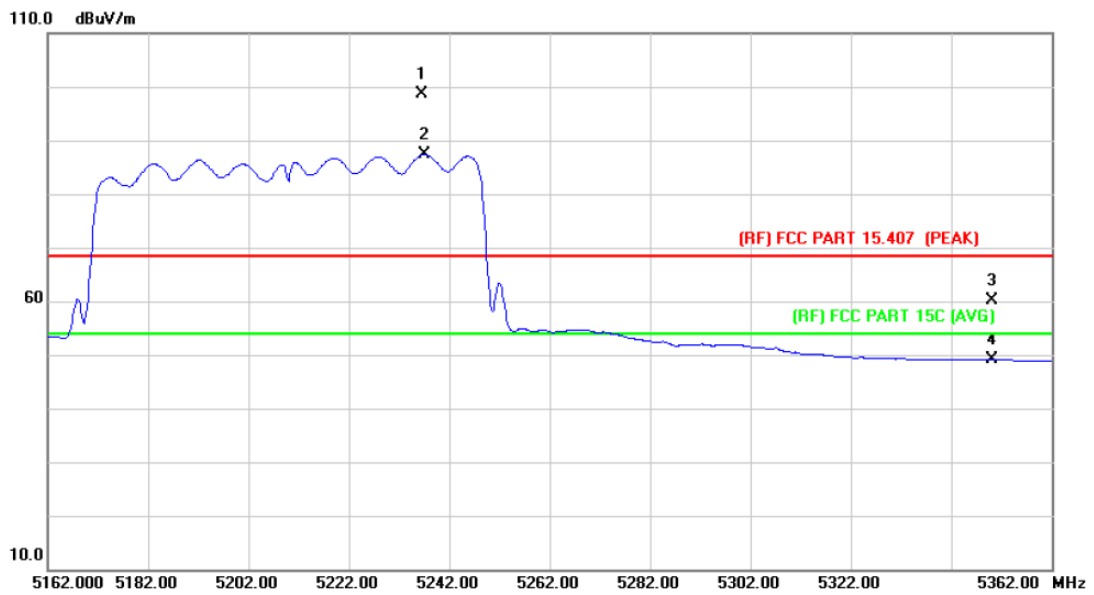

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	X	5236.600	84.23	14.40	98.63	Fundamental Frequency		peak
2	*	5237.000	73.03	14.40	87.43	Fundamental Frequency		AVG
3		5350.000	45.91	14.31	60.22	68.30	-8.08	peak
4		5350.000	34.71	14.31	49.02	54.00	-4.98	AVG

Emission Level= Read Level+ Correct Factor


EUT:	ScreenBeam 802.11 a/b/g/n/ac WiFi Module	Model Name :	SBRT8812AU
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 5V		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11a Mode5745 MHz (U-NII-3)		
Remark:	N/A		

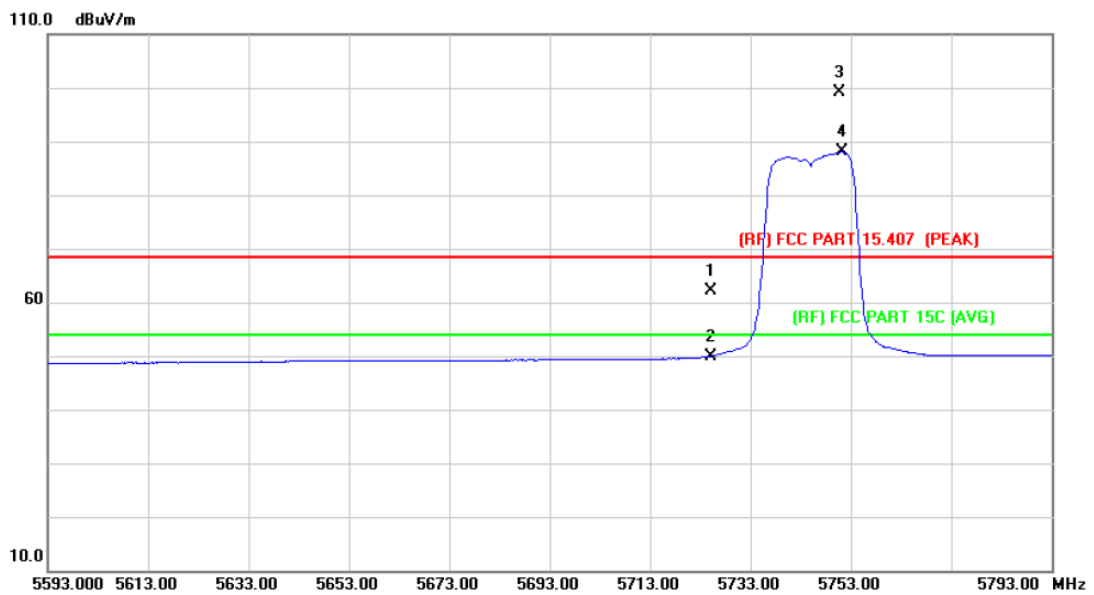

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1		5725.000	46.31	15.87	62.18	68.30	-6.12	peak
2		5725.000	34.08	15.87	49.95	54.00	-4.05	AVG
3	X	5750.600	82.95	16.07	99.02	Fundamental Frequency		peak
4	*	5751.200	71.96	16.08	88.04	Fundamental Frequency		AVG

Emission Level= Read Level+ Correct Factor


EUT:	ScreenBeam 802.11 a/b/g/n/ac WiFi Module	Model Name :	SBRT8812AU
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 5V		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11a Mode5745 MHz (U-NII-3)		
Remark:	N/A		

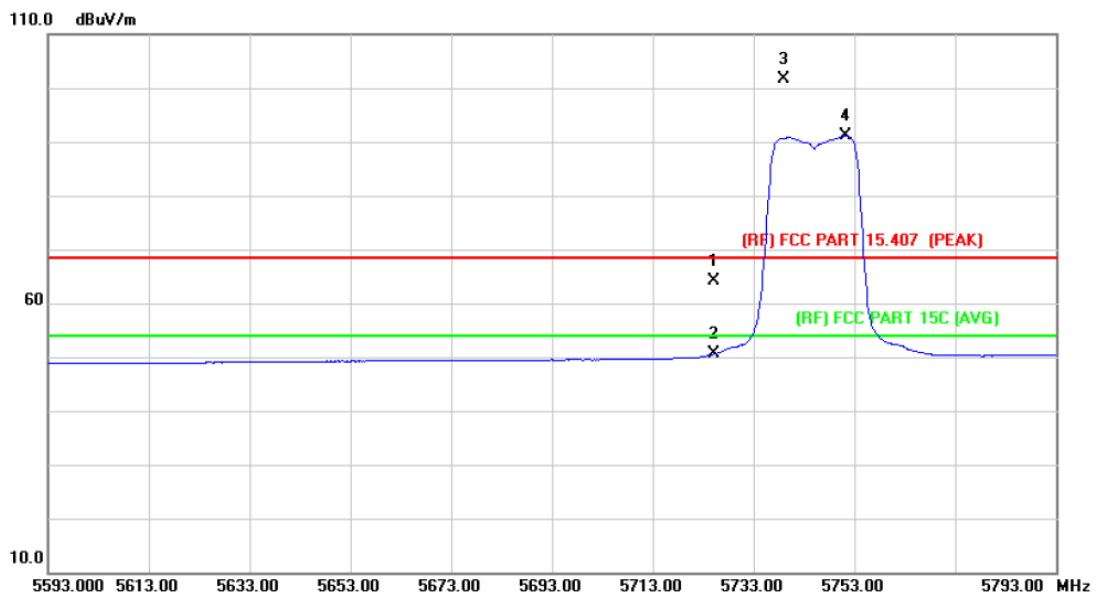

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5725.000	48.31	15.87	64.18	68.30	-4.12	peak
2		5725.000	34.68	15.87	50.55	54.00	-3.45	AVG
3	X	5739.000	85.56	15.99	101.55	Fundamental Frequency		peak
4	*	5751.200	75.04	16.08	91.12	Fundamental Frequency		AVG

Emission Level= Read Level+ Correct Factor


EUT:	ScreenBeam 802.11 a/b/g/n/ac WiFi Module	Model Name :	SBRT8812AU
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 5V		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11a Mode5825 MHz (U-NII-3)		
Remark:	N/A		

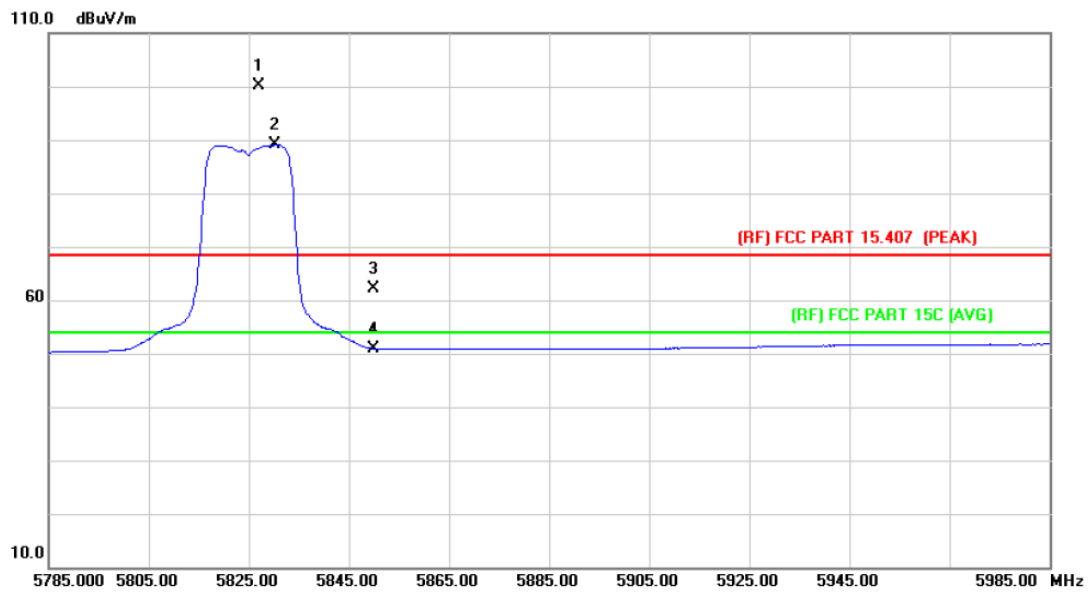

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1	X	5827.000	83.57	16.65	100.22	Fundamental Frequency		peak
2	*	5830.200	72.37	16.68	89.05	Fundamental Frequency		AVG
3		5850.000	45.31	16.83	62.14	68.30	-6.16	peak
4		5850.000	34.10	16.83	50.93	54.00	-3.07	AVG

Emission Level= Read Level+ Correct Factor


EUT:	ScreenBeam 802.11 a/b/g/n/ac WiFi Module	Model Name :	SBRT8812AU
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 5V		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11a Mode5825 MHz (U-NII-3)		
Remark:	N/A		

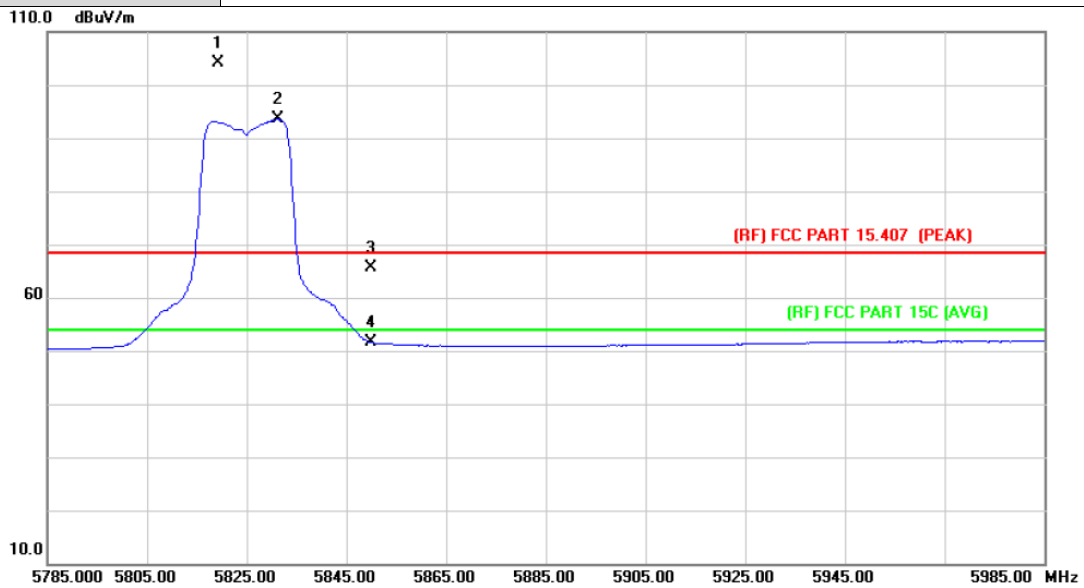

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	X	5819.400	87.44	16.60	104.04	Fundamental Frequency		peak
2	*	5831.200	76.84	16.69	93.53	Fundamental Frequency		AVG
3		5850.000	48.85	16.83	65.68	68.30	-2.62	peak
4		5850.000	34.73	16.83	51.56	54.00	-2.44	AVG

Emission Level= Read Level+ Correct Factor


EUT:	ScreenBeam 802.11 a/b/g/n/ac WiFi Module	Model Name :	SBRT8812AU
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 5V		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11n(20) Mode5745 MHz (U-NII-3)		
Remark:	N/A		

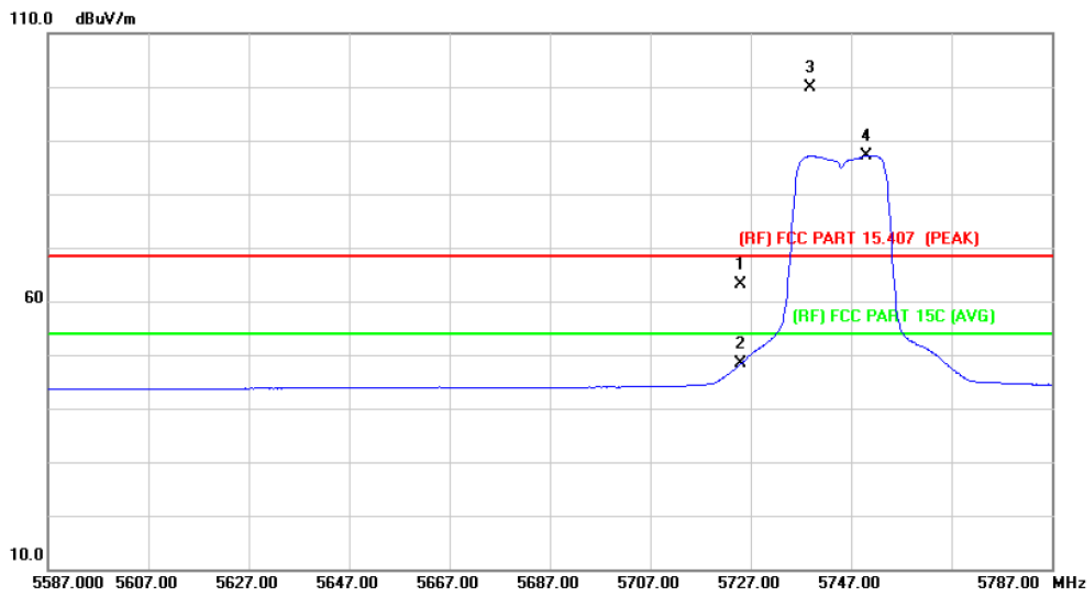

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1		5725.000	53.37	9.78	63.15	68.30	-5.15	peak
2		5725.000	38.58	9.78	48.36	54.00	-5.64	AVG
3	X	5738.800	89.99	9.81	99.80	Fundamental Frequency		peak
4	*	5750.000	77.33	9.85	87.18	Fundamental Frequency		AVG

Emission Level= Read Level+ Correct Factor


EUT:	ScreenBeam 802.11 a/b/g/n/ac WiFi Module	Model Name :	SBRT8812AU
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 5V		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11n(20) Mode5745 MHz (U-NII-3)		
Remark:	N/A		

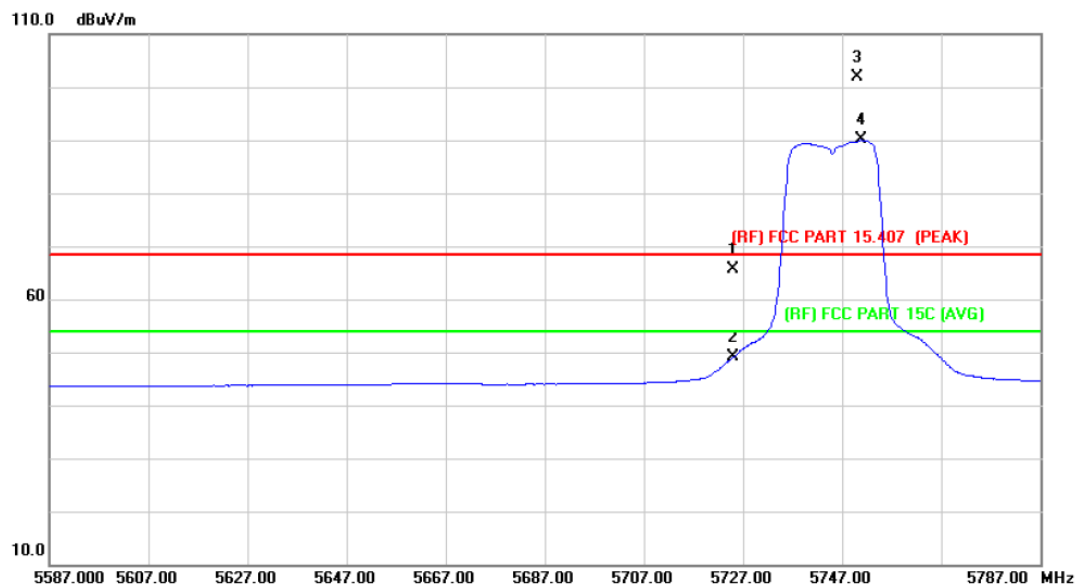

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1		5725.000	55.96	9.78	65.74	68.30	-2.56	peak
2		5725.000	39.28	9.78	49.06	54.00	-4.94	AVG
3	X	5750.000	92.09	9.85	101.94	Fundamental Frequency		peak
4	*	5750.800	80.16	9.85	90.01	Fundamental Frequency		AVG

Emission Level= Read Level+ Correct Factor


EUT:	ScreenBeam 802.11 a/b/g/n/ac WiFi Module	Model Name :	SBRT8812AU
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 5V		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11n(20) Mode5825 MHz (U-NII-3)		
Remark:	N/A		

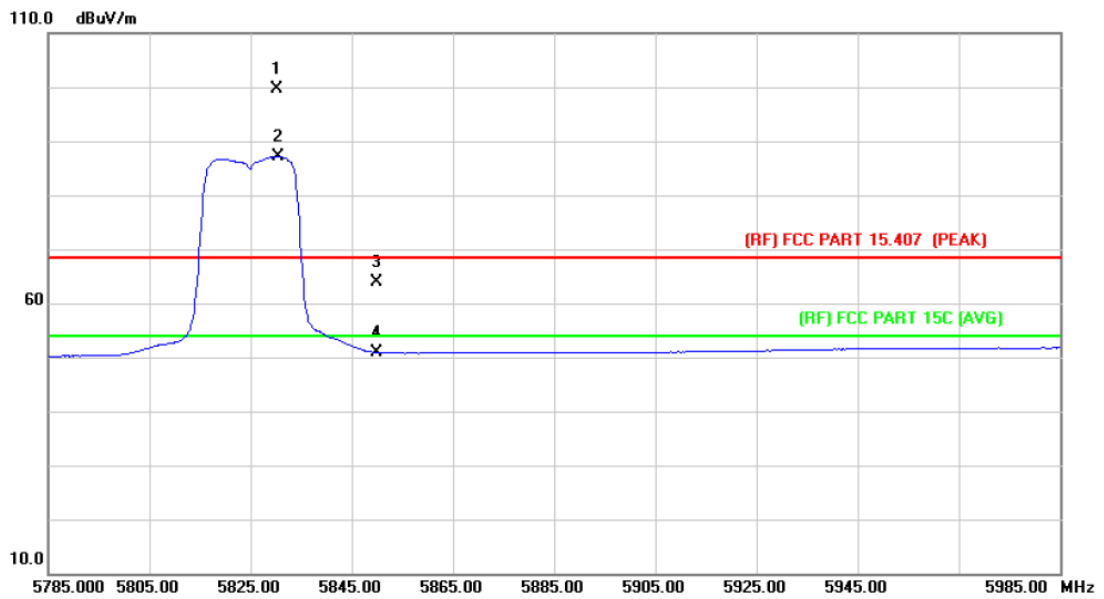

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	X	5830.200	82.95	16.68	99.63	Fundamental Frequency		peak
2	*	5830.400	70.51	16.68	87.19	Fundamental Frequency		AVG
3		5850.000	47.07	16.83	63.90	68.30	-4.40	peak
4		5850.000	34.03	16.83	50.86	54.00	-3.14	AVG

Emission Level= Read Level+ Correct Factor


EUT:	ScreenBeam 802.11 a/b/g/n/ac WiFi Module	Model Name :	SBRT8812AU
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 5V		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11n(20) Mode5825 MHz (U-NII-3)		
Remark:	N/A		

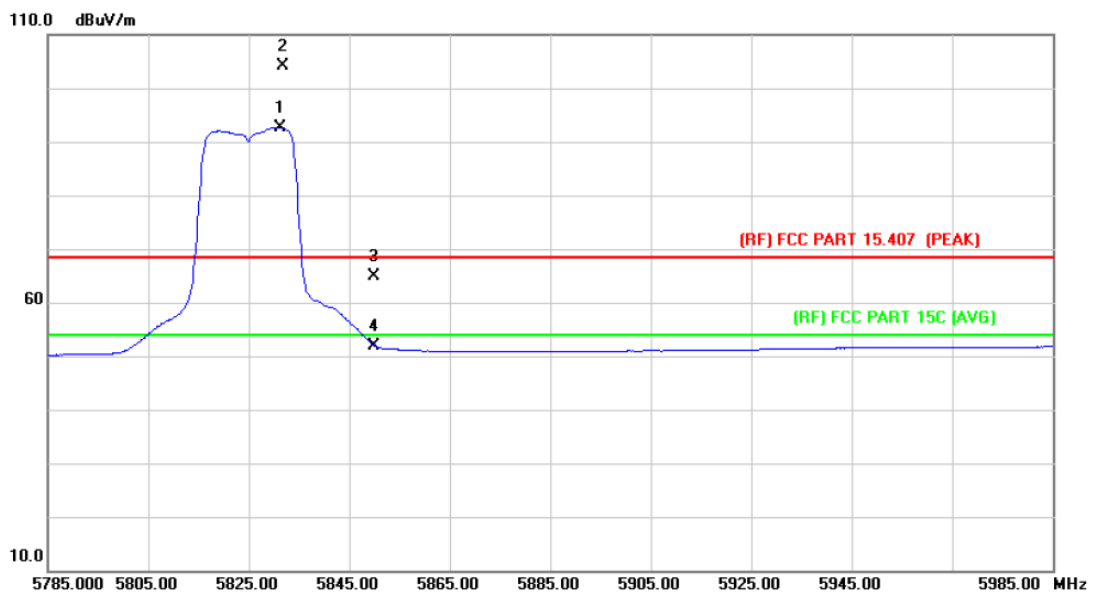

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	*	5831.200	76.01	16.69	92.70	Fundamental Frequency		AVG
2	X	5831.800	87.50	16.69	104.19	Fundamental Frequency		peak
3		5850.000	48.08	16.83	64.91	68.30	-3.39	peak
4		5850.000	35.15	16.83	51.98	54.00	-2.02	AVG

Emission Level= Read Level+ Correct Factor


EUT:	ScreenBeam 802.11 a/b/g/n/ac WiFi Module	Model Name :	SBRT8812AU
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 5V		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11ac(20) Mode5745 MHz (U-NII-3)		
Remark:	N/A		

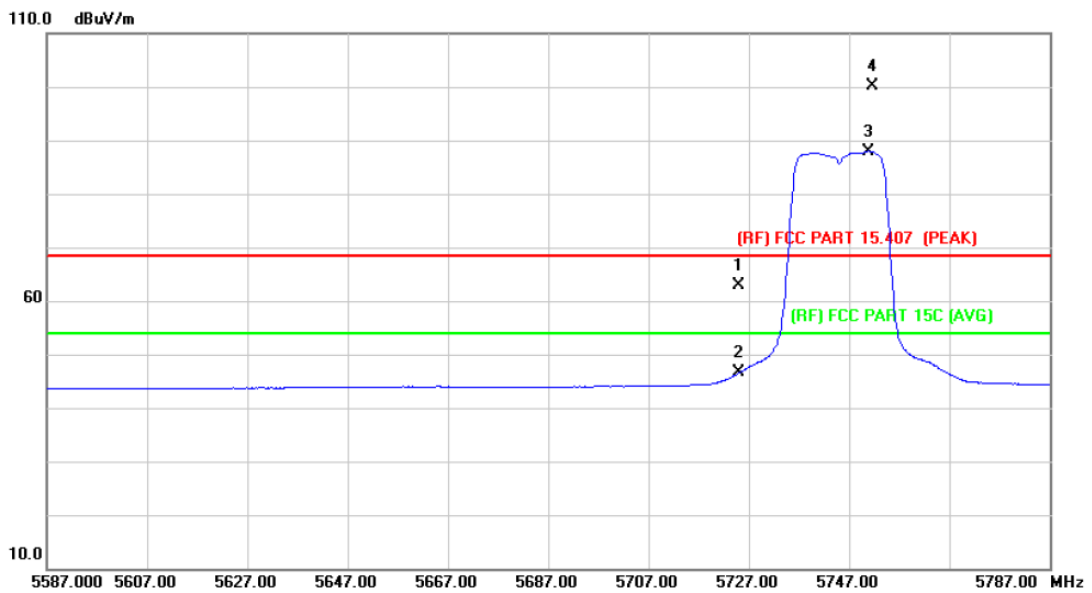

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1		5725.000	53.18	9.78	62.96	68.30	-5.34	peak
2		5725.000	36.74	9.78	46.52	54.00	-7.48	AVG
3	*	5750.800	78.15	9.85	88.00	Fundamental Frequency		AVG
4	X	5751.600	90.19	9.85	100.04	Fundamental Frequency		peak

Emission Level= Read Level+ Correct Factor


EUT:	ScreenBeam 802.11 a/b/g/n/ac WiFi Module	Model Name :	SBRT8812AU
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 5V		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11ac(20) Mode5745 MHz (U-NII-3)		
Remark:	N/A		

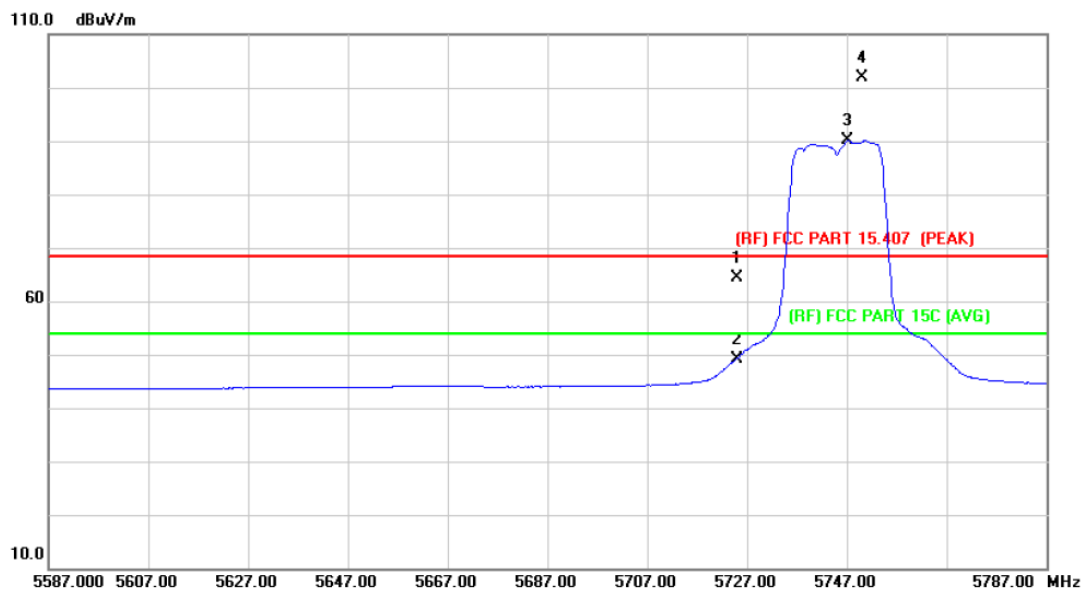

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1		5725.000	54.50	9.78	64.28	68.30	-4.02	peak
2		5725.000	39.35	9.78	49.13	54.00	-4.87	AVG
3	*	5747.200	80.26	9.84	90.10	Fundamental Frequency		AVG
4	X	5750.000	92.02	9.85	101.87	Fundamental Frequency		peak

Emission Level= Read Level+ Correct Factor


EUT:	ScreenBeam 802.11 a/b/g/n/ac WiFi Module	Model Name :	SBRT8812AU
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 5V		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11ac(20) Mode5825 MHz (U-NII-3)		
Remark:	N/A		

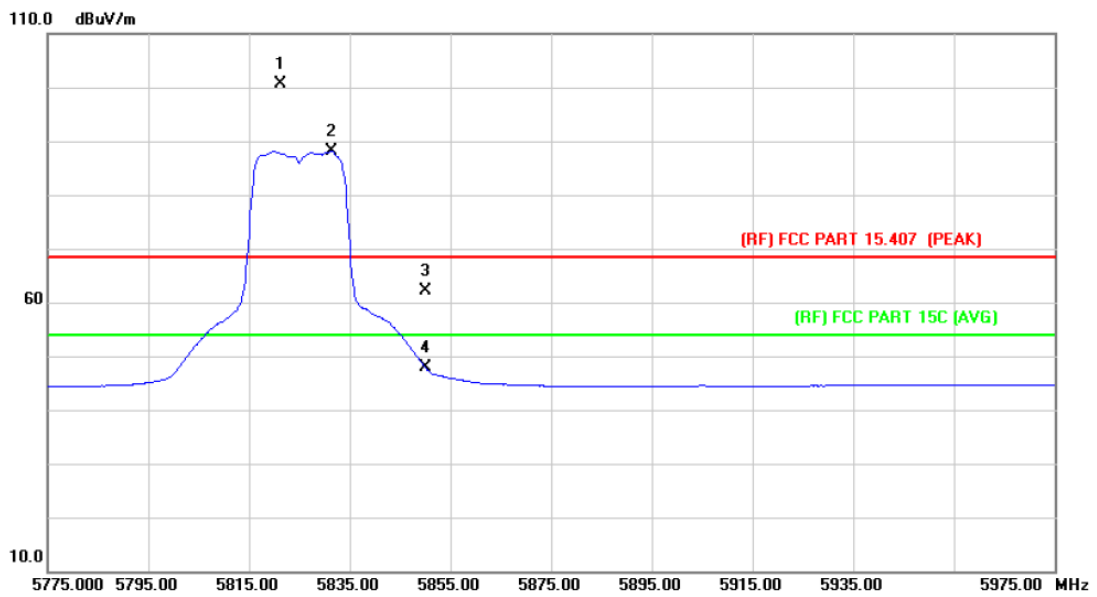

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	X	5821.400	90.48	10.05	100.53	Fundamental Frequency		peak
2	*	5831.400	78.05	10.08	88.13	Fundamental Frequency		AVG
3		5850.000	51.98	10.13	62.11	68.30	-6.19	peak
4		5850.000	37.72	10.13	47.85	54.00	-6.15	AVG

Emission Level= Read Level+ Correct Factor


EUT:	ScreenBeam 802.11 a/b/g/n/ac WiFi Module	Model Name :	SBRT8812AU
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 5V		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11ac(20) Mode5825 MHz (U-NII-3)		
Remark:	N/A		

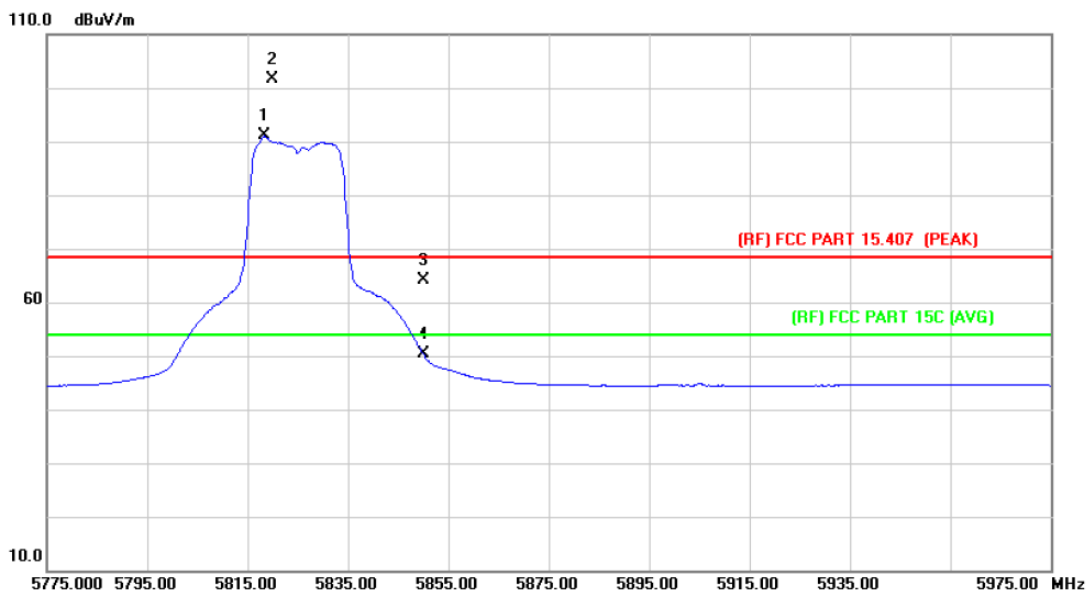

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	*	5818.400	80.96	10.05	91.01	Fundamental Frequency		AVG
2	X	5820.000	91.66	10.05	101.71	Fundamental Frequency		peak
3		5850.000	53.90	10.13	64.03	68.30	-4.27	peak
4		5850.000	40.24	10.13	50.37	54.00	-3.63	AVG

Emission Level= Read Level+ Correct Factor


EUT:	ScreenBeam 802.11 a/b/g/n/ac WiFi Module	Model Name :	SBRT8812AU
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 5V		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11n(40) Mode5755 MHz (U-NII-3)		
Remark:	N/A		

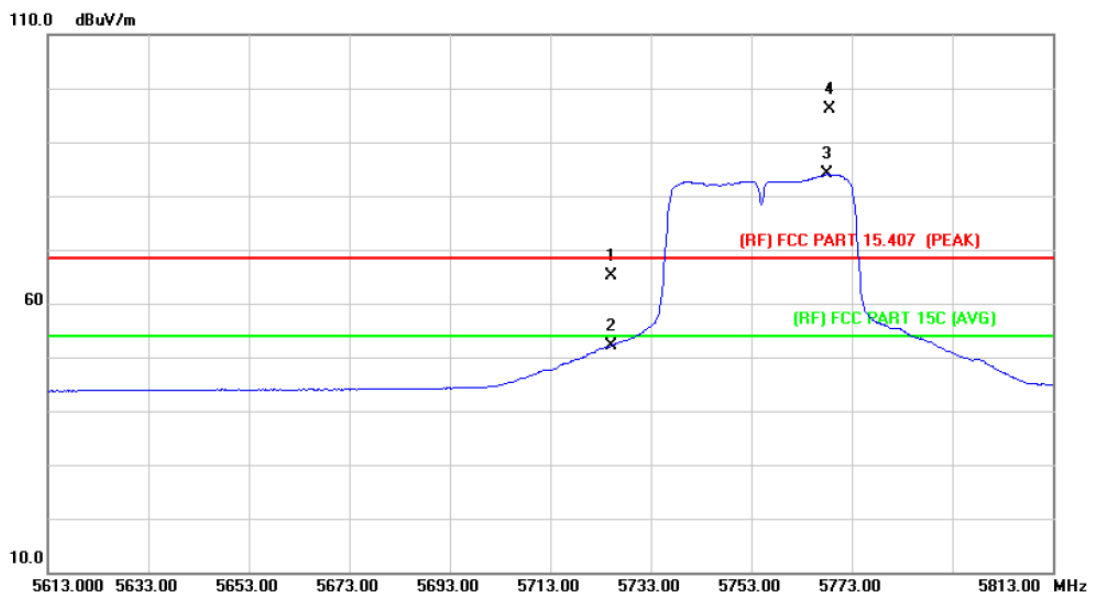

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5725.000	55.32	9.78	65.10	68.30	-3.20	peak
2		5725.000	42.25	9.78	52.03	54.00	-1.97	AVG
3	*	5768.000	74.13	9.89	84.02	Fundamental Frequency		AVG
4	X	5768.600	86.23	9.89	96.12	Fundamental Frequency		peak

Emission Level= Read Level+ Correct Factor


EUT:	ScreenBeam 802.11 a/b/g/n/ac WiFi Module	Model Name :	SBRT8812AU
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 5V		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11n(40) Mode5755 MHz (U-NII-3)		
Remark:	N/A		

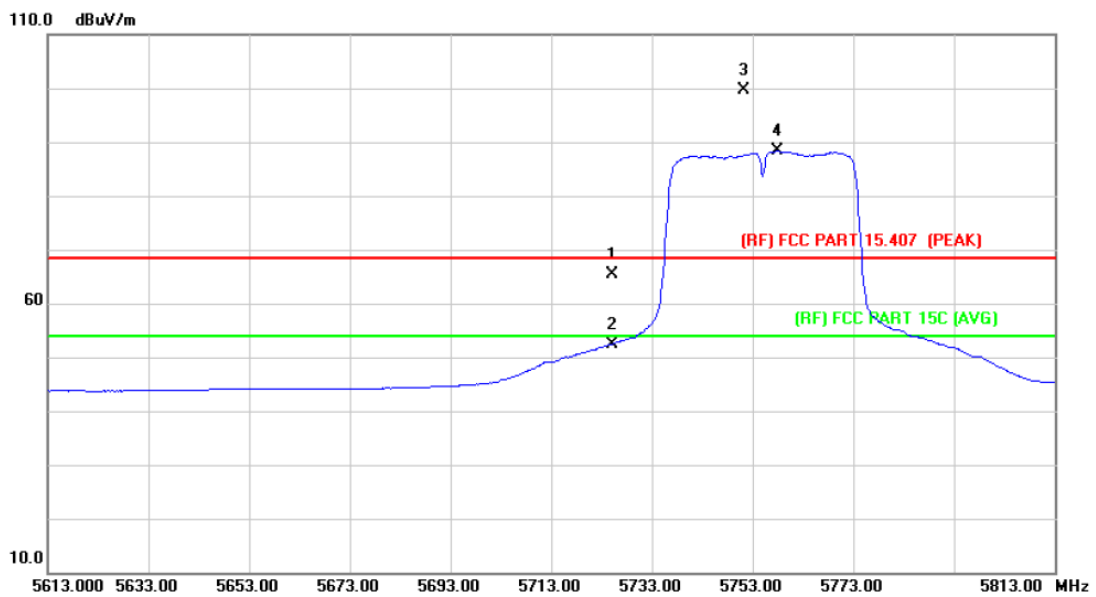

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5725.000	55.67	9.78	65.45	68.30	-2.85	peak
2		5725.000	42.63	9.78	52.41	54.00	-1.59	AVG
3	X	5751.400	89.84	9.85	99.69	Fundamental Frequency		peak
4	*	5757.800	78.51	9.86	88.37	Fundamental Frequency		AVG

Emission Level= Read Level+ Correct Factor


EUT:	ScreenBeam 802.11 a/b/g/n/ac WiFi Module	Model Name :	SBRT8812AU
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 5V		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11n(40) Mode5795 MHz (U-NII-3)		
Remark:	N/A		

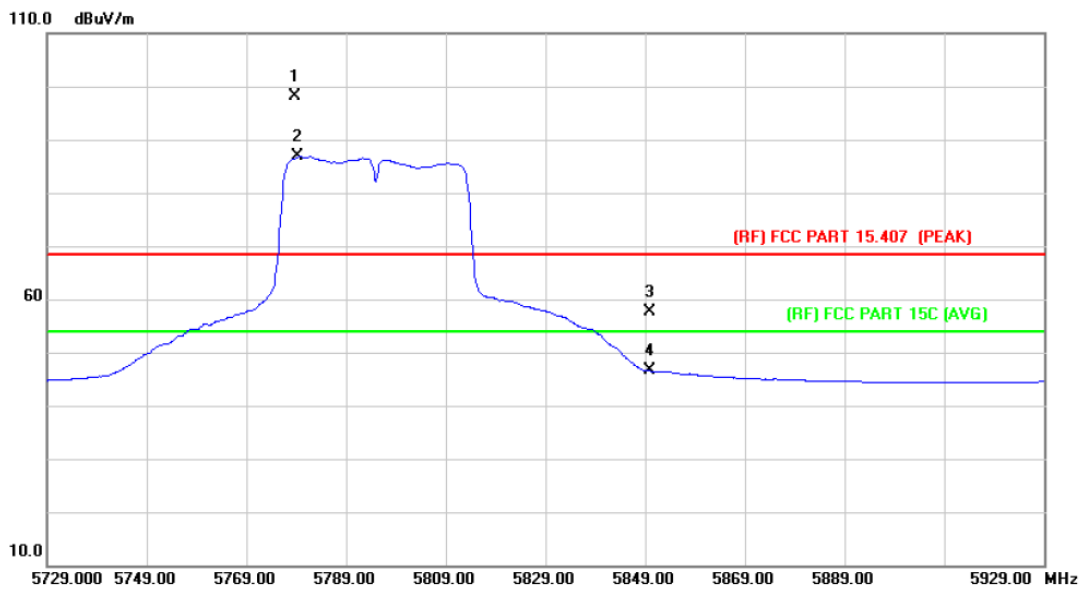

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	X	5778.800	88.21	9.92	98.13	68.30	-10.74	peak
2	*	5779.400	76.89	9.92	86.81	54.00	-7.49	AVG
3		5850.000	47.43	10.13	57.56	68.30	-10.74	peak
4		5850.000	36.38	10.13	46.51	54.00	-7.49	AVG

Emission Level= Read Level+ Correct Factor


EUT:	ScreenBeam 802.11 a/b/g/n/ac WiFi Module	Model Name :	SBRT8812AU
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 5V		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11n(40) Mode5795 MHz (U-NII-3)		
Remark:	N/A		

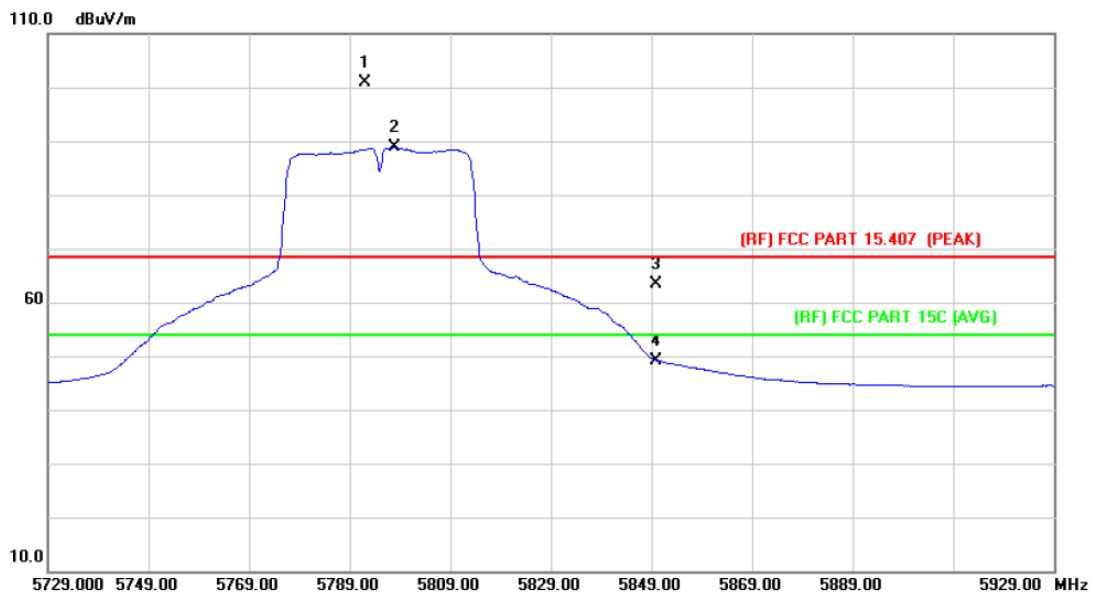

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1	X	5792.000	90.96	9.96	100.92	Fundamental Frequency		peak
2	*	5797.800	78.84	9.98	88.82	Fundamental Frequency		AVG
3		5850.000	53.17	10.13	63.30	68.30	-5.00	peak
4		5850.000	39.05	10.13	49.18	54.00	-4.82	AVG

Emission Level= Read Level+ Correct Factor


EUT:	ScreenBeam 802.11 a/b/g/n/ac WiFi Module	Model Name :	SBRT8812AU
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 5V		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11ac(40) Mode5755 MHz (U-NII-3)		
Remark:	N/A		

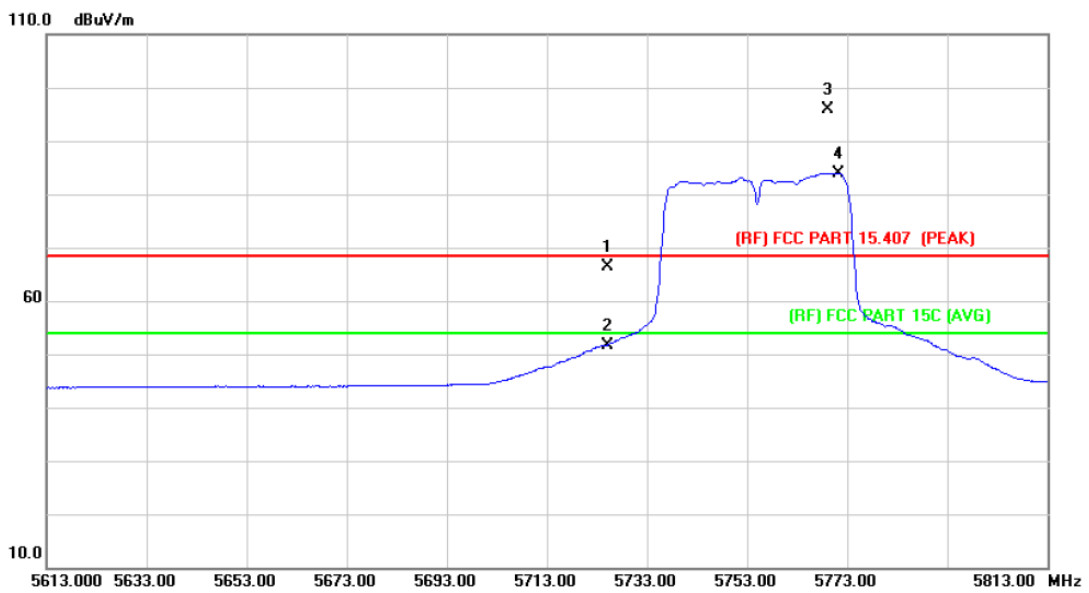

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1		5725.000	56.64	9.78	66.42	68.30	-1.88	peak
2		5725.000	41.95	9.78	51.73	54.00	-2.27	AVG
3	X	5769.000	86.09	9.89	95.98	Fundamental Frequency		peak
4	*	5771.400	74.09	9.90	83.99	Fundamental Frequency		AVG

Emission Level= Read Level+ Correct Factor


EUT:	ScreenBeam 802.11 a/b/g/n/ac WiFi Module	Model Name :	SBRT8812AU
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 5V		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11ac(40) Mode5755 MHz (U-NII-3)		
Remark:	N/A		

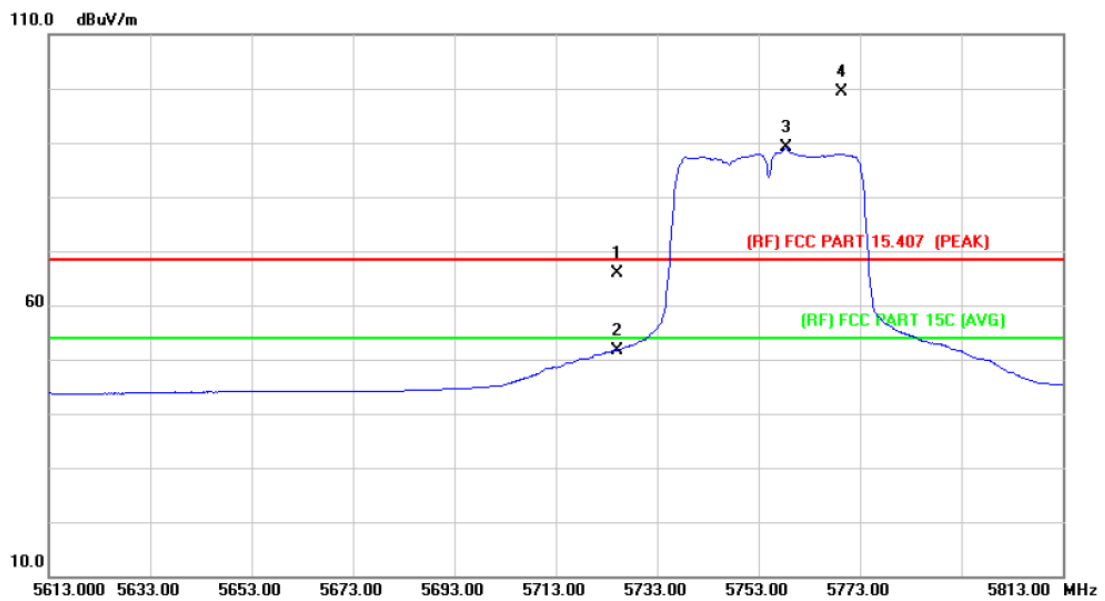

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5725.000	56.10	9.78	65.88	68.30	-2.42	peak
2		5725.000	41.95	9.78	51.73	54.00	-2.27	AVG
3	*	5758.400	79.17	9.87	89.04	Fundamental Frequency		AVG
4	X	5769.400	89.48	9.90	99.38	Fundamental Frequency		peak

Emission Level= Read Level+ Correct Factor


EUT:	ScreenBeam 802.11 a/b/g/n/ac WiFi Module	Model Name :	SBRT8812AU
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 5V		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11ac(40) Mode5795 MHz (U-NII-3)		
Remark:	N/A		

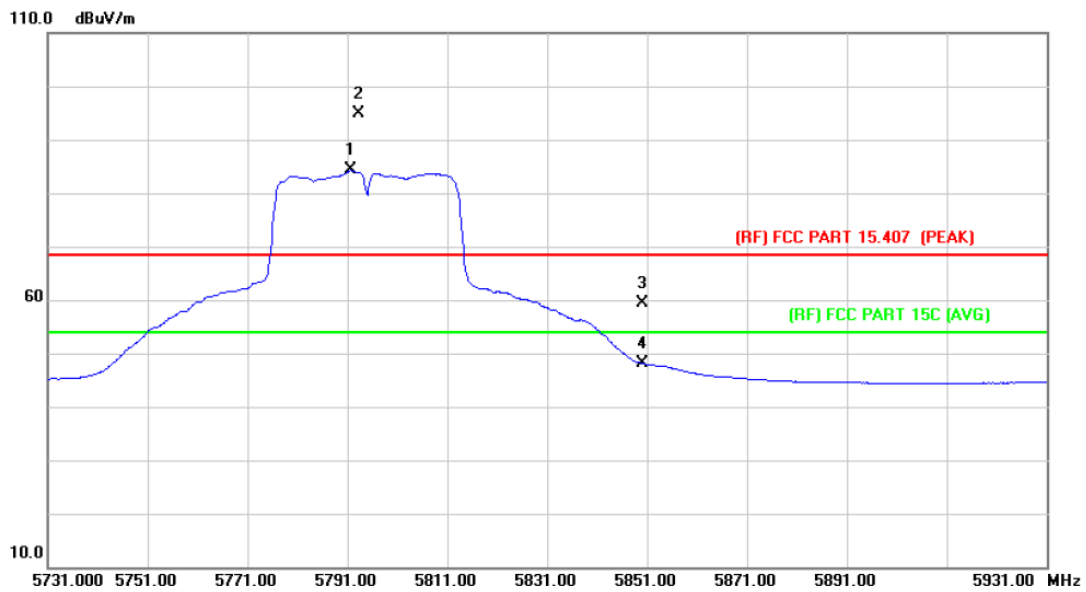

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	*	5791.600	74.31	9.96	84.27	Fundamental Frequency		AVG
2	X	5793.200	84.83	9.96	94.79	Fundamental Frequency		peak
3		5850.000	49.20	10.13	59.33	68.30	-8.97	peak
4		5850.000	37.97	10.13	48.10	54.00	-5.90	AVG

Emission Level= Read Level+ Correct Factor


EUT:	ScreenBeam 802.11 a/b/g/n/ac WiFi Module	Model Name :	SBRT8812AU
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 5V		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11ac(40) Mode5795 MHz (U-NII-3)		
Remark:	N/A		

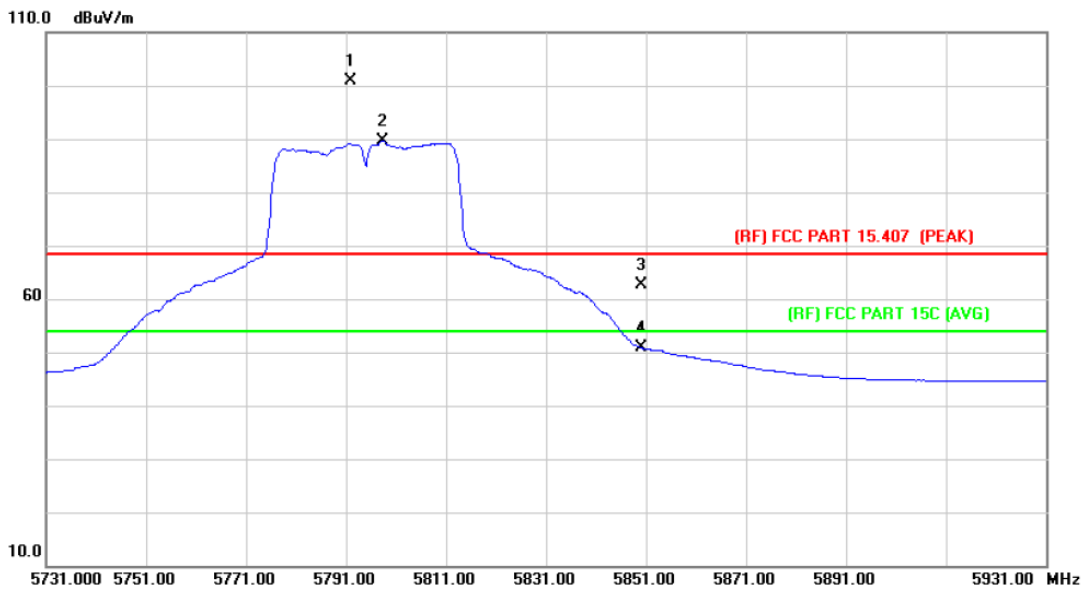

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1	X	5792.000	90.86	9.96	100.82	Fundamental Frequency		peak
2	*	5798.400	79.73	9.98	89.71	Fundamental Frequency		AVG
3		5850.000	52.56	10.13	62.69	68.30	-5.61	peak
4		5850.000	40.71	10.13	50.84	54.00	-3.16	AVG

Emission Level= Read Level+ Correct Factor


EUT:	ScreenBeam 802.11 a/b/g/n/ac WiFi Module	Model Name :	SBRT8812AU
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 5V		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11ac(80) Mode5775 MHz (U-NII-3)		
Remark:	N/A		

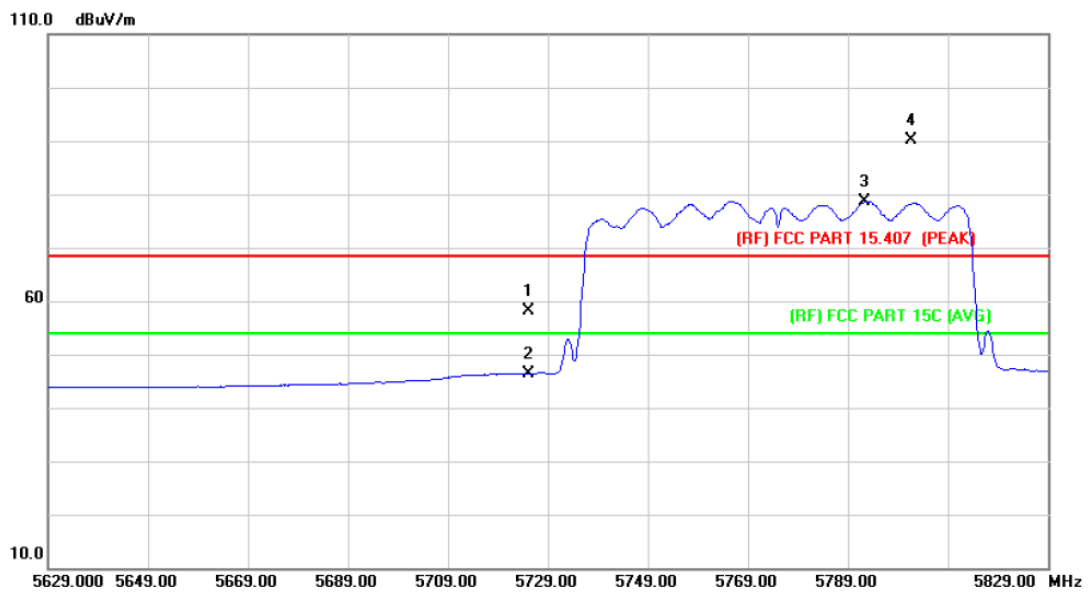

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1		5725.000	48.46	9.78	58.24	68.30	-10.06	peak
2		5725.000	36.68	9.78	46.46	54.00	-7.54	AVG
3	*	5792.400	68.69	9.96	78.65	Fundamental Frequency		AVG
4	X	5801.600	80.10	9.99	90.09	Fundamental Frequency		peak

Emission Level= Read Level+ Correct Factor


EUT:	ScreenBeam 802.11 a/b/g/n/ac WiFi Module	Model Name :	SBRT8812AU
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 5V		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11ac(80) Mode5775 MHz (U-NII-3)		
Remark:	N/A		

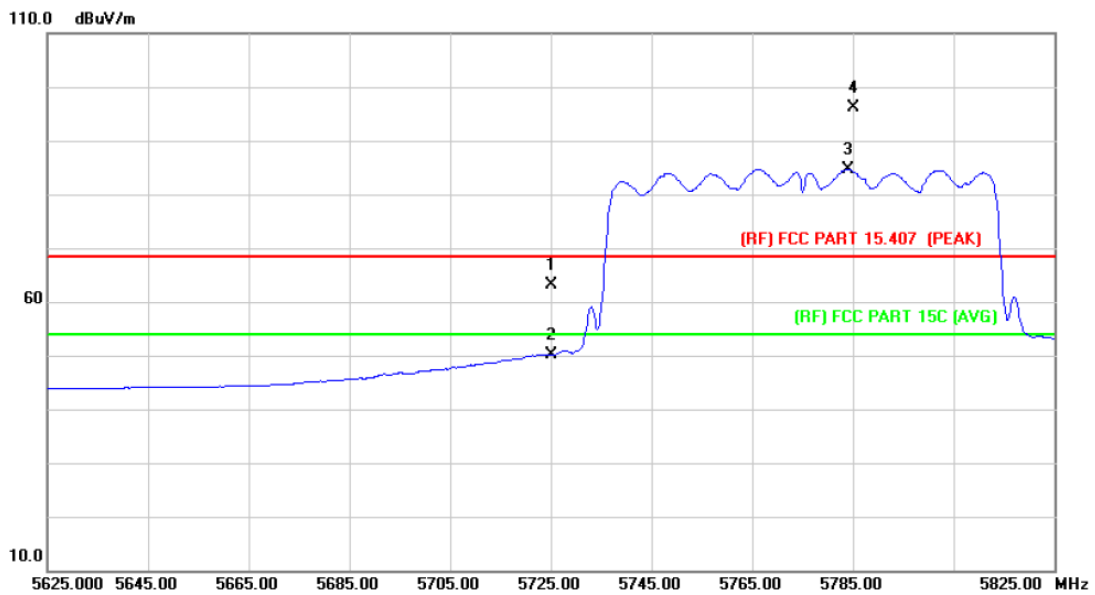

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1		5725.000	53.34	9.78	63.12	68.30	-5.18	peak
2		5725.000	40.45	9.78	50.23	54.00	-3.77	AVG
3	*	5784.000	74.77	9.94	84.71	Fundamental Frequency		AVG
4	X	5785.000	86.28	9.94	96.22	Fundamental Frequency		peak

Emission Level= Read Level+ Correct Factor


EUT:	ScreenBeam 802.11 a/b/g/n/ac WiFi Module	Model Name :	SBRT8812AU
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 5V		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11ac(80) Mode5775 MHz (U-NII-3)		
Remark:	N/A		

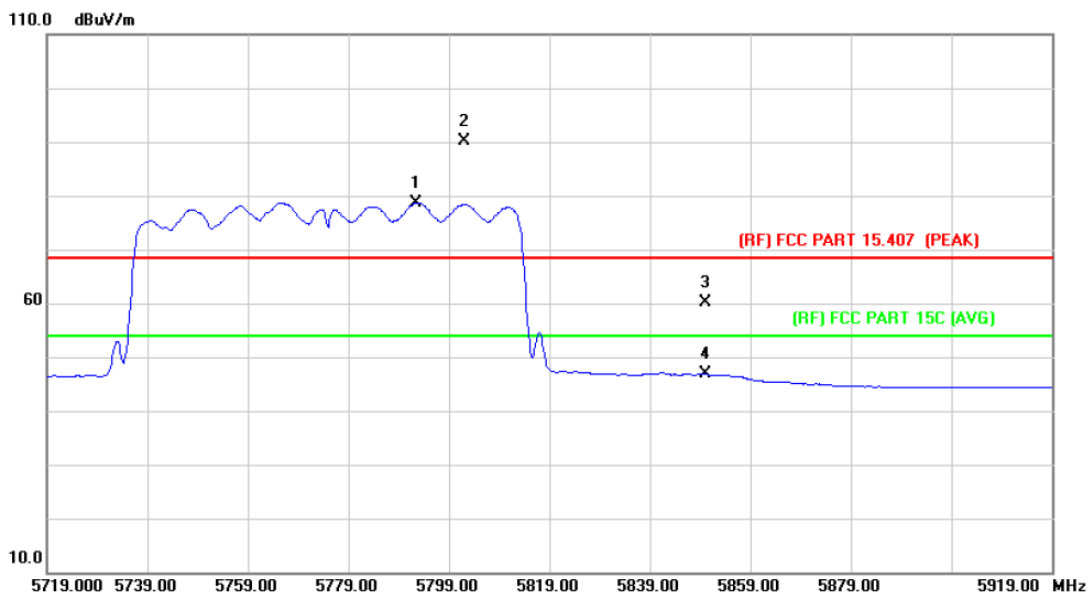

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	*	5792.400	68.73	9.96	78.69	Fundamental Frequency		AVG
2	X	5802.000	80.09	10.00	90.09	Fundamental Frequency		peak
3		5850.000	50.03	10.13	60.16	68.30	-8.14	peak
4		5850.000	36.70	10.13	46.83	54.00	-7.17	AVG

Emission Level= Read Level+ Correct Factor

EUT:	ScreenBeam 802.11 a/b/g/n/ac WiFi Module	Model Name :	SBRT8812AU
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 5V		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11ac(80) Mode5775 MHz (U-NII-3)		
Remark:	N/A		

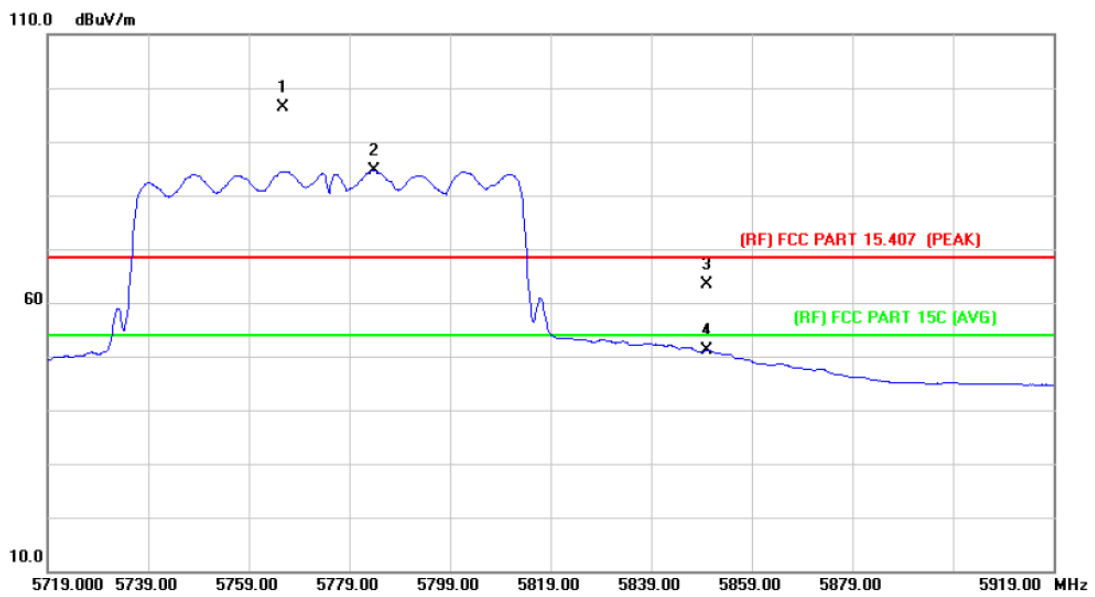


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	X	5765.800	86.55	9.89	96.44	Fundamental Frequency		peak
2	*	5783.800	74.69	9.94	84.63	Fundamental Frequency		AVG
3		5850.000	53.18	10.13	63.31	68.30	-4.99	peak
4		5850.000	40.91	10.13	51.04	54.00	-2.96	AVG


Emission Level= Read Level+ Correct Factor

(2) Conducted Test

EUT:	ScreenBeam 802.11 a/b/g/n/ac WiFi Module	Model Name :	SBRT8812AU
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 5V		
Test Mode:	TX 802.11a Mode 5180MHz /5240MHz (U-NII-1)		
Remark:	The EUT is programed in continuously transmitting mode		

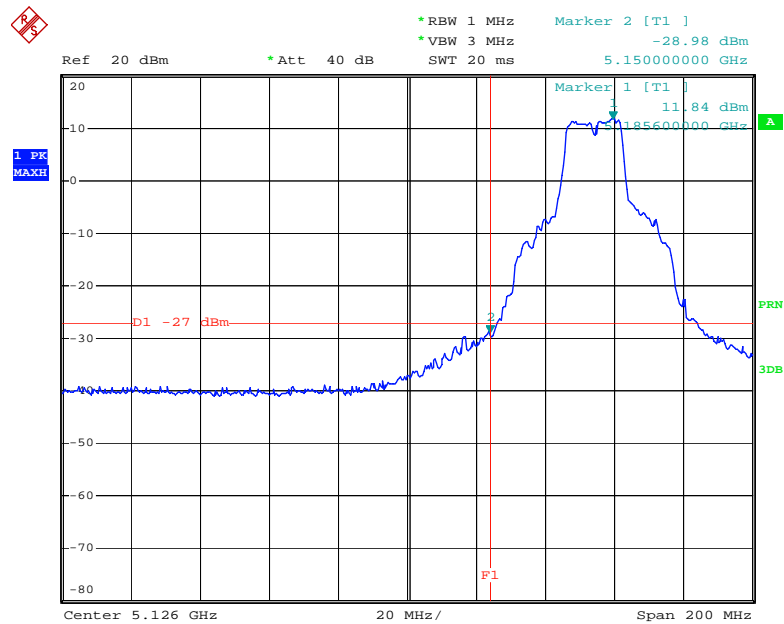


Date: 9.APR.2015 12:01:16

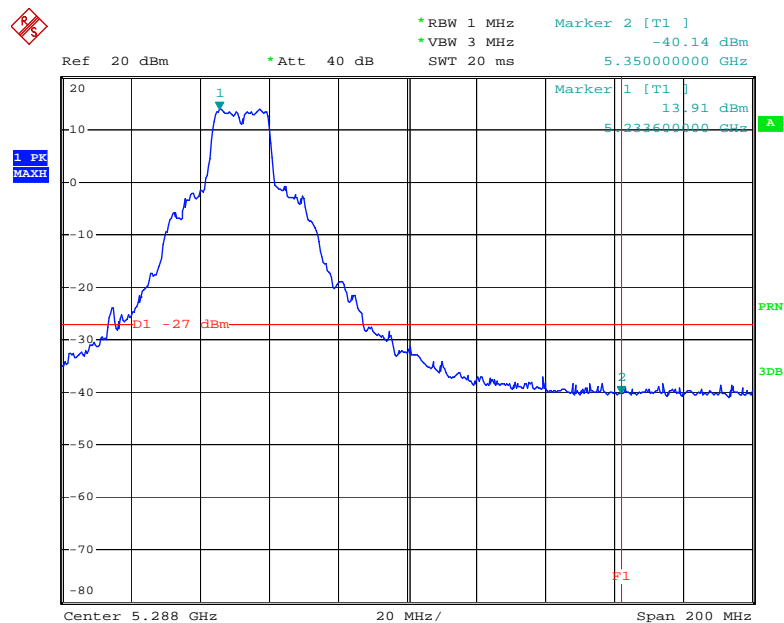


Date: 9.APR.2015 12:21:16

EUT:	ScreenBeam 802.11 a/b/g/n/ac WiFi Module	Model Name :	SBRT8812AU
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 5V		
Test Mode:	TX 802.11n(20) Mode 5180MHz /5240MHz (U-NII-1)		
Remark:	The EUT is programed in continuously transmitting mode		

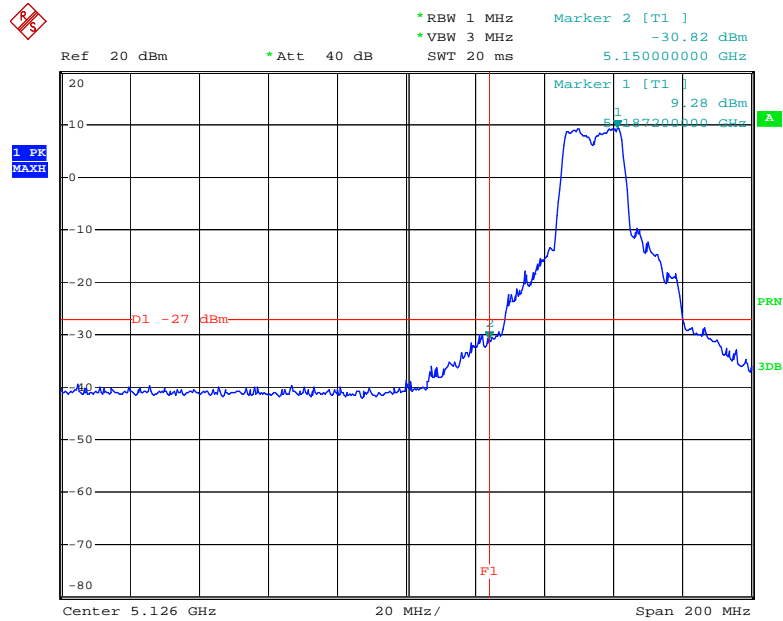


Date: 9.APR.2015 12:03:26

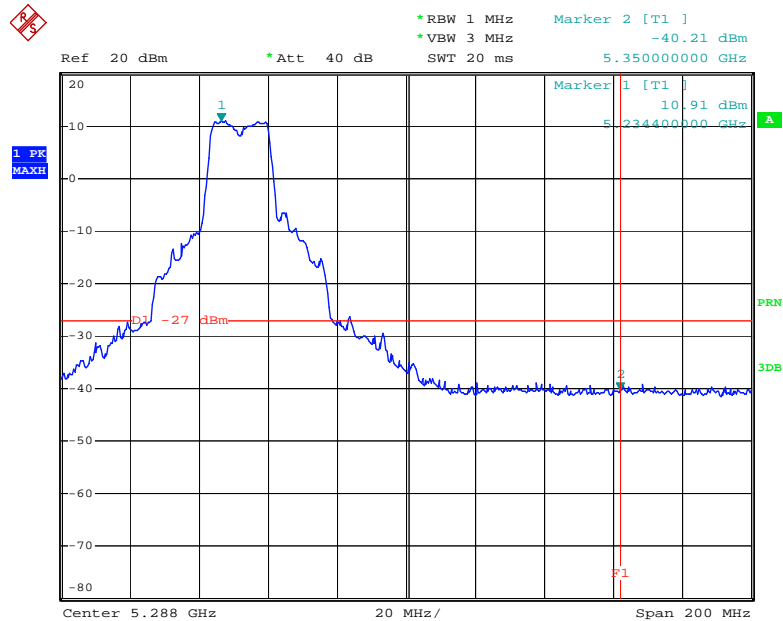


Date: 9.APR.2015 12:22:25

EUT:	ScreenBeam 802.11 a/b/g/n/ac WiFi Module	Model Name :	SBRT8812AU
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 5V		
Test Mode:	TX 802.11ac(20) Mode 5180MHz /5240MHz (U-NII-1)		
Remark:	The EUT is programed in continuously transmitting mode		

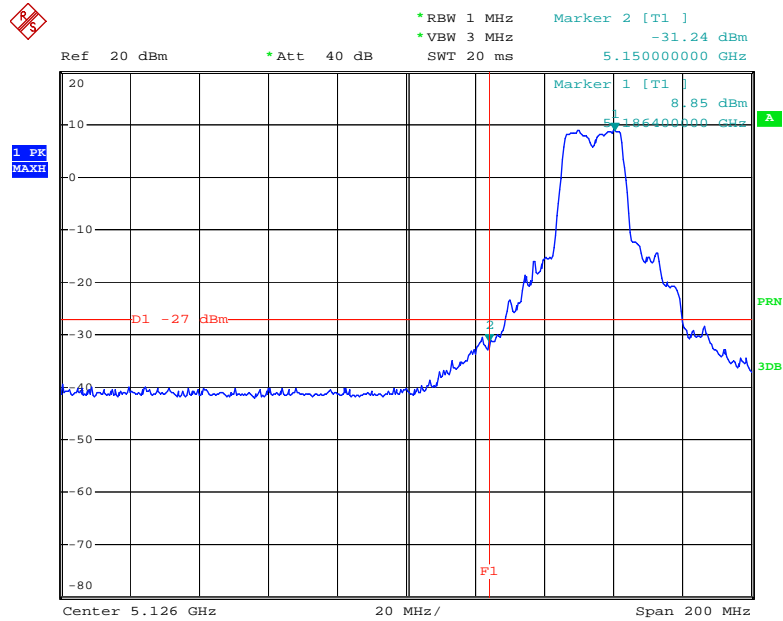


Date: 9.APR.2015 12:05:43

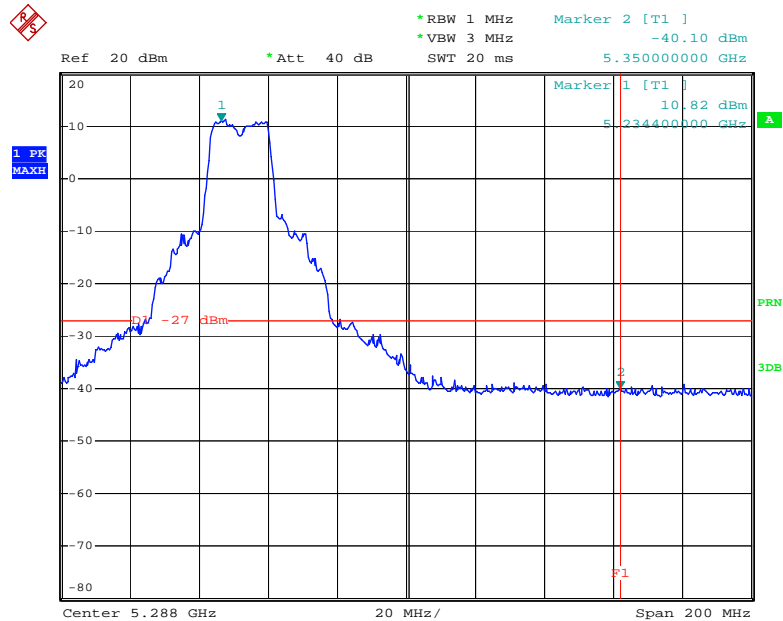


Date: 9.APR.2015 12:23:29

EUT:	ScreenBeam 802.11 a/b/g/n/ac WiFi Module	Model Name :	SBRT8812AU
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 5V		
Test Mode:	TX 802.11n(40) Mode 5190MHz /5230MHz (U-NII-1)		
Remark:	The EUT is programed in continuously transmitting mode		

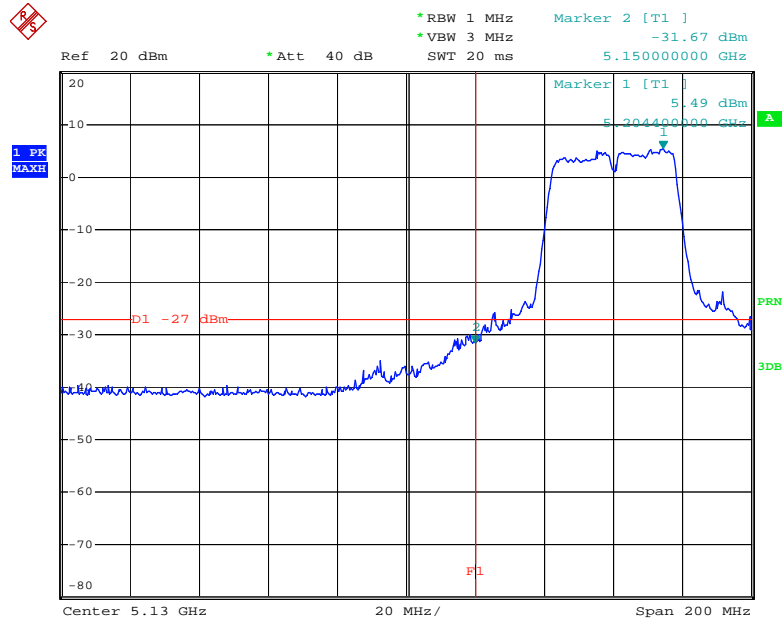


Date: 9.APR.2015 12:09:45

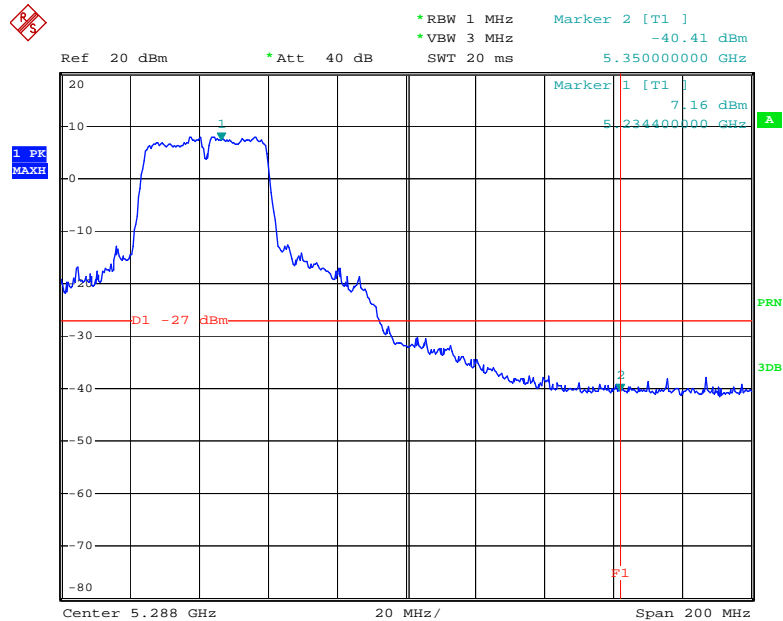


Date: 9.APR.2015 12:24:59

EUT:	ScreenBeam 802.11 a/b/g/n/ac WiFi Module	Model Name :	SBRT8812AU
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 5V		
Test Mode:	TX 802.11ac(40) Mode 5190MHz /5230MHz (U-NII-1)		
Remark:	The EUT is programed in continuously transmitting mode		

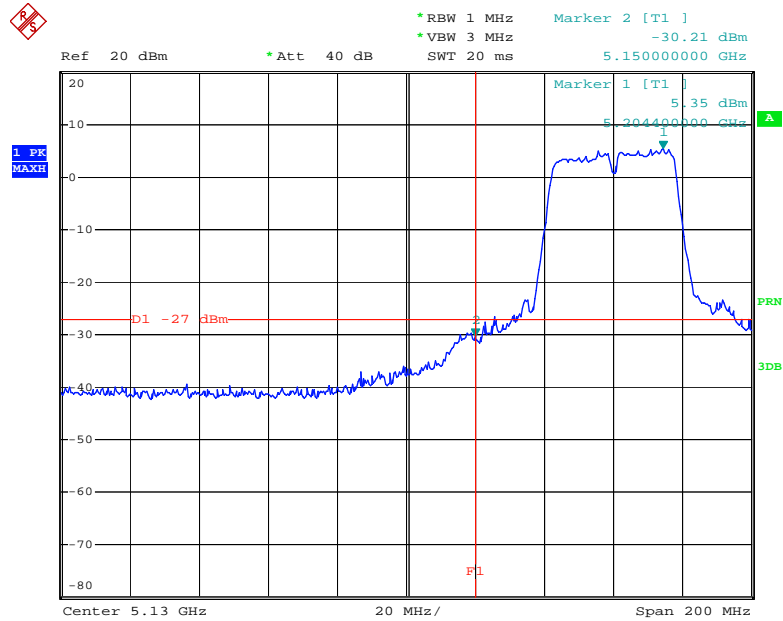


Date: 9.APR.2015 12:10:58

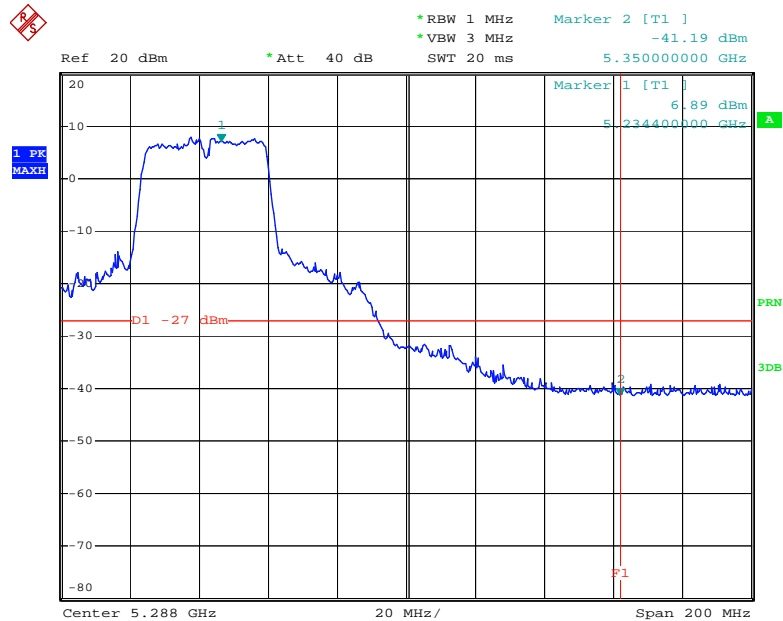


Date: 9.APR.2015 12:25:45

EUT:	ScreenBeam 802.11 a/b/g/n/ac WiFi Module	Model Name :	SBRT8812AU
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 5V		
Test Mode:	TX 802.11ac(80) Mode 5775MHz (U-NII-1)		
Remark:	The EUT is programed in continuously transmitting mode		

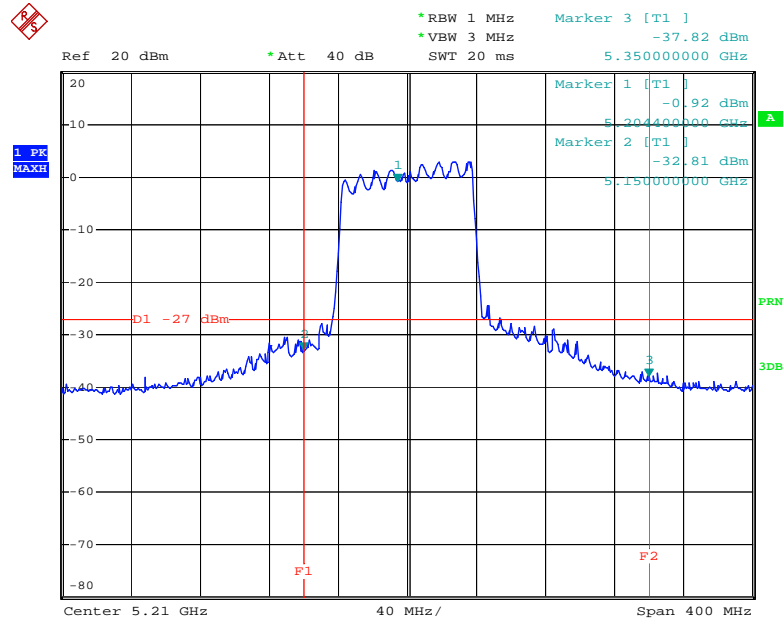


Date: 9.APR.2015 12:15:14

EUT:	ScreenBeam 802.11 a/b/g/n/ac WiFi Module	Model Name :	SBRT8812AU
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 5V		
Test Mode:	TX 802.11a Mode 5745MHz /5825MHz (U-NII-3)		
Remark:	The EUT is programed in continuously transmitting mode		

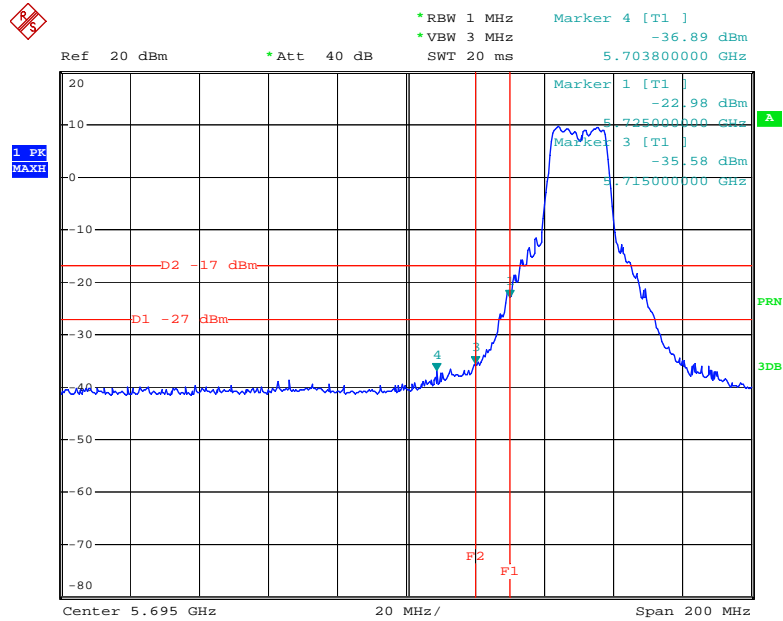


Date: 9.APR.2015 12:47:01

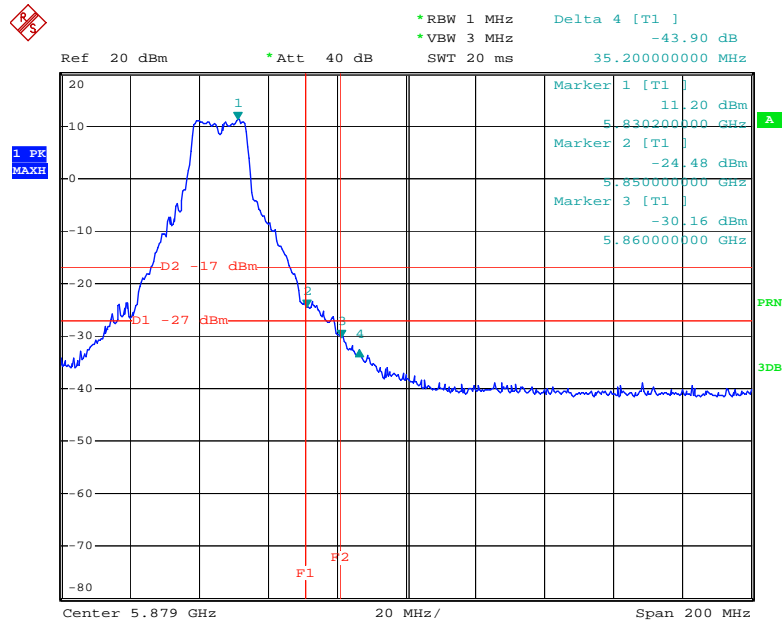


Date: 9.APR.2015 12:50:22

EUT:	ScreenBeam 802.11 a/b/g/n/ac WiFi Module	Model Name :	SBRT8812AU
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 5V		
Test Mode:	TX 802.11n(20) Mode 5745MHz /5825MHz (U-NII-3)		
Remark:	The EUT is programed in continuously transmitting mode		

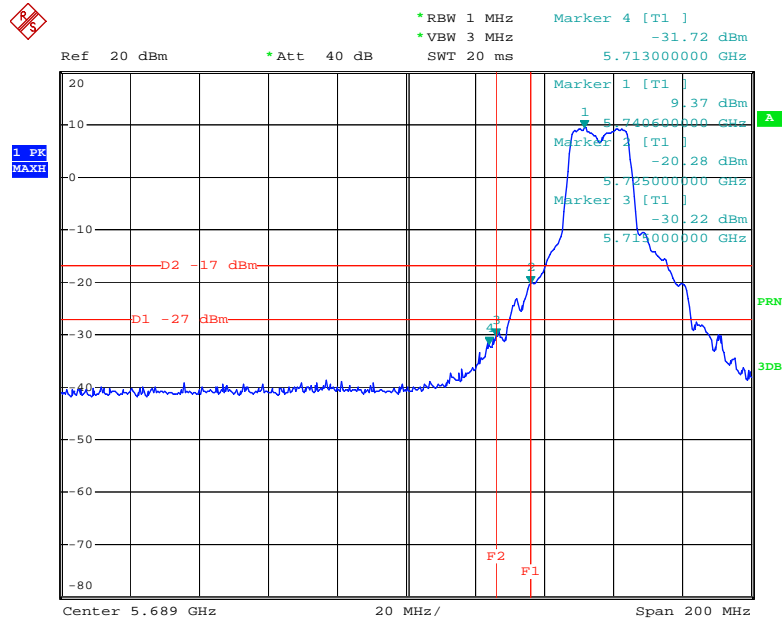


Date: 9.APR.2015 13:10:20

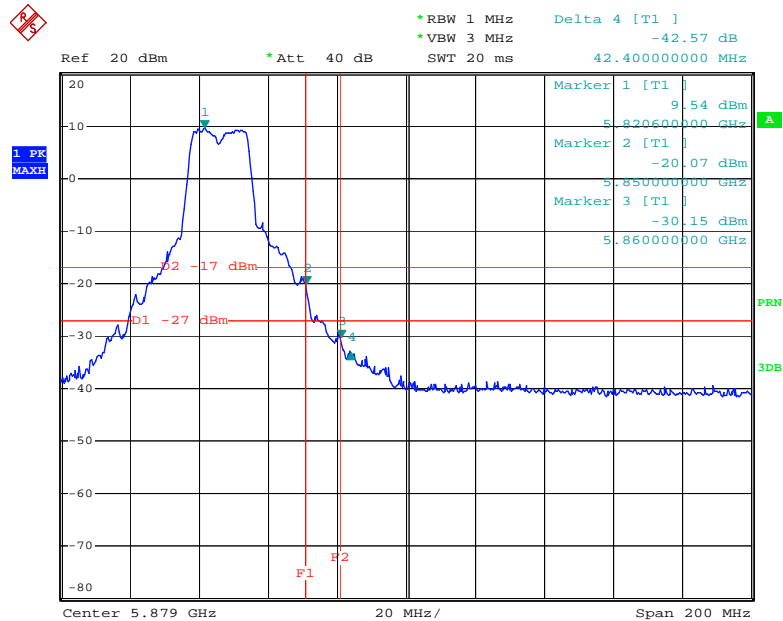


Date: 9.APR.2015 12:52:30

EUT:	ScreenBeam 802.11 a/b/g/n/ac WiFi Module	Model Name :	SBRT8812AU
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 5V		
Test Mode:	TX 802.11ac(20) Mode 5745MHz /5825MHz (U-NII-3)		
Remark:	The EUT is programed in continuously transmitting mode		

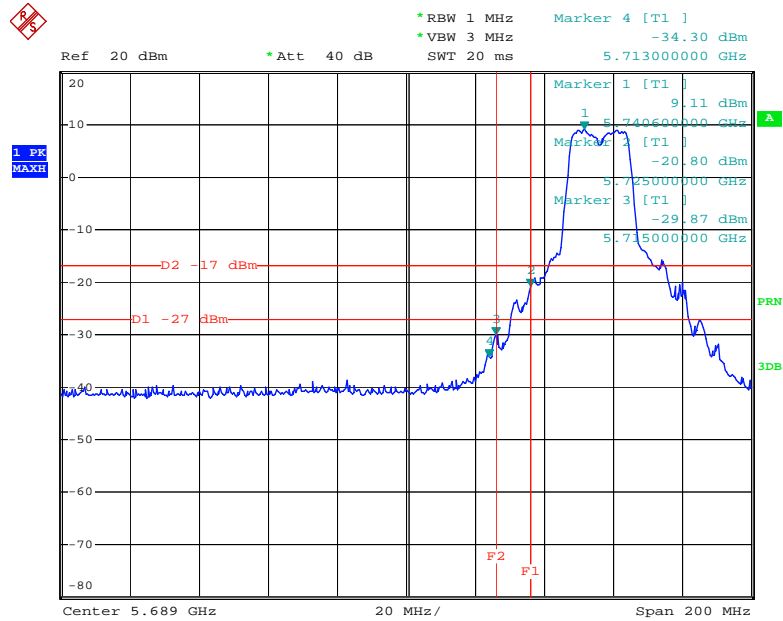


Date: 9.APR.2015 13:11:36

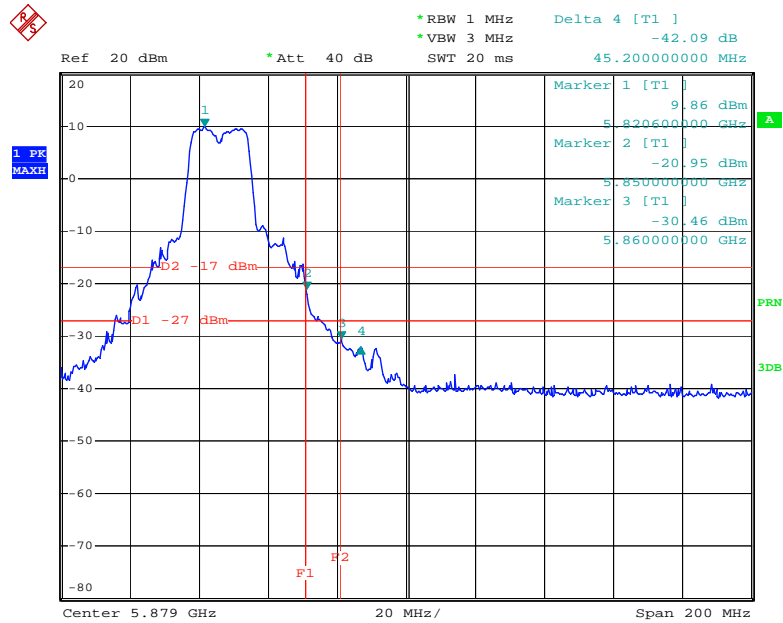


Date: 9.APR.2015 12:54:29

EUT:	ScreenBeam 802.11 a/b/g/n/ac WiFi Module	Model Name :	SBRT8812AU
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 5V		
Test Mode:	TX 802.11n(40) Mode 5755MHz /5795MHz (U-NII-3)		
Remark:	The EUT is programed in continuously transmitting mode		

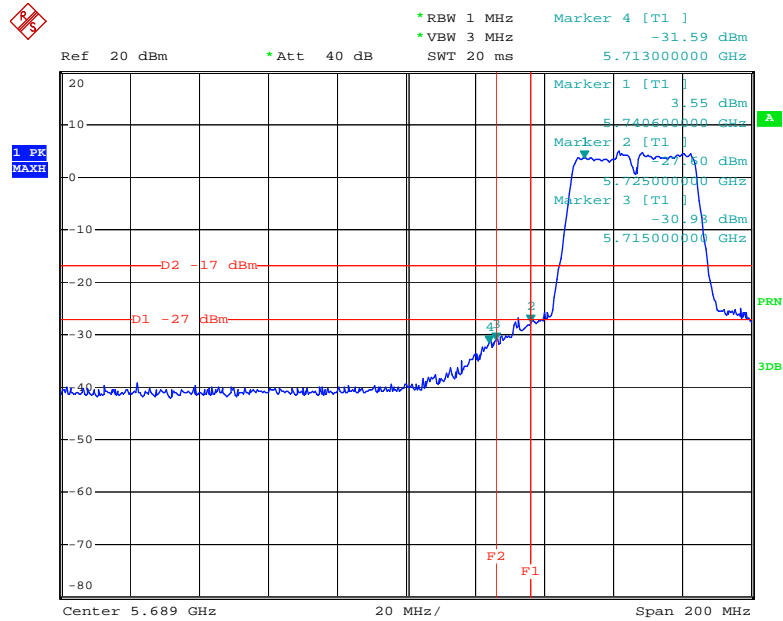


Date: 9.APR.2015 13:14:27

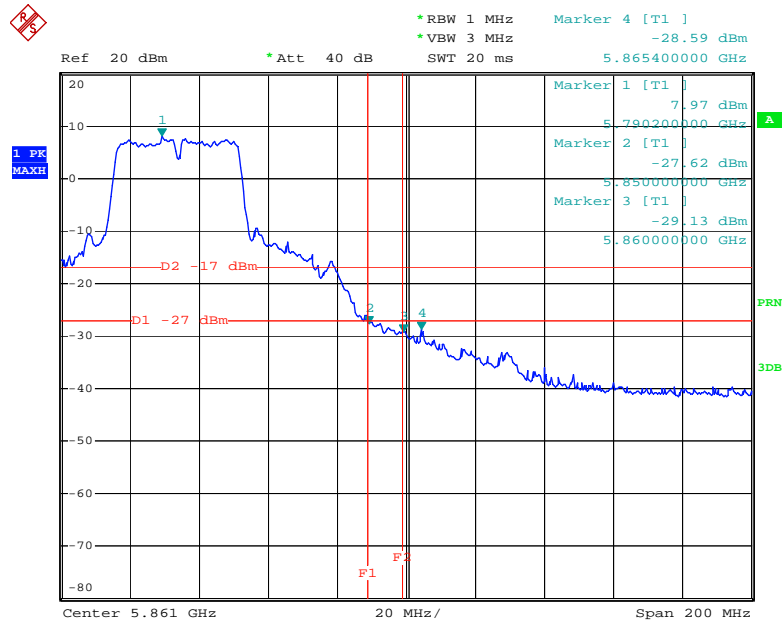


Date: 9.APR.2015 12:57:12

EUT:	ScreenBeam 802.11 a/b/g/n/ac WiFi Module	Model Name :	SBRT8812AU
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 5V		
Test Mode:	TX 802.11ac(40) Mode 5755MHz /5795MHz (U-NII-3)		
Remark:	The EUT is programed in continuously transmitting mode		

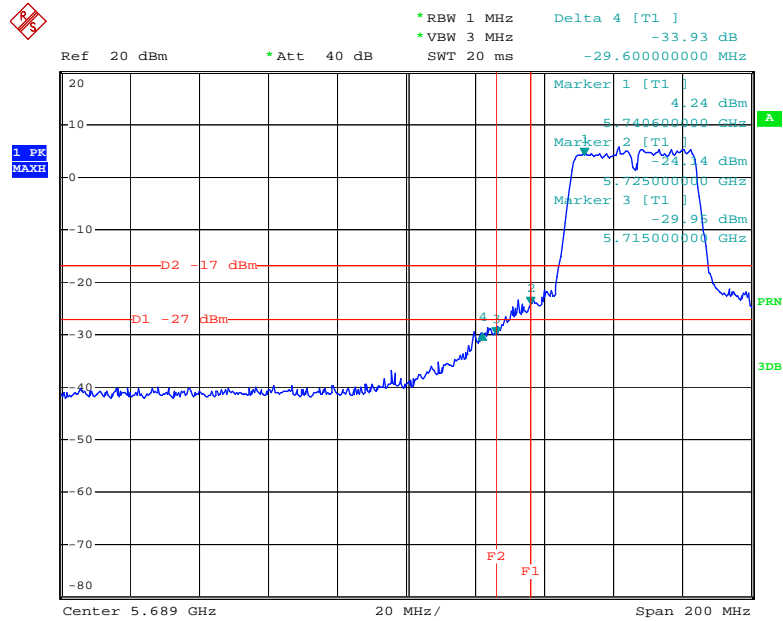


Date: 9.APR.2015 13:15:43

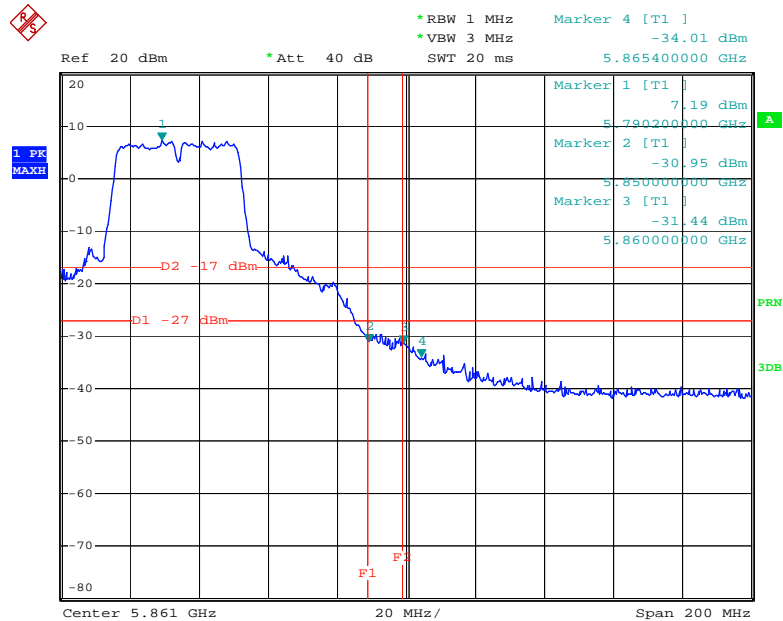


Date: 9.APR.2015 13:03:18

EUT:	ScreenBeam 802.11 a/b/g/n/ac WiFi Module	Model Name :	SBRT8812AU
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 5V		
Test Mode:	TX 802.11ac(80) Mode 5775MHz (U-NII-3)		
Remark:	The EUT is programed in continuously transmitting mode		

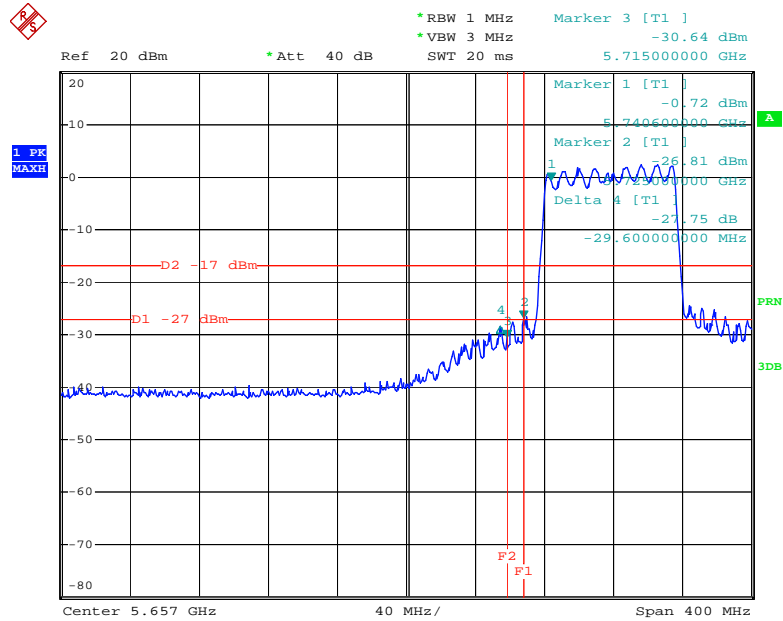

Date: 9.APR.2015 13:17:54

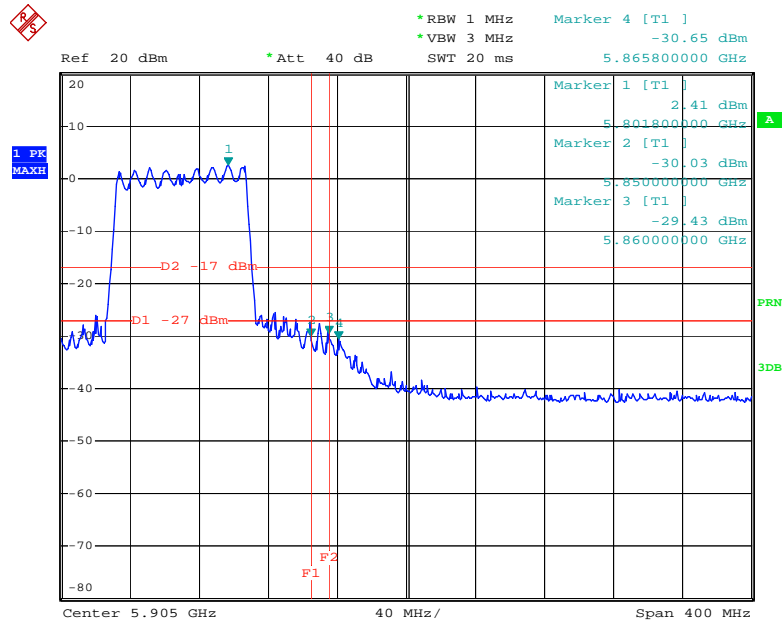

Date: 9.APR.2015 13:19:33

7. Bandwidth Test

7.1 Test Standard and Limit


7.1.1 Test Standard

FCC Part 15.407

7.1.2 Test Limit

FCC Part 15 Subpart C(15.407)/RSS-210		
Test Item	Limit	Frequency Range(MHz)
26 Bandwidth	N/A	5150~5250
6 dB Bandwidth	>500kHz	5725~5850

7.2 Test Setup



7.3 Test Procedure

- (1) The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.
- (2) The setting of the spectrum analyser as below:

26dB Bandwidth Test	
Spectrum Parameters	Setting
Attenuation	Auto
Span	>26 dB Bandwidth
RBW	Approximately 1% of the emission bandwidth
VBW	VBW>RBW
Detector	Peak
Trace	Max Hold
Sweep Time	Auto
6dB Bandwidth Test	
Spectrum Parameters	Setting
Attenuation	Auto
Span	>6 dB Bandwidth
RBW	100 kHz



VBW	VBW>=3*RBW
Detector	Peak
Trace	Max Hold
Sweep Time	Auto
99% Occupied Bandwidth Test	
Spectrum Parameters	Setting
Attenuation	Auto
RBW	1% to 5% of the OBW
VBW	≥ 3RBW
Detector	Peak
Trace	Max Hold

7.4 EUT Operating Condition



The EUT was set to continuously transmitting in each mode and low, Middle and high channel for the test.

7.5 Test Data



EUT:	ScreenBeam 802.11 a/b/g/n/ac WiFi Module	Model Name :	SBRT8812AU
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 5V		
Test Mode:	TX 802.11a Mode (U-NII-1)		
Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Bandwidth (MHz)
36	5180	30.000	18.6628
40	5200	29.966	16.8044
48	5240	30.000	17.4541
802.11a Mode			
5180 MHz			
Center 5.18 GHz #Res BW 300 kHz		Span 30 MHz Sweep 4 ms (401 pts)	
Occupied Bandwidth 18.6628 MHz		Occ BW % Pwr 99.00 % x dB -26.00 dB	
Transmit Freq Error -87.657 kHz x dB Bandwidth 30.000 MHz*			

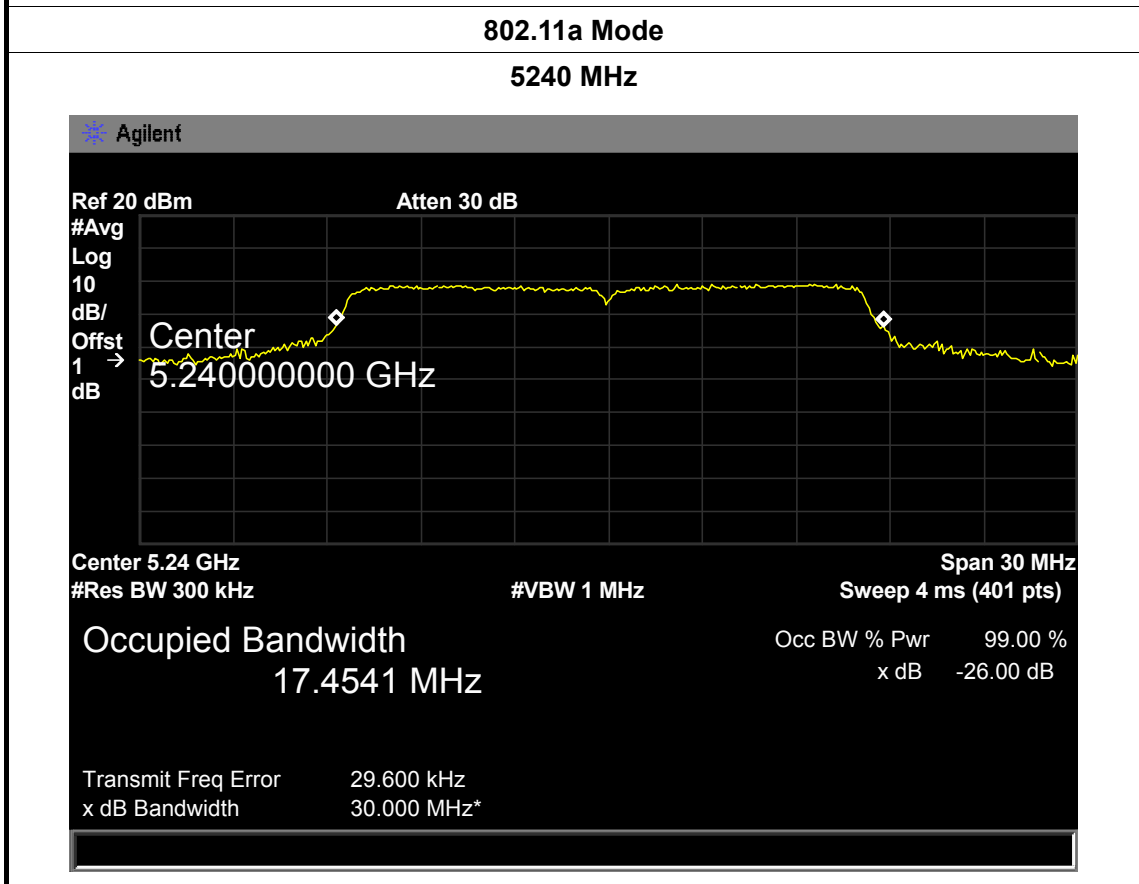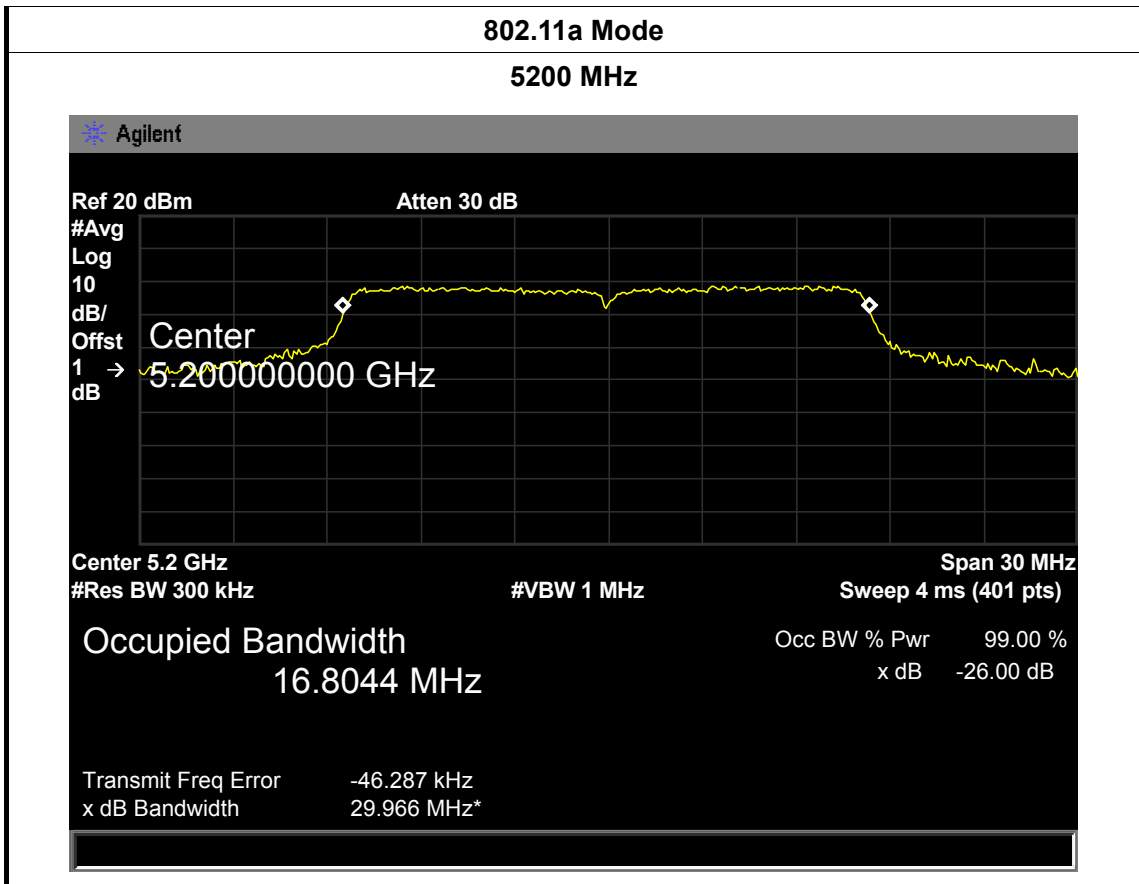


EUT:	ScreenBeam 802.11 a/b/g/n/ac WiFi Module	Model Name :	SBRT8812AU
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 5V		
Test Mode:	TX 802.11n(HT20) Mode (U-NII-1)		
Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Bandwidth (MHz)
36	5180	24.588	17.7295
40	5200	25.649	17.7339
48	5240	28.492	17.7542
802.11n(HT20) Mode			
5180 MHz			
<p>Agilent</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Avg Log 10 dB/ Offst 1 dB</p> <p>Center 5.180000000 GHz</p> <p>Center 5.18 GHz Span 30 MHz #Res BW 300 kHz #VBW 1 MHz Sweep 4 ms (401 pts)</p> <p>Occupied Bandwidth Occ BW % Pwr 99.00 % 17.7295 MHz x dB -26.00 dB</p> <p>Transmit Freq Error -44.484 kHz x dB Bandwidth 24.588 MHz*</p>			

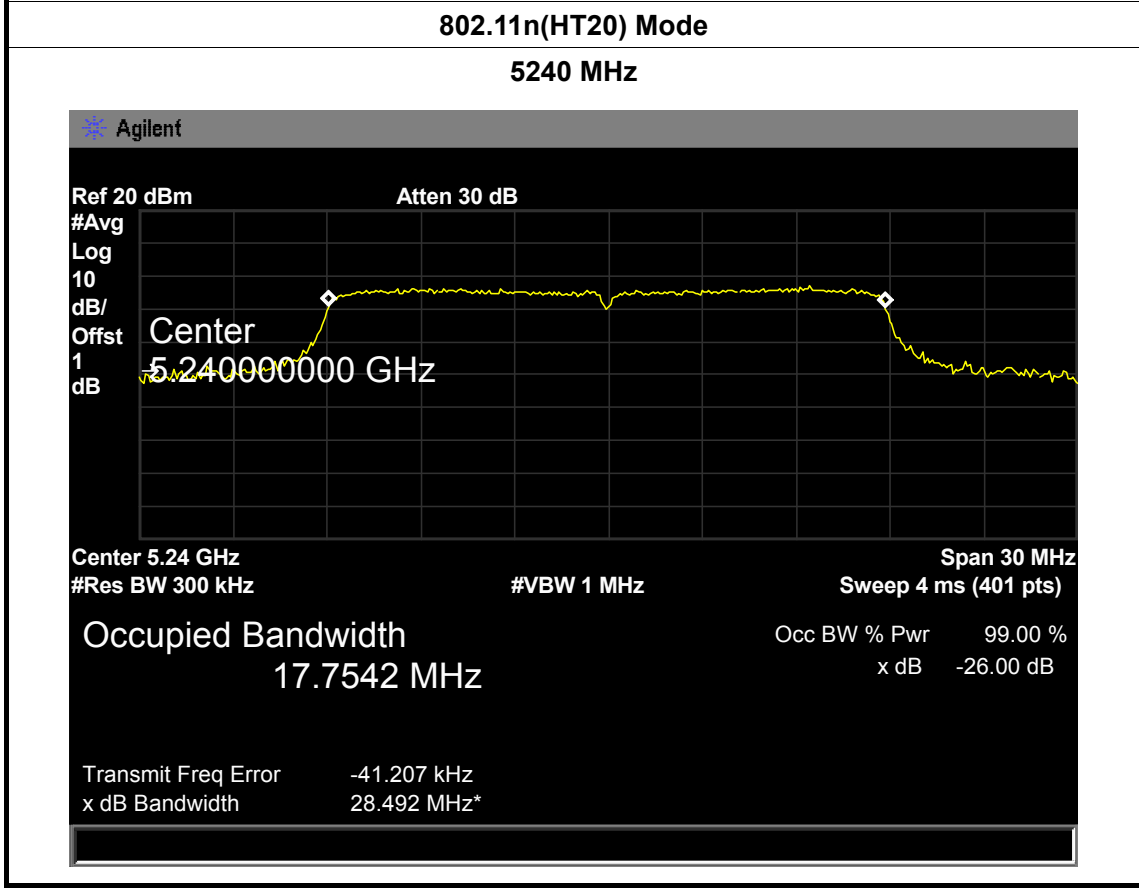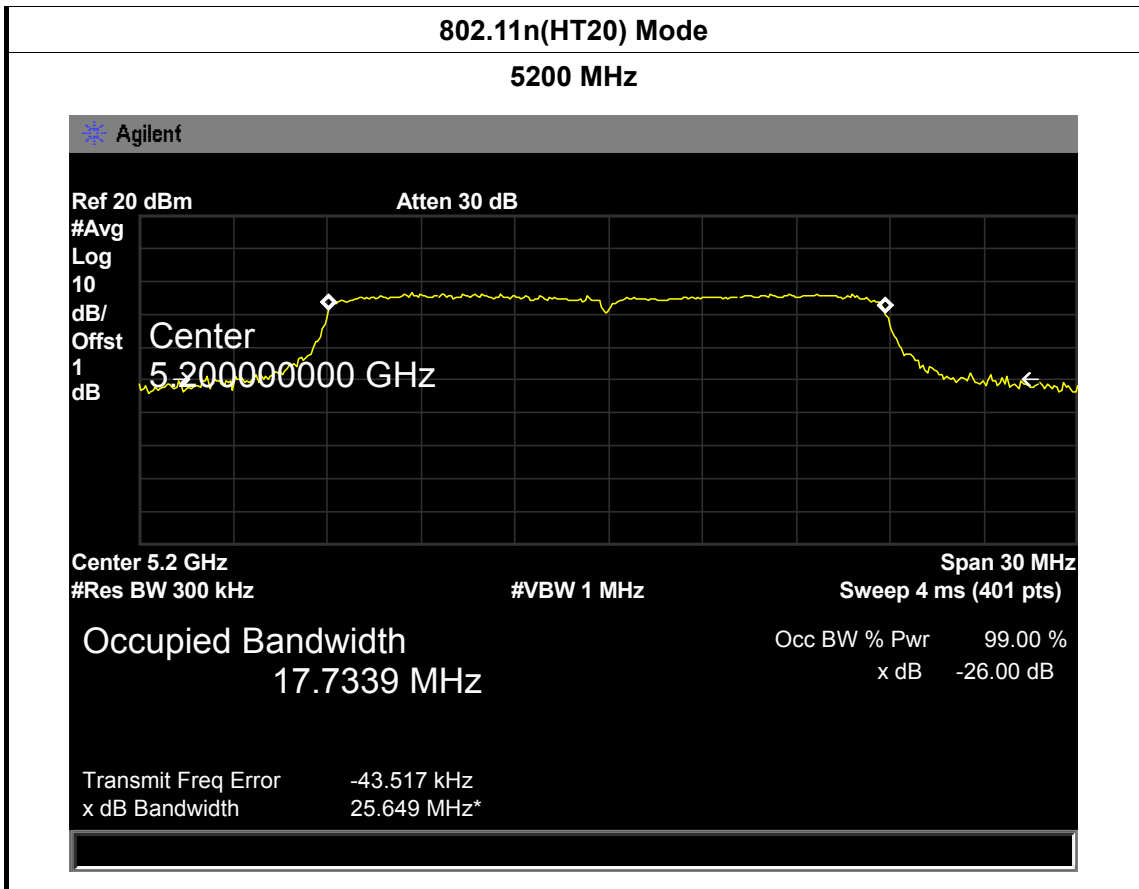


EUT:	ScreenBeam 802.11 a/b/g/n/ac WiFi Module	Model Name :	SBRT8812AU
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 5V		
Test Mode:	TX 802.11ac(20) Mode (U-NII-1)		
Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Bandwidth (MHz)
36	5180	22.438	17.6776
40	5200	25.076	17.7405
48	5240	26.081	17.7402
802.11ac(20) Mode			
5180 MHz			
<p>The screenshot displays a spectrum analyzer interface with a yellow signal trace. The center frequency is 5.18 GHz. The occupied bandwidth is 17.6776 MHz. The reference level is 20 dBm and the attenuation is 30 dB. The resolution bandwidth is 300 kHz and the video bandwidth is 1 MHz. The sweep time is 4 ms. The transmit frequency error is -64.285 kHz and the 26 dB bandwidth is 22.438 MHz.</p>			

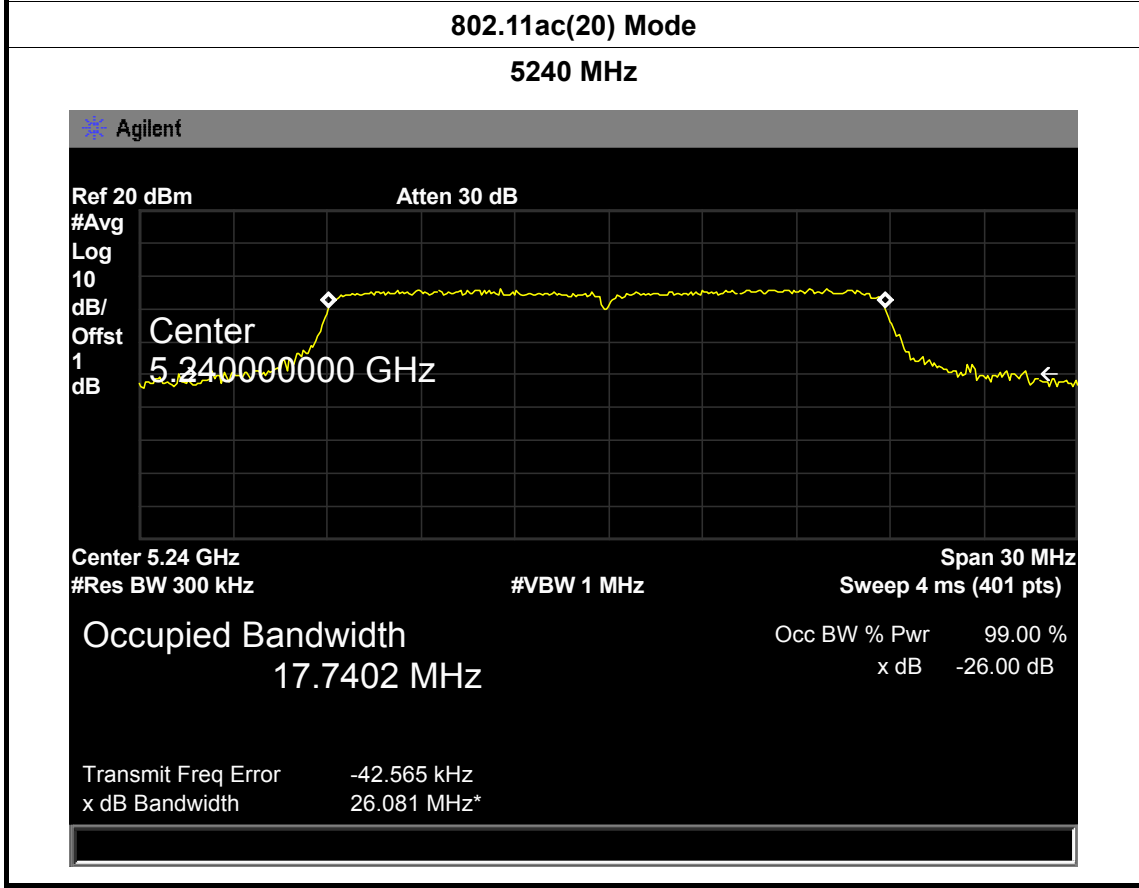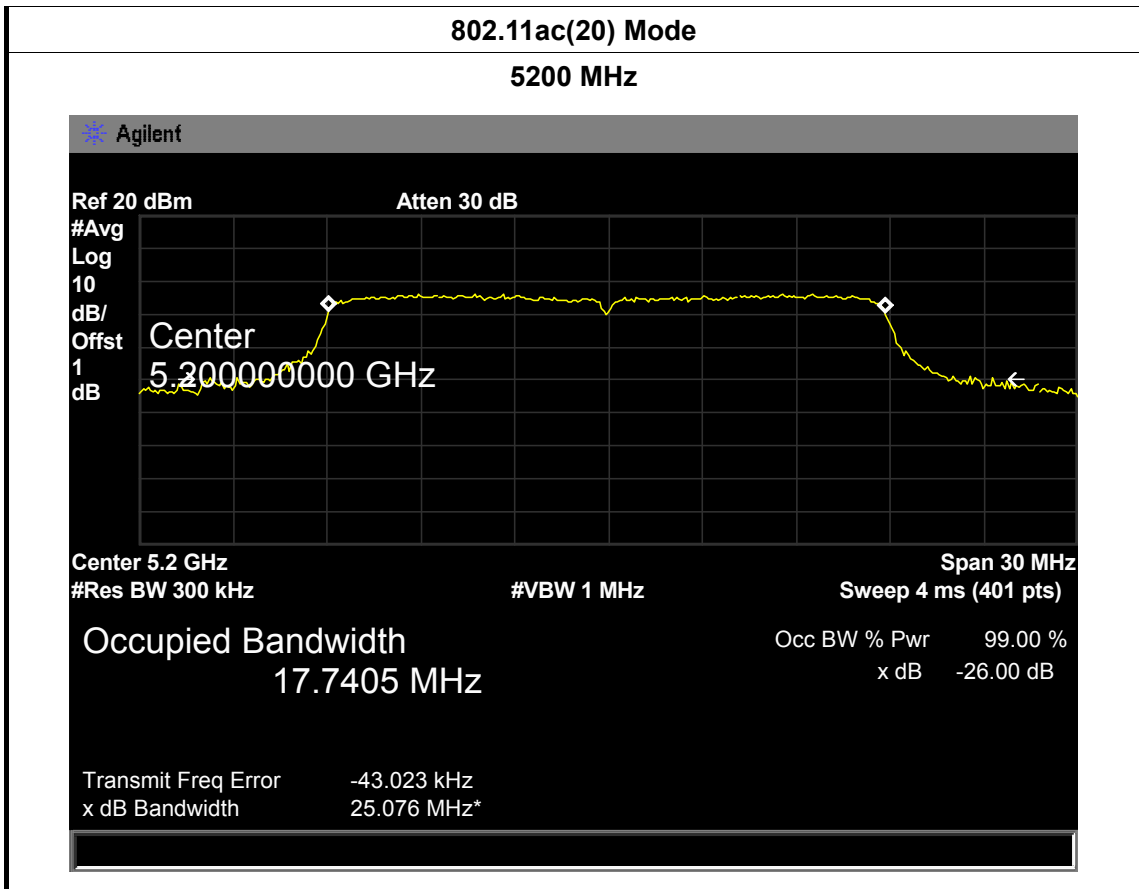


EUT:	ScreenBeam 802.11 a/b/g/n/ac WiFi Module	Model Name :	SBRT8812AU
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 5V		
Test Mode:	TX 802.11N(HT40) Mode (U-NII-1)		
Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Bandwidth (MHz)
38	5190	41.428	36.0463
46	5230	41.639	36.0446
802.11N(HT40) Mode			
5190 MHz			
<p>The screenshot shows a spectrum analyzer interface with a yellow signal trace. The center frequency is 5.19000000 GHz. The occupied bandwidth is 36.0463 MHz. The transmit frequency error is -48.131 kHz. The display also shows a 26dB bandwidth of 41.428 MHz and a 99% bandwidth of 36.0463 MHz. The signal is centered on a grid with a span of 60 MHz.</p>			


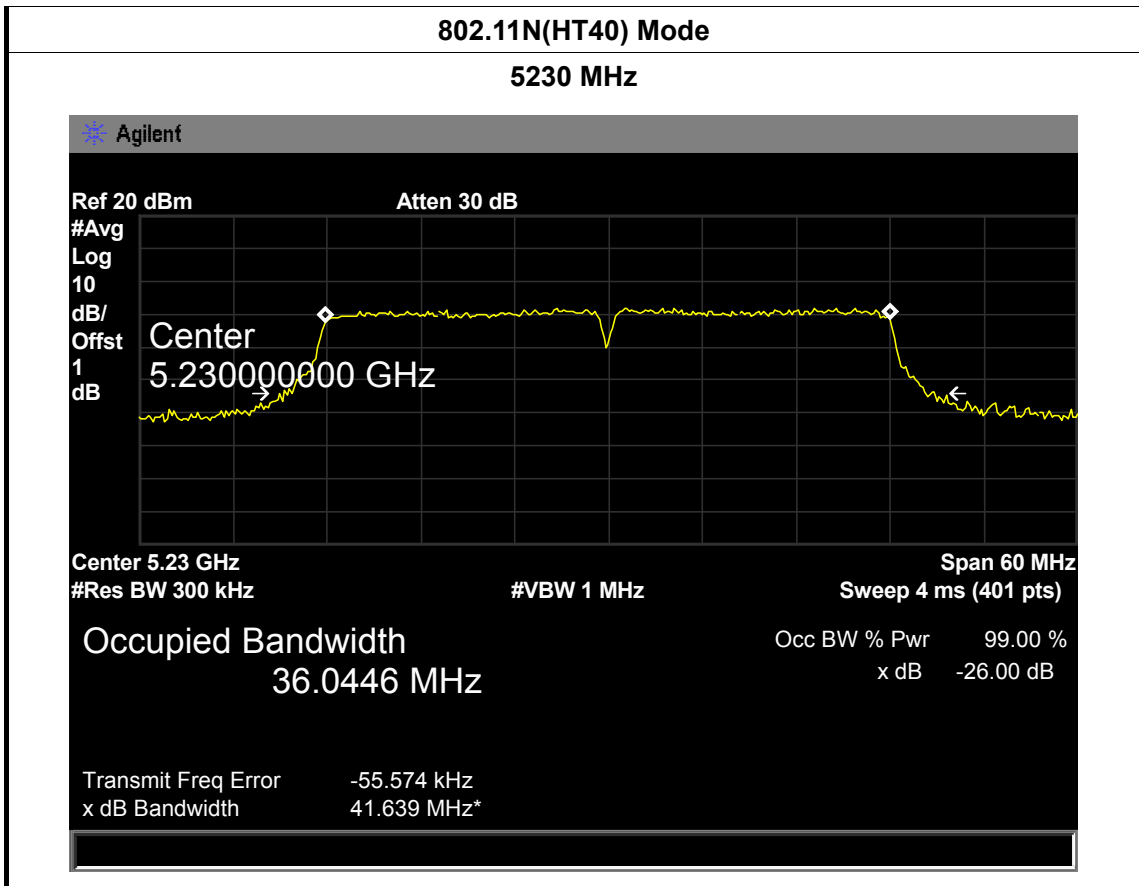


EUT:	ScreenBeam 802.11 a/b/g/n/ac WiFi Module	Model Name :	SBRT8812AU
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 5V		
Test Mode:	TX 802.11ac(40) Mode (U-NII-1)		
Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Bandwidth (MHz)
38	5190	40.893	36.0539
46	5230	41.222	36.0486
802.11ac(40) Mode			
5190 MHz			
<p>Agilent</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Avg Log 10 dB/ Offst 1 dB</p> <p>Center 5.19000000 GHz</p> <p>Center 5.19 GHz Span 60 MHz #Res BW 300 kHz #VBW 1 MHz Sweep 4 ms (401 pts)</p> <p>Occupied Bandwidth Occ BW % Pwr 99.00 % 36.0539 MHz x dB -26.00 dB</p> <p>Transmit Freq Error -67.244 kHz x dB Bandwidth 40.893 MHz*</p>			


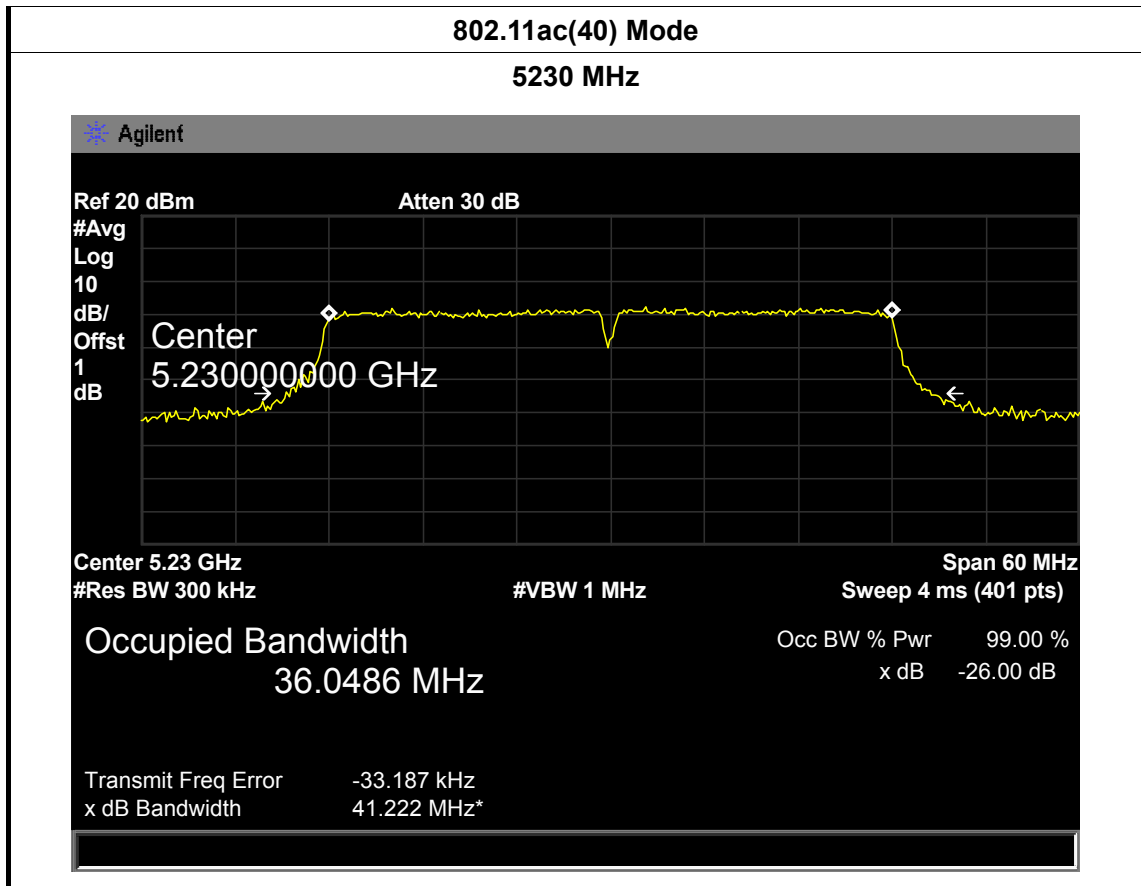


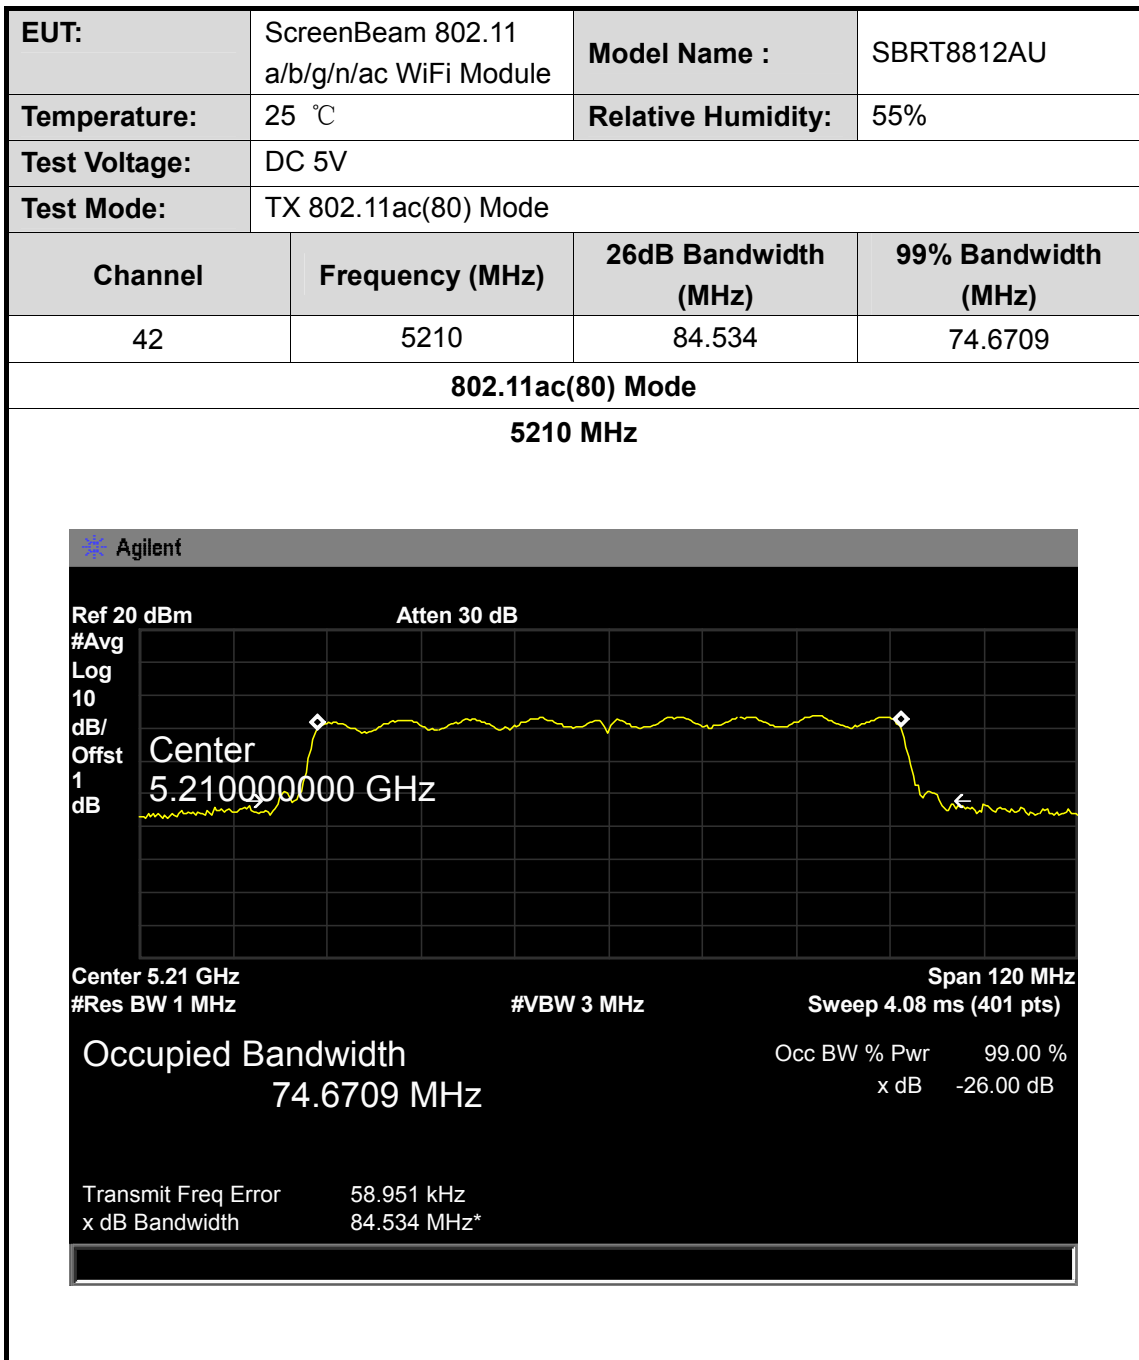



EUT:	ScreenBeam 802.11 a/b/g/n/ac WiFi Module	Model Name :	SBRT8812AU
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 5V		
Test Mode:	TX 802.11a Mode (U-NII-3)		
Channel	Frequency (MHz)	6dB Bandwidth (MHz)	99% Bandwidth (MHz)
149	5745	16.506	16.6167
157	5785	16.492	18.0299
165	5825	16.487	16.6556
802.11a Mode			
5745 MHz			
<p>Agilent Ref 20 dBm Atten 30 dB #Avg 10 Log dB/Offst 1 Center 5.745000000 GHz Center 5.745 GHz Span 30 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 4.96 ms (401 pts) Occupied Bandwidth 16.6167 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB Transmit Freq Error -90.184 kHz x dB Bandwidth 16.506 MHz*</p>			

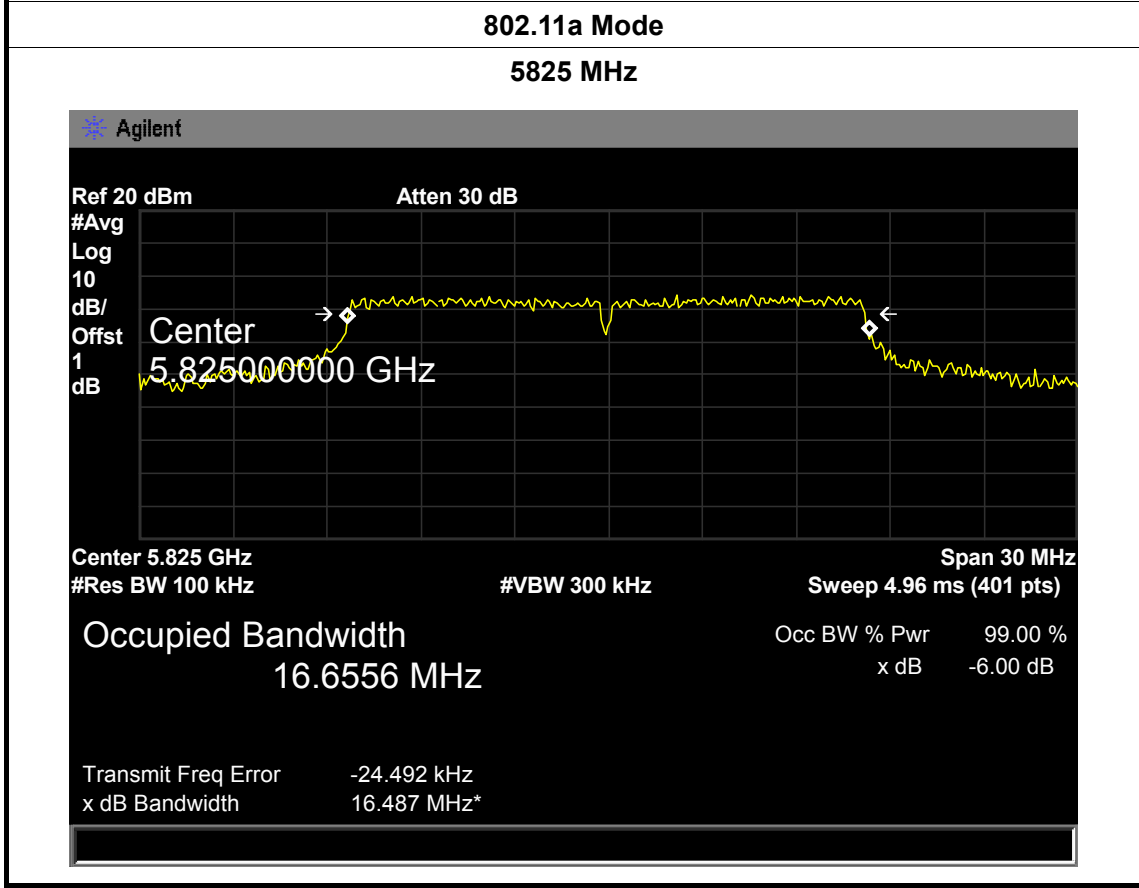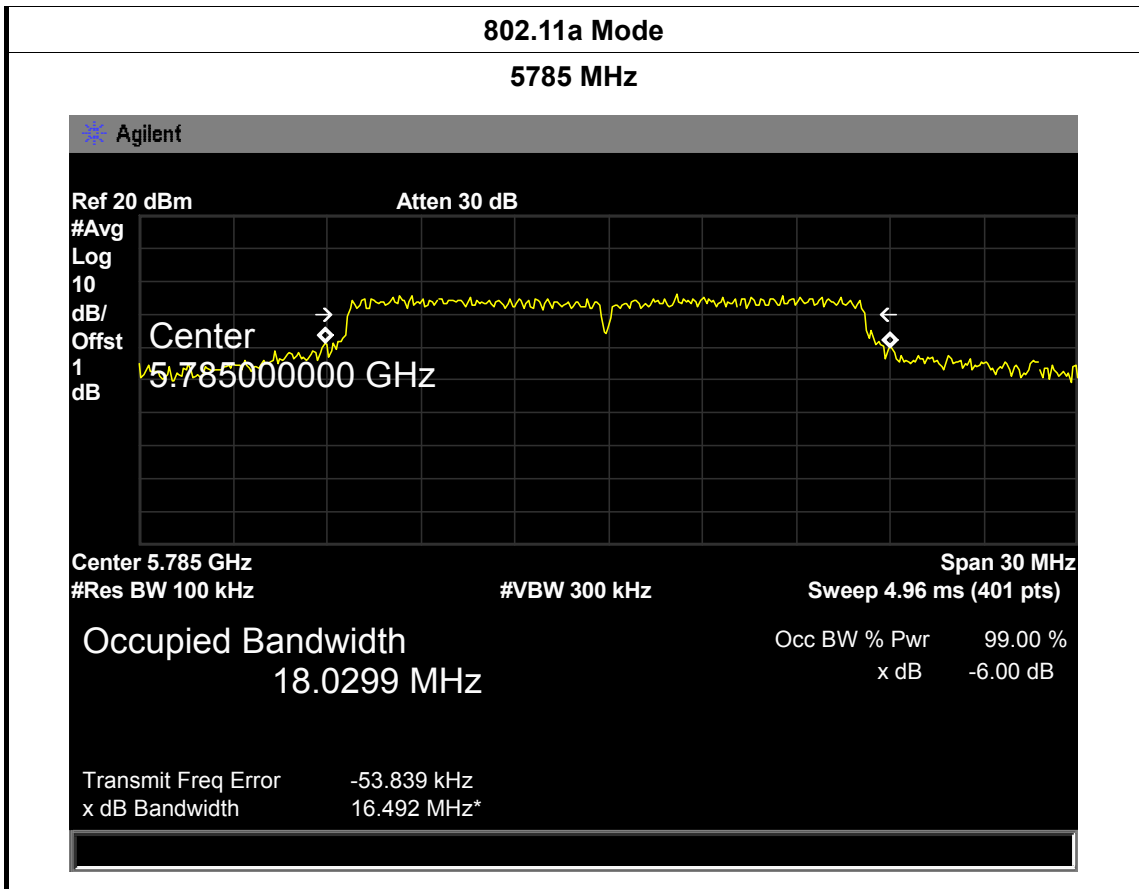


EUT:	ScreenBeam 802.11 a/b/g/n/ac WiFi Module	Model Name :	SBRT8812AU
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 5V		
Test Mode:	TX 802.11n(20) Mode (U-NII-3)		
Channel	Frequency (MHz)	6dB Bandwidth (MHz)	99% Bandwidth (MHz)
149	5745	17.692	17.6575
157	5785	17.717	17.9373
165	5825	17.673	17.7468
802.11n(HT20) Mode			
5745 MHz			
<p>Agilent</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Avg Log 10 dB/ Offst 1 dB</p> <p>Center → 5.745000000 GHz ←</p> <p>Center 5.745 GHz Span 30 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 4.96 ms (401 pts)</p> <p>Occupied Bandwidth Occ BW % Pwr 99.00 % 17.6575 MHz x dB -6.00 dB</p> <p>Transmit Freq Error -57.838 kHz x dB Bandwidth 17.692 MHz*</p>			

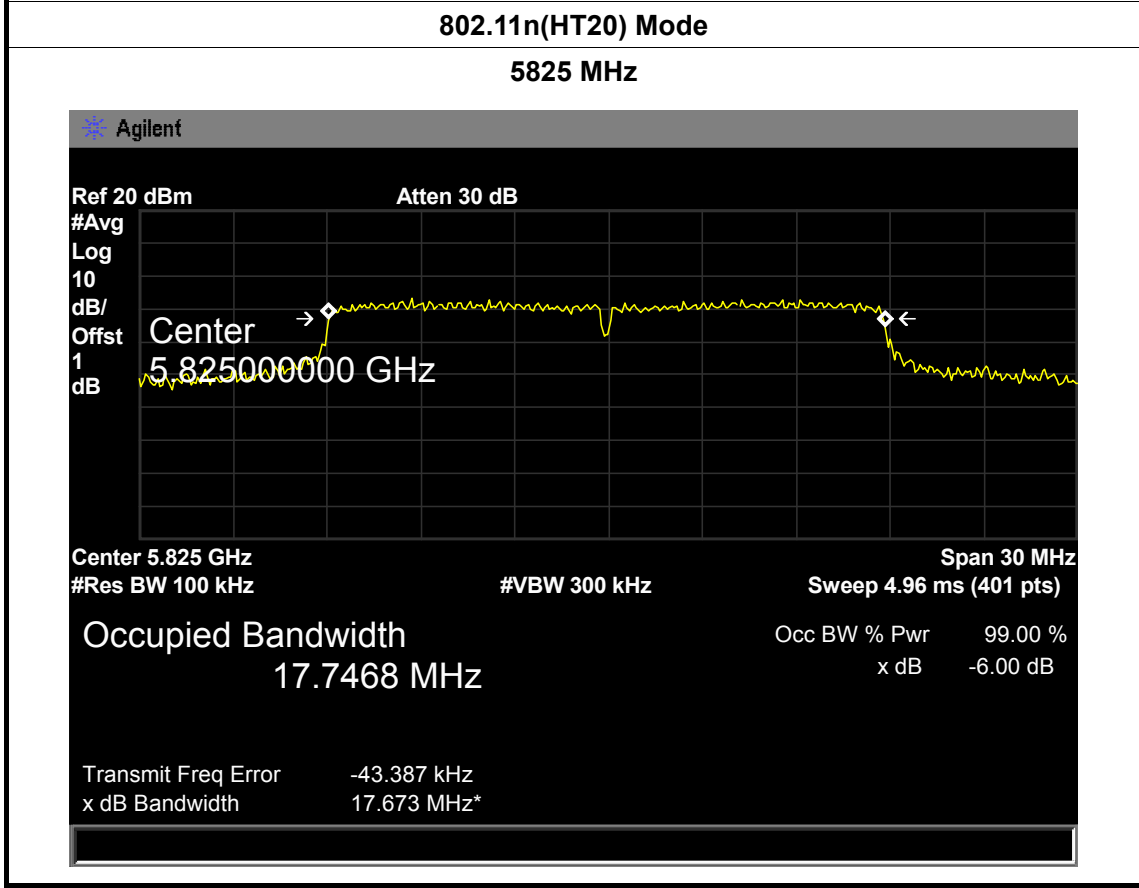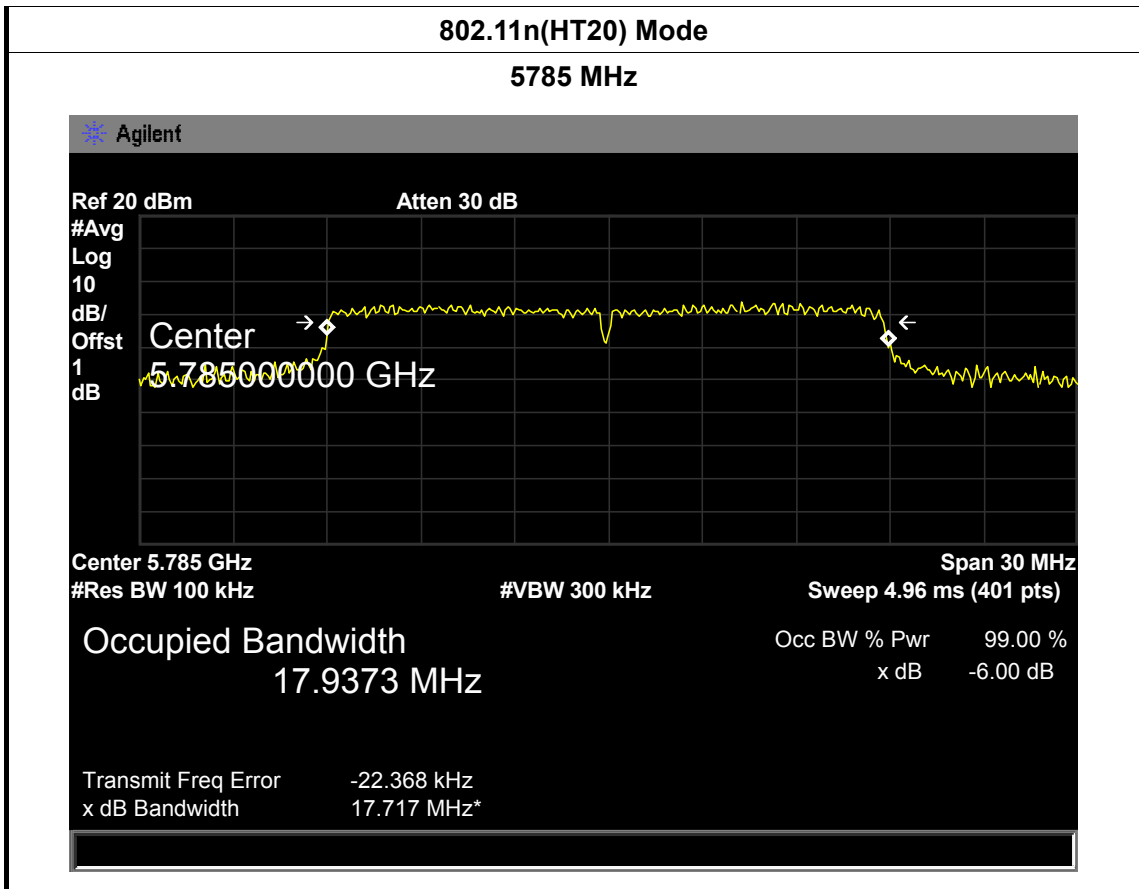


EUT:	ScreenBeam 802.11 a/b/g/n/ac WiFi Module	Model Name :	SBRT8812AU
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 5V		
Test Mode:	TX 802.11ac(20) Mode (U-NII-3)		
Channel	Frequency (MHz)	6dB Bandwidth (MHz)	99% Bandwidth (MHz)
149	5745	17.675	17.5716
157	5785	17.733	17.6525
165	5825	17.705	17.8683
802.11ac(20) Mode			
5745 MHz			
<p>The screenshot displays a spectrum analyzer interface with a yellow signal trace. The center frequency is 5.745 GHz. The occupied bandwidth is 17.5716 MHz. The plot shows a signal with a 6dB bandwidth of 17.675 MHz. The reference level is 20 dBm and the attenuation is 30 dB. The resolution bandwidth is 100 kHz and the video bandwidth is 300 kHz. The span is 30 MHz and the sweep time is 4.96 ms. The transmit frequency error is -66.764 kHz and the bandwidth is 17.675 MHz*.</p>			

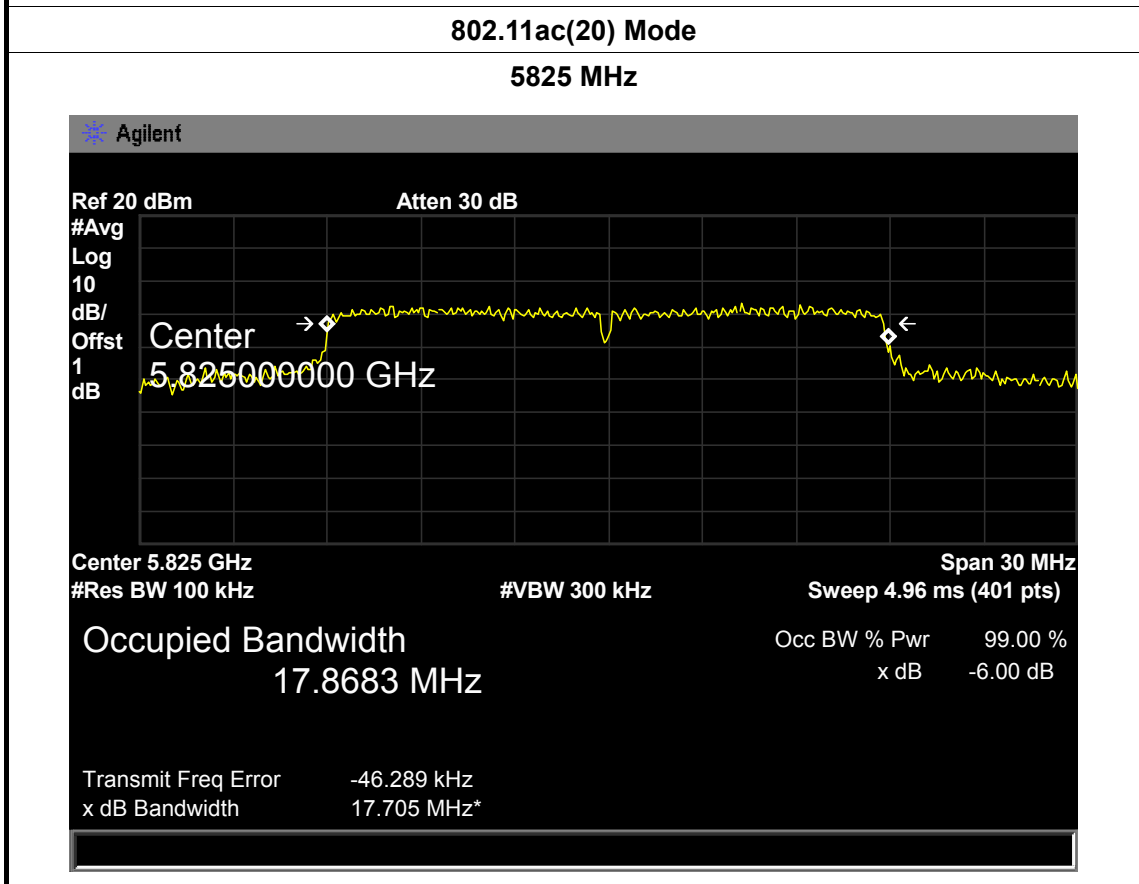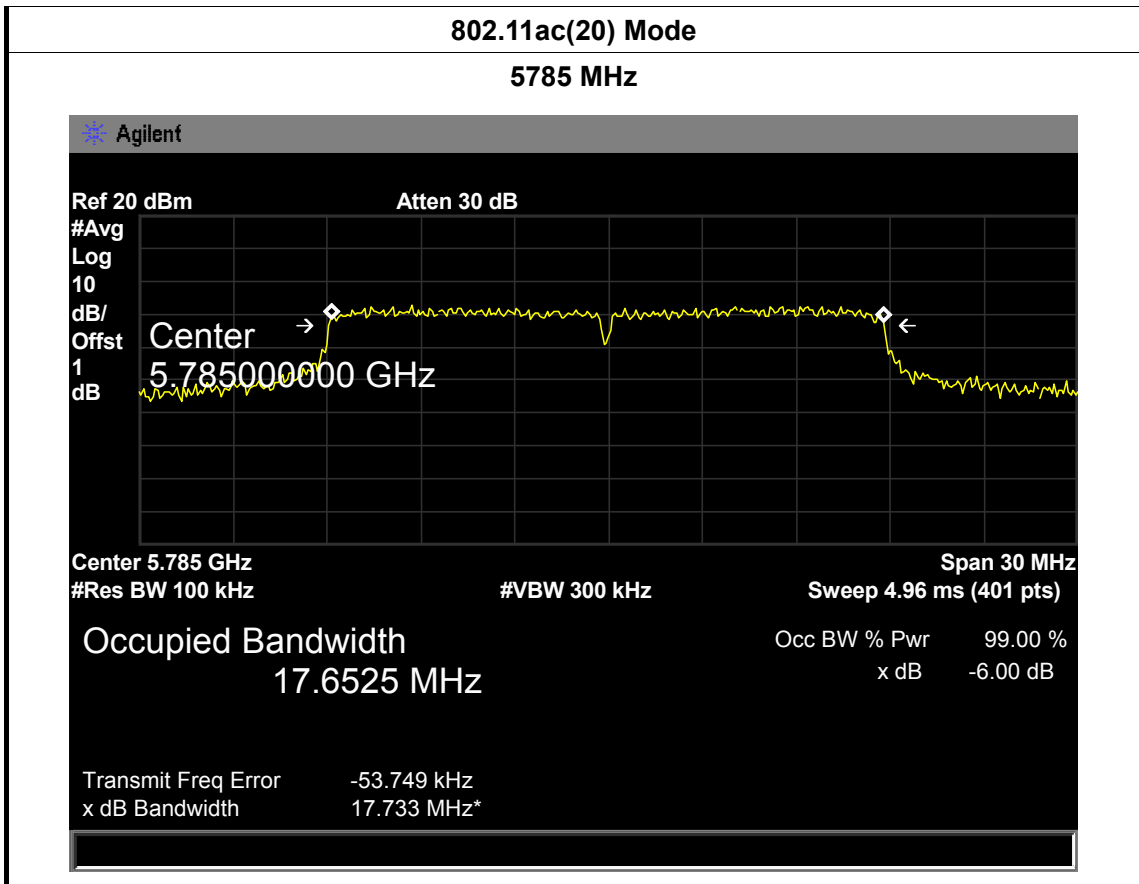


EUT:	ScreenBeam 802.11 a/b/g/n/ac WiFi Module	Model Name :	SBRT8812AU
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 5V		
Test Mode:	TX 802.11n(40) Mode (U-NII-3)		
Channel	Frequency (MHz)	6dB Bandwidth (MHz)	99% Bandwidth (MHz)
151	5755	36.447	36.0283
159	5795	36.461	36.0891
802.11n(HT40) Mode			
5755 MHz			
<p>Agilent</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Avg Log 10 dB/ Offst 1 dB</p> <p>Center → 5.75500000 GHz ←</p> <p>Center 5.755 GHz Span 60 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 9.92 ms (401 pts)</p> <p>Occupied Bandwidth Occ BW % Pwr 99.00 % 36.0283 MHz x dB -6.00 dB</p> <p>Transmit Freq Error -80.509 kHz x dB Bandwidth 36.447 MHz*</p>			

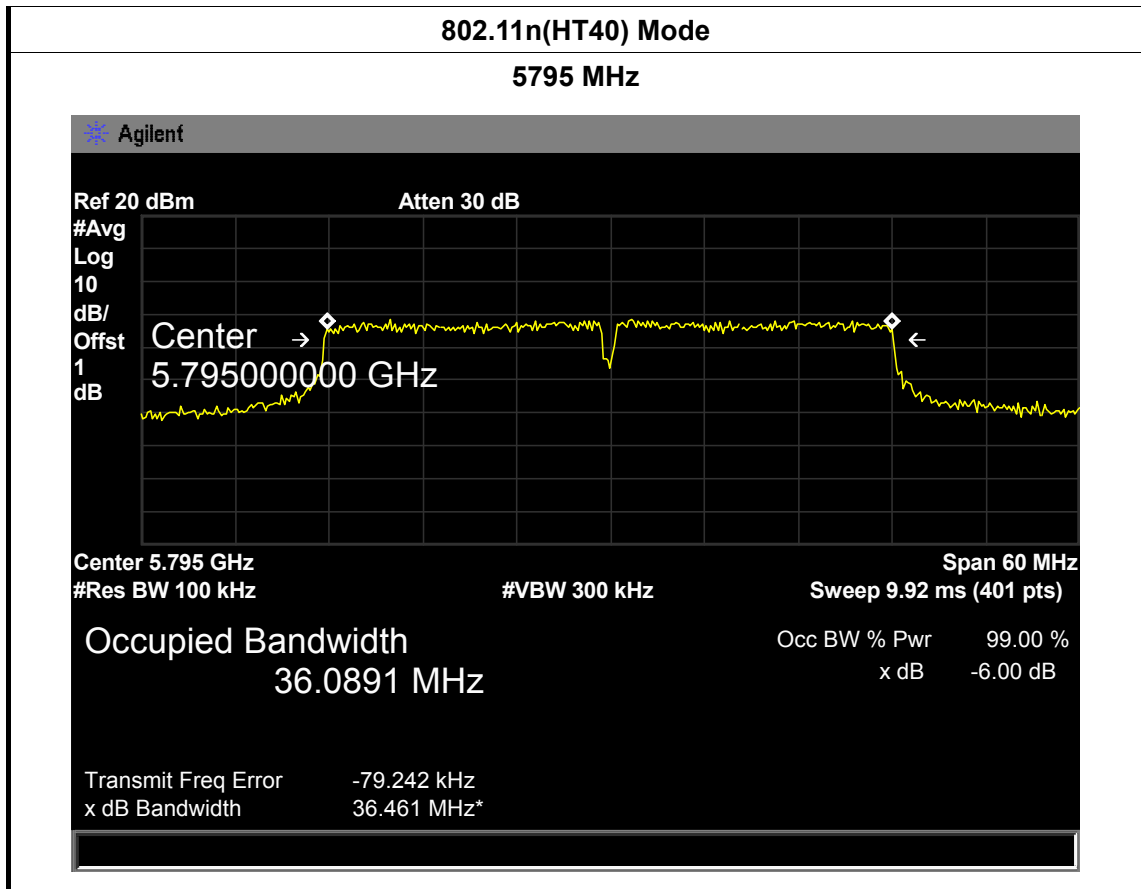

EUT:	ScreenBeam 802.11 a/b/g/n/ac WiFi Module	Model Name :	SBRT8812AU
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 5V		
Test Mode:	TX 802.11ac(40) Mode (U-NII-3)		
Channel	Frequency (MHz)	6dB Bandwidth (MHz)	99% Bandwidth (MHz)
151	5755	36.410	35.9854
159	5795	36.444	36.0796
802.11ac(40) Mode			
5755 MHz			
<p> * Agilent Ref 20 dBm Atten 30 dB #Avg Log 10 dB/ Offst 1 dB Center → 5.75500000 GHz ← Center 5.755 GHz Span 60 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 9.92 ms (401 pts) Occupied Bandwidth Occ BW % Pwr 99.00 % 35.9854 MHz x dB -6.00 dB Transmit Freq Error -93.787 kHz x dB Bandwidth 36.410 MHz* </p>			

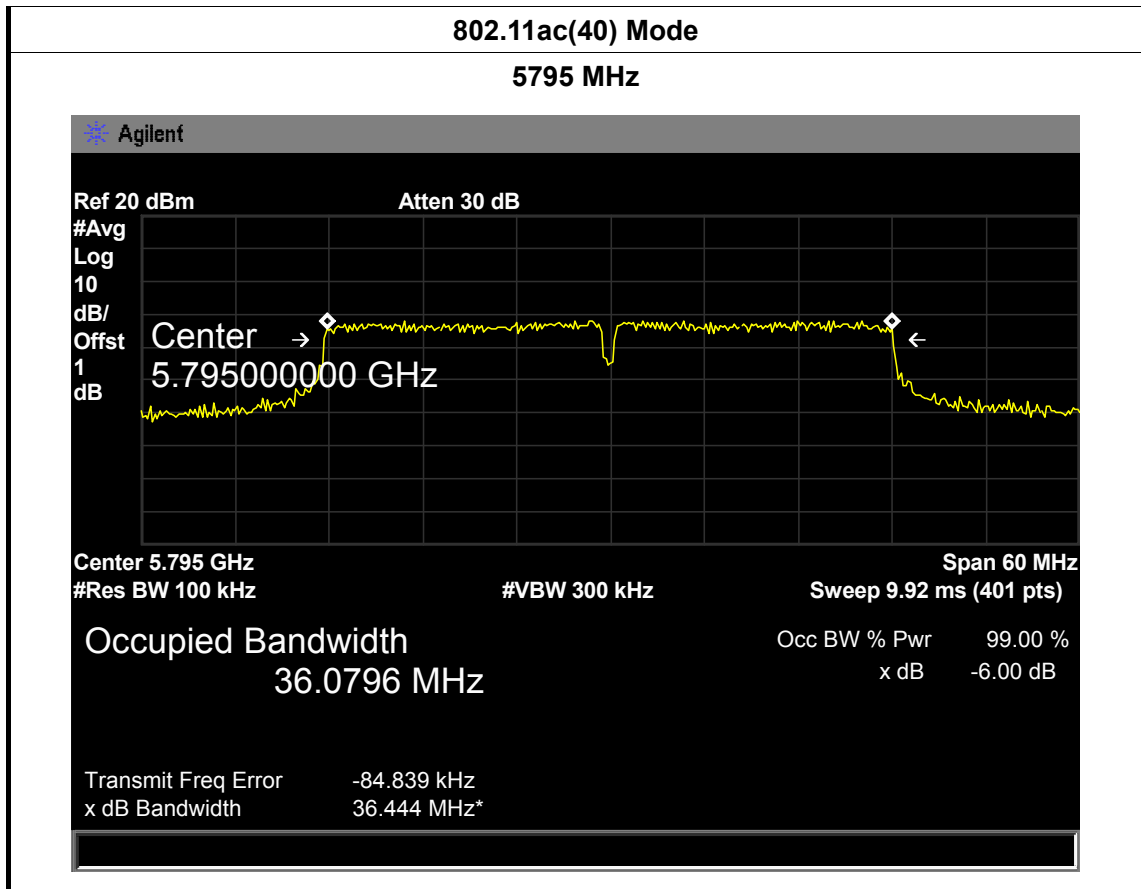

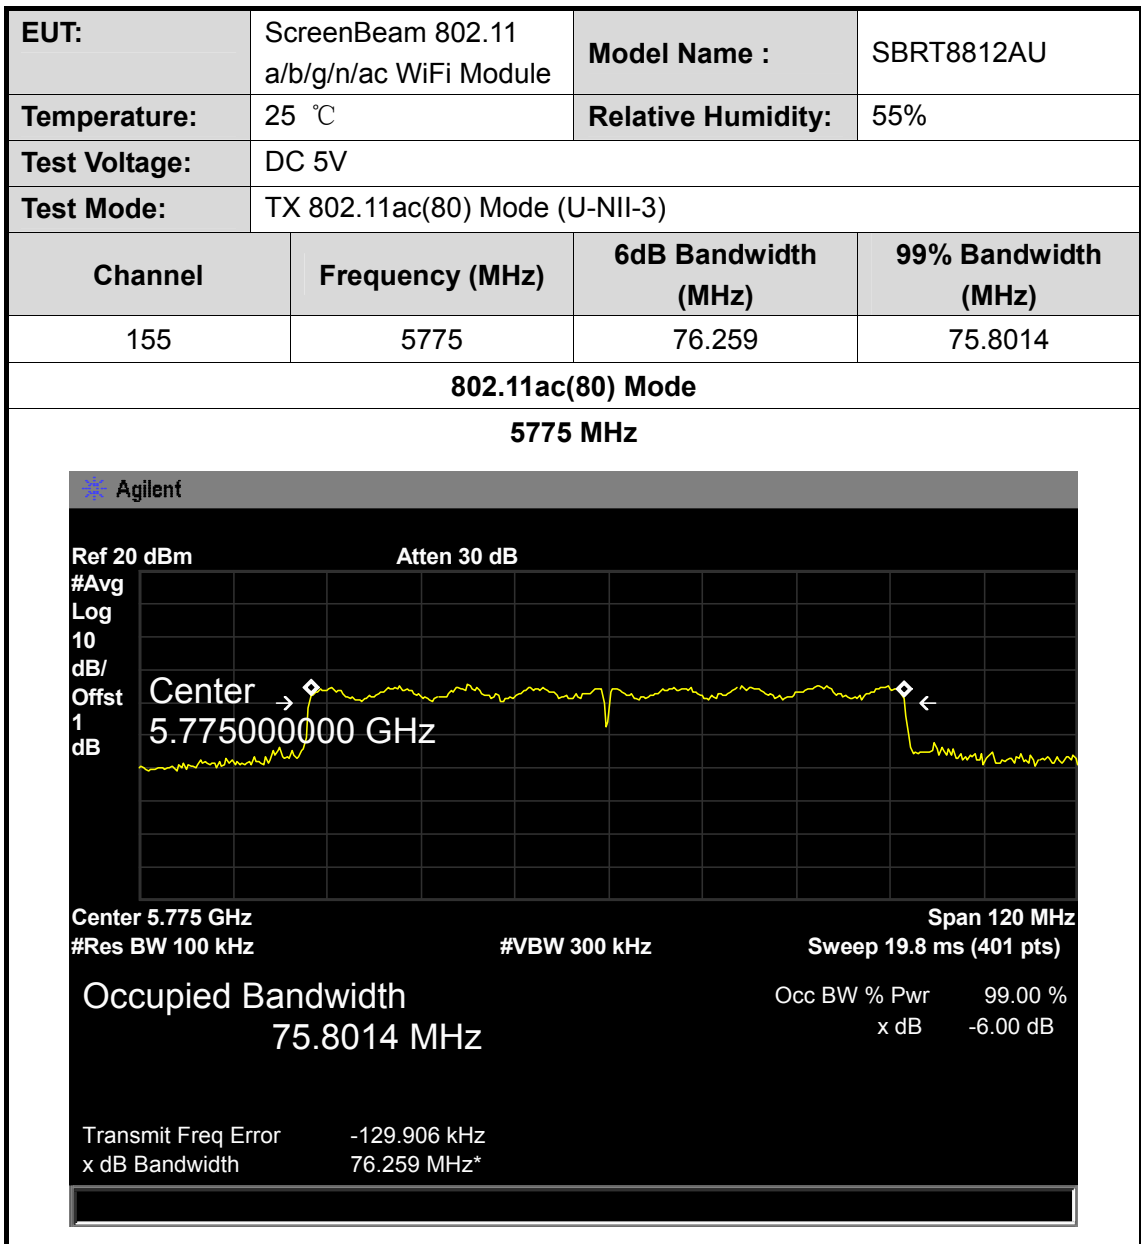

8. Output Power Test

8.1 Test Standard and Limit


8.1.1 Test Standard

FCC Part 15.407 (a)

8.1.2 Test Limit

FCC Part 15 Subpart E(15.407)/RSS-210		
Test Item	Limit	Frequency Range(MHz)
Conducted Output Power	Fixed: 1 Watt (30dBm) Mobile and Portable: 250mW (24dBm)	5150~5250
	1 Watt (30dBm)	5725~5850

8.2 Test Setup

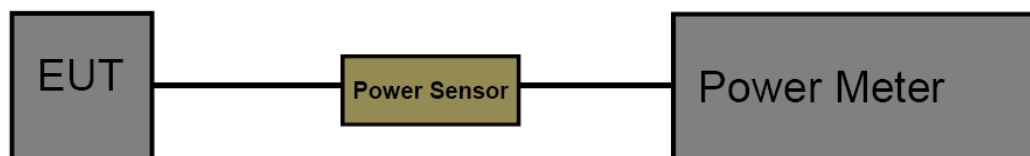

8.3 Test Procedure

The measurement is according to section 3 of KDB 789033 D02 General UNII Test Procedures New Rules V01.

The EUT was connected to RF power meter via a broadband power sensor as show the block above.

8.4 EUT Operating Condition

The EUT was set to continuously transmitting in the max power during the test.

8.5 Test Date

EUT:	ScreenBeam 802.11 a/b/g/n/ac WiFi Module	Model Name :	SBRT8812AU			
Temperature:	25 °C	Relative Humidity:	55%			
Test Voltage:	DC 5V					
U-NII-1						
Test Mode	Frequency (MHz)	Test Data				Limit (dBm)
		ANT A (dBm)	ANT B (dBm)	Duty Factor (dB)	Total Power (dBm)	
802.11a	5180	14.05	/	0	14.05	24
	5200	14.11	/	0	14.11	
	5240	14.09	/	0	14.09	
802.11n (HT20)	5180	10.31	10.40	0	13.37	
	5200	10.52	10.29	0	13.42	
	5240	10.62	10.30	0	13.47	
802.11ac (HT20)	5180	10.96	10.26	0	13.63	
	5200	10.84	10.14	0	13.51	
	5240	11.05	10.21	0	13.66	
802.11n (HT40)	5190	9.96	10.13	0	13.06	
	5230	10.38	9.90	0	13.16	
802.11 ac(40)	5190	10.48	10.14	0	13.32	
	5230	10.71	10.36	0	13.55	
802.11 ac(80)	5210	11.10	10.62	0	13.88	
Result: PASS						
Remark: The EUT incorporates a MIMO function. Physically, the EUT provides two antennas for transmitting and receiving. All transmitting signals are completely uncorrelated. So the Directional Gain=$G_{ANT}=4.33$ dBi						

EUT:	ScreenBeam 802.11 a/b/g/n/ac WiFi Module	Model Name :	SBRT8812AU			
Temperature:	25 °C	Relative Humidity:	55%			
Test Voltage:	DC 5V					
U-NII-3						
Test Mode	Frequency (MHz)	Test Data				Limit (dBm)
		ANT A (dBm)	ANT B (dBm)	Duty Factor (dB)	Total Power (dBm)	
802.11a	5745	14.11	/	0	14.11	30
	5785	14.15	/	0	14.15	
	5825	14.26	/	0	14.26	
802.11n (HT20)	5745	10.63	11.35	0	14.02	
	5785	10.02	10.69	0	13.38	
	5825	10.45	10.70	0	13.59	
802.11ac (HT20)	5745	10.96	11.87	0	14.45	
	5785	10.64	11.19	0	13.93	
	5825	10.32	10.52	0	13.43	
802.11n (HT40)	5755	10.29	11.29	0	13.83	
	5795	10.00	10.90	0	13.48	
802.11 ac(40)	5755	10.37	11.27	0	13.85	
	5795	10.09	10.87	0	13.51	
802.11 ac(80)	5775	10.90	11.03	0	13.98	
Result: PASS						
Remark: The EUT incorporates a MIMO function. Physically, the EUT provides two antennas for transmitting and receiving. All transmitting signals are completely uncorrelated. So the Directional Gain=$G_{ANT}=5.62$ dBi						

9. Power Spectral Density Test

9.1 Test Standard and Limit


9.1.1 Test Standard

FCC Part 15.407 (a)

9.1.2 Test Limit

FCC Part 15 Subpart E(15.407)		
Test Item	Limit	Frequency Range(MHz)
Power Spectral Density	Other than Mobile and Portable : 17dBm/MHz Mobile and Portable : 11dBm/MHz	5150~5250
	30dBm/500kHz	5725~5850

9.2 Test Setup



9.3 Test Procedure

The EUT was directly connected to the Spectrum Analyzer and antenna output port as show in the block diagram above. The measurement is according to KDB 789033 D02 General UNII Test Procedures New Rules V01.

- (1) The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.
- (2) Set analyser centre frequency to transmitting frequency.
- (3) Set the span to encompass the entire emissions bandwidth (EBW)(alternatively, the entire 99% OBW) of the signal.
- (4) Set the RBW to: 1 MHz
- (5) Set the VBW to: 3 MHz
- (6) Detector: RMS
- (7) Trace: Max Hold
- (7) Sweep time: auto
- (8) Trace average at least 100 traces in power averaging.
- (9) User the peak marker function to determine the maximum amplitude level within the RBW. Apply correction to the result if different RBW is used.


9.4 EUT Operating Condition

The EUT was set to continuously transmitting in each mode and low, Middle and high channel for the test.

9.5 Test Data


EUT:	ScreenBeam 802.11 a/b/g/n/ac WiFi Module	Model Name :	SBRT8812AU			
Temperature:	25 °C	Relative Humidity:	55%			
Test Voltage:	DC 5V					
U-NII-1						
Test Mode	Frequency (MHz)	Test Data				Limit (dBm)
		ANT A (dBm)	ANT B (dBm)	Duty Factor (dB)	Total Power (dBm)	
802.11a	5180	3.80	/	0	3.80	11
	5200	5.04	/	0	5.04	
	5240	6.29	/	0	6.29	
802.11n (HT20)	5180	0.48	-0.94	0	2.84	
	5200	1.57	0.30	0	3.99	
	5240	3.93	2.94	0	6.47	
802.11ac (HT20)	5180	0.58	-1.25	0	2.77	
	5200	1.52	0.32	0	3.97	
	5240	2.68	1.12	0	4.98	
802.11n (HT40)	5190	-2.63	-4.05	0	-0.27	
	5230	-1.36	-2.08	0	1.31	
802.11 ac(40)	5190	-2.82	-4.10	0	-0.40	
	5230	-1.24	-2.21	0	1.31	
802.11 ac(80)	5210	-3.25	-4.24	0	-0.71	
Result: PASS						
Remark: The EUT incorporates a MIMO function. Physically, the EUT provides two antennas for transmitting and receiving. All transmitting signals are completely uncorrelated. So the Directional Gain= $G_{ANT}=4.33$ dBi						
Test plots please refer to below pages:						

802.11 a 5180 MHz (ANT A)

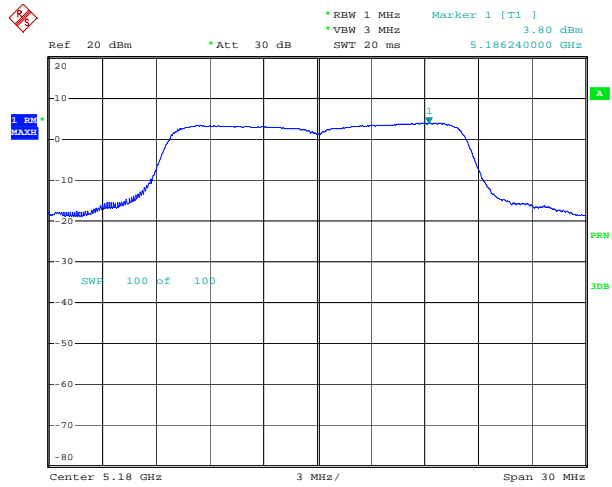


Date: 10.APR.2015 03:21:46

802.11 a 5200 MHz (ANT A)

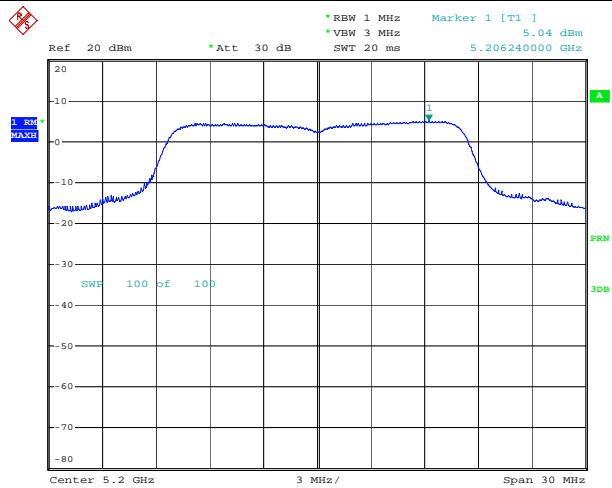


Date: 10.APR.2015 03:22:48

802.11 a 5240 MHz (ANT A)

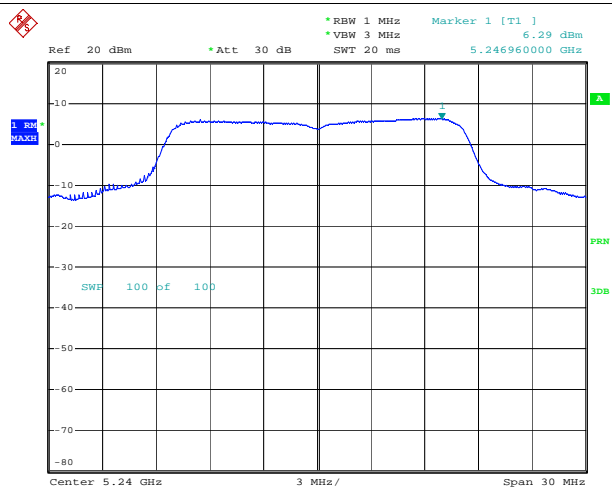


Date: 10.APR.2015 03:23:20

802.11 n(20) 5180 MHz (ANT A)

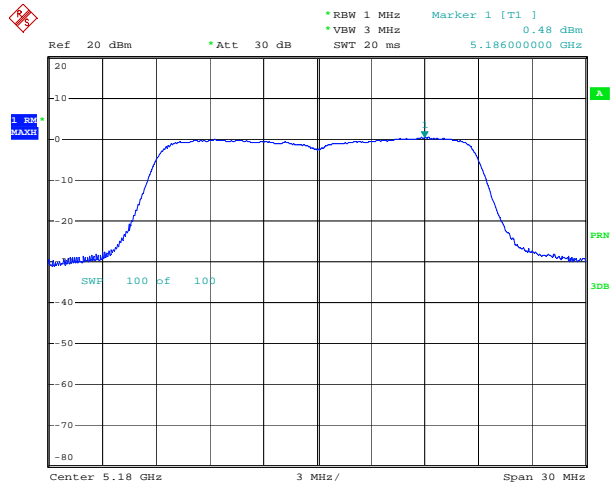


Date: 10.APR.2015 03:26:00

802.11 n(20) 5200 MHz (ANT A)

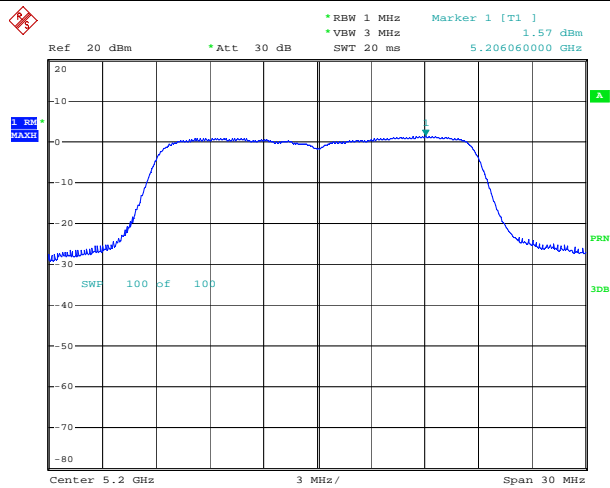


Date: 10.APR.2015 03:25:18

802.11 n(20) 5240 MHz (ANT A)

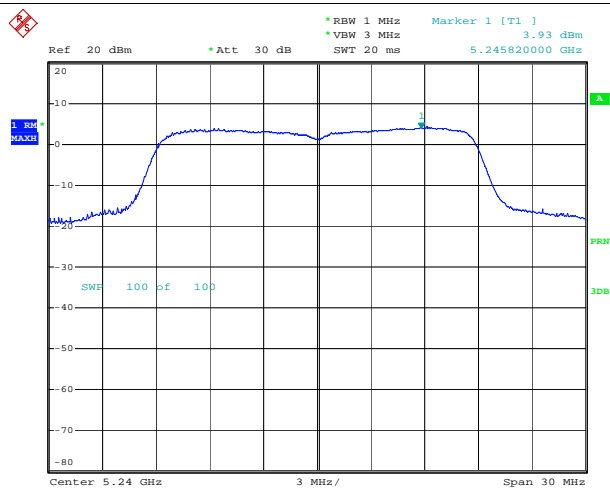


Date: 10.APR.2015 03:23:59

802.11 ac(20) 5180 MHz (ANT A)

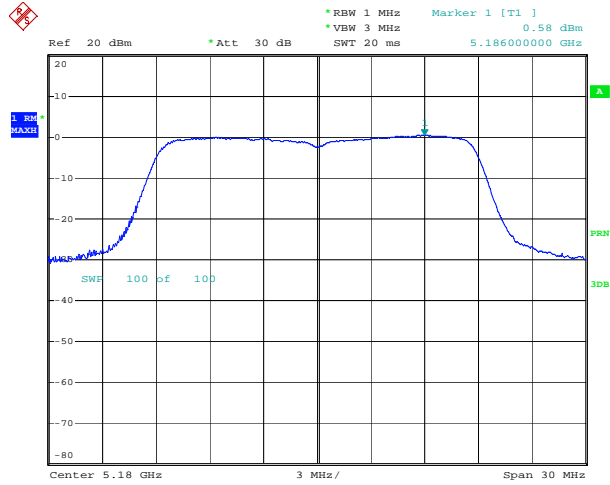


Date: 10.APR.2015 03:26:44

802.11 ac(20) 5200 MHz (ANT A)

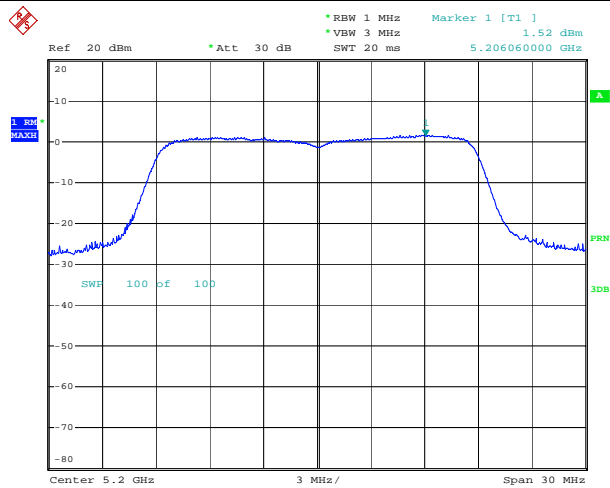


Date: 10.APR.2015 03:29:02

802.11 ac(20) 5240 MHz (ANT A)

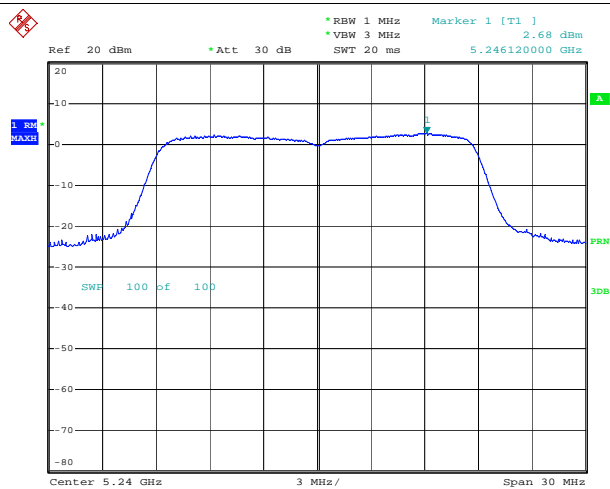


Date: 10.APR.2015 03:29:47

802.11 n(40) 5190 MHz (ANT A)

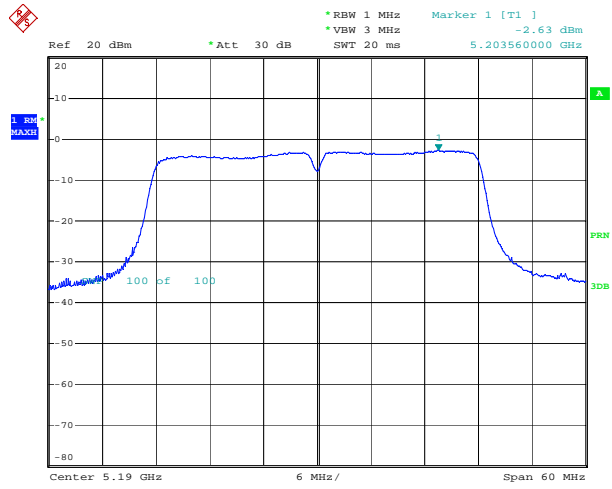


Date: 10.APR.2015 03:30:51

802.11 n(40) 5230 MHz (ANT A)

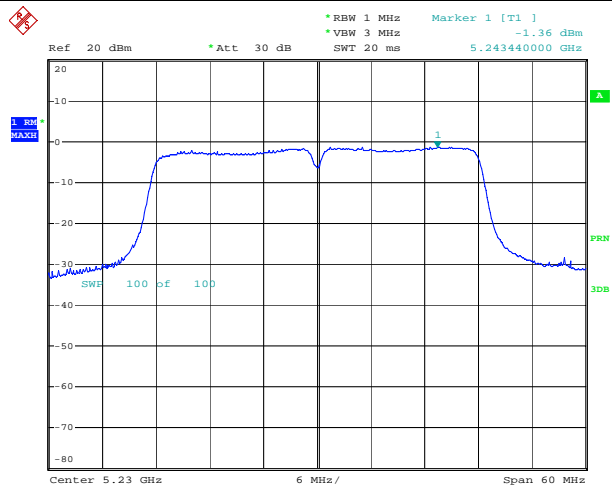


Date: 10.APR.2015 03:31:29

802.11 ac(40) 5190 MHz (ANT A)

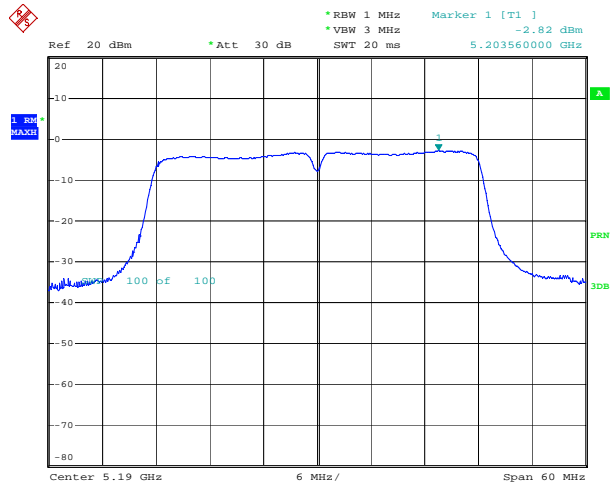


Date: 10.APR.2015 03:32:50


802.11 ac(40) 5230 MHz (ANT A)

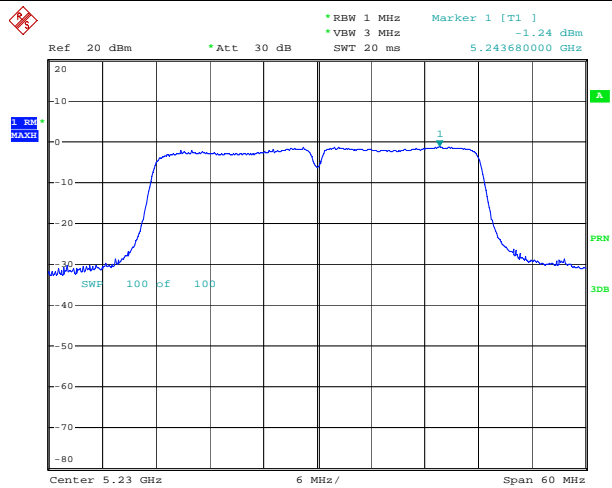

Date: 10.APR.2015 03:32:07

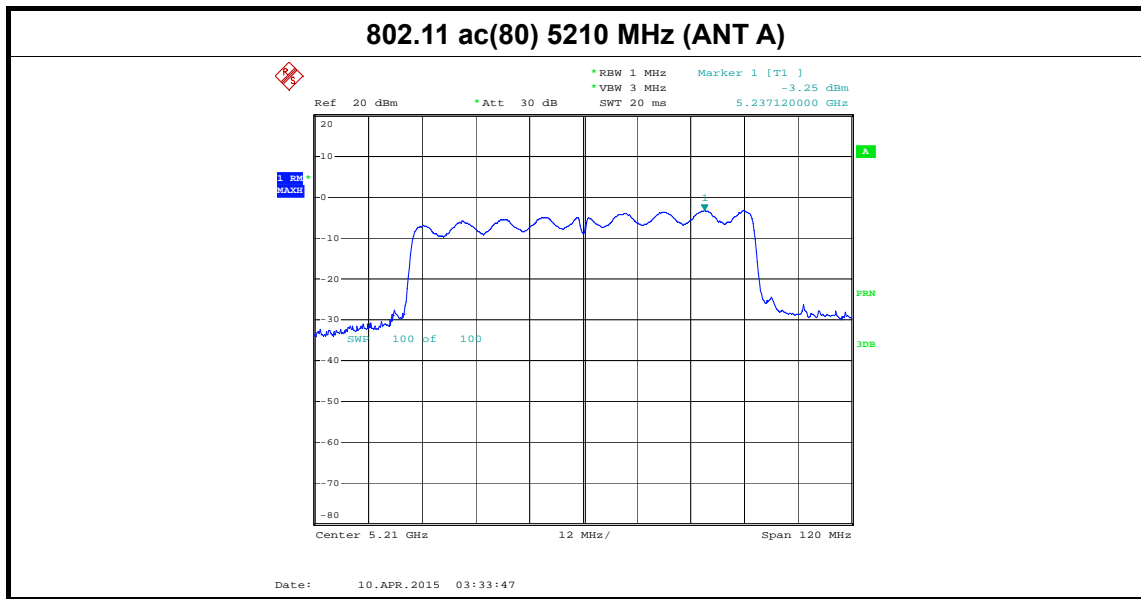


802.11 n(20) 5180 MHz (ANT B)

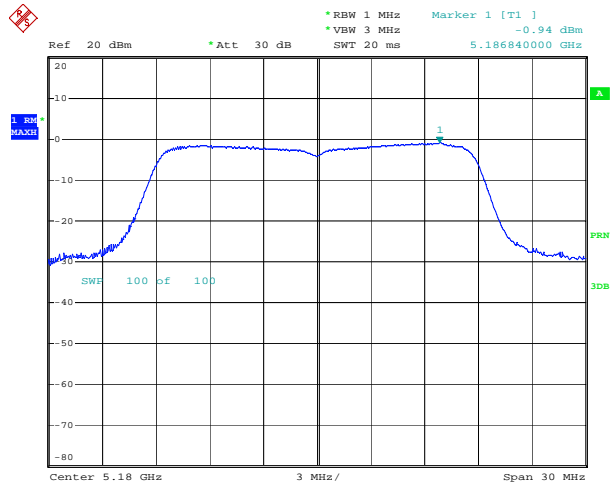


Date: 10.APR.2015 08:12:49

802.11 n(20) 5200 MHz (ANT B)

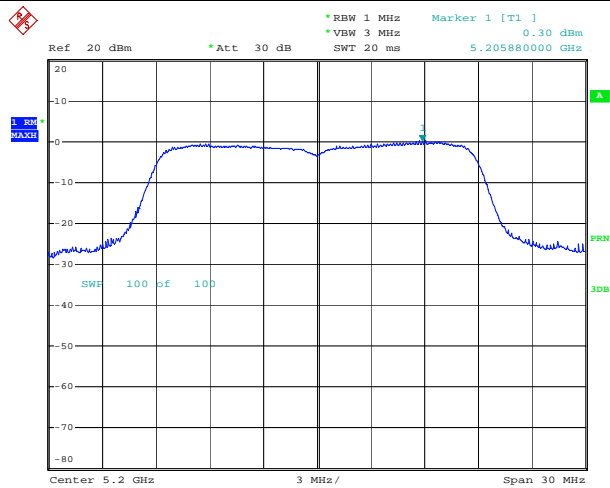


Date: 10.APR.2015 08:12:14

802.11 n(20) 5240 MHz (ANT B)

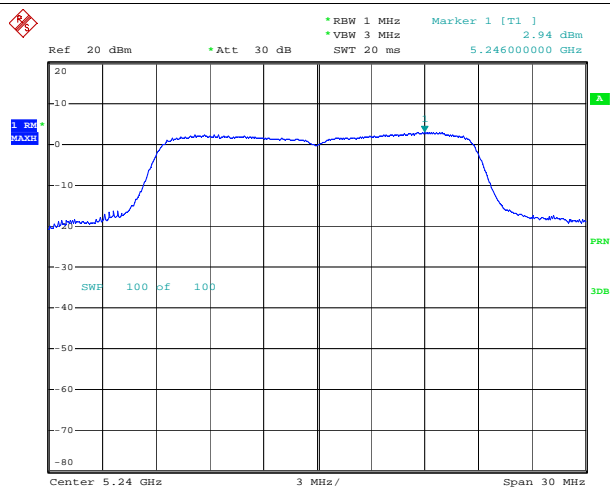


Date: 10.APR.2015 08:11:46

802.11 ac(20) 5180 MHz (ANT B)

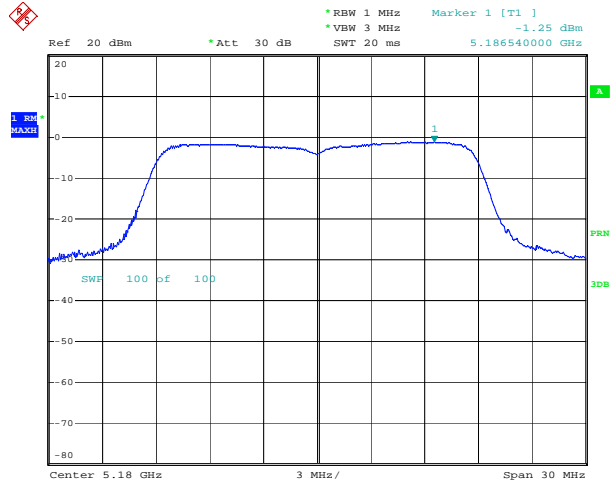


Date: 10.APR.2015 08:13:27

802.11 ac(20) 5200 MHz (ANT B)

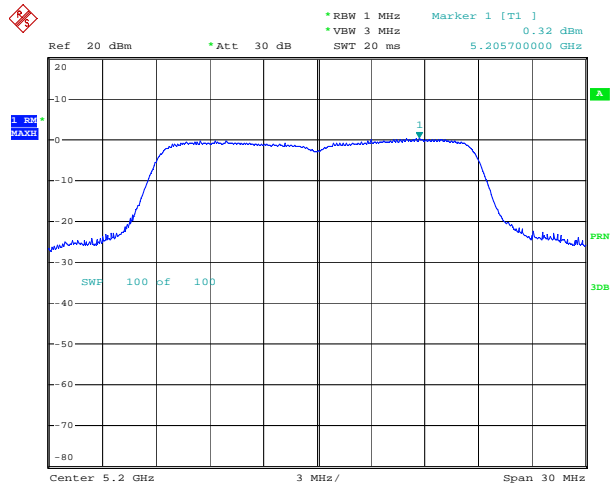


Date: 10.APR.2015 08:15:13

802.11 ac(20) 5240 MHz (ANT B)

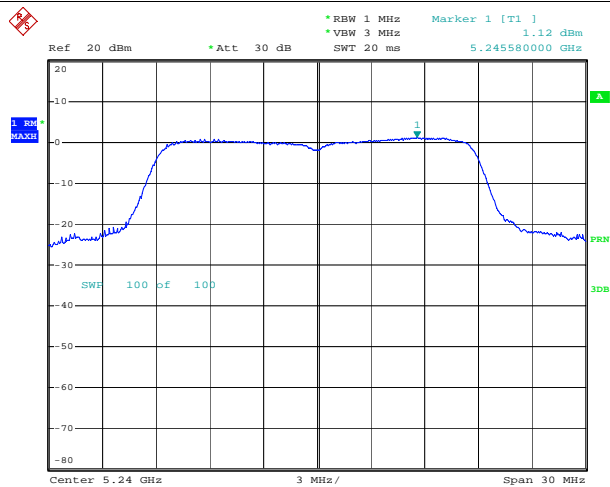


Date: 10.APR.2015 08:15:39


802.11 n(40) 5190 MHz (ANT B)

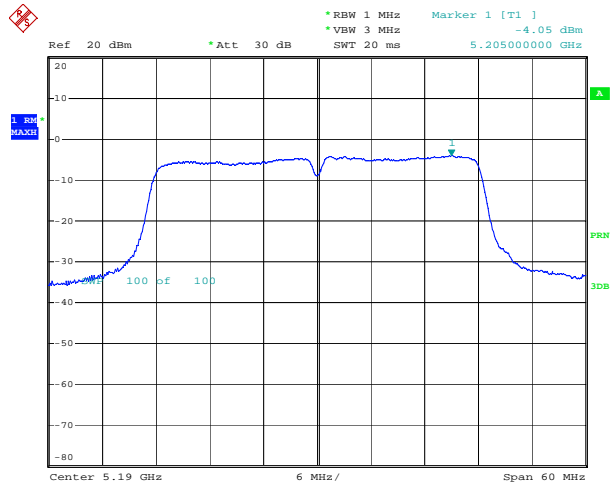

802.11 n(40) 5230 MHz (ANT B)

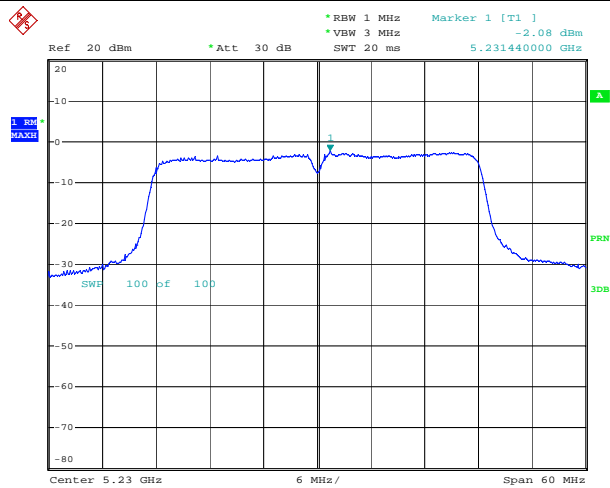


802.11 ac(40) 5190 MHz (ANT B)

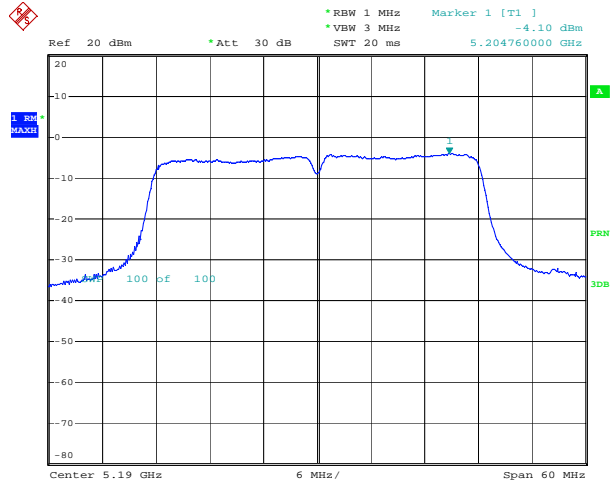


Date: 10.APR.2015 08:18:13

802.11 ac(40) 5230 MHz (ANT B)

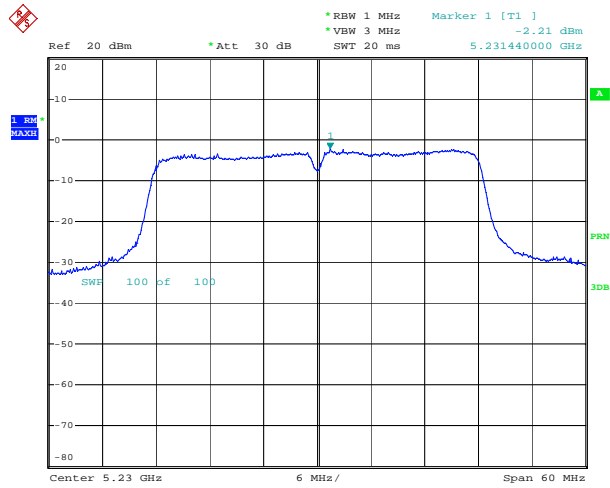


Date: 10.APR.2015 08:17:37

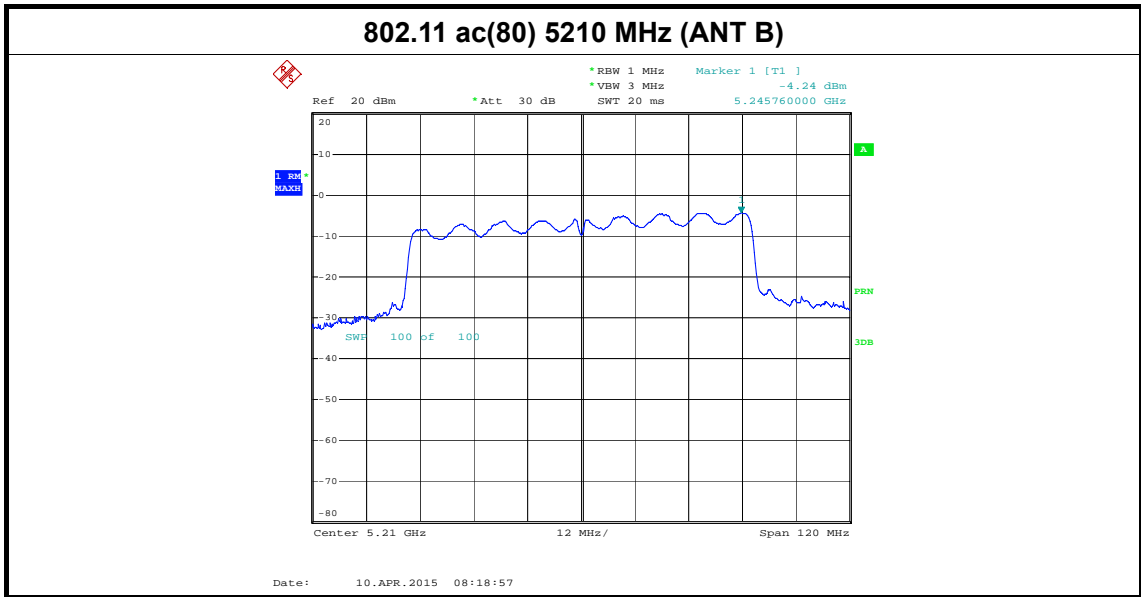


EUT:	ScreenBeam 802.11 a/b/g/n/ac WiFi Module	Model Name :	SBRT8812AU				
Temperature:	25 °C	Relative Humidity:	55%				
Test Voltage:	DC 5V						
U-NII-3							
Test Mode	Frequency (MHz)	Test Data					Limit (dBm)
		ANT A (dBm)	ANT B (dBm)	Duty Factor (dB)	Bandwidth Factor (dB)	Total Power (dBm)	
802.11a	5745	6.29	/	0	-3.01	3.28	30
	5785	7.26	/	0	-3.01	4.25	
	5825	7.07	/	0	-3.01	4.06	
802.11n (HT20)	5745	3.1	3.68	0	-3.01	3.40	
	5785	3.71	5.19	0	-3.01	4.51	
	5825	4.31	4.86	0	-3.01	4.59	
802.11ac (HT20)	5745	2.65	3.6	0	-3.01	3.15	
	5785	4.17	4.97	0	-3.01	4.59	
	5825	4.36	4.56	0	-3.01	4.46	
802.11n (HT40)	5755	-0.69	0.94	0	-3.01	0.20	
	5795	0.2	1.51	0	-3.01	0.90	
802.11 ac(40)	5755	-0.59	0.74	0	-3.01	0.13	
	5795	0.06	1.53	0	-3.01	0.86	
802.11 ac(80)	5775	-1.69	-0.98	0	-3.01	-1.32	
Result: PASS							
Remark: The EUT incorporates a MIMO function. Physically, the EUT provides two antennas for transmitting and receiving. All transmitting signals are completely uncorrelated. So the Directional Gain=$G_{ANT}=5.62$ dBi							
Test plots please refer to below pages:							

802.11 a 5745 MHz (ANT A)

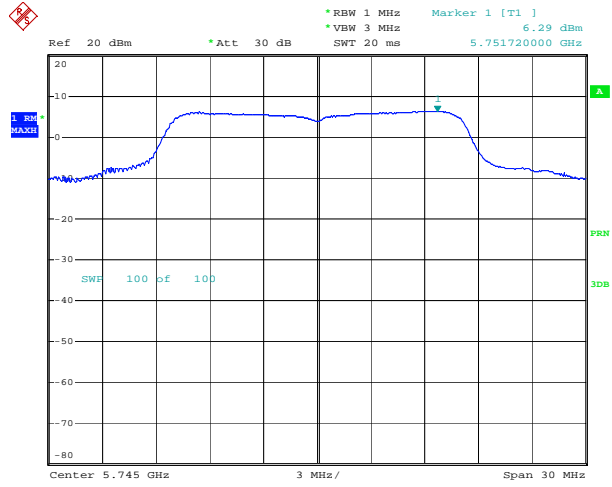


Date: 10.APR.2015 03:37:41

802.11 a 5785 MHz (ANT A)

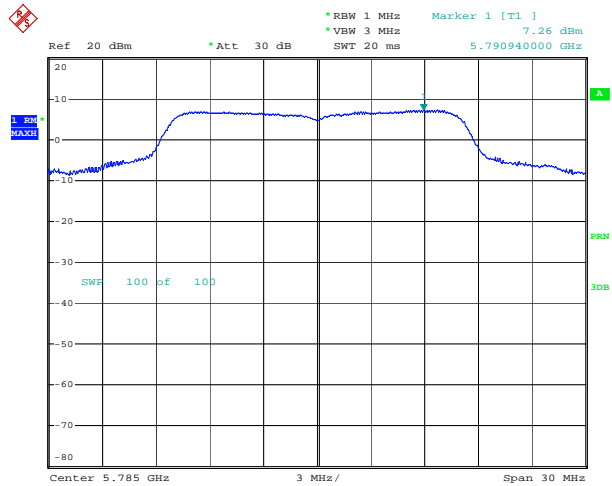


Date: 10.APR.2015 03:38:27

802.11 a 5825 MHz (ANT A)

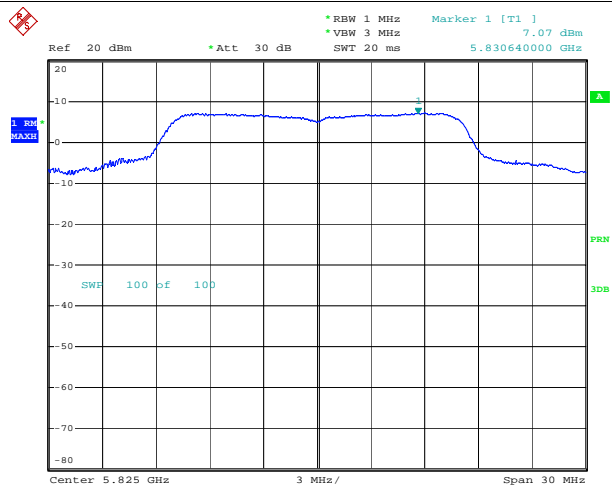


Date: 10.APR.2015 03:39:04

802.11 n(20) 5745 MHz (ANT A)

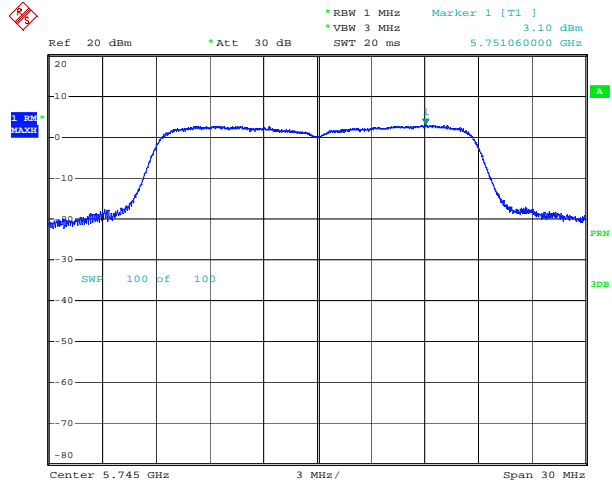


Date: 10.APR.2015 03:41:27

802.11 n(20) 5785 MHz (ANT A)

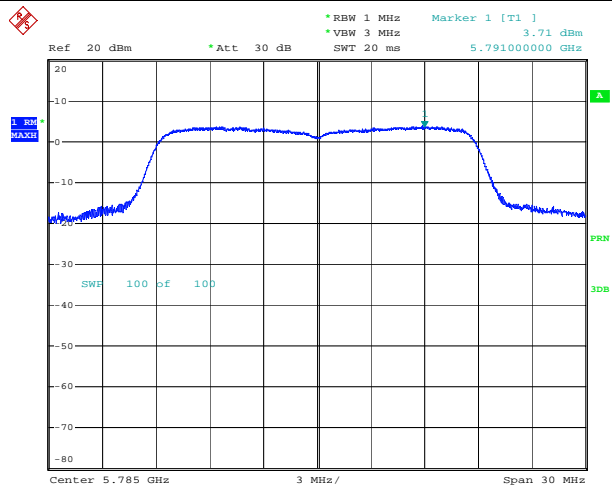


Date: 10.APR.2015 03:40:57

802.11 n(20) 5825 MHz (ANT A)

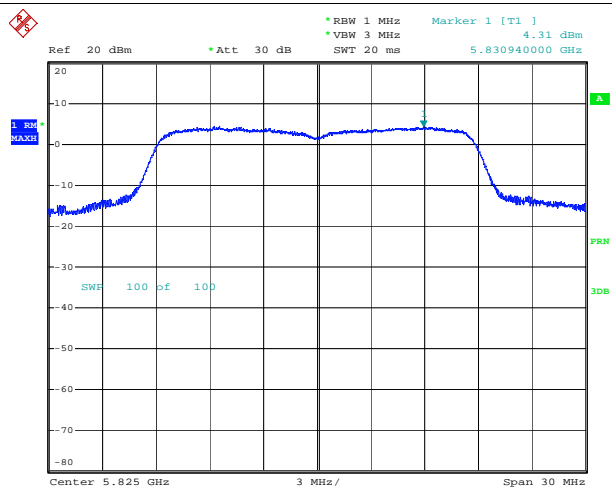


Date: 10.APR.2015 03:40:19

802.11 ac(20) 5745 MHz (ANT A)

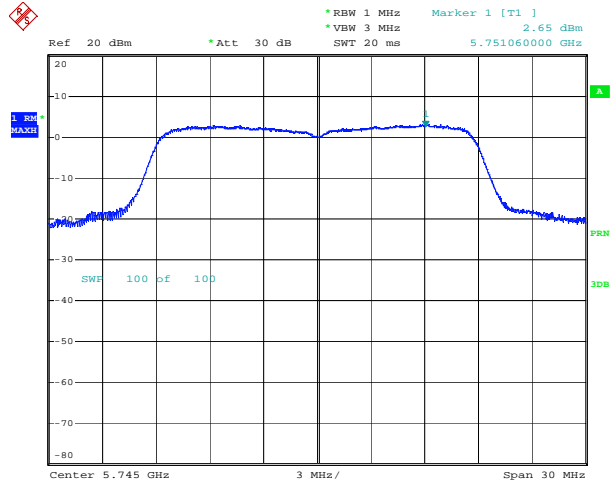


Date: 10.APR.2015 03:41:58

802.11 ac(20) 5785 MHz (ANT A)

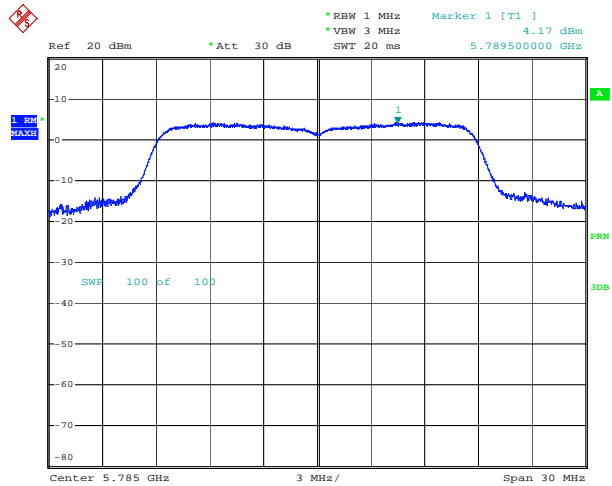




Date: 10.APR.2015 03:44:05


802.11 ac(20) 5825 MHz (ANT A)

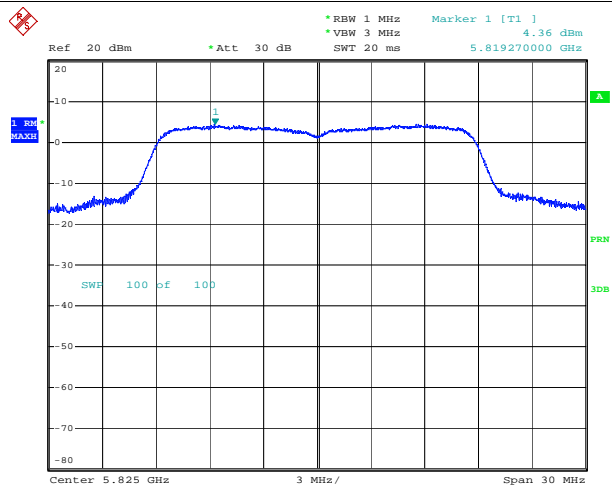


Date: 10.APR.2015 03:44:48

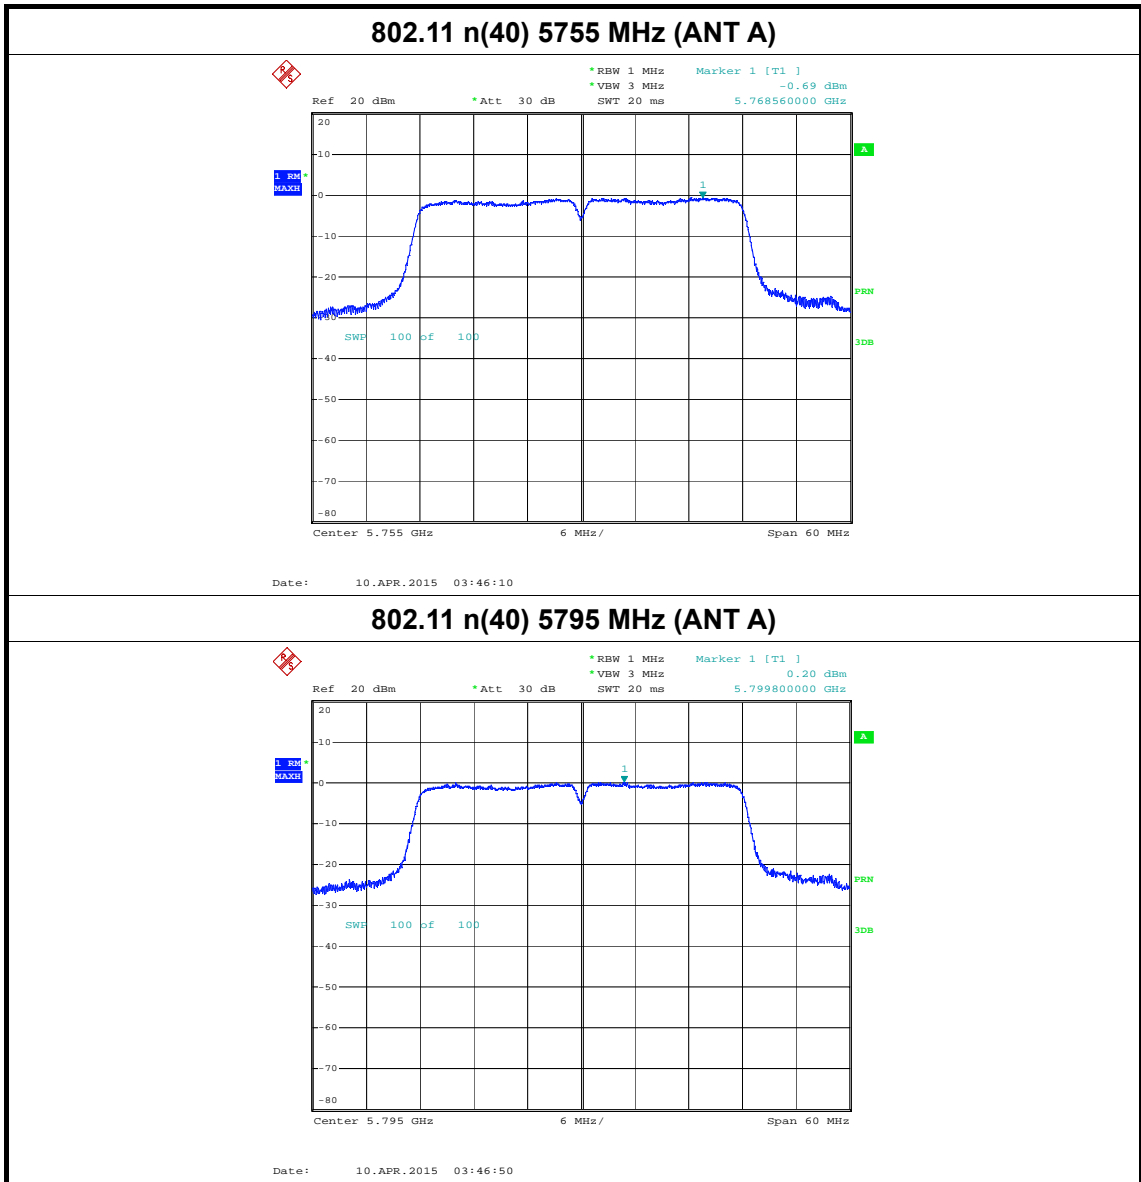

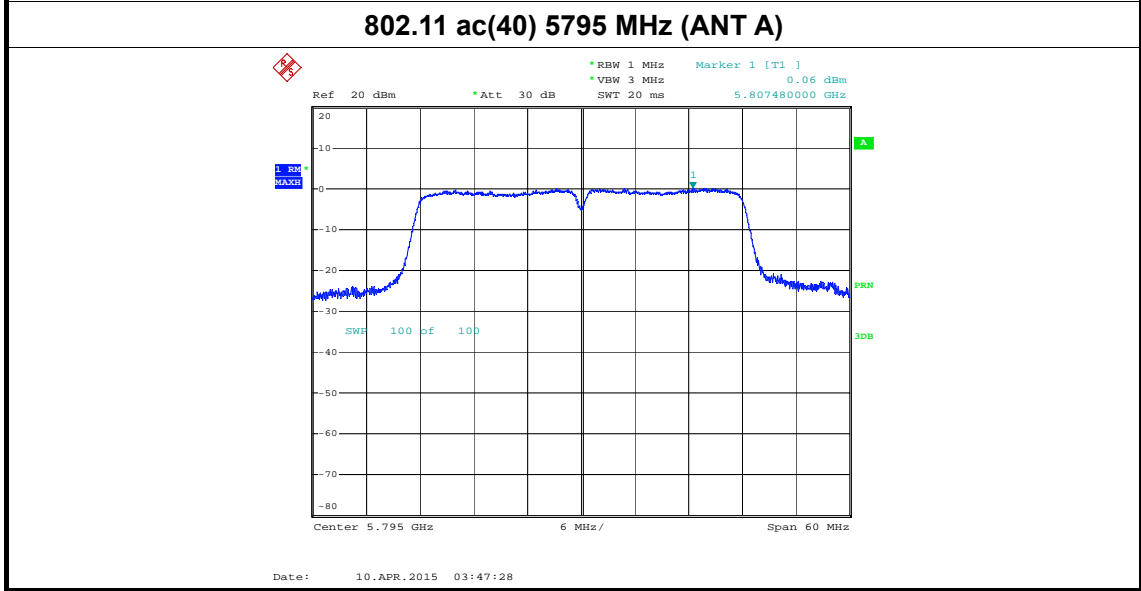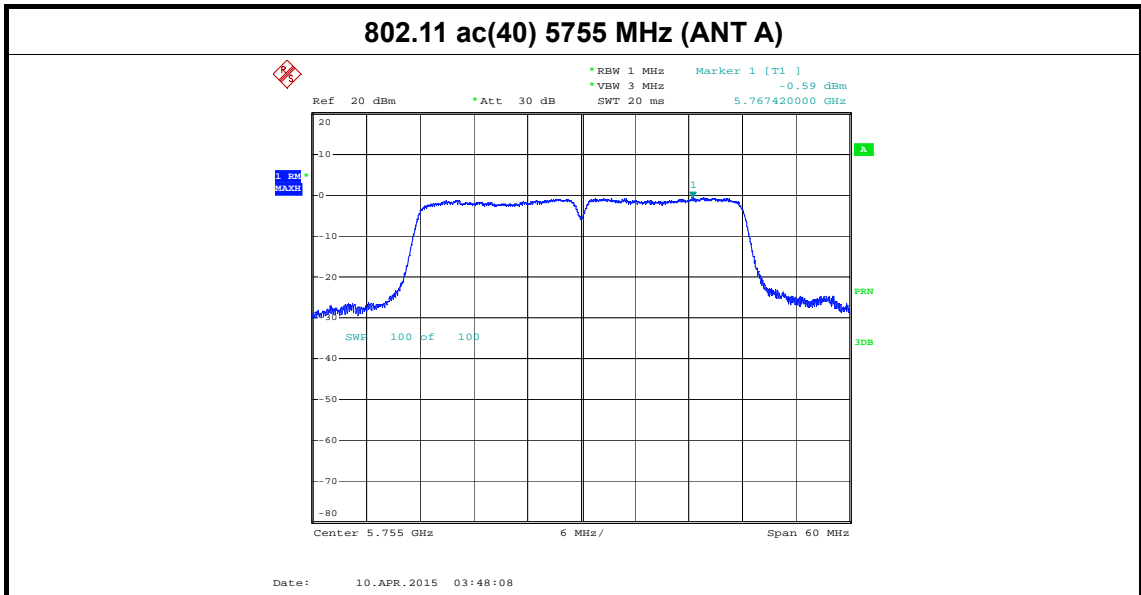

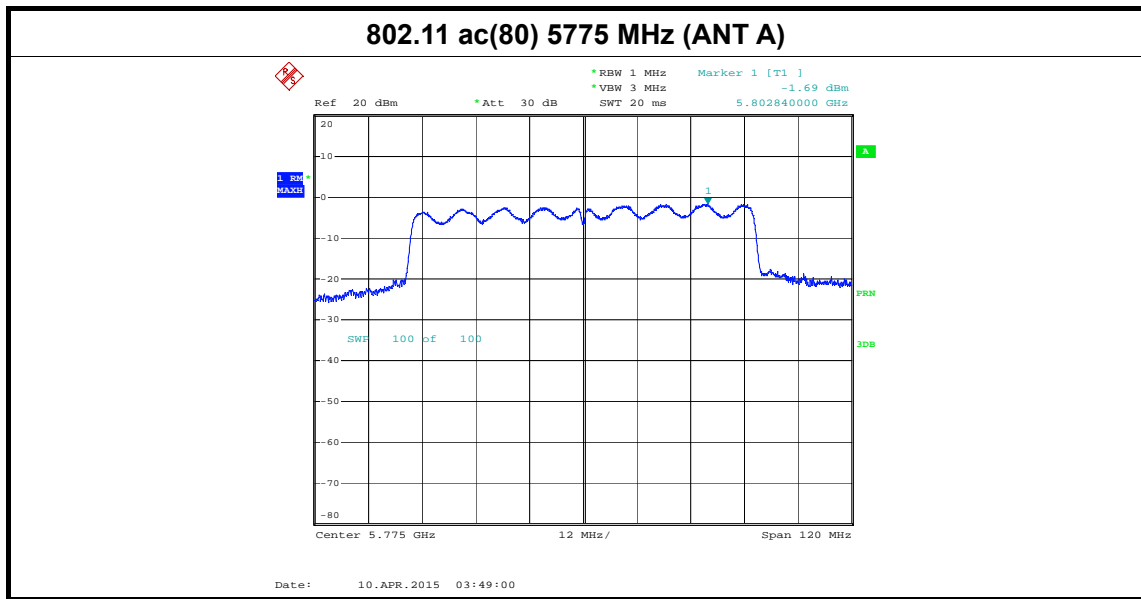


802.11 n(20) 5745 MHz (ANT B)

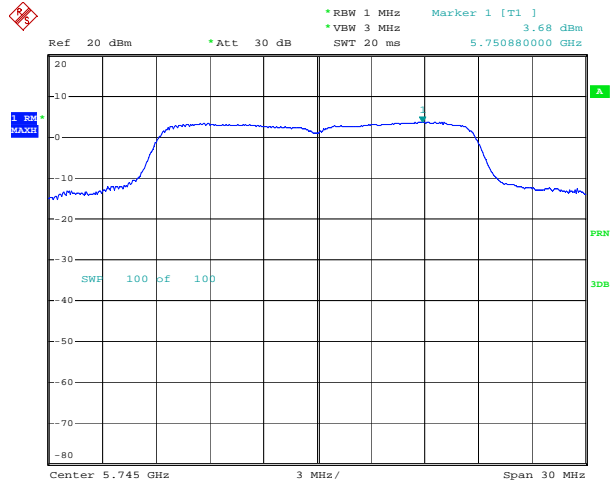


Date: 10.APR.2015 08:24:19

802.11 n(20) 5785 MHz (ANT B)

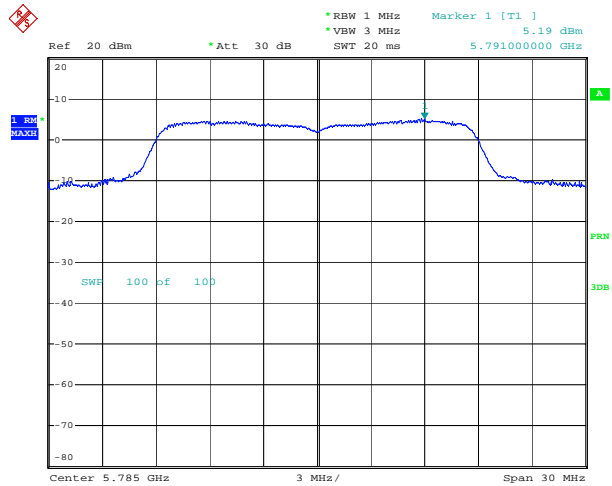


Date: 10.APR.2015 08:23:50

802.11 n(20) 5825 MHz (ANT B)

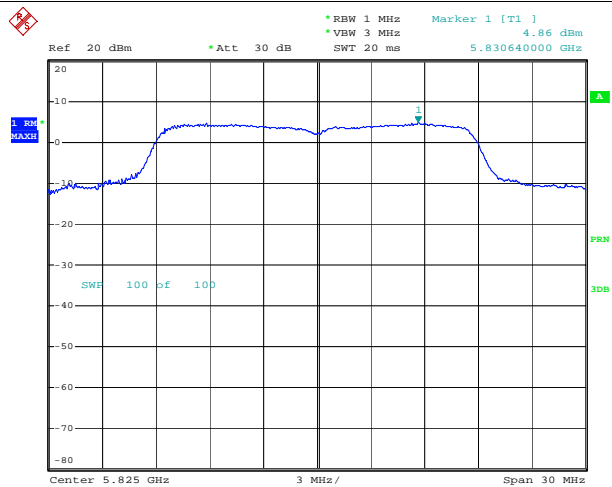


Date: 10.APR.2015 08:23:16

802.11 ac(20) 5745 MHz (ANT B)

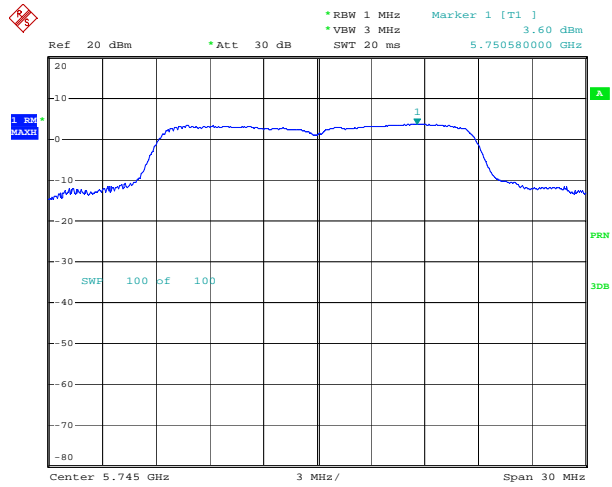


Date: 10.APR.2015 08:24:46

802.11 ac(20) 5785 MHz (ANT B)

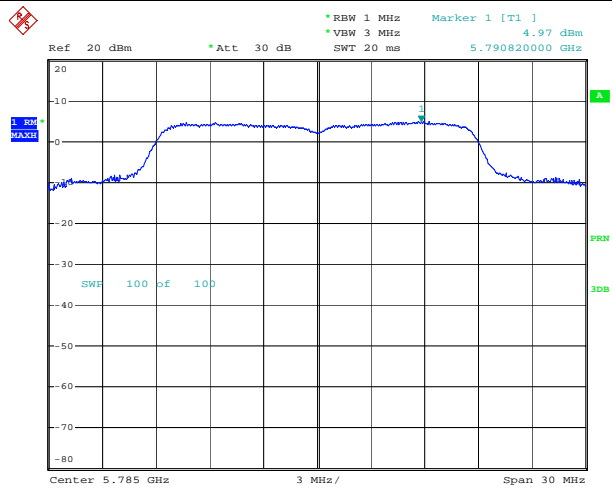


Date: 10.APR.2015 08:26:41

802.11 ac(20) 5825 MHz (ANT B)

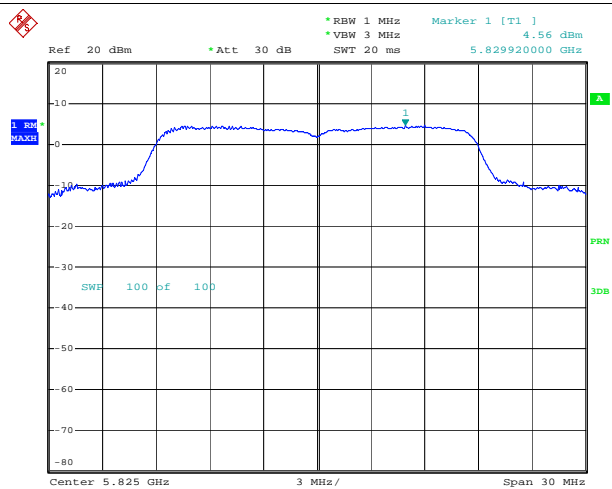


Date: 10.APR.2015 08:27:14

802.11 n(40) 5755 MHz (ANT B)

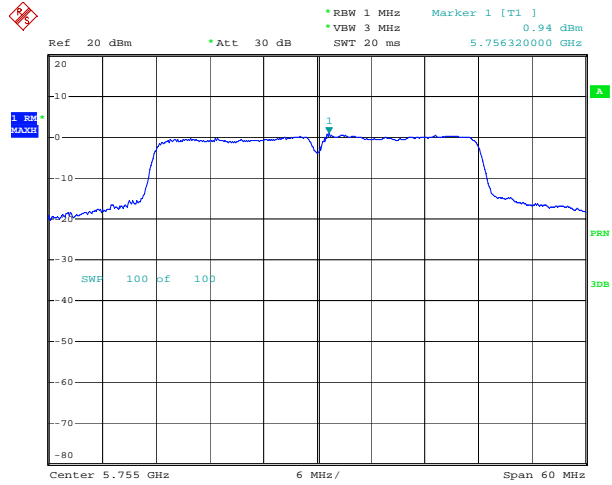


Date: 10.APR.2015 08:28:15

802.11 n(40) 5795 MHz (ANT B)

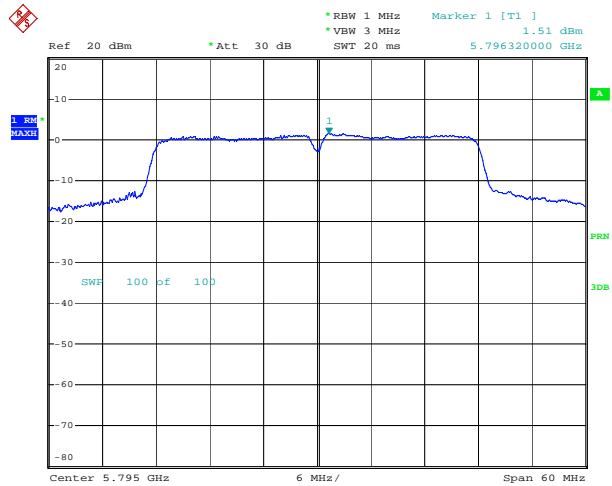


Date: 10.APR.2015 08:28:50

802.11 ac(40) 5755 MHz (ANT B)

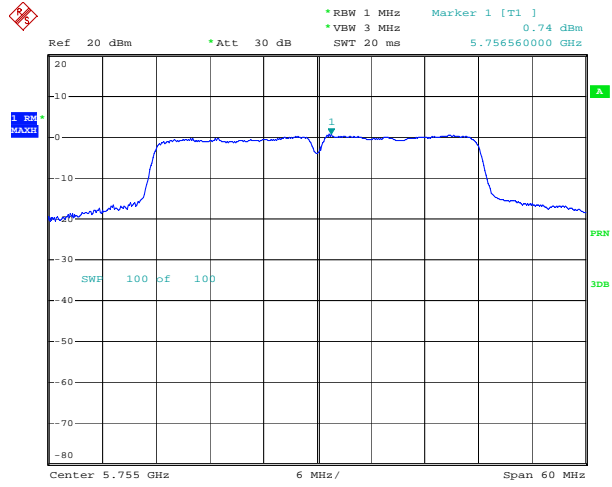

Date: 10.APR.2015 08:30:06

802.11 ac(40) 5795 MHz (ANT B)

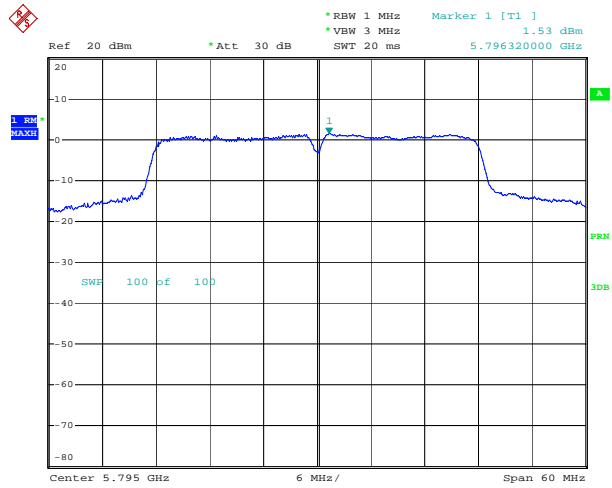

Date: 10.APR.2015 08:29:28

10. Frequency Stability Measurement

10.1 Test Standard and Limit


10.1.1 Test Standard

FCC Part 15.407

10.1.2 Test Limit

FCC Part 15 Subpart C(15.407)		
Test Item	Limit	Frequency Range(MHz)
Peak Excursion Measurement	Specified in the user's manual, the transmitter center frequency tolerance shall be ± 20 ppm maximum for the 5 GHz band (IEEE 802.11n specification)	5150~5250
		5725~5850

10.2 Test Setup

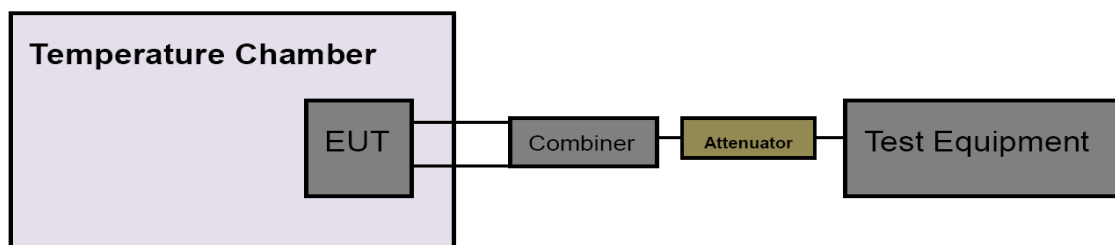

10.3 Test Procedure

The EUT was directly connected to the Spectrum Analyzer and antenna output port as show in the block diagram above.

- (1) The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.
- (2) Set analyser centre frequency to transmitting frequency.
- (3) Set the span to encompass the entire emissions bandwidth (EBW) of the signal.
- (4) Set the RBW to: 10 kHz, VBW=10 kHz with peak detector and maxhold settings.
- (5) The test extreme voltage is to change the primary supply voltage from 85 to 115 percent of the nominal value.
- (6) Extreme temperature is 0°C~50°C

10.4 EUT Operating Condition

The EUT was set to continuously transmitting in continuously un-modulation transmitting mode.

10.5 Test Data

801.11a U-NII-1: 5200 MHz	
Voltage vs. Frequency Stability	
Voltage (V)	Measurement Frequency (MHz)
132	5199.9941
120	5199.9962
118	5199.9978
Max. Deviation (MHz)	0.0059
Max. Deviation (ppm)	1.13
Temperature vs. Frequency Stability	
Temperature (°C)	Measurement Frequency (MHz)
0	5199.9947
10	5199.9961
20	5199.9964
30	5199.9975
40	5199.9979
50	5199.9981
Max. Deviation (MHz)	0.0053
Max. Deviation (ppm)	1.01

801.11a U-NII-3: 5745 MHz	
Voltage vs. Frequency Stability	
Voltage (V)	Measurement Frequency (MHz)
132	5745.0023
120	5745.0021
118	5745.0024
Max. Deviation (MHz)	0.0024
Max. Deviation (ppm)	0.42
Temperature vs. Frequency Stability	
Temperature (°C)	Measurement Frequency (MHz)
0	5745.0012
10	5745.0029
20	5745.0022
30	5745.0021
40	5745.0012
50	5745.0083
Max. Deviation (MHz)	0.0083
Max. Deviation (ppm)	1.44

11. Antenna Requirement

11.1 Standard Requirement

11.1.1 Standard

FCC Part 15.203

11.1.2 Requirement

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

11.2 Antenna Connected Construction

The directional gains of the antenna used for transmitting is 4.33dBi(5150MHz~5250MHz) and 5.62dBi(5725MHz~5850MHz), and the antenna de-signed with permanent attachment and no consideration of replacement. Please see the EUT photo for details.

11.3 Result

The EUT antenna is a PIFA Antenna. It complies with the standard requirement.

Antenna Type
<input checked="" type="checkbox"/> Permanent attached antenna
<input type="checkbox"/> Unique connector antenna
<input type="checkbox"/> Professional installation antenna