



FCC RADIO TEST REPORT

FCC ID: LNQSBWD60A

Product : ScreenBeam Mini2 Wireless Display Receiver

Trade Name : Actiontec

Model Name : SBWD60A

Serial Model : N/A

Report No. : NTEK-2014NT07091105F3

Prepared for

Actiontec Electronics, Inc.

760 North Mary Ave., Sunnyvale, California 94085 United States

Prepared by

Shenzhen NTEK Testing Technology Co., Ltd.

1/F, Building E, Fenda Science Park, Sanwei Community, Xixiang Street
Bao'an District, Shenzhen P.R. China

Tel.: +86-0755-61156588 Fax.: +86-0755-61156599

Website: www.ntek.org.cn

TEST RESULT CERTIFICATION

Applicant's name Actiontec Electronics, Inc.

Address 760 North Mary Ave., Sunnyvale, California 94085 United States

Manufacturer's Name... Actiontec Electronics, Inc.

Address 760 North Mary Ave., Sunnyvale, California 94085 United States

Product description

Product name ScreenBeam Mini2 Wireless Display Receiver

Model and/or type reference SBWD60A

Serial Model N/A

Standards FCC Part15.247 01 Oct. 2013

Test procedure ANSI C63.4-2003 and KDB 558074 D01 DTS Meas Guidance v03r02

This device described above has been tested by NTEK, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.


This report shall not be reproduced except in full, without the written approval of NTEK, this document may be altered or revised by NTEK, personal only, and shall be noted in the revision of the document.

Date of Test

Date (s) of performance of tests 09 Jul. 2014 ~26 Jul. 2014

Date of Issue 26 Jul. 2014

Test Result **Pass**

Testing Engineer : 
(Kyle Xu)

Technical Manager : 
(Brown Lu)


Authorized Signatory : 
(Bill Yao)

Table of Contents

	Page
1 . SUMMARY OF TEST RESULTS	5
1.1 TEST FACILITY	6
1.2 MEASUREMENT UNCERTAINTY	6
2 . GENERAL INFORMATION	7
2.1 GENERAL DESCRIPTION OF EUT	7
2.2 DESCRIPTION OF TEST MODES	10
2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	11
2.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)	12
2.5 EQUIPMENTS LIST FOR ALL TEST ITEMS	13
3 . EMC EMISSION TEST	14
3.1 CONDUCTED EMISSION MEASUREMENT	14
3.1.1 POWER LINE CONDUCTED EMISSION LIMITS	14
3.1.2 TEST PROCEDURE	15
3.1.3 DEVIATION FROM TEST STANDARD	15
3.1.4 TEST SETUP	15
3.1.5 EUT OPERATING CONDITIONS	15
3.1.6 TEST RESULTS	16
3.2 RADIATED EMISSION MEASUREMENT	20
3.2.1 RADIATED EMISSION LIMITS	20
3.2.2 TEST PROCEDURE	21
3.2.3 DEVIATION FROM TEST STANDARD	21
3.2.4 TEST SETUP	22
3.2.5 EUT OPERATING CONDITIONS	23
3.2.6 TEST RESULTS (BETWEEN 9KHZ – 30 MHZ)	24
3.2.7 TEST RESULTS (BETWEEN 30MHZ – 1GHZ)	25
3.2.8 TEST RESULTS (ABOVE 1000 MHZ)	29
4 . POWER SPECTRAL DENSITY TEST	51
4.1 APPLIED PROCEDURES / LIMIT	51
4.1.1 TEST PROCEDURE	51
4.1.2 DEVIATION FROM STANDARD	51
4.1.3 TEST SETUP	51
4.1.4 EUT OPERATION CONDITIONS	51
4.1.5 TEST RESULTS	52
5 . BANDWIDTH TEST	66
5.1 APPLIED PROCEDURES / LIMIT	66
5.1.1 TEST PROCEDURE	66

Table of Contents

	Page
TEST SETUP	66
5.1.2 EUT OPERATION CONDITIONS	66
5.1.3 TEST RESULTS	67
6 . PEAK OUTPUT POWER TEST	81
6.1 APPLIED PROCEDURES / LIMIT	81
6.1.1 TEST PROCEDURE	81
6.1.2 DEVIATION FROM STANDARD	81
6.1.3 TEST SETUP	81
6.1.4 EUT OPERATION CONDITIONS	81
6.1.5 TEST RESULTS	82
7 . 100 KHZ BANDWIDTH OF FREQUENCY BAND EDGE	84
7.1 DEVIATION FROM STANDARD	84
7.2 TEST SETUP	84
7.3 EUT OPERATION CONDITIONS	84
7.4 TEST RESULTS	85
8 . ANTENNA REQUIREMENT	94
8.1 STANDARD REQUIREMENT	94
8.2 EUT ANTENNA	94
9 . EUT TEST PHOTO	95
APPENDIX-PHOTOGRAPHS OF EUT CONSTRUCTIONAL DETAILS	

1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

FCC Part15 (15.247) , Subpart C			
Standard Section	Test Item	Judgment	Remark
15.207	Conducted Emission	PASS	
15.247 (a)(2)	6dB Bandwidth	PASS	
15.247 (b)	Peak Output Power	PASS	
15.247 (c)	Radiated Spurious Emission	PASS	
15.247 (d)	Power Spectral Density	PASS	
15.205	Band Edge Emission	PASS	
15.203	Antenna Requirement	PASS	

NOTE:

(1) "N/A" denotes test is not applicable in this Test Report

1.1 TEST FACILITY

NTEK Testing Technology Co., Ltd
 Add.:1/F, Building E, Fenda Science Park, Sanwei Community, Xixiang Street, Bao'an District, Shenzhen P.R. China.
 FCC Registration No.:238937; IC Registration No.:9270A-1
 CNAS Registration No.:L5516

1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

No.	Item	Uncertainty
1	Conducted Emission Test	$\pm 1.38\text{dB}$
2	RF power,conducted	$\pm 0.16\text{dB}$
3	Spurious emissions,conducted	$\pm 0.21\text{dB}$
4	All emissions,radiated(<1G)	$\pm 4.68\text{dB}$
5	All emissions,radiated(>1G)	$\pm 4.89\text{dB}$
6	Temperature	$\pm 0.5^{\circ}\text{C}$
7	Humidity	$\pm 2\%$

2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

Equipment	ScreenBeam Mini2 Wireless Display Receiver	
Trade Name	Actiontec	
Model Name	SBWD60A	
Product Description	The EUT is a ScreenBeam Mini2 Wireless Display Receiver	
	Operation Frequency:	802.11b/g/n(20MHz):2412~2462 MHz 802.11n(40MHz):2422~2452 MHz
	Modulation Type:	CCK/OFDM/DBPSK/DAPSK
	Bit Rate of Transmitter	802.11b:11/5.5/2/1 Mbps 802.11g:54/48/36/24/18/12/9/6Mbps 802.11n(20MHz):150/144.44/130/117/115.56/104/86.67/78/52/6.5Mbps 802.11n(40MHz):300/270/240/180/150/120/108/90/54 Mbps
	Number Of Channel	802.11b/g/n20MHz:11CH 802.11n40MHz:7CH
	Max.Output Power(Conducted):	12.55 dBm
	Operation Frequency:	5725 MHz ~ 5850 MHz
	Modulation Type:	OFDM (BPSK / QPSK / 16QAM / 64QAM)
	Max.Output Power(Conducted):	12.91dBm
	Antenna Designation:	Please see Note 3.
	Antenna Gain (dBi)	Please see Note 3.
	Based on the application, features, or specification exhibited in User's Manual, the EUT is considered as an ITE/Computing Device. More details of EUT technical specification, please refer to the User's Manual.	
	Channel List	Please refer to the Note 2.
Ratings	Adapter 1: DC 5V,1.0A Adapter 2: DC 5V,1000mA	
Adapter	Adapter 1: Mode: MU05B2050100-A1 Input: 100-240V~, 50/60Hz, 0.3A Output: 5V $\overline{\text{---}}$, 1.0A Adapter 2: Mode: SC050100-US Input: 100-240V~, 50/60Hz, 0.4A Output: 5V $\overline{\text{---}}$, 1000mA	
Battery	N/A	

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.

2. 2.4GHz

Channel List for 802.11b/g/n(20 MHz)							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
01	2412	04	2427	07	2442	10	2457
02	2417	05	2432	08	2447	11	2462
03	2422	06	2437	09	2452	-	-

Channel List for 802.11n(40MHz)							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
03	2422	06	2437	09	2452	-	-
04	2427	07	2442	-	-	-	-
05	2432	08	2447	-	-	-	-

5GHz


802.11a/n20 MHz Carrier Frequency Channel							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
149	5745	153	5765	157	5785	161	5805
165	5825	-	-	-	-	-	-

802.11n 40MHzCarrier Frequency Channel							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
151	5755	155	5775	159	5795	-	-

3.

Table for Filed Antenna

Ant	Brand	Model Name	Antenna Type	Gain (dBi)	NOTE
A	N/A	N/A	PCB antenna	2.4G/5G:6.05	Wifi Antenna
B	N/A	N/A	PCB antenna	2.4G/5G:6.05	Wifi Antenna

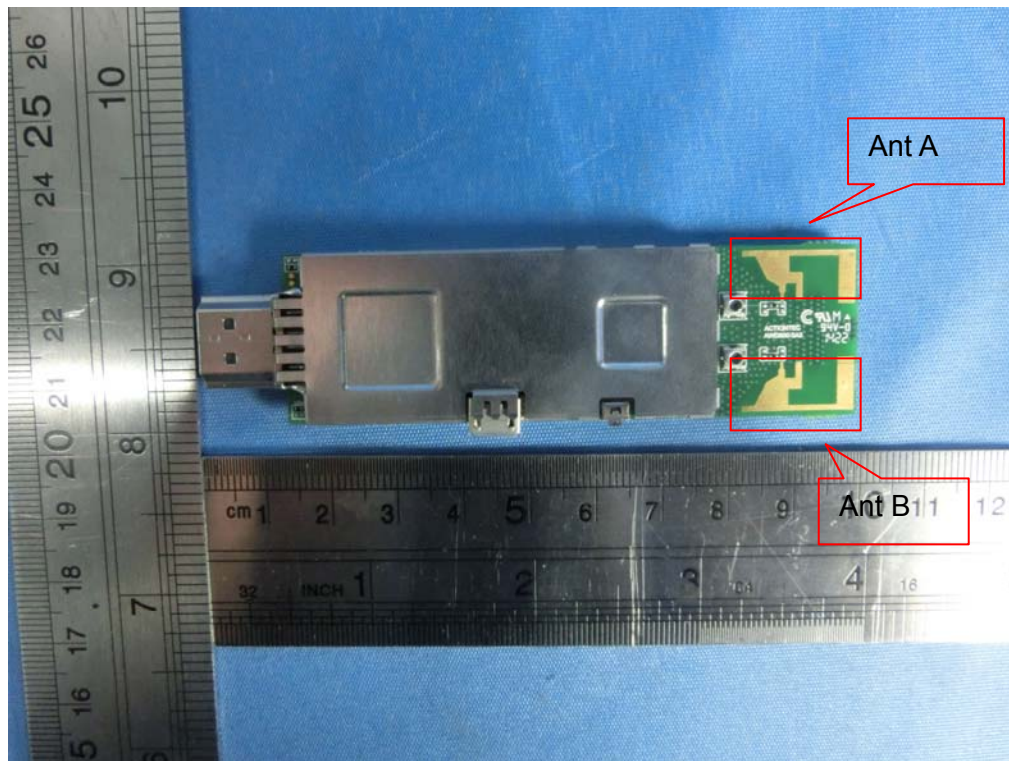

The Control software(tool_WIFI.exe) can control antenna A B ,

For 2.4GHz mode, antenna A B are transmitting,two antennas simultaneously transmit.

And the data is recorded for radiated emission and band edge.

For 5GHz mode,antenna A B are transmitting Two antennas simultaneously transmit.

And the data is recorded for radiated emission, and band edge.

For MIMO mode , Directional gain= $G_{ANT} + 10\log(N)$ dbi =9.06dbi in 2.4GHz

Directional gain= $G_{ANT} + 10\log(N)$ dbi =9.06dbi in 5GHz

802.11a/b/g/n 2.4GHz & 5GHz has MIMO mode.

2.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	802.11b CH1/ CH6/ CH11
Mode 2	802.11g CH1/ CH6/ CH11
Mode 3	802.11n20 CH1/ CH6/ CH11
Mode 4	802.11n40 CH3/ CH6/ CH9
Mode 5	Link Mode
Mode 6	802.11a /n 20 CH149/ CH157/ CH 165
Mode 7	802.11n40 CH 151 / CH 159

For Conducted Emission	
Final Test Mode	Description
Mode 5	Link Mode


For Radiated Emission	
Final Test Mode	Description
Mode 1	802.11b CH1/ CH6/ CH11
Mode 2	802.11g CH1/ CH6/ CH11
Mode 3	802.11n20 CH1/ CH6/ CH11
Mode 4	802.11n40 CH3/ CH6/ CH 9
Mode 5	Link Mode
Mode 6	802.11a /n20 CH149/ CH157/ CH165
Mode 7	802.11n40 CH151 / CH159

Note:


- (1) The measurements are performed at the highest, middle, lowest available channels.
- (2) The measurements are performed at all Bit Rate of Transmitter, the worst data was reported

2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

Conducted Emission Test

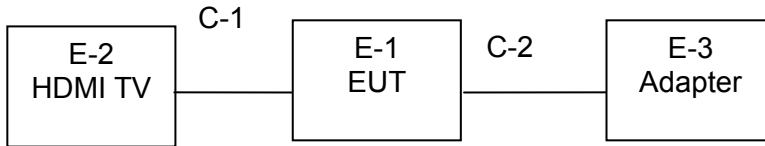

Radiated Emission Test



2.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Brand	Model/Type No.	Series No.	Note
E-1	ScreenBeam Mini2 Wireless Display Receiver	Actiontec	SBWD60A	N/A	EUT
E-2	TV	SONY	KDL-24EX520	N/A	
E-3	Adapter 1	Actiontec	MU05B2050100-A1	N/A	
E-3	Adapter 2	Actiontec	SC050100-US	N/A	

Item	Shielded Type	Ferrite Core	Length	Note
C-1	NO	NO	100cm	
C-2	NO	NO	80cm	

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.

2.5 EQUIPMENTS LIST FOR ALL TEST ITEMS

Radiation Test equipment

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	Spectrum Analyzer	Agilent	E4407B	MY45108040	2014.07.06	2015.07.05	1 year
2	Test Receiver	R&S	ESPI	101318	2014.06.06	2015.06.05	1 year
3	Bilog Antenna	TESEQ	CBL6111D	31216	2014.07.06	2015.07.05	1 year
4	50Ω Coaxial Switch	Anritsu	MP59B	6200264416	2014.06.06	2015.06.05	1 year
5	Spectrum Analyzer	ADVANTEST	R3132	150900201	2014.06.06	2015.06.05	1 year
6	Horn Antenna	EM	EM-AH-10180	2011071402	2014.07.06	2015.07.05	1 year
7	Horn Ant	Schwarzbeck	BBHA 9170	9170-181	2014.07.06	2015.07.05	1 year
8	Amplifier	EM	EM-30180	060538	2013.12.22	2014.12.21	1 year
9	Loop Antenna	ARA	PLA-1030/B	1029	2014.06.06	2015.06.05	1 year
10	Power Meter	R&S	NRVS	100696	2014.07.06	2015.07.05	1 year
11	Power Sensor	R&S	URV5-Z4	0395.1619.05	2014.07.06	2015.07.05	1 year

Conduction Test equipment

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	Test Receiver	R&S	ESCI	101160	2014.06.06	2015.06.05	1 year
2	LISN	R&S	ENV216	101313	2013.08.24	2014.08.23	1 year
3	LISN	EMCO	3816/2	00042990	2014.06.06	2015.06.05	1 year
4	50Ω Coaxial Switch	Anritsu	MP59B	6200264417	2014.06.06	2015.06.05	1 year
5	Passive Voltage Probe	R&S	ESH2-Z3	100196	2014.06.06	2015.06.05	1 year
6	Absorbing clamp	R&S	MOS-21	100423	2014.06.06	2015.06.05	1 year

1	Attenuation	MCE	24-10-34	BN9258	2014.06.06	2015.06.05	1 year
---	-------------	-----	----------	--------	------------	------------	--------

3. EMC EMISSION TEST

3.1 CONDUCTED EMISSION MEASUREMENT

3.1.1 POWER LINE CONDUCTED EMISSION Limits (Frequency Range 150KHz-30MHz)

FREQUENCY (MHz)	Class A (dBuV)		Class B (dBuV)		Standard
	Quasi-peak	Average	Quasi-peak	Average	
0.15 -0.5	79.00	66.00	66 - 56 *	56 - 46 *	CISPR
0.50 -5.0	73.00	60.00	56.00	46.00	CISPR
5.0 -30.0	73.00	60.00	60.00	50.00	CISPR

0.15 -0.5	79.00	66.00	66 - 56 *	56 - 46 *	FCC
0.50 -5.0	73.00	60.00	56.00	46.00	FCC
5.0 -30.0	73.00	60.00	60.00	50.00	FCC

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz


3.1.2 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

3.1.3 DEVIATION FROM TEST STANDARD

No deviation

3.1.4 TEST SETUP

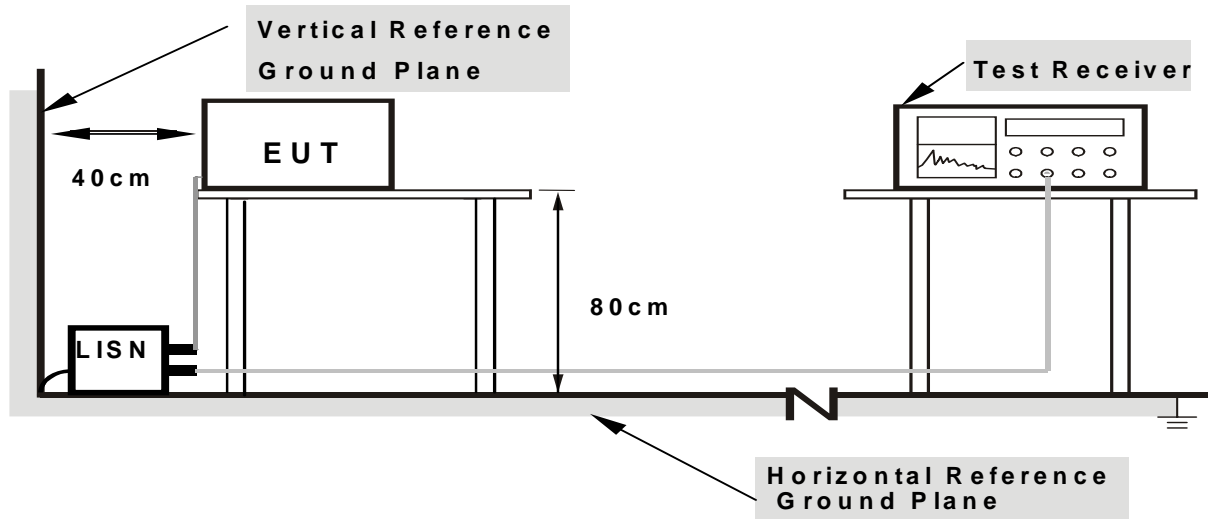

- Note:**
- 1. Support units were connected to second LISN.
 - 2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

3.1.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.


3.1.6 TEST RESULTS

EUT :	ScreenBeam Mini2 Wireless Display Receiver	Model Name. :	SBWD60A
Temperature :	26 °C	Relative Humidity :	56%
Pressure :	1010hPa	Phase :	L
Test Voltage :	DC 5V From adapter AC120V/60Hz- Adapter 1	Test Mode :	Mode 5

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV)	Limits (dBμV)	Margin (dB)	Remark
0.1580	40.62	9.63	50.25	65.56	-15.31	QP
0.1580	26.21	9.63	35.84	55.56	-19.72	AVG
0.1980	39.07	9.51	48.58	63.69	-15.11	QP
0.1980	24.02	9.51	33.53	53.69	-20.16	AVG
0.5899	39.03	9.53	48.56	56.00	-7.44	QP
0.5899	25.81	9.53	35.34	46.00	-10.66	AVG
0.8059	31.30	9.54	40.84	56.00	-15.16	QP
0.8059	19.50	9.54	29.04	46.00	-16.96	AVG
1.1300	30.64	9.55	40.19	56.00	-15.81	QP
1.1300	17.99	9.55	27.54	46.00	-18.46	AVG
13.6019	37.66	9.81	47.47	60.00	-12.53	QP
13.6019	23.79	9.81	33.60	50.00	-16.40	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

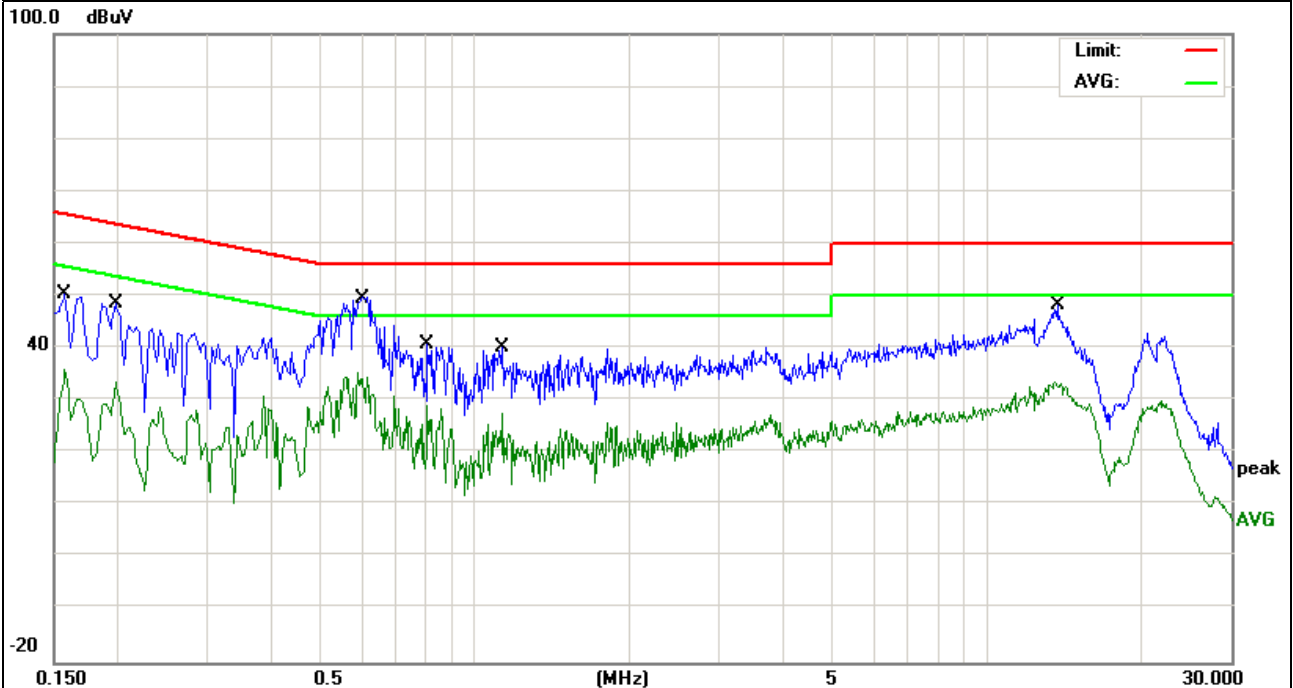


EUT :	ScreenBeam Mini2 Wireless Display Receiver	Model Name. :	SBWD60A
Temperature :	26 °C	Relative Humidity :	56%
Pressure :	1010hPa	Phase :	N
Test Voltage :	DC 5V From adapter AC120V/60Hz- Adapter 1	Test Mode :	Mode 5

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV)	Limits (dBμV)	Margin (dB)	Remark
0.1819	39.32	9.56	48.88	64.39	-15.51	QP
0.1819	26.40	9.56	35.96	54.39	-18.43	AVG
0.5100	37.75	9.53	47.28	56.00	-8.72	QP
0.5100	29.83	9.53	39.36	46.00	-6.64	AVG
0.5898	41.42	9.53	50.95	56.00	-5.05	QP
0.5898	31.34	9.53	40.87	46.00	-5.13	AVG
1.2257	29.04	9.55	38.59	56.00	-17.41	QP
1.2257	19.86	9.55	29.41	46.00	-16.59	AVG
2.6218	28.27	9.57	37.84	56.00	-18.16	QP
2.6218	19.95	9.57	29.52	46.00	-16.48	AVG
13.7659	36.73	9.82	46.55	60.00	-13.45	QP
13.7659	23.77	9.82	33.59	50.00	-16.41	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

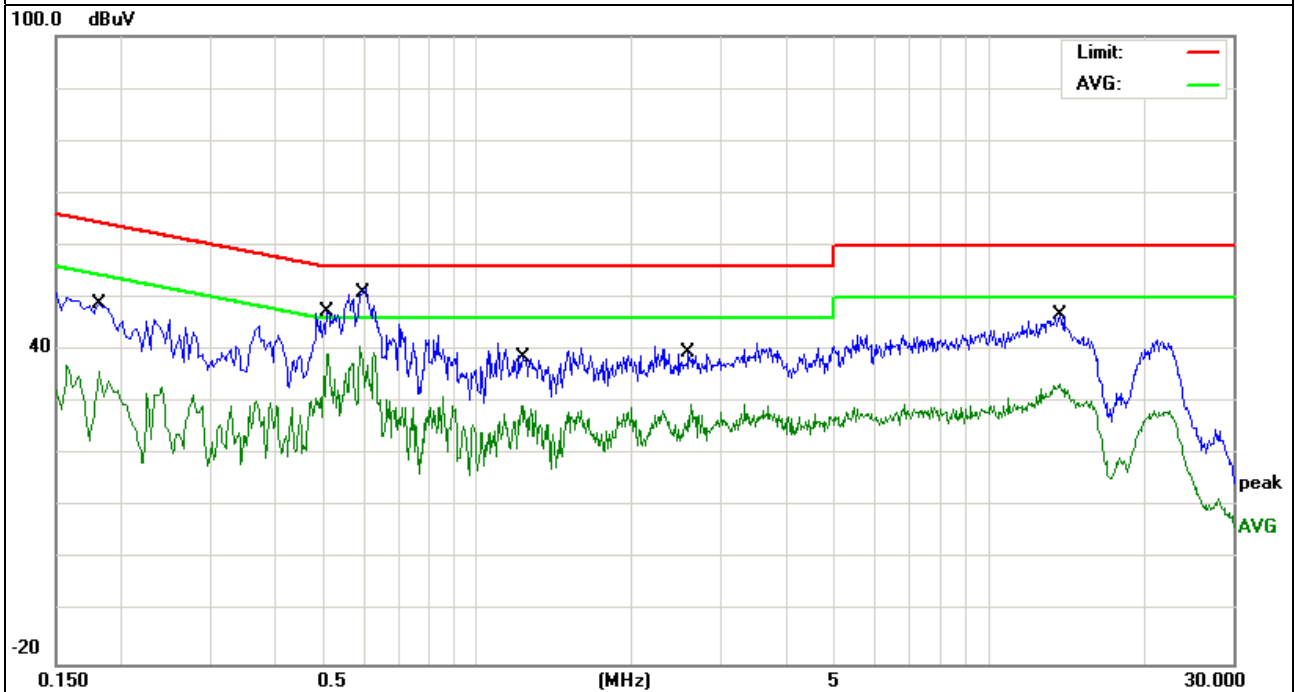


EUT :	ScreenBeam Mini2 Wireless Display Receiver	Model Name. :	SBWD60A
Temperature :	26 °C	Relative Humidity :	56%
Pressure :	1010hPa	Phase :	L
Test Voltage :	DC 5V From adapter AC120V/60Hz- Adapter 2	Test Mode :	Mode 5

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV)	Limits (dBμV)	Margin (dB)	Remark
0.1620	44.56	9.62	54.18	65.36	-11.18	QP
0.1620	28.53	9.62	38.15	55.36	-17.21	AVG
0.3780	37.08	9.52	46.60	58.32	-11.72	QP
0.3780	26.06	9.52	35.58	48.32	-12.74	AVG
0.4180	39.57	9.52	49.09	57.49	-8.40	QP
0.4180	32.70	9.52	42.22	47.49	-5.27	AVG
0.8380	34.66	9.54	44.20	56.00	-11.80	QP
0.8380	23.59	9.54	33.13	46.00	-12.87	AVG
5.1979	33.02	9.60	42.62	60.00	-17.38	QP
5.1979	22.74	9.60	32.34	50.00	-17.66	AVG
13.1139	33.06	9.81	42.87	60.00	-17.13	QP
13.1139	22.03	9.81	31.84	50.00	-18.16	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

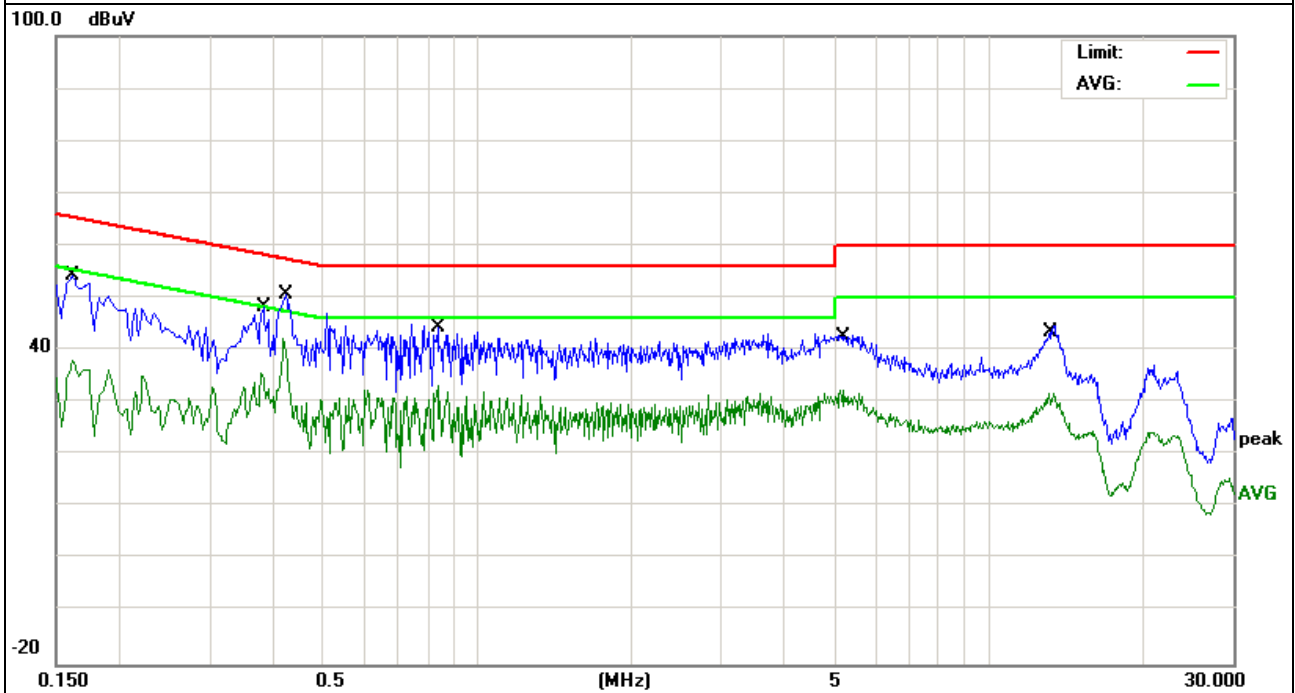


EUT :	ScreenBeam Mini2 Wireless Display Receiver	Model Name. :	SBWD60A
Temperature :	26 °C	Relative Humidity :	56%
Pressure :	1010hPa	Phase :	N
Test Voltage :	DC 5V From adapter AC120V/60Hz- Adapter 2	Test Mode :	Mode 5

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV)	Limits (dBμV)	Margin (dB)	Remark
0.1739	41.38	9.58	50.96	64.77	-13.81	QP
0.1739	27.64	9.58	37.22	54.77	-17.55	AVG
0.4139	42.45	9.52	51.97	57.57	-5.60	QP
0.4139	32.16	9.52	41.68	47.57	-5.89	AVG
0.5540	37.52	9.53	47.05	56.00	-8.95	QP
0.5540	27.59	9.53	37.12	46.00	-8.88	AVG
1.0660	37.53	9.55	47.08	56.00	-8.92	QP
1.0660	25.67	9.55	35.22	46.00	-10.78	AVG
4.9739	34.30	9.60	43.90	56.00	-12.10	QP
4.9739	23.47	9.60	33.07	46.00	-12.93	AVG
13.4338	34.78	9.81	44.59	60.00	-15.41	QP
13.4338	22.25	9.81	32.06	50.00	-17.94	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

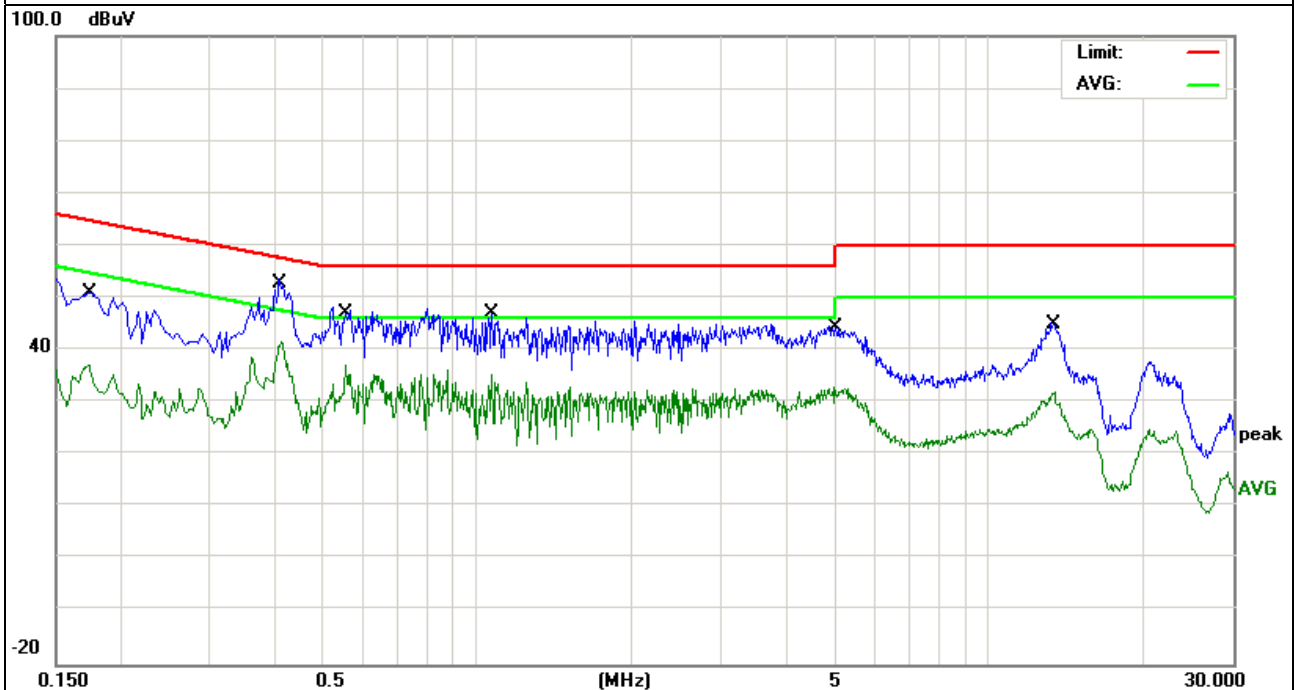

3.2 RADIATED EMISSION MEASUREMENT

3.2.1 RADIATED EMISSION LIMITS (Frequency Range 9kHz-1000MHz)

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

FREQUENCY (MHz)	dBuV/m@at 3M	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

3.2.2 TEST PROCEDURE

- a. The measuring distance of at 3 m shall be used for measurements at frequency up to 1GHz. For frequencies above 1GHz, any suitable measuring distance may be used.
- b. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The height of the equipment or of the substitution antenna shall be 0.8 m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- e. If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- f. For the actual test configuration, please refer to the related Item –EUT Test Photos.

Note:

Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

During the radiated emission test, the Spectrum Analyzer was set with the following configurations:


Frequency Band (MHz)	Function	Resolution bandwidth	Video Bandwidth
30 to 1000	Peak	100 kHz	100 kHz
Above 1000	Peak	1 MHz	1 MHz
	Average	1 MHz	10 Hz

3.2.3 DEVIATION FROM TEST STANDARD


No deviation


3.2.4 TEST SETUP

(A) Radiated Emission Test-Up Frequency Below 30MHz

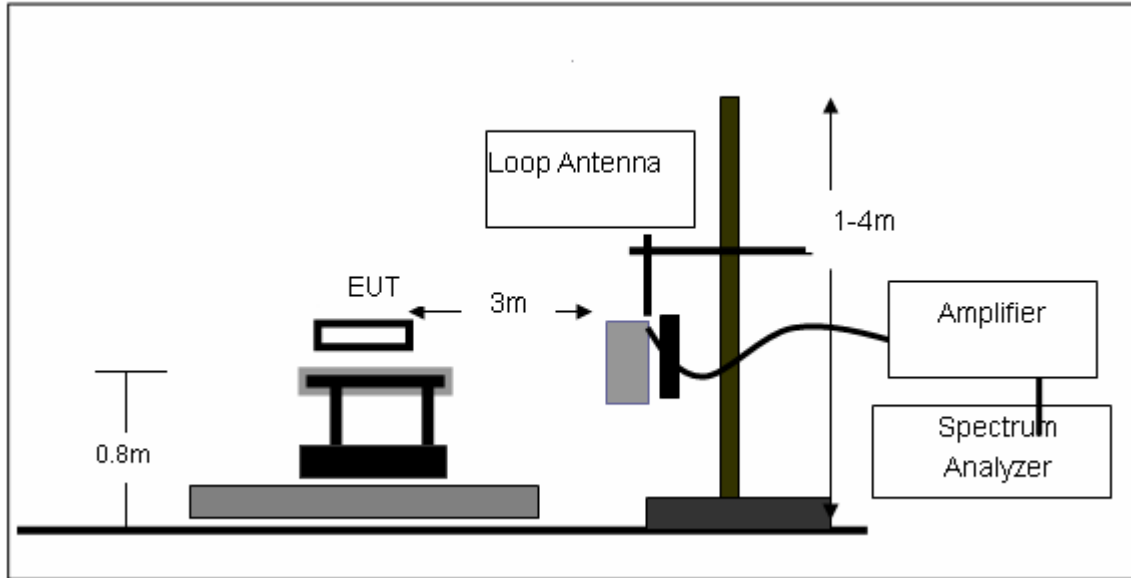

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

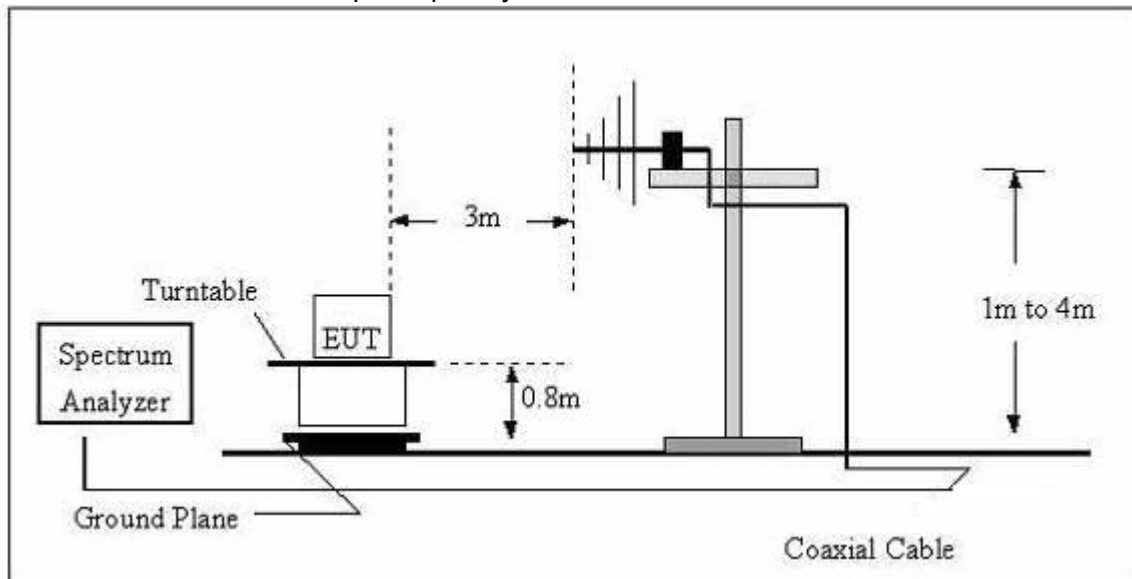

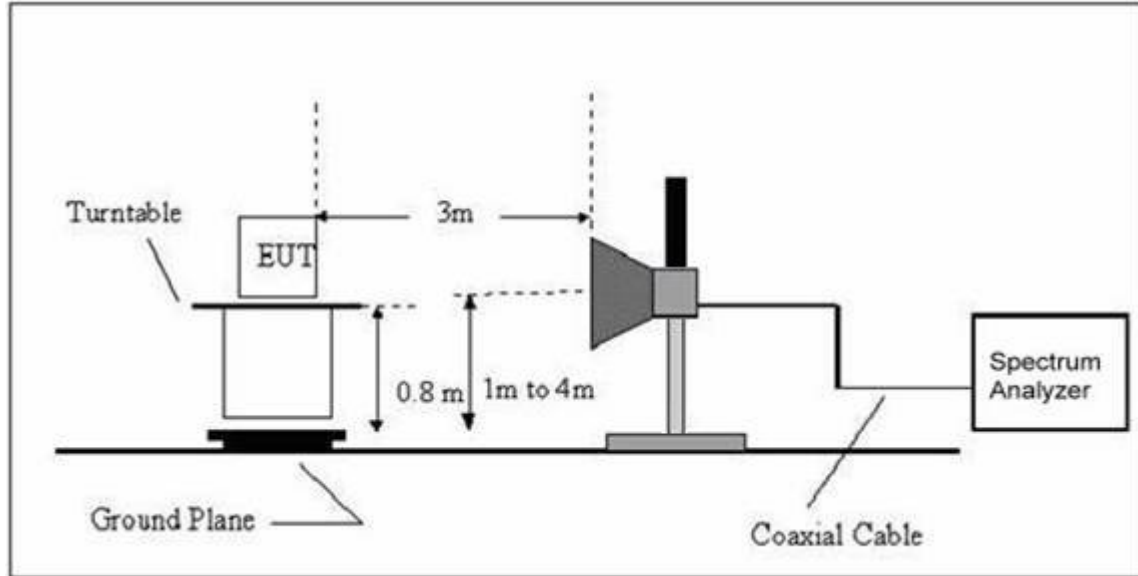(C) Radiated Emission Test- Up Frequency Above 1GHz**3.2.5 EUT OPERATING CONDITIONS**

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

3.2.6 TEST RESULTS (BETWEEN 9KHZ – 30 MHZ)

EUT:	ScreenBeam Mini2 Wireless Display Receiver	Model Name. :	SBWD60A
Temperature:	20 °C	Relative Humidity:	48%
Pressure:	1010 hPa	Test Voltage :	DC 5V From adapter AC120V/60Hz
Test Mode :	TX	Polarization :	--

Freq.	Reading	Limit	Margin	State
(MHz)	(dBuV/m)	(dBuV/m)	(dB)	P/F
--	--	--	--	N/A
--	--	--	--	N/A

NOTE:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor = $40 \log(\text{specific distance}/\text{test distance})(\text{dB})$;

Limit line = specific limits(dBuv) + distance extrapolation factor.

3.2.7 TEST RESULTS (BETWEEN 30MHZ – 1GHZ)

EUT :	ScreenBeam Mini2 Wireless Display Receiver	Model Name :	SBWD60A
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 5V From adapter AC120V/60Hz-Adapter 1
Test Mode :	TX (2.4G)		

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Vertical	51.6613	24.08	10.22	34.30	40.00	-5.70	QP
Vertical	145.8608	22.27	10.83	33.10	43.50	-10.40	QP
Vertical	313.2760	22.09	14.71	36.80	46.00	-9.20	QP
Vertical	372.0045	16.94	17.16	34.10	46.00	-11.90	QP
Vertical	463.9696	17.42	19.58	37.00	46.00	-9.00	QP
Vertical	627.2738	15.25	22.95	38.20	46.00	-7.80	QP
Horizontal	62.6507	23.26	7.24	30.50	40.00	-9.50	QP
Horizontal	184.4898	18.54	10.66	29.20	43.50	-14.30	QP
Horizontal	251.1802	20.69	13.61	34.30	46.00	-11.70	QP
Horizontal	379.9141	15.43	17.47	32.90	46.00	-13.10	QP
Horizontal	537.5891	14.63	21.07	35.70	46.00	-10.30	QP
Horizontal	731.9202	13.97	25.63	39.60	46.00	-6.40	QP

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

EUT :	ScreenBeam Mini2 Wireless Display Receiver	Model Name :	SBWD60A
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 5V From adapter AC120V/60Hz-Adapter 2
Test Mode :	TX (2.4G)		

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Vertical	50.4089	22.68	10.57	33.25	40.00	-6.75	QP
Vertical	119.4360	11.46	11.98	23.44	43.50	-20.06	QP
Vertical	146.8874	17.98	10.72	28.70	43.50	-14.80	QP
Vertical	315.4806	20.50	14.80	35.30	46.00	-10.70	QP
Vertical	441.7425	19.66	19.14	38.80	46.00	-7.20	QP
Vertical	887.6099	13.74	27.06	40.80	46.00	-5.20	QP
Horizontal	149.4857	20.34	10.46	30.80	43.50	-12.70	QP
Horizontal	199.9856	23.62	10.78	34.40	43.50	-9.10	QP
Horizontal	306.7536	23.56	14.44	38.00	46.00	-8.00	QP
Horizontal	394.8543	17.05	18.10	35.15	46.00	-10.85	QP
Horizontal	441.7425	16.96	19.14	36.10	46.00	-9.90	QP
Horizontal	798.9796	13.42	27.38	40.80	46.00	-5.20	QP

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

EUT :	ScreenBeam Mini2 Wireless Display Receiver	Model Name :	SBWD60A
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 5V From adapter AC120V/60Hz- Adapter 1
Test Mode :	TX(5.0G)		

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Vertical	52.5752	26.04	9.96	36.00	40.00	-4.00	QP
Vertical	128.1126	18.07	11.93	30.00	43.50	-13.50	QP
Vertical	145.8608	22.57	10.83	33.40	43.50	-10.10	QP
Vertical	455.9057	17.28	19.42	36.70	46.00	-9.30	QP
Vertical	531.9633	16.74	20.96	37.70	46.00	-8.30	QP
Vertical	893.8567	10.97	27.03	38.00	46.00	-8.00	QP
Horizontal	47.6584	17.13	11.27	28.40	40.00	-11.60	QP
Horizontal	63.3132	16.42	7.08	23.50	40.00	-16.50	QP
Horizontal	187.7529	19.82	10.68	30.50	43.50	-13.00	QP
Horizontal	246.8147	20.94	13.56	34.50	46.00	-11.50	QP
Horizontal	407.5144	16.74	18.46	35.20	46.00	-10.80	QP
Horizontal	755.3872	13.36	26.24	39.60	46.00	-6.40	QP

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

EUT :	ScreenBeam Mini2 Wireless Display Receiver	Model Name :	SBWD60A
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 5V From adapter AC120V/60Hz - Adapter 2
Test Mode :	TX(5.0G)		

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Vertical	47.6584	24.43	11.27	35.70	40.00	-4.30	QP
Vertical	119.8555	18.23	12.07	30.30	43.50	-13.20	QP
Vertical	147.9214	22.67	10.63	33.30	43.50	-10.20	QP
Vertical	314.3765	19.25	14.75	34.00	46.00	-12.00	QP
Vertical	447.9821	18.84	19.26	38.10	46.00	-7.90	QP
Vertical	896.9963	14.47	27.03	41.50	46.00	-4.50	QP
Horizontal	149.4857	17.74	10.46	28.20	43.50	-15.30	QP
Horizontal	189.7384	18.50	10.70	29.20	43.50	-14.30	QP
Horizontal	295.1469	21.00	14.10	35.10	46.00	-10.90	QP
Horizontal	403.2500	16.72	18.38	35.10	46.00	-10.90	QP
Horizontal	804.6028	13.00	27.40	40.40	46.00	-5.60	QP
Horizontal	900.1471	13.59	27.01	40.60	46.00	-5.40	QP

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

3.2.8 TEST RESULTS (ABOVE 1000 MHZ)

EUT :	ScreenBeam Mini2 Wireless Display Receiver	Model Name :	SBWD60A
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 5V From adapter AC120V/60Hz
Test Mode :	TX (2.4G)		

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel (2412 MHz)-Above 1G							
Vertical	4824.000	49.59	10.44	60.03	74	-13.97	Pk
Vertical	4824.000	37.87	10.44	48.31	54	-5.69	Av
Vertical	7236.000	38.15	12.39	50.54	74	-23.46	Pk
Horizontal	4824.000	48.43	10.44	58.87	74	-15.13	Pk
Horizontal	4824.000	34.67	10.44	45.11	54	-8.89	Av
Horizontal	7236.000	37.84	12.39	50.23	74	-23.77	Pk
Mid Channel (2437 MHz)-Above 1G							
Vertical	4874.000	48.73	10.40	59.13	74	-14.87	Pk
Vertical	4874.000	35.69	10.40	46.09	54	-7.91	Av
Vertical	7311.000	38.13	12.75	50.88	74	-23.12	Pk
Horizontal	4874.000	47.24	10.40	57.64	74	-16.36	Pk
Horizontal	4874.000	34.19	10.40	44.59	54	-9.41	Av
Horizontal	7311.000	36.13	12.75	48.88	74	-25.12	Pk
High Channel (2462 MHz)- Above 1G							
Vertical	4924.000	46.54	10.39	56.93	74	-17.07	Pk
Vertical	4924.000	37.18	10.39	47.57	54	-6.43	Av
Vertical	7386.000	35.37	12.68	48.05	74	-25.95	Pk
Horizontal	4924.000	46.13	10.39	56.52	74	-17.48	Pk
Horizontal	4924.000	35.03	10.39	45.42	54	-8.58	Av
Horizontal	7386.000	33.15	12.68	45.83	74	-28.17	Pk

Note: "802.11b" mode is the worst mode. When PK value is lower than the Average value limit, average didn't record.



EUT :	ScreenBeam Mini2 Wireless Display Receiver	Model Name :	SBWD60A
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 5V From adapter AC120V/60Hz
Test Mode :	TX (5.0G)		

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel (5745 MHz)-Above 1G							
Vertical	11490.000	38.22	14.21	52.43	74	-21.57	Pk
Vertical	17235.000	31.34	16.09	47.43	74	-26.57	Pk
Horizontal	11490.000	35.45	14.21	49.66	74	-24.34	Pk
Horizontal	17235.000	32.45	16.09	48.54	74	-25.46	Pk
middle Channel (5785 MHz)-Above 1G							
Vertical	11570.000	37.75	14.51	52.26	74	-21.74	Pk
Vertical	17355.000	35.24	16.15	51.39	74	-22.61	Pk
Horizontal	11570.000	34.43	14.51	48.94	74	-25.06	Pk
Horizontal	17355.000	33.13	16.15	49.28	74	-24.72	Pk
High Channel (5825 MHz)-Above 1G							
Vertical	11590.000	34.23	14.55	48.78	74	-25.22	Pk
Vertical	17385.000	32.08	16.18	48.26	74	-25.74	Pk
Horizontal	11590.000	34.52	14.55	49.07	74	-24.93	Pk
Horizontal	17385.000	33.66	16.18	49.84	74	-24.16	Pk



Note: "802.11a(5G)" mode is the worst mode. When PK value is lower than the Average value limit, average didn't record.

Conducted Spurious Emissions at Antenna Port:



802.11b Low Channel

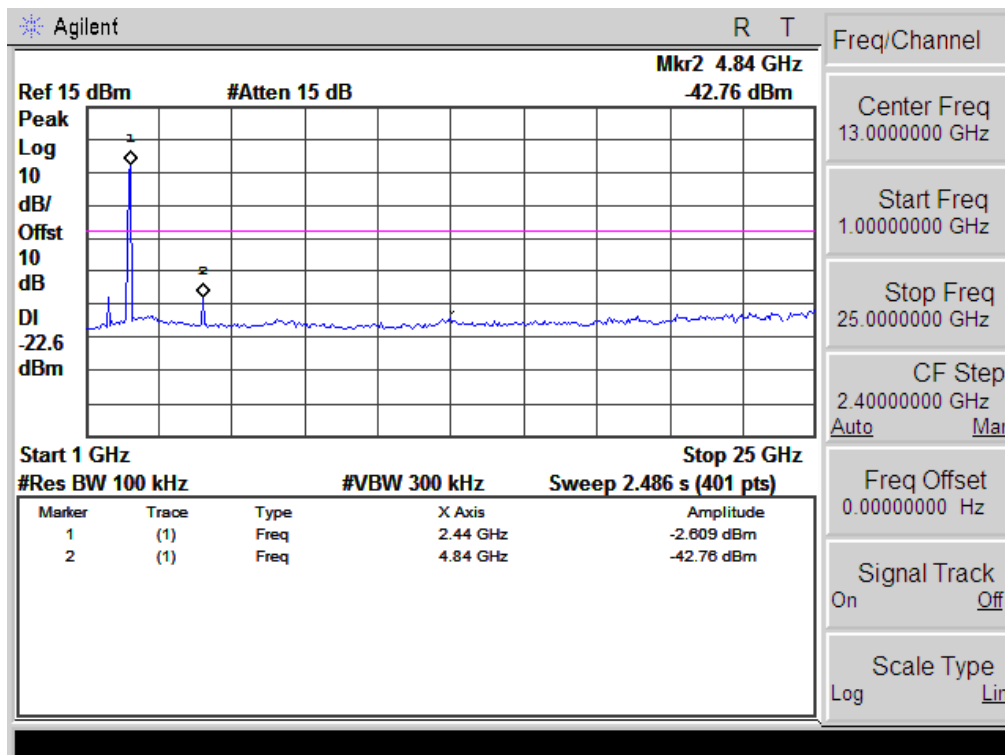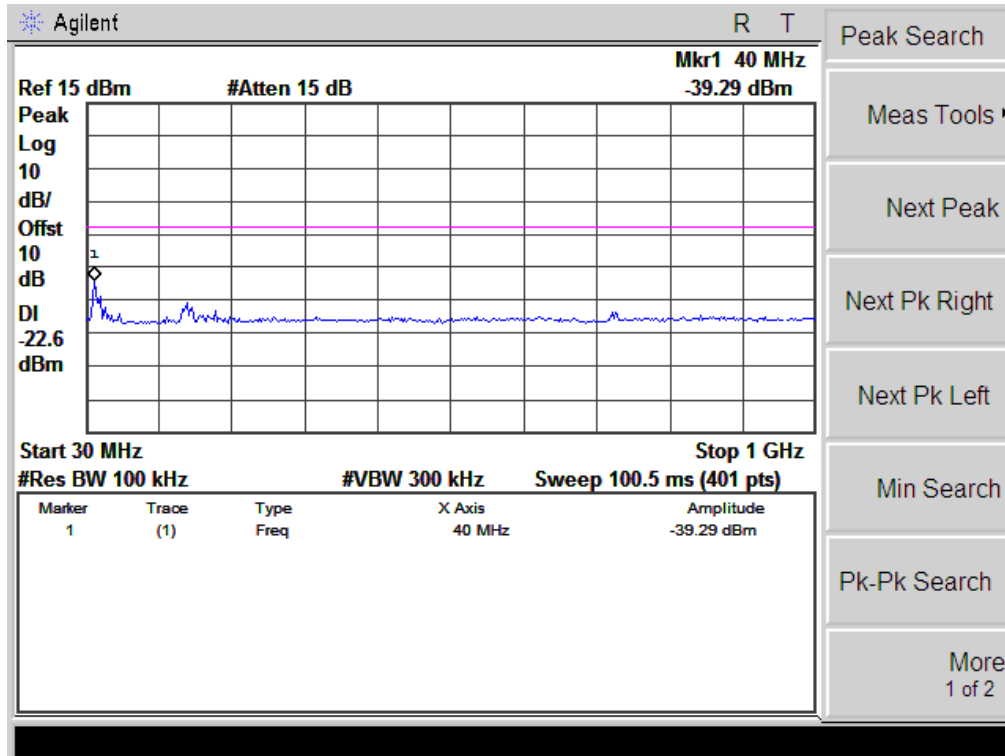



802.11b Middle Channel

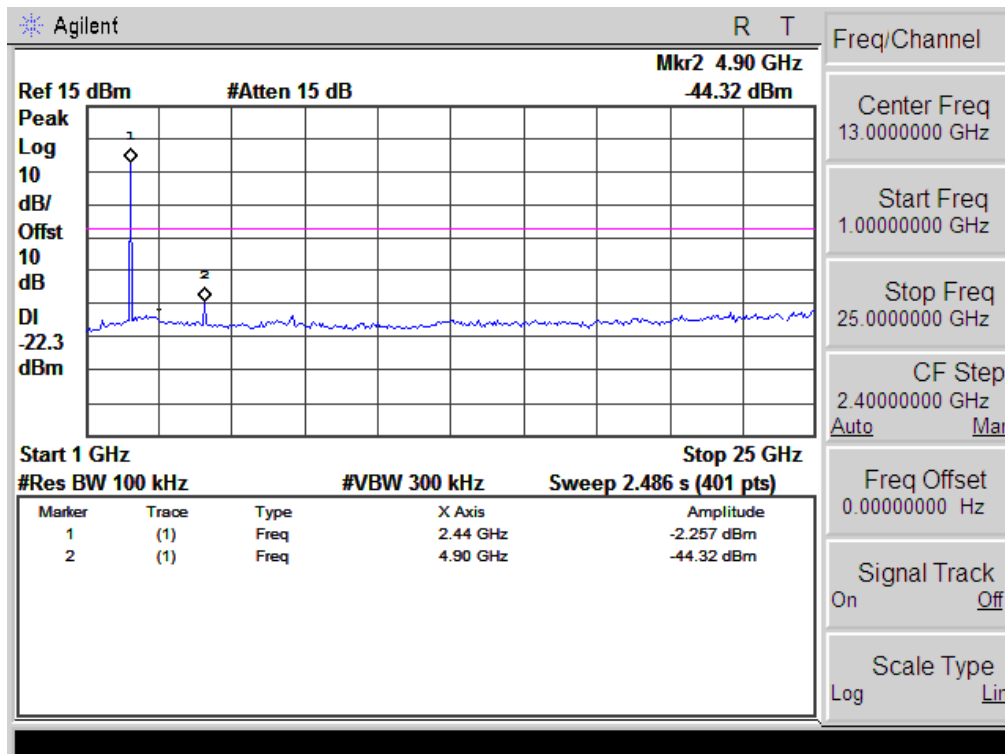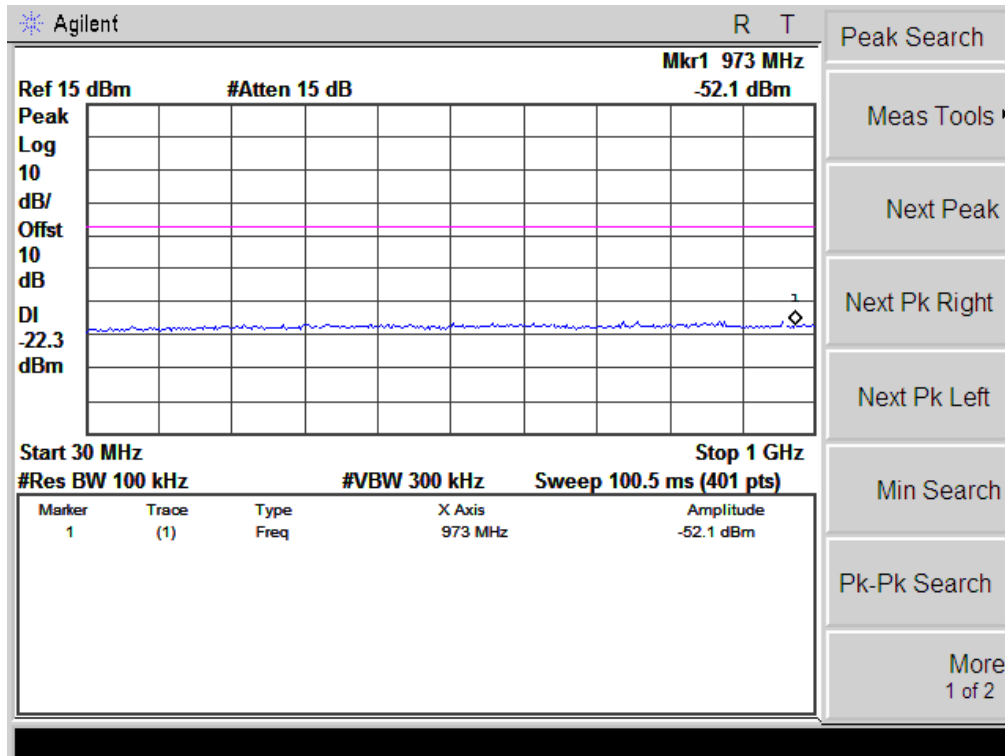



802.11b High Channel

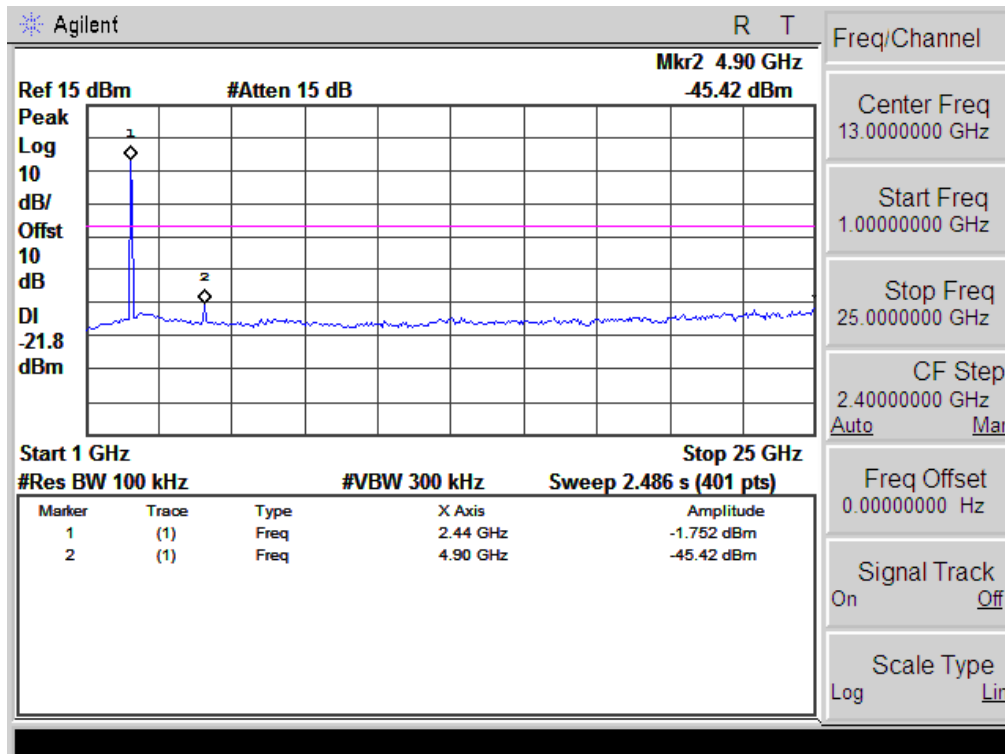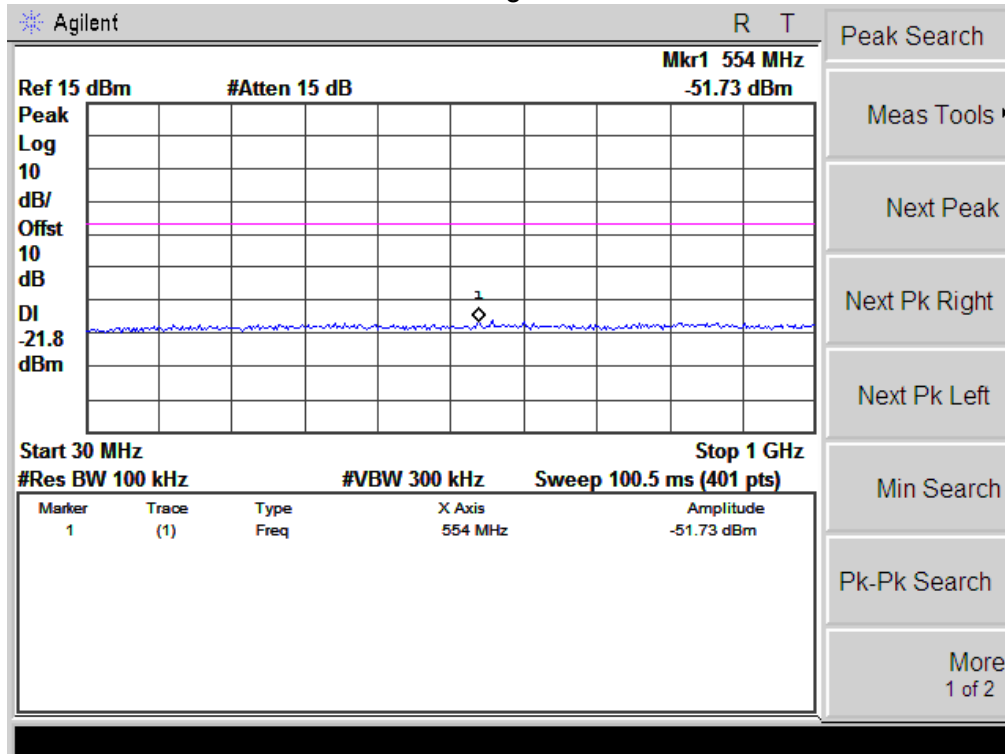



802.11g Low Channel

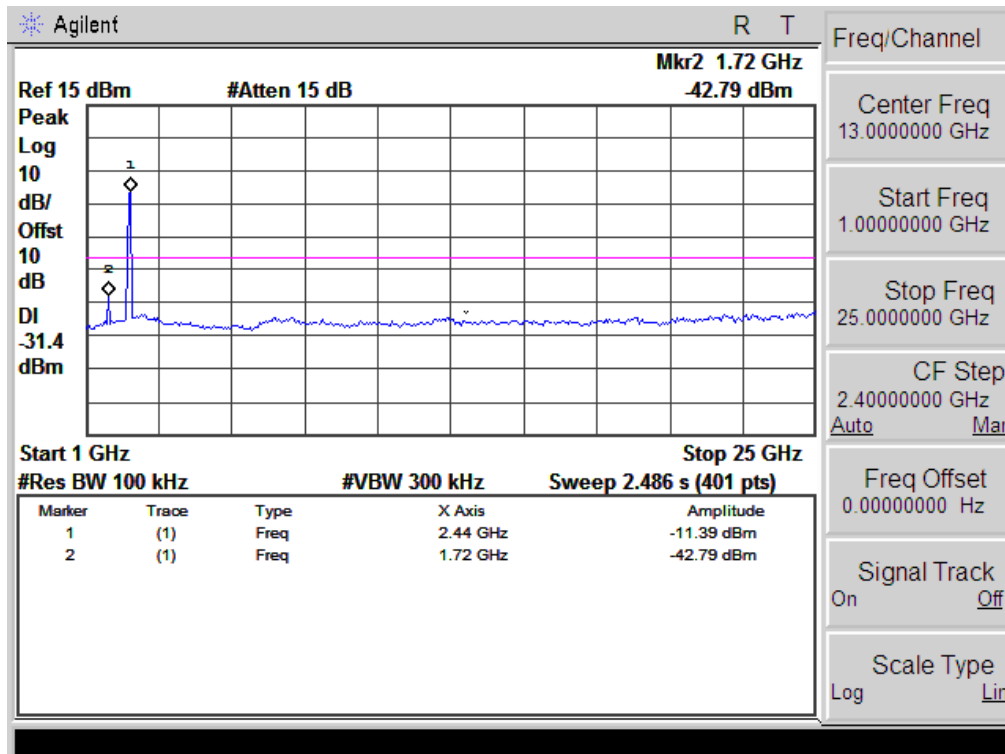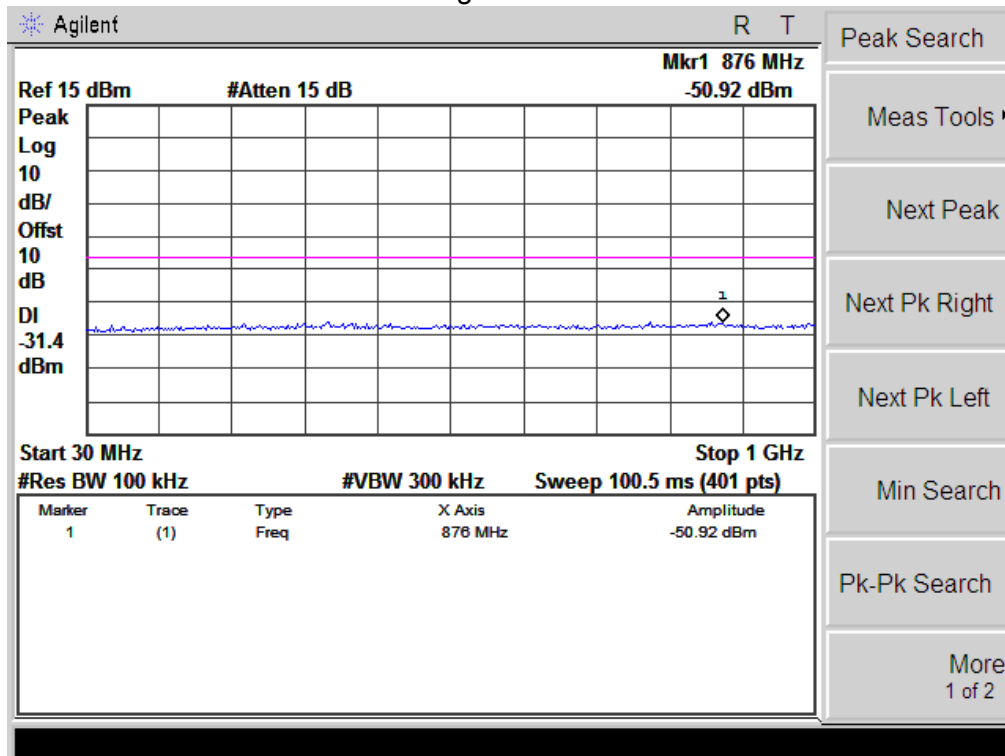



802.11g Middle Channel

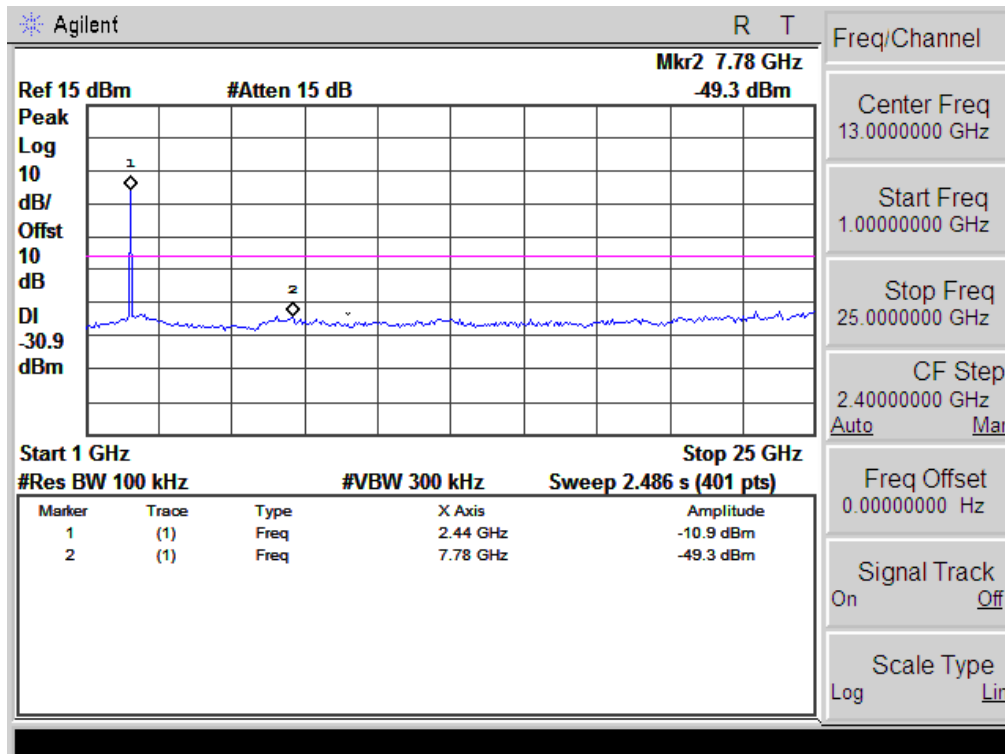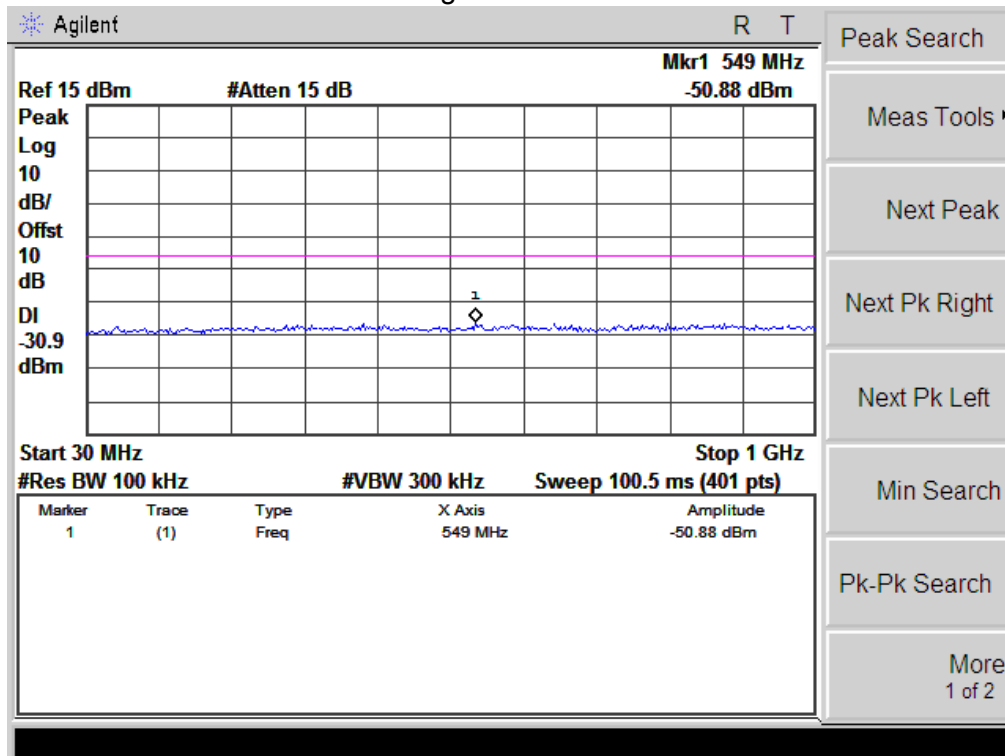



802.11g High Channel

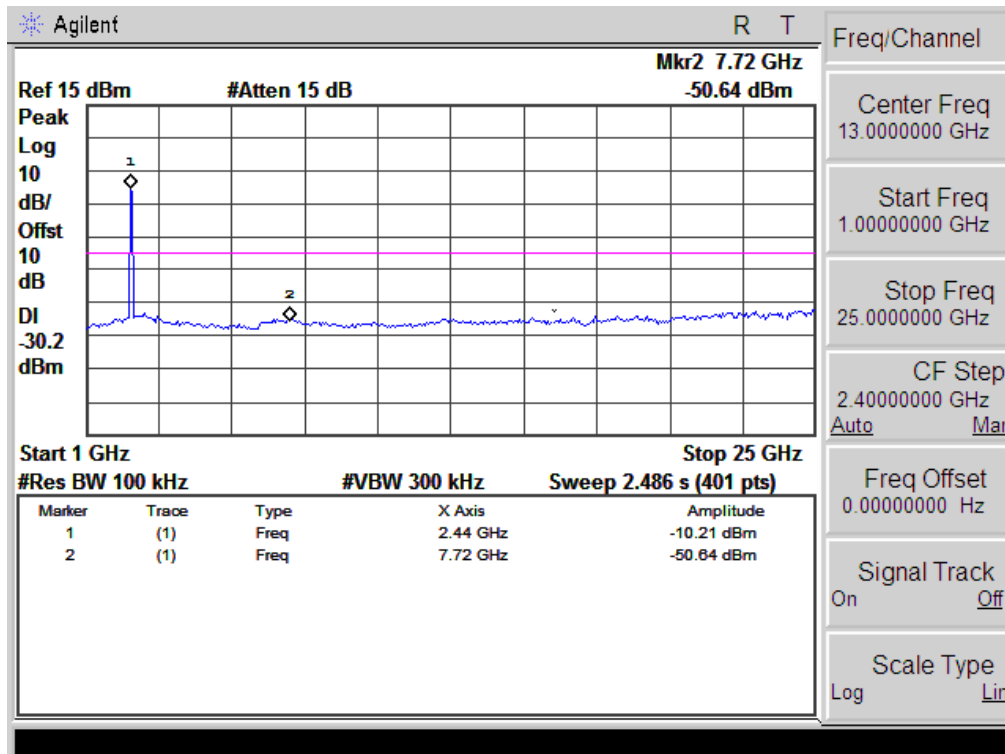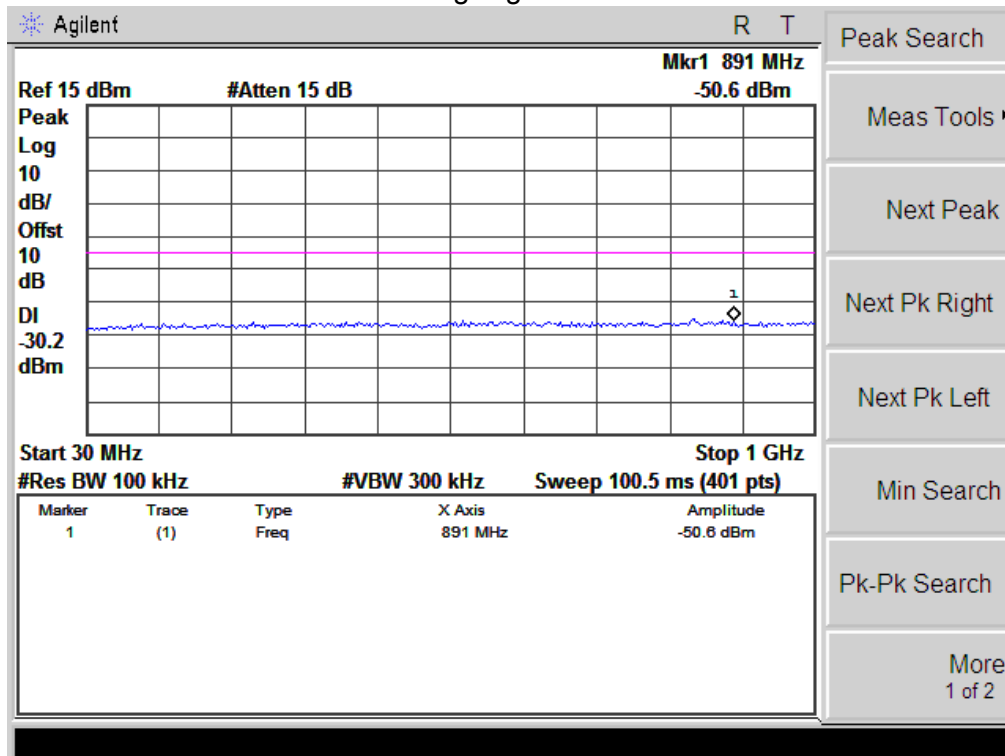



802.11n-HT20 Low Channel

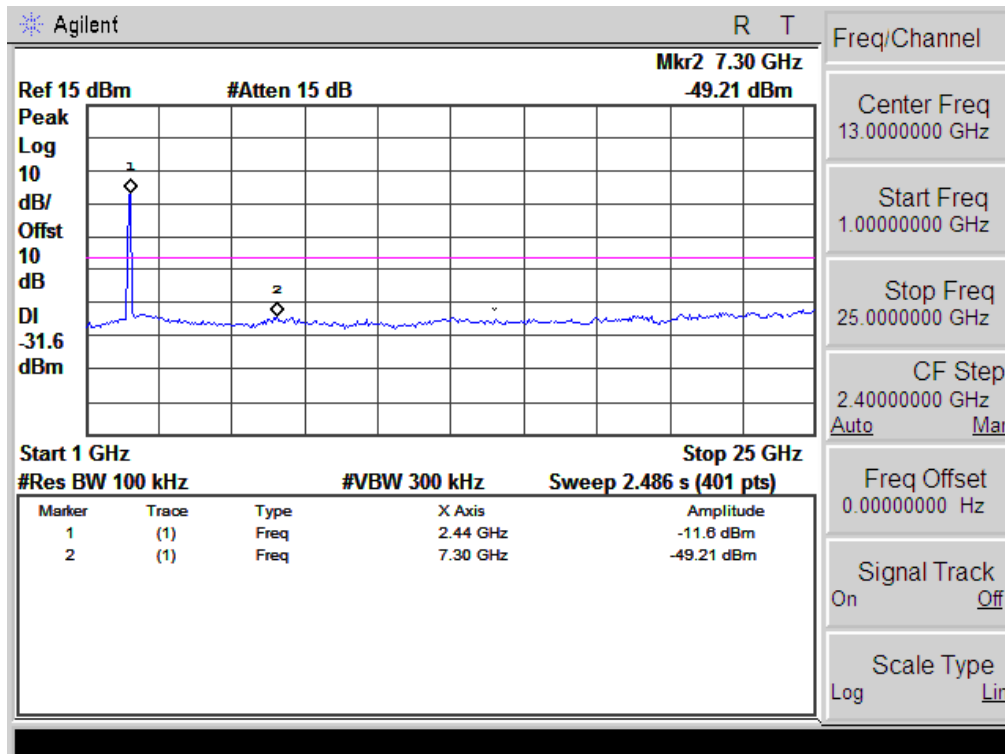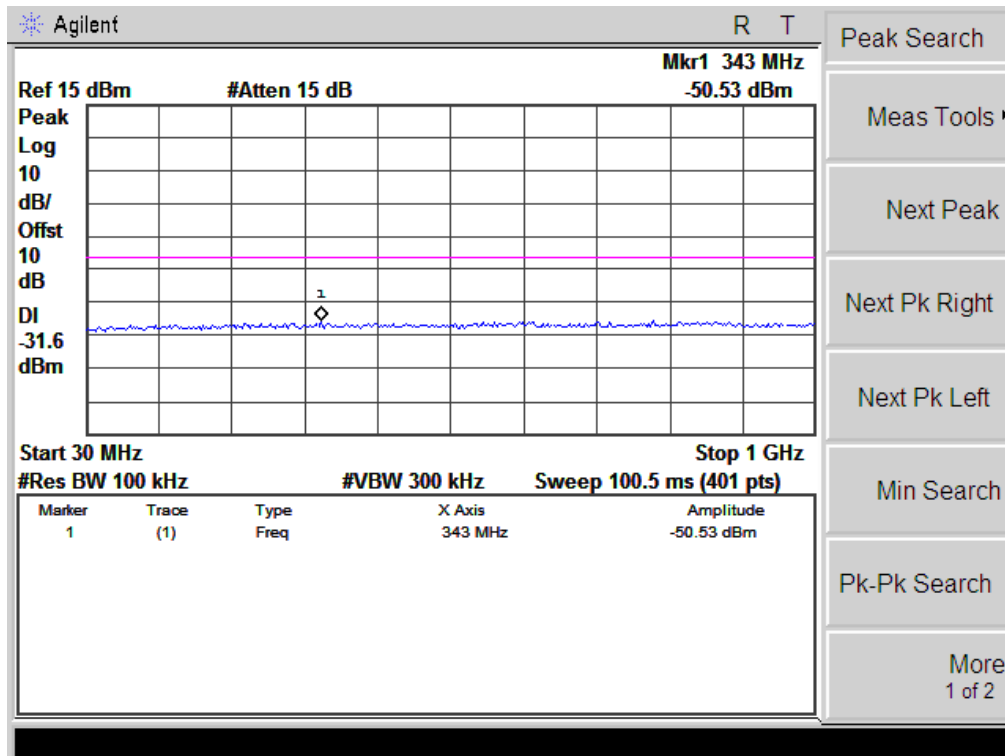



802.11n-HT20 Middle Channel

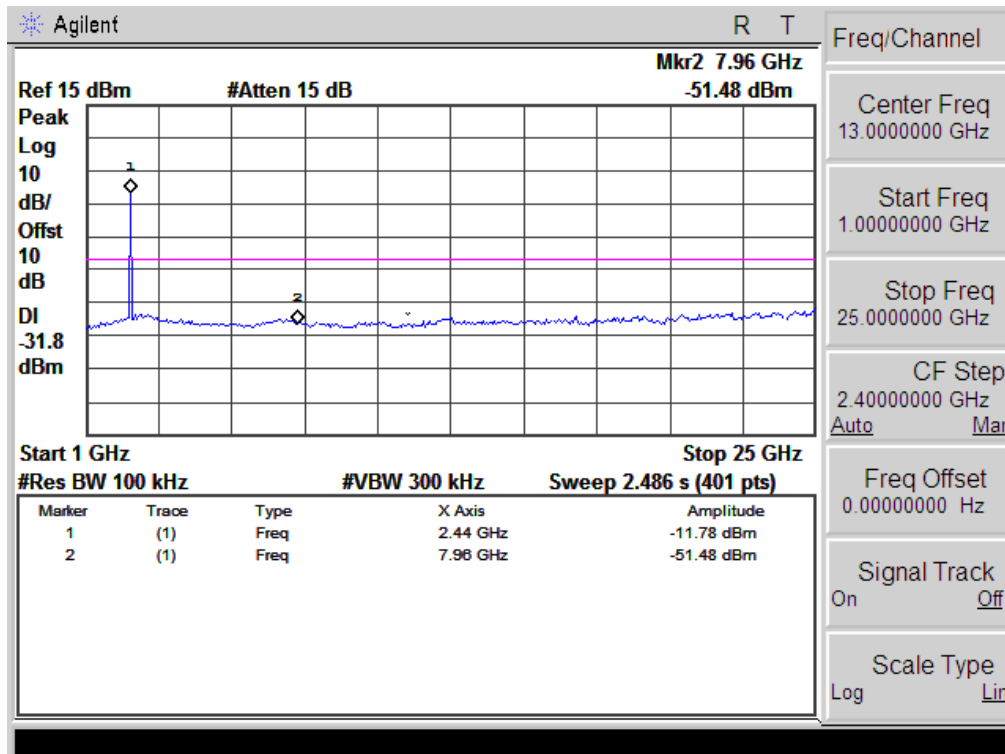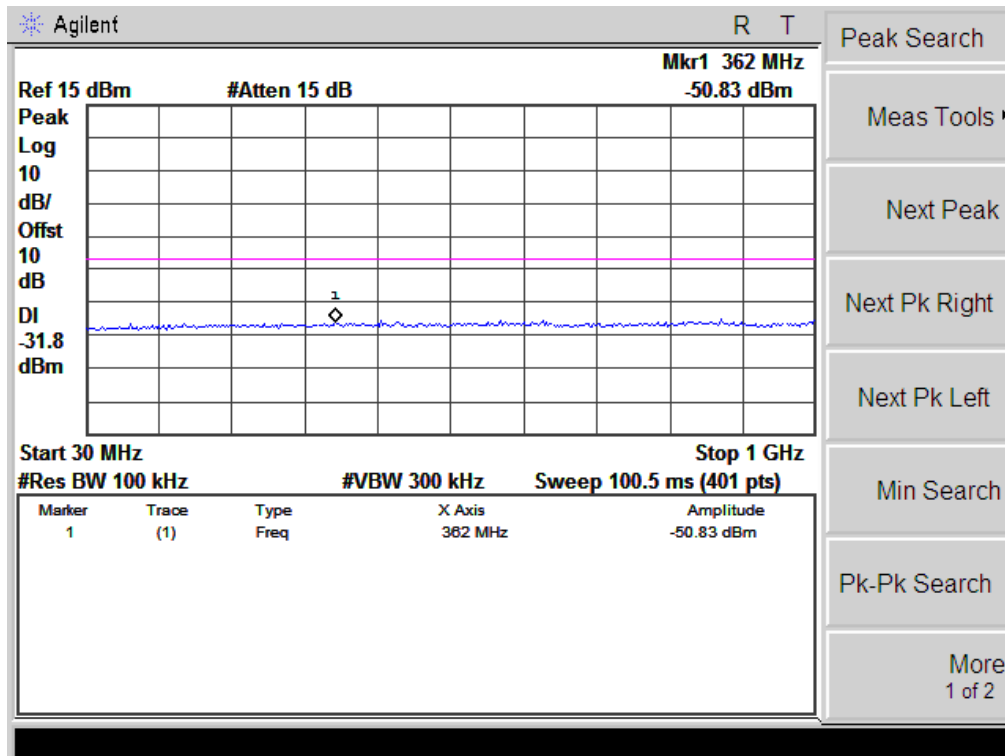



802.11n-HT20 High Channel

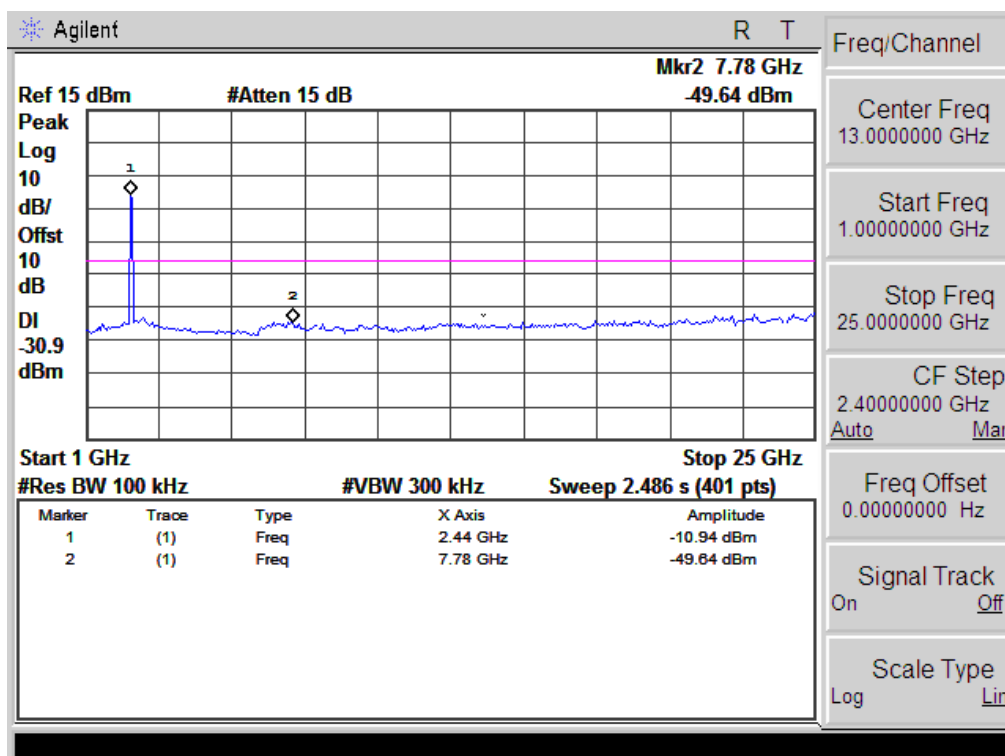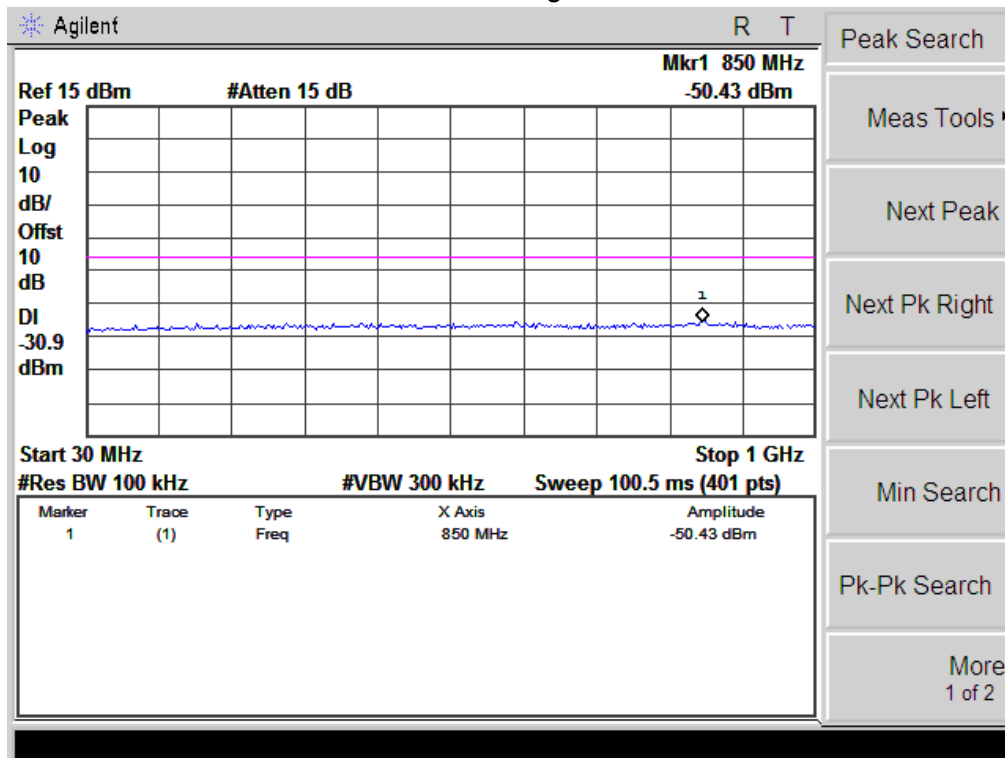



802.11n-HT40 Low Channel

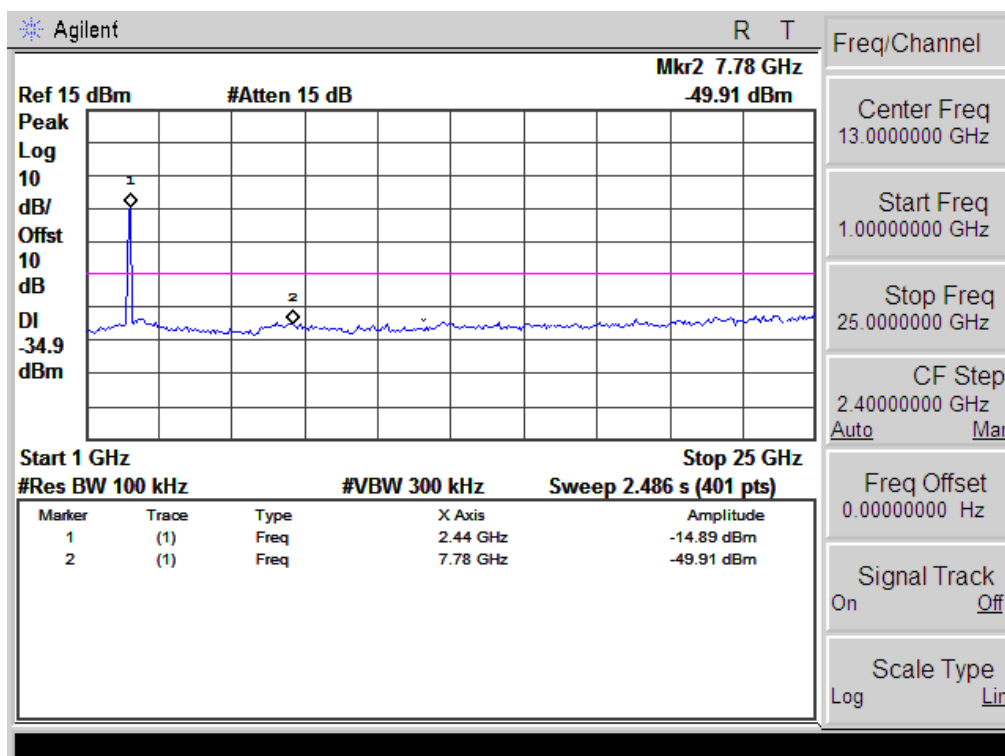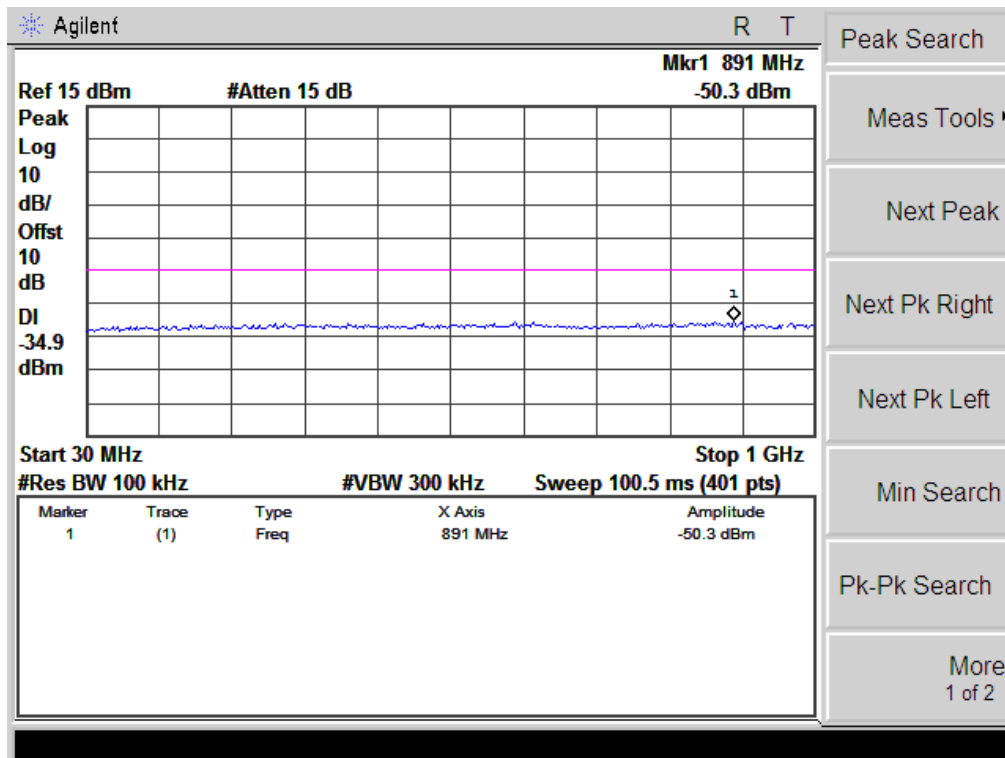

802.11n-HT40 Middle Channel

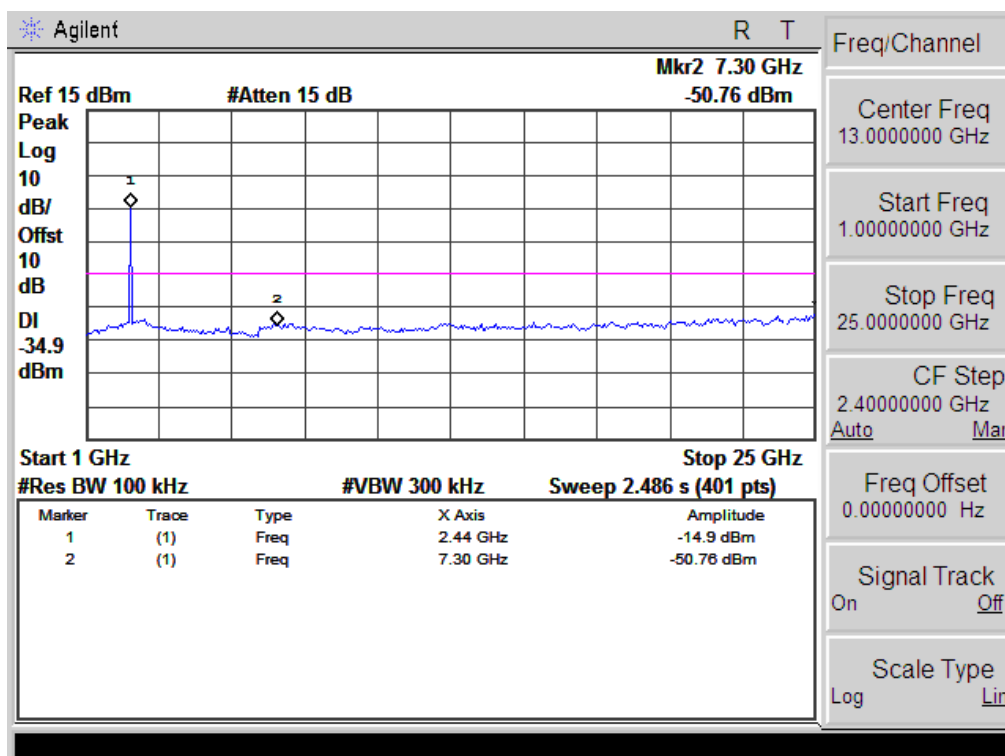
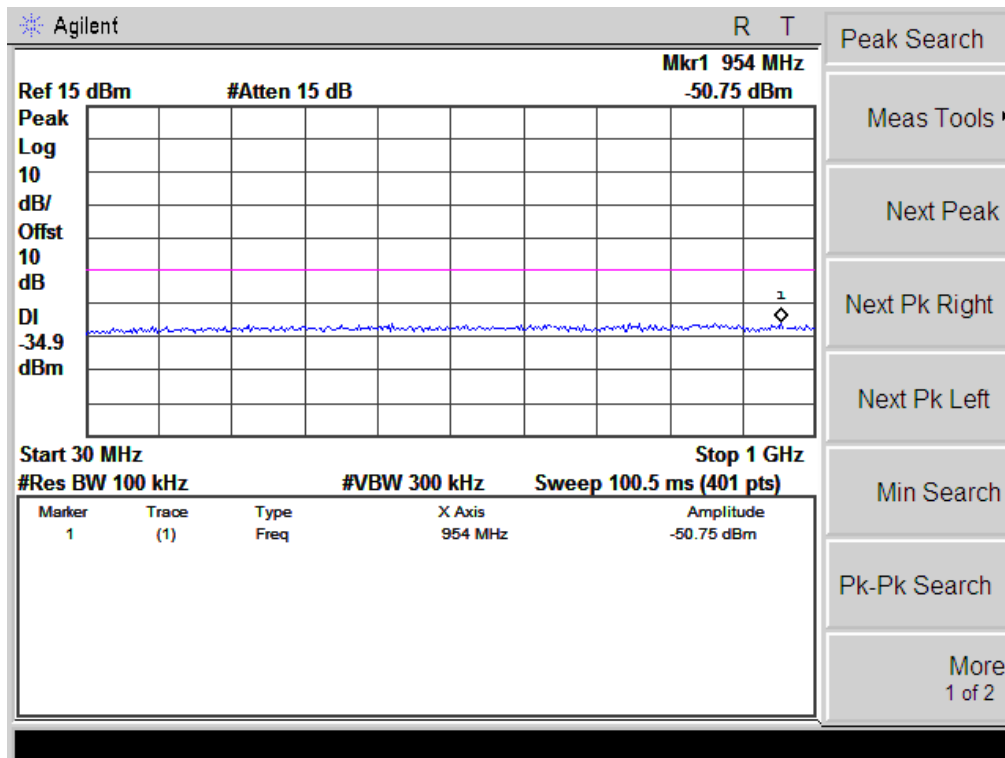


802.11n-HT40 High Channel

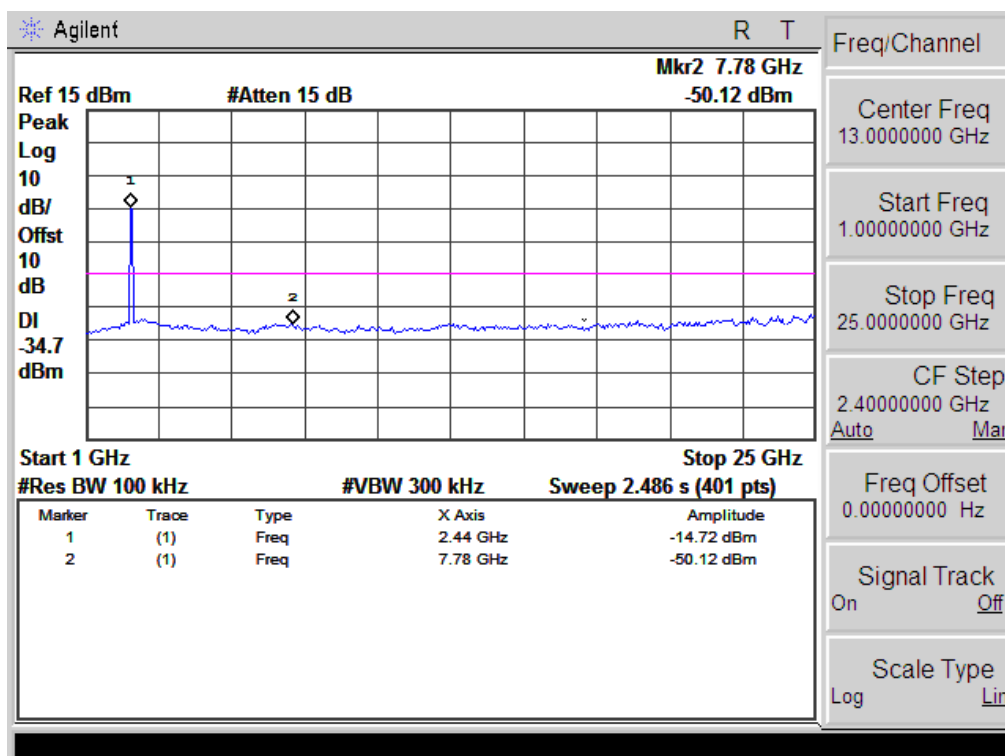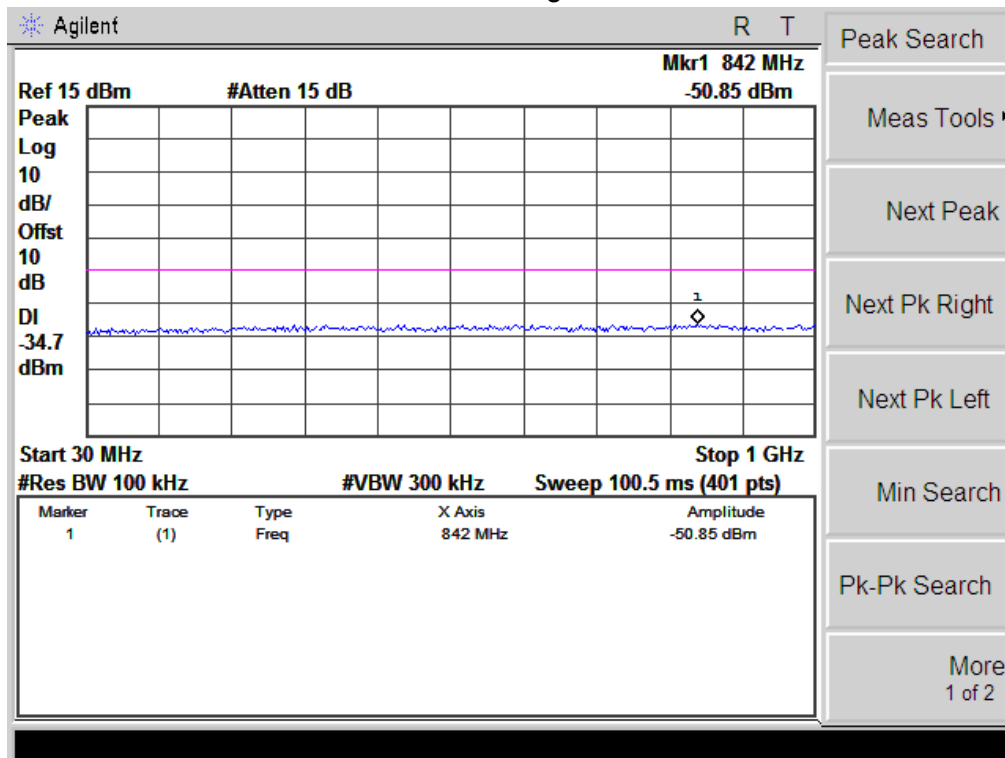



5GHz:

802.11a Low Channel

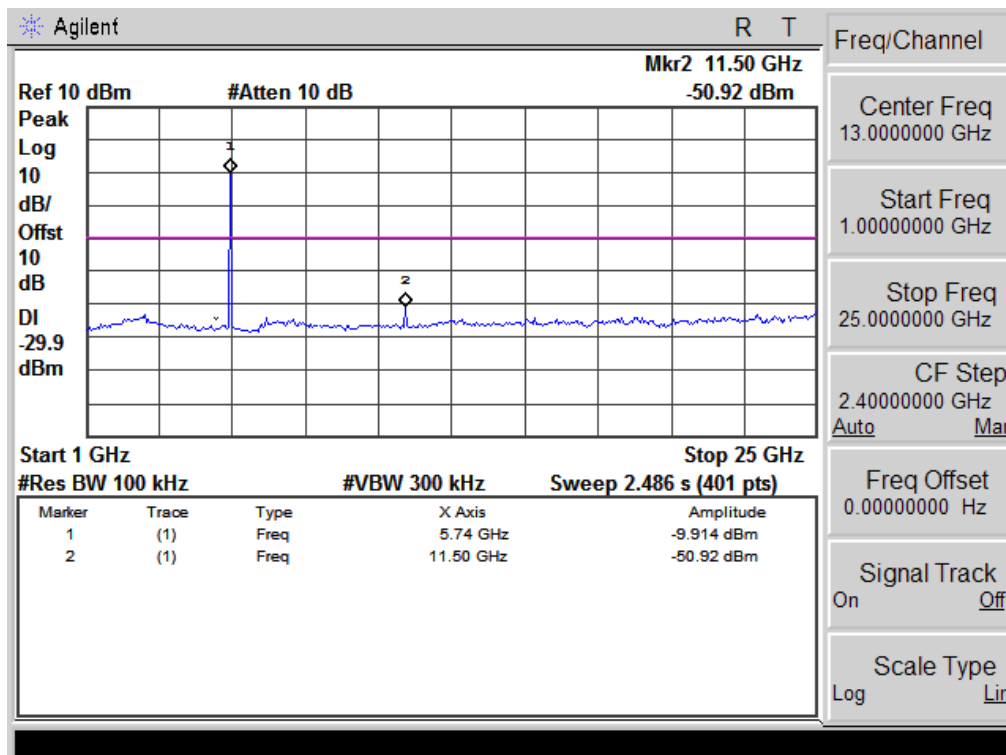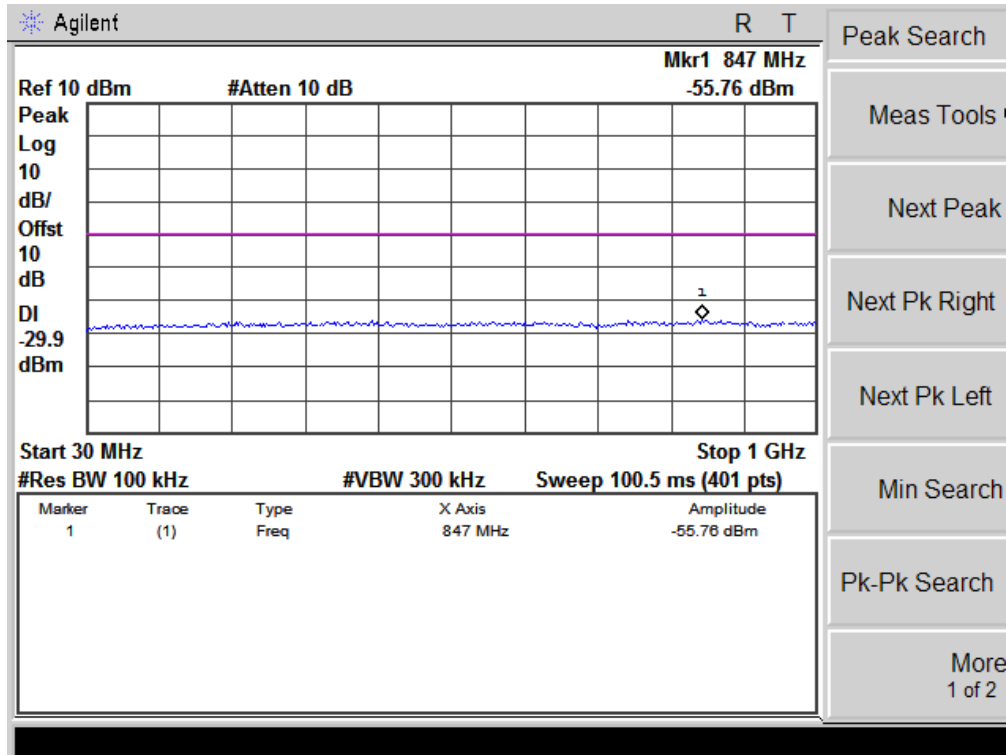



Note: No emission detected above 25GHz

802.11a Middle Channel

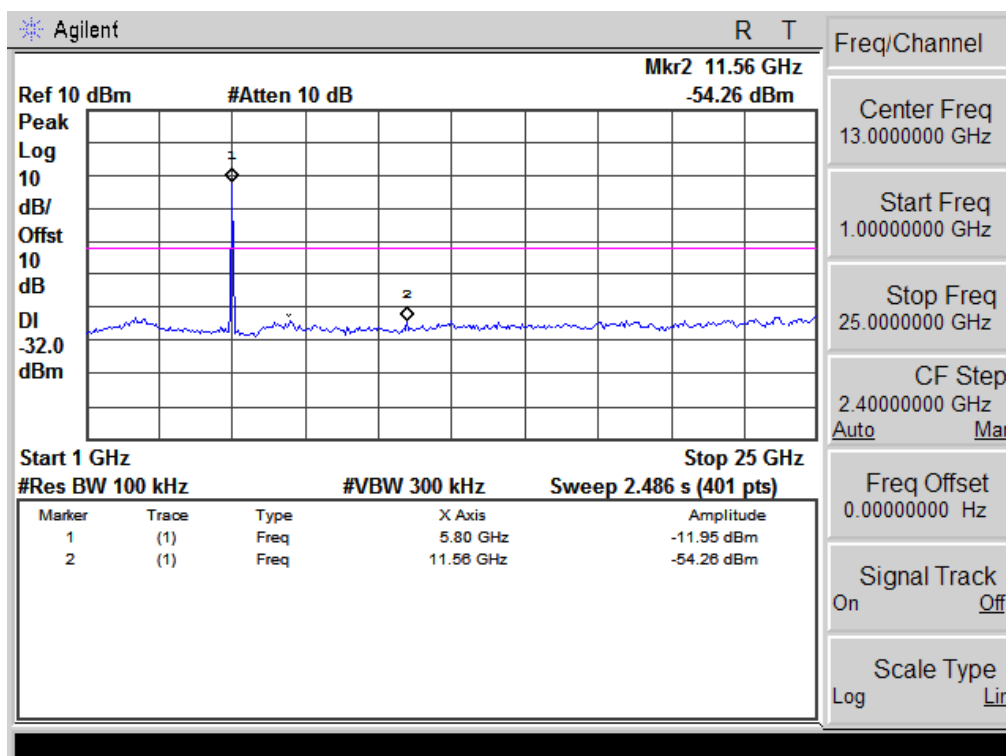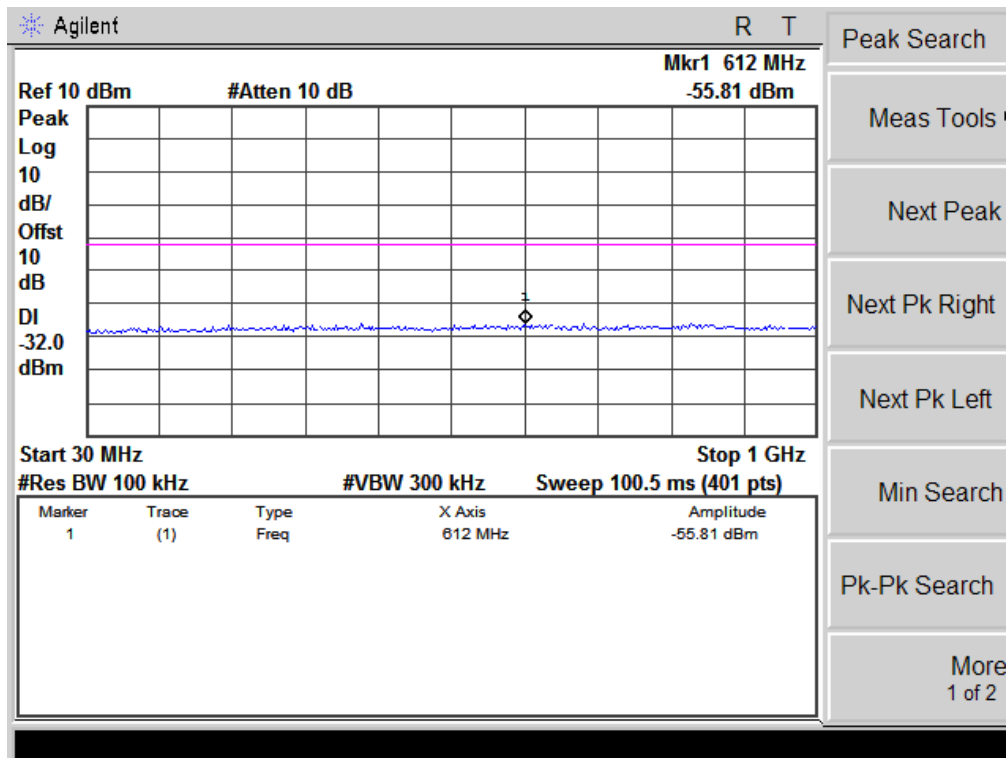



Note: No emission detected above 25GHz

802.11a High Channel

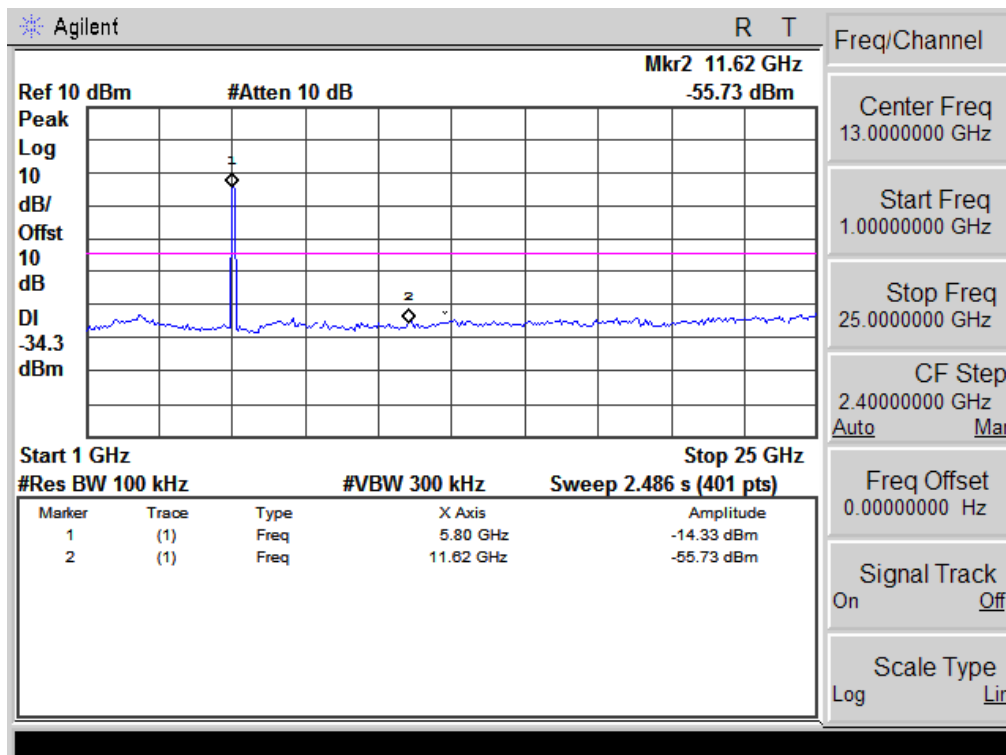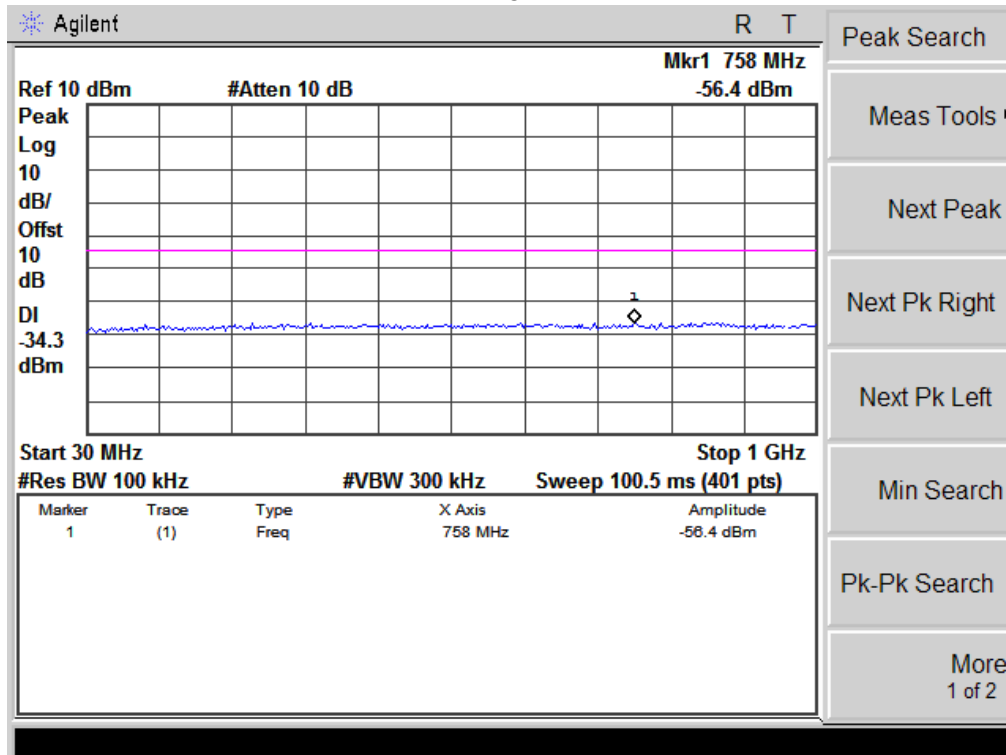



Note: No emission detected above 25GHz

802.11n(20) Low Channel

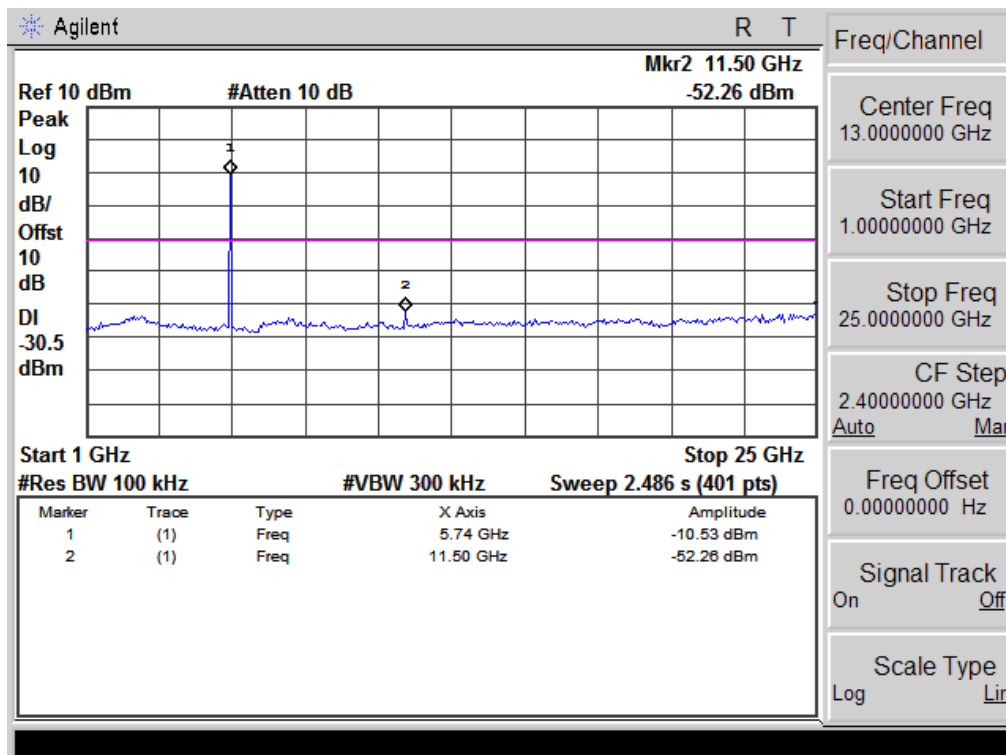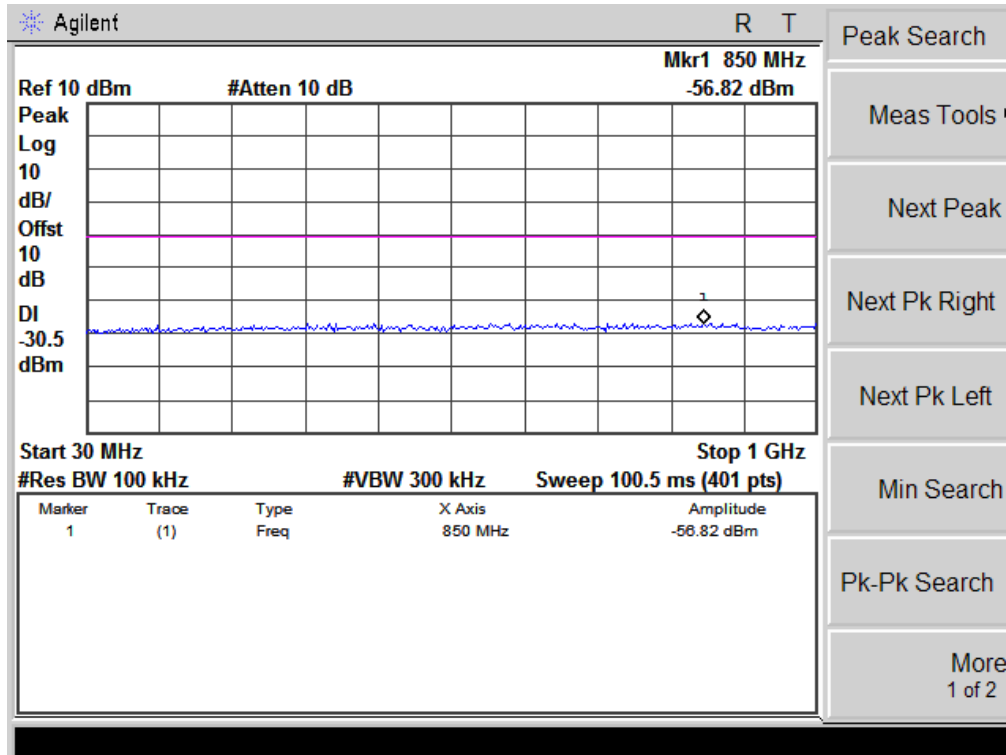



Note: No emission detected above 25GHz

802.11n(20) Middle Channel

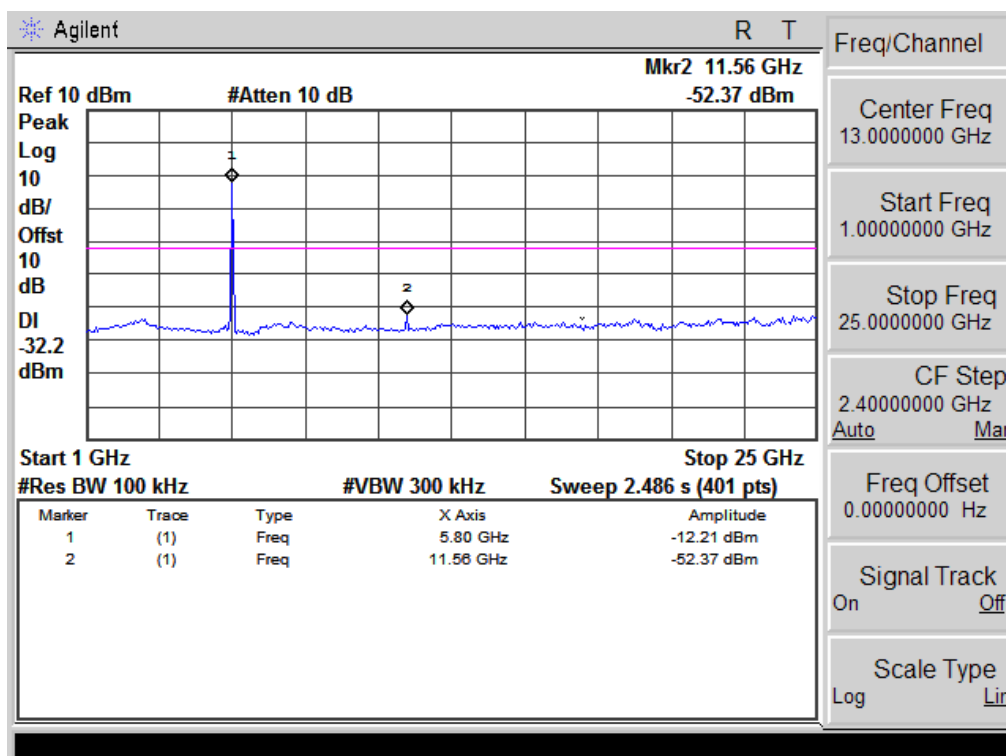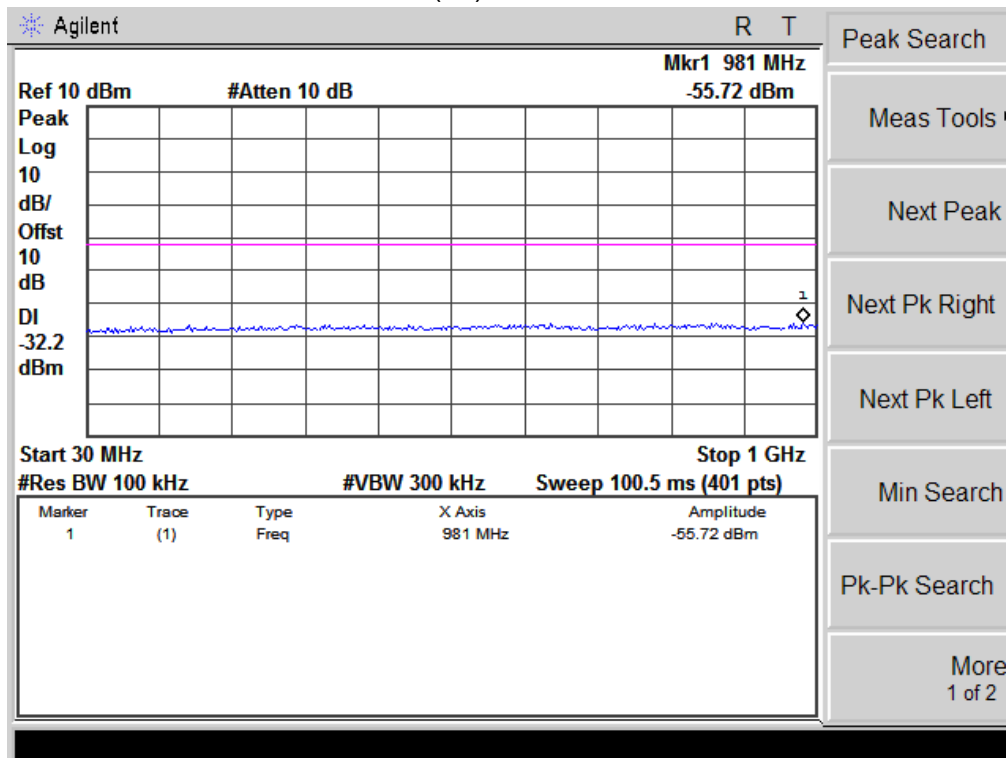



Note: No emission detected above 25GHz

802.11n(20) High Channel

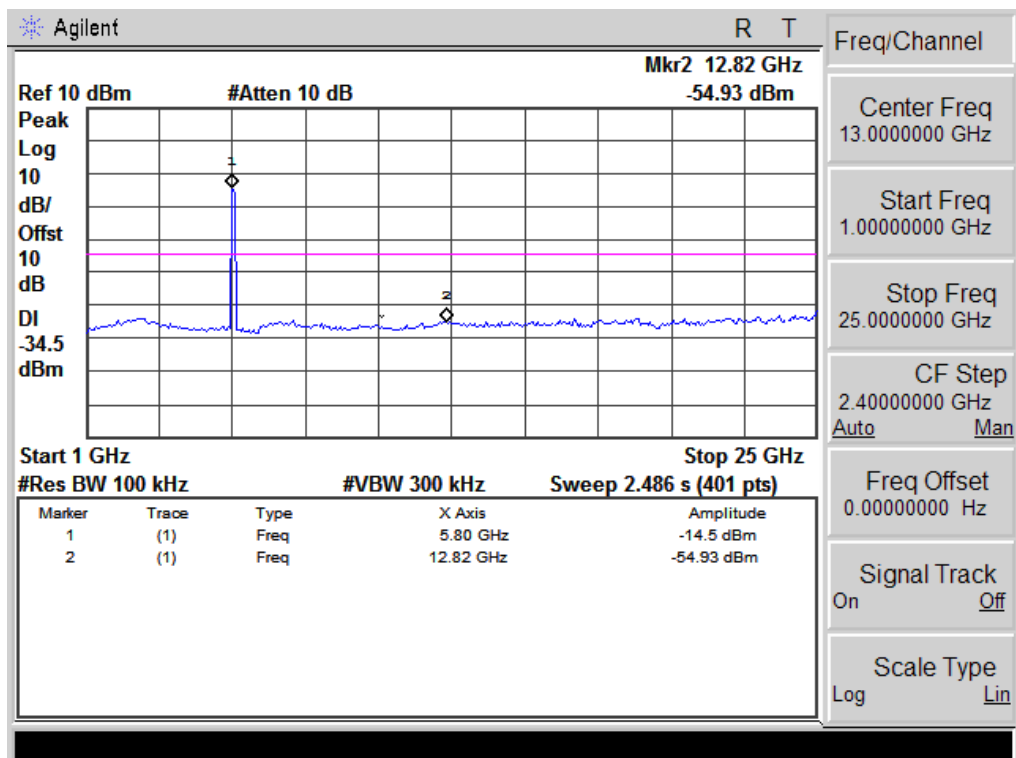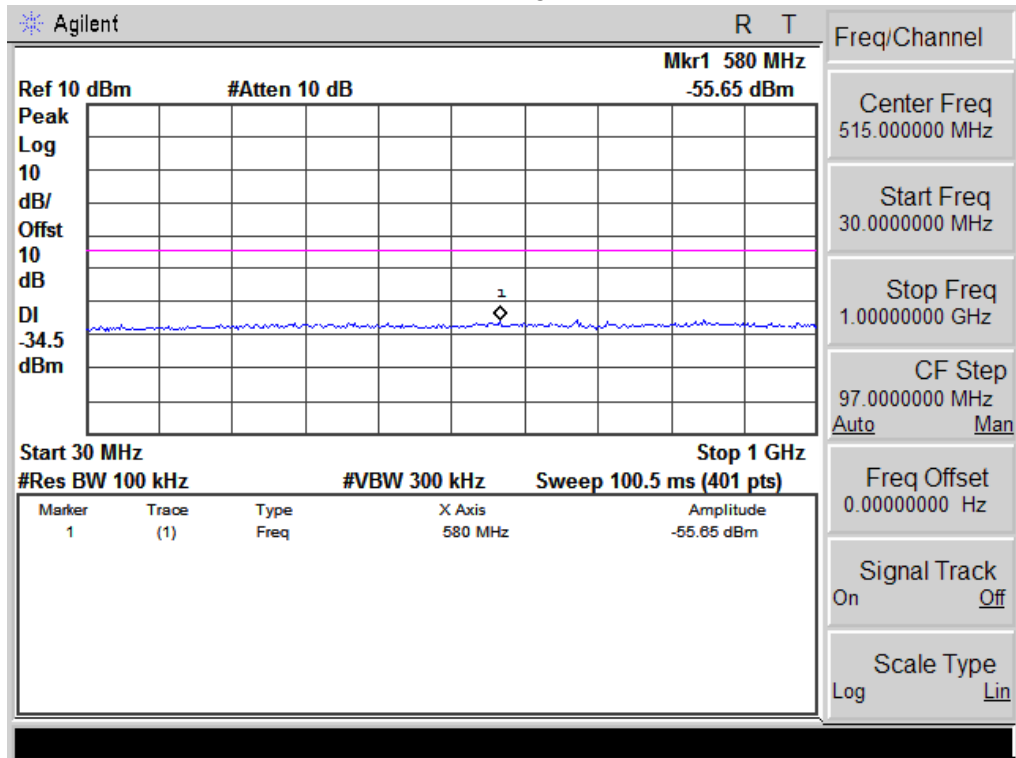



Note: No emission detected above 25GHz

802.11n 40 Low Channel

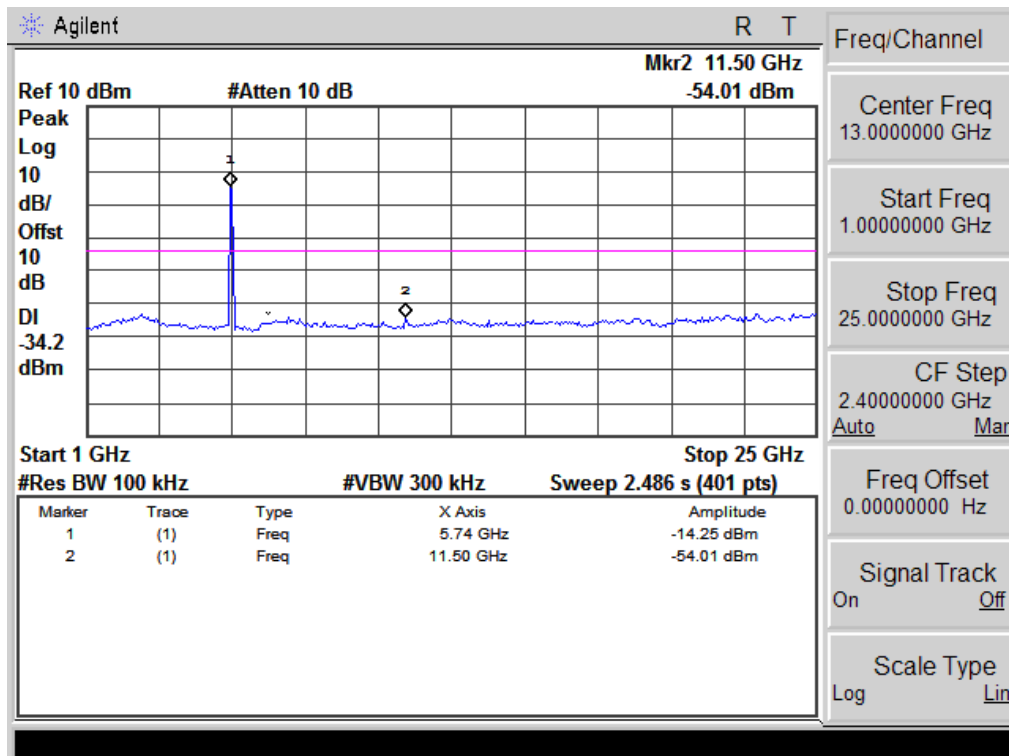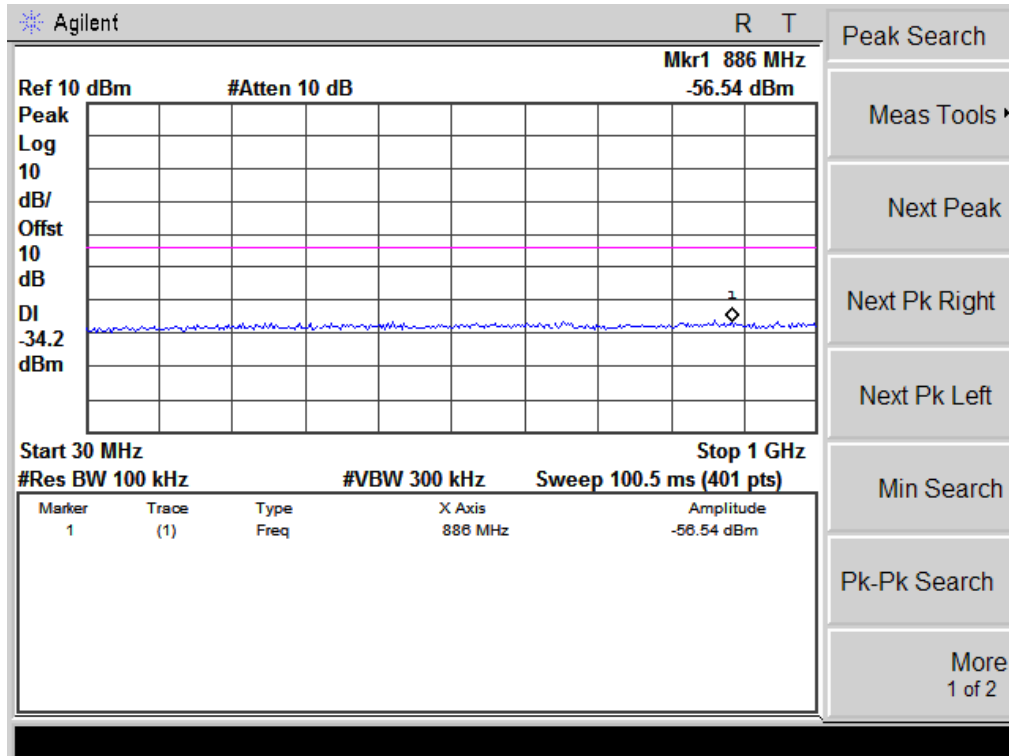

Note: No emission detected above 25GHz

802.11n 40 High Channel

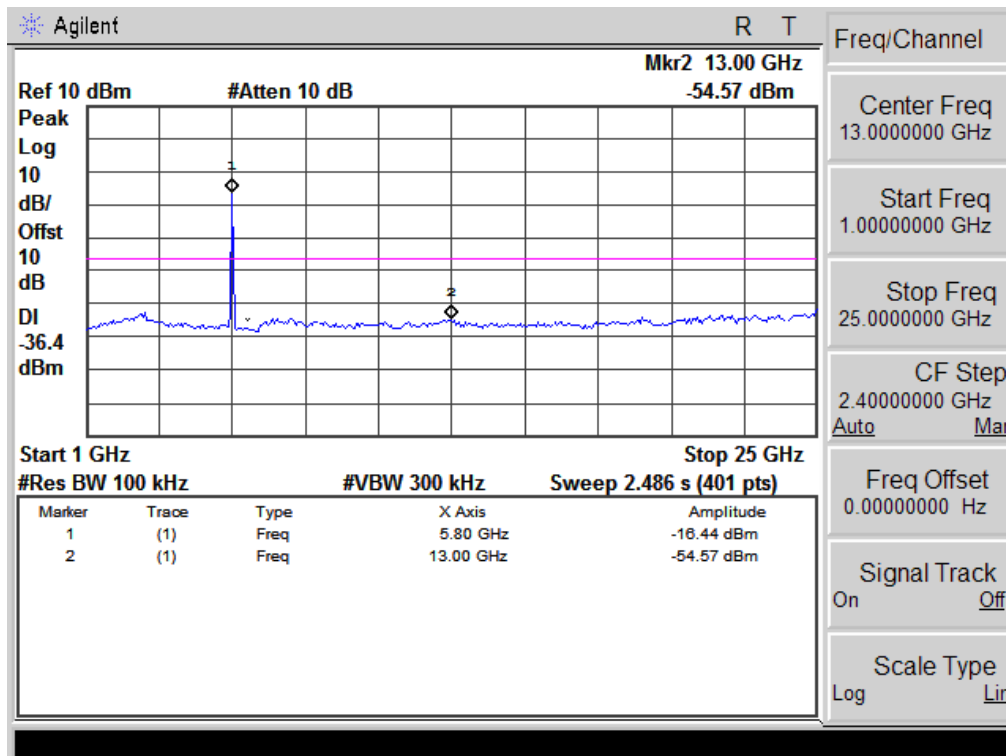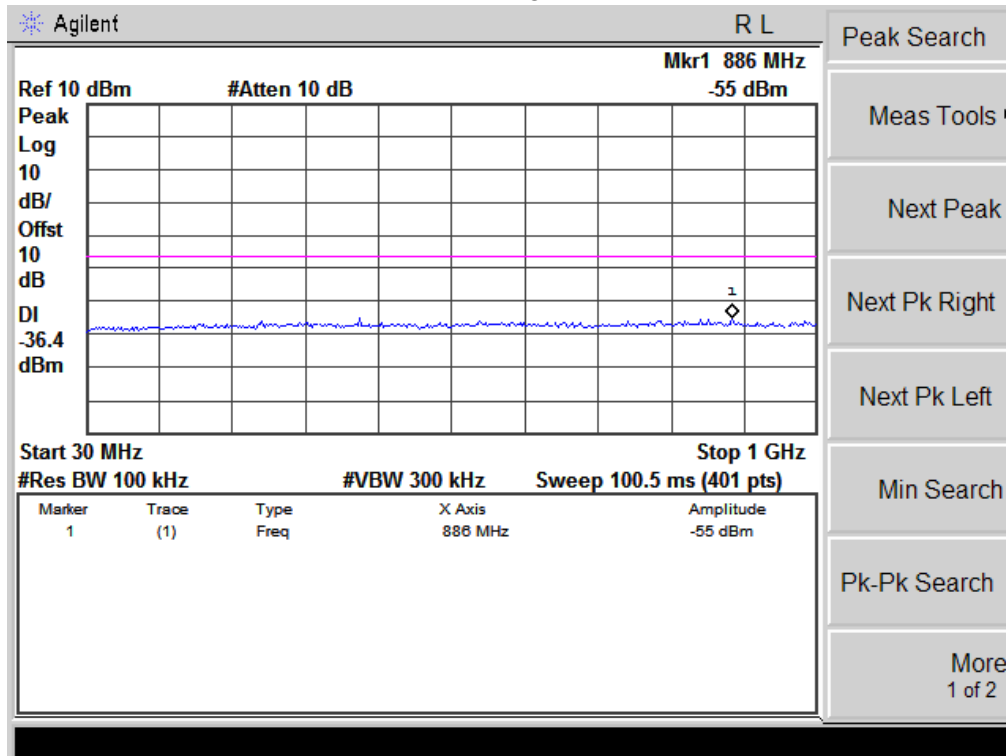

Note: No emission detected above 25GHz

4. POWER SPECTRAL DENSITY TEST

4.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247	Power Spectral Density	8 dBm (in any 3KHz)	2400-2483.5	PASS


4.1.1 TEST PROCEDURE

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS channel bandwidth.
3. 3 kHz ≤Set the RBW≤100 kHz.
4. Set the VBW ≥ 3 x RBW.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

4.1.2 DEVIATION FROM STANDARD

No deviation.

4.1.3 TEST SETUP

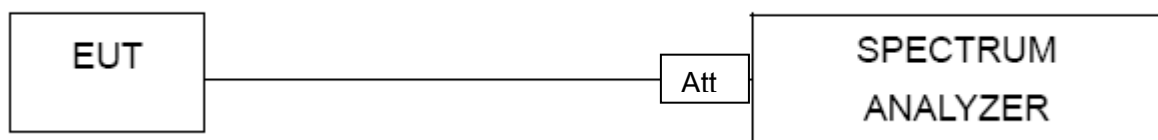

4.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.1 Unless otherwise a special operating condition is specified in the follows during the testing.


4.1.5 TEST RESULTS



EUT :	ScreenBeam Mini2 Wireless Display Receiver	Model Name :	SBWD60A
Temperature :	25 °C	Relative Humidity :	56%
Pressure :	1015 hPa	Test Voltage :	DC 5V From adapter AC120V/60Hz
Test Mode :	TX b Mode /CH01, CH06, CH11		

Frequency	Power Density A (dBm)	Power Density B (dBm)	total power density (dBm)	Limit (dBm)	Result
2412 MHz	-21.30	-22.34	-18.78	4.94	PASS
2437 MHz	-21.33	-22.31	-18.77	4.94	PASS
2462 MHz	-20.92	-21.76	-18.31	4.94	PASS

NOTE: A(B) Represent the value of antenna A and B, The worst data is A Antenna a ,only shown Antenna A Plot.

For 2.4G mode , Limit =8-9.06+6=4.94dBm for output power.

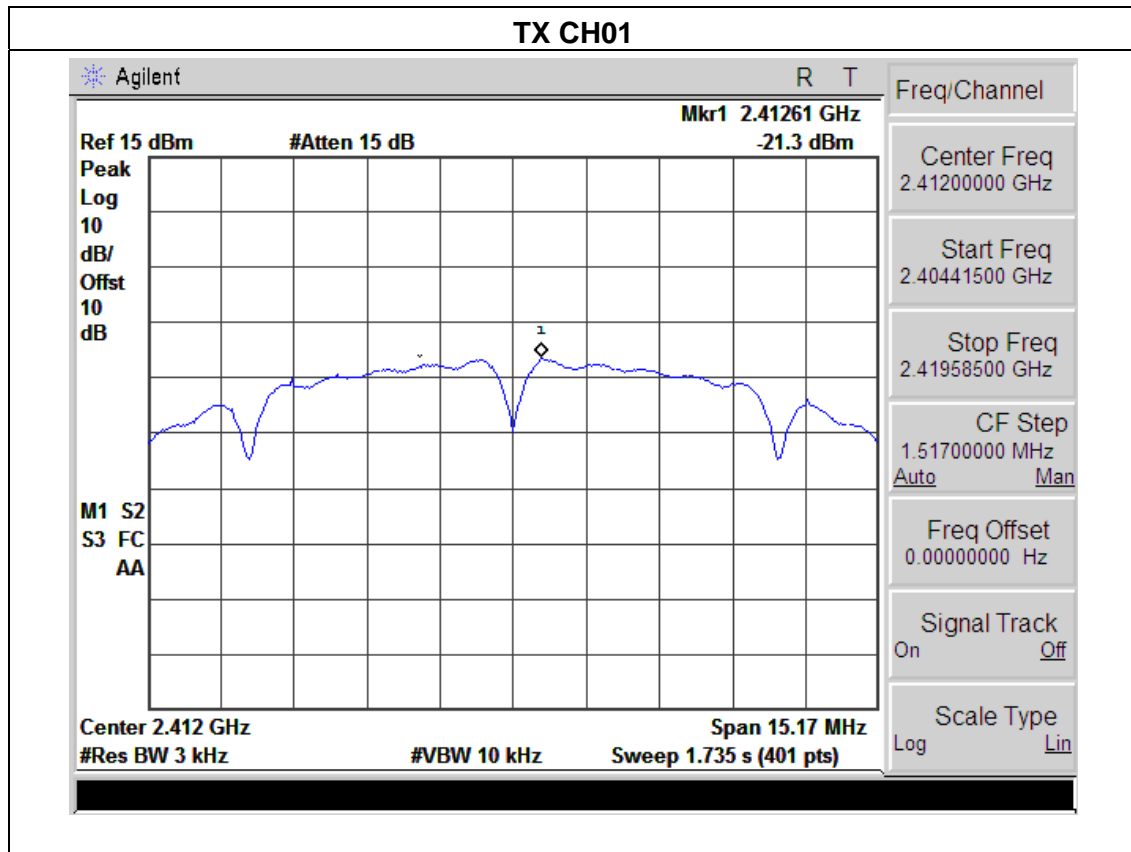

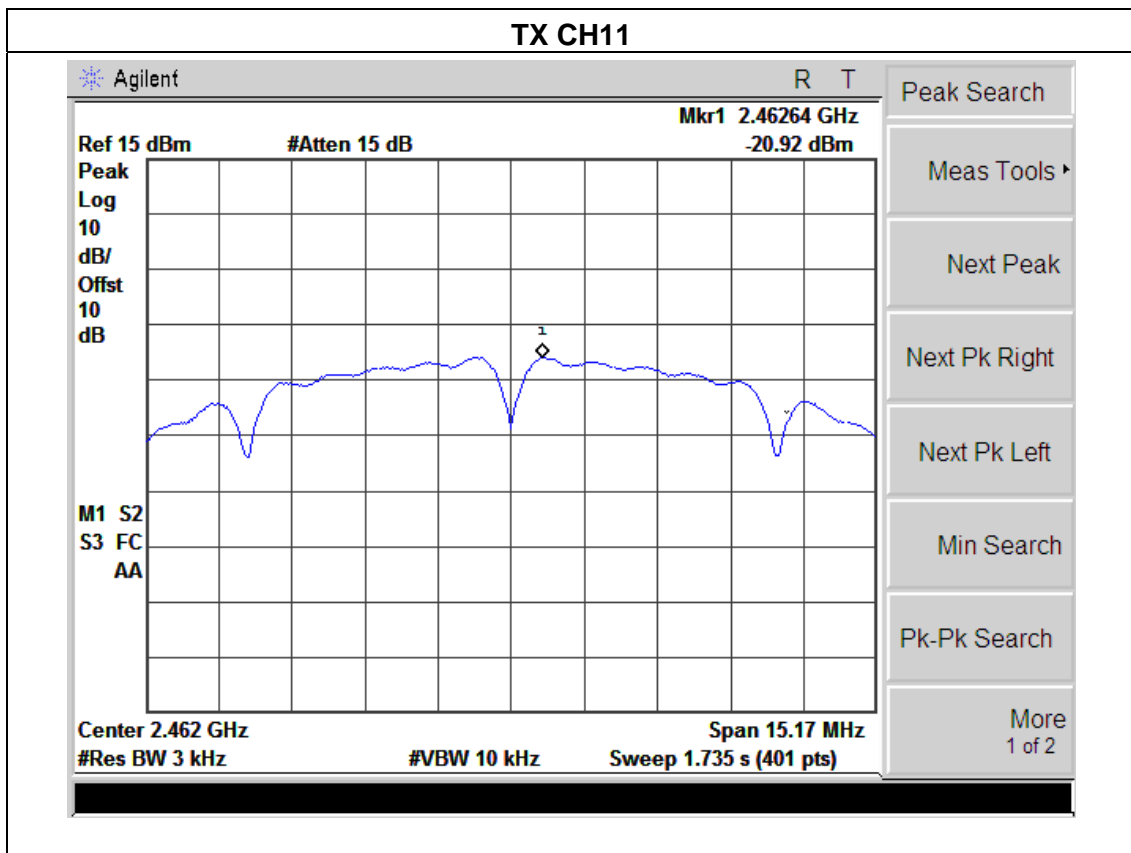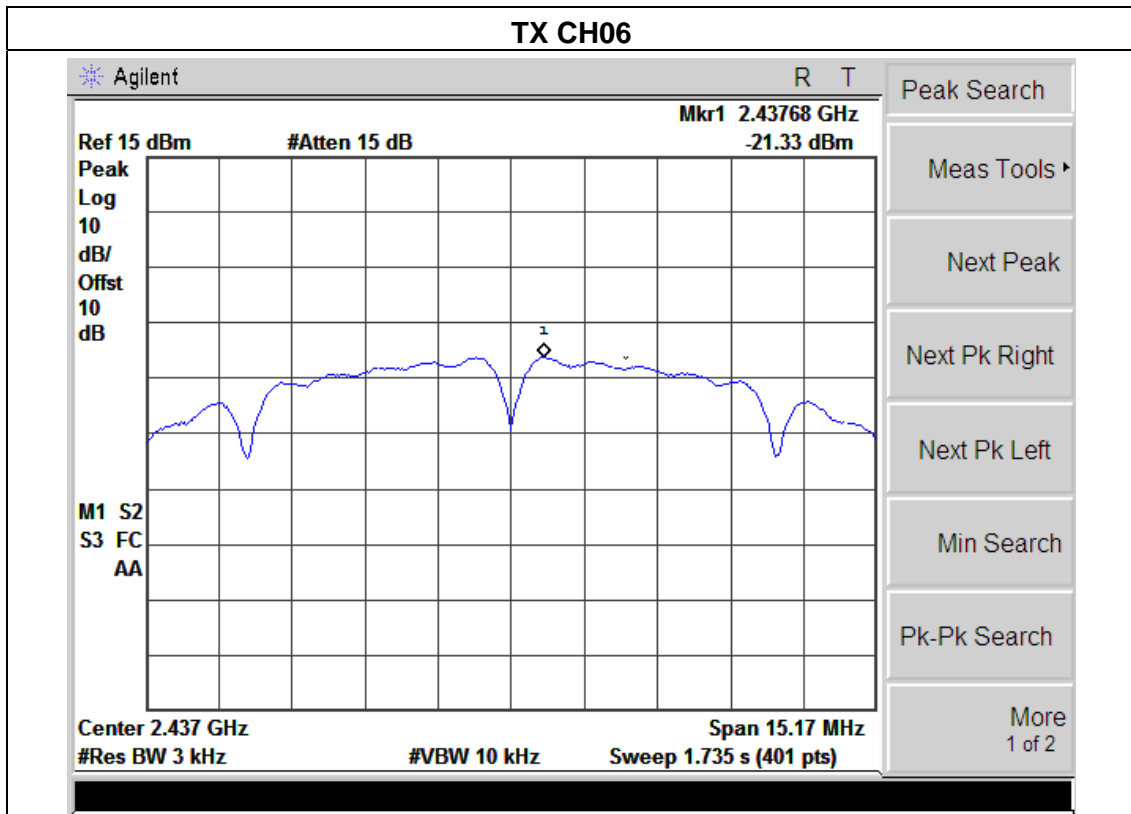




EUT :	ScreenBeam Mini2 Wireless Display Receiver	Model Name :	SBWD60A
Temperature :	25 °C	Relative Humidity :	56%
Pressure :	1015 hPa	Test Voltage :	DC 5V From adapter AC120V/60Hz
Test Mode :	TX g Mode /CH01, CH06, CH11		

Frequency	Power Density A (dBm)	Power Density B (dBm)	total power density (dBm)	Limit (dBm)	Result
2412 MHz	-25.48	-26.52	-22.96	4.94	PASS
2437 MHz	-25.43	-26.85	-23.10	4.94	PASS
2462 MHz	-24.93	-25.74	-22.31	4.94	PASS

NOTE: A(B) Represent the value of antenna A and B,The worst data is A Antenna ,only shown Antenna A Plot.

For 2.4G mode , Limit = $8-9.06+6=4.94$ dBm for output power.

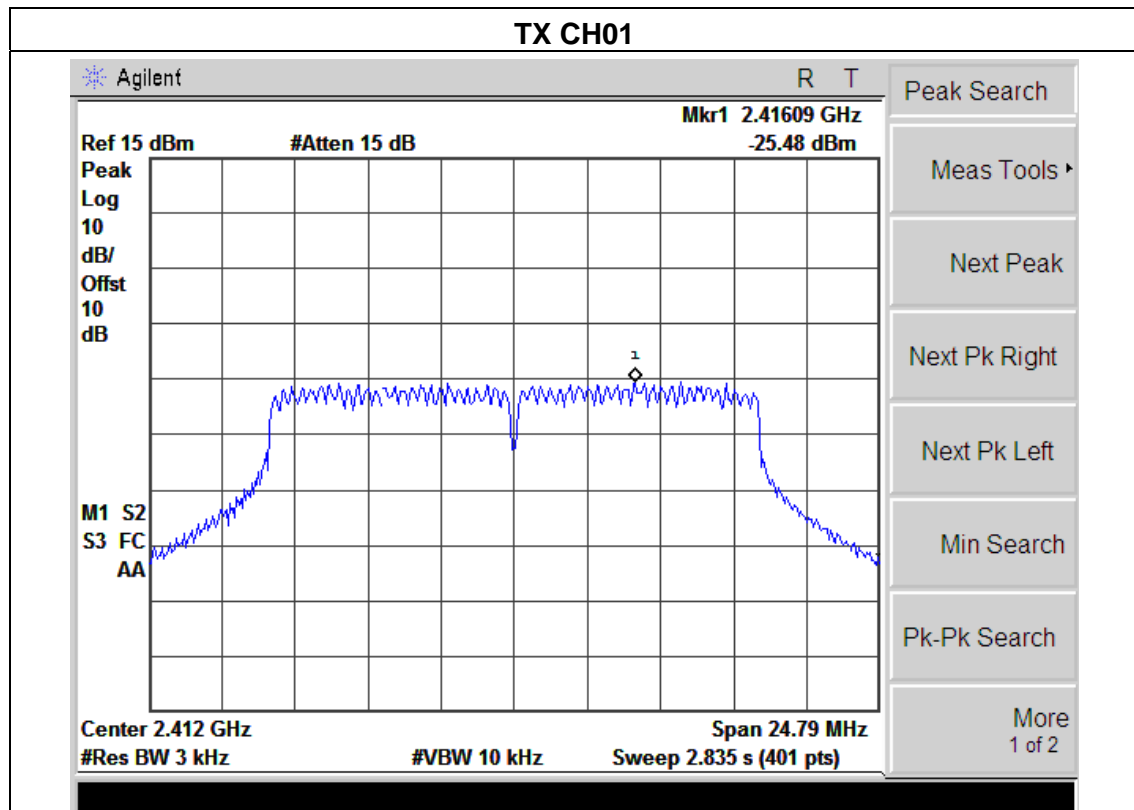

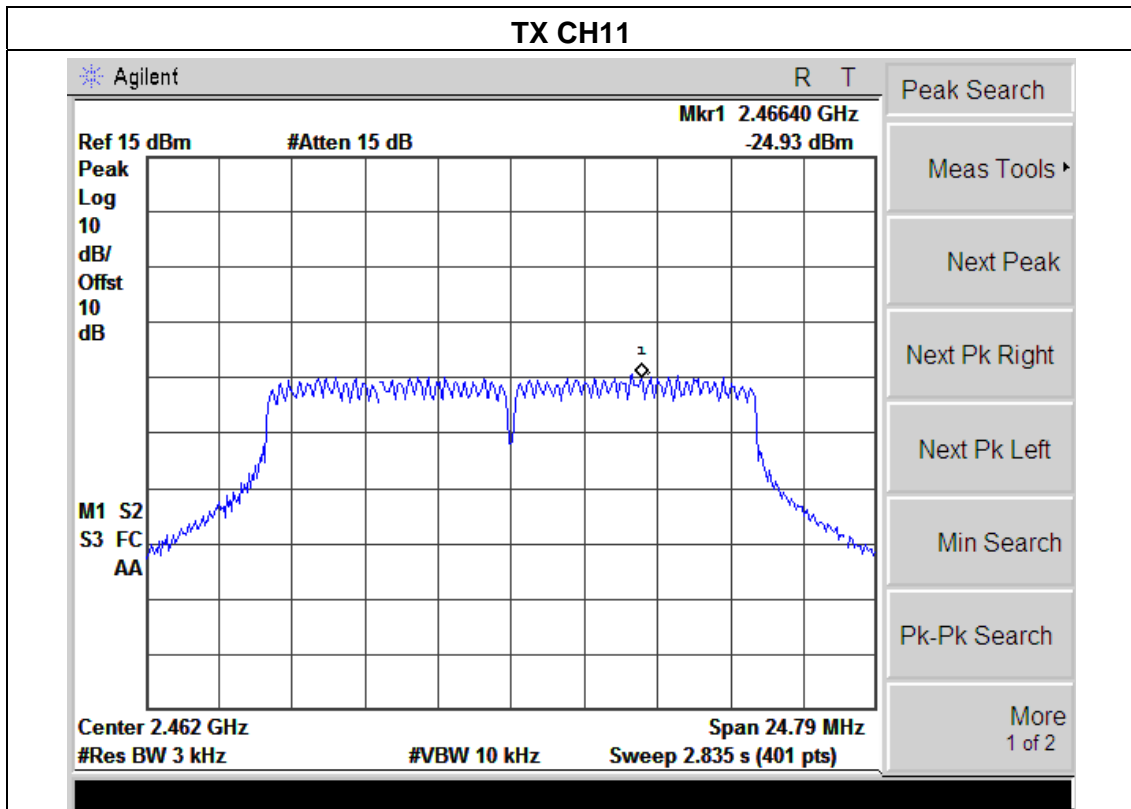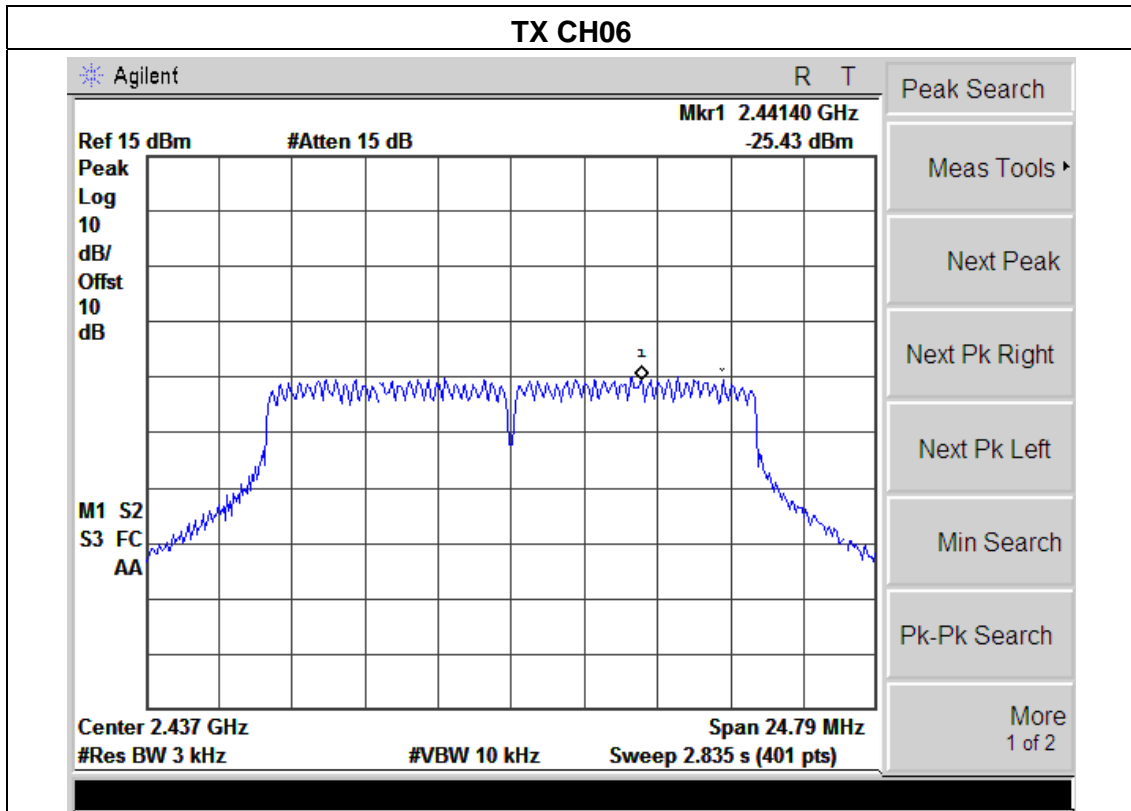




EUT :	ScreenBeam Mini2 Wireless Display Receiver	Model Name :	SBWD60A
Temperature :	25 °C	Relative Humidity :	56%
Pressure :	1015 hPa	Test Voltage :	DC 5V From adapter AC120V/60Hz
Test Mode :	TX n Mode (20MHz)/CH01, CH06, CH11		

Frequency	Power Density A (dBm)	Power Density B (dBm)	total power density (dBm)	Limit (dBm)	Result
2412 MHz	-25.18	-25.97	-22.55	4.94	PASS
2437 MHz	-24.88	-25.79	-22.46	4.94	PASS
2462 MHz	-24.70	-25.88	-22.24	4.94	PASS

NOTE: A(B) Represent the value of antenna A and B, The worst data is A Antenna a ,only shown Antenna A Plot.

For 2.4G mode , Limit = $8-9.06+6=4.94$ dBm for output power.

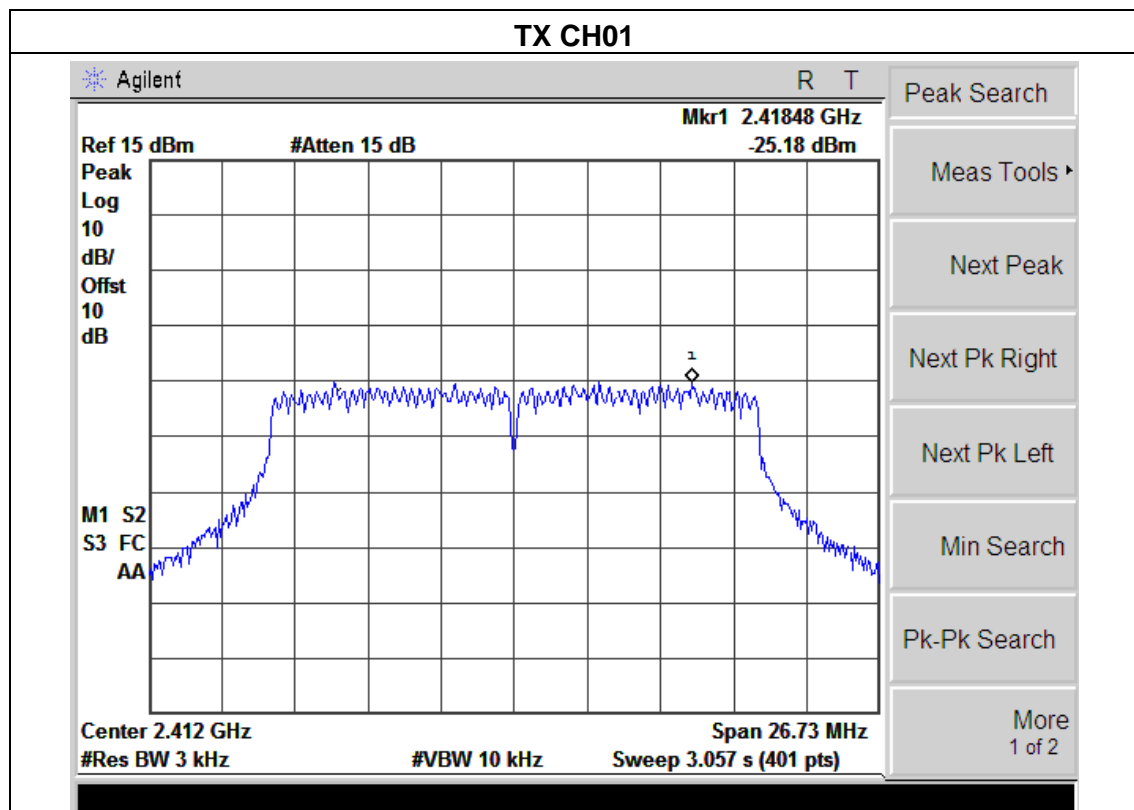

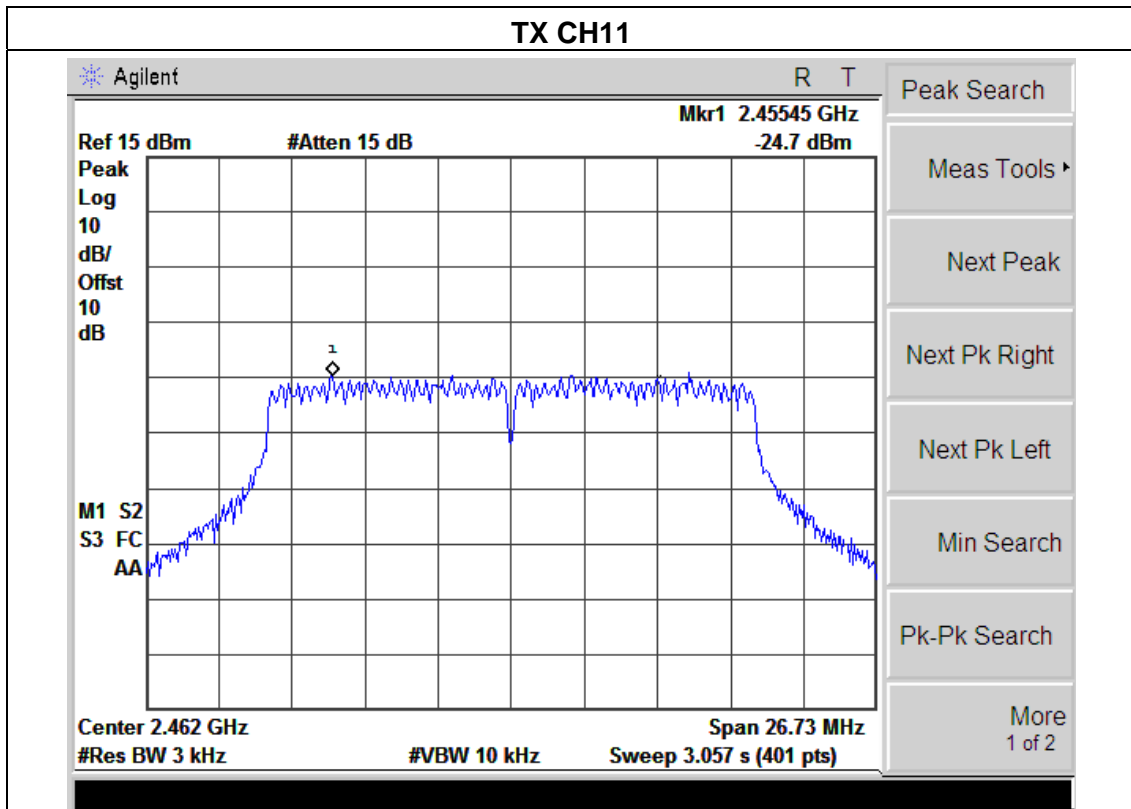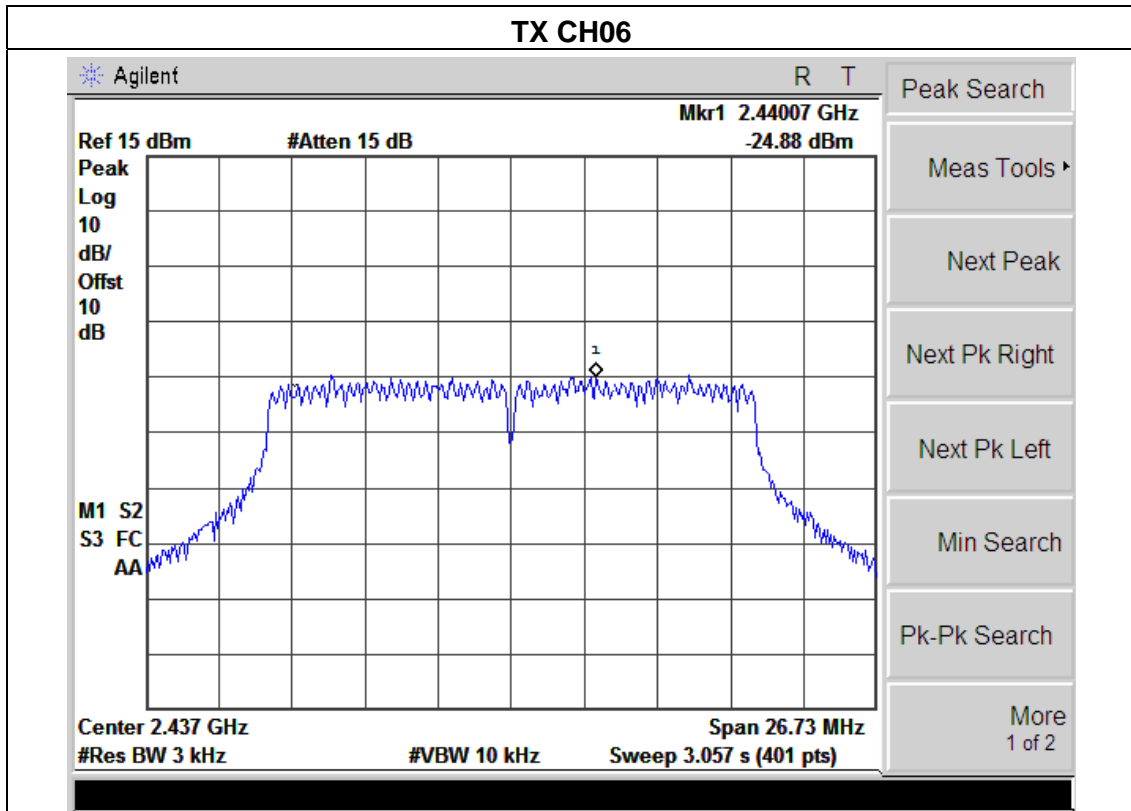




EUT :	ScreenBeam Mini2 Wireless Display Receiver	Model Name :	SBWD60A
Temperature :	25 °C	Relative Humidity :	56%
Pressure :	1015 hPa	Test Voltage :	DC 5V From adapter AC120V/60Hz
Test Mode :	TX n Mode (40MHz)/CH03, CH06, CH09		

Frequency	Power Density A (dBm)	Power Density B (dBm)	total power density (dBm)	Limit (dBm)	Result
2422 MHz	-27.83	-28.69	-25.23	4.94	PASS
2437 MHz	-28.51	-29.64	-25.63	4.94	PASS
2452 MHz	-28.83	-29.97	-26.35	4.94	PASS

NOTE: A(B) Represent the value of antenna A and B, The worst data is A Antenna a ,only shown Antenna A Plot.

. For 2.4G mode , Limit = $8-9.06+6=4.94$ dBm for output power.

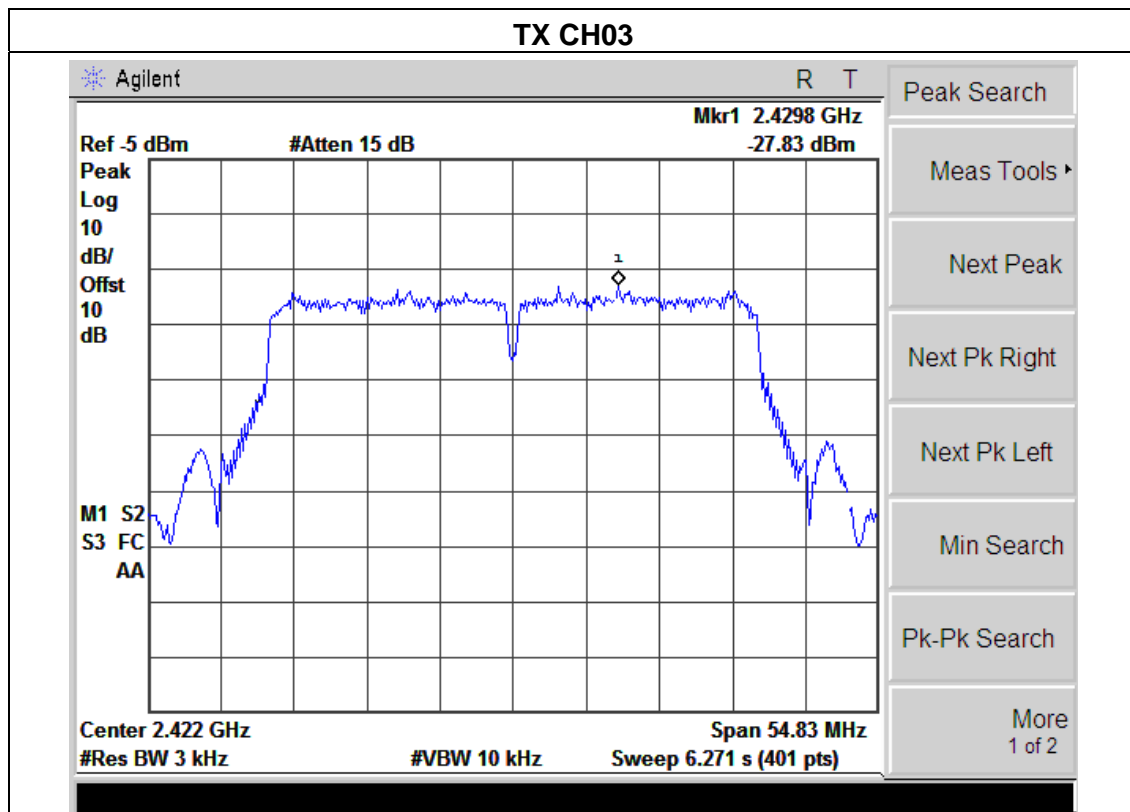

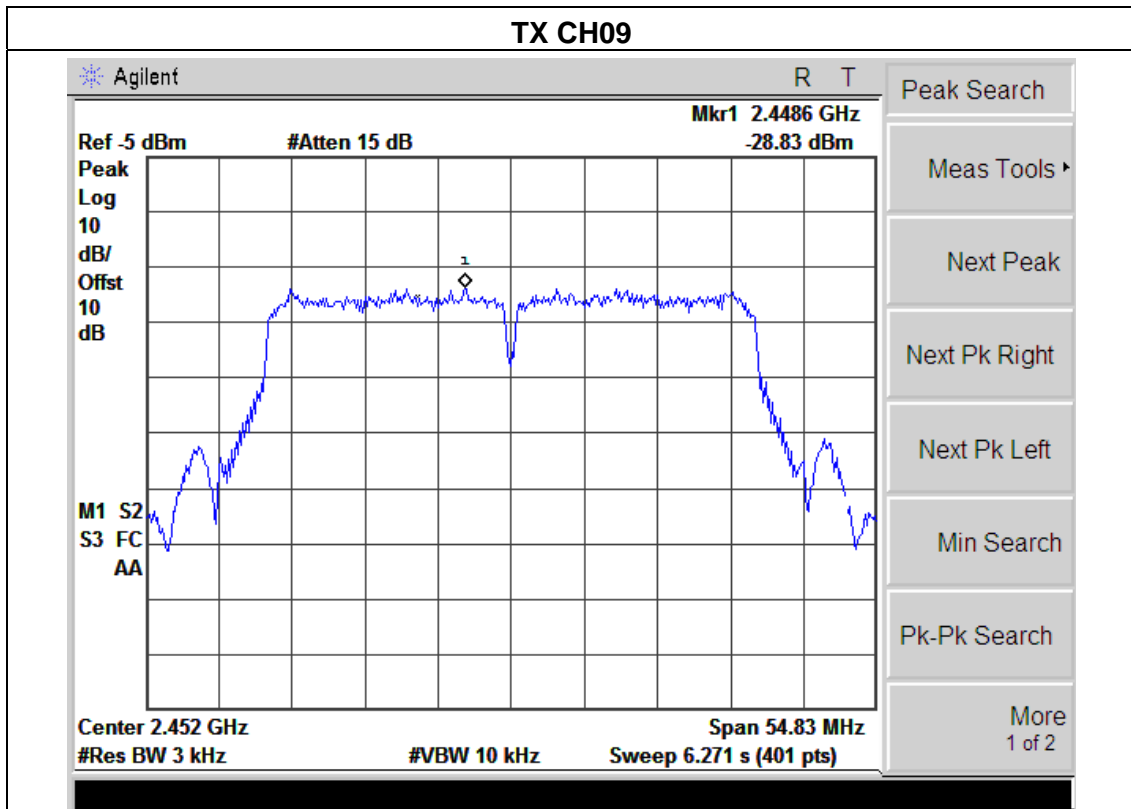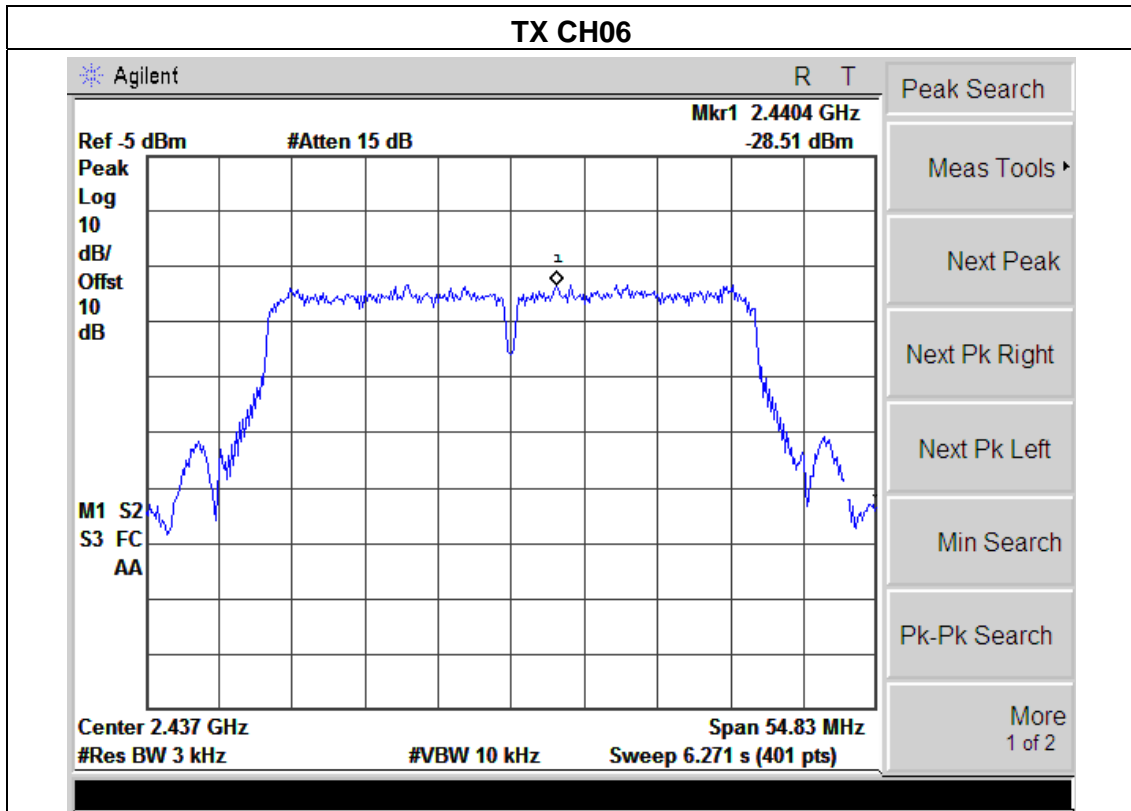




EUT :	ScreenBeam Mini2 Wireless Display Receiver	Model Name :	SBWD60A
Temperature :	25 °C	Relative Humidity :	56%
Pressure :	1015 hPa	Test Voltage :	DC 5V From adapter AC120V/60Hz
Test Mode :	TX a Mode /CH149, CH157, CH165		

Frequency	Power Density A (dBm)	Power Density B (dBm)	total power density (dBm)	Limit (dBm)	Result
5745MHz	-18.53	-20.59	-16.43	4.94	PASS
5785 MHz	-20.63	-22.65	-17.11	4.94	PASS
5825 MHz	-23.24	-24.78	-20.93	4.94	PASS

Note: A (B) Represent the value of antenna A and B, The worst data is A Antenna a ,only shown Antenna A Plot.

For 5G mode , Limit =8-9.06+6=4.94dBm for output power.

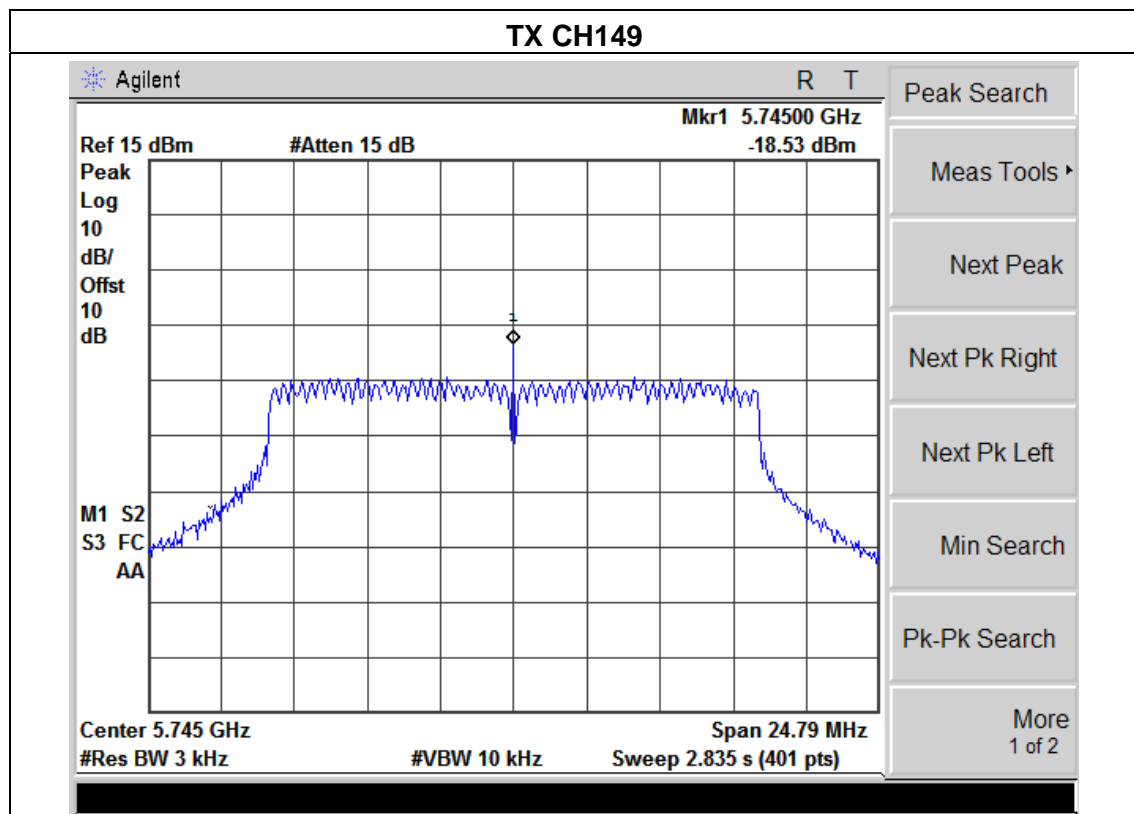

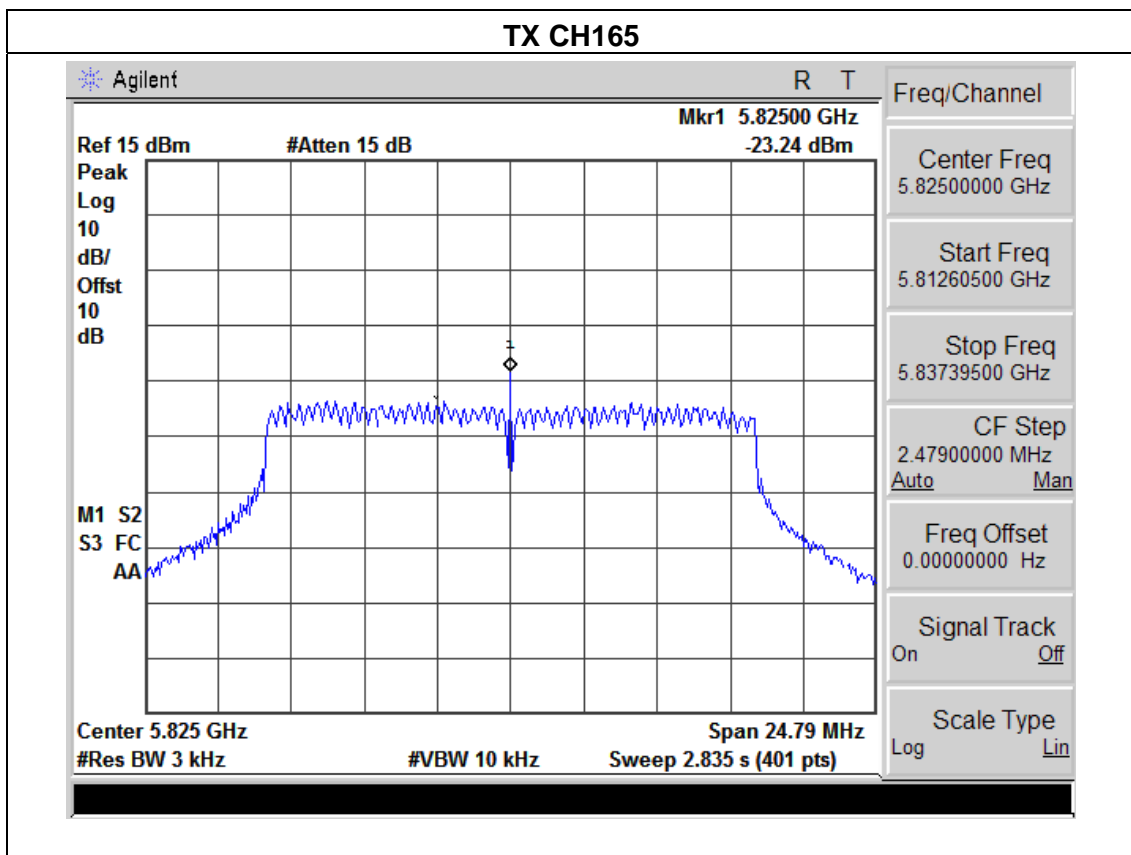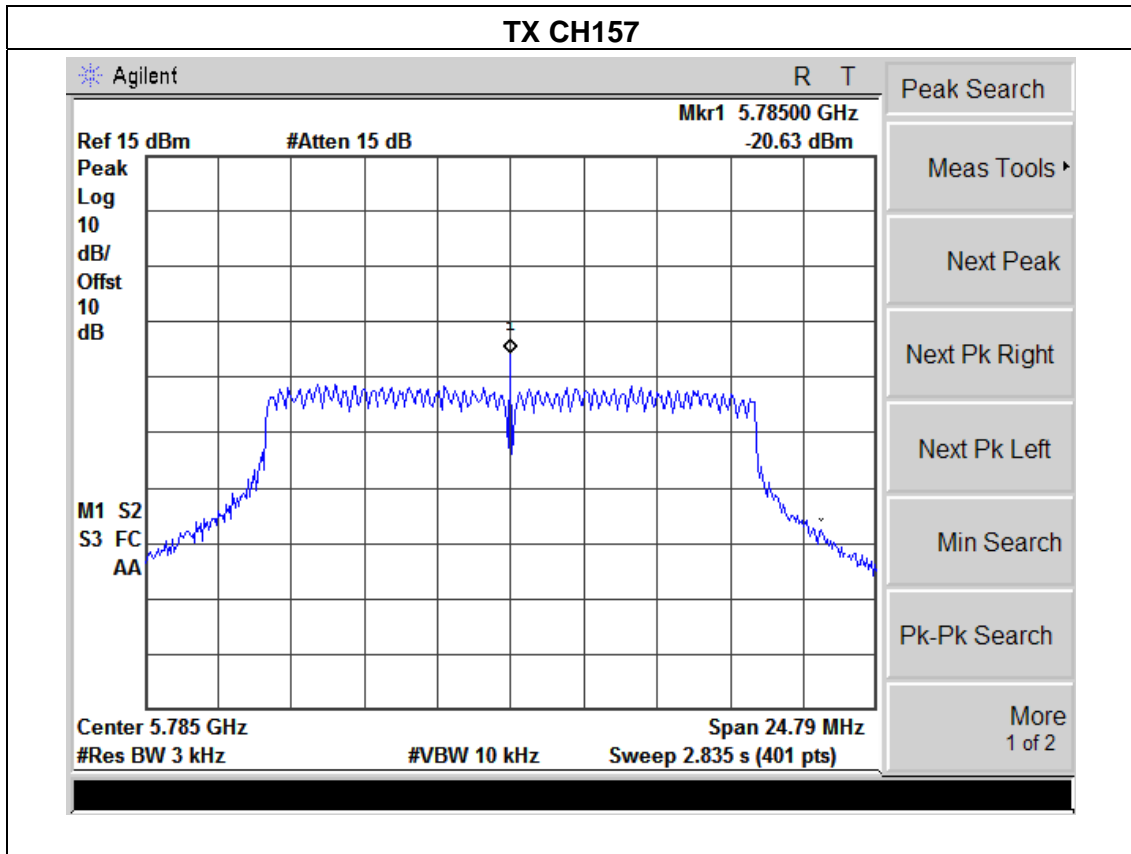




EUT :	ScreenBeam Mini2 Wireless Display Receiver	Model Name :	SBWD60A
Temperature :	25 °C	Relative Humidity :	56%
Pressure :	1015 hPa	Test Voltage :	DC 5V From adapter AC120V/60Hz
Test Mode :	TX n(20) Mode(5G) /CH149, CH157, CH165		

Frequency	Power Density A (dBm)	Power Density B (dBm)	total power density (dBm)	Limit (dBm)	Result
5745MHz	-18.78	-20.69	-16.62	4.94	PASS
5785 MHz	-20.77	-22.78	-17.32	4.94	PASS
5825 MHz	-23.08	-24.94	-20.90	4.94	PASS

Note: A (B) Represent the value of antenna A and B, The worst data is A Antenna a ,only shown Antenna A Plot.

For 5G mode , Limit =8-9.06+6=4.94dBm for output power.

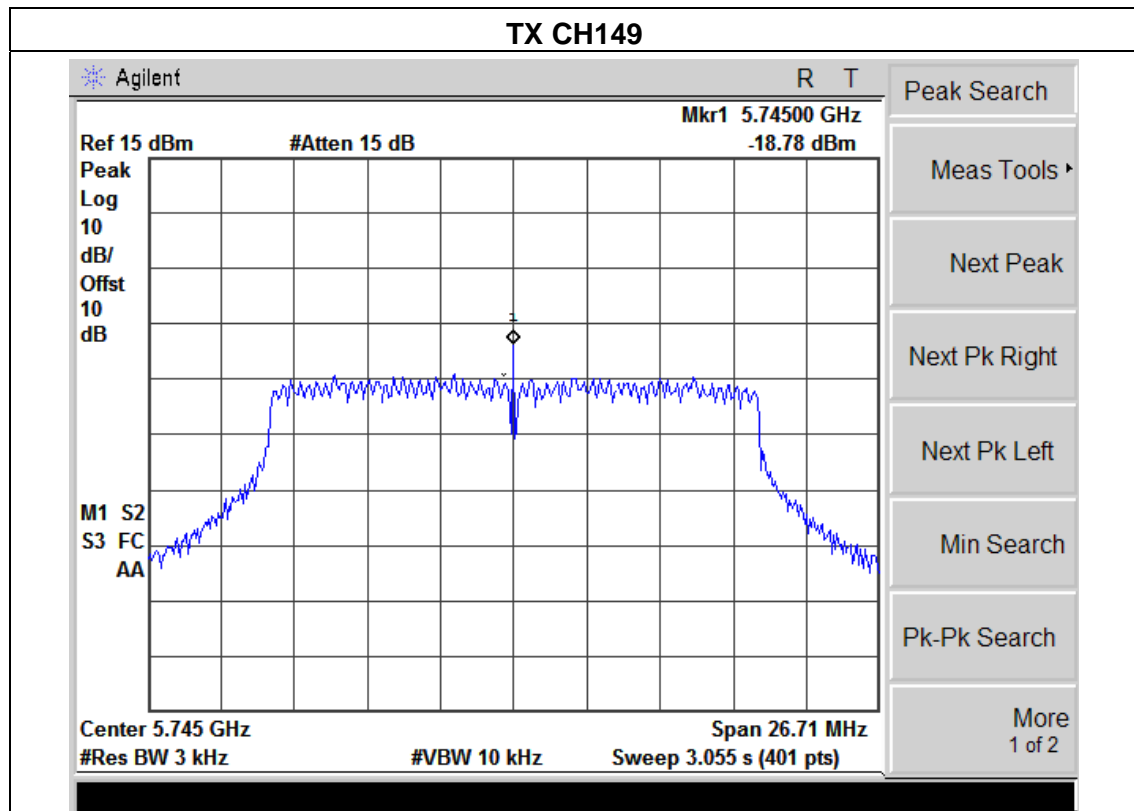

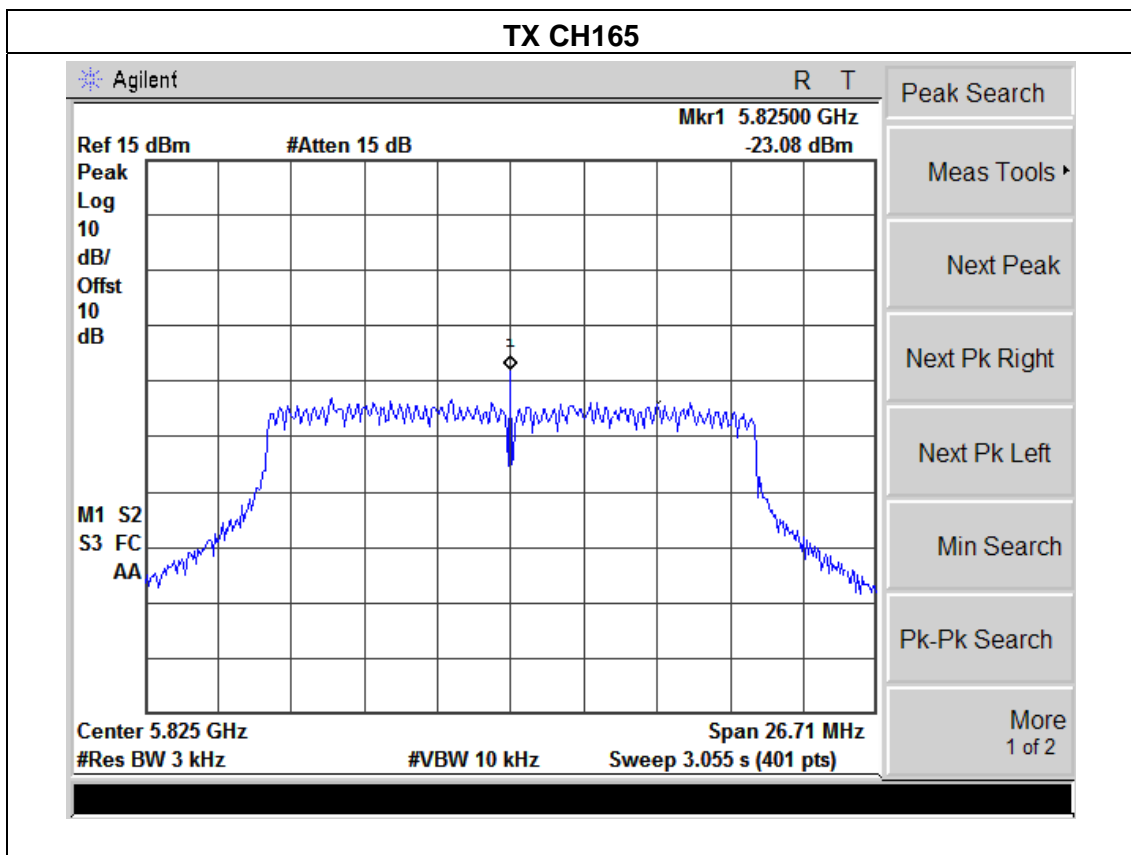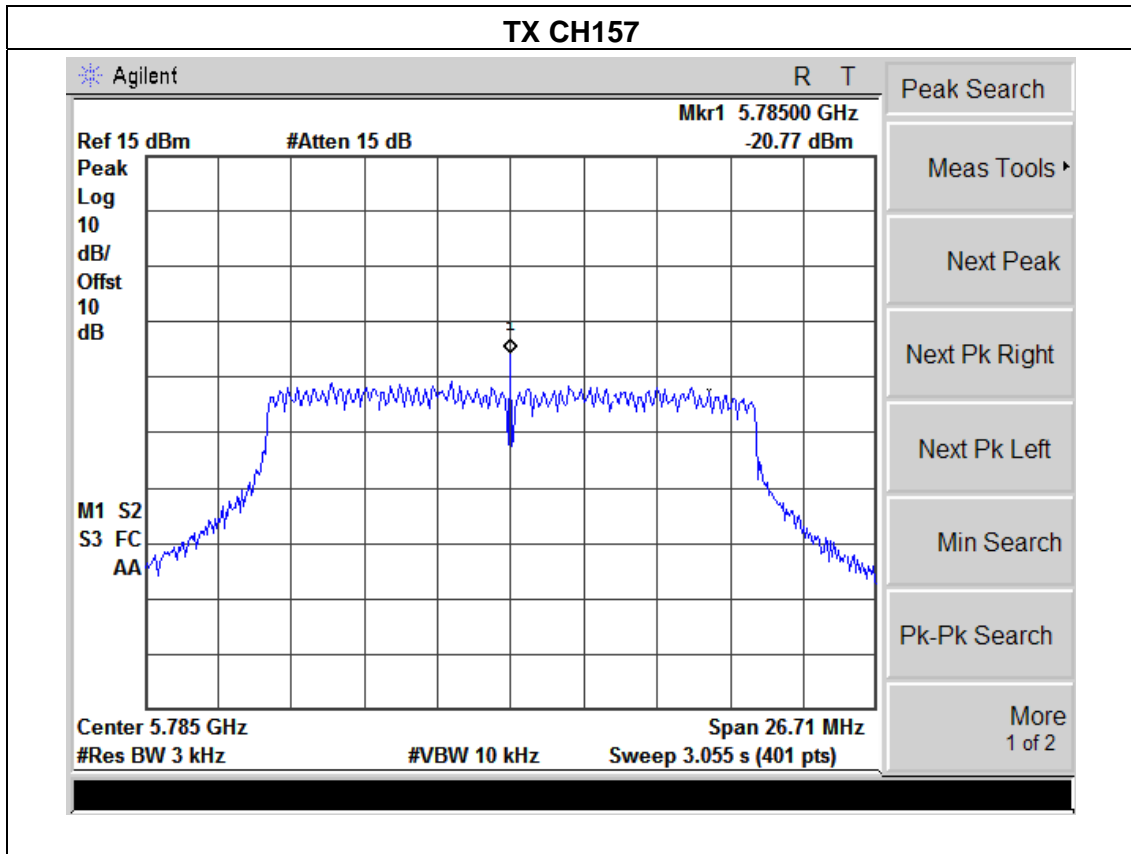


EUT :	ScreenBeam Mini2 Wireless Display Receiver	Model Name :	SBWD60A
Temperature :	25 °C	Relative Humidity :	56%
Pressure :	1015 hPa	Test Voltage :	DC 5V From adapter AC120V/60Hz
Test Mode :	TX n40 Mode(5G) /CH151, CH159		


Frequency	Power Density A (dBm)	Power Density B (dBm)	total power density (dBm)	Limit (dBm)	Result
5755 MHz	-19.13	-22.32	-17.43	4.94	PASS
5795 MHz	-21.44	-23.15	-17.68	4.94	PASS

Note: A (B) Represent the value of antenna A and B, The worst data is A Antenna a ,only shown Antenna A Plot.

For5G mode , Limit =8-9.06+6=4.94dBm for output power.

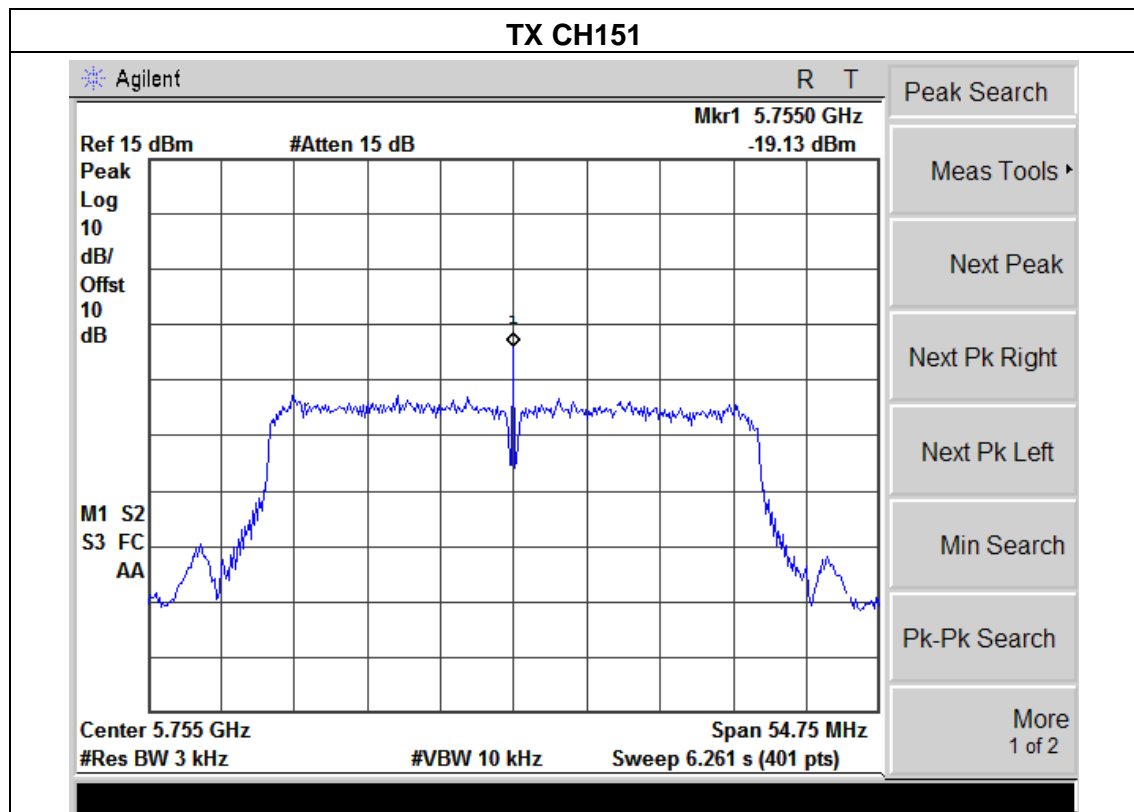

TX CH159

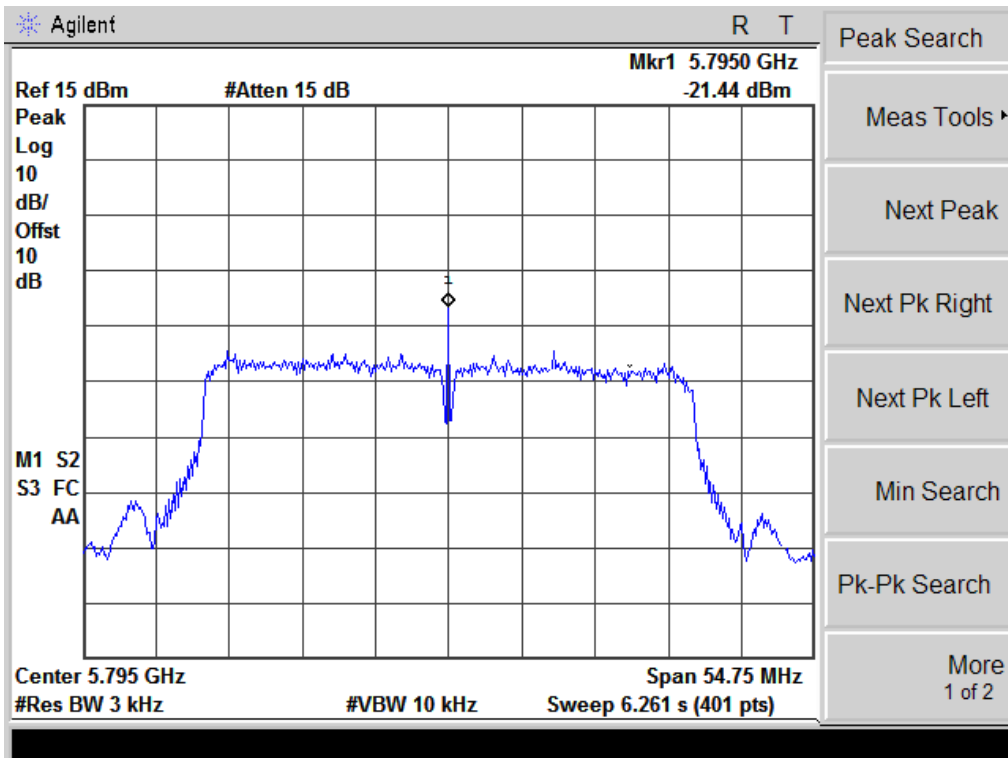

5. BANDWIDTH TEST


5.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(a)(2)	Bandwidth	$\geq 500\text{KHz}$ (6dB bandwidth)	2400-2483.5	PASS

5.1.1 TEST PROCEDURE

1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

TEST SETUP

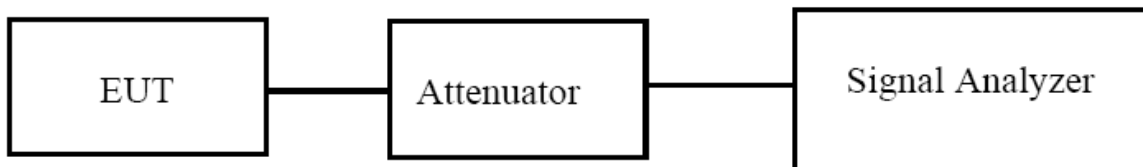

5.1.2 EUT OPERATION CONDITIONS


The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

5.1.3 TEST RESULTS

EUT :	ScreenBeam Mini2 Wireless Display Receiver	Model Name :	SBWD60A
Temperature :	25 °C	Relative Humidity :	56%
Pressure :	1012 hPa	Test Voltage :	DC 5V From adapter AC120V/60Hz
Test Mode :	TX b Mode /CH01, CH06, CH11		

Channel	Frequency (MHz)	6dB bandwidth (MHz)		Limit (kHz)	Result
		ANT A	ANT B		
Low	2412	10.111	10.054	500	Pass
Middle	2437	10.093	10.035	500	Pass
High	2462	10.030	10.023	500	Pass

Note: A (B) Represent the value of antenna A and B, The worst data is A Antenna a , only shown Antenna A Plot.

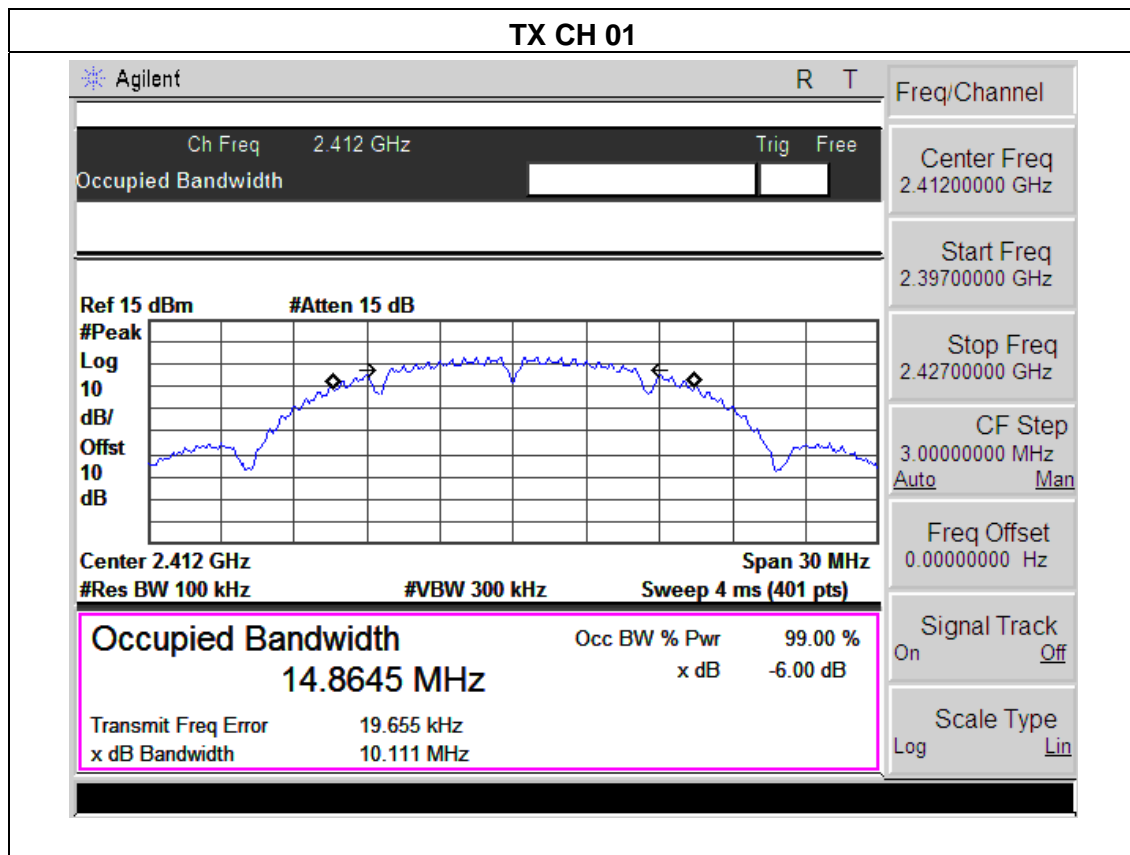

TX CH 06

Agilent
R T

Ch Freq 2.437 GHz
Trig Free

Occupied Bandwidth

Ref 15 dBm
#Atten 15 dB

#Peak

Log

10

dB/

Offst

10

dB

Center 2.437 GHz

#Res BW 100 kHz

Span 30 MHz

#VBW 300 kHz

Sweep 4 ms (401 pts)

Freq/Channel

Center Freq 2.43700000 GHz

Start Freq 2.42200000 GHz

Stop Freq 2.45200000 GHz

CF Step 3.00000000 MHz

Auto Man

Freq Offset 0.00000000 Hz

Signal Track On Off

Scale Type Log Lin

TX CH 11

Agilent
R T

Ch Freq 2.462 GHz
Trig Free

Occupied Bandwidth

Ref 15 dBm
#Atten 15 dB

#Peak

Log

10

dB/

Offst

10

dB

Center 2.462 GHz

#Res BW 100 kHz

Span 30 MHz

#VBW 300 kHz

Sweep 4 ms (401 pts)

Freq/Channel

Center Freq 2.46200000 GHz

Start Freq 2.44700000 GHz

Stop Freq 2.47700000 GHz

CF Step 3.00000000 MHz

Auto Man

Freq Offset 0.00000000 Hz


Signal Track On Off

Scale Type Log Lin

EUT :	ScreenBeam Mini2 Wireless Display Receiver	Model Name :	SBWD60A
Temperature :	25 °C	Relative Humidity :	60%
Pressure :	1012 hPa	Test Voltage :	DC 5V From adapter AC120V/60Hz
Test Mode :	TX g Mode /CH01, CH06, CH11		

Channel	Frequency (MHz)	6dB bandwidth (MHz)		Limit (kHz)	Result
		ANT A	ANT B		
Low	2412	16.496	16.231	500	Pass
Middle	2437	16.521	16.367	500	Pass
High	2462	16.498	16.267	500	Pass

Note: A (B) Represent the value of antenna A and B, The worst data is A Antenna a ,only shown Antenna A Plot.

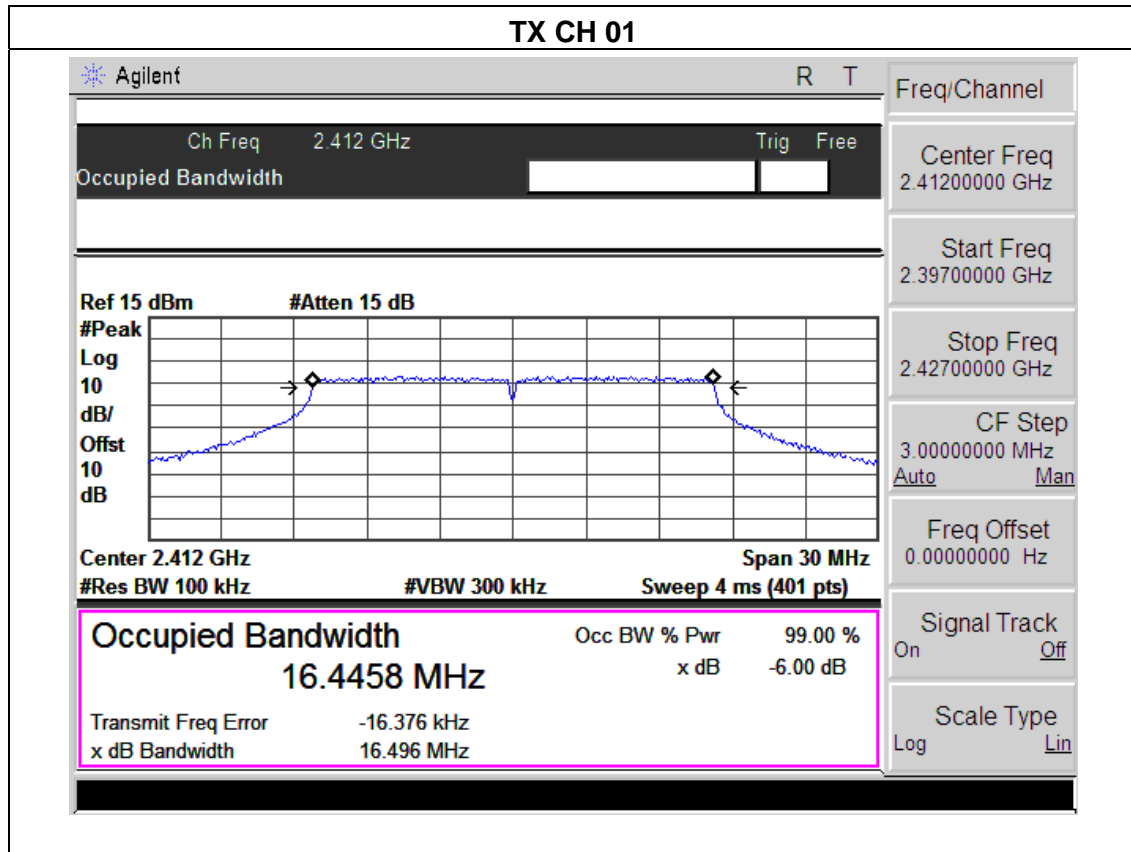

TX CH 06

Agilent
R T

Ch Freq 2.437 GHz
Trig Free

Occupied Bandwidth

Ref 15 dBm
#Atten 15 dB

#Peak

Log

10

dB/

Offst

10

dB

Freq/Channel

Center Freq 2.43700000 GHz

Start Freq 2.42200000 GHz

Stop Freq 2.45200000 GHz

CF Step 3.00000000 MHz

Auto Man

Freq Offset 0.00000000 Hz

Signal Track On Off

Scale Type Log Lin

Center 2.437 GHz
Span 30 MHz
#Res BW 100 kHz
#VBW 300 kHz
Sweep 4 ms (401 pts)

Occupied Bandwidth	Occ BW % Pwr	99.00 %
16.4410 MHz	x dB	-6.00 dB
Transmit Freq Error	-15.546 kHz	
x dB Bandwidth	16.521 MHz	

TX CH 11

Agilent
R T

Ch Freq 2.462 GHz
Trig Free

Occupied Bandwidth

Ref 15 dBm
#Atten 15 dB

#Peak

Log

10

dB/

Offst

10

dB

Freq/Channel

Center Freq 2.46200000 GHz

Start Freq 2.44700000 GHz

Stop Freq 2.47700000 GHz

CF Step 3.00000000 MHz

Auto Man

Freq Offset 0.00000000 Hz

Signal Track On Off

Scale Type Log Lin


Center 2.462 GHz
Span 30 MHz
#Res BW 100 kHz
#VBW 300 kHz
Sweep 4 ms (401 pts)



Occupied Bandwidth	Occ BW % Pwr	99.00 %
16.4332 MHz	x dB	-6.00 dB
Transmit Freq Error	-4.240 kHz	
x dB Bandwidth	16.498 MHz	

EUT :	ScreenBeam Mini2 Wireless Display Receiver	Model Name :	SBWD60A
Temperature :	25 °C	Relative Humidity :	56%
Pressure :	1012 hPa	Test Voltage :	DC 5V From adapter AC120V/60Hz
Test Mode :	TX n Mode(20M) /CH01, CH06, CH11		

Channel	Frequency (MHz)	6dB bandwidth (MHz)		Limit (kHz)	Result
		ANT A	ANT B		
Low	2412	17.806	17.573	500	Pass
Middle	2437	17.817	17.475	500	Pass
High	2462	17.813	17.526	500	Pass

Note: A (B) Represent the value of antenna A and B, The worst data is A Antenna a ,only shown Antenna A Plot.

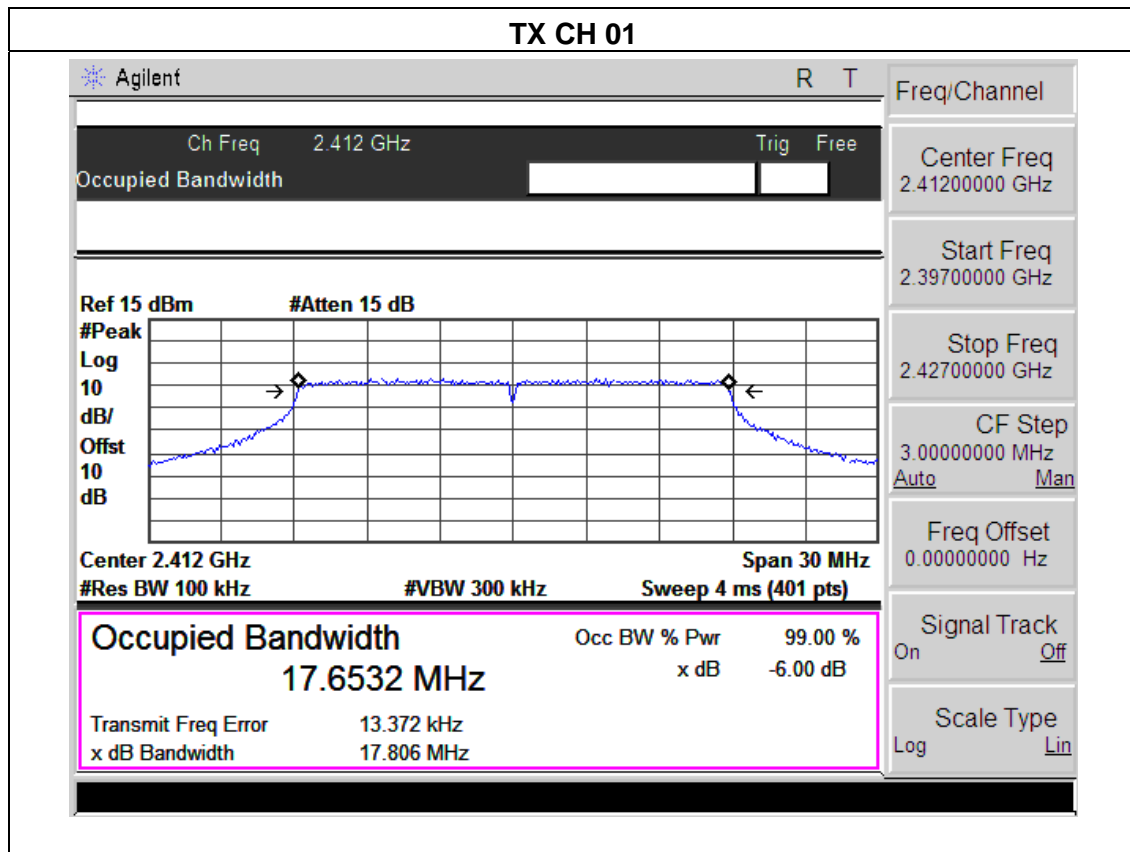


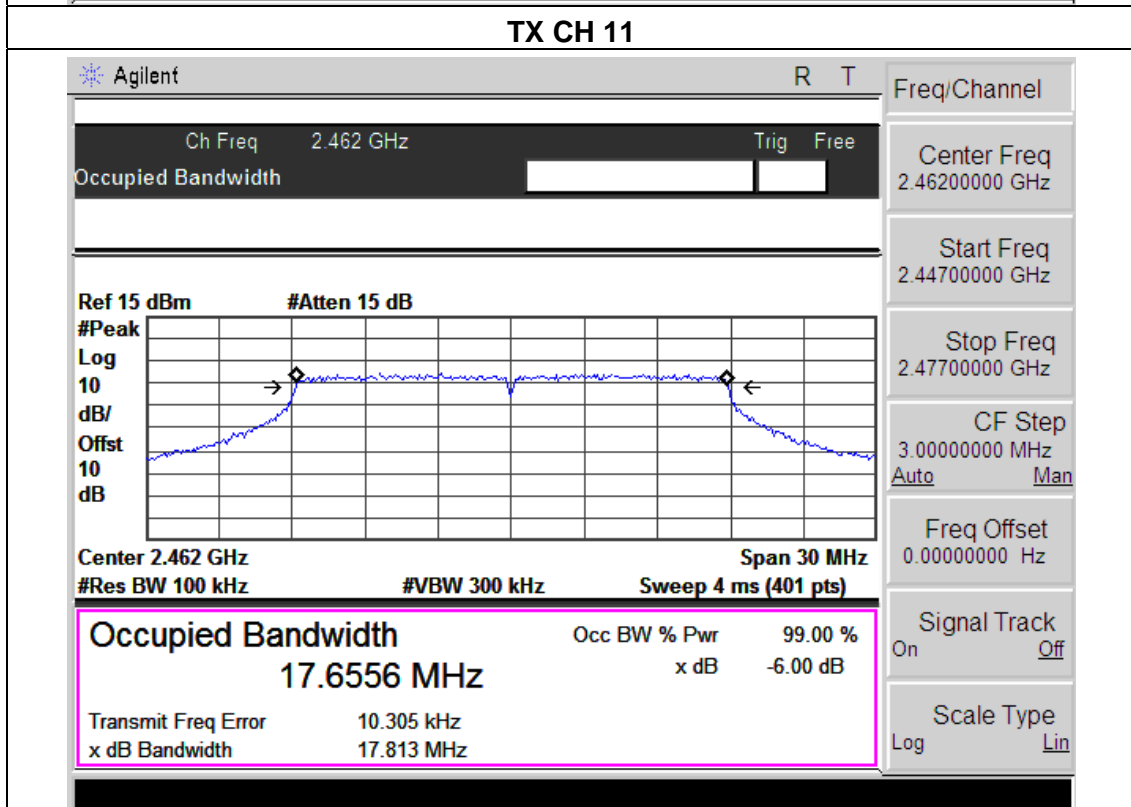
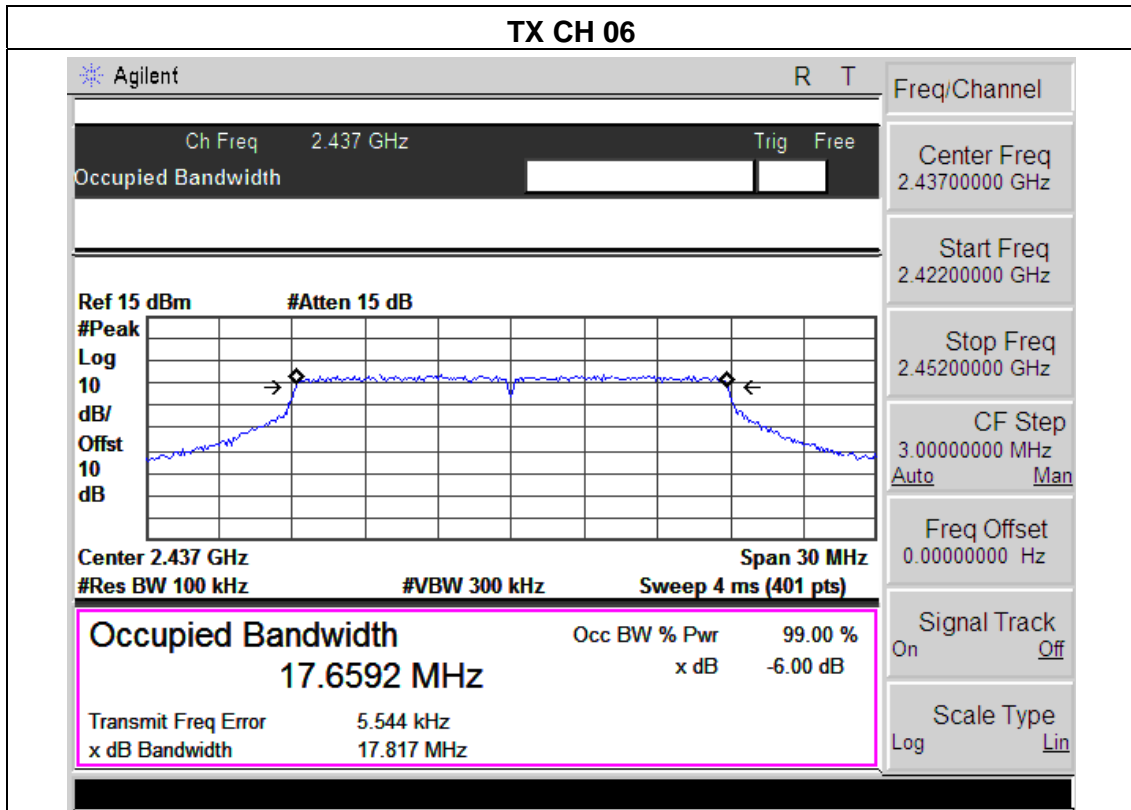


EUT :	ScreenBeam Mini2 Wireless Display Receiver	Model Name :	SBWD60A
Temperature :	25 °C	Relative Humidity :	56%
Pressure :	1012 hPa	Test Voltage :	DC 5V From adapter AC120V/60Hz
Test Mode :	TX n Mode(40M) /CH03, CH06, CH09		

Channel	Frequency (MHz)	6dB bandwidth (MHz)		Limit (kHz)	Result
		ANT A	ANT B		
Low	2422	36.550	36.424	500	Pass
Middle	2437	36.401	36.362	500	Pass
High	2452	36.414	36.287	500	Pass

Note: A (B) Represent the value of antenna A and B, The worst data is A Antenna a ,only shown Antenna A Plot.

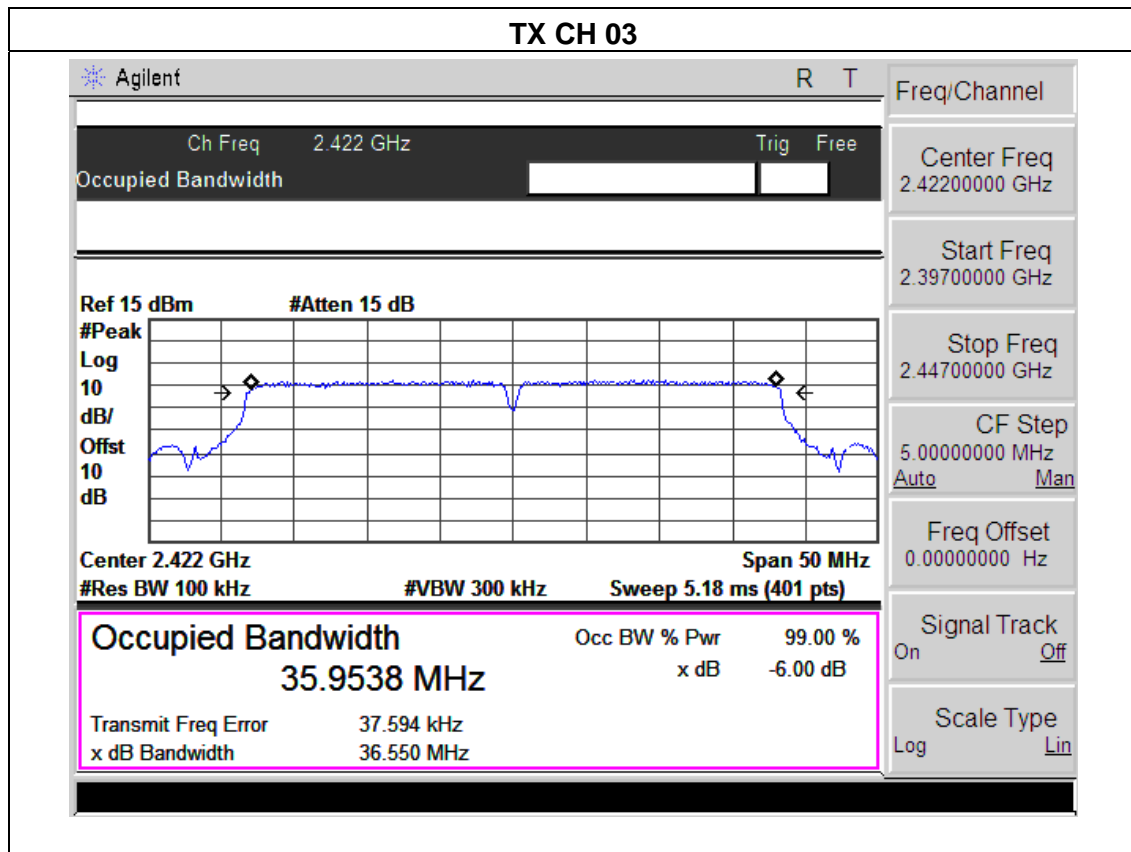


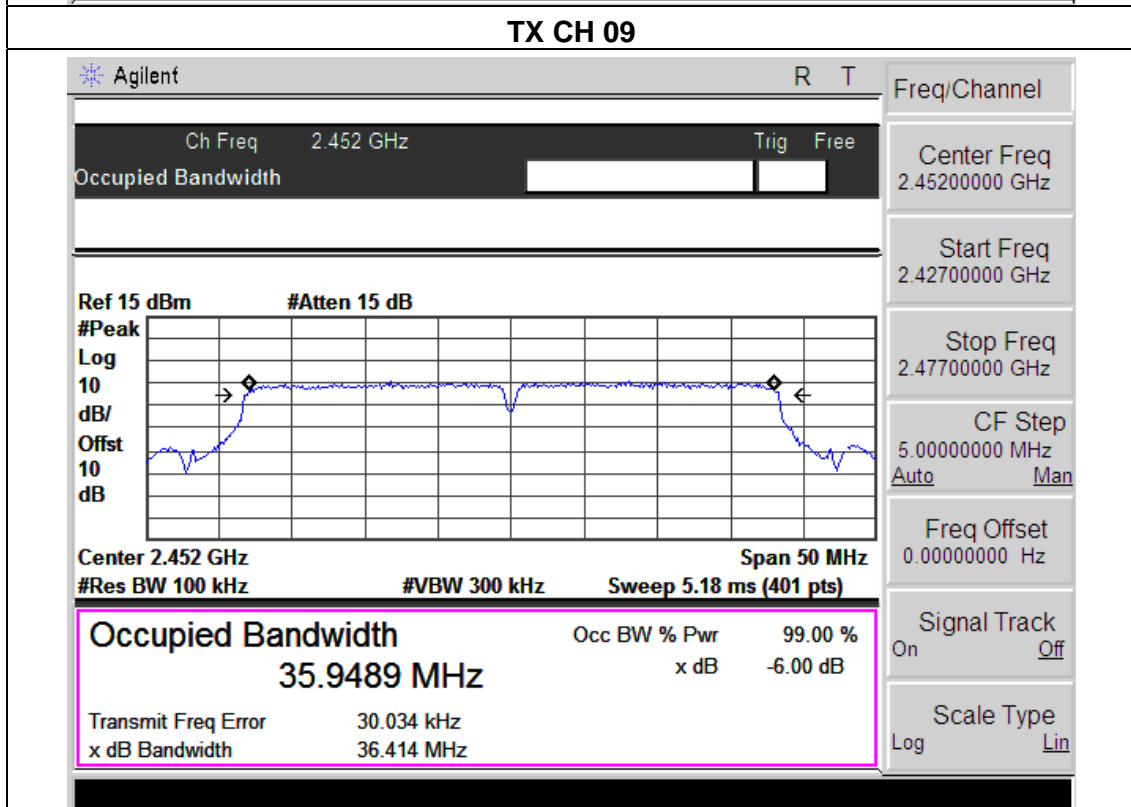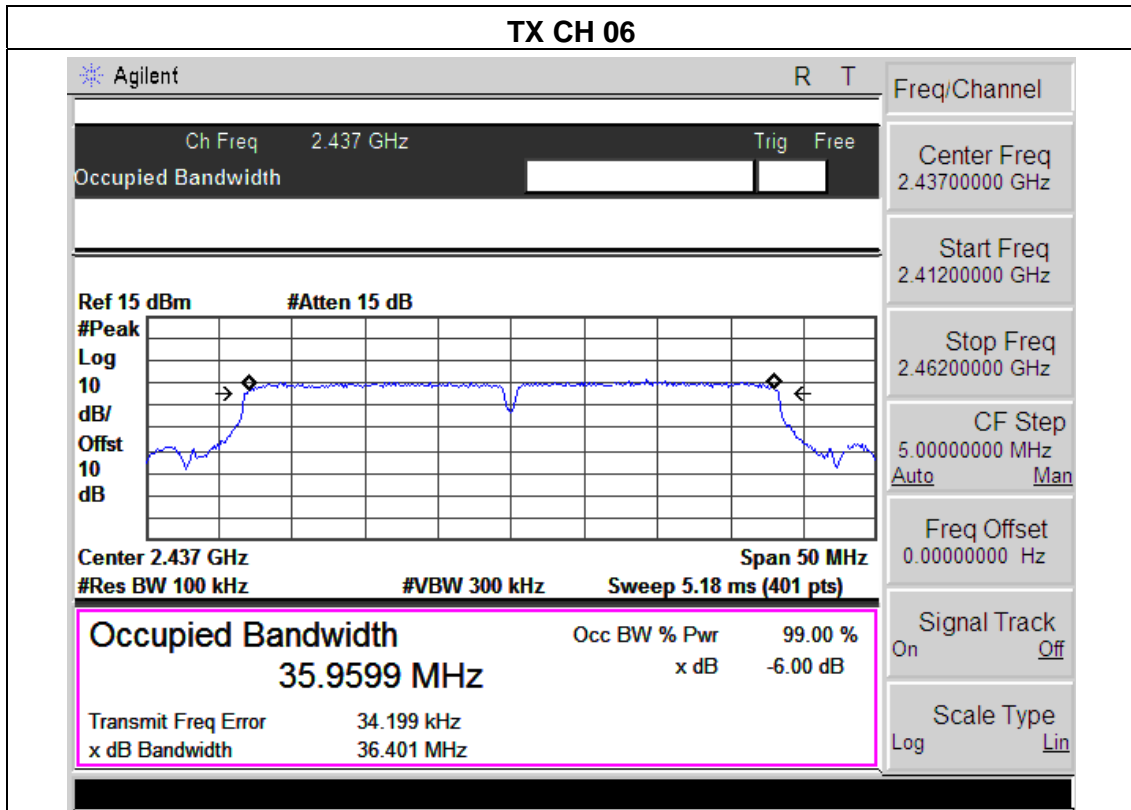

EUT :	ScreenBeam Mini2 Wireless Display Receiver	Model Name :	SBWD60A
Temperature :	25 °C	Relative Humidity :	56%
Pressure :	1012 hPa	Test Voltage :	DC 5V From adapter AC120V/60Hz
Test Mode :	TX a Mode /CH149, CH157, CH165		

Channel	Frequency (MHz)	6dB bandwidth (MHz)		Limit (kHz)	Result
		ANT A	ANT B		
Low	5745	16.523	16.352	500	Pass
Middle	5785	16.493	16.452	500	Pass
High	5825	16.517	16.254	500	Pass

Note: A (B) Represent the value of antenna A and B, The worst data is A Antenna a ,only shown Antenna A Plot.

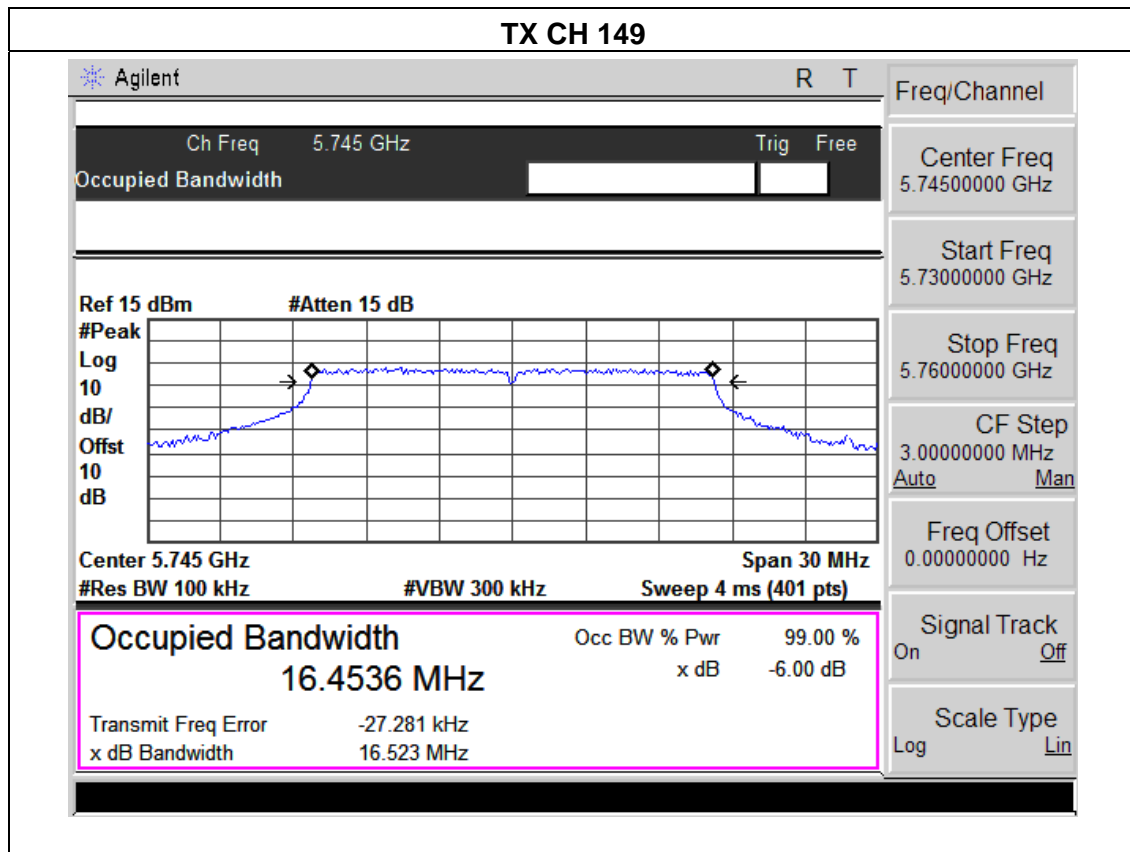

TX CH 157

Agilent
R T

Ch Freq 5.785 GHz
Trig Free

Occupied Bandwidth

Ref 15 dBm
#Atten 15 dB

#Peak

Log

10

dB/

Offst

10

dB

Center 5.785 GHz

#Res BW 100 kHz

Span 30 MHz

#VBW 300 kHz

Sweep 4 ms (401 pts)

Occupied Bandwidth	Occ BW % Pwr	99.00 %
16.4441 MHz	x dB	-6.00 dB
Transmit Freq Error	-32.606 kHz	
x dB Bandwidth	16.493 MHz	

Freq/Channel	
Center Freq	5.78500000 GHz
Start Freq	5.77000000 GHz
Stop Freq	5.80000000 GHz
CF Step	3.00000000 MHz
	Auto Man
Freq Offset	0.00000000 Hz
Signal Track	On Off
Scale Type	Log Lin

TX CH 165

Agilent
R T

Ch Freq 5.825 GHz
Trig Free

Occupied Bandwidth

Ref 15 dBm
#Atten 15 dB

#Peak

Log

10

dB/

Offst

10

dB

Center 5.825 GHz

#Res BW 100 kHz

Span 30 MHz

#VBW 300 kHz

Sweep 4 ms (401 pts)


Occupied Bandwidth	Occ BW % Pwr	99.00 %
16.4399 MHz	x dB	-6.00 dB
Transmit Freq Error	-28.418 kHz	
x dB Bandwidth	16.517 MHz	

Freq/Channel	
Center Freq	5.82500000 GHz
Start Freq	5.81000000 GHz
Stop Freq	5.84000000 GHz
CF Step	3.00000000 MHz
	Auto Man
Freq Offset	0.00000000 Hz
Signal Track	On Off
Scale Type	Log Lin

EUT :	ScreenBeam Mini2 Wireless Display Receiver	Model Name :	SBWD60A
Temperature :	25 °C	Relative Humidity :	56%
Pressure :	1012 hPa	Test Voltage :	DC 5V From adapter AC120V/60Hz
Test Mode :	TX n(20) Mode(5G) /CH149, CH157, CH165		

Channel	Frequency (MHz)	6dB bandwidth (MHz)		Limit (kHz)	Result
		ANT A	ANT B		
Low	5745	17.717	17.446	500	Pass
Middle	5785	17.794	17.464	500	Pass
High	5825	17.803	17.635	500	Pass

Note: A (B) Represent the value of antenna A and B, The worst data is A Antenna a , only shown Antenna A Plot.

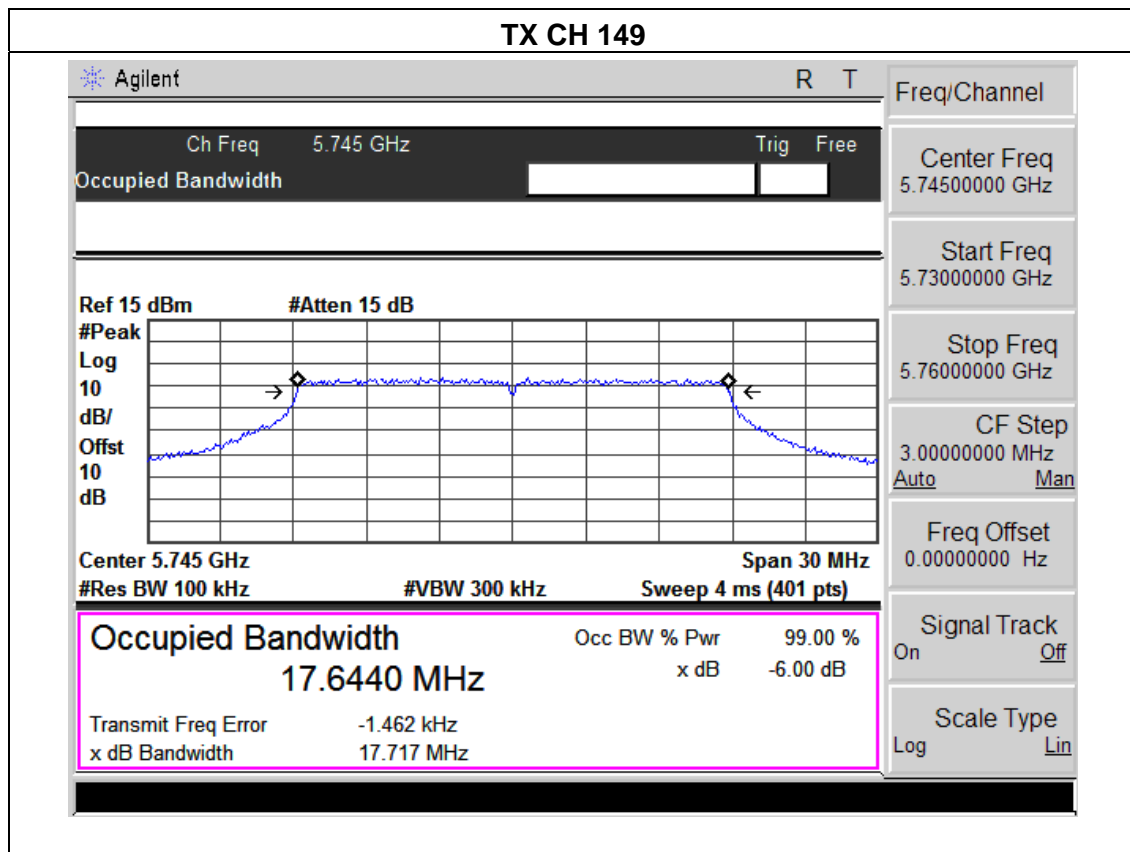

TX CH 157

Agilent
R T

Ch Freq 5.785 GHz
Trig Free

Occupied Bandwidth

Ref 15 dBm
#Atten 15 dB

#Peak

Log

10

dB/

Offst

10

dB

Center 5.785 GHz

#Res BW 100 kHz

#VBW 300 kHz

Sweep 4 ms (401 pts)

Span 30 MHz

Occupied Bandwidth	Occ BW % Pwr	99.00 %
17.6743 MHz	x dB	-6.00 dB
Transmit Freq Error	-3.107 kHz	
x dB Bandwidth	17.794 MHz	

Freq/Channel	
Center Freq	5.78500000 GHz
Start Freq	5.77000000 GHz
Stop Freq	5.80000000 GHz
CF Step	3.00000000 MHz
	Auto Man
Freq Offset	0.00000000 Hz
Signal Track	On Off
Scale Type	Log Lin

TX CH 165

Agilent
R T

Ch Freq 5.825 GHz
Trig Free

Occupied Bandwidth

Ref 15 dBm
#Atten 15 dB

#Peak

Log

10

dB/

Offst

10

dB

Center 5.825 GHz

#Res BW 100 kHz

#VBW 300 kHz

Sweep 4 ms (401 pts)

Span 30 MHz


Occupied Bandwidth	Occ BW % Pwr	99.00 %
17.6679 MHz	x dB	-6.00 dB
Transmit Freq Error	3.164 kHz	
x dB Bandwidth	17.803 MHz	

Freq/Channel	
Center Freq	5.82500000 GHz
Start Freq	5.81000000 GHz
Stop Freq	5.84000000 GHz
CF Step	3.00000000 MHz
	Auto Man
Freq Offset	0.00000000 Hz
Signal Track	On Off
Scale Type	Log Lin

EUT :	ScreenBeam Mini2 Wireless Display Receiver	Model Name :	SBWD60A
Temperature :	25 °C	Relative Humidity :	56%
Pressure :	1012 hPa	Test Voltage :	DC 5V From adapter AC120V/60Hz
Test Mode :	TX n40 Mode(5G) /CH151, CH159		

Channel	Frequency (MHz)	6dB bandwidth (MHz)		Limit (kHz)	Result
		ANT A	ANT B		
Low	5755	36.499	36.366	500	Pass
High	5795	36.387	36.321	500	Pass

Note: A (B) Represent the value of antenna A and B, The worst data is A Antenna a , only shown Antenna A Plot.

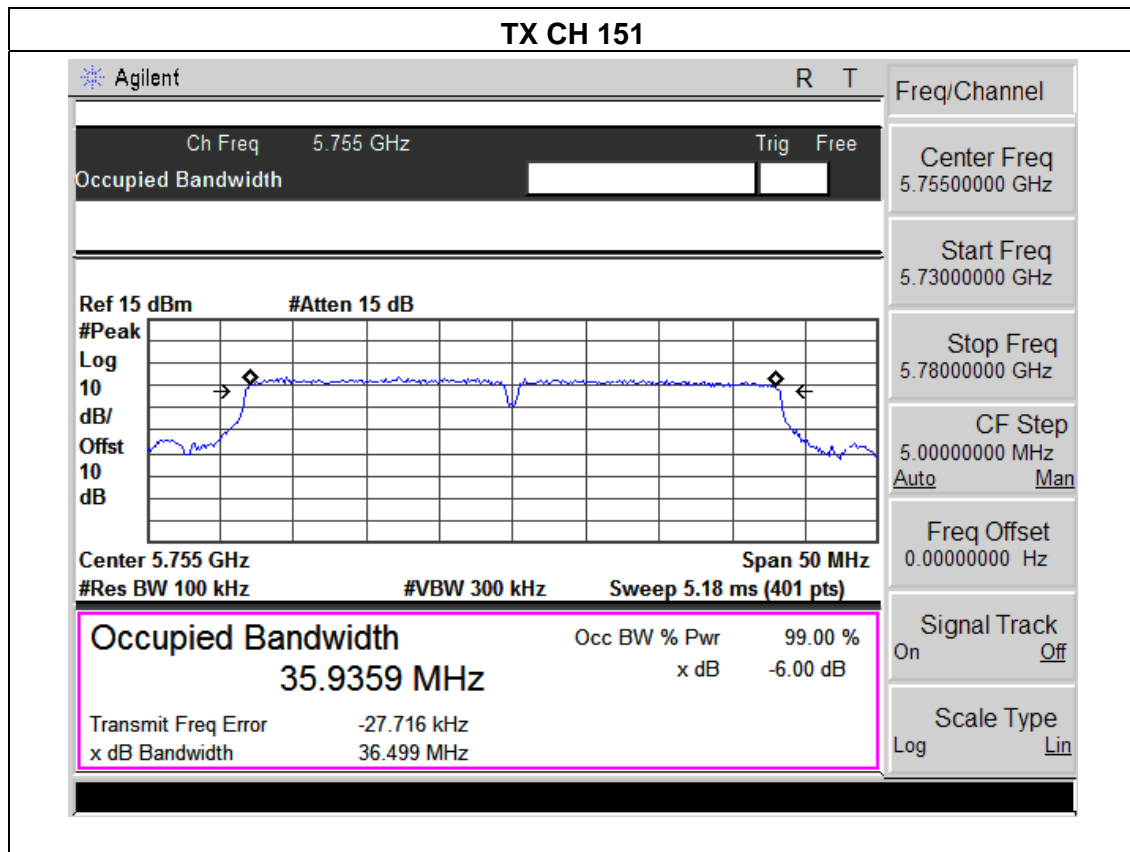

TX CH 159

Agilent
R T

Ch Freq 5.795 GHz

Occupied Bandwidth

Trig Free

Ref 15 dBm #Atten 15 dB

Center 5.795 GHz Span 50 MHz

#Res BW 100 kHz #VBW 300 kHz Sweep 5.18 ms (401 pts)

Freq/Channel

Center Freq 5.79500000 GHz

Start Freq 5.77000000 GHz

Stop Freq 5.82000000 GHz

CF Step 5.00000000 MHz
Auto Man

Freq Offset 0.00000000 Hz

Signal Track On Off

Scale Type Log Lin

Occupied Bandwidth Occ BW % Pwr 99.00 %

35.9310 MHz x dB -6.00 dB

Transmit Freq Error -52.284 kHz

x dB Bandwidth 36.387 MHz

6. PEAK OUTPUT POWER TEST

6.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(b)(3)	Peak Output Power	1 watt or 30dBm	2400-2483.5	PASS


6.1.1 TEST PROCEDURE

- a. The EUT was directly connected to the Power meter

6.1.2 DEVIATION FROM STANDARD

No deviation.

6.1.3 TEST SETUP

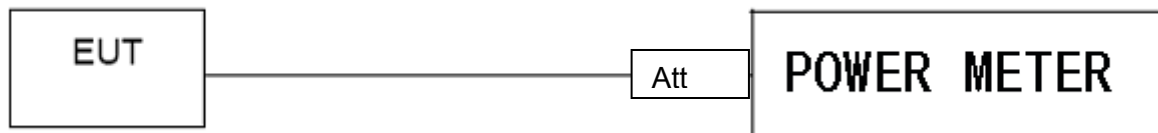

6.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

6.1.5 TEST RESULTS

EUT :	ScreenBeam Mini2 Wireless Display Receiver	Model Name :	SBWD60A
Temperature :	25 °C	Relative Humidity :	60%
Pressure :	1012 hPa	Test Voltage :	DC 5V From adapter AC120V/60Hz
Test Mode :	TX b/g/n(20M, 40M) Mode		

Test Channel	Frequency (MHz)	Maximum output power. Antenna port				Total Power		LIMIT (dBm)
		(PK) (dBm)		(AV) (dBm)		(PK) (dBm)	(AV) (dBm)	
		ANT A	ANT B	ANT A	ANT B	dBm	dBm	
TX 802.11b Mode								
CH01	2412	9.65	9.13	6.43	6.11	12.41	9.28	26.94
CH06	2437	9.76	9.42	6.55	6.18	12.55	9.32	26.94
CH11	2462	9.34	9.47	6.31	6.02	12.42	9.18	26.94
TX 802.11g Mode								
CH01	2412	8.85	8.32	5.82	5.26	11.60	8.56	26.94
CH06	2437	8.74	8.48	5.69	5.42	11.68	8.63	26.94
CH11	2462	8.72	8.50	5.65	5.33	11.62	8.50	26.94
TX 802.11n/20M Mode								
CH01	2412	7.94	7.79	5.07	4.89	10.88	7.99	26.94
CH06	2437	7.90	7.61	5.16	4.93	10.79	8.01	26.94
CH11	2462	7.98	7.75	5.25	4.99	10.88	8.13	26.94
TX 802.11n/40M Mode								
CH03	2422	6.83	6.69	4.33	3.68	9.77	7.03	26.94
CH06	2437	6.67	6.64	4.29	3.56	9.75	6.97	26.94
CH09	2452	6.74	6.49	4.17	3.55	9.63	6.88	26.94

For 2.4G mode , Limit =30-9.06+6=26.94dBm for output power.

EUT :	ScreenBeam Mini2 Wireless Display Receiver	Model Name :	SBWD60A
Temperature :	25 °C	Relative Humidity :	60%
Pressure :	1012 hPa	Test Voltage :	DC 5V From adapter AC120V/60Hz
Test Mode :	TX a/n(5G) Mode		

Test Channel	Frequency (MHz)	Maximum output power. Antenna port				Total Power		LIMIT dBm
		(PK) (dBm)		(AV) (dBm)		(PK)	(AV)	
		ANT A	ANT B	ANT A	ANT B	dBm	dBm	
TX 802.11a Mode								
CH149	5745	10.16	9.63	7.25	6.85	12.91	10.06	26.94
CH157	5785	10.21	9.63	7.37	6.74	12.91	10.01	26.94
CH165	5825	10.09	9.59	7.28	6.72	12.86	10.02	26.94
TX 802.11 n20 Mode								
CH149	5745	9.12	8.65	6.38	5.42	11.90	8.94	26.94
CH157	5785	9.13	8.57	6.43	5.53	11.86	8.99	26.94
CH165	5825	9.17	8.42	6.29	5.44	11.82	8.90	26.94
TX 802.11 n40 Mode								
CH151	5755	8.16	7.77	5.27	4.23	10.98	7.79	26.94
CH159	5795	8.08	7.53	5.13	4.37	10.87	7.85	26.94

For 5G mode, Limit = 30 - 9.06 + 6 = 26.94 dBm for output power

7. 100 KHZ BANDWIDTH OF FREQUENCY BAND EDGE

APPLICABLE STANDARD

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).


TEST PROCEDURE

- a) Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- b) Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
- c) Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
- d) Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
- e) Repeat above procedures until all measured frequencies were complete.

7.1 DEVIATION FROM STANDARD

No deviation.

7.2 TEST SETUP

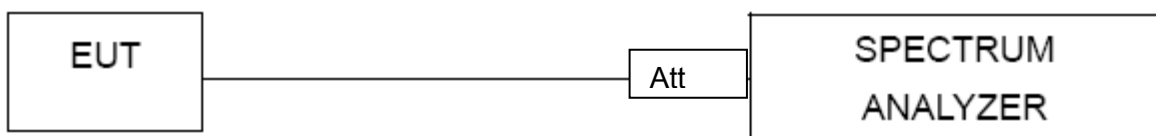

7.3 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

7.4 TEST RESULTS

EUT :	ScreenBeam Mini2 Wireless Display Receiver	Model Name :	SBWD60A
Temperature :	25 °C	Relative Humidity :	56%
Pressure :	1012 hPa	Test Voltage :	DC 5V From adapter AC120V/60Hz

Frequency Band	Delta Peak to band emission (dBc)	> Limit (dBc)	Result
802.11b mode			
Left-band	37.99	20	Pass
Right-band	49.81	20	Pass
802.11g mode			
Left-band	29.28	20	Pass
Right-band	41.06	20	Pass
802.11n-HT20 mode			
Left-band	29.57	20	Pass
Right-band	40.65	20	Pass
802.11n-HT40 mode			
Left-band	31.48	20	Pass
Right-band	37.95	20	Pass

Frequency Band	Delta Peak to band emission (dBc)	> Limit (dBc)	Result
802.11a mode			
Left-band	44.28	20	Pass
Right-band	43.31	20	Pass
802.11n20 mode			
Left-band	42.92	20	Pass
Right-band	42.41	20	Pass
802.11n40 mode			
Left-band	40.30	20	Pass
Right-band	42.60	20	Pass


Radiated band edge:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type	Comment
802.11b							
2390	57.98	-13.06	44.92	74	-29.08	peak	Vertical
2390	53.13	-13.06	40.07	74	-33.93	peak	Horizontal
2483.5	58.35	-12.78	45.57	74	-28.43	peak	Vertical
2483.5	54.44	-12.78	41.66	74	-32.34	peak	Horizontal
802.11g							
2390	55.12	-13.06	42.06	74	-31.94	peak	Vertical
2390	51.43	-13.06	38.37	74	-35.63	peak	Horizontal
2483.5	56.33	-12.78	43.55	74	-30.45	peak	Vertical
2483.5	52.51	-12.78	39.73	74	-34.27	peak	Horizontal
802.11n (20)							
2390	52.45	-13.06	39.39	74	-34.61	peak	Vertical
2390	50.87	-13.06	37.81	74	-36.19	peak	Horizontal
2483.5	57.96	-12.78	45.18	74	-28.82	peak	Vertical
2483.5	54.33	-12.78	41.55	74	-32.45	peak	Horizontal
802.11n (40)							
2390	52.09	-13.06	39.03	74	-34.97	peak	Vertical
2390	49.93	-13.06	36.87	74	-37.13	peak	Horizontal
2483.5	54.31	-12.78	41.53	74	-32.47	peak	Vertical
2483.5	50.28	-12.78	37.5	74	-36.5	peak	Horizontal


Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type	Comment
802.11a-5G							
5725	54.23	-3.9	50.33	74	-23.67	peak	Vertical
5725	50.84	-3.9	46.94	74	-27.06	peak	Horizontal
5850	49.65	-4.05	45.6	74	-28.4	peak	Vertical
5850	54.73	-4.05	50.68	74	-23.32	peak	Horizontal
802.11n20-5G							
5725	54.86	-3.9	50.96	74	-23.04	peak	Vertical
5725	52.82	-3.9	48.92	74	-25.08	peak	Horizontal
5850	48.45	-4.05	44.4	74	-29.6	peak	Vertical
5850	53.93	-4.05	49.88	74	-24.12	peak	Horizontal
802.11n40-5G							
5725	53.11	-3.9	49.21	74	-24.79	peak	Vertical
5725	50.34	-3.9	46.44	74	-27.56	peak	Horizontal
5850	46.42	-4.05	42.37	74	-31.63	peak	Vertical
5850	51.25	-4.05	47.2	74	-26.8	peak	Horizontal

Note: Test method to see chapter 3.2 . When PK value is lower than the Average value limit, average not record.


802.11b: Band Edge, Right Side

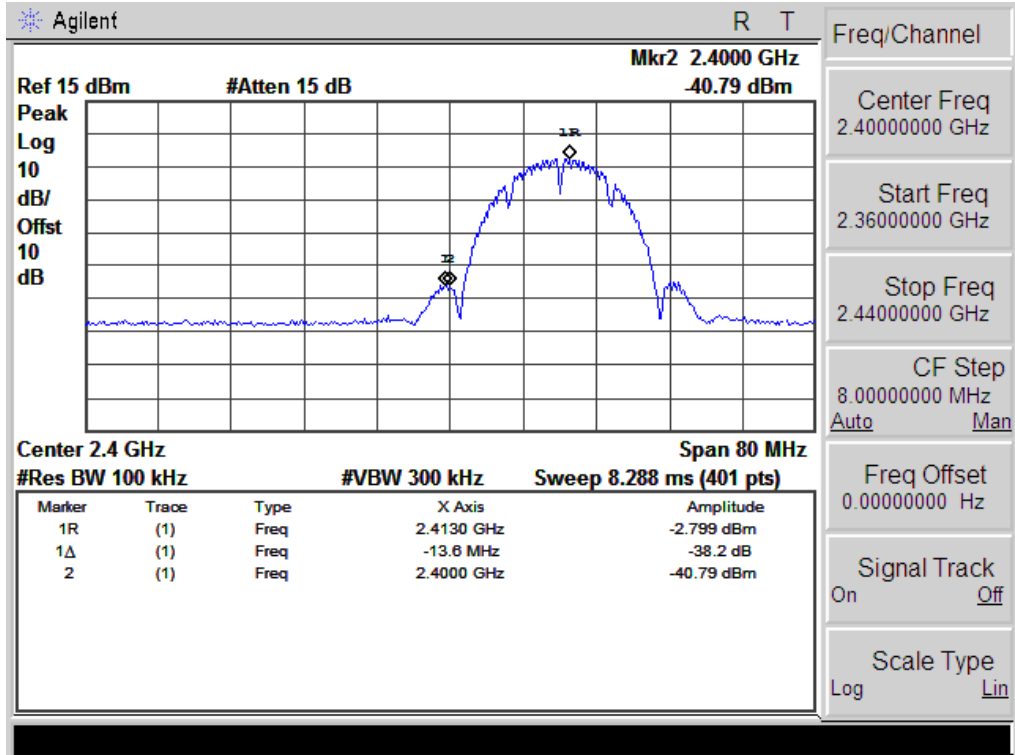


802.11b: Band Edge, Left Side

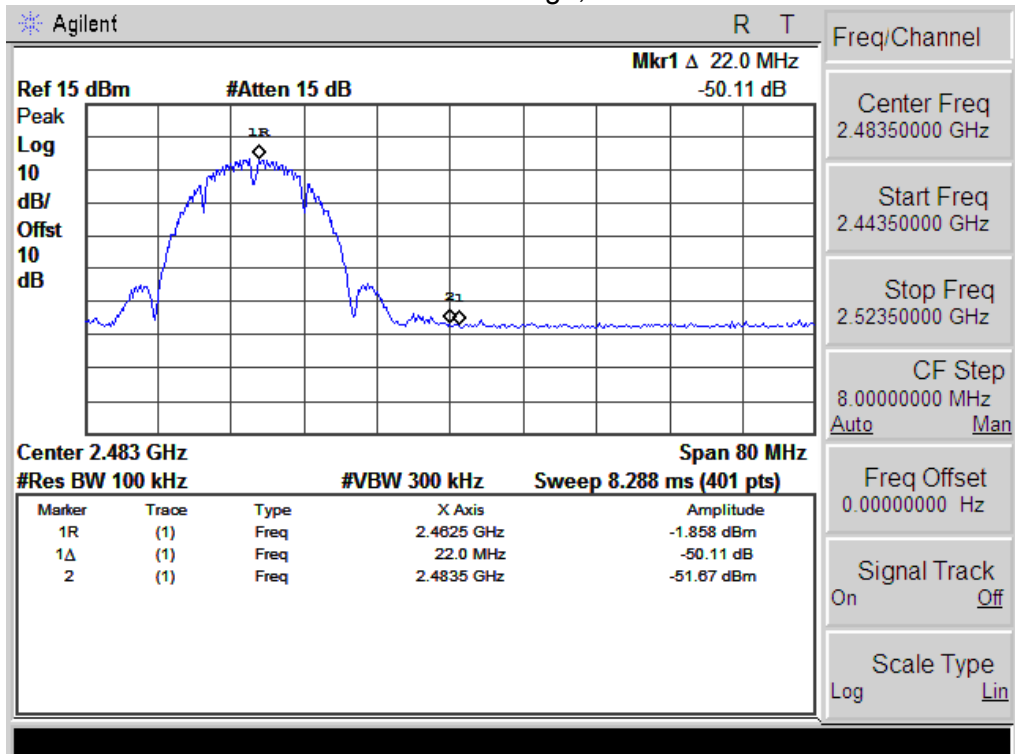


802.11g: Band Edge, Right Side

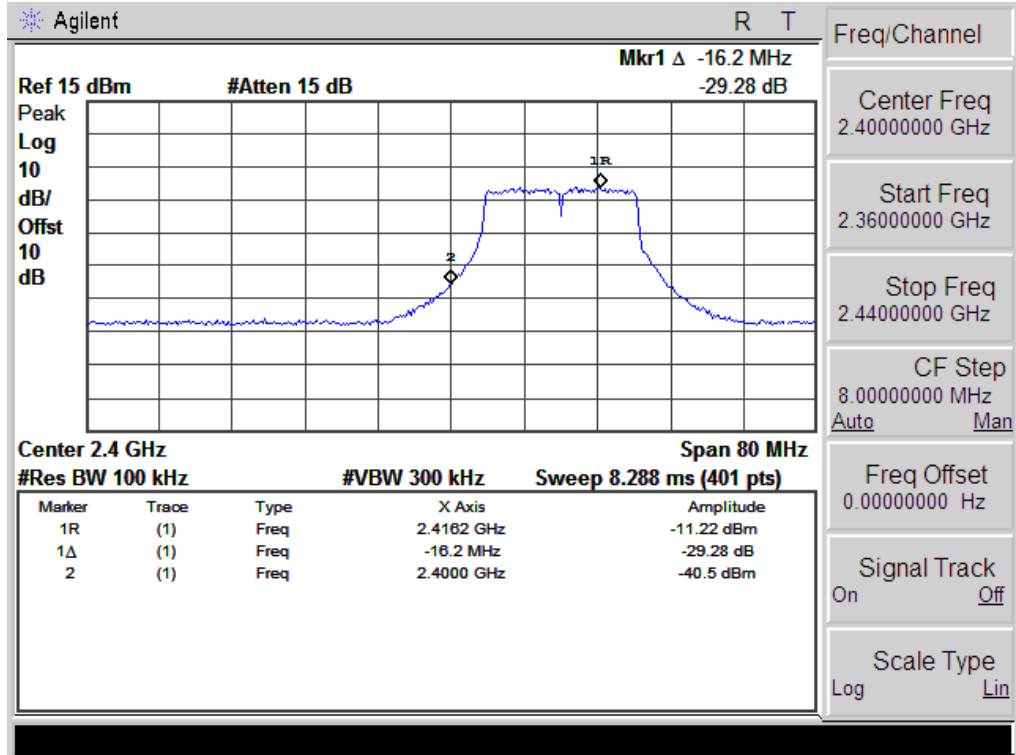


802.11g: Band Edge, Left Side

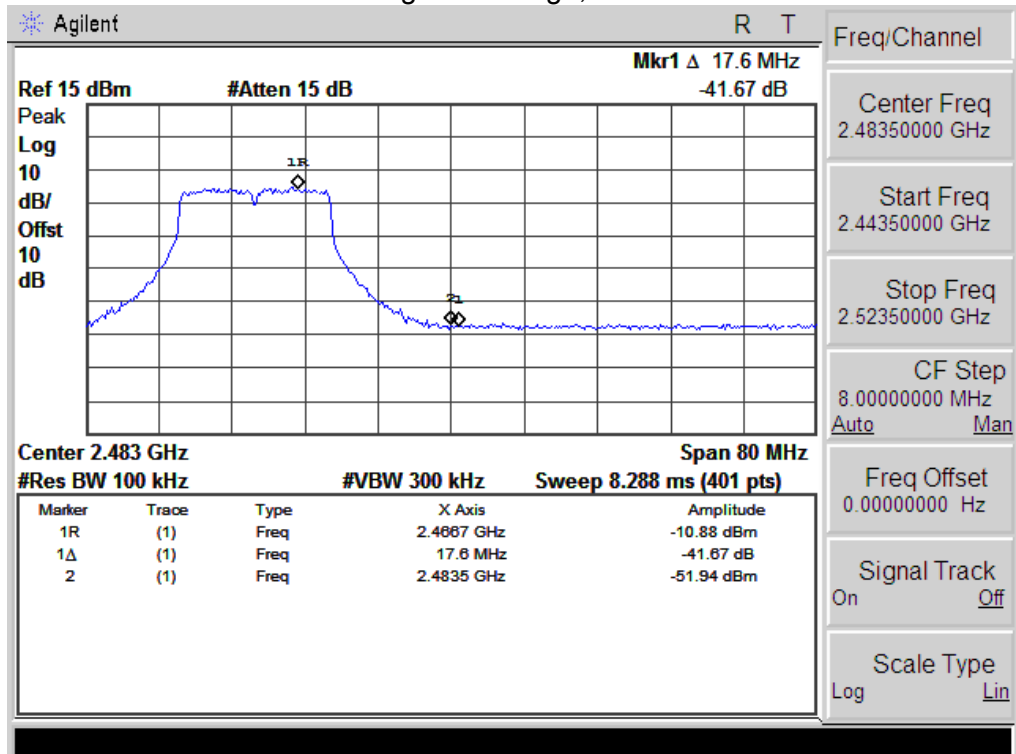


802.11n-HT20: Band Edge, Right Side

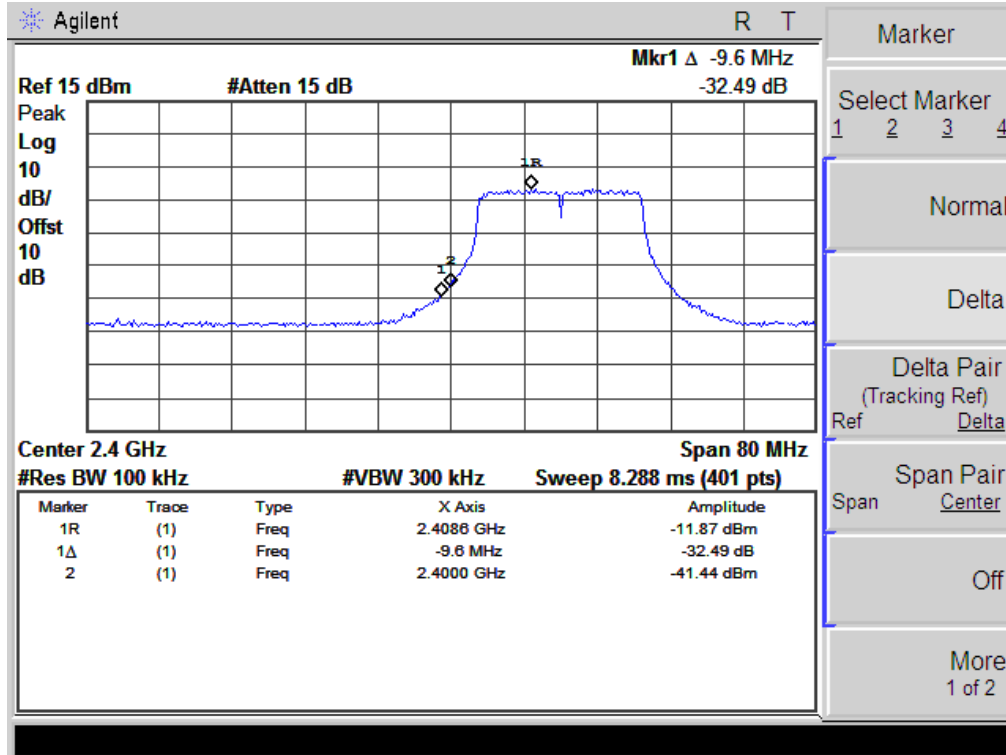


802.11n-HT20: Band Edge, Left Side

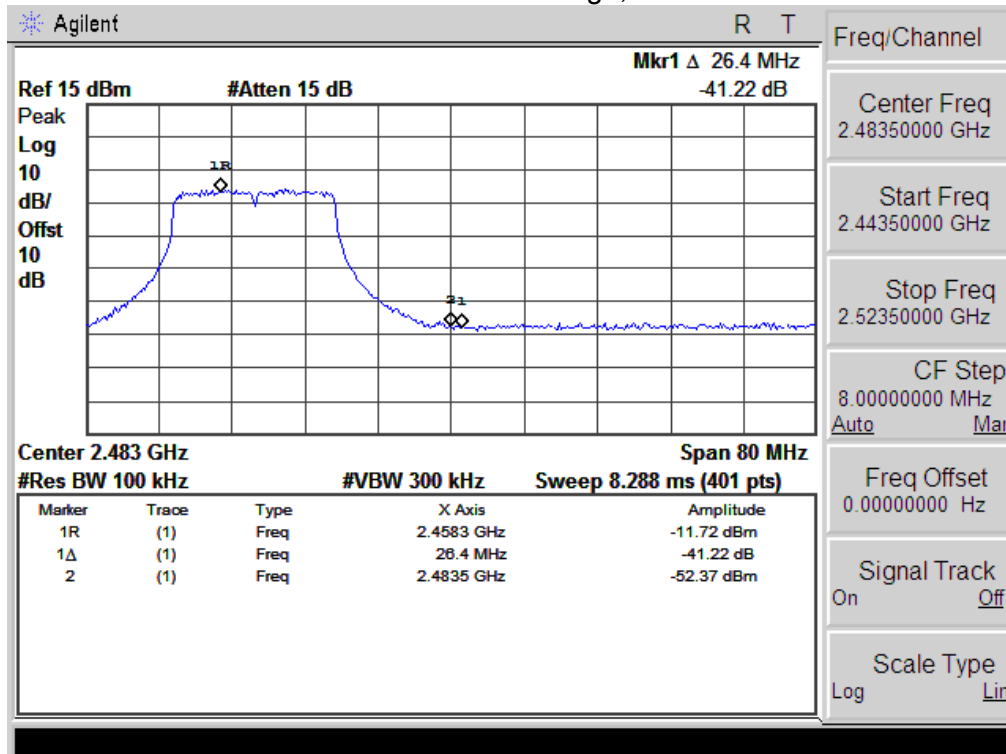


802.11n-HT40: Band Edge, Right Side

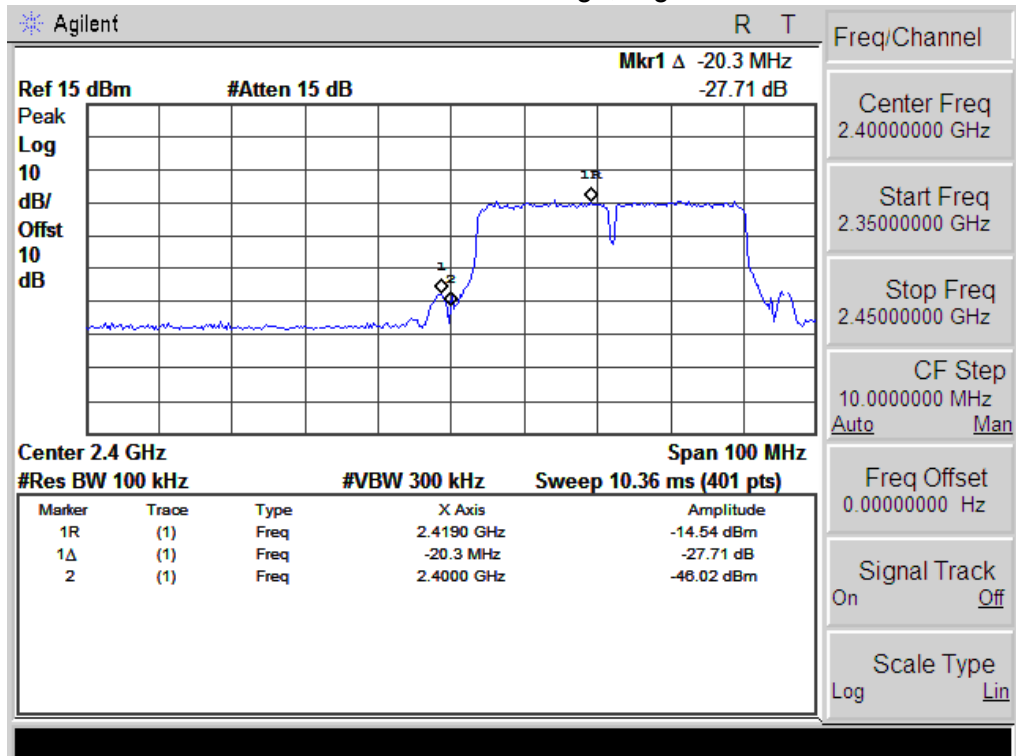


802.11n-HT40: Band Edge, Left Side

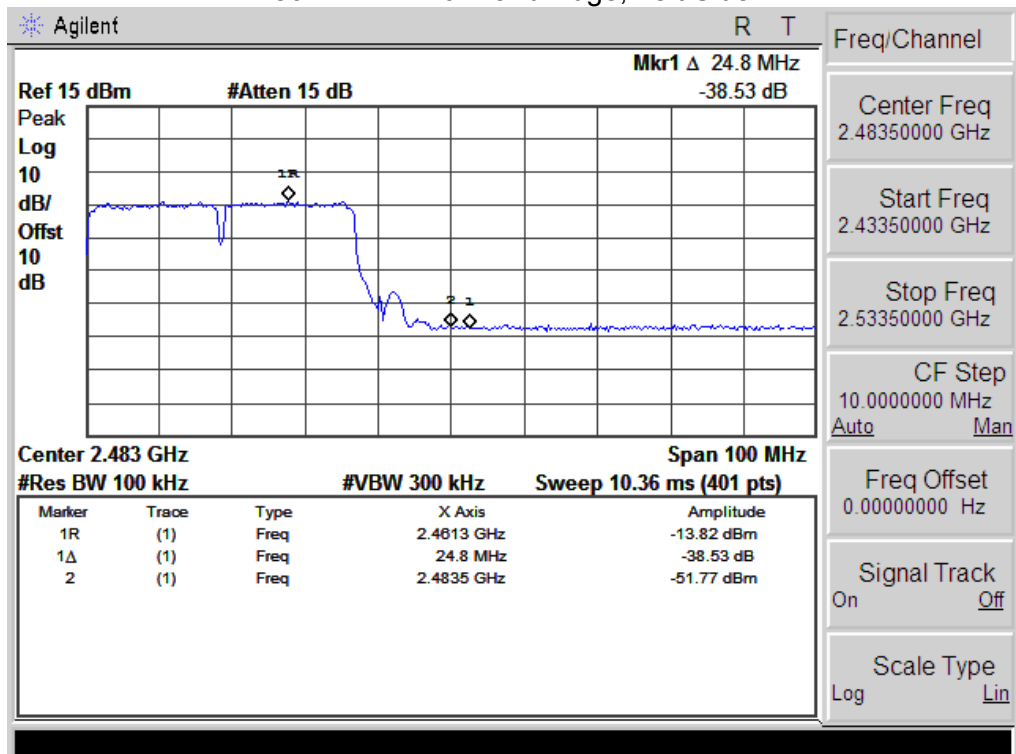


802.11a: Band Edge, Right Side

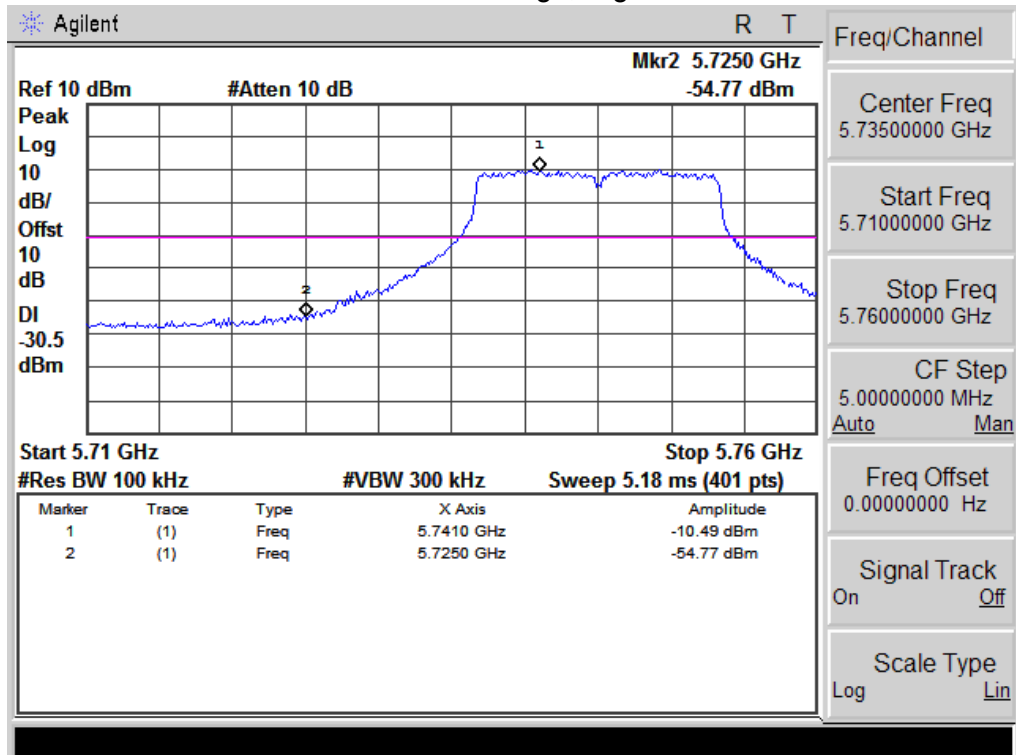


802.11a: Band Edge, Left Side

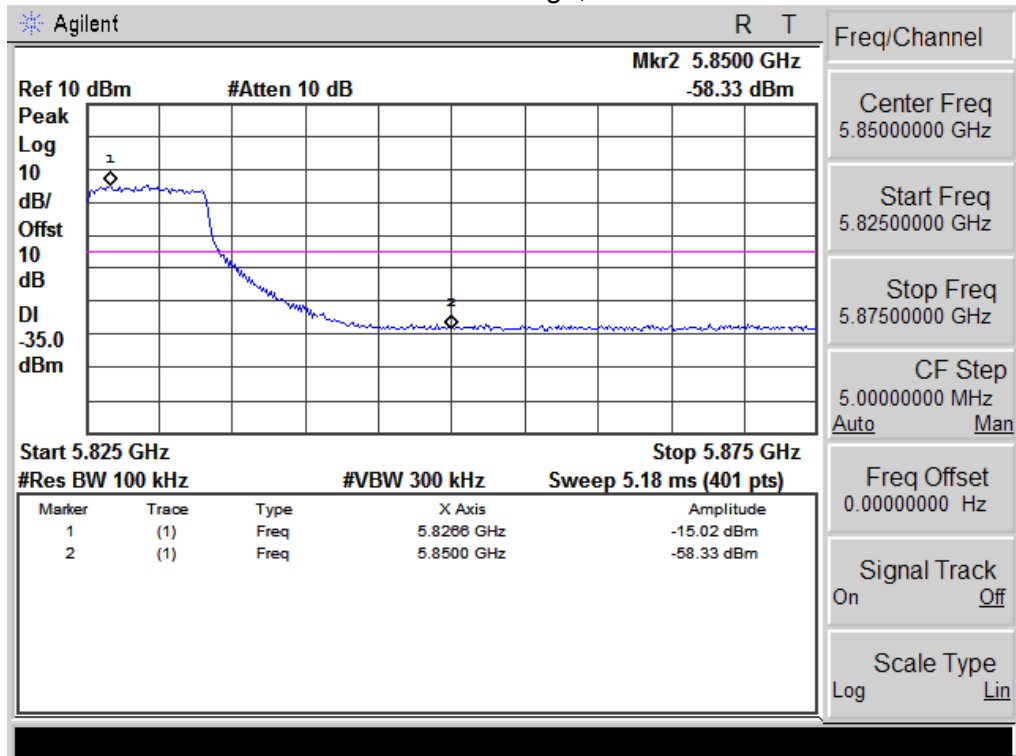


802.11n20(5G): Band Edge, Right Side

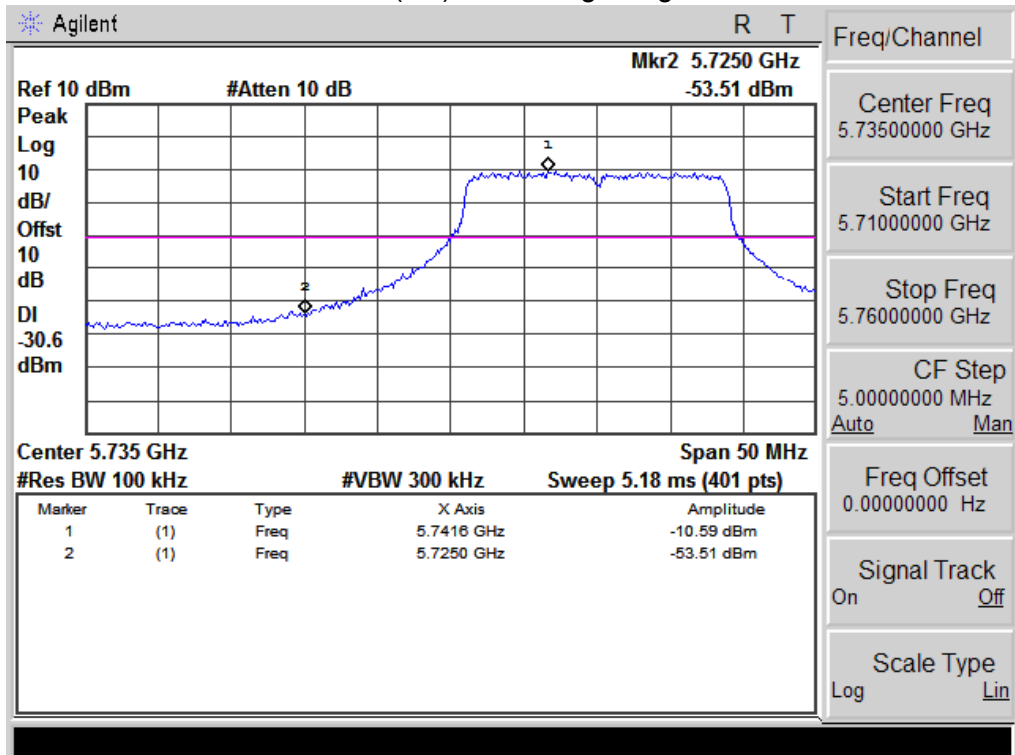


802.11n20(5G): Band Edge, Left Side

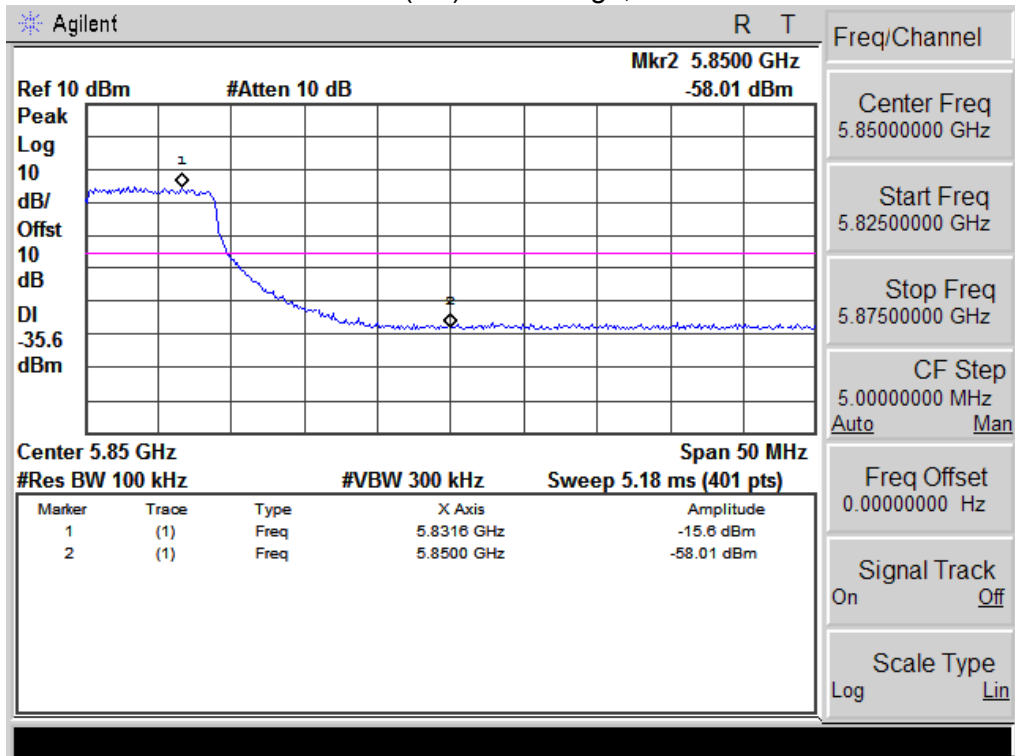

802.11n40(5G): Band Edge, Right Side

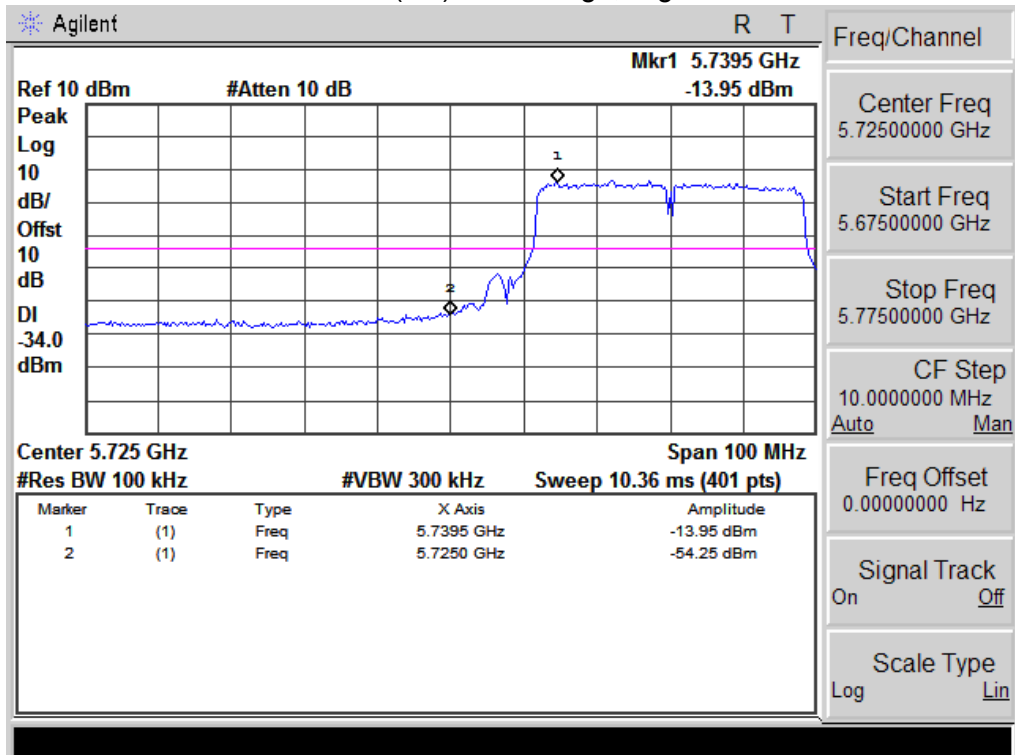

802.11n40(5G): Band Edge, Left Side

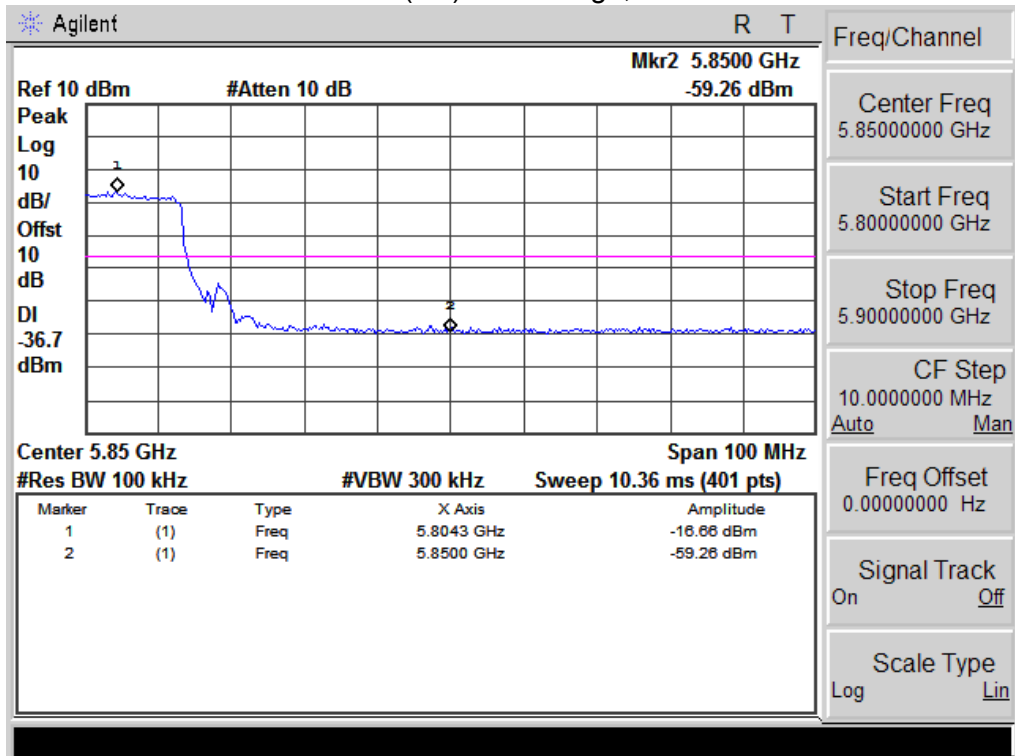

8. ANTENNA REQUIREMENT

8.1 STANDARD REQUIREMENT



15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

8.2 EUT ANTENNA

The EUT antenna is PCB antenna. It comply with the standard requirement.

9. EUT TEST PHOTO

Radiated Measurement Photos

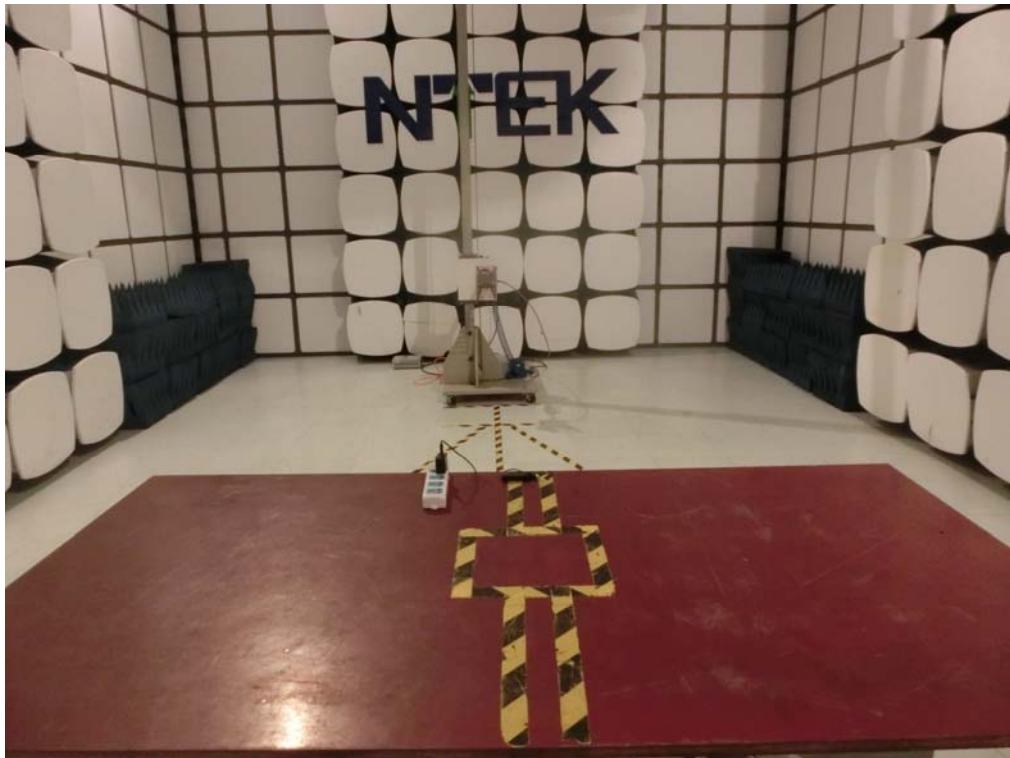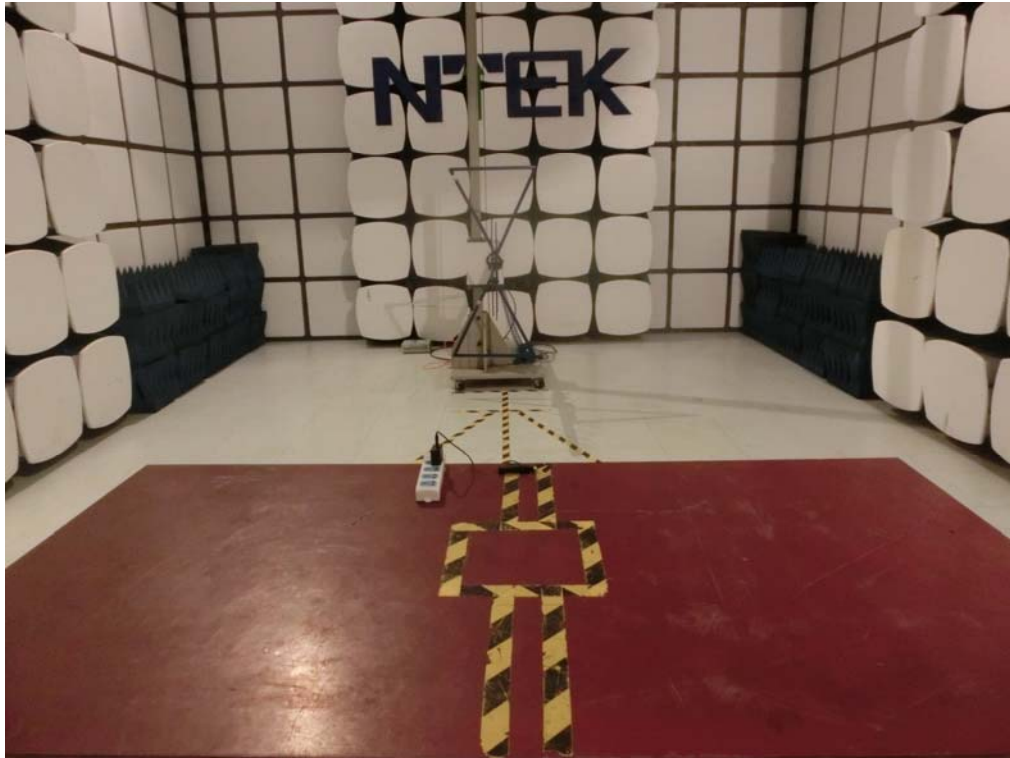

Conducted Measurement Photos

