Company: Actiontec Electronics Inc.

Test of: T3200M

To: FCC CFR 47 Part 15 Subpart E 15.407 (DFS Bands)

Report No.: ATEC14-U13\_Master Rev A

### **TEST REPORT**



## **TEST REPORT**



Test of: T3200M

to

To: FCC CFR 47 Part 15 Subpart E 15.407 (DFS Bands)

Test Report Serial No.: ATEC14-U13\_Master Rev A

As a result of the 6 Mbyte FCC file size limitation potentially large test reports require to be split into smaller components. This document is the Master document controlling Addendum reports as listed below. This Master document combined with the Addendums demonstrate compliance to the standard.

Master Document Number	Addendum Reports
ATEC14-U13_Master	ATEC14-U13_Conducted
	ATEC14-U13_Radiated
	ATEC14-U13_DFS
	ATEC14-U2 (FCC Part 15B & ICES_003)

This report supersedes: NONE

Applicant: Actiontec Electronics Inc.

760 N Mary Avenue

Sunnyvale, California 94085

USA

Product Function: 802.11ac Bonded VDSL2 Modem

Gateway with MoCA2.0

Issue Date: 1st April 2016

## This Test Report is Issued Under the Authority of:

### MiCOM Labs, Inc.

575 Boulder Court Pleasanton California 94566 USA

Phone: +1 (925) 462-0304 Fax: +1 (925) 462-0306 www.micomlabs.com



MiCOM Labs is an ISO 17025 Accredited Testing Laboratory



**Title:** Actiontec Electronics Inc. T3200M **To:** FCC CFR 47 15.407 & RSS-247

Serial #: ATEC14-U13\_Master (DFS bands)

Issue Date: 1st April 2016
Page: 3 of 28

## **Table of Contents**

٦.	ACCREDITATION, LISTINGS & RECOGNITION	4
	1.1. Testing Accreditation	4
	1.2. Recognition	5
	1.3. Product Certification	
	DOCUMENT HISTORY	
	TEST RESULT CERTIFICATE	
4.	REFERENCES AND MEASUREMENT UNCERTAINTY	9
	4.1. Normative References	9
	4.2. Test and Uncertainty Procedure	
5.	PRODUCT DETAILS AND TEST CONFIGURATIONS	.11
	5.1. Technical Details	.11
	5.2. Scope Of Test Program	.12
	5.3. Equipment Model(s) and Serial Number(s)	.13
	5.4. Antenna Details	.13
	5.5. Cabling and I/O Ports	.13
	5.6. Test Configurations	.14
	5.7. Equipment Modifications	
	5.8. Deviations from the Test Standard	.14
	TEST SUMMARY	
7.	TEST EQUIPMENT CONFIGURATION(S)	.16
	7.1. Conducted	
	7.2. DFS - Conducted	
	7.3. Radiated Spurious Emission Test Set-up > 1 GHz	
	7.4. Digital Emissions Test Set-up (0.03 – 1 GHz)	
	7.5. ac Wireline Emission Test Set-up	
8.	MEASUREMENT AND PRESENTATION OF TEST DATA	.27



**Title:** Actiontec Electronics Inc. T3200M **To:** FCC CFR 47 15.407 & RSS-247

Serial #: ATEC14-U13\_Master (DFS bands)

Issue Date: 1st April 2016
Page: 4 of 28

## 1. ACCREDITATION, LISTINGS & RECOGNITION

### 1.1. Testing Accreditation

MiCOM Labs, Inc. is an accredited Electrical testing laboratory per the international standard ISO/IEC 17025:2005. The company is accredited by the American Association for Laboratory Accreditation (A2LA) <a href="https://www.a2la.org">www.a2la.org</a> test laboratory number 2381.01. MiCOM Labs test schedule is available at the following URL; <a href="http://www.a2la.org/scopepdf/2381-01.pdf">http://www.a2la.org/scopepdf/2381-01.pdf</a>





# **Accredited Laboratory**

A2LA has accredited

#### MICOM LABS

Pleasanton, CA

for technical competence in the field of

### **Electrical Testing**

This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2005

General requirements for the competence of testing and calibration laboratories. This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (refer to joint ISO-ILAC-IAF Communiqué dated 8 January 2009).



Presented this 4th day of February 2016.

Senior Director of Quality & Communications For the Accreditation Council

Certificate Number 2381.01 Valid to November 30, 2017

For the tests or types of tests to which this accreditation applies, please refer to the laboratory's Electrical Scope of Accreditation.



Issue Date: 1st April 2016

**Page:** 5 of 28

### 1.2. Recognition

MiCOM Labs, Inc has widely recognized wireless testing capabilities. Our international recognition includes Conformity Assessment Body designation by APEC MRA countries. MiCOM Labs test reports are accepted globally.

Country	Recognition Body	Status	Phase	Identification No.
USA	Federal Communications Commission (FCC)	TCB	-	US0159 Listing #: 102167
Canada	Industry Canada (IC)	FCB	APEC MRA 2	US0159 Listing #: 4143A-2 4143A-3
Japan	MIC (Ministry of Internal Affairs and Communication)	CAB	APEC MRA 2	RCB 210
	VCCI			A-0012
Europe	European Commission	NB	EU MRA	NB 2280
Australia	Australian Communications and Media Authority (ACMA)	CAB	APEC MRA 1	
Hong Kong	Office of the		APEC MRA 1	
Korea	Ministry of Information and Korea Communication Radio Research Laboratory (RRL)		APEC MRA 1	
Singapore	Infocomm Development		APEC MRA 1	US0159
National Communications Commission (NCC) Taiwan Bureau of Standards, Metrology and Inspection (BSMI)		CAB	APEC MRA 1	
Vietnam	Ministry of Communication (MIC)	CAB	APEC MRA 1	

EU MRA - European Union Mutual Recognition Agreement.

NB - Notified Body

APEC MRA – Asia Pacific Economic Community Mutual Recognition Agreement. Recognition agreement under which test lab is accredited to regulatory standards of the APEC member countries.

Phase I - recognition for product testing

Phase II – recognition for both product testing and certification



Issue Date: 1st April 2016

Page: 6 of 28

### 1.3. Product Certification

MiCOM Labs, Inc. is an accredited Product Certification Body per the international standard ISO/IEC 17065:2012. The company is accredited by the American Association for Laboratory Accreditation (A2LA) <a href="https://www.a2la.org">www.a2la.org</a> test laboratory number 2381.02. MiCOM Labs test schedule is available at the following URL; <a href="http://www.a2la.org/scopepdf/2381-02.pdf">http://www.a2la.org/scopepdf/2381-02.pdf</a>



# **Accredited Product Certification Body**

A2LA has accredited

### MICOM LABS

Pleasanton, CA

This product certification body is accredited in accordance with the recognized International Standard ISO/IEC 17065:2012 Requirements for bodies certifying products, processes and services. This accreditation demonstrates technical competence for a defined scope and the operation of a management system.



Presented this 4th day of February 2016.

Senior Director of Quality & Communications For the Accreditation Council

Certificate Number 2381.02 Valid to November 30, 2017

For the product certification schemes to which this accreditation applies, please refer to the organization's Product Certification Scope of Accreditation.

United States of America – Telecommunication Certification Body (TCB)

Industry Canada - Certification Body, CAB Identifier - US0159

Europe - Notified Body (NB), NB Identifier - 2280

Japan – Recognized Certification Body (RCB), RCB Identifier - 210



Issue Date: 1st April 2016

**Page:** 7 of 28

# 2. **DOCUMENT HISTORY**

	Document History					
Revision	Date	Comments				
Draft	22 <sup>nd</sup> March 2016					
Rev A	1 <sup>st</sup> April 2016	Initial release.				

	Released Document History						
Master Revision	Addendum Revision	Date	Comments				
	Rev A Conducted	1st April 2016	Initial release.				
Rev A	Rev A Radiated	1st April 2016	Initial release.				
	Rev A FCC Part 15B & ICES-003	1st April 2016	Initial release.				

In the above table the latest report revision will replace all earlier versions.



Issue Date: 1st April 2016

**Page:** 8 of 28

## 3. TEST RESULT CERTIFICATE

Manufacturer: Actiontec Electronics Inc

760 N Mary Avenue

Sunnyvale

California 94085 USA

Model: T3200M

Type Of Equipment: 802.11 ab/g/n/ac

S/N's: GTBA6040400218

GTBA6040400221

**Test Date(s):** 29 Feb. – 8th March 2016

Tested By: MiCOM Labs, Inc.

575 Boulder Court

Pleasanton

California 94566 USA

**Telephone:** +1 925 462 0304

Fax: +1 925 462 0304

Website: www.micomlabs.com

### STANDARD(S)

FCC CFR 47 Part 15 Subpart E 15.407

#### **TEST RESULTS**

**EQUIPMENT COMPLIES** 

MiCOM Labs, Inc. tested the equipment mentioned in accordance with the requirements set forth in the above standards. Test results indicate that the equipment tested is capable of demonstrating compliance with the requirements as documented within this report.

#### Notes:

- 1. This document reports conditions under which testing was conducted and the results of testing performed.
- 2. Details of test methods used have been recorded and kept on file by the laboratory.
- 3. Test results apply only to the item(s) tested.

Approved & Released for MiCOM Labs, Inc. by:

1

TESTING CERT #2381.01

Graeme Grieve

Quality Manager MiCOM Labs, Inc.

Gordon Hurst

President & CEO MiCOM Labs, Inc.



Issue Date: 1st April 2016
Page: 9 of 28

## 4. REFERENCES AND MEASUREMENT UNCERTAINTY

## 4.1. Normative References

REF.	PUBLICATION	YEAR	TITLE
I	KDB 662911	Oct 31 2013	Guidance for measurement of output emission of devices that employ single transmitter with multiple outputs or systems with multiple transmitters operating simultaneously in the same frequency band
II	KDB 905462 D07 v01	10th June 2015	Test guidance to demonstrate compliance for U-NII devices subject to DFS requirements.
III	KDB 926956 DO1 v01r02	17th October 2014	U-NII Device Transition Plan
IV	KDB 789033 D02 v01	6th June 2014	General UNII Test Procedures New Rules V01
V	A2LA	June 2015	R105 - Requirement's When Making Reference to A2LA Accreditation Status
VI	ANSI C63.10	2013	American National Standard for Testing Unlicensed Wireless Devices
VII	ANSI C63.4	2014	American National Standards for Methods of Measurement of Radio-Noise Emissions from Low- Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz
VIII	CISPR 22	2008	Information technology equipment - Radio disturbance characteristics - Limits and methods of measurement
IX	ETSI TR 100 028	2001-12	Parts 1 and 2 Electromagnetic compatibility and Radio Spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics
X	FCC 06-96	Jun 3 2006	Memorandum Opinion and Order
ΧI	FCC 47 CFR Part 15.407	2014	Radio Frequency Devices; Subpart E –Unlicensed National Information Infrastructure Devices
XII	ICES-003	Issue 5 2012	Spectrum Management and Telecommunications; Interference-Causing Equipment Standard. Information Technology Equipment (ITE) – Limits and methods of measurement.
XIII	M 3003	Edition 3 Nov. 2012	Expression of Uncertainty and Confidence in Measurements
XIV	RSS-247 Issue 1	May 2015	Digital Transmission Systems (DTSs), Frequency Hopping System (FHSs) and Licence-Exempt Local Area Network (LE-LEN) Devices
XV	RSS-Gen Issue 4	November 2014	General Requirements and Information for the Certification of Radiocommunication Equipment
XVI	KDB 644545 D03 v01	August 14th 2014	Guidance for IEEE 802.11ac New Rules
XVII	FCC 47 CFR Part 2.1033	2014	FCC requirements and rules regarding photographs and test setup diagrams.



Issue Date: 1st April 2016
Page: 10 of 28

## 4.2. Test and Uncertainty Procedure

Conducted and radiated emission measurements were conducted in accordance with American National Standards Institute ANSI C63.4, listed in the Normative References section of this report.

Measurement uncertainty figures are calculated in accordance with ETSI TR 100 028 Parts 1 and 2.

Measurement uncertainties stated are based on a standard uncertainty multiplied by a coverage factor k = 2, providing a level of confidence of approximately 95 % in accordance with UKAS document M 3003 listed in the Normative References section of this report.



Issue Date: 1st April 2016
Page: 11 of 28

## 5. PRODUCT DETAILS AND TEST CONFIGURATIONS

## 5.1. Technical Details

Purpose: Test of the Actiontec Electronics Inc. T3200M to FCC CFR 47 Part 15 Subpart E 15.407. Radio Frequency Devices; Subpart E –Unlicensed National Information Infrastructure Devices Applicant: Actiontec Electronics Inc. 760 N Mary Avenue, Sunnyvale California 94085 USA As Applicant: As Applicant: MicOM Labs, Inc. 575 Boulder Court, Pleasanton California 94566 USA Test report reference number: Date EUT received: 29 <sup>th</sup> February 2016 Standard(s) applied: FCC CFR 47 Part 15 Subpart E 15.407 and RSS-247 Dates of test (from - to): No of Units Tested: Type of Equipment: Product Family Name: Model(s): Type of Equipment: Primary function of equipment: Becarder Frequency Range(s): Primary function of equipment: Secondary function of equipment: Type of Modulation: FUT Modes of Operation: CEUT Modes of Operation: FUT	Details	Description			
Radio Frequency Devices; Subpart E –Unlicensed National Information Infrastructure Devices  Applicant: Actiontec Electronics Inc., 760 N Mary Avenue, Sunnyvale California 94085 USA  Manufacturer: As Applicant  Laboratory performing the tests: NicCoM Labs, Inc., 575 Boulder Court, Pleasanton California 94566 USA  Test report reference number: ATEC14-U13_Master Rev A  Date EUT received: Protective Standard(s) applied: FCC CFR 47 Part 15 Subpart E 15.407 and RSS-247  Dates of test (from - to): 9th Feb – 8th Mar 2016  No of Units Tested: 7th Earth Model(s): T3200M  Report Equipment: 802.11 arb/g/n/ac  Product Family Name: Actiontec  Model(s): T3200M  Location for use: Indoor  Declared Frequency Range(s): 5250 - 5350 MHz; 5470 - 5725 MHz;  Primary function of equipment: 802.11ac Bonded VDSL2 Modem Gateway with MoCA2.0  Secondary function of equipment: Pesidential Gateway  Type of Modulation: 5250 - 5350 MHz: 802.11ar 802.11ac-80; 802.11n HT-20; 802.11n HT-40; 5470 - 5725 MHz: 802.11a; 802.11ac-80; 802.11n HT-20; 802.11n HT-40; 5470 - 5725 MHz: +23 dBm  Transmit/Receive Operation: Transceiver - Half Duplex  Rated Input Voltage and Current: AC/ DC adaptor (adaptor sold with unit) 12Vdc  Operating Temperature Range: Declared Range 0°C to 45°C  ITU Emission Designator: T3200M: 57.2mm x 184.2mm x 241.3mm / 2.3" x 7.3" x 9.5" (W x D x H)  Weight: 0.95 pounds  Hardware Rev: AM1	Purpose:	Test of the Actiontec Electronics Inc. T3200M to FCC CFR 47 Part			
Information Infrastructure Devices Applicant: Actiontec Electronics Inc. 760 N Mary Avenue, Sunnyvale California 94085 USA Manufacturer: As Applicant Laboratory performing the tests: MicOM Labs, Inc. 575 Boulder Court, Pleasanton California 94566 USA Test report reference number: ATEC14-U13_Master Rev A Date EUT received: 29" February 2016 Standard(s) applied: FCC CFR 47 Part 15 Subpart E 15.407 and RSS-247 Dates of test (from - to): 29 th Feb – 8" Mar 2016 No of Units Tested: 2 Type of Equipment: Product Family Name: Actiontec Model(s): T3200M Location for use: Indoor Declared Frequency Range(s): Primary function of equipment: Type of Modulation: Secondary function of equipment: Type of Modulation: FUT Modes of Operation: S250 - 5350 MHz: 802.11a; 802.11ac-80; 802.11n HT-20; 802.11n HT-40; 5470 - 5725 MHz: 802.11a; 802.11ac-80; 802.11n HT-20; 802.11n HT-40; Declared Nominal Output Power (Ave): S250 - 5350 MHz: +23 dBm 5470 - 5725 M					
Applicant: Manufacturer: Abopticant: Aboratory performing the tests: Baboratory performing the tests: 2016 Baborator					
Manufacturer Laboratory performing the tests:  Laboratory performing the tests:  Manufacturer  Laboratory performing the tests:  MicOM Labs, Inc. 575 Boulder Court, Pleasanton California 94566 USA  Test report reference number: ATEC14-U13_Master Rev A  29th February 2016  Standard(s) applied: CC CFR 47 Part 15 Subpart E 15.407 and RSS-247  Dates of test (from - to): Product Family Name: Actiontec Model(s): T3200M Location for use: Model(s): Primary function of equipment: Secondary function of equipment: But Modes of Operation: EUT Modes of Operation: EUT Modes of Operation: Foreign Advanced Reveron Polyment (Ave): Search Nominal Output Power (Ave): Foreign Advanced Reveron Polymerature Range: ACI Declared Nominal Output Power (Ave): Foreign Advanced Reveron Polymerature Range: ACI Declared Range of C to 45°C  ITU Emission Designator:  Requipment Dimensions: Captage Advanced Range of C to 45°C  Weight: Despendent Red Manual Reveron Range of C to 45°C  Requipment Dimensions: Captage Advanced Range of C to 45°C Captage Advanced Range of C to 45°C Captage Requipment Dimensions: Captage Reveron Range of C to 45°C Captage Range R	Accline				
Manufacturer: As Applicant Laboratory performing the tests: MiCOM Labs, Inc. 575 Boulder Court, Pleasanton California 94566 USA  Test report reference number: Date EUT received: 25° February 2016 Standard(s) applied: FCC CFR 47 Part 15 Subpart E 15.407 and RSS-247  Dates of test (from - to): 29° February 2016  No of Units Tested: Product Family Name: Actiontec  Model(s): T3200M Location for use: Indoor Declared Frequency Range(s): 5250 - 5350 MHz; 5470 - 5725 MHz; Primary function of equipment: Secondary function of equipment: Type of Modulation: OFDM  EUT Modes of Operation: S02.11a: Bonded VDSL2 Modem Gateway with MoCA2.0  EUT Modes of Operation: S02.11a: 802.11ac-80; 802.11n HT-20; 802.11n HT-40; 5470 - 5725 MHz: 802.11a; 802.11ac-80; 802.11n HT-20; 802.11n HT-40; 5470 - 5725 MHz: 23 dBm  Transmit/Receive Operation: Tansmit/Receive Operation: AC/ DC adaptor (adaptor sold with unit) 12Vdc  Declared Input Voltage and Current: AC/ DC adaptor (adaptor sold with unit) 12Vdc  Declared Range 0°C to 45°C  ITU Emission Designator: B02.11a: 802.11a: 802.11a: 16M8D1D 802.11n HT-20: 18M1D1D 802.11n HT-20: 75MBD1D  Equipment Dimensions: T3200M: 57.2mm x 184.2mm x 241.3mm / 2.3" x 7.3" x 9.5" (W x D x H)  Weight: O.95 pounds  MM1	Applicant:				
Laboratory performing the tests:  Test report reference number:  Test report reference number:  Date EUT received:  Standard(s) applied:  Standard(s) applied:  FCC CFR 47 Part 15 Subpart E 15.407 and RSS-247  Dates of test (from - to):  Product Family Name:  Model(s):  Type of Equipment:  Bo2.11 a/b/g/n/ac  Product Family Name:  Model(s):  Primary function of equipment:  Secondary function of equipment:  Type of Modulation:  EUT Modes of Operation:  Bo2.11a; 802.11ac-80; 802.11n HT-20; 802.11n HT-40;  Declared Nominal Output Power (Ave):  Fransmit/Receive Operation:  Transmit/Receive Operation:  Transmit/Receive Operation:  Reted Input Voltage and Current:  Operating Temperature Range:  ITU Emission Designator:  Equipment Dimensions:  Equipment Dimensions:  Equipment Dimensions:  Weight:  Weight:  Os pounds  Hardware Rev:  AM1	Manufacturor				
Test report reference number:  Date EUT received: Standard(s) applied: FCC CFR 47 Part 15 Subpart E 15.407 and RSS-247  Dates of test (from - to): 29 th Feb - 8 Mar 2016  No of Units Tested: Type of Equipment: Model(s): Tozation for use: Declared Frequency Range(s): Primary function of equipment: Secondary function of equipment: Type of Modulation: FUT Modes of Operation: EUT Modes of Operation: Rated Input Voltage and Current: Rated Input Voltage and Current: AC/ DC adaptor (adaptor sold with unit) 12Vdc Operating Temperature Range: ITU Emission Designator: Equipment Dimensions: Equipment Dimensions: Fut Modes of Operation: Rated Input Demander Residential Rate Review A Residential Cale Range O'C to 45°C  ITU Emission Designator: Fut Modes Of Operation: Requipment Dimensions: Fut Declared Nominal Output Power (Ave): Fut Declared Range O'C to 45°C Fut Decl					
Test report reference number: ATEC14-U13_Master Rev A	Laboratory performing the tests.	575 Boulder Court Pleasanton California 94566 USA			
Date EUT received: 29" February 2016   Standard(s) applied: FCC CFR 47 Part 15 Subpart E 15.407 and RSS-247   Dates of test (from - to): 29 th Feb - 8" Mar 2016   No of Units Tested: 2	Test report reference number:				
Standard(s) applied: FCC CFR 47 Part 15 Subpart E 15.407 and RSS-247  Dates of test (from - to): 29 th Feb – 8 <sup>th</sup> Mar 2016  No of Units Tested: 2  Type of Equipment: Actiontec  Model(s): T3200M  Location for use: Indoor  Declared Frequency Range(s): 5250 - 5350 MHz; 5470 - 5725 MHz;  Primary function of equipment: Secondary function of equipment: Type of Modulation: OFDM  EUT Modes of Operation: S250 - 5350 MHz: 802.11a c-80; 802.11n HT-20; 802.11n HT-40; 5470 - 5725 MHz: 802.11a; 802.11ac-80; 802.11n HT-20; 802.11n HT-40; 5470 - 5725 MHz: 802.11a; 802.11ac-80; 802.11n HT-20; 802.11n HT-40; 5470 - 5725 MHz: +23 dBm  Transmit/Receive Operation: Transceiver - Half Duplex  Rated Input Voltage and Current: AC/ DC adaptor (adaptor sold with unit) 12Vdc  Operating Temperature Range: Declared Range 0°C to 45°C  ITU Emission Designator: Tasoum x 184.2mm x 241.3mm / 2.3" x 7.3" x 9.5" (W x D x H)  Weight: 0.95 pounds  Hardware Rev: AM1	•	_			
Dates of test (from - to):					
No of Units Tested: Type of Equipment: 802.11 a/b/g/n/ac					
Type of Equipment:   Ro2.11 a/b/g/n/ac					
Product Family Name:  Model(s): T3200M  Location for use: Indoor  Declared Frequency Range(s): Primary function of equipment: Secondary function of equipment: Type of Modulation: EUT Modes of Operation: EUT Modes of Operation: Felared Nominal Output Power (Ave): Transmit/Receive Operation: Rated Input Voltage and Current: Operating Temperature Range: ITU Emission Designator: ITU Emission Designator: Equipment Dimensions: Equipment Dimensions: Contact Actiontec T3200M  Rationtec T3200M  Residential Gateway  OFDM Sesidential Gateway					
Model(s): T3200M   Location for use: Indoor   Declared Frequency Range(s): 5250 - 5350 MHz; 5470 - 5725 MHz;   Primary function of equipment: Secondary function of equipment: Type of Modulation: OFDM   Residential Gateway   S250 - 5350 MHz: S250 MHz: S250 - 5350 MHz: S250 MHz: S2					
Location for use: Indoor  Declared Frequency Range(s): 5250 - 5350 MHz; 5470 - 5725 MHz;  Primary function of equipment: 802.11ac Bonded VDSL2 Modem Gateway with MoCA2.0  Secondary function of equipment: Residential Gateway  Type of Modulation: OFDM  EUT Modes of Operation: 5250 - 5350 MHz: 802.11ac 802.11ac 802.11n HT-20; 802.11n HT-40; 5470 - 5725 MHz: 802.11a; 802.11ac 80; 802.11n HT-20; 802.11n HT-40;  Declared Nominal Output Power (Ave): 5250 - 5350 MHz: 423 dBm 5470 - 5725 MHz: 423 dBm  Transmit/Receive Operation: Transceiver - Half Duplex  Rated Input Voltage and Current: AC/ DC adaptor (adaptor sold with unit) 12Vdc  Operating Temperature Range: Declared Range 0°C to 45°C  ITU Emission Designator: 802.11a: 16M8D1D 802.11n HT-20: 18M1D1D 802.11n HT-40: 36M7D1D 802.11ac-80: 75M8D1D  Equipment Dimensions: T3200M: 57.2mm x 184.2mm x 241.3mm / 2.3" x 7.3" x 9.5" (W x D x H)  Weight: 0.95 pounds  Hardware Rev: AM1					
Declared Frequency Range(s):  Primary function of equipment: Secondary function of equipment: Type of Modulation:  EUT Modes of Operation:  EUT Modes of Operation:  Declared Nominal Output Power (Ave):  Transmit/Receive Operation:  Rated Input Voltage and Current: Operating Temperature Range: ITU Emission Designator:  ITU Emission Designator:  Equipment Dimensions:  Transmary function of equipment: Bo2.11ac Bonded VDSL2 Modem Gateway with MoCA2.0  Residential Gateway  OFDM  S250 - 5350 MHz: 802.11ac-80; 802.11n HT-20; 802.11n HT-40; 5470 - 5725 MHz: 802.11ac-80; 802.11n HT-20; 802.11n HT-40; 5250 - 5350 MHz: +23 dBm 5470 - 5725 MHz: +23 d					
Primary function of equipment: Secondary function of equipment: Type of Modulation:  EUT Modes of Operation:  Secondary function of equipment: Type of Modulation:  EUT Modes of Operation:  Secondary function of equipment: Type of Modulation:  EUT Modes of Operation:  Secondary function of equipment: Type of Modulation:  Secondary function of equipment: Residential Gateway  OFDM  Secondary function of equipment Dimensions: Residential Gateway  OFDM  Secondary function of Path Pt-20; 802.11n HT-20; 802.11n HT-20; 802.11n HT-20; 802.11n HT-20; 16M8D1D  Secondary function of Path Pt-20; 16M8D1D  Secondary function					
Secondary function of equipment: Type of Modulation:  OFDM  EUT Modes of Operation:  EUT Modes of Operation:  S250 - 5350 MHz: 802.11a; 802.11ac-80; 802.11n HT-20; 802.11n HT-40; 5470 - 5725 MHz: 802.11a; 802.11ac-80; 802.11n HT-20; 802.11n HT-40;  Declared Nominal Output Power (Ave):  Transmit/Receive Operation:  Rated Input Voltage and Current: Operating Temperature Range:  ITU Emission Designator:  B02.11a: B02					
Type of Modulation: OFDM  EUT Modes of Operation: 5250 - 5350 MHz: 802.11a; 802.11a; 802.11a-80; 802.11n HT-20; 802.11n HT-40; 5470 - 5725 MHz: 802.11a; 802.11a-80; 802.11n HT-20; 802.11n HT-40;  Declared Nominal Output Power (Ave): 5250 - 5350 MHz: +23 dBm 5470 - 5725 MHz: +23 dBm  Transmit/Receive Operation: Transceiver - Half Duplex  Rated Input Voltage and Current: AC/ DC adaptor (adaptor sold with unit) 12Vdc  Operating Temperature Range: Declared Range 0°C to 45°C  ITU Emission Designator: 802.11a: 16M8D1D 802.11n HT-20: 18M1D1D 802.11n HT-40: 36M7D1D 802.11n HT-40: 36M7D1D 802.11ac-80: 75M8D1D  Equipment Dimensions: T3200M: 57.2mm x 184.2mm x 241.3mm / 2.3" x 7.3" x 9.5" (W x D x H)  Weight: 0.95 pounds  Hardware Rev: AM1		•			
EUT Modes of Operation: 5250 - 5350 MHz: 802.11a; 802.11a; 802.11a-80; 802.11n HT-20; 802.11n HT-40; 5470 - 5725 MHz: 802.11a; 802.11a; 802.11a-80; 802.11n HT-20; 802.11n HT-40;  Declared Nominal Output Power (Ave): 5250 - 5350 MHz: +23 dBm 5470 - 5725 MHz: +23 dBm  Transmit/Receive Operation: Transceiver - Half Duplex  Rated Input Voltage and Current: AC/ DC adaptor (adaptor sold with unit) 12Vdc  Operating Temperature Range: Declared Range 0°C to 45°C  ITU Emission Designator: 802.11a: 16M8D1D 802.11a: 16M8D1D 802.11n HT-20: 18M1D1D 802.11n HT-40: 36M7D1D 802.11n HT-40: 36M7D1D 802.11ac-80: 75M8D1D  Equipment Dimensions: T3200M: 57.2mm x 184.2mm x 241.3mm / 2.3" x 7.3" x 9.5" (W x D x H)  Weight: 0.95 pounds  Hardware Rev: AM1					
802.11a; 802.11ac-80; 802.11n HT-20; 802.11n HT-40; 5470 - 5725 MHz: 802.11a; 802.11ac-80; 802.11n HT-20; 802.11n HT-40;  Declared Nominal Output Power (Ave): 5250 - 5350 MHz: +23 dBm 5470 - 5725 MHz: +23 dBm  Transmit/Receive Operation: Transceiver - Half Duplex  Rated Input Voltage and Current: AC/ DC adaptor (adaptor sold with unit) 12Vdc  Operating Temperature Range: Declared Range 0°C to 45°C  ITU Emission Designator: 802.11a: 16M8D1D 802.11n HT-20: 18M1D1D 802.11n HT-40: 36M7D1D 802.11n HT-40: 36M7D1D 802.11ac-80: 75M8D1D  Equipment Dimensions: T3200M: 57.2mm x 184.2mm x 241.3mm / 2.3" x 7.3" x 9.5" (W x D x H)  Weight: 0.95 pounds  Hardware Rev: AM1					
5470 - 5725 MHz: 802.11a; 802.11ac-80; 802.11n HT-20; 802.11n HT-40;     Declared Nominal Output Power (Ave):   5250 - 5350 MHz: +23 dBm					
Declared Nominal Output Power (Ave):  5250 - 5350 MHz: +23 dBm  Transmit/Receive Operation:  Rated Input Voltage and Current:  Operating Temperature Range:  ITU Emission Designator:  802.11a: 16M8D1D 802.11n HT-20: 18M1D1D 802.11n HT-40: 36M7D1D 802.11n HT-40: 36M7D1D 802.11ac-80: 75M8D1D  Equipment Dimensions:  T3200M: 57.2mm x 184.2mm x 241.3mm / 2.3" x 7.3" x 9.5" (W x D x H)  Weight:  Weight:  Operating Temperature Range:  B02.11a: 16M8D1D 802.11ac-80: 75M8D1D  T3200M: 57.2mm x 184.2mm x 241.3mm / 2.3" x 7.3" x 9.5" (W x D x H)  Weight:  AM1					
5470 - 5725 MHz: +23 dBm  Transmit/Receive Operation: Transceiver - Half Duplex  Rated Input Voltage and Current: AC/ DC adaptor (adaptor sold with unit) 12Vdc  Operating Temperature Range: Declared Range 0°C to 45°C  ITU Emission Designator: 802.11a: 16M8D1D 802.11n HT-20: 18M1D1D 802.11n HT-40: 36M7D1D 802.11ac-80: 75M8D1D  Equipment Dimensions: T3200M: 57.2mm x 184.2mm x 241.3mm / 2.3" x 7.3" x 9.5" (W x D x H)  Weight: 0.95 pounds  Hardware Rev: AM1		802.11a; 802.11ac-80; 802.11n HT-20; 802.11n HT-40;			
Transmit/Receive Operation: Transceiver - Half Duplex Rated Input Voltage and Current: AC/ DC adaptor (adaptor sold with unit) 12Vdc  Operating Temperature Range: Declared Range 0°C to 45°C  ITU Emission Designator: 802.11a: 16M8D1D 802.11n HT-20: 18M1D1D 802.11n HT-40: 36M7D1D 802.11n HT-40: 36M7D1D 802.11ac-80: 75M8D1D  Equipment Dimensions: T3200M: 57.2mm x 184.2mm x 241.3mm / 2.3" x 7.3" x 9.5" (W x D x H)  Weight: 0.95 pounds  Hardware Rev: AM1	Declared Nominal Output Power (Ave):				
Rated Input Voltage and Current: AC/ DC adaptor (adaptor sold with unit) 12Vdc  Operating Temperature Range: Declared Range 0°C to 45°C  ITU Emission Designator: 802.11a: 16M8D1D 802.11n HT-20: 18M1D1D 802.11n HT-40: 36M7D1D 802.11ac-80: 75M8D1D  Equipment Dimensions: T3200M: 57.2mm x 184.2mm x 241.3mm / 2.3" x 7.3" x 9.5" (W x D x H)  Weight: 0.95 pounds  Hardware Rev: AM1					
Operating Temperature Range:         Declared Range 0°C to 45°C           ITU Emission Designator:         802.11a: 16M8D1D 802.11n HT-20: 18M1D1D 802.11n HT-40: 36M7D1D 802.11ac-80: 75M8D1D           Equipment Dimensions:         T3200M: 57.2mm x 184.2mm x 241.3mm / 2.3" x 7.3" x 9.5" (W x D x H)           Weight:         0.95 pounds           Hardware Rev:         AM1					
ITU Emission Designator: 802.11a: 16M8D1D 802.11n HT-20: 18M1D1D 802.11n HT-40: 36M7D1D 802.11ac-80: 75M8D1D  Equipment Dimensions: T3200M: 57.2mm x 184.2mm x 241.3mm / 2.3" x 7.3" x 9.5" (W x D x H)  Weight: 0.95 pounds  Hardware Rev: AM1		. , ,			
802.11n HT-20: 18M1D1D 802.11n HT-40: 36M7D1D 802.11ac-80: 75M8D1D Equipment Dimensions: T3200M: 57.2mm x 184.2mm x 241.3mm / 2.3" x 7.3" x 9.5" (W x D x H) Weight: 0.95 pounds Hardware Rev: AM1					
802.11n HT-40: 36M7D1D 802.11ac-80: 75M8D1D Equipment Dimensions: T3200M: 57.2mm x 184.2mm x 241.3mm / 2.3" x 7.3" x 9.5" (W x D x H) Weight: 0.95 pounds Hardware Rev: AM1	ITU Emission Designator:				
802.11ac-80: 75M8D1D  Equipment Dimensions: T3200M: 57.2mm x 184.2mm x 241.3mm / 2.3" x 7.3" x 9.5" (W x D x H)  Weight: 0.95 pounds  Hardware Rev: AM1					
Equipment Dimensions: T3200M: 57.2mm x 184.2mm x 241.3mm / 2.3" x 7.3" x 9.5" (W x D x H)  Weight: 0.95 pounds  Hardware Rev: AM1					
D x H)  Weight: 0.95 pounds  Hardware Rev: AM1	Equipment Dimensions:	T3200M: 57.2mm x 184.2mm x 241.3mm / 2.3" x 7.3" x 9.5" (W x			
Weight: 0.95 pounds Hardware Rev: AM1	_qa.po zronolorio.	· ·			
Hardware Rev: AM1	Weight:				
Software Rev: 31.164L.02update7HW		•			
	Software Rev:	31.164L.02update7HW			



Issue Date: 1st April 2016
Page: 12 of 28


## 5.2. Scope Of Test Program

#### **Actiontec Electronics Inc T3200M**

The scope of the test program was to test the Actiontec Electronics Inc. T3200M, 802.11ac Bonded VDSL2 Modem Gateway with MoCA2.0 configurations in the frequency ranges 5250 - 5350 MHz; 5470 - 5725 MHz; for compliance against the following specification:

### FCC CFR 47 Part 15 Subpart E 15.407

Radio Frequency Devices; Subpart E – Unlicensed National Information Infrastructure Devices

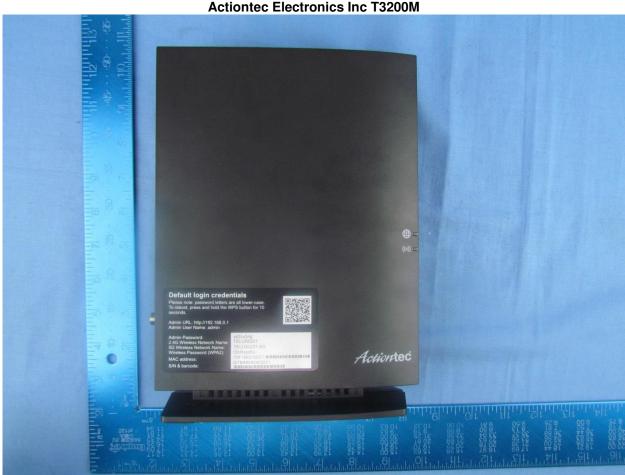

Left View



Issue Date: 1st April 2016
Page: 13 of 28

## 5.3. Equipment Model(s) and Serial Number(s)

Туре	Description	Manufacturer	Model	Serial no.	<b>Delivery Date</b>
EUT	802.11ac Bonded VDSL2 Modem Gateway with MoCA2.0	T3200M	T3200M	GTBA6040400218	29 Feb 2016
EUT	802.11ac Bonded VDSL2 Modem Gateway with MoCA2.0	T3200M	T3200M	GTBA6040400221	29 Feb 2016

## 5.4. Antenna Details

Туре	Manufacturer	Model	Family	Gain (dBi)	BF Gain	Dir BW	X-Pol	Frequency Band (MHz)
integral	Galtronics	Custom PCB SMT	Dipole	3.4	2.7	360	ı	5150 - 5250
integral	Galtronics	Custom PCB SMT	Dipole	4.5	1.1	360	-	5250 - 5350
integral	Galtronics	Custom PCB SMT	Dipole	4.4	1.4	360	ı	5470 - 5725
integral	Galtronics	Custom PCB SMT	Dipole	4.4	1.6	360	-	5725 - 5850

BF Gain - Beamforming Gain Dir BW - Directional BeamWidth X-Pol - Cross Polarization

### 5.5. Cabling and I/O Ports

Port Type	Max Cable Length	# Of Ports	Screened	Conn Type	Data Type
Ethernet	100 (4xLAN)	4	N	RJ-45	Packet Data
Ethernet	100 (4xWLAN)	4	N	RJ-45	Packet Data
USB	15m (USB 3.0)	1	Υ	USB	Digital



Issue Date: 1st April 2016
Page: 14 of 28

## 5.6. Test Configurations

Results for the following configurations are provided in this report:

Operational Mode(s)	Data Rate with Highest Power	Channel Frequency (MHz)			
(802.11a/b/g/n/ac)	MBit/s	Low	Mid	High	
		5250 - 5350 MHz			
802.11a	6.00	5260.00	5300.00	5320.00	
802.11ac-80	29.30		-	5290.00	
802.11n HT-20	6.50	5260.00	5300.00	5320.00	
802.11n HT-40	13.50	5270.00		5310.00	
		5470 - 5725 MHz			
802.11a	6.00	5500.00	5580.00	5720.00	
802.11ac-80	29.30	5530.00	5610.00	5690.00	
802.11n HT-20	6.50	5500.00	5580.00	5720.00	
802.11n HT-40	13.50	5510.00	5550.00	5710.00	

### 5.7. Equipment Modifications

The following modifications were required to bring the equipment into compliance:

1. NONE

## 5.8. Deviations from the Test Standard

The following deviations from the test standard were required in order to complete the test program:

1. NONE



Issue Date: 1st April 2016
Page: 15 of 28

# 6. TEST SUMMARY

List of Measurements

Result		
See report ATEC14-U13_Conducted		
Complies		
Complies		
Complies		
Not Tested		
See report ATEC14-U13_DFS		
Complies		
See report ATEC14-U13_Radiated		
Complies		
Complies		
See Report ATEC14-U2 Part 15B & ICES-003		
Complies		
See Report ATEC14-U2 Part 15B & ICES-003		
Complies		



Issue Date: 1st April 2016

**Page:** 16 of 28

## 7. TEST EQUIPMENT CONFIGURATION(S)


### 7.1. Conducted

Conducted RF Emission Test Set-up(s)

The following tests were performed using the conducted test set-up shown in the diagram below.

- 1. Peak Transmit Power
- 2. 26 dB & 99% Bandwidth
- 3. Power Spectral Density

## MiTest MiCOM Labs Automated Test System

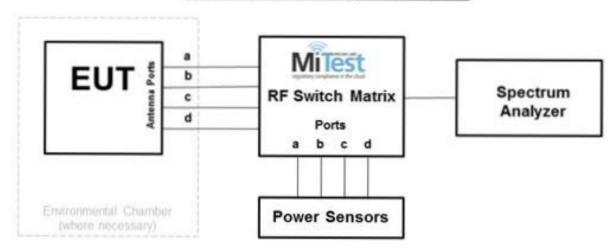

### Conducted Test Measurement Setup

A full system calibration was performed on the test station and any resulting system losses (or gains) were taken into account in the production of all final measurement data.



Issue Date: 1st April 2016
Page: 17 of 28

Asset#	Description	Manufacturer	Model#	Serial#	Calibration Due Date
127	Power Supply	HP	6674A	US36370530	Cal when used
158	Barometer/Thermometer	Control Company	4196	E2846	01 Dec 2016
248	Resistance Thermometer	Thermotronics	GR2105-02	9340 #1	21 Oct 2016
287	Rohde & Schwarz 40 GHz Receiver	Rhode & Schwarz	ESIB40	100201	27 Aug 2016
376	USB 10MHz - 18GHz Average Power Sensor	Agilent	U2000A	MY51440005	23 Oct 2016
378	Rohde & Schwarz 40 GHz Receiver with Generator	Rhode & Schwarz	ESIB40	100107/040	04 Aug 2016
381	4x4 RF Switch Box	MiCOM Labs	MiTest RF Switch Box	MIC002	18 Jun 2016
419	Laptop with Labview Software	Lenova	W520	TS02	Not Required
420	USB to GPIB Interface	National Instruments	GPIB-USB HS	1346738	Not Required
435	USB Wideband Power Sensor	Boonton	55006	8730	31 Jul 2016
440	USB Wideband Power Sensor	Boonton	55006	9178	25 Sep 2016
441	USB Wideband Power Sensor	Boonton	55006	9179	25 Sep 2016
442	USB Wideband Power Sensor	Boonton	55006	9181	25 Sep 2016
445	PoE Injector	D-Link	DPE-101GL	QTAH1E2000625	Not Required
460	Dell Computer	Dell	Optiplex330	BC944G1	Not Required
461	Spectrum Analyzer	Agilent	E4440A	MY46185537	13 Aug 2016
74	Environmental Chamber Chamber 3	Tenney	TTC	12808-1	30 Sep 2016
RF#2 GPIB#1	GPIB cable to Power Supply	HP	GPIB	None	Not Required
RF#2 SMA#1	EUT to Mitest box port 1	Flexco	SMA Cable port1	None	18 Jun 2016
RF#2 SMA#2	EUT to Mitest box port 2	Flexco	SMA Cable port2	None	18 Jun 2016
RF#2 SMA#3	EUT to Mitest box port 3	Flexco	SMA Cable port3	None	18 Jun 2016
RF#2 SMA#4	EUT to Mitest box port 4	Flexco	SMA Cable port4	None	18 Jun 2016
RF#2 SMA#SA	Mitest box to SA	Flexco	SMA Cable SA	None	18 Jun 2016
RF#2 USB#1	USB Cable to Mitest Box	Dynex	USB Cable	None	Not Required




**Title:** Actiontec Electronics Inc. T3200M **To:** FCC CFR 47 15.407 & RSS-247

Serial #: ATEC14-U13\_Master (DFS bands)

Issue Date: 1st April 2016 Page: 18 of 28

### 7.2. DFS - Conducted

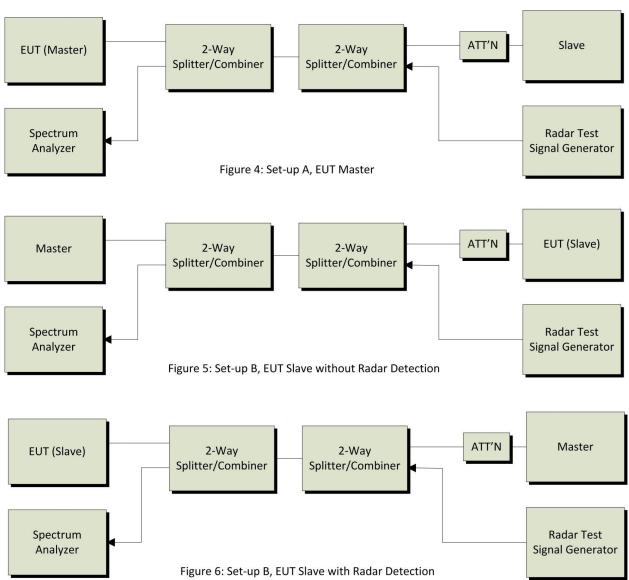

A full system calibration was performed on the test station and any resulting system losses (or gains) were taken into account in the production of all final measurement data.



Issue Date: 1st April 2016
Page: 19 of 28

Asset#	Description	Manufacturer	Model#	Serial#	Calibration Due Date
158	Barometer/Thermometer	Control Company	4196	E2846	01 Dec 2016
193	Receiver 20 Hz to 7 GHz	Rhode & Schwarz	ESI 7	838496/007	17 Apr 2016
299	Test Software DFS Test System	Aeroflex	DFS test Software	V2.4.0	Not Required
359	DFS System	Aeroflex	PXI-1042	300001/004	18 Jun 2016
417	Laptop for DFS with DFS software	Lenova	W520	DFS	Not Required
418	PCI-e interface card	National Instruments	Express 8360	174AAC5	Not Required
422	Splitter/Combiner	Pasternack	PE 2031	001	Cal when used
71	Spectrum Analyser 9KHz-50GHz	HP	8565E	3425A00181	06 Aug 2016
DFS PCIe#1	PCIe cable for Aeroflex	National Instruments	PCIe cable	None	Not Required
DFS SMA#1	SMA Cable for DFS	Megaphase	SMA Cable	None	Cal when used
DFS SMA#2	SMA Cable for DFS	Megaphase	SMA Cable	None	Cal when used
DFS SMA#3	SMA Cable for DFS	Megaphase	SMA Cable	None	Cal when used
DFS SMA#4	SMA Cable for DFS	Megaphase	SMA Cable	None	Cal when used



Issue Date: 1st April 2016
Page: 20 of 28


## 7.3. Radiated Spurious Emission Test Set-up > 1 GHz

The following tests were performed using the radiated test set-up shown in the diagram below.

10.7 Radiated Spurious Emissions (1 – 10 GHz)

10.8 Radiated Digital Emissions (0.03 – 1 GHz)

### **Radiated Emission Measurement Setup**

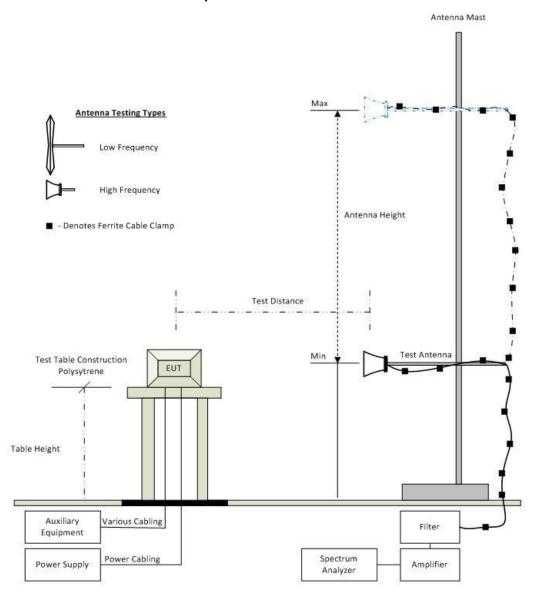

**Radiated Emission Test Setup** 



Issue Date: 1st April 2016
Page: 21 of 28

Asset#	Description	Manufacturer	Model#	Serial#	Calibration Due Date
158	Barometer/Thermometer	Control Company	4196	E2846	01 Dec 2016
170	Video System Controller for Semi Anechoic Chamber	Panasonic	WV-CY101	04R08507	Not Required
287	Rohde & Schwarz 40 GHz Receiver	Rhode & Schwarz	ESIB40	100201	27 Aug 2016
301	5470 to 5725 MHz Notch Filter	Microtronics	RBC50704	001	18 Aug 2016
302	5150 to 5350 MHz Notch Filter	Microtronics	BRC50703	002	18 Aug 2016
303	5725 to 5875 MHz Notch filter	Microtronics	BRC50705	003	18 Aug 2016
330	Variac 0-280 Vac	Staco Energy Co	3PN1020B	0546	Cal when used
336	Active loop Ant 10kHz to 30 MHz	EMCO	EMCO 6502	00060498	23 Sep 2016
338	Sunol 30 to 3000 MHz Antenna	Sunol	JB3	A052907	15 Aug 2016
341	900MHz Notch Filter	EWT	EWT-14-0199	H1	18 Aug 2016
342	2.4 GHz Notch Filter	EWT	EWT-14-0203	H1	18 Aug 2016
343	5.15 GHz Notch Filter	EWT	EWT-14-0200	H1	18 Aug 2016
344	5.35 GHz Notch Filter	EWT	EWT-14-0201	H1	18 Aug 2016
345	5.46 GHz Notch Filter	EWT	EWT-14-0202	H1	18 Aug 2016
346	1.6 TO 10GHz High Pass Filter	EWT	EWT-57-0112	H1	18 Aug 2016
373	26III RMS Multimeter	Fluke	Fluke 26 series III	76080720	26 Oct 2016
377	Band Rejection Filter 5150 to 5880MHz	Microtronics	BRM50716	034	18 Aug 2016
378	Rohde & Schwarz 40 GHz Receiver with Generator	Rhode & Schwarz	ESIB40	100107/040	04 Aug 2016
393	DC - 1050 MHz Low Pass Filter	Microcircuits	VLFX-1050	N/A	08 Oct 2016
396	2.4 GHz Notch Filter	Microtronics	BRM50701	001	18 Aug 2016
397	Amp 10 - 2500MHz	MiCOM Labs	Amp 10 - 2500 MHz	NA	24 Mar 2016
399	ETS 1-18 GHz Horn Antenna	ETS	3117	00154575	10 Oct 2016
406	Amplifier for Radiated Emissions	MiCOM Labs	40dB 1 to 18GHz Amp	0406	28 May 2016
410	Desktop Computer	Dell	Inspiron 620	WS38	Not Required
411	Mast/Turntable Controller	Sunol Sciences	SC98V	060199-1D	Not Required



Issue Date: 1st April 2016
Page: 22 of 28

412	USB to GPIB Interface	National	GPIB-USB HS	11B8DC2	Not Required
		Instruments			-
413	Mast Controller	Sunol Science	TWR95-4	030801-3	Not Required
414	DC Power Supply 0-60V	HP	6274	1029A01285	Cal when used
415	Turntable Controller	Sunol Sciences	Turntable Controller	None	Not Required
416	Gigabit ethernet filter	ETS-Lingren	Gigafoil 260366	None	Not Required
447	Rad Emissions Test Software	MiCOM	Rad Emissions Test Software Version 1.0.73	447	Not Required
462	Schwarzbeck cable from Antenna to Amplifier.	Schwarzbeck	AK 9513	462	25 Mar 2016
463	Schwarzbeck cable from Amplifier to Bulkhead.	Schwarzbeck	AK 9513	463	25 Mar 2016
464	Schwarzbeck cable from Bulkhead to Receiver	Schwarzbeck	AK 9513	464	25 Mar 2016
465	Low Pass Filter DC- 1000 MHz	Mini-Circuits	NLP-1200+	VUU01901402	18 Aug 2016
466	Low Pass Filter DC- 1500 MHz	Mini-Circuits	NLP-1750+	VUU10401438	18 Aug 2016
467	2495 to 2650 MHz notch filter	MicroTronics	BRM50709	011	18 Aug 2016
468	Low pass filter	Mini Circuits	SLP-550	None	18 Aug 2016
469	Low pass filter	Mini Circuit	SLP-1000	None	18 Aug 2016
470	High Pass filter	Mini Circuits	SHP-700	None	18 Aug 2016
476	Low Pass dc-2200MHz filter	Mini Circuits	15542 NLP- 2400+	VUU13801345	18 Aug 2016
480	Cable - Bulkhead to Amp	SRC Haverhill	157-157- 3050360	480	11 Aug 2016
481	Cable - Bulkhead to Receiver	SRC Haverhill	151-151- 3050787	481	11 Aug 2016
482	Cable - Amp to Antenna	SRC Haverhill	157-157- 3051574	482	11 Aug 2016
502	Test Software for Radiated Emissions	EMISoft	Vasona	Version 5 Build 59	Not Required
87	Uninterruptible Power Supply	Falcon Electric	ED2000-1/2LC	F3471 02/01	Cal when used
CC05	Confidence Check	MiCOM	CC05	None	02 Jun 2016
VLF-1700	Low pass filter DC-1700 MHz	Mini Circuits	VLF-1700	None	30 Mar 2016




Issue Date: 1st April 2016
Page: 23 of 28

### 7.4. Digital Emissions Test Set-up (0.03 – 1 GHz)

The following tests were performed using the conducted test set-up shown in the diagram below.

1. Section 6.1.2.13

### Digital Emission Measurement Setup - Below 1 GHz

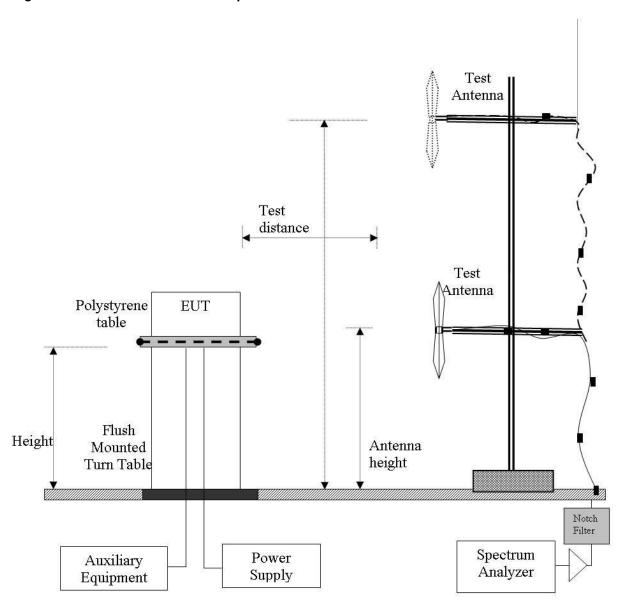



Issue Date: 1st April 2016
Page: 24 of 28

Asset#	Description	Manufacturer	Model#	Serial#	Calibration Due Date
158	Barometer/Thermometer	Control Company	4196	E2846	01 Dec 2016
170	Video System Controller for Semi Anechoic Chamber	Panasonic	WV-CY101	04R08507	Not Required
287	Rohde & Schwarz 40 GHz Receiver	Rhode & Schwarz	ESIB40	100201	27 Aug 2016
301	5470 to 5725 MHz Notch Filter	Microtronics	RBC50704	001	18 Aug 2016
302	5150 to 5350 MHz Notch Filter	Microtronics	BRC50703	002	18 Aug 2016
303	5725 to 5875 MHz Notch filter	Microtronics	BRC50705	003	18 Aug 2016
330	Variac 0-280 Vac	Staco Energy Co	3PN1020B	0546	Cal when used
336	Active loop Ant 10kHz to 30 MHz	EMCO	EMCO 6502	00060498	23 Sep 2016
338	Sunol 30 to 3000 MHz Antenna	Sunol	JB3	A052907	15 Aug 2016
341	900MHz Notch Filter	EWT	EWT-14-0199	H1	18 Aug 2016
342	2.4 GHz Notch Filter	EWT	EWT-14-0203	H1	18 Aug 2016
343	5.15 GHz Notch Filter	EWT	EWT-14-0200	H1	18 Aug 2016
344	5.35 GHz Notch Filter	EWT	EWT-14-0201	H1	18 Aug 2016
345	5.46 GHz Notch Filter	EWT	EWT-14-0202	H1	18 Aug 2016
346	1.6 TO 10GHz High Pass Filter	EWT	EWT-57-0112	H1	18 Aug 2016
373	26III RMS Multimeter	Fluke	Fluke 26 series III	76080720	26 Oct 2016
377	Band Rejection Filter 5150 to 5880MHz	Microtronics	BRM50716	034	18 Aug 2016
378	Rohde & Schwarz 40 GHz Receiver with Generator	Rhode & Schwarz	ESIB40	100107/040	04 Aug 2016
393	DC - 1050 MHz Low Pass Filter	Microcircuits	VLFX-1050	N/A	08 Oct 2016
396	2.4 GHz Notch Filter	Microtronics	BRM50701	001	18 Aug 2016
397	Amp 10 - 2500MHz	MiCOM Labs	Amp 10 - 2500 MHz	NA	24 Mar 2016
399	ETS 1-18 GHz Horn Antenna	ETS	3117	00154575	10 Oct 2016
406	Amplifier for Radiated Emissions	MiCOM Labs	40dB 1 to 18GHz Amp	0406	28 May 2016
410	Desktop Computer	Dell	Inspiron 620	WS38	Not Required
411	Mast/Turntable Controller	Sunol Sciences	SC98V	060199-1D	Not Required



Issue Date: 1st April 2016
Page: 25 of 28

412	USB to GPIB Interface	National Instruments	GPIB-USB HS	11B8DC2	Not Required
413	Mast Controller	Sunol Science	TWR95-4	030801-3	Not Required
414	DC Power Supply 0-60V	HP	6274	1029A01285	Cal when used
415	Turntable Controller	Sunol Sciences	Turntable Controller	None	Not Required
416	Gigabit ethernet filter	ETS-Lingren	Gigafoil 260366	None	Not Required
447	Rad Emissions Test Software	MiCOM	Rad Emissions Test Software Version 1.0.73	447	Not Required
462	Schwarzbeck cable from Antenna to Amplifier.	Schwarzbeck	AK 9513	462	25 Mar 2016
463	Schwarzbeck cable from Amplifier to Bulkhead.	Schwarzbeck	AK 9513	463	25 Mar 2016
464	Schwarzbeck cable from Bulkhead to Receiver	Schwarzbeck	AK 9513	464	25 Mar 2016
465	Low Pass Filter DC- 1000 MHz	Mini-Circuits	NLP-1200+	VUU01901402	18 Aug 2016
466	Low Pass Filter DC- 1500 MHz	Mini-Circuits	NLP-1750+	VUU10401438	18 Aug 2016
467	2495 to 2650 MHz notch filter	MicroTronics	BRM50709	011	18 Aug 2016
468	Low pass filter	Mini Circuits	SLP-550	None	18 Aug 2016
469	Low pass filter	Mini Circuit	SLP-1000	None	18 Aug 2016
470	High Pass filter	Mini Circuits	SHP-700	None	18 Aug 2016
476	Low Pass dc-2200MHz filter	Mini Circuits	15542 NLP- 2400+	VUU13801345	18 Aug 2016
480	Cable - Bulkhead to Amp	SRC Haverhill	157-157- 3050360	480	11 Aug 2016
481	Cable - Bulkhead to Receiver	SRC Haverhill	151-151- 3050787	481	11 Aug 2016
482	Cable - Amp to Antenna	SRC Haverhill	157-157- 3051574	482	11 Aug 2016
502	Test Software for Radiated Emissions	EMISoft	Vasona	Version 5 Build 59	Not Required
87	Uninterruptible Power Supply	Falcon Electric	ED2000-1/2LC	F3471 02/01	Cal when used
CC05	Confidence Check	MiCOM	CC05	None	02 Jun 2016
VLF-1700	Low pass filter DC-1700 MHz	Mini Circuits	VLF-1700	None	30 Mar 2016




Issue Date: 1st April 2016
Page: 26 of 28

### 7.5. ac Wireline Emission Test Set-up

The following tests were performed using the conducted test set-up shown in the diagram below.

1. Section 6.1.3 ac Wireline Conducted Emissions

### **Conducted Test Set-Up Pictorial Representation**



A full system calibration was performed on the test station and any resulting system losses (or gains) were taken into account in the production of all final measurement data.

Asset#	Description	Manufacturer	Model#	Serial#	Calibration Due Date
158	Barometer/Thermometer	Control Company	4196	E2846	01 Dec 2016
184	Pulse Limiter	Rhode & Schwarz	ESH3Z2	357.8810.52	13 Apr 2016
190	LISN (two-line V-network)	Rhode & Schwarz	ESH3Z5	836679/006	29 Oct 2016
287	Rohde & Schwarz 40 GHz Receiver	Rhode & Schwarz	ESIB40	100201	27 Aug 2016
307	BNC-CABLE	Megaphase	1689 1GVT4	15F50B002	13 Apr 2016
316	Dell desktop computer workstation with Vasona	Dell	Desktop	WS04	Not Required
351	Data Impedance Stabilization Network	Teseq	ISN T800	24809	30 Nov 2016
372	AC Variable PS	California Instruments	1251P	L06951	Cal when used
378	Rohde & Schwarz 40 GHz Receiver with Generator	Rhode & Schwarz	ESIB40	100107/040	04 Aug 2016
388	LISN (3 Phase) 9kHz - 30MHz	Rohde & Schwarz	ESH2-Z5	892107/022	30 Oct 2016
ADAPT SMA#1	SMA Cable	Megaphase	SMA Cable #1	None	13 Aug 2016



Issue Date: 1st April 2016

**Page:** 27 of 28

## 8. MEASUREMENT AND PRESENTATION OF TEST DATA

The measurement and graphical data presented in this test report was generated automatically using state-of-the-art technology creating an easy to read report structure. Numerical measurement data is separated from supporting graphical data (plots) through hyperlinks. Numerical measurement data can be reviewed without scrolling through numerous graphical pages to arrive at the next data matrix.

Plots have been relegated into the Appendix 'Graphical Data'.

Test and report automation was performed by <u>MiTest</u>. <u>MiTest</u> is an automated test system developed by MiCOM Labs. <u>MiTest</u> is the first cloud based modular test system enabling end-to-end automation of regulatory compliance testing for conducted RF testing.





The MiCOM Labs "MiTest" Automated Test System" (Patent Pending)



575 Boulder Court
Pleasanton, California 94566, USA
Tel: +1 (925) 462 0304
Fax: +1 (925) 462 0306
www.micomlabs.com