

Company: Actiontec Electronics Inc

Test of: WEB5500

To: FCC CFR 47 Part 15 Subpart E 15.407

Report No.: ATEC11-8b Radiated Rev B

RADIATED TEST REPORT



RADIATED TEST REPORT

FROM



Test of: Actiontec Electronics Inc WEB5500
to

To: FCC CFR 47 Part 15 Subpart E 15.407

Test Report Serial No.: ATEC11-U8b Radiated Rev B

This report supersedes: ATEC11-U8b Radiated Rev A

Note: this report is one of a set of four reports that together address the requirements for certification purposes

Report Number	Test Report Type
ATEC11-U2	FCC Part 15B Test Report
ATEC11-U5a, b	2.4 GHz Conducted & Radiated Test Reports
ATEC11-U8 a, b,	5 GHz (non-DFS) Conducted, Radiated Test Reports
ATEC11-U11 a, b, c	5 GHz (DFS) Conducted, Radiated, DFS Test Reports

Applicant: Actiontec Electronics Inc
760 N Mary Avenue
Sunnyvale, California 94085
USA

Product Function: 802.11ac Wireless Network
Extender

Issue Date: 27th April 2017

This Test Report is Issued Under the Authority of:

MiCOM Labs, Inc.
575 Boulder Court
Pleasanton California 94566
USA
Phone: +1 (925) 462-0304
Fax: +1 (925) 462-0306
www.micomlabs.com



MiCOM Labs is an ISO 17025 Accredited Testing Laboratory



Title: Actiontec Electronics Inc WEB5500
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: ATEC11-U8b Radiated Rev B
Issue Date: 27th April 2017
Page: 3 of 53

Table of Contents

1. ACCREDITATION, LISTINGS & RECOGNITION	4
1.1. Test Accreditation	4
1.2. Recognition	5
1.3. Product Certification	6
2. DOCUMENT HISTORY	7
3. TEST RESULT CERTIFICATE	8
4. REFERENCES AND MEASUREMENT UNCERTAINTY	9
4.1. Normative References	9
4.2. Test and Uncertainty Procedure	10
5. PRODUCT DETAILS AND TEST CONFIGURATIONS	11
5.1. Technical Details	11
5.2. Scope Of Test Program	12
5.3. Equipment Model(s) and Serial Number(s)	13
5.4. Antenna Details	13
5.5. Cabling and I/O Ports	13
5.6. Test Configurations.....	14
5.7. Equipment Modifications	14
5.8. Deviations from the Test Standard	14
6. TEST SUMMARY	15
7. TEST EQUIPMENT CONFIGURATION(S)	16
8. MEASUREMENT AND PRESENTATION OF TEST DATA	18
9. TEST RESULTS	19
9.1. Radiated	19
9.1.1. <i>Restricted Band Emissions</i>	22
9.1.1.1. 5150-5250 MHz	22
9.1.1.2. 5725-5850 MHz	25
9.1.2. <i>Restricted Band-Edge Emissions</i>	28
9.1.2.1. 5150-5250 MHz	28
9.1.2.2. 5725-5850 MHz	33
9.1.3. <i>Digital Emissions</i>	42
A. APPENDIX - GRAPHICAL IMAGES	45
A.1. Radiated	46
A.1.1. <i>Restricted Band Emissions</i>	46
A.1.1.1. Galtronics Custom PCB	46
A.1.2. <i>Digital Emissions</i>	52

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

1. ACCREDITATION, LISTINGS & RECOGNITION

1.1. Test Accreditation

MiCOM Labs, Inc. is an accredited Electrical testing laboratory per the international standard ISO/IEC 17025:2005. The company is accredited by the American Association for Laboratory Accreditation (A2LA) www.a2la.org test laboratory number 2381.01. MiCOM Labs test schedule is available at the following URL; <http://www.a2la.org/scopepdf/2381-01.pdf>



Accredited Laboratory

A2LA has accredited

MICOM LABS

Pleasanton, CA


for technical competence in the field of

Electrical Testing

This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2005 *General requirements for the competence of testing and calibration laboratories*. This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (refer to joint ISO-ILAC-IAF Communiqué dated 8 January 2009).



Presented this 4th day of February 2016.



Senior Director of Quality & Communications
For the Accreditation Council
Certificate Number 2381.01
Valid to November 30, 2017

For the tests or types of tests to which this accreditation applies, please refer to the laboratory's Electrical Scope of Accreditation.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



1.2. Recognition

MiCOM Labs, Inc has widely recognized wireless testing capabilities. Our international recognition includes Conformity Assessment Body designation by APEC MRA countries. MiCOM Labs test reports are accepted globally.

Country	Recognition Body	Status	Phase	Identification No.
USA	Federal Communications Commission (FCC)	TCB	-	US0159 Listing #: 102167
Canada	Industry Canada (IC)	FCB	APEC MRA 2	US0159 Listing #: 4143A-2 4143A-3
Japan	MIC (Ministry of Internal Affairs and Communication)	CAB	APEC MRA 2	RCB 210
	VCCI	--	--	A-0012
Europe	European Commission	NB	EU MRA	NB 2280
Australia	Australian Communications and Media Authority (ACMA)	CAB	APEC MRA 1	US0159
Hong Kong	Office of the Telecommunication Authority (OFTA)	CAB	APEC MRA 1	
Korea	Ministry of Information and Communication Radio Research Laboratory (RRL)	CAB	APEC MRA 1	
Singapore	Infocomm Development Authority (IDA)	CAB	APEC MRA 1	
Taiwan	National Communications Commission (NCC) Bureau of Standards, Metrology and Inspection (BSMI)	CAB	APEC MRA 1	
Vietnam	Ministry of Communication (MIC)	CAB	APEC MRA 1	

EU MRA – European Union Mutual Recognition Agreement.

NB – Notified Body

APEC MRA – Asia Pacific Economic Community Mutual Recognition Agreement. Recognition agreement under which test lab is accredited to regulatory standards of the APEC member countries.

Phase I - recognition for product testing

Phase II – recognition for both product testing and certification

1.3. Product Certification

MiCOM Labs, Inc. is an accredited Product Certification Body per the international standard ISO/IEC 17065:2012. The company is accredited by the American Association for Laboratory Accreditation (A2LA) www.a2la.org test laboratory number 2381.02. MiCOM Labs test schedule is available at the following URL; <http://www.a2la.org/scopepdf/2381-02.pdf>



Accredited Product Certification Body

A2LA has accredited
MICOM LABS
Pleasanton, CA

This product certification body is accredited in accordance with the recognized International Standard ISO/IEC 17065:2012 *Requirements for bodies certifying products, processes and services*. This accreditation demonstrates technical competence for a defined scope and the operation of a management system.



Presented this 4th day of February 2016.



Senior Director of Quality & Communications
For the Accreditation Council
Certificate Number 2381.02
Valid to November 30, 2017

For the product certification schemes to which this accreditation applies, please refer to the organization's Product Certification Scope of Accreditation.

United States of America – Telecommunication Certification Body (TCB)
Industry Canada – Certification Body, CAB Identifier – US0159
Europe – Notified Body (NB), NB Identifier - 2280
Japan – Recognized Certification Body (RCB), RCB Identifier - 210

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Actiontec Electronics Inc WEB5500
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: ATEC11-U8b Radiated Rev B
Issue Date: 27th April 2017
Page: 7 of 53

2. DOCUMENT HISTORY

Document History		
Revision	Date	Comments
Draft	22 nd November 2015	
Rev A	10 th January 2016	Initial Release
Rev B	27 th April 2017	Removed Product Photographs

In the above table the latest report revision will replace all earlier versions.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Actiontec Electronics Inc WEB5500
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: ATEC11-U8b Radiated Rev B
Issue Date: 27th April 2017
Page: 8 of 53

3. TEST RESULT CERTIFICATE

Manufacturer: Actiontec Electronics Inc 760 N Mary Avenue Sunnyvale California 94085 USA	Tested By: MiCOM Labs, Inc. 575 Boulder Court Pleasanton California 94566 USA
Model: WEB5500	Telephone: +1 925 462 0304
Type Of Equipment: 802.11ac Wireless Network Extender	Fax: +1 925 462 0306
S/N's: F18	
Test Date(s): 3 rd – 17 th November 2015	Website: www.micomlabs.com

STANDARD(S)	TEST RESULTS
FCC CFR 47 Part 15 Subpart E 15.407	EQUIPMENT COMPLIES


MiCOM Labs, Inc. tested the equipment mentioned in accordance with the requirements set forth in the above standards. Test results indicate that the equipment tested is capable of demonstrating compliance with the requirements as documented within this report.


Notes:

1. This document reports conditions under which testing was conducted and the results of testing performed.
2. Details of test methods used have been recorded and kept on file by the laboratory.
3. Test results apply only to the item(s) tested.



Approved & Released for MiCOM Labs, Inc. by:

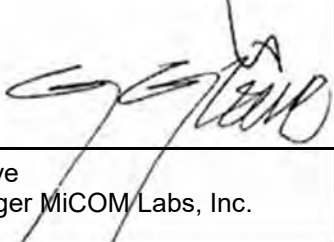
 Graeme Grieve
 Quality Manager MiCOM Labs, Inc.

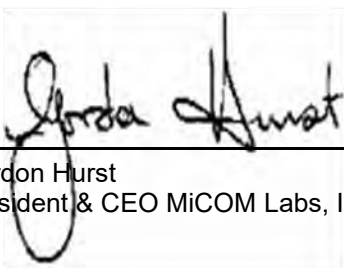
 Gordon Hurst
 President & CEO MiCOM Labs, Inc.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

4. REFERENCES AND MEASUREMENT UNCERTAINTY

4.1. Normative References

REF.	PUBLICATION	YEAR	TITLE
I	FCC 47 CFR Part 15.407	2014	Radio Frequency Devices; Subpart E –Unlicensed National Information Infrastructure Devices
II	KDB 662911	Oct 31 2013	Guidance for measurement of output emission of devices that employ single transmitter with multiple outputs or systems with multiple transmitters operating simultaneously in the same frequency band
III	KDB 905462 D07 v01	10th June 2015	Test guidance to demonstrate compliance for U-NII devices subject to DFS requirements.
IV	KDB 926956 DO1 v01r02	17th October 2014	U-NII Device Transition Plan
V	KDB 789033 D02 v01	6th June 2014	General UNII Test Procedures New Rules V01
VI	A2LA	June 2015	R105 - Requirement's When Making Reference to A2LA Accreditation Status
VII	ANSI C63.10	2013	American National Standard for Testing Unlicensed Wireless Devices
VIII	ANSI C63.4	2009	American National Standards for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz
IX	CISPR 22	2008	Information technology equipment - Radio disturbance characteristics - Limits and methods of measurement
X	ETSI TR 100 028	2001-12	Parts 1 and 2 Electromagnetic compatibility and Radio Spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics
XI	FCC 06-96	Jun 3 2006	Memorandum Opinion and Order
XII	KDB 644545 D03 v01	August 14th 2014	Guidance for IEEE 802.11ac New Rules
XIII	FCC 47 CFR Part 2.1033	2014	FCC requirements and rules regarding photographs and test setup diagrams.
XIV	M 3003	Edition 3 Nov. 2012	Expression of Uncertainty and Confidence in Measurements

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Actiontec Electronics Inc WEB5500
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: ATEC11-U8b Radiated Rev B
Issue Date: 27th April 2017
Page: 10 of 53

4.2. Test and Uncertainty Procedure

Conducted and radiated emission measurements were conducted in accordance with American National Standards Institute ANSI C63.4, listed in the Normative References section of this report.

Measurement uncertainty figures are calculated in accordance with ETSI TR 100 028 Parts 1 and 2.

Measurement uncertainties stated are based on a standard uncertainty multiplied by a coverage factor $k = 2$, providing a level of confidence of approximately 95 % in accordance with UKAS document M 3003 listed in the Normative References section of this report.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Actiontec Electronics Inc WEB5500
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: ATEC11-U8b Radiated Rev B
Issue Date: 27th April 2017
Page: 11 of 53

5. PRODUCT DETAILS AND TEST CONFIGURATIONS

5.1. Technical Details

Details	Description
Purpose:	Test of the Actiontec Electronics Inc WEB5500 to FCC CFR 47 Part 15 Subpart E 15.407. Radio Frequency Devices; Subpart E – Unlicensed National Information Infrastructure Devices
Applicant:	Actiontec Electronics Inc 760 N Mary Avenue Sunnyvale California 94085 USA
Manufacturer:	As Applicant
Laboratory performing the tests:	MiCOM Labs, Inc. 575 Boulder Court Pleasanton California 94566 USA
Test report reference number:	ATEC11-U8b
Date EUT received:	3 rd November 2015
Standard(s) applied:	FCC CFR 47 Part 15 Subpart E 15.407
Dates of test (from - to):	3 rd – 17 th November 2015
No of Units Tested:	1
Type of Equipment:	802.11a/b/g/n/ac
Model(s):	WEB5500
Location for use:	Indoor
Declared Frequency Range(s):	5150 - 5250 MHz; 5725 - 5850 MHz;
Primary function of equipment:	802.11ac Wireless Network Extender
Secondary function of equipment:	None Provided
Type of Modulation:	OFDM
EUT Modes of Operation:	802.11a; 802.11ac-80; 802.11n HT-20; 802.11n HT-40
Declared Nominal Output Power (Ave):	5150-5250 MHz: +28 dBm 5725-5850 MHz: +28 dBm
Transmit/Receive Operation:	Transceiver - Half Duplex
Rated Input Voltage and Current:	AC/ DC adaptor (adaptor sold with unit) Input: 115 Vac 0.6A Output: 12Vdc, 1.5 A
Operating Temperature Range:	Declared Range 0°C to 45°C
ITU Emission Designator:	802.11a: 16M9D1D 802.11ac-80: 76M2D1D 802.11n HT-20: 18M2D1D 802.11n HT-40: 36M7D1D
Equipment Dimensions:	4.75" (W) x 7.00" (H) x 2.25" (D)
Weight:	0.75 lb
Hardware Rev:	AM2
Software Rev:	V.3.1.9.3c

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Actiontec Electronics Inc WEB5500
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: ATEC11-U8b Radiated Rev B
Issue Date: 27th April 2017
Page: 12 of 53

5.2. Scope Of Test Program

Actiontec Electronics Inc WEB5500

The scope of the test program was to test the Actiontec Electronics Inc WEB5500, 802.11a/b/g/n/ac configurations in the frequency ranges 5150 - 5250 MHz; 5725 - 5850 MHz; for compliance against the following specification for non-DFS bands:

FCC CFR 47 Part 15 Subpart E 15.407

Radio Frequency Devices; Subpart E – Unlicensed National Information Infrastructure Devices

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Actiontec Electronics Inc WEB5500
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: ATEC11-U8b Radiated Rev B
Issue Date: 27th April 2017
Page: 13 of 53

5.3. Equipment Model(s) and Serial Number(s)

Type (EUT/Support)	Equipment Description (Including Brand Name)	Mfr	Model No.	Serial No.
EUT	802.11n Wireless Network Extender	Actiontec	WEB5500	F18
EUT	Power Adapter 100 - 240Vac 50/60Hz 0.6A 12 Vdc 1.5 A	Actiontec	NBS24J120150VU	Unknown
Support	Laptop PC	IBM	Thinkpad	None

5.4. Antenna Details

Type	Manufacturer	Model	Family	Gain (dBi)	BF Gain	Dir BW	X-Pol	Frequency Band (MHz)
integral	Galtronics	Custom PCB	Dipole	3.5	2.3	--	V-Pol	5150 - 5250
integral	Galtronics	Custom PCB	Dipole	3.5	0.9	--	H-Pol	5150 - 5250
integral	Galtronics	Custom PCB	Dipole	4.3	2.4	--	V-Pol	5725 - 5850
integral	Galtronics	Custom PCB	Dipole	3.9	0.2	--	H-Pol	5725 - 5850

BF Gain - Beamforming Gain
Dir BW - Directional BeamWidth
X-Pol - Cross Polarization

5.5. Cabling and I/O Ports

Port Type	Max Cable Length	# Of Ports	Screened	Conn Type	Data Type
Ethernet	100m	2	N	RJ-45	Packet Data

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Actiontec Electronics Inc WEB5500
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: ATEC11-U8b Radiated Rev B
Issue Date: 27th April 2017
Page: 14 of 53

5.6. Test Configurations

Results for the following configurations are provided in this report:

Operational Mode(s) (802.11a/b/g/n/ac)	Data Rate with Highest Power MBit/s	Channel Frequency (MHz)		
		Low	Mid	High
5150 - 5250 MHz				
802.11a	6	5,180.00	5,200.00	5,240.00
802.11ac-80	29.3	5,210.00	--	--
802.11n HT-20	6.5	5,180.00	--	--
802.11n HT-40	13.5	5,190.00	--	--
5725 - 5850 MHz				
802.11a	6	5,745.00	5,785.00	--
802.11ac-80	29.3	5,775.00	--	--
802.11n HT-20	6.5	--	--	5,825.00
802.11n HT-40	13.5	5,755.00	--	5,795.00

5.7. Equipment Modifications

The following modifications were required to bring the equipment into compliance:

1. NONE

5.8. Deviations from the Test Standard

The following deviations from the test standard were required in order to complete the test program:

1. NONE

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Actiontec Electronics Inc WEB5500
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: ATEC11-U8b Radiated Rev B
Issue Date: 27th April 2017
Page: 15 of 53

6. TEST SUMMARY

List of Measurements


Test Header	Result	Data Link
(b)(2) Radiated	Complies	-
i).. Restricted Band Emissions	Complies	View Data
ii).. Restricted Band-Edge Emissions	Complies	View Data
iv).. Digital Emissions	Complies	View Data

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

7. TEST EQUIPMENT CONFIGURATION(S)

The following tests were performed using the radiated test set-up shown in the diagram. Radiated emissions below 1GHz. Radiated Emissions above 1GHz.

- 1).. Restricted Band Emissions
- 2).. Restricted Band-Edge Emissions
- 3).. Digital Emissions

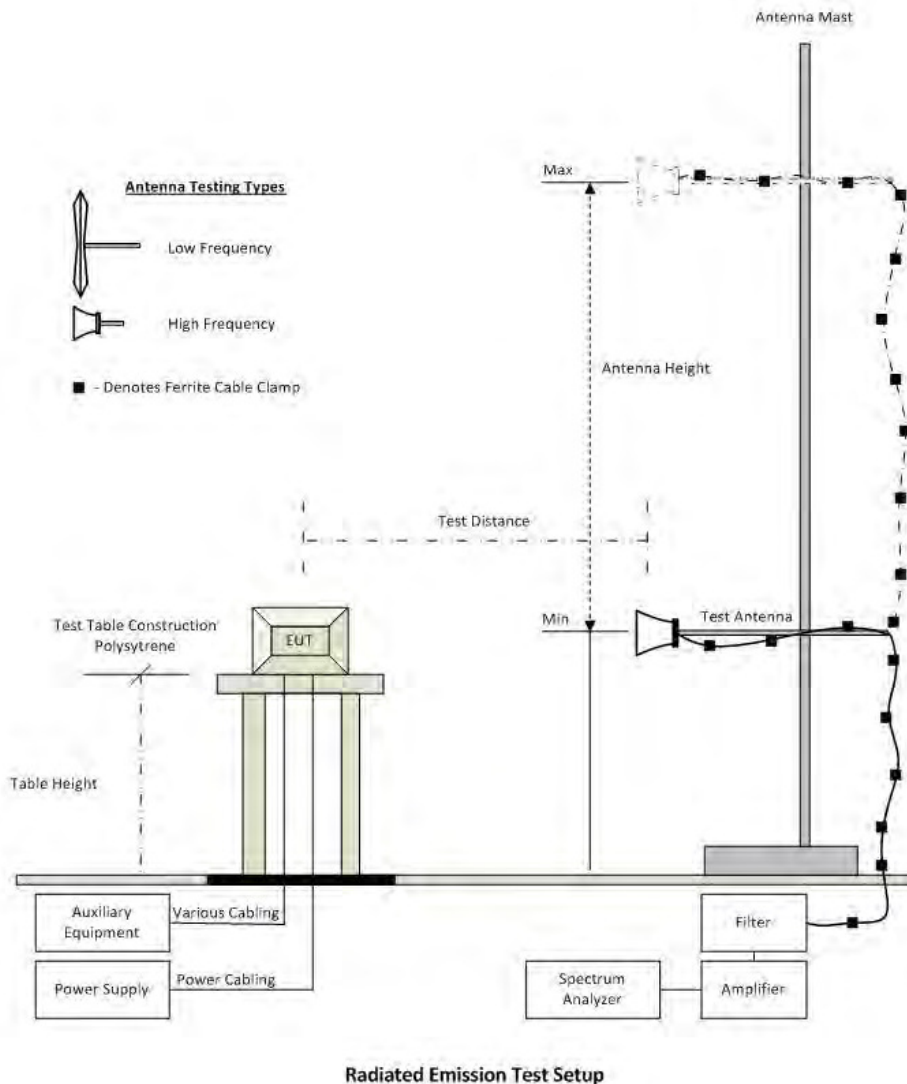

A full system calibration was performed on the test station and any resulting system losses (or gains) were taken into account in the production of all final measurement data.



Title: Actiontec Electronics Inc WEB5500
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: ATEC11-U8b Radiated Rev B
Issue Date: 27th April 2017
Page: 17 of 53

Asset#	Description	Manufacturer	Model#	Serial#	Calibration Due Date
158	Barometer/Thermometer	Control Company	4196	E2846	04 Dec 2015
170	Video System Controller for Semi Anechoic Chamber	Panasonic	WV-CY101	04R08507	Not Required
287	Rohde & Schwarz 40 GHz Receiver	Rhode & Schwarz	ESIB40	100201	27 Aug 2016
310	SMA Cable	Micro-Coax	UFA210A-0-0787-3G03G0	209089-001	30 Oct 2015
338	Sunol 30 to 3000 MHz Antenna	Sunol	JB3	A052907	15 Aug 2016
377	Band Rejection Filter 5150 to 5880MHz	Microtronics	BRM50716	034	18 Aug 2016
393	DC - 1050 MHz Low Pass Filter	Microcircuits	VLFX-1050	N/A	08 Oct 2016
397	Amp 10 - 2500MHz	MiCOM Labs	Amp 10 - 2500 MHz	NA	24 Feb 2016
399	ETS 1-18 GHz Horn Antenna	ETS	3117	00154575	10 Nov 2015
406	Amplifier for Radiated Emissions	MiCOM Labs	40dB 1 to 18GHz Amp	0406	28 May 2016
410	Desktop Computer	Dell	Inspiron 620	WS38	Not Required
412	USB to GPIB Interface	National Instruments	GPIB-USB HS	11B8DC2	Not Required
413	Mast Controller	Sunol Science	TWR95-4	030801-3	Not Required
415	Turntable Controller	Sunol Sciences	Turntable Controller	None	Not Required
416	Gigabit ethernet filter	ETS-Lingren	Gigafoil 260366	None	Not Required
447	Rad Emissions Test Software	MiCOM	Rad Emissions Test Software Version 1.0.73	447	Not Required
462	Schwarzbeck cable from Antenna to Amplifier.	Schwarzbeck	AK 9513	462	25 Feb 2016
463	Schwarzbeck cable from Amplifier to Bulkhead.	Schwarzbeck	AK 9513	463	25 Feb 2016
464	Schwarzbeck cable from Bulkhead to Receiver	Schwarzbeck	AK 9513	464	25 Feb 2016
480	Cable - Bulkhead to Amp	SRC Haverhill	157-157-3050360	480	11 Aug 2016
481	Cable - Bulkhead to Receiver	SRC Haverhill	151-151-3050787	481	11 Aug 2016
482	Cable - Amp to Antenna	SRC Haverhill	157-157-3051574	482	11 Aug 2016

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

8. MEASUREMENT AND PRESENTATION OF TEST DATA

The measurement and graphical data presented in this test report was generated automatically using state-of-the-art technology creating an easy to read report structure. Numerical measurement data is separated from supporting graphical data (plots) through hyperlinks. Numerical measurement data can be reviewed without scrolling through numerous graphical pages to arrive at the next data matrix.

Plots have been relegated into the Appendix 'Graphical Data'.

Test and report automation was performed by [MiTest](#). [MiTest](#) is an automated test system developed by MiCOM Labs. [MiTest](#) is the first cloud based modular test system enabling end-to-end automation of regulatory compliance testing for conducted RF testing.



The MiCOM Labs "[MiTest](#)" Automated Test System" (Patent Pending)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



9. TEST RESULTS

9.1. Radiated

Radiated Test Conditions for Radiated Spurious and Band-Edge Emissions			
Standard:	FCC CFR 47:15.407	Ambient Temp. (°C):	20.0 - 24.5
Test Heading:	Radiated Spurious and Band-Edge Emissions	Rel. Humidity (%):	32 - 45
Standard Section(s):	15.407 (b), 15.205, 15.209	Pressure (mBars):	999 - 1001
Reference Document(s):	See Normative References		

Test Procedure for Radiated Spurious and Band-Edge Emissions

Radiated emissions for restricted bands above 1 GHz are measured in the anechoic chamber at a 3-meter distance on every azimuth in both horizontal and vertical polarities. The emissions are recorded and maximized as a function of azimuth by rotation through 360° with a spectrum analyzer in peak hold mode. Depending on the frequency band spanned a notch filter and waveguide filter was used to remove the fundamental frequency. The highest emissions relative to the limit are listed for each frequency spanned. Measurements on any restricted band frequency or frequencies above 1 GHz are based on the use of measurement instrumentation employing peak and average detectors. All measurements were performed using a resolution bandwidth of 1 MHz.

Test configuration and setup for Undesirable Measurement were per the Radiated Test Set-up specified in this document.

15.407 (b) Undesirable emission limits. Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

- (1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (4) For transmitters operating in the 5.725-5.85 GHz band: All emissions within the frequency range from the band edge to 10 MHz above or below the band edge shall not exceed an e.i.r.p. of -17 dBm/MHz; for frequencies 10 MHz or greater above or below the band edge, emissions shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (5) The emission measurements shall be performed using a minimum resolution bandwidth of 1 MHz. A lower resolution bandwidth may be employed near the band edge, when necessary, provided the measured energy is integrated to show the total power over 1 MHz.
- (6) Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in §15.209. Further, any U-NII devices using an AC power line are required to comply also with the conducted limits set forth in §15.207.
- (7) The provisions of §15.205 apply to intentional radiators operating under this section.
- (8) When measuring the emission limits, the nominal carrier frequency shall be adjusted as close to the upper and lower frequency band edges as the design of the equipment permits.

Limits for Restricted Bands (15.205, 15.209)

Peak emission: 74 dBuV/m

Average emission: 54 dBuV/m

Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Loss, and subtracting Amplifier Gain from the measured reading. All factors are included in the reported data.

FS = R + AF + CORR - FO

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



where:

FS = Field Strength
 R = Measured Spectrum analyzer Input Amplitude
 AF = Antenna Factor
 CORR = Correction Factor = CL – AG + NFL
 CL = Cable Loss
 AG = Amplifier Gain
 FO = Distance Falloff Factor
 NFL = Notch Filter Loss or Waveguide Loss

Example:

The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength (dBµV/m);

$$E = 1000000 \times \sqrt{\frac{30P}{3}} \mu\text{V/m}$$

where P is the EIRP in Watts

Therefore: -27 dBm/MHz equates to 68.23 dBuV/m

Conversion between dBmV/m (or dBmV) and mV/m (or mV) are as follows:

Level (dBmV/m) = 20 * Log (level (mV/m))

40 dBmV/m = 100 mV/m

48 dBmV/m = 250 mV/m

Restricted Bands of Operation (15.205)

(a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

Frequency Band			
MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



12.57675-12.57725	322-335.4	3600-4400	Above 38.6
13.36-13.41			

(b) Except as provided in paragraphs (d) and (e) of this section, the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in §15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in §15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in §15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in §15.35 apply to these measurements.

(c) Except as provided in paragraphs (d) and (e) of this section, regardless of the field strength limits specified elsewhere in this subpart, the provisions of this section apply to emissions from any intentional radiator.

(d) The following devices are exempt from the requirements of this section:

(1) Swept frequency field disturbance sensors operating between 1.705 and 37 MHz provided their emissions only sweep through the bands listed in paragraph (a) of this section, the sweep is never stopped with the fundamental emission within the bands listed in paragraph (a) of this section, and the fundamental emission is outside of the bands listed in paragraph (a) of this section more than 99% of the time the device is actively transmitting, without compensation for duty cycle.

(2) Transmitters used to detect buried electronic markers at 101.4 kHz which are employed by telephone companies.

(3) Cable locating equipment operated pursuant to §15.213.

(4) Any equipment operated under the provisions of §15.253, 15.255, and 15.256 in the frequency band 75-85 GHz, or §15.257 of this part.

(5) Biomedical telemetry devices operating under the provisions of §15.242 of this part are not subject to the restricted band 608-614 MHz but are subject to compliance within the other restricted bands.

(6) Transmitters operating under the provisions of subparts D or F of this part.

(7) Devices operated pursuant to §15.225 are exempt from complying with this section for the 13.36-13.41 MHz band only.

(8) Devices operated in the 24.075-24.175 GHz band under §15.245 are exempt from complying with the requirements of this section for the 48.15-48.35 GHz and 72.225-72.525 GHz bands only, and shall not exceed the limits specified in §15.245(b).

(9) Devices operated in the 24.0-24.25 GHz band under §15.249 are exempt from complying with the requirements of this section for the 48.0-48.5 GHz and 72.0-72.75 GHz bands only, and shall not exceed the limits specified in §15.249(a).

(e) Harmonic emissions appearing in the restricted bands above 17.7 GHz from field disturbance sensors operating under the provisions of §15.245 shall not exceed the limits specified in §15.245(b).



Title: Actiontec Electronics Inc WEB5500
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: ATEC11-U8b Radiated Rev B
Issue Date: 27th April 2017
Page: 22 of 53

9.1.1. Restricted Band Emissions

9.1.1.1. 5150-5250 MHz

Equipment Configuration for Radiated Spurious - Restricted Band Emissions

Antenna:	Galtronics Custom PCB	Variant:	802.11a
Antenna Gain (dBi):	6.00	Modulation:	OFDM
Beam Forming Gain (Y):	Not Applicable	Duty Cycle (%):	100
Channel Frequency (MHz):	5180.00	Data Rate:	6.00 MBit/s
Power Setting:	23	Tested By:	JMH

Test Measurement Results

Num	Frequency MHz	Raw dB μ V	Cable Loss	AF dB	Level dB μ V/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dB μ V/m	Margin dB	Pass /Fail
#1	2257.91	37.10	2.63	-12.11	27.62	Max Avg	Vertical	156	193	54.0	-26.4	Pass
#2	2257.91	63.33	2.63	-12.11	53.85	Max Peak	Vertical	156	193	74.0	-20.2	Pass
#3	5178.00	74.43	3.69	-11.51	66.61	Fundamental	Vertical	151	1	--	--	
#4	6906.66	56.33	4.11	-7.54	52.90	Peak (NRB)	Horizontal	151	197	--	--	Pass
#5	9667.95	53.98	5.27	-6.13	53.12	Peak (NRB)	Horizontal	151	318	--	--	Pass
#6	10357.64	59.53	5.55	-5.28	59.80	Peak (NRB)	Vertical	151	0	--	--	Pass

Test Notes: EUT at 150cm powered by ACTIONTEC PS NB524j120150VU

NRB – Non-Restricted Band

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Actiontec Electronics Inc WEB5500
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: ATEC11-U8b Radiated Rev B
Issue Date: 27th April 2017
Page: 23 of 53

Equipment Configuration for Radiated Spurious - Restricted Band Emissions

Antenna:	Galtronics Custom PCB	Variant:	802.11a
Antenna Gain (dBi):	6.00	Modulation:	OFDM
Beam Forming Gain (Y):	Not Applicable	Duty Cycle (%):	100
Channel Frequency (MHz):	5200.00	Data Rate:	6.00 MBit/s
Power Setting:	23	Tested By:	JMH

Test Measurement Results

Num	Frequency MHz	Raw dB μ V	Cable Loss	AF dB	Level dB μ V/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dB μ V/m	Margin dB	Pass /Fail
#1	2260.73	37.07	2.63	-12.12	27.58	Max Avg	Vertical	124	200	54.0	-26.4	Pass
#2	2260.73	64.01	2.63	-12.12	54.52	Max Peak	Vertical	124	200	74.0	-19.5	Pass
#3	5201.72	79.73	3.66	-11.46	71.93	Fundamental	Horizontal	151	1	--	--	
#4	6933.20	57.30	4.11	-7.49	53.92	Peak (NRB)	Horizontal	151	232	--	--	Pass
#5	9667.94	53.06	5.27	-6.13	52.20	Peak (NRB)	Horizontal	151	358	--	--	Pass
#6	10410.14	59.49	5.49	-4.96	60.02	Peak (NRB)	Vertical	151	0	--	--	Pass

Test Notes: EUT at 150cm powered by Actiontec PS NB524J120150VU

NRB – Non-Restricted Band

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Actiontec Electronics Inc WEB5500
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: ATEC11-U8b Radiated Rev B
Issue Date: 27th April 2017
Page: 24 of 53

Equipment Configuration for Radiated Spurious - Restricted Band Emissions

Antenna:	Galtronics Custom PCB	Variant:	802.11a
Antenna Gain (dBi):	6.00	Modulation:	OFDM
Beam Forming Gain (Y):	Not Applicable	Duty Cycle (%):	100
Channel Frequency (MHz):	5240.00	Data Rate:	6.00 MBit/s
Power Setting:	23	Tested By:	JMH

Test Measurement Results

Num	Frequency MHz	Raw dBµV	Cable Loss	AF dB	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
#1	2257.83	37.07	2.63	-12.11	27.59	Max Avg	Vertical	117	179	54.0	-26.4	Pass
#2	2257.83	64.39	2.63	-12.11	54.91	Max Peak	Vertical	117	179	74.0	-19.1	Pass
#3	5241.72	79.17	3.63	-11.36	71.44	Fundamental	Horizontal	151	0	--	--	
#4	6986.58	55.95	4.13	-7.45	52.63	Peak (NRB)	Horizontal	151	214	--	--	Pass
#5	9667.83	53.53	5.27	-6.13	52.67	Peak (NRB)	Horizontal	151	360	--	--	Pass
#6	10490.06	62.75	5.45	-4.39	63.81	Peak (NRB)	Vertical	151	0	--	--	Pass

Test Notes: EUT at 150cm powered by Actiontec PS NB524J120150VU

NRB – Non-Restricted Band

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Actiontec Electronics Inc WEB5500
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: ATEC11-U8b Radiated Rev B
Issue Date: 27th April 2017
Page: 25 of 53

9.1.1.2. 5725-5850 MHz

Equipment Configuration for Radiated Spurious - Restricted Band Emissions

Antenna:	Galtronics Custom PCB	Variant:	802.11a
Antenna Gain (dBi):	6.70	Modulation:	OFDM
Beam Forming Gain (Y):	Not Applicable	Duty Cycle (%):	100
Channel Frequency (MHz):	5745.00	Data Rate:	6.00 MBit/s
Power Setting:	23	Tested By:	JMH

Test Measurement Results

Num	Frequency MHz	Raw dBµV	Cable Loss	AF dB	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
#1	3829.99	54.92	3.21	-10.83	47.30	Max Avg	Vertical	197	307	54.0	-6.7	Pass
#2	3829.99	61.70	3.21	-10.83	54.08	Max Peak	Vertical	197	307	74.0	-20.0	Pass
#3	5737.43	63.70	3.82	-10.67	56.85	Fundamental	Horizontal	151	1	--	--	
#4	7659.93	49.64	4.37	-6.95	47.06	Max Avg	Vertical	127	281	54.0	-6.9	Pass
#5	7659.93	57.38	4.37	-6.95	54.80	Max Peak	Vertical	127	281	74.0	-19.2	Pass
#6	9667.89	53.73	5.27	-6.13	52.87	Peak (NRB)	Horizontal	151	314	--	--	Pass
#7	11491.43	49.85	5.45	-4.84	50.46	Max Avg	Horizontal	140	25	54.0	-3.5	Pass
#8	11491.43	63.10	5.45	-4.84	63.71	Max Peak	Horizontal	140	25	74.0	-10.3	Pass

Test Notes: EUT at 150cm powered by Actiontec PS NB524J120150VU

NRB – Non-Restricted Band

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Actiontec Electronics Inc WEB5500
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: ATEC11-U8b Radiated Rev B
Issue Date: 27th April 2017
Page: 26 of 53

Equipment Configuration for Radiated Spurious - Restricted Band Emissions

Antenna:	Galtronics Custom PCB	Variant:	802.11a
Antenna Gain (dBi):	6.70	Modulation:	OFDM
Beam Forming Gain (Y):	Not Applicable	Duty Cycle (%):	100
Channel Frequency (MHz):	5785.00	Data Rate:	6.00 MBit/s
Power Setting:	23	Tested By:	JMH

Test Measurement Results

Num	Frequency MHz	Raw dBµV	Cable Loss	AF dB	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
#1	2259.17	36.87	2.63	-12.11	27.39	Max Avg	Vertical	156	124	54.0	-26.6	Pass
#2	2259.17	61.83	2.63	-12.11	52.35	Max Peak	Vertical	156	124	74.0	-21.7	Pass
#3	3856.66	52.14	3.23	-10.81	44.56	Max Avg	Vertical	155	271	54.0	-9.4	Pass
#4	3856.66	59.36	3.23	-10.81	51.78	Max Peak	Vertical	155	271	74.0	-22.3	Pass
#5	5777.92	67.81	3.80	-10.48	61.13	Fundamental	Vertical	151	0	--	--	
#6	9667.95	54.18	5.27	-6.13	53.32	Peak (NRB)	Horizontal	151	277	--	--	Pass
#7	11571.78	48.51	5.42	-4.63	49.30	Max Avg	Vertical	170	313	54.0	-4.7	Pass
#8	11571.78	61.64	5.42	-4.63	62.43	Max Peak	Vertical	170	313	74.0	-11.6	Pass

Test Notes: EUT at 150cm powered by Actiontec PS NB524J120150VU
 NRB – Non-Restricted Band

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Actiontec Electronics Inc WEB5500
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: ATEC11-U8b Radiated Rev B
Issue Date: 27th April 2017
Page: 27 of 53

Equipment Configuration for Radiated Spurious - Restricted Band Emissions

Antenna:	Galtronics Custom PCB	Variant:	802.11a
Antenna Gain (dBi):	6.70	Modulation:	OFDM
Beam Forming Gain (Y):	Not Applicable	Duty Cycle (%):	100
Channel Frequency (MHz):	5825.00	Data Rate:	6.00 MBit/s
Power Setting:	23	Tested By:	JMH

Test Measurement Results

Num	Frequency MHz	Raw dBµV	Cable Loss	AF dB	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
#1	2250.86	36.81	2.63	-12.10	27.34	Max Avg	Vertical	100	186	54.0	-26.7	Pass
#2	2250.86	63.18	2.63	-12.10	53.71	Max Peak	Vertical	100	186	74.0	-20.3	Pass
#3	3883.33	56.22	3.25	-10.76	48.71	Max Avg	Vertical	189	307	54.0	-5.3	Pass
#4	3883.33	62.66	3.25	-10.76	55.15	Max Peak	Vertical	189	307	74.0	-18.9	Pass
#5	5819.88	67.75	3.83	-10.26	61.32	Fundamental	Horizontal	151	243	--	--	
#6	7766.56	53.41	4.43	-6.71	51.13	Peak (NRB)	Vertical	151	243	--	--	Pass
#7	9667.86	52.28	5.27	-6.13	51.42	Peak (NRB)	Horizontal	151	243	--	--	Pass
#8	11651.67	49.16	5.48	-4.46	50.18	Max Avg	Vertical	185	313	54.0	-3.8	Pass
#9	11651.67	62.48	5.48	-4.46	63.50	Max Peak	Vertical	185	313	74.0	-10.5	Pass

Test Notes: EUT at 150cm powered by Actiontec PS NB524J120150VU

NRB – Non-Restricted Band

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Actiontec Electronics Inc WEB5500
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: ATEC11-U8b Radiated Rev B
Issue Date: 27th April 2017
Page: 28 of 53

9.1.2. Restricted Band-Edge Emissions

9.1.2.1. 5150-5250 MHz

RESULTS SUMMARY FOR RADIATED BAND-EDGE EMISSIONS

Galtronics Custom PCB SMT		Band-Edge Freq	Peak (Limit 74.0dB μ V/m)	Average (Limit 54.0dB μ V/m)	Power Setting
Operational Mode	Operating Frequency (MHz)	MHz	dB μ V/m	dB μ V/m	
802.11a	5180.00	5150.00	66.06	53.65	20.00
802.11ac-80	5210.00	5150.00	66.30	53.44	19.00
802.11n HT-20	5180.00	5150.00	65.24	52.83	16.00
802.11n HT-40	5190.00	5150.00	70.70	53.86	16.00


Click on the links to view the data.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



802.11a Radiated Band-Edge 5150 MHz, Channel Frequency 5180 MHz

	Ref Lvl	Marker 1 [T1]	RBW	1 MHz	RF Att	0 dB
	100 dB μ V	66.06 dB μ V	VBW	3 MHz		
		5.14869739 GHz	SWT	10 s	Unit	dB μ V

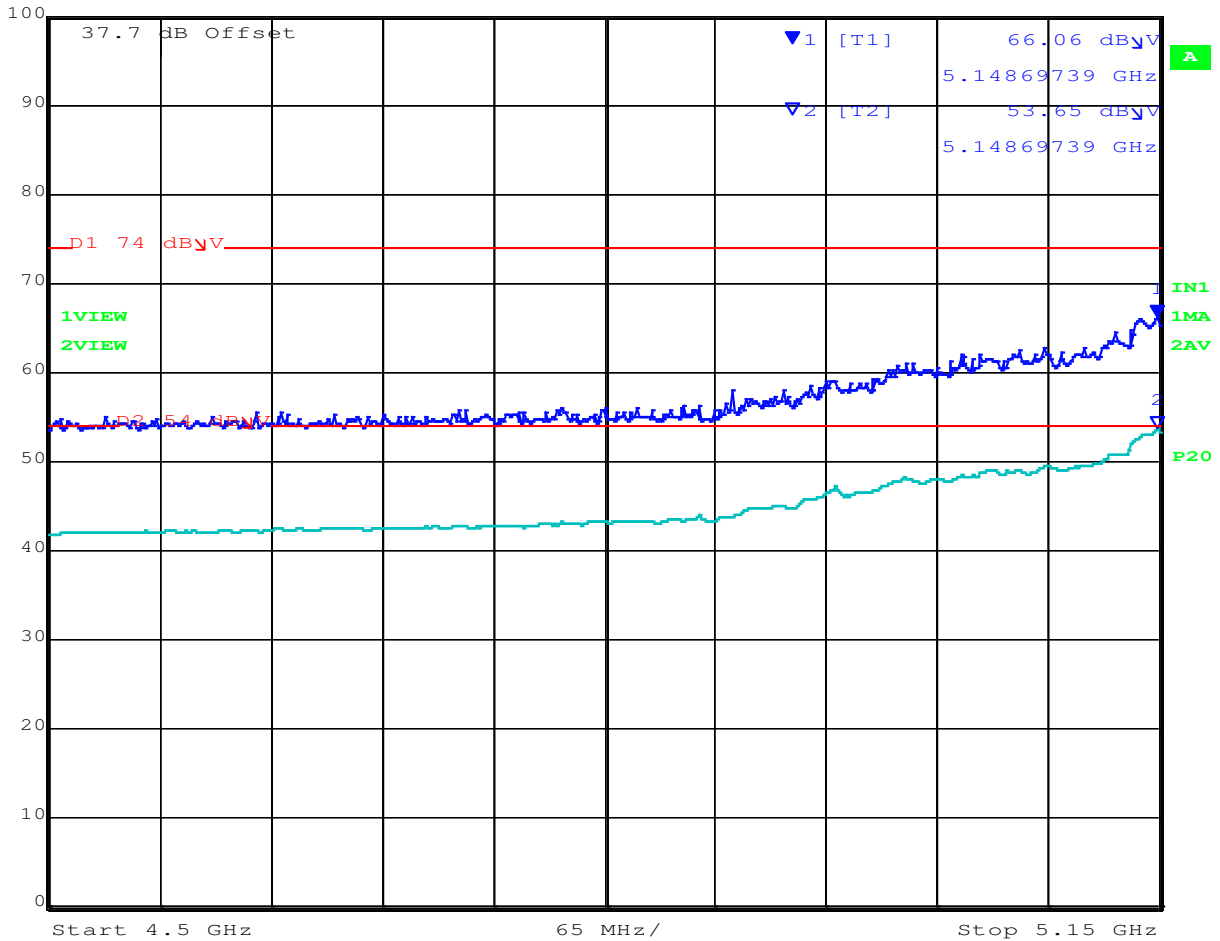


[Back to Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



802.11n HT-20 Radiated Band-Edge 5150 MHz, Channel Frequency 5180 MHz

	Marker 1 [T1]	RBW	1 MHz	RF Att	0 dB
Ref Lvl	66.30 dB μ V	VBW	3 MHz		
100 dB μ V	5.14869739 GHz	SWT	10 s	Unit	dB μ V

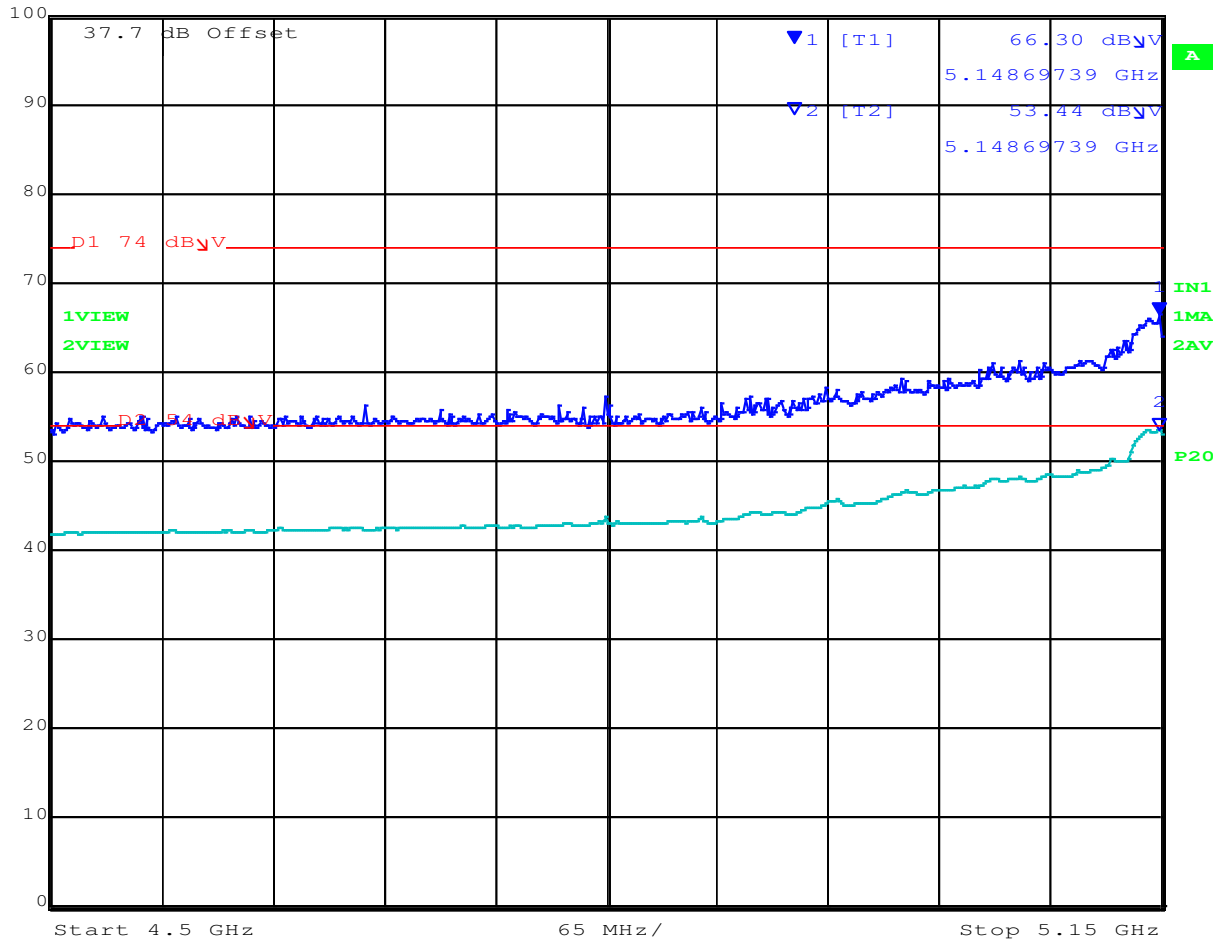

D


[Back to Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



802.11n HT-40 Radiated Band-Edge 5150 MHz, Channel Frequency 5190 MHz

	Marker 1 [T1]	RBW	1 MHz	RF Att	0 dB
Ref Lvl	65.24 dB μ V	VBW	3 MHz		
100 dB μ V	5.14869739 GHz	SWT	10 s	Unit	dB μ V

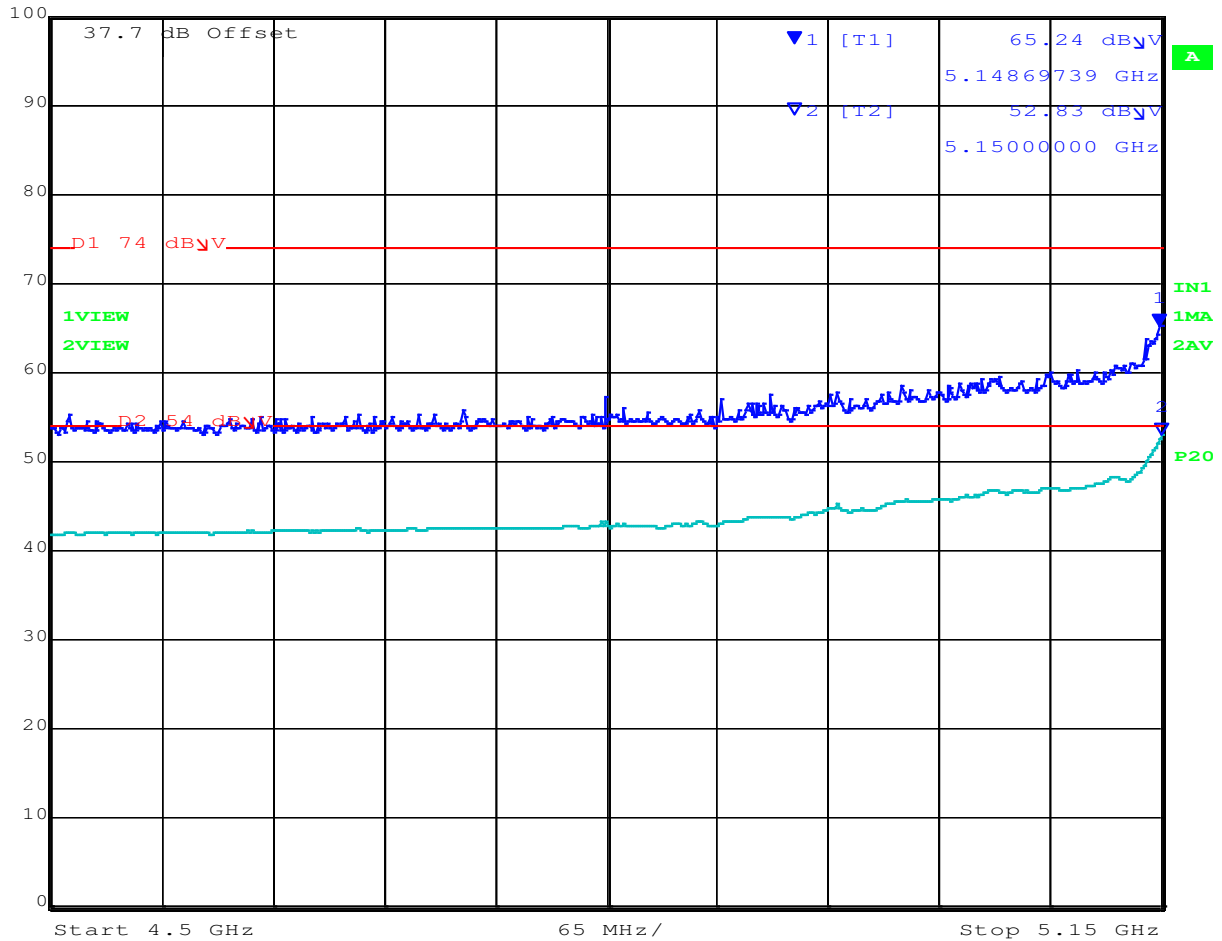

[Back to Matrix](#)


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Actiontec Electronics Inc WEB5500
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: ATEC11-U8b Radiated Rev B
Issue Date: 27th April 2017
Page: 32 of 53

802.11ac-80 Radiated Band-Edge 5150 MHz, Channel Frequency 5210 MHz

	Ref Lvl	Marker 1 [T1]	RBW	1 MHz	RF Att	0 dB
	100 dB μ V	70.70 dB μ V	VBW	3 MHz		
		5.14739479 GHz	SWT	10 s	Unit	dB μ V

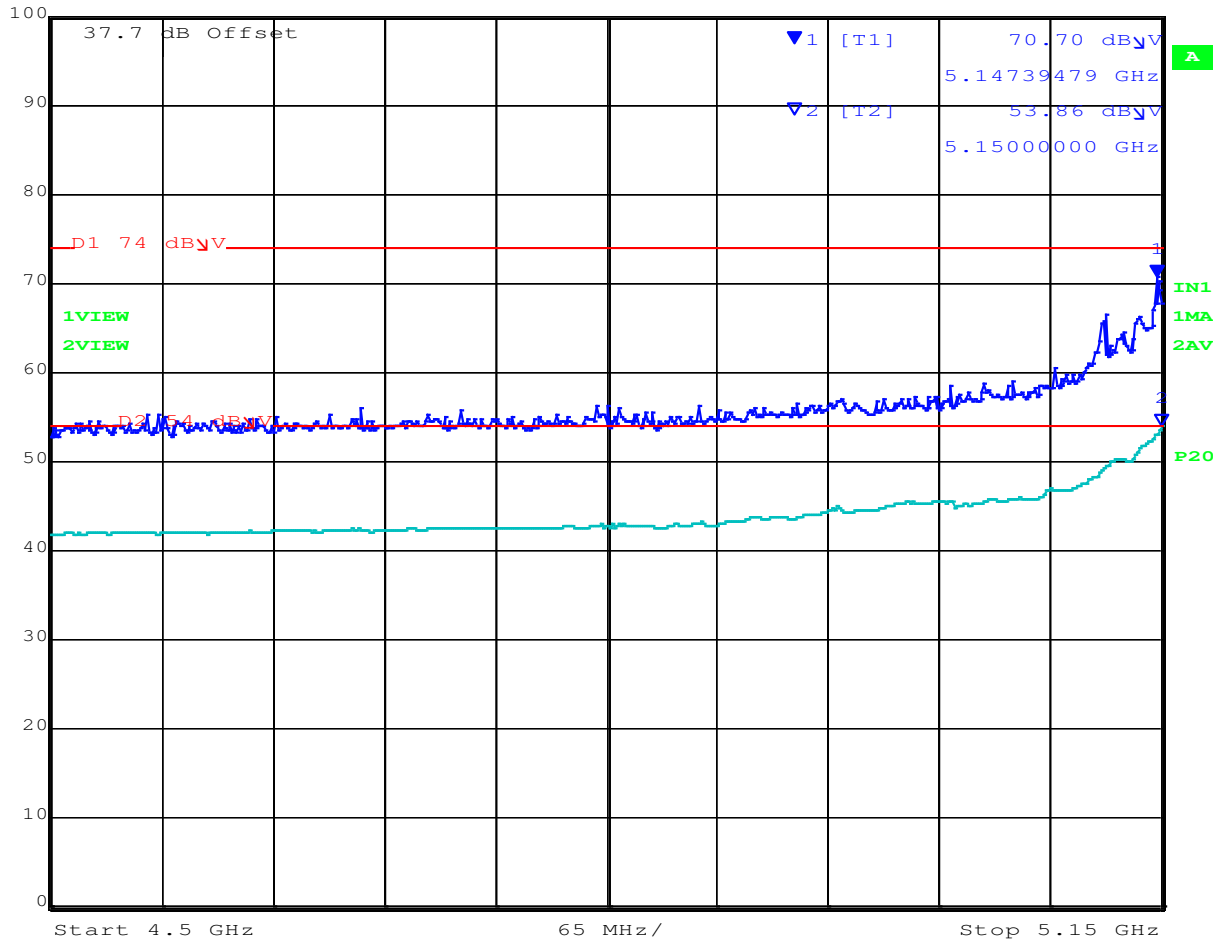

[Back to Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Actiontec Electronics Inc WEB5500
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: ATEC11-U8b Radiated Rev B
Issue Date: 27th April 2017
Page: 33 of 53

9.1.2.2. 5725-5850 MHz

Restricted Band Edge Emissions


Operational Mode	5725 MHz Restricted Band-Edge		5850 MHz Restricted Band-Edge	
	Limit 122.2 dBuV/m	Power Setting	Limit 122.2 dBuV/m	Power Setting
802.11a	63.09	23	56.85	23
802.11n HT-20	66.96	23	57.60	23
802.11n HT-40	67.12	23	55.34	23
802.11ac-80	64.37	23	59.39	23

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



802.11a Radiated Band-Edge 5725 MHz, Channel Frequency 5745 MHz

	Marker 1 [T1]	RBW	1 MHz	RF Att	10 dB
Ref Lvl	57.60 dBμV	VBW	3 MHz		
110 dBμV	5.71253507 GHz	SWT	20 s	Unit	dBμV

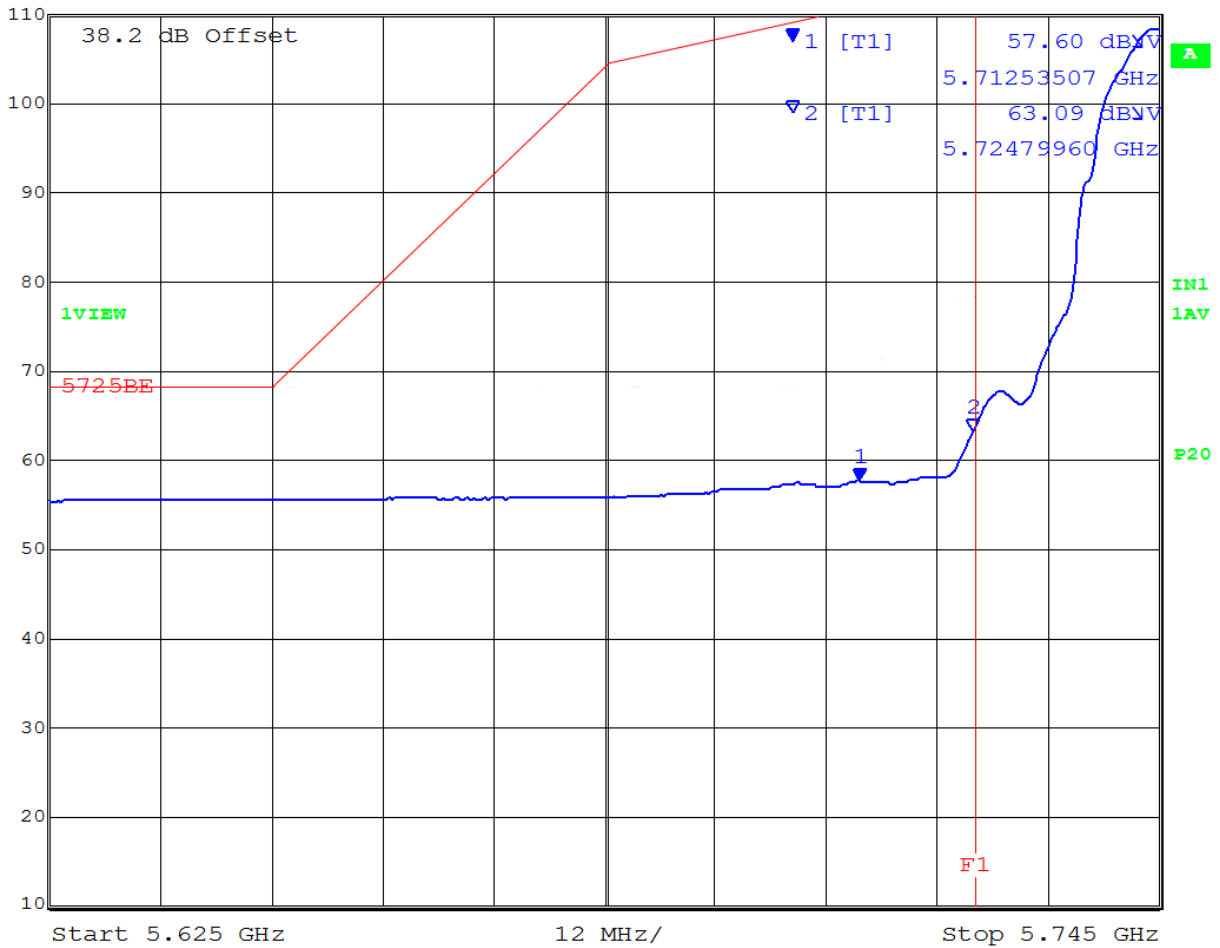

Date: 16.NOV.2015 19:35:08


[Back to Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



802.11a Radiated Band-Edge 5850 MHz, Channel Frequency 5825 MHz

	Max/Ref Lvl	Marker 1 [T1]	RBW	1 MHz	RF Att	10 dB
	110 dB μ V	56.85 dB μ V	VBW	3 MHz		
	110 dB μ V	5.85045090 GHz	SWT	20 s	Unit	dB μ V

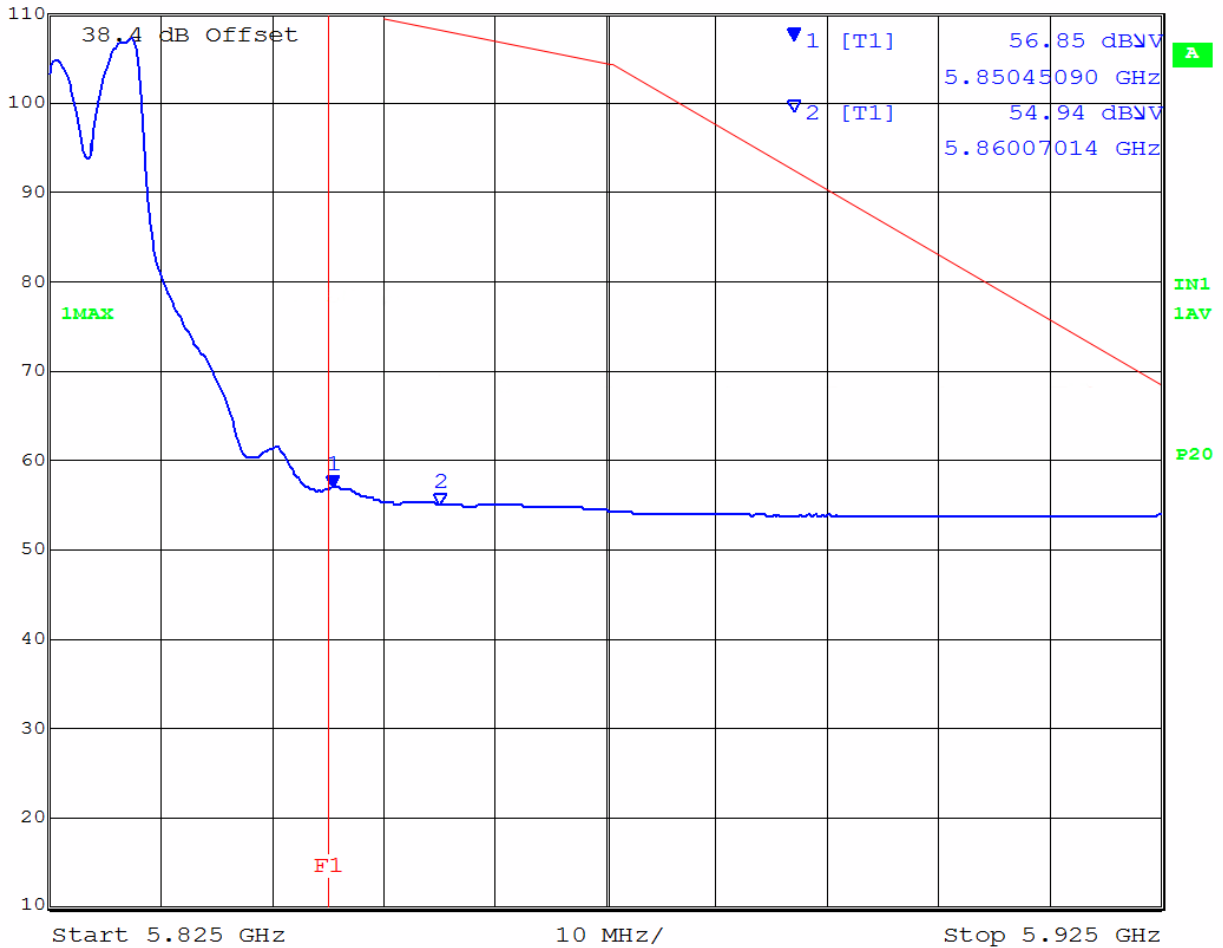

Date: 16.NOV.2015 18:02:54


[Back to Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



802.11n HT-20 Radiated Band-Edge 5725 MHz, Channel Frequency 5745 MHz

	Marker 1 [T1]	RBW	1 MHz	RF Att	10 dB
Ref Lvl	58.24 dBμV	VBW	3 MHz		
110 dBμV	5.71493988 GHz	SWT	20 s	Unit	dBμV

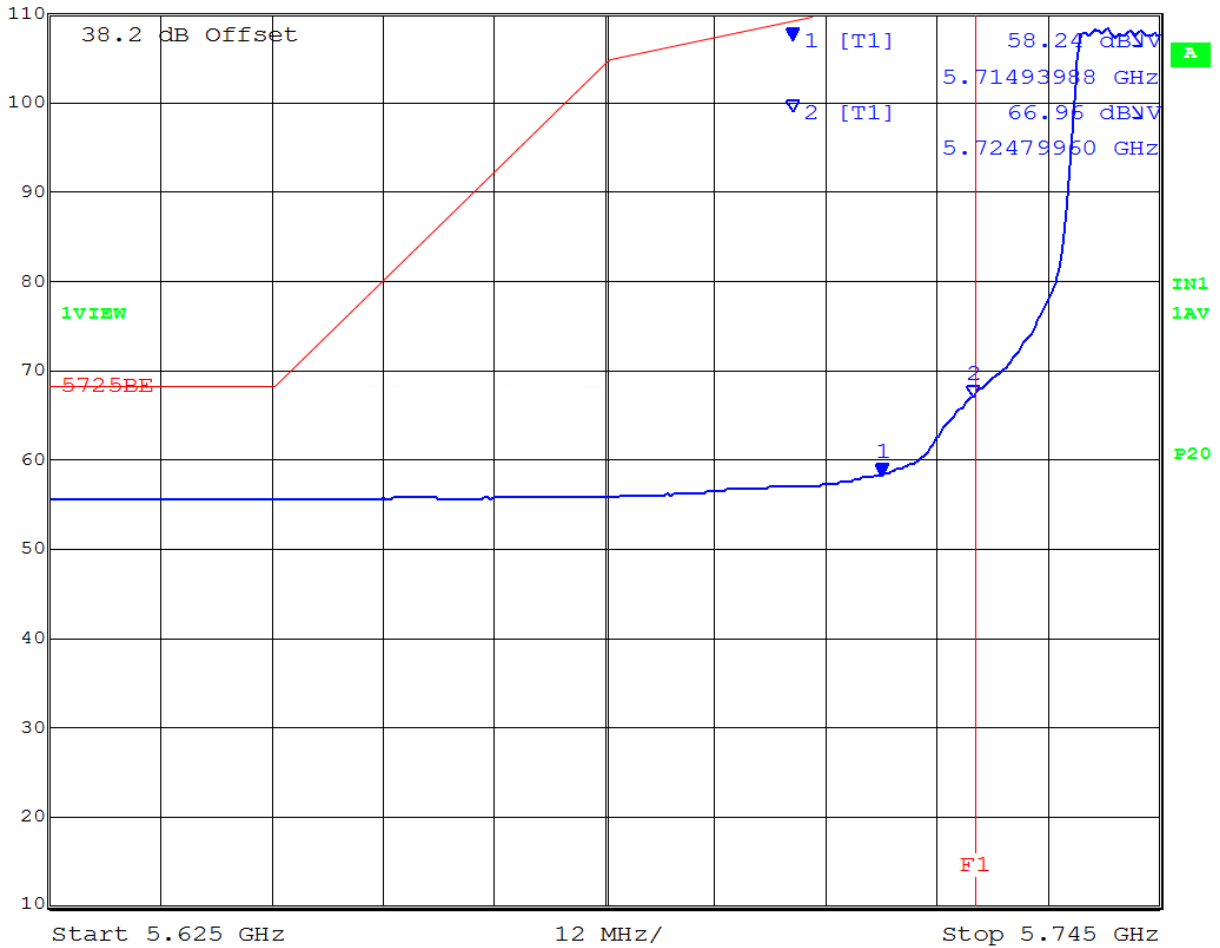

Date: 16.NOV.2015 19:20:59


[Back to Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



802.11n HT-20 Radiated Band-Edge 5850 MHz, Channel Frequency 5825 MHz

	Max/Ref Lvl	Marker 1 [T1]	RBW	1 MHz	RF Att	10 dB
	110 dBμV	57.60 dBμV	VBW	3 MHz		
	110 dBμV	5.85005010 GHz	SWT	20 s	Unit	dBμV

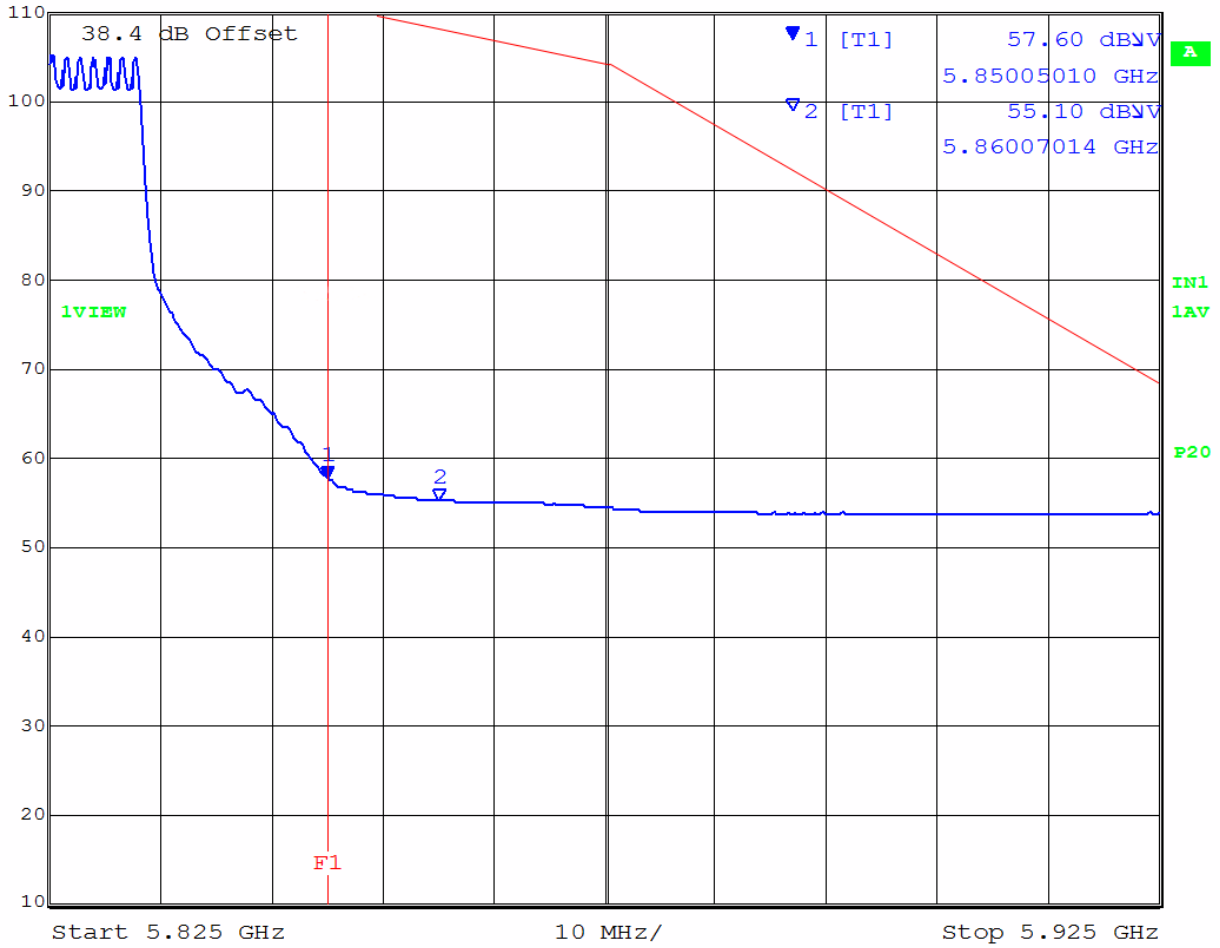

Date: 16.NOV.2015 18:07:44


[Back to Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



802.11n HT-40 Radiated Band-Edge 5725 MHz, Channel Frequency 5755 MHz

	Marker 1 [T1]	RBW	1 MHz	RF Att	10 dB
Ref Lvl	58.52 dB μ V	VBW	3 MHz		
110 dB μ V	5.71493988 GHz	SWT	20 s	Unit	dB μ V

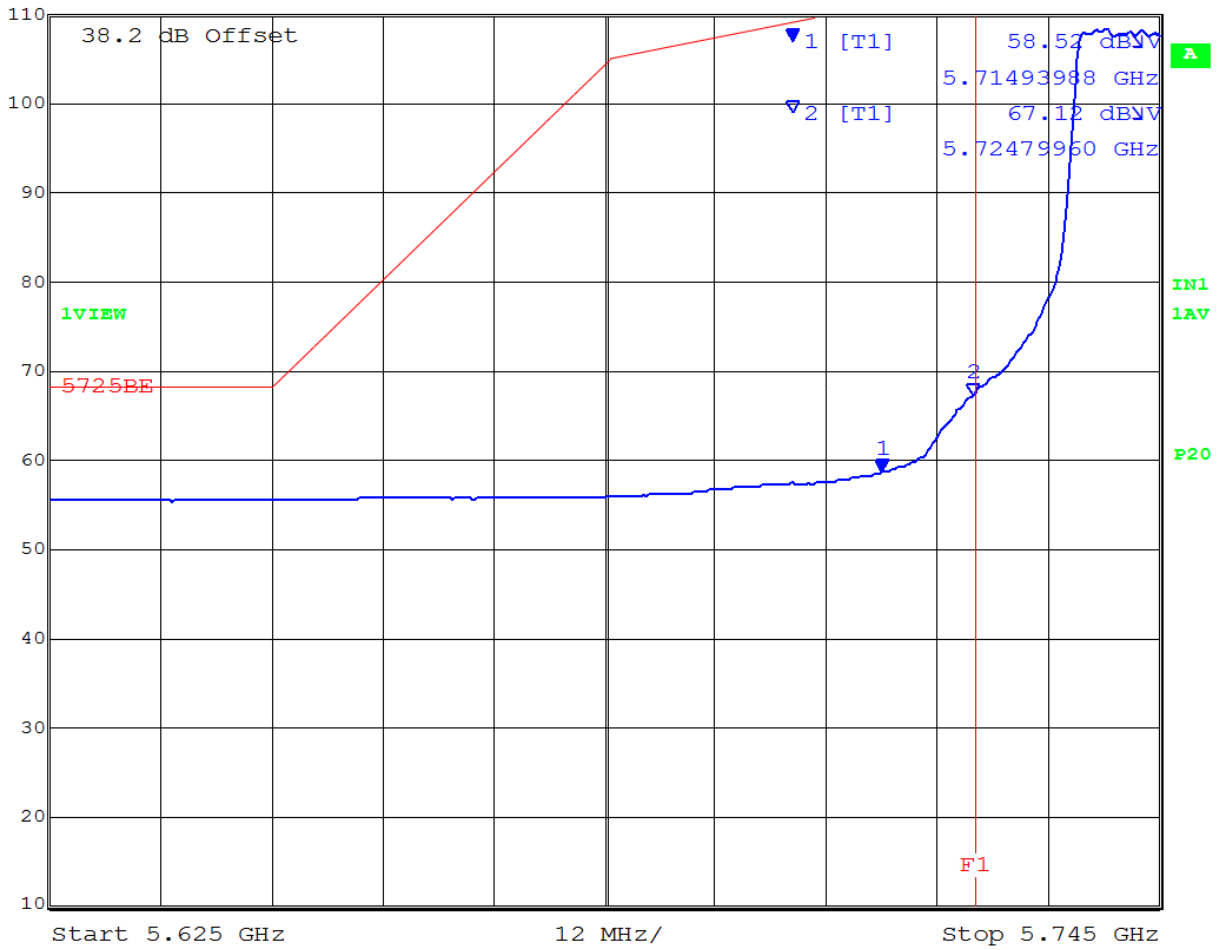

Date: 16.NOV.2015 19:32:35


[Back to Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



802.11n HT-40 Radiated Band-Edge 5850 MHz, Channel Frequency 5795 MHz

	Max/Ref Lvl	Marker 1 [T1]	RBW	1 MHz	RF Att	10 dB
	110 dBμV	55.34 dBμV	VBW	3 MHz		
	110 dBμV	5.85005010 GHz	SWT	20 s	Unit	dBμV

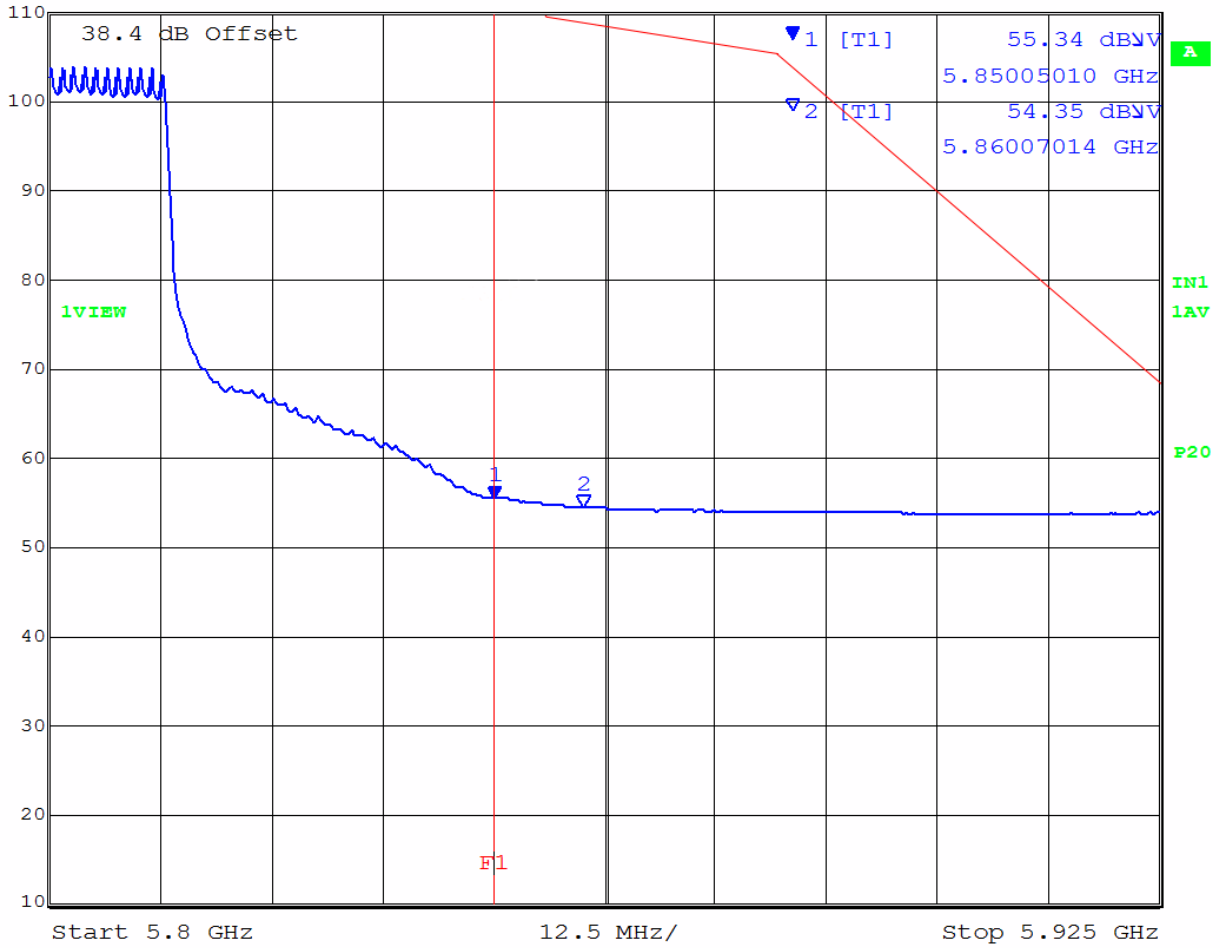

Date: 16.NOV.2015 18:10:05


[Back to Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



802.11ac-80 Radiated Band-Edge 5725 MHz, Channel Frequency 5775 MHz

	Marker 1 [T1]	RBW	1 MHz	RF Att	10 dB
Ref Lvl	66.92 dBμV	VBW	3 MHz		
110 dBμV	5.71493988 GHz	SWT	20 s	Unit	dBμV

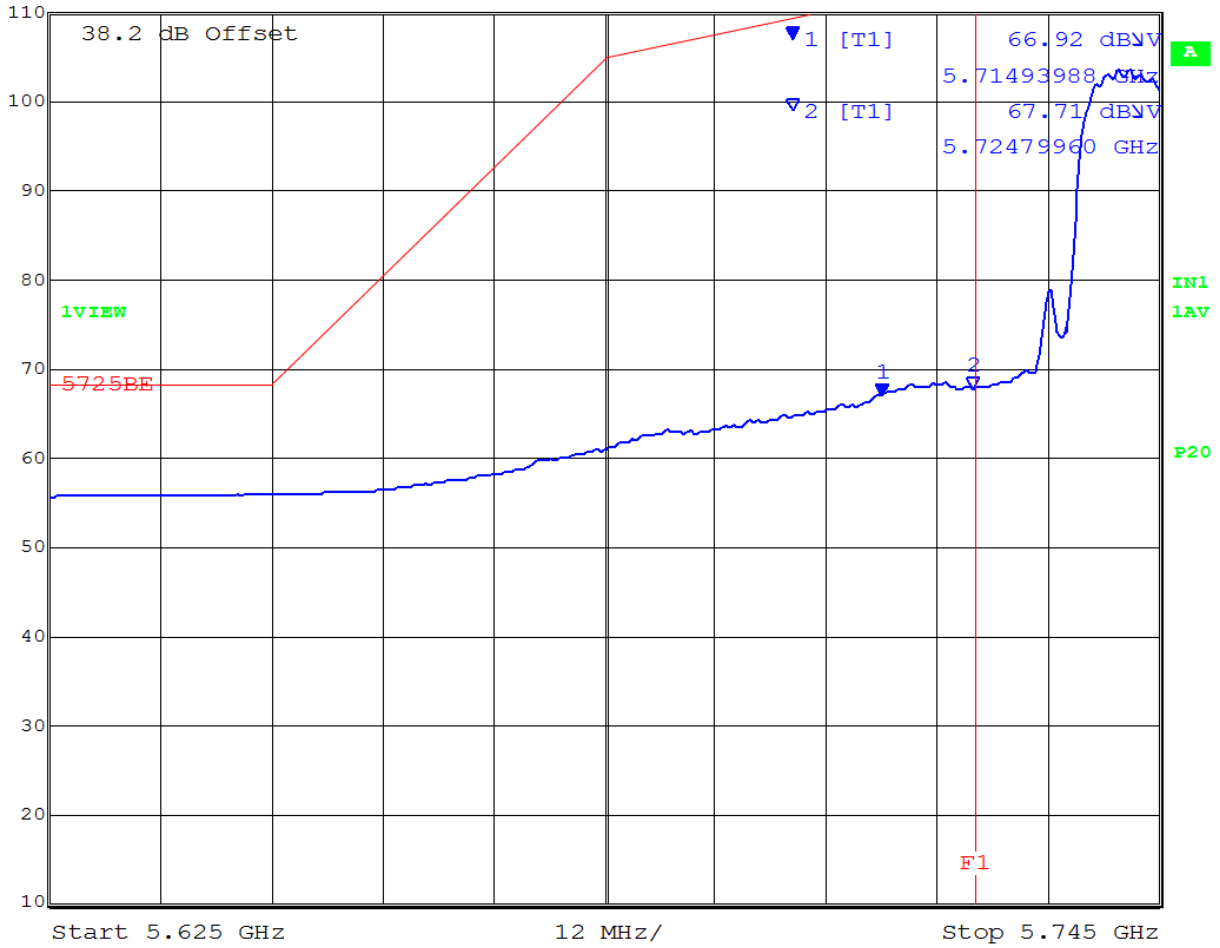

Date: 16.NOV.2015 19:26:51


[Back to Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



802.11ac-80 Radiated Band-Edge 5850 MHz, Channel Frequency 5775 MHz

	Max/Ref Lvl	Marker 1 [T1]	RBW	1 MHz	RF Att	10 dB
	110 dBμV	61.71 dBμV	VBW	3 MHz		
	110 dBμV	5.85155311 GHz	SWT	20 s	Unit	dBμV

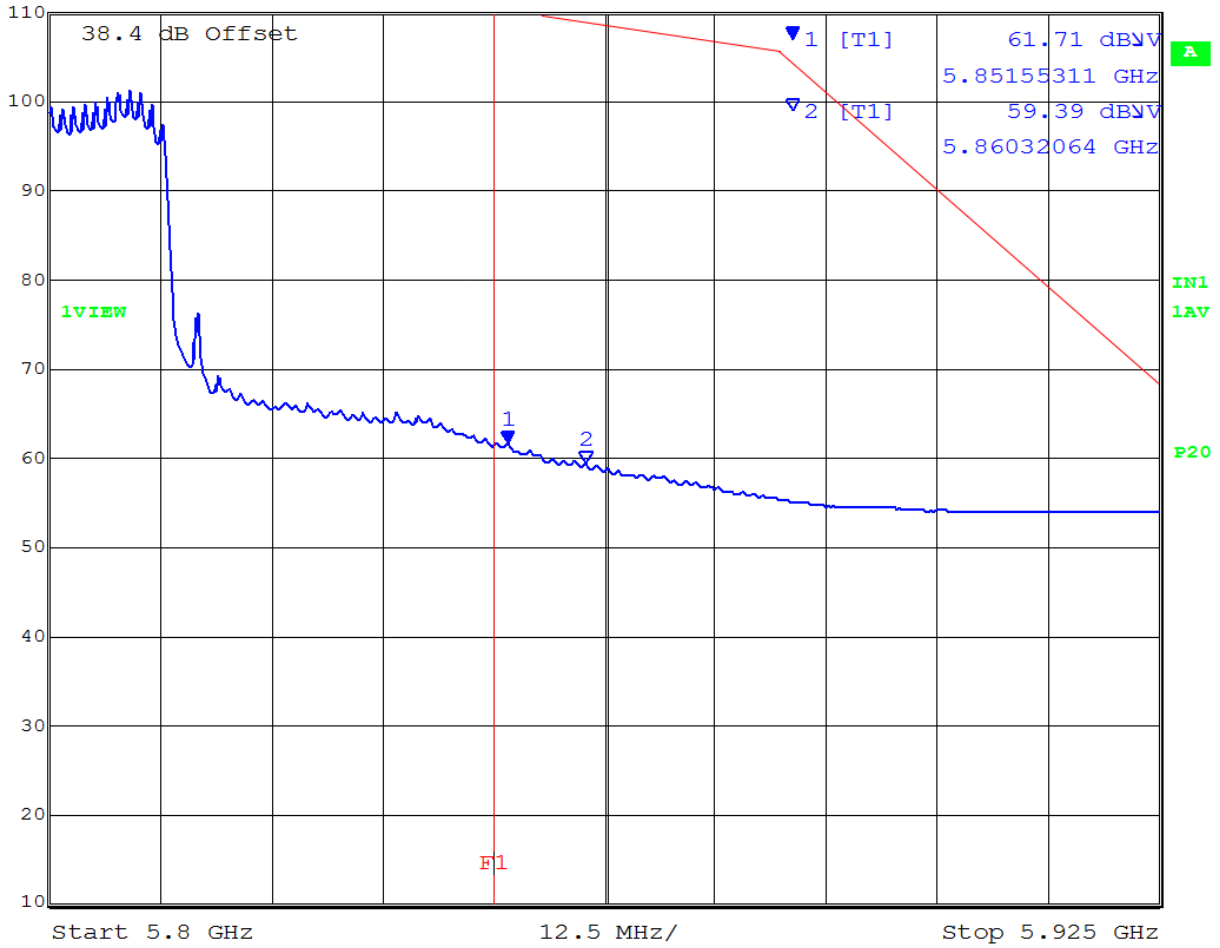

Date: 16.NOV.2015 18:25:00

[Back to Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



9.1.3. Digital Emissions

Radiated Test Conditions for Radiated Digital Emissions (0.03 – 1 GHz)			
Standard:	FCC CFR 47:15.247	Ambient Temp. (°C):	20.0 - 24.5
Test Heading:	Digital Emissions	Rel. Humidity (%):	32 - 45
Standard Section(s):	15.209	Pressure (mBars):	999 - 1001
Reference Document(s):	See Normative References		

Test Procedure for Radiated Digital Emissions (0.03 – 1 GHz)

Testing 30M-1 GHz was performed in a 3-meter anechoic chamber using a CISPR compliant receiver. Preliminary radiated emissions were measured on every azimuth and with the receiving antenna in both horizontal and vertical polarizations. To further maximize emissions the receive antenna was varied between 1 and 4 meters. The emissions are recorded with receiver in peak hold mode. Emissions closest to the limits are measured in the quasi-peak mode with the tuned receiver using a bandwidth of 120 kHz. Only the highest emissions relative to the limit are listed.

Test configuration and setup for Radiated Spurious and Band-Edge Measurement were per the Radiated Test Set-up specified in this document.

Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Loss, and subtracting Amplifier Gain from the measured reading. In this test facility, the Antenna Factor, Cable Loss, and Amplifier Gains are loaded into the Rohde & Schwarz Receiver and the corrected field strength can be read directly on the receiver.

$$FS = R + AF + CORR$$

where:

FS = Field Strength

R = Measured Receiver Input Amplitude

AF = Antenna Factor

CORR = Correction Factor = CL – AG + NFL

CL = Cable Loss

AG = Amplifier Gain

For example:

Given a Receiver input reading of 51.5dBmV; Antenna Factor of 8.5dB; Cable Loss of 1.3dB; Falloff Factor of 0dB, an Amplifier Gain of 26dB and Notch Filter Loss of 1dB. The Field Strength of the measured emission is:

$$FS = 51.5 + 8.5 + 1.3 - 26.0 + 1 = 36.3\text{dBmV/m}$$

Conversion between dBmV/m (or dBmV) and mV/m (or mV) are done as:

$$\text{Level (dBmV/m)} = 20 * \text{Log (level (mV/m))}$$

$$40 \text{ dBmV/m} = 100\text{mV/m}$$

$$48 \text{ dBmV/m} = 250\text{mV/m}$$

Limits for Radiated Digital Emissions (0.03 – 1 GHz) (15.209)

(a) Except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Actiontec Electronics Inc WEB5500
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: ATEC11-U8b Radiated Rev B
Issue Date: 27th April 2017
Page: 43 of 53

Frequency (MHz)	Field Strength		Measurement Distance (m)
	$\mu\text{V/m}$ (microvolts/meter)	$\text{dB}\mu\text{V/m}$ (dB microvolts/meter)	
0.009-0.490	2400/F(kHz)	--	300
0.490-1.705	24000/F(kHz)	--	30
1.705-30.0	30	29.5	30
30-88	100**	40	3
88-216	150**	43.5	3
216-960	200**	46.0	3
Above 960	500	54.0	3

**Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., §§15.231 and 15.241.

(b) In the emission table above, the tighter limit applies at the band edges. (c) The level of any unwanted emissions from an intentional radiator operating under these general provisions shall not exceed the level of the fundamental emission. For intentional radiators which operate under the provisions of other sections within this part and which are required to reduce their unwanted emissions to the limits specified in this table, the limits in this table are based on the frequency of the unwanted emission and not the fundamental frequency. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency. (d) The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector. (e) The provisions in §§15.31, 15.33, and 15.35 for measuring emissions at distances other than the distances specified in the above table, determining the frequency range over which radiated emissions are to be measured, and limiting peak emissions apply to all devices operated under this part. (f) In accordance with §15.33(a), in some cases the emissions from an intentional radiator must be measured to beyond the tenth harmonic of the highest fundamental frequency designed to be emitted by the intentional radiator because of the incorporation of a digital device. If measurements above the tenth harmonic are so required, the radiated emissions above the tenth harmonic shall comply with the general radiated emission limits applicable to the incorporated digital device, as shown in §15.109 and as based on the frequency of the emission being measured, or, except for emissions contained in the restricted frequency bands shown in §15.205, the limit on spurious emissions specified for the intentional radiator, whichever is the higher limit. Emissions which must be measured above the tenth harmonic of the highest fundamental frequency designed to be emitted by the intentional radiator and which fall within the restricted bands shall comply with the general radiated emission limits in §15.109 that are applicable to the incorporated digital device. (g) Perimeter protection systems may operate in the 54-72 MHz and 76-88 MHz bands under the provisions of this section. The use of such perimeter protection systems is limited to industrial, business and commercial applications.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Actiontec Electronics Inc WEB5500
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: ATEC11-U8b Radiated Rev B
Issue Date: 27th April 2017
Page: 44 of 53

Equipment Configuration for Digital Emissions

Antenna:	Galtronics Custom PCB	Variant:	802.11a
Antenna Gain (dBi):	6.00	Modulation:	OFDM
Beam Forming Gain (Y):	Not Applicable	Duty Cycle (%):	NA
Channel Frequency (MHz):	5180.00	Data Rate:	6.00 MBit/s
Power Setting:	NA	Tested By:	JMH

Test Measurement Results

Num	Frequency MHz	Raw dBµV	Cable Loss	AF dB	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
#1	30.58	38.57	3.43	-10.61	31.39	MaxQP	Vertical	101	7	40.0	-8.6	Pass
#2	31.42	38.00	3.43	-10.61	30.82	MaxQP	Vertical	111	50	40.0	-9.2	Pass
#3	32.75	37.20	3.44	-12.09	28.55	MaxQP	Vertical	100	106	40.0	-11.5	Pass
#4	32.75	36.93	3.44	-12.09	28.28	MaxQP	Vertical	100	97	40.0	-11.7	Pass
#5	56.20	53.35	3.61	-24.13	32.83	MaxQP	Vertical	100	5	40.0	-7.2	Pass
#6	60.83	53.48	3.65	-23.92	33.21	MaxQP	Vertical	118	54	40.0	-6.8	Pass
#7	79.29	55.54	3.77	-23.47	35.84	MaxQP	Vertical	100	6	40.0	-4.2	Pass
#8	98.47	58.79	3.87	-21.84	40.82	MaxQP	Vertical	100	360	43.0	-2.2	Pass
#9	101.89	58.51	3.89	-20.63	41.77	MaxQP	Vertical	100	94	43.0	-1.2	Pass

Test Notes: EUT on table connected to laptop and hub outside chamber. Laptop pinging EUT and data file transfer. Actiontec PS NB524J120150VU

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Actiontec Electronics Inc WEB5500
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: ATEC11-U8b Radiated Rev B
Issue Date: 27th April 2017
Page: 45 of 53

A. APPENDIX - GRAPHICAL IMAGES


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



A.1. Radiated

A.1.1. Restricted Band Emissions

A.1.1.1. Galtronics Custom PCB

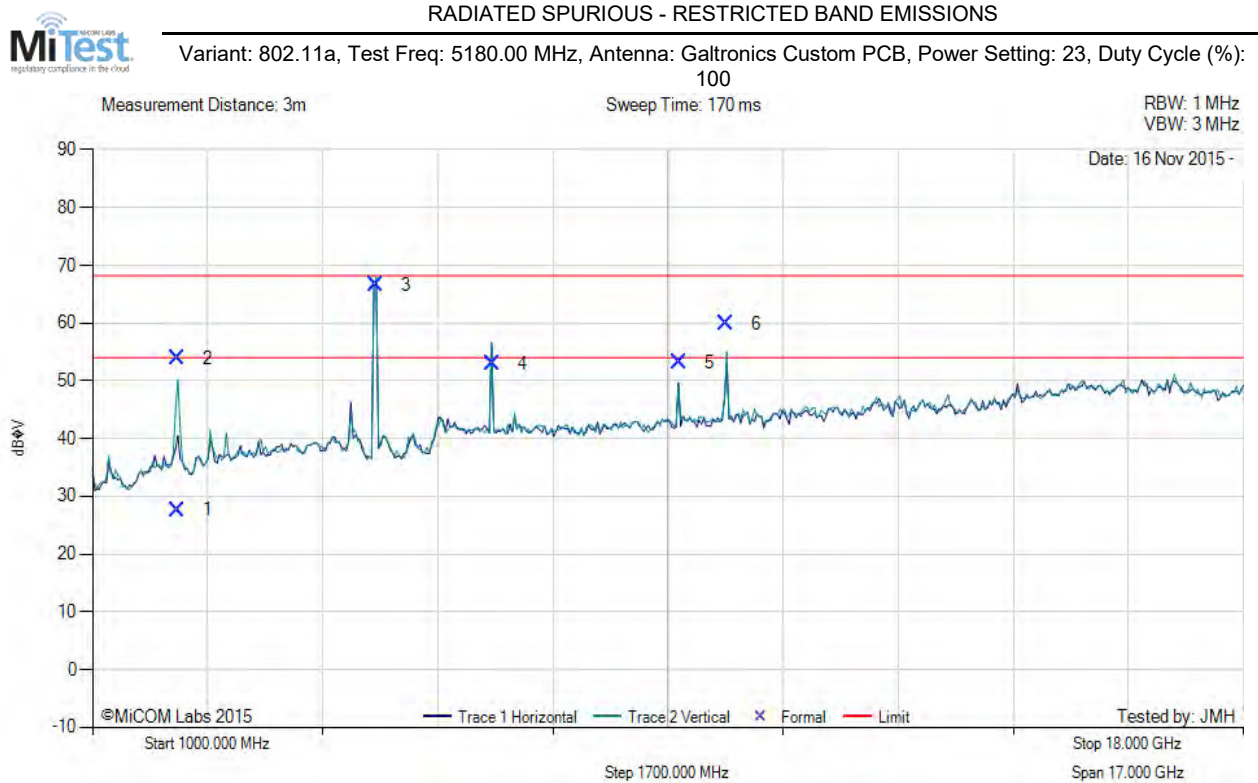

Num	Frequency MHz	Raw dBµV	Cable Loss	AF dB	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	2257.91	37.10	2.63	-12.11	27.62	Max Avg	Vertical	156	193	54.0	-26.4	Pass
2	2257.91	63.33	2.63	-12.11	53.85	Max Peak	Vertical	156	193	74.0	-20.2	Pass
3	5178.00	74.43	3.69	-11.51	66.61	Fundamental	Vertical	151	1	--	--	
4	6906.66	56.33	4.11	-7.54	52.90	Peak (NRB)	Horizontal	151	197	--	--	Pass
5	9667.95	53.98	5.27	-6.13	53.12	Peak (NRB)	Horizontal	151	318	--	--	Pass
6	10357.64	59.53	5.55	-5.28	59.80	Peak (NRB)	Vertical	151	0	--	--	Pass

Test Notes: EUT at 150cm powered by ACTIONTEC PS NB524j120150VU

NRB – Non-Restricted Band

[back to matrix](#)


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



RADIATED SPURIOUS - RESTRICTED BAND EMISSIONS



Variant: 802.11a, Test Freq: 5200.00 MHz, Antenna: Galtronics Custom PCB, Power Setting: 23, Duty Cycle (%): 100

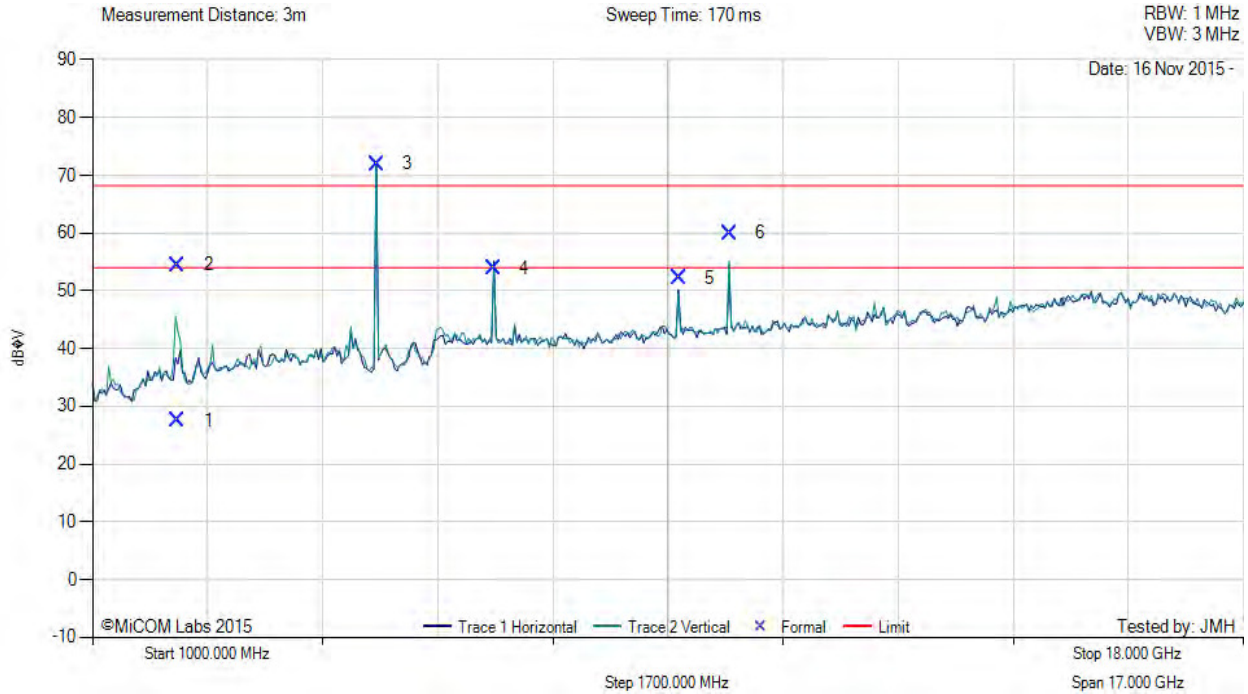

Num	Frequency MHz	Raw dBμV	Cable Loss	AF dB	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
1	2260.73	37.07	2.63	-12.12	27.58	Max Avg	Vertical	124	200	54.0	-26.4	Pass
2	2260.73	64.01	2.63	-12.12	54.52	Max Peak	Vertical	124	200	74.0	-19.5	Pass
3	5201.72	79.73	3.66	-11.46	71.93	Fundamental	Horizontal	151	1	--	--	
4	6933.20	57.30	4.11	-7.49	53.92	Peak (NRB)	Horizontal	151	232	--	--	Pass
5	9667.94	53.06	5.27	-6.13	52.20	Peak (NRB)	Horizontal	151	358	--	--	Pass
6	10410.14	59.49	5.49	-4.96	60.02	Peak (NRB)	Vertical	151	0	--	--	Pass

Test Notes: EUT at 150cm powered by Actiontec PS NB524J120150VU

NRB – Non-Restricted Band

[back to matrix](#)


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



RADIATED SPURIOUS - RESTRICTED BAND EMISSIONS



Variant: 802.11a, Test Freq: 5240.00 MHz, Antenna: Galtronics Custom PCB, Power Setting: 23, Duty Cycle (%): 100

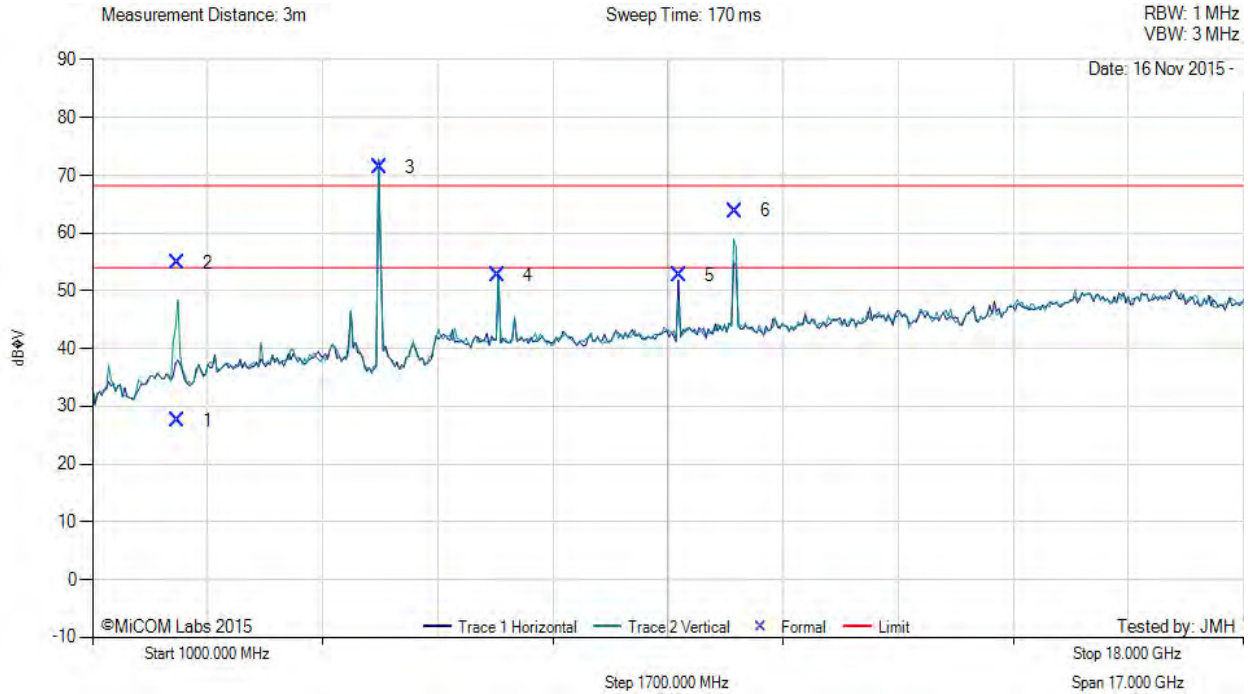

Num	Frequency MHz	Raw dBμV	Cable Loss	AF dB	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
1	2257.83	37.07	2.63	-12.11	27.59	Max Avg	Vertical	117	179	54.0	-26.4	Pass
2	2257.83	64.39	2.63	-12.11	54.91	Max Peak	Vertical	117	179	74.0	-19.1	Pass
3	5241.72	79.17	3.63	-11.36	71.44	Fundamental	Horizontal	151	0	--	--	
4	6986.58	55.95	4.13	-7.45	52.63	Peak (NRB)	Horizontal	151	214	--	--	Pass
5	9667.83	53.53	5.27	-6.13	52.67	Peak (NRB)	Horizontal	151	360	--	--	Pass
6	10490.06	62.75	5.45	-4.39	63.81	Peak (NRB)	Vertical	151	0	--	--	Pass

Test Notes: EUT at 150cm powered by Actiontec PS NB524J120150VU

NRB – Non-Restricted Band

[back to matrix](#)


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



RADIATED SPURIOUS - RESTRICTED BAND EMISSIONS



Variant: 802.11a, Test Freq: 5745.00 MHz, Antenna: Galtronics Custom PCB, Power Setting: 23, Duty Cycle (%): 100

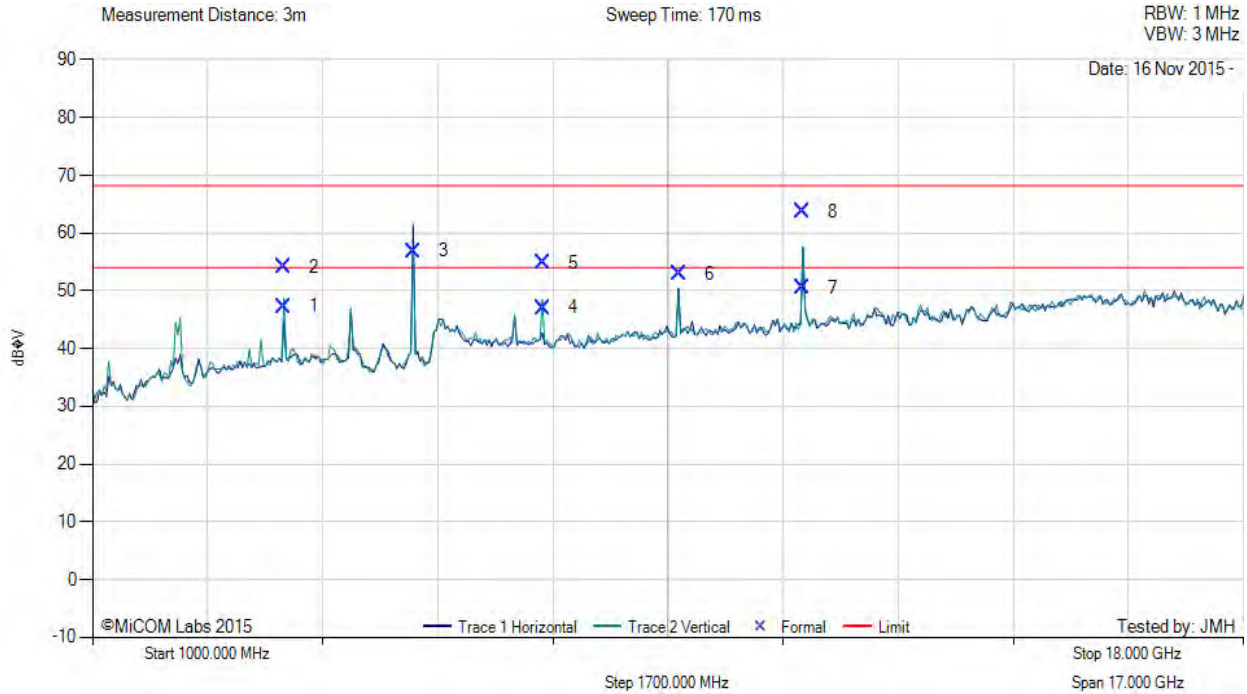

Num	Frequency MHz	Raw dBµV	Cable Loss	AF dB	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	3829.99	54.92	3.21	-10.83	47.30	Max Avg	Vertical	197	307	54.0	-6.7	Pass
2	3829.99	61.70	3.21	-10.83	54.08	Max Peak	Vertical	197	307	74.0	-20.0	Pass
3	5737.43	63.70	3.82	-10.67	56.85	Fundamental	Horizontal	151	1	--	--	
4	7659.93	49.64	4.37	-6.95	47.06	Max Avg	Vertical	127	281	54.0	-6.9	Pass
5	7659.93	57.38	4.37	-6.95	54.80	Max Peak	Vertical	127	281	74.0	-19.2	Pass
6	9667.89	53.73	5.27	-6.13	52.87	Peak (NRB)	Horizontal	151	314	--	--	Pass
7	11491.43	49.85	5.45	-4.84	50.46	Max Avg	Horizontal	140	25	54.0	-3.5	Pass
8	11491.43	63.10	5.45	-4.84	63.71	Max Peak	Horizontal	140	25	74.0	-10.3	Pass

Test Notes: EUT at 150cm powered by Actiontec PS NB524J120150VU

NRB – Non-Restricted Band


[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

RADIATED SPURIOUS - RESTRICTED BAND EMISSIONS



Variant: 802.11a, Test Freq: 5785.00 MHz, Antenna: Galtronics Custom PCB, Power Setting: 23, Duty Cycle (%): 100

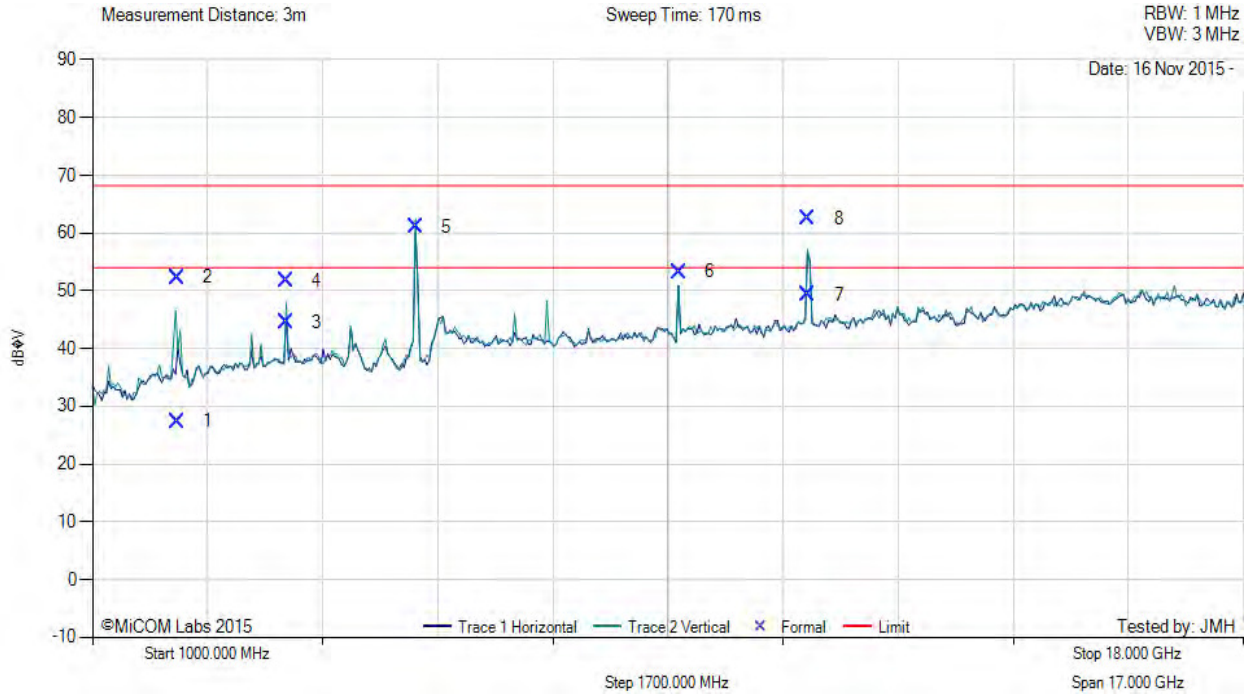

Num	Frequency MHz	Raw dBμV	Cable Loss	AF dB	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
1	2259.17	36.87	2.63	-12.11	27.39	Max Avg	Vertical	156	124	54.0	-26.6	Pass
2	2259.17	61.83	2.63	-12.11	52.35	Max Peak	Vertical	156	124	74.0	-21.7	Pass
3	3856.66	52.14	3.23	-10.81	44.56	Max Avg	Vertical	155	271	54.0	-9.4	Pass
4	3856.66	59.36	3.23	-10.81	51.78	Max Peak	Vertical	155	271	74.0	-22.3	Pass
5	5777.92	67.81	3.80	-10.48	61.13	Fundamental	Vertical	151	0	--	--	
6	9667.95	54.18	5.27	-6.13	53.32	Peak (NRB)	Horizontal	151	277	--	--	Pass
7	11571.78	48.51	5.42	-4.63	49.30	Max Avg	Vertical	170	313	54.0	-4.7	Pass
8	11571.78	61.64	5.42	-4.63	62.43	Max Peak	Vertical	170	313	74.0	-11.6	Pass

Test Notes: EUT at 150cm powered by Actiontec PS NB524J120150VU

NRB – Non-Restricted Band

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Actiontec Electronics Inc WEB5500
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: ATEC11-U8b Radiated Rev B
Issue Date: 27th April 2017
Page: 51 of 53

RADIATED SPURIOUS - RESTRICTED BAND EMISSIONS



Variant: 802.11a, Test Freq: 5825.00 MHz, Antenna: Galtronics Custom PCB, Power Setting: 23, Duty Cycle (%): 100

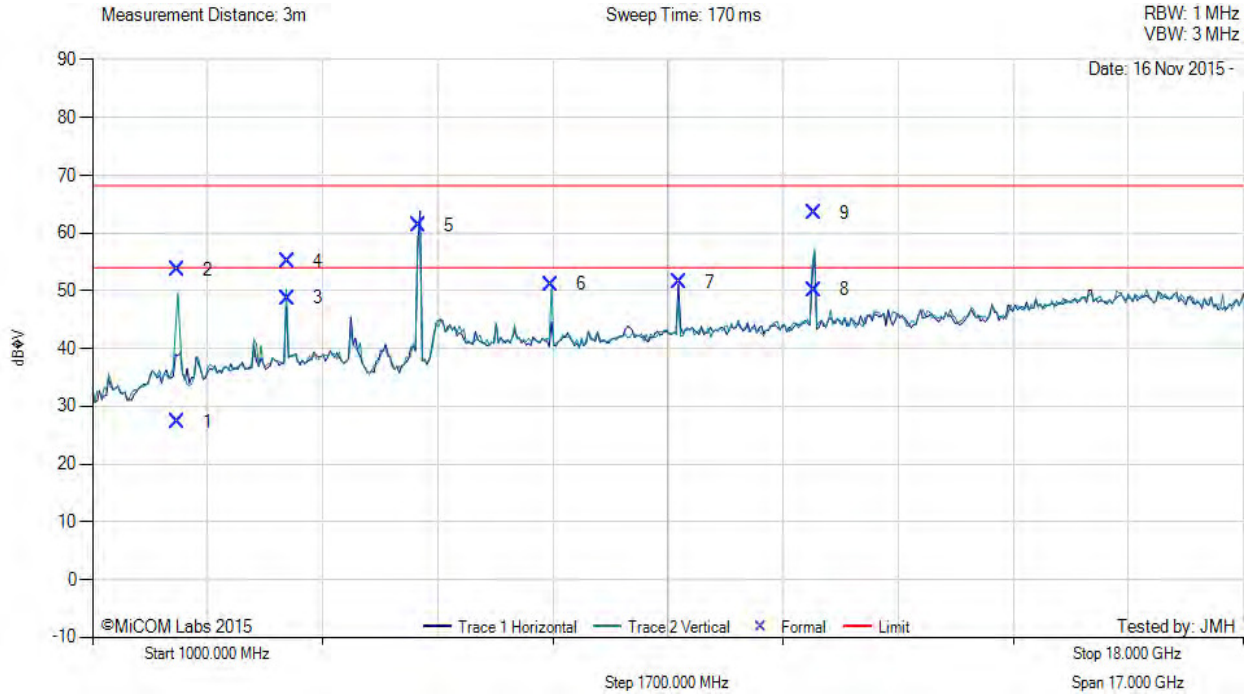

Num	Frequency MHz	Raw dBµV	Cable Loss	AF dB	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	2250.86	36.81	2.63	-12.10	27.34	Max Avg	Vertical	100	186	54.0	-26.7	Pass
2	2250.86	63.18	2.63	-12.10	53.71	Max Peak	Vertical	100	186	74.0	-20.3	Pass
3	3883.33	56.22	3.25	-10.76	48.71	Max Avg	Vertical	189	307	54.0	-5.3	Pass
4	3883.33	62.66	3.25	-10.76	55.15	Max Peak	Vertical	189	307	74.0	-18.9	Pass
5	5819.88	67.75	3.83	-10.26	61.32	Fundamental	Horizontal	151	243	--	--	
6	7766.56	53.41	4.43	-6.71	51.13	Peak (NRB)	Vertical	151	243	--	--	Pass
7	9667.86	52.28	5.27	-6.13	51.42	Peak (NRB)	Horizontal	151	243	--	--	Pass
8	11651.67	49.16	5.48	-4.46	50.18	Max Avg	Vertical	185	313	54.0	-3.8	Pass
9	11651.67	62.48	5.48	-4.46	63.50	Max Peak	Vertical	185	313	74.0	-10.5	Pass

Test Notes: EUT at 150cm powered by Actiontec PS NB524J120150VU


NRB – Non-Restricted Band

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



A.1.2. Digital Emissions

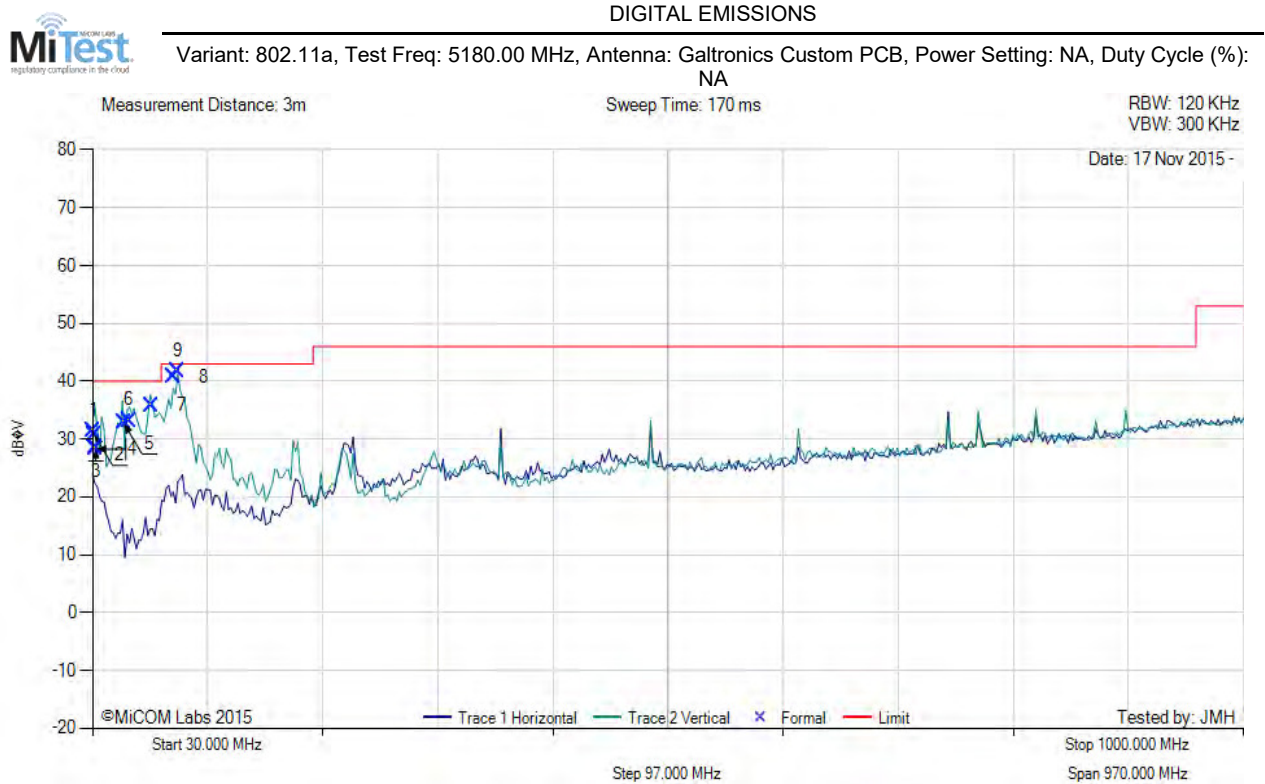

Num	Frequency MHz	Raw dBµV	Cable Loss	AF dB	Level dBµV/m	Measurement Type	PoI	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	30.58	38.57	3.43	-10.61	31.39	MaxQP	Vertical	101	7	40.0	-8.6	Pass
2	31.42	38.00	3.43	-10.61	30.82	MaxQP	Vertical	111	50	40.0	-9.2	Pass
3	32.75	37.20	3.44	-12.09	28.55	MaxQP	Vertical	100	106	40.0	-11.5	Pass
4	32.75	36.93	3.44	-12.09	28.28	MaxQP	Vertical	100	97	40.0	-11.7	Pass
5	56.20	53.35	3.61	-24.13	32.83	MaxQP	Vertical	100	5	40.0	-7.2	Pass
6	60.83	53.48	3.65	-23.92	33.21	MaxQP	Vertical	118	54	40.0	-6.8	Pass
7	79.29	55.54	3.77	-23.47	35.84	MaxQP	Vertical	100	6	40.0	-4.2	Pass
8	98.47	58.79	3.87	-21.84	40.82	MaxQP	Vertical	100	360	43.0	-2.2	Pass
9	101.89	58.51	3.89	-20.63	41.77	MaxQP	Vertical	100	94	43.0	-1.2	Pass

Test Notes: EUT on table connected to laptop and hub outside chamber. Laptop pinging EUT and data file transfer. Actiontec PS NB524J120150VU

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



575 Boulder Court
Pleasanton, California 94566, USA
Tel: +1 (925) 462 0304
Fax: +1 (925) 462 0306
www.micomlabs.com