

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2023-06-19	Test Mode	802.11ac-VHT40 – Channel 142
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9814.5	29.9	13.6	43.5	68.2	-24.7	Peak	Horizontal
*	10341.5	31.7	15.0	46.7	68.2	-21.5	Peak	Horizontal
	10877.0	29.4	16.0	45.4	74.0	-28.6	Peak	Horizontal
	12220.0	28.0	17.4	45.4	74.0	-28.6	Peak	Horizontal
*	9942.0	32.0	13.7	45.7	68.2	-22.5	Peak	Vertical
*	10307.5	30.2	14.7	44.9	68.2	-23.3	Peak	Vertical
	11531.5	30.3	17.3	47.6	74.0	-26.4	Peak	Vertical
	11786.5	30.0	17.5	47.5	74.0	-26.5	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2023-06-19	Test Mode	802.11ac-VHT40 – Channel 151
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB/m)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB/m)	Detector	Polarization
*	9899.5	31.2	13.5	44.7	68.2	-23.5	Peak	Horizontal
*	10443.5	29.9	15.3	45.2	68.2	-23.0	Peak	Horizontal
	11021.5	28.9	16.2	45.1	74.0	-28.9	Peak	Horizontal
	11582.5	29.8	17.5	47.3	74.0	-26.7	Peak	Horizontal
*	9636.0	31.1	13.3	44.4	68.2	-23.8	Peak	Vertical
*	9899.5	31.2	13.5	44.7	68.2	-23.5	Peak	Vertical
	11123.5	29.9	16.3	46.2	74.0	-27.8	Peak	Vertical
	11948.0	29.3	16.8	46.1	74.0	-27.9	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB μ V/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2023-06-19	Test Mode	802.11ac-VHT40 – Channel 159
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB/m)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB/m)	Detector	Polarization
*	9942.0	31.4	13.7	45.1	68.2	-23.1	Peak	Horizontal
*	10401.0	30.2	14.9	45.1	68.2	-23.1	Peak	Horizontal
	11225.5	28.8	16.8	45.6	74.0	-28.4	Peak	Horizontal
	11786.5	28.1	17.5	45.6	74.0	-28.4	Peak	Horizontal
*	9899.5	31.4	13.5	44.9	68.2	-23.3	Peak	Vertical
*	10214.0	29.2	14.2	43.4	68.2	-24.8	Peak	Vertical
	10783.5	30.6	15.9	46.5	74.0	-27.5	Peak	Vertical
	11582.5	30.2	17.5	47.7	74.0	-26.3	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB μ V/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2023-06-19	Test Mode	802.11ac-VHT80 – Channel 42
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10078.0	30.9	13.6	44.5	68.2	-23.7	Peak	Horizontal
*	10350.0	30.3	15.0	45.3	68.2	-22.9	Peak	Horizontal
	11123.5	31.6	16.3	47.9	74.0	-26.1	Peak	Horizontal
	11948.0	30.0	16.8	46.8	74.0	-27.2	Peak	Horizontal
*	9721.0	30.1	13.4	43.5	68.2	-24.7	Peak	Vertical
*	10078.0	30.9	13.6	44.5	68.2	-23.7	Peak	Vertical
	10732.5	30.0	15.7	45.7	74.0	-28.3	Peak	Vertical
	11429.5	28.7	17.2	45.9	74.0	-28.1	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2023-06-19	Test Mode	802.11ac-VHT80 – Channel 58
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9993.0	31.4	13.6	45.0	68.2	-23.2	Peak	Horizontal
*	10443.5	29.5	15.3	44.8	68.2	-23.4	Peak	Horizontal
	11021.5	29.0	16.2	45.2	74.0	-28.8	Peak	Horizontal
	11897.0	29.1	17.3	46.4	74.0	-27.6	Peak	Horizontal
*	9899.5	31.6	13.5	45.1	68.2	-23.1	Peak	Vertical
*	10443.5	30.1	15.3	45.4	68.2	-22.8	Peak	Vertical
	10877.0	29.5	16.0	45.5	74.0	-28.5	Peak	Vertical
	11531.5	29.8	17.3	47.1	74.0	-26.9	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2023-06-19	Test Mode	802.11ac-VHT80 – Channel 106
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9814.5	31.2	13.6	44.8	68.2	-23.4	Peak	Horizontal
*	10307.5	30.1	14.7	44.8	68.2	-23.4	Peak	Horizontal
	11072.5	30.3	16.4	46.7	74.0	-27.3	Peak	Horizontal
	11897.0	29.0	17.3	46.3	74.0	-27.7	Peak	Horizontal
*	9814.5	31.5	13.6	45.1	68.2	-23.1	Peak	Vertical
*	10214.0	29.9	14.2	44.1	68.2	-24.1	Peak	Vertical
	11489.0	30.8	17.7	48.5	74.0	-25.5	Peak	Vertical
	11531.5	31.6	17.3	48.9	74.0	-25.1	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2023-06-19	Test Mode	802.11ac-VHT80 – Channel 122
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9814.5	31.2	13.6	44.8	68.2	-23.4	Peak	Horizontal
*	10307.5	29.2	14.7	43.9	68.2	-24.3	Peak	Horizontal
	11021.5	29.0	16.2	45.2	74.0	-28.8	Peak	Horizontal
	11735.5	28.2	17.7	45.9	74.0	-28.1	Peak	Horizontal
*	9899.5	30.2	13.5	43.7	68.2	-24.5	Peak	Vertical
*	10307.5	31.6	14.7	46.3	68.2	-21.9	Peak	Vertical
	10970.5	29.1	16.0	45.1	74.0	-28.9	Peak	Vertical
	11735.5	28.2	17.7	45.9	74.0	-28.1	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2023-06-19	Test Mode	802.11ac-VHT80 – Channel 138
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9636.0	31.3	13.3	44.6	68.2	-23.6	Peak	Horizontal
*	10120.5	30.1	14.0	44.1	68.2	-24.1	Peak	Horizontal
	11174.5	29.1	16.9	46.0	74.0	-28.0	Peak	Horizontal
	11633.5	31.0	17.7	48.7	74.0	-25.3	Peak	Horizontal
*	9551.0	31.2	13.3	44.5	68.2	-23.7	Peak	Vertical
*	9814.5	31.0	13.6	44.6	68.2	-23.6	Peak	Vertical
	11480.5	30.5	17.5	48.0	74.0	-26.0	Peak	Vertical
	11914.0	30.7	17.2	47.9	74.0	-26.1	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2023-06-19	Test Mode	802.11ac-VHT80 – Channel 155
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10078.0	30.5	13.6	44.1	68.2	-24.1	Peak	Horizontal
*	10350.0	30.4	15.0	45.4	68.2	-22.8	Peak	Horizontal
	10826.0	30.0	16.2	46.2	74.0	-27.8	Peak	Horizontal
	11599.5	31.4	17.2	48.6	74.0	-25.4	Peak	Horizontal
*	9772.0	30.8	13.4	44.2	68.2	-24.0	Peak	Vertical
*	10214.0	29.9	14.2	44.1	68.2	-24.1	Peak	Vertical
	10877.0	29.6	16.0	45.6	74.0	-28.4	Peak	Vertical
	11480.5	28.5	17.5	46.0	74.0	-28.0	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2023-06-19	Test Mode	802.11ax-HE20 – Channel 36
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10350.0	33.4	15.0	48.4	68.2	-19.8	Peak	Horizontal
*	10443.5	30.0	15.3	45.3	68.2	-22.9	Peak	Horizontal
	11174.5	29.8	16.9	46.7	74.0	-27.3	Peak	Horizontal
	11480.5	28.5	17.5	46.0	74.0	-28.0	Peak	Horizontal
*	9942.0	31.3	13.7	45.0	68.2	-23.2	Peak	Vertical
*	10350.0	33.4	15.0	48.4	68.2	-19.8	Peak	Vertical
	11021.5	29.6	16.2	45.8	74.0	-28.2	Peak	Vertical
	11480.5	28.9	17.5	46.4	74.0	-27.6	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2023-06-19	Test Mode	802.11ax-HE20 – Channel 44
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB/m)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB/m)	Detector	Polarization
*	9593.5	30.5	13.2	43.7	68.2	-24.5	Peak	Horizontal
*	10171.5	30.3	14.0	44.3	68.2	-23.9	Peak	Horizontal
	10970.5	29.4	16.0	45.4	74.0	-28.6	Peak	Horizontal
	11480.5	30.9	17.5	48.4	74.0	-25.6	Peak	Horizontal
*	9772.0	30.5	13.4	43.9	68.2	-24.3	Peak	Vertical
*	9942.0	30.3	13.7	44.0	68.2	-24.2	Peak	Vertical
	10970.5	29.8	16.0	45.8	74.0	-28.2	Peak	Vertical
	11846.0	28.5	17.0	45.5	74.0	-28.5	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB μ V/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2023-06-19	Test Mode	802.11ax-HE20 – Channel 48
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB/m)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB/m)	Detector	Polarization
*	9772.0	29.9	13.4	43.3	68.2	-24.9	Peak	Horizontal
*	10171.5	30.7	14.0	44.7	68.2	-23.5	Peak	Horizontal
	11225.5	28.8	16.8	45.6	74.0	-28.4	Peak	Horizontal
	12007.5	29.1	16.8	45.9	74.0	-28.1	Peak	Horizontal
*	9857.0	31.1	13.4	44.5	68.2	-23.7	Peak	Vertical
*	10171.5	30.7	14.0	44.7	68.2	-23.5	Peak	Vertical
	11429.5	29.0	17.2	46.2	74.0	-27.8	Peak	Vertical
	11948.0	29.7	16.8	46.5	74.0	-27.5	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB μ V/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2023-06-19	Test Mode	802.11ax-HE20 – Channel 52
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9857.0	30.9	13.4	44.3	68.2	-23.9	Peak	Horizontal
*	10537.0	30.1	15.0	45.1	68.2	-23.1	Peak	Horizontal
	11327.5	28.2	17.3	45.5	74.0	-28.5	Peak	Horizontal
	11948.0	29.7	16.8	46.5	74.0	-27.5	Peak	Horizontal
*	9721.0	31.8	13.4	45.2	68.2	-23.0	Peak	Vertical
*	10171.5	31.5	14.0	45.5	68.2	-22.7	Peak	Vertical
	11276.5	30.5	16.9	47.4	74.0	-26.6	Peak	Vertical
	11846.0	28.8	17.0	45.8	74.0	-28.2	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2023-06-19	Test Mode	802.11ax-HE20 – Channel 60
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9942.0	31.1	13.7	44.8	68.2	-23.4	Peak	Horizontal
*	10265.0	30.9	14.4	45.3	68.2	-22.9	Peak	Horizontal
	10681.5	30.2	16.1	46.3	74.0	-27.7	Peak	Horizontal
	11582.5	30.8	17.5	48.3	74.0	-25.7	Peak	Horizontal
*	9814.5	30.8	13.6	44.4	68.2	-23.8	Peak	Vertical
*	10401.0	29.8	14.9	44.7	68.2	-23.5	Peak	Vertical
	11225.5	29.5	16.8	46.3	74.0	-27.7	Peak	Vertical
	11582.5	30.8	17.5	48.3	74.0	-25.7	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2023-06-19	Test Mode	802.11ax-HE20 – Channel 64
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB/m)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB/m)	Detector	Polarization
*	9551.0	31.2	13.3	44.5	68.2	-23.7	Peak	Horizontal
*	10078.0	31.2	13.6	44.8	68.2	-23.4	Peak	Horizontal
	10970.5	28.9	16.0	44.9	74.0	-29.1	Peak	Horizontal
	11735.5	29.5	17.7	47.2	74.0	-26.8	Peak	Horizontal
*	10078.0	30.6	13.6	44.2	68.2	-24.0	Peak	Vertical
*	10401.0	30.3	14.9	45.2	68.2	-23.0	Peak	Vertical
	11072.5	29.4	16.4	45.8	74.0	-28.2	Peak	Vertical
	11735.5	29.5	17.7	47.2	74.0	-26.8	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB μ V/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2023-06-19	Test Mode	802.11ax-HE20 – Channel 100
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB/m)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB/m)	Detector	Polarization
*	9942.0	30.4	13.7	44.1	68.2	-24.1	Peak	Horizontal
*	10214.0	30.0	14.2	44.2	68.2	-24.0	Peak	Horizontal
	11072.5	29.4	16.4	45.8	74.0	-28.2	Peak	Horizontal
	11633.5	28.9	17.7	46.6	74.0	-27.4	Peak	Horizontal
*	9593.5	30.1	13.2	43.3	68.2	-24.9	Peak	Vertical
*	10443.5	31.1	15.3	46.4	68.2	-21.8	Peak	Vertical
	11327.5	27.9	17.3	45.2	74.0	-28.8	Peak	Vertical
	11684.5	30.0	17.3	47.3	74.0	-26.7	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB μ V/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2023-06-19	Test Mode	802.11ax-HE20 – Channel 116
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10426.5	35.9	13.6	49.5	68.2	-18.7	Peak	Horizontal
	11557.0	37.2	12.7	49.9	74.0	-24.1	Peak	Horizontal
	12432.5	36.1	12.3	48.4	74.0	-25.6	Peak	Horizontal
*	14243.0	34.5	14.7	49.3	68.2	-18.9	Peak	Horizontal
*	10214.0	33.9	13.2	47.1	68.2	-21.1	Peak	Vertical
	11421.0	36.4	12.9	49.3	74.0	-24.7	Peak	Vertical
	12033.0	37.1	12.3	49.5	74.0	-24.5	Peak	Vertical
*	13911.5	34.8	14.0	48.8	68.2	-19.4	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2023-06-19	Test Mode	802.11ax-HE20 – Channel 140
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9678.5	31.0	13.4	44.4	68.2	-23.8	Peak	Horizontal
*	10078.0	32.1	13.6	45.7	68.2	-22.5	Peak	Horizontal
	11174.5	29.6	16.9	46.5	74.0	-27.5	Peak	Horizontal
	11735.5	28.5	17.7	46.2	74.0	-27.8	Peak	Horizontal
*	10035.5	31.2	13.8	45.0	68.2	-23.2	Peak	Vertical
*	10401.0	29.2	14.9	44.1	68.2	-24.1	Peak	Vertical
	11174.5	29.4	16.9	46.3	74.0	-27.7	Peak	Vertical
	11735.5	28.5	17.7	46.2	74.0	-27.8	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2023-06-19	Test Mode	802.11ax-HE20 – Channel 144
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9772.0	30.1	13.4	43.5	68.2	-24.7	Peak	Horizontal
*	10035.5	31.1	13.8	44.9	68.2	-23.3	Peak	Horizontal
	11021.5	29.9	16.2	46.1	74.0	-27.9	Peak	Horizontal
	11557.0	30.7	17.8	48.5	74.0	-25.5	Peak	Horizontal
*	9993.0	31.4	13.6	45.0	68.2	-23.2	Peak	Vertical
*	10494.5	30.4	15.3	45.7	68.2	-22.5	Peak	Vertical
	11072.5	29.4	16.4	45.8	74.0	-28.2	Peak	Vertical
	11633.5	29.2	17.7	46.9	74.0	-27.1	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2023-06-19	Test Mode	802.11ax-HE20 – Channel 149
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9636.0	31.8	13.3	45.1	68.2	-23.1	Peak	Horizontal
*	10078.0	31.1	13.6	44.7	68.2	-23.5	Peak	Horizontal
	10639.0	30.3	15.2	45.5	74.0	-28.5	Peak	Horizontal
	11174.5	29.0	16.9	45.9	74.0	-28.1	Peak	Horizontal
*	9814.5	30.1	13.6	43.7	68.2	-24.5	Peak	Vertical
*	10120.5	31.4	14.0	45.4	68.2	-22.8	Peak	Vertical
	11072.5	28.9	16.4	45.3	74.0	-28.7	Peak	Vertical
	11480.5	29.8	17.5	47.3	74.0	-26.7	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2023-06-19	Test Mode	802.11ax-HE20 – Channel 157
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9899.5	30.5	13.5	44.0	68.2	-24.2	Peak	Horizontal
*	10171.5	30.4	14.0	44.4	68.2	-23.8	Peak	Horizontal
	11480.5	29.4	17.5	46.9	74.0	-27.1	Peak	Horizontal
	12271.0	28.1	17.3	45.4	74.0	-28.6	Peak	Horizontal
	11174.5	29.5	16.9	46.4	74.0	-27.6	Peak	Vertical
	11786.5	30.0	17.5	47.5	74.0	-26.5	Peak	Vertical
*	14234.5	30.4	19.3	49.7	68.2	-18.5	Peak	Vertical
*	16878.0	32.9	21.1	54.0	68.2	-14.2	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2023-06-19	Test Mode	802.11ax-HE20 – Channel 165
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10078.0	31.6	13.6	45.2	68.2	-23.0	Peak	Horizontal
*	10537.0	30.3	15.0	45.3	68.2	-22.9	Peak	Horizontal
	11582.5	28.7	17.5	46.2	74.0	-27.8	Peak	Horizontal
	12500.5	28.8	16.4	45.2	74.0	-28.8	Peak	Horizontal
*	10078.0	31.6	13.6	45.2	68.2	-23.0	Peak	Vertical
*	10214.0	29.4	14.2	43.6	68.2	-24.6	Peak	Vertical
	10970.5	29.5	16.0	45.5	74.0	-28.5	Peak	Vertical
	11531.5	29.5	17.3	46.8	74.0	-27.2	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2023-06-19	Test Mode	802.11ax-HE40 – Channel 38
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9899.5	31.5	13.5	45.0	68.2	-23.2	Peak	Horizontal
*	10384.0	33.9	14.9	48.8	68.2	-19.4	Peak	Horizontal
	11098.0	32.7	16.7	49.4	74.0	-24.6	Peak	Horizontal
	12160.5	32.6	17.1	49.7	74.0	-24.3	Peak	Horizontal
*	9899.5	31.5	13.5	45.0	68.2	-23.2	Peak	Vertical
*	10265.0	30.9	14.4	45.3	68.2	-22.9	Peak	Vertical
	11387.0	30.8	17.3	48.1	74.0	-25.9	Peak	Vertical
	12203.0	30.5	17.6	48.1	74.0	-25.9	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2023-06-19	Test Mode	802.11ax-HE40 – Channel 46
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9721.0	31.3	13.4	44.7	68.2	-23.5	Peak	Horizontal
*	10035.5	30.5	13.8	44.3	68.2	-23.9	Peak	Horizontal
	11174.5	28.5	16.9	45.4	74.0	-28.6	Peak	Horizontal
	11557.0	30.9	17.8	48.7	74.0	-25.3	Peak	Horizontal
*	10078.0	30.8	13.6	44.4	68.2	-23.8	Peak	Vertical
*	10401.0	30.6	14.9	45.5	68.2	-22.7	Peak	Vertical
	11268.0	30.0	16.9	46.9	74.0	-27.1	Peak	Vertical
	11608.0	30.5	17.1	47.6	74.0	-26.4	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2023-06-19	Test Mode	802.11ax-HE40 – Channel 54
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB/m)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB/m)	Detector	Polarization
*	9993.0	31.6	13.6	45.2	68.2	-23.0	Peak	Horizontal
*	10350.0	30.0	15.0	45.0	68.2	-23.2	Peak	Horizontal
	11327.5	27.9	17.3	45.2	74.0	-28.8	Peak	Horizontal
	11684.5	31.8	17.3	49.1	74.0	-24.9	Peak	Horizontal
*	9772.0	30.9	13.4	44.3	68.2	-23.9	Peak	Vertical
*	10214.0	30.1	14.2	44.3	68.2	-23.9	Peak	Vertical
	11531.5	28.5	17.3	45.8	74.0	-28.2	Peak	Vertical
	12050.0	32.2	16.8	49.0	74.0	-25.0	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB μ V/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2023-06-19	Test Mode	802.11ax-HE40 – Channel 62
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9899.5	30.8	13.5	44.3	68.2	-23.9	Peak	Horizontal
*	10214.0	29.6	14.2	43.8	68.2	-24.4	Peak	Horizontal
	11038.5	32.7	16.1	48.8	74.0	-25.2	Peak	Horizontal
	11710.0	30.8	17.8	48.6	74.0	-25.4	Peak	Horizontal
*	9678.5	30.1	13.4	43.5	68.2	-24.7	Peak	Vertical
*	10035.5	30.0	13.8	43.8	68.2	-24.4	Peak	Vertical
	10877.0	29.5	16.0	45.5	74.0	-28.5	Peak	Vertical
	11727.0	30.5	17.8	48.3	74.0	-25.7	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2023-06-19	Test Mode	802.11ax-HE40 – Channel 102
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9593.5	30.1	13.2	43.3	68.2	-24.9	Peak	Horizontal
*	10035.5	30.8	13.8	44.6	68.2	-23.6	Peak	Horizontal
	11123.5	30.2	16.3	46.5	74.0	-27.5	Peak	Horizontal
	11786.5	29.5	17.5	47.0	74.0	-27.0	Peak	Horizontal
*	10120.5	30.8	14.0	44.8	68.2	-23.4	Peak	Vertical
*	10494.5	30.3	15.3	45.6	68.2	-22.6	Peak	Vertical
	11174.5	29.2	16.9	46.1	74.0	-27.9	Peak	Vertical
	11786.5	29.5	17.5	47.0	74.0	-27.0	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2023-06-19	Test Mode	802.11ax-HE40 – Channel 110
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9950.5	31.2	13.7	44.9	68.2	-23.3	Peak	Horizontal
*	10350.0	31.2	15.0	46.2	68.2	-22.0	Peak	Horizontal
	10970.5	28.7	16.0	44.7	74.0	-29.3	Peak	Horizontal
	11378.5	29.2	17.2	46.4	74.0	-27.6	Peak	Horizontal
*	10035.5	30.4	13.8	44.2	68.2	-24.0	Peak	Vertical
*	10494.5	30.0	15.3	45.3	68.2	-22.9	Peak	Vertical
	11378.5	29.2	17.2	46.4	74.0	-27.6	Peak	Vertical
	11948.0	28.6	16.8	45.4	74.0	-28.6	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2023-06-19	Test Mode	802.11ax-HE40 – Channel 134
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10035.5	30.4	13.8	44.2	68.2	-24.0	Peak	Horizontal
*	10307.5	30.0	14.7	44.7	68.2	-23.5	Peak	Horizontal
	11021.5	29.2	16.2	45.4	74.0	-28.6	Peak	Horizontal
	11735.5	28.8	17.7	46.5	74.0	-27.5	Peak	Horizontal
*	10035.5	31.9	13.8	45.7	68.2	-22.5	Peak	Vertical
*	10401.0	30.2	14.9	45.1	68.2	-23.1	Peak	Vertical
	11021.5	28.8	16.2	45.0	74.0	-29.0	Peak	Vertical
	11633.5	29.6	17.7	47.3	74.0	-26.7	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2023-06-19	Test Mode	802.11ax-HE40 – Channel 142
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9814.5	31.2	13.6	44.8	68.2	-23.4	Peak	Horizontal
*	10035.5	31.9	13.8	45.7	68.2	-22.5	Peak	Horizontal
	11021.5	30.2	16.2	46.4	74.0	-27.6	Peak	Horizontal
	11710.0	30.3	17.8	48.1	74.0	-25.9	Peak	Horizontal
*	9814.5	30.7	13.6	44.3	68.2	-23.9	Peak	Vertical
*	10350.0	29.6	15.0	44.6	68.2	-23.6	Peak	Vertical
	11021.5	31.1	16.2	47.3	74.0	-26.7	Peak	Vertical
	11710.0	30.3	17.8	48.1	74.0	-25.9	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2023-06-19	Test Mode	802.11ax-HE40 – Channel 151
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB/m)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB/m)	Detector	Polarization
*	9772.0	31.2	13.4	44.6	68.2	-23.6	Peak	Horizontal
*	10265.0	31.0	14.4	45.4	68.2	-22.8	Peak	Horizontal
	10826.0	30.4	16.2	46.6	74.0	-27.4	Peak	Horizontal
	11514.5	31.3	17.2	48.5	74.0	-25.5	Peak	Horizontal
*	9857.0	31.5	13.4	44.9	68.2	-23.3	Peak	Vertical
*	10171.5	31.0	14.0	45.0	68.2	-23.2	Peak	Vertical
	10783.5	30.7	15.9	46.6	74.0	-27.4	Peak	Vertical
	11565.5	31.1	17.7	48.8	74.0	-25.2	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB μ V/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2023-06-19	Test Mode	802.11ax-HE40 – Channel 159
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB/m)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB/m)	Detector	Polarization
*	9678.5	30.3	13.4	43.7	68.2	-24.5	Peak	Horizontal
*	9942.0	30.9	13.7	44.6	68.2	-23.6	Peak	Horizontal
	11225.5	29.1	16.8	45.9	74.0	-28.1	Peak	Horizontal
	11548.5	30.3	17.7	48.0	74.0	-26.0	Peak	Horizontal
*	9721.0	30.8	13.4	44.2	68.2	-24.0	Peak	Vertical
*	9814.5	32.1	13.6	45.7	68.2	-22.5	Peak	Vertical
	10800.5	31.4	16.2	47.6	74.0	-26.4	Peak	Vertical
	11540.0	30.8	17.5	48.3	74.0	-25.7	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB μ V/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2023-06-19	Test Mode	802.11ax-HE80 – Channel 42
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB/m)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB/m)	Detector	Polarization
*	9899.5	31.7	13.5	45.2	68.2	-23.0	Peak	Horizontal
*	10443.5	30.5	15.3	45.8	68.2	-22.4	Peak	Horizontal
	10877.0	29.6	16.0	45.6	74.0	-28.4	Peak	Horizontal
	11429.5	29.7	17.2	46.9	74.0	-27.1	Peak	Horizontal
*	9814.5	31.0	13.6	44.6	68.2	-23.6	Peak	Vertical
*	10265.0	30.2	14.4	44.6	68.2	-23.6	Peak	Vertical
	11582.5	29.5	17.5	47.0	74.0	-27.0	Peak	Vertical
	12271.0	29.3	17.3	46.6	74.0	-27.4	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB μ V/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2023-06-19	Test Mode	802.11ax-HE80 – Channel 58
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9993.0	31.0	13.6	44.6	68.2	-23.6	Peak	Horizontal
*	10443.5	30.7	15.3	46.0	68.2	-22.2	Peak	Horizontal
	11251.0	30.4	17.1	47.5	74.0	-26.5	Peak	Horizontal
	12024.5	32.1	16.8	48.9	74.0	-25.1	Peak	Horizontal
*	9942.0	30.5	13.7	44.2	68.2	-24.0	Peak	Vertical
*	10265.0	31.2	14.4	45.6	68.2	-22.6	Peak	Vertical
	11072.5	30.3	16.4	46.7	74.0	-27.3	Peak	Vertical
	11429.5	28.5	17.2	45.7	74.0	-28.3	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2023-06-19	Test Mode	802.11ax-HE80 – Channel 106
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9942.0	30.7	13.7	44.4	68.2	-23.8	Peak	Horizontal
*	10307.5	30.7	14.7	45.4	68.2	-22.8	Peak	Horizontal
	11072.5	28.2	16.4	44.6	74.0	-29.4	Peak	Horizontal
	11480.5	30.4	17.5	47.9	74.0	-26.1	Peak	Horizontal
*	9942.0	30.7	13.7	44.4	68.2	-23.8	Peak	Vertical
*	10265.0	31.0	14.4	45.4	68.2	-22.8	Peak	Vertical
	11021.5	30.0	16.2	46.2	74.0	-27.8	Peak	Vertical
	11480.5	29.0	17.5	46.5	74.0	-27.5	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2023-06-19	Test Mode	802.11ax-HE80 – Channel 122
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9814.5	30.9	13.6	44.5	68.2	-23.7	Peak	Horizontal
*	10265.0	31.0	14.4	45.4	68.2	-22.8	Peak	Horizontal
	10928.0	29.9	16.5	46.4	74.0	-27.6	Peak	Horizontal
	11591.0	32.3	17.3	49.6	74.0	-24.4	Peak	Horizontal
*	9857.0	30.4	13.4	43.8	68.2	-24.4	Peak	Vertical
*	10494.5	30.2	15.3	45.5	68.2	-22.7	Peak	Vertical
	10860.0	31.0	16.2	47.2	74.0	-26.8	Peak	Vertical
	11676.0	31.0	17.3	48.3	74.0	-25.7	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2023-06-19	Test Mode	802.11ax-HE80 – Channel 138
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB/m)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB/m)	Detector	Polarization
*	10120.5	30.5	14.0	44.5	68.2	-23.7	Peak	Horizontal
*	10401.0	30.4	14.9	45.3	68.2	-22.9	Peak	Horizontal
	11327.5	28.9	17.3	46.2	74.0	-27.8	Peak	Horizontal
	11735.5	28.5	17.7	46.2	74.0	-27.8	Peak	Horizontal
*	9899.5	31.2	13.5	44.7	68.2	-23.5	Peak	Vertical
*	10120.5	30.5	14.0	44.5	68.2	-23.7	Peak	Vertical
	11174.5	29.2	16.9	46.1	74.0	-27.9	Peak	Vertical
	11540.0	32.3	17.5	49.8	74.0	-24.2	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB μ V/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2023-06-19	Test Mode	802.11ax-HE80 – Channel 155
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9993.0	30.7	13.6	44.3	68.2	-23.9	Peak	Horizontal
*	10307.5	30.4	14.7	45.1	68.2	-23.1	Peak	Horizontal
	11395.5	30.8	17.4	48.2	74.0	-25.8	Peak	Horizontal
	11489.0	30.8	17.7	48.5	74.0	-25.5	Peak	Horizontal
*	9814.5	31.5	13.6	45.1	68.2	-23.1	Peak	Vertical
*	10214.0	29.9	14.2	44.1	68.2	-24.1	Peak	Vertical
	11336.0	29.6	17.3	46.9	74.0	-27.1	Peak	Vertical
	11684.5	29.1	17.3	46.4	74.0	-27.6	Peak	Vertical


Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

The Result of Radiated Emission below 1GHz:

Site: WZ-AC2	Test Date: 2023-07-13
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: Wi-Fi 6 Outdoor AP	Power: By PoE
Test Mode: Transmit by 802.11a at channel 5825MHz	

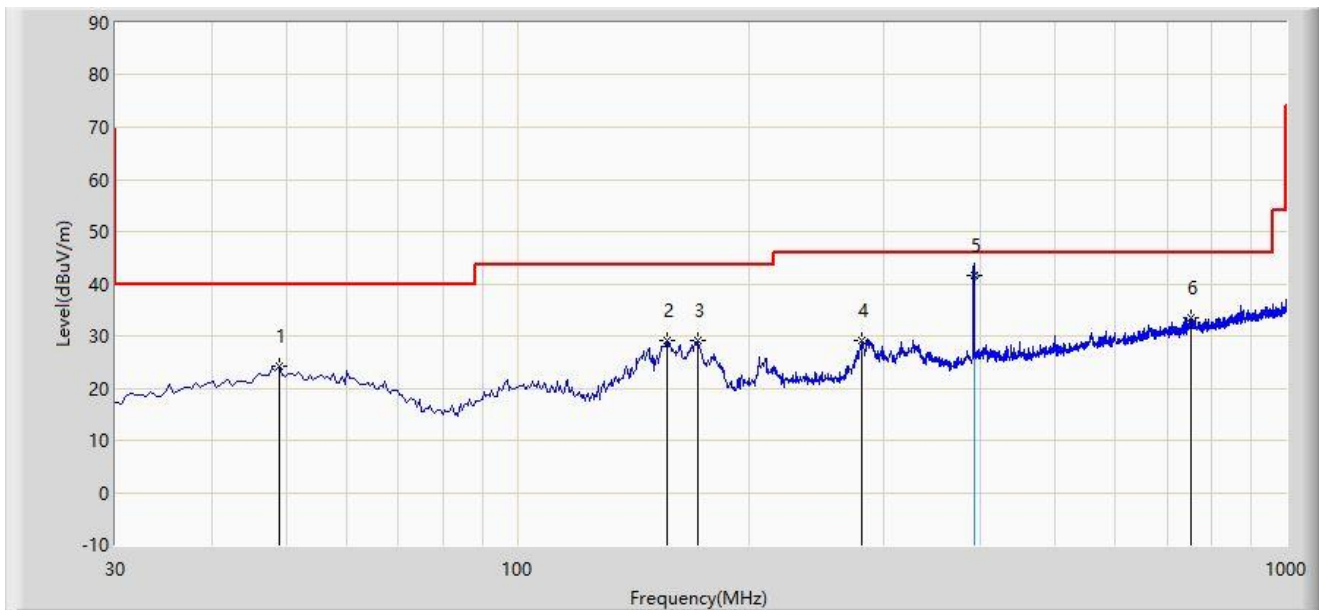

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor	Type
1		48.915	24.283	3.881	-15.717	40.000	20.402	PK
2		156.585	29.003	13.435	-14.497	43.500	15.568	PK
3		171.620	29.078	12.953	-14.422	43.500	16.125	PK
4		280.745	29.066	8.444	-16.934	46.000	20.621	PK
5	*	392.295	41.665	18.500	-4.335	46.000	23.165	QP
6		750.710	33.353	3.878	-12.647	46.000	29.475	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).


Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Note 4: Quasi-Peak measurement was not performed when peak measure level was lower than the quasi-peak limit.

Note 5: The amplitude of radiated emissions (frequency range from 9kHz to 30MHz and 18GHz to 40GHz) is that proximity to ambient noise, which also are attenuated more than 20 dB below the permissible value.

Therefore, the data is not presented in the report.

Site: WZ-AC2	Test Date: 2023-07-13
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: Wi-Fi 6 Outdoor AP	Power: By PoE
Test Mode: Transmit by 802.11a at channel 5825MHz	

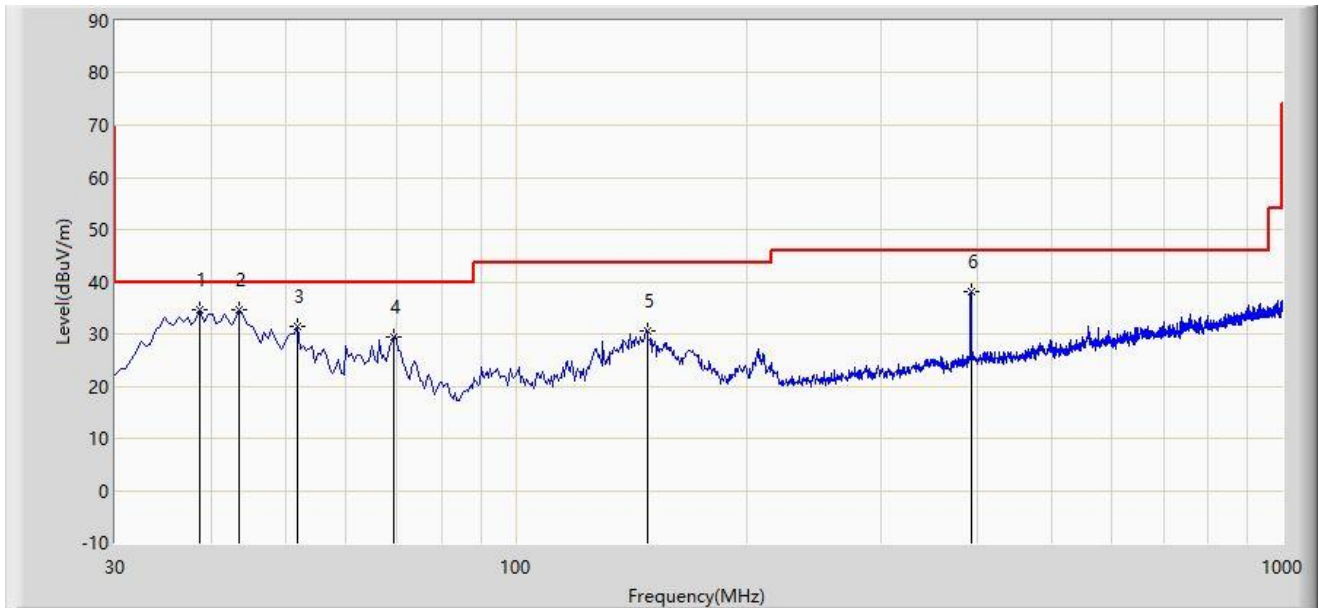

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor	Type
1		38.730	34.715	16.371	-5.285	40.000	18.344	PK
2	*	43.580	34.729	14.996	-5.271	40.000	19.733	PK
3		51.825	31.497	11.038	-8.503	40.000	20.458	PK
4		69.285	29.307	12.190	-10.693	40.000	17.117	PK
5		148.340	30.493	15.188	-13.007	43.500	15.305	PK
6		392.295	38.231	15.066	-7.769	46.000	23.165	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).


Note 4: Quasi-Peak measurement was not performed when peak measure level was lower than the quasi-peak limit.

Note 5: The amplitude of radiated emissions (frequency range from 9kHz to 30MHz and 18GHz to 40GHz) is that proximity to ambient noise, which also are attenuated more than 20 dB below the permissible value.

Therefore, the data is not presented in the report.

A.8 Radiated Restricted Band Edge Test Result

Site: WZ-AC2	Test Date: 2023-07-13
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: Wi-Fi 6 Outdoor AP	Power: By PoE
Test Mode: Transmit by 802.11a at 5180MHz	

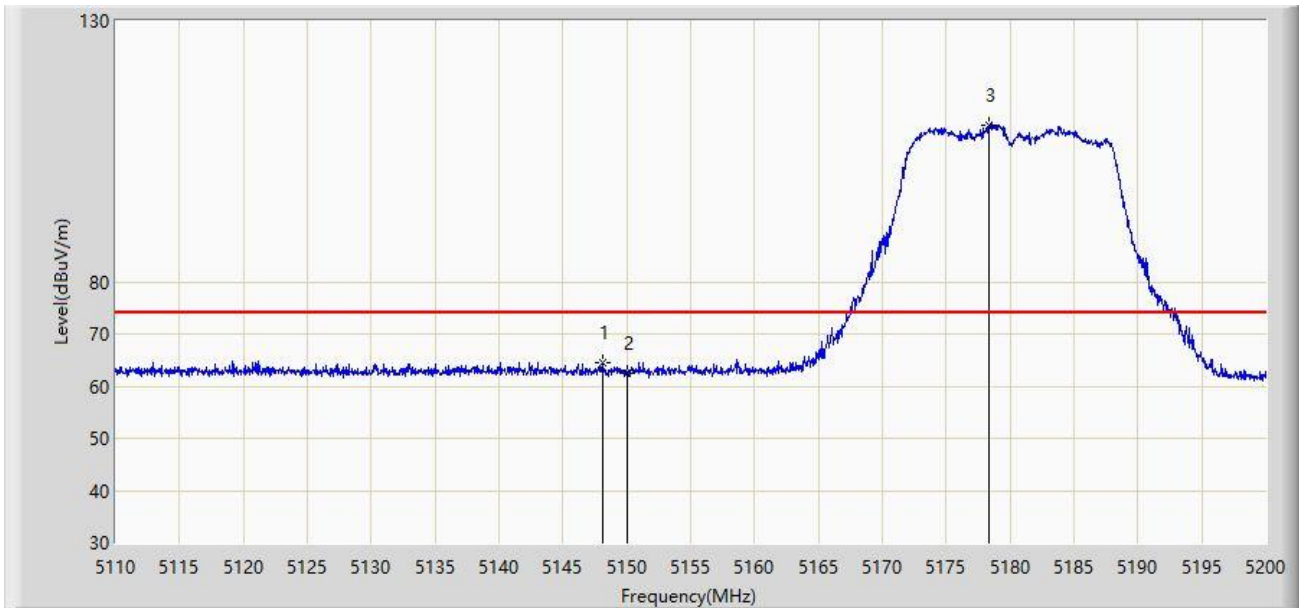


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5148.070	64.436	60.944	-9.564	74.000	3.492	PK
2		5150.000	62.591	59.092	-11.409	74.000	3.499	PK
3		5178.400	109.971	106.626	N/A	N/A	3.345	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-07-13
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: Wi-Fi 6 Outdoor AP	Power: By PoE
Test Mode: Transmit by 802.11a at 5180MHz	

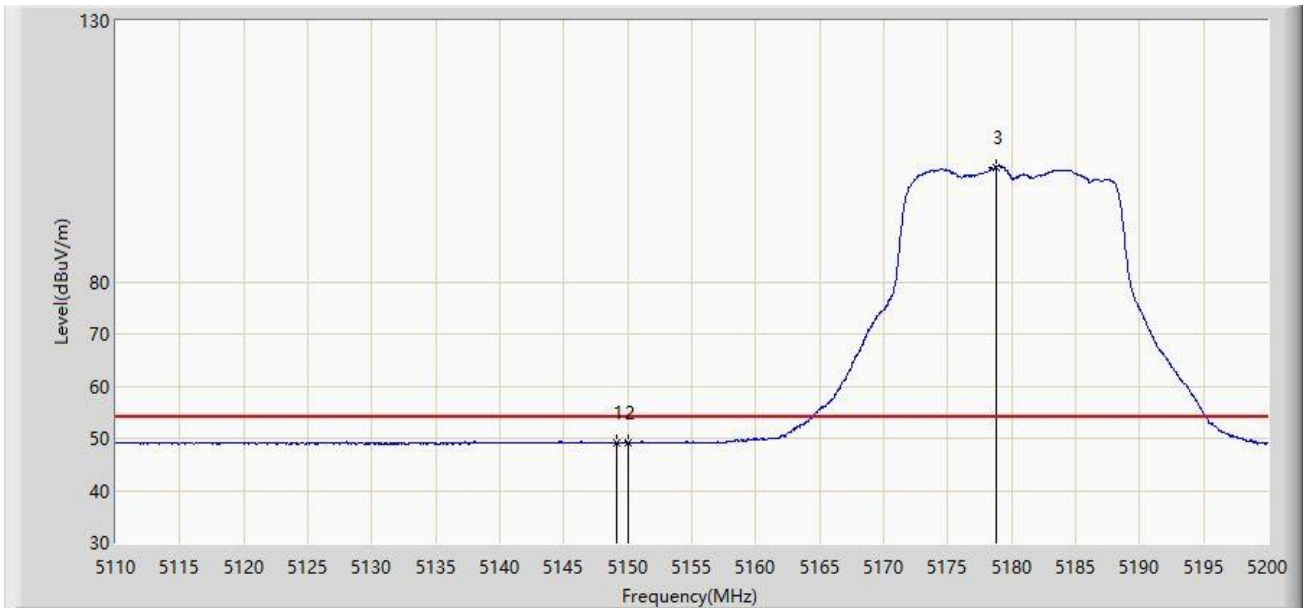


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5149.150	49.227	45.731	-4.773	54.000	3.496	AV
2		5150.000	49.157	45.658	-4.843	54.000	3.499	AV
3		5178.760	101.934	98.596	N/A	N/A	3.337	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-07-13
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: Wi-Fi 6 Outdoor AP	Power: By PoE
Test Mode: Transmit by 802.11a at 5180MHz	

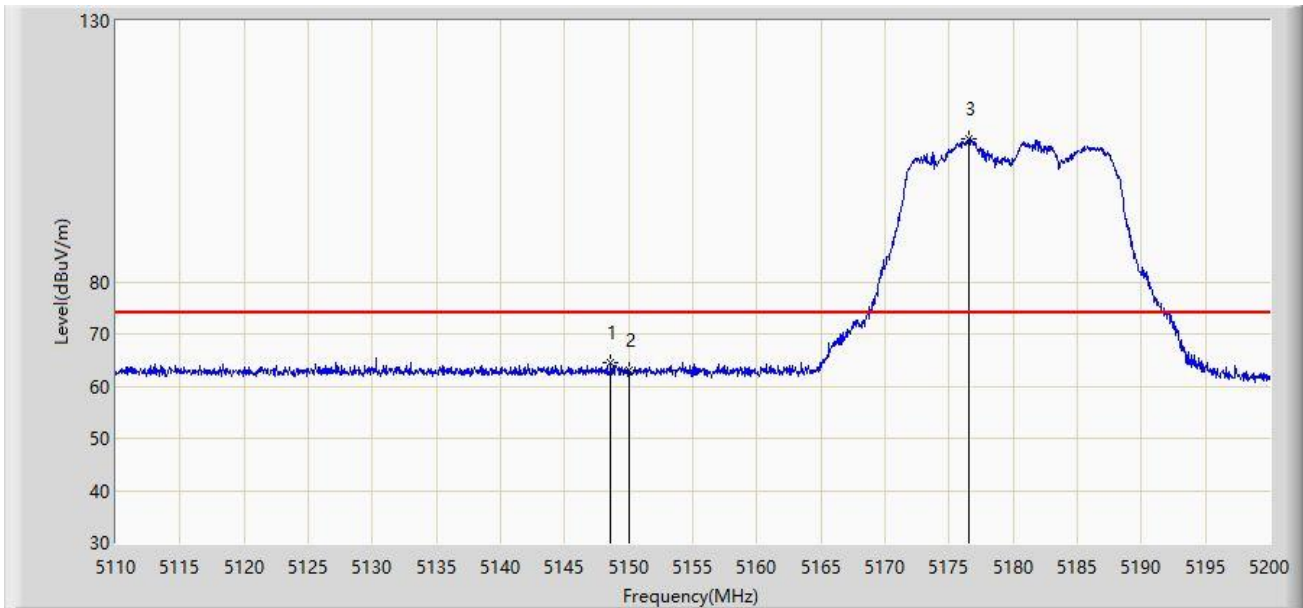


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5148.565	64.351	60.857	-9.649	74.000	3.494	PK
2		5150.000	63.036	59.537	-10.964	74.000	3.499	PK
3		5176.555	107.304	103.924	N/A	N/A	3.380	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-07-13
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: Wi-Fi 6 Outdoor AP	Power: By PoE
Test Mode: Transmit by 802.11a at 5180MHz	

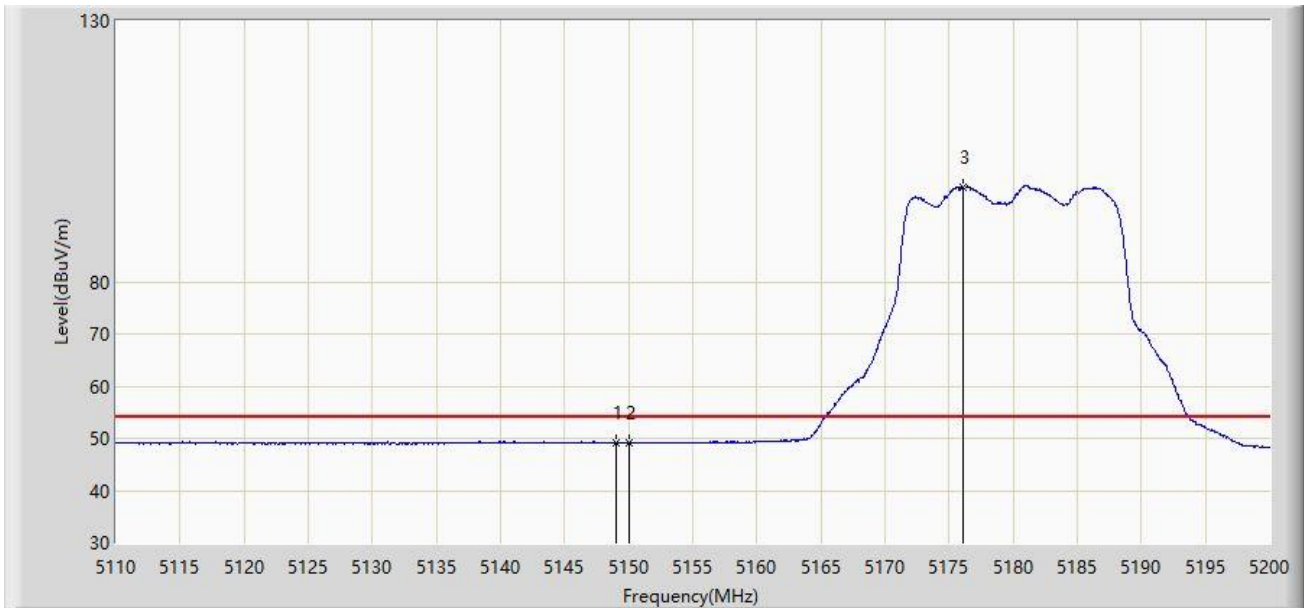


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5149.015	49.238	45.742	-4.762	54.000	3.496	AV
2		5150.000	49.173	45.674	-4.827	54.000	3.499	AV
3		5176.105	98.210	94.821	N/A	N/A	3.389	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-06-18
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: Wi-Fi 6 Outdoor AP	Power: By PoE
Test Mode: Transmit by 802.11a at 5320MHz	

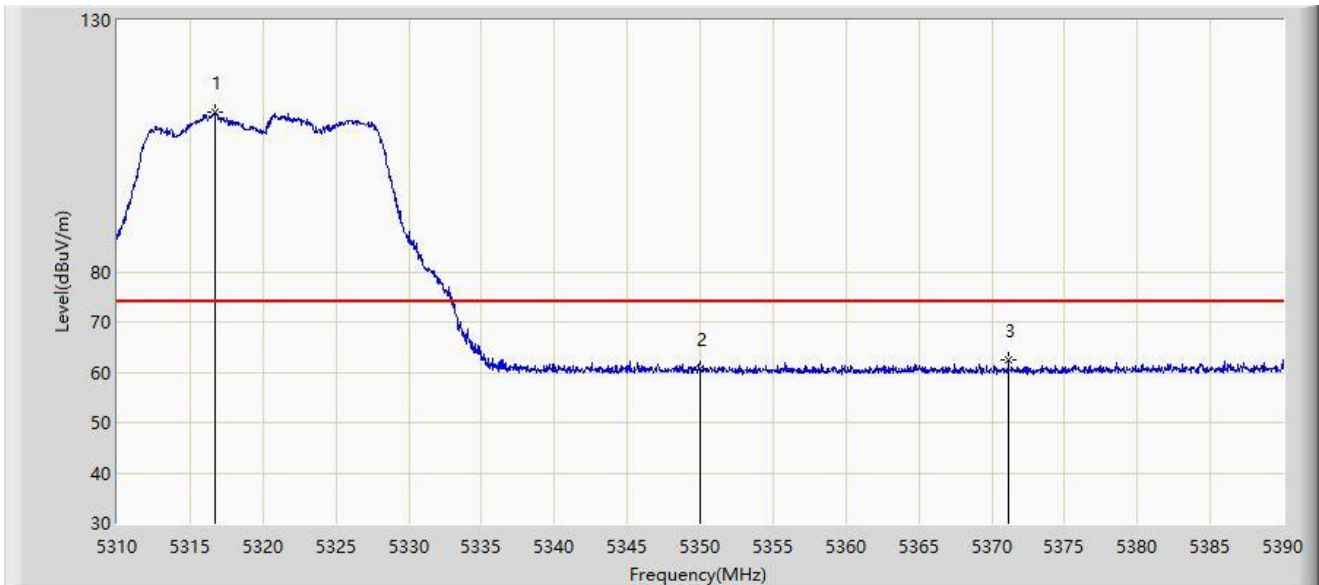


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5316.720	111.778	108.767	N/A	N/A	3.011	PK
2		5350.000	60.737	57.906	-13.263	74.000	2.832	PK
3	*	5371.160	62.531	59.609	-11.469	74.000	2.921	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-06-18
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: Wi-Fi 6 Outdoor AP	Power: By PoE
Test Mode: Transmit by 802.11a at 5320MHz	

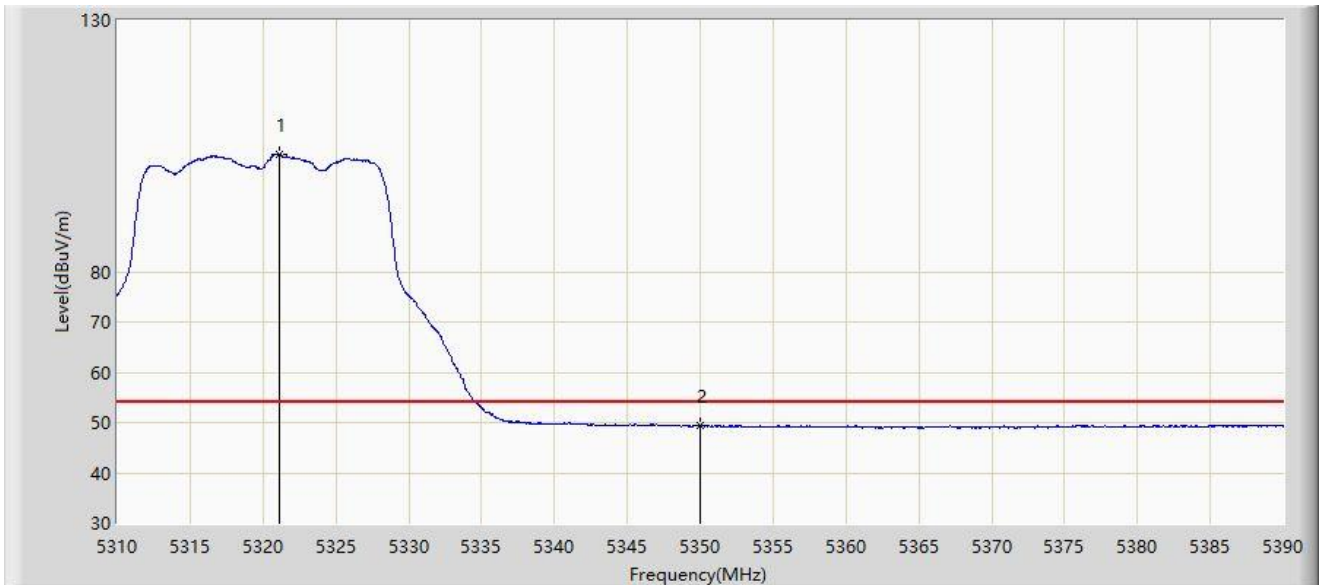


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5321.160	103.255	100.228	N/A	N/A	3.027	AV
2	*	5350.000	49.332	46.501	-4.668	54.000	2.832	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-06-18
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: Wi-Fi 6 Outdoor AP	Power: By PoE
Test Mode: Transmit by 802.11a at 5320MHz	

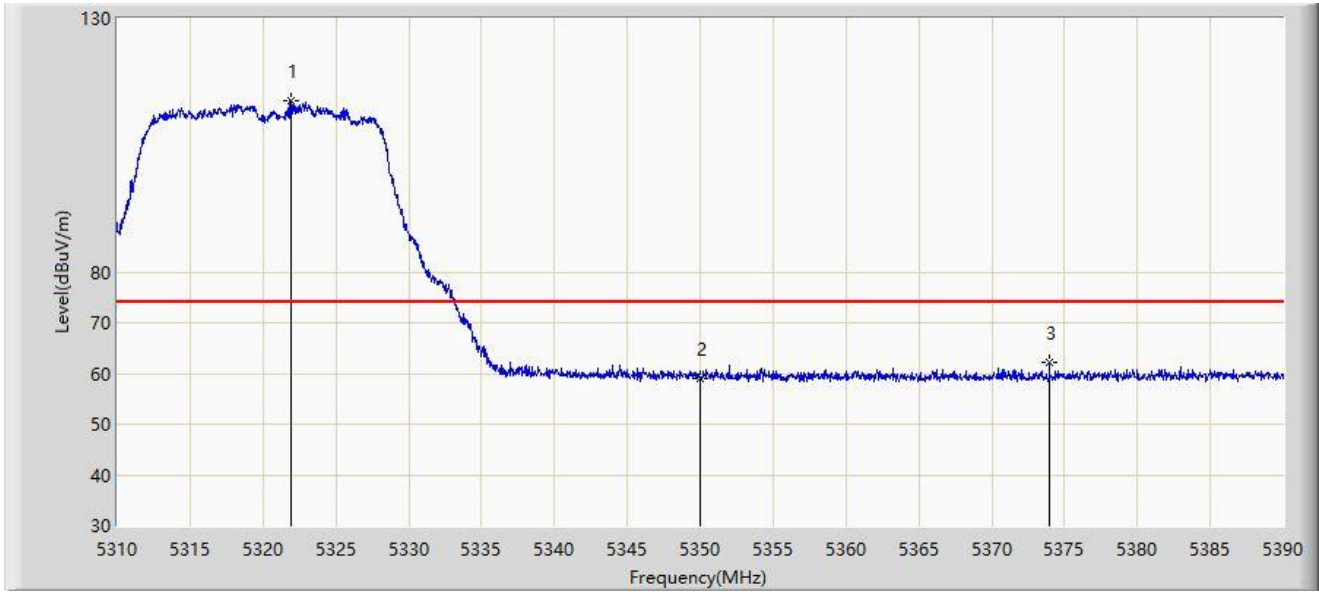


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5321.920	113.852	110.827	N/A	N/A	3.025	PK
2		5350.000	59.043	56.212	-14.957	74.000	2.832	PK
3	*	5373.960	62.174	59.197	-11.826	74.000	2.977	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-06-18
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: Wi-Fi 6 Outdoor AP	Power: By PoE
Test Mode: Transmit by 802.11a at 5320MHz	

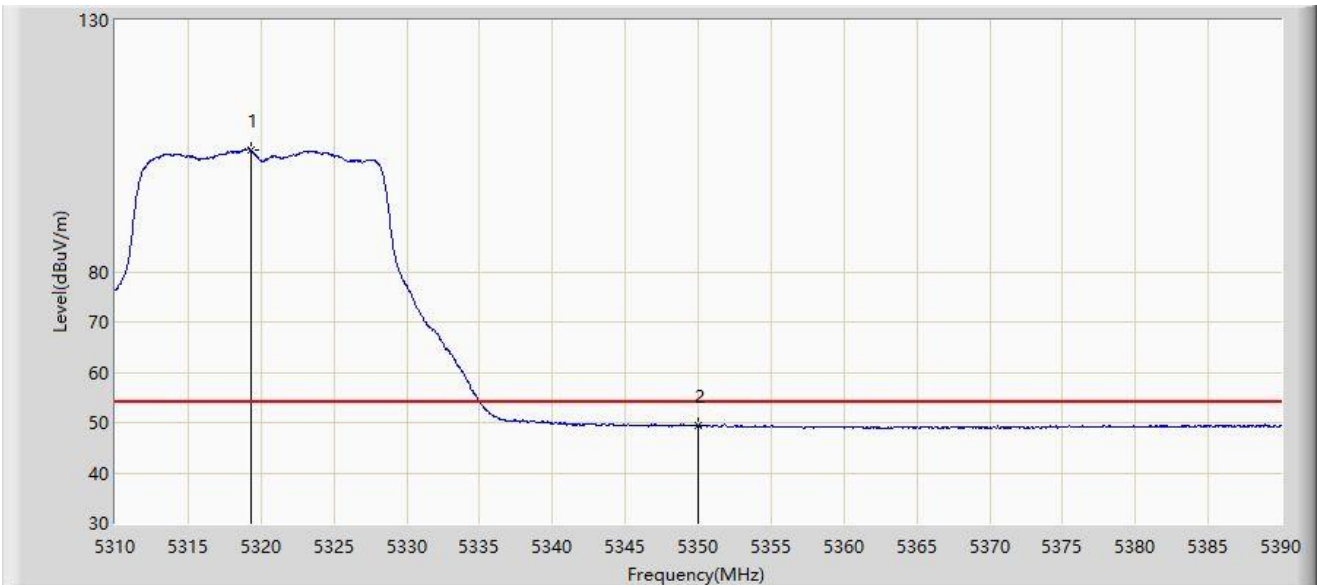


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5319.320	104.072	101.041	N/A	N/A	3.030	AV
2	*	5350.000	49.328	46.497	-4.672	54.000	2.832	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-06-18
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: Wi-Fi 6 Outdoor AP	Power: By PoE
Test Mode: Transmit by 802.11a at 5500MHz	

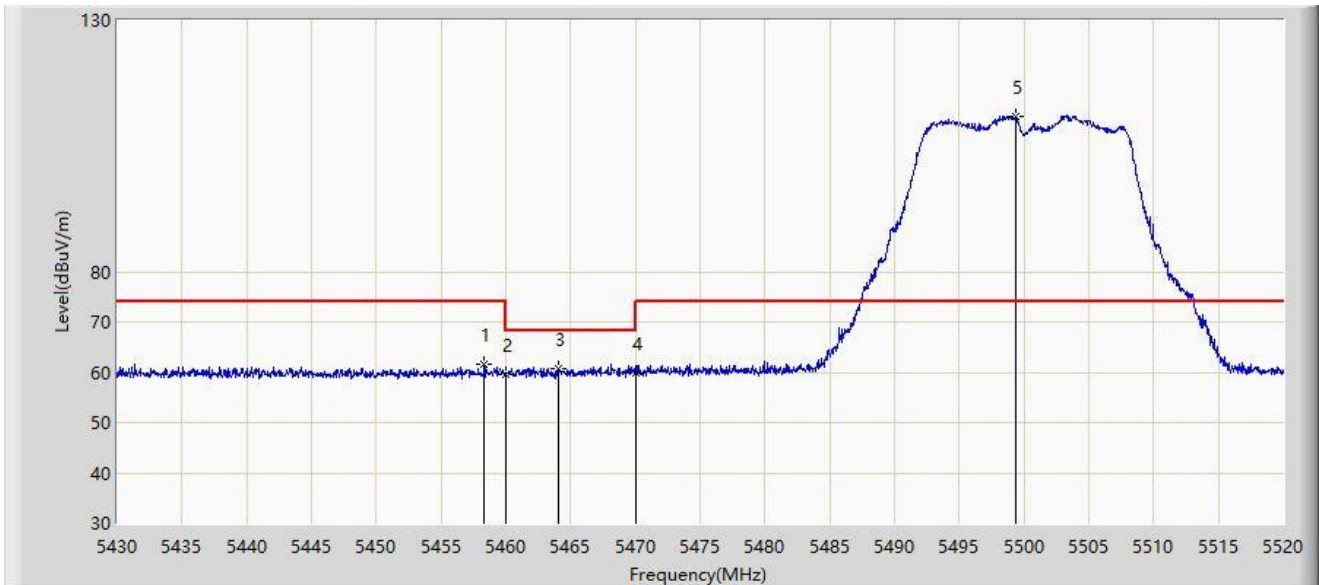


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5458.305	61.571	58.385	-12.429	74.000	3.186	PK
2		5460.000	59.633	56.414	-14.367	74.000	3.219	PK
3	*	5464.110	60.699	57.401	-7.501	68.200	3.298	PK
4		5470.000	59.798	56.386	-8.402	68.200	3.411	PK
5		5499.390	110.989	107.729	N/A	N/A	3.260	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-06-18
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: Wi-Fi 6 Outdoor AP	Power: By PoE
Test Mode: Transmit by 802.11a at 5500MHz	

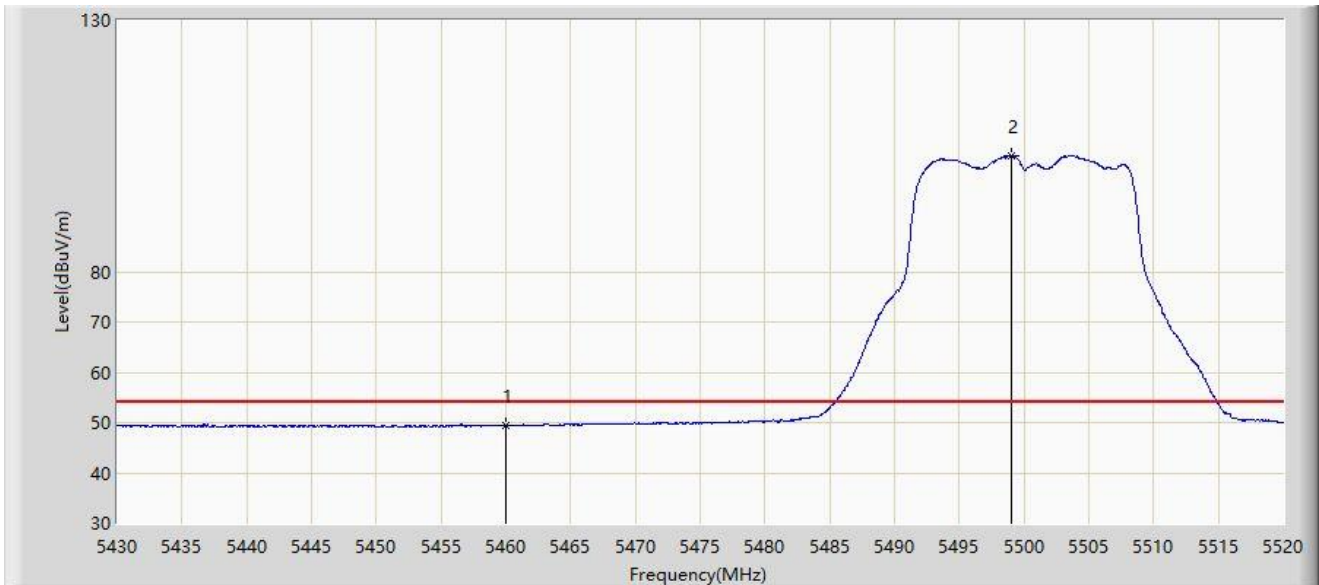


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5460.000	49.409	46.190	-4.591	54.000	3.219	AV
2		5499.075	103.178	99.916	N/A	N/A	3.262	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-06-18
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: Wi-Fi 6 Outdoor AP	Power: By PoE
Test Mode: Transmit by 802.11a at 5500MHz	

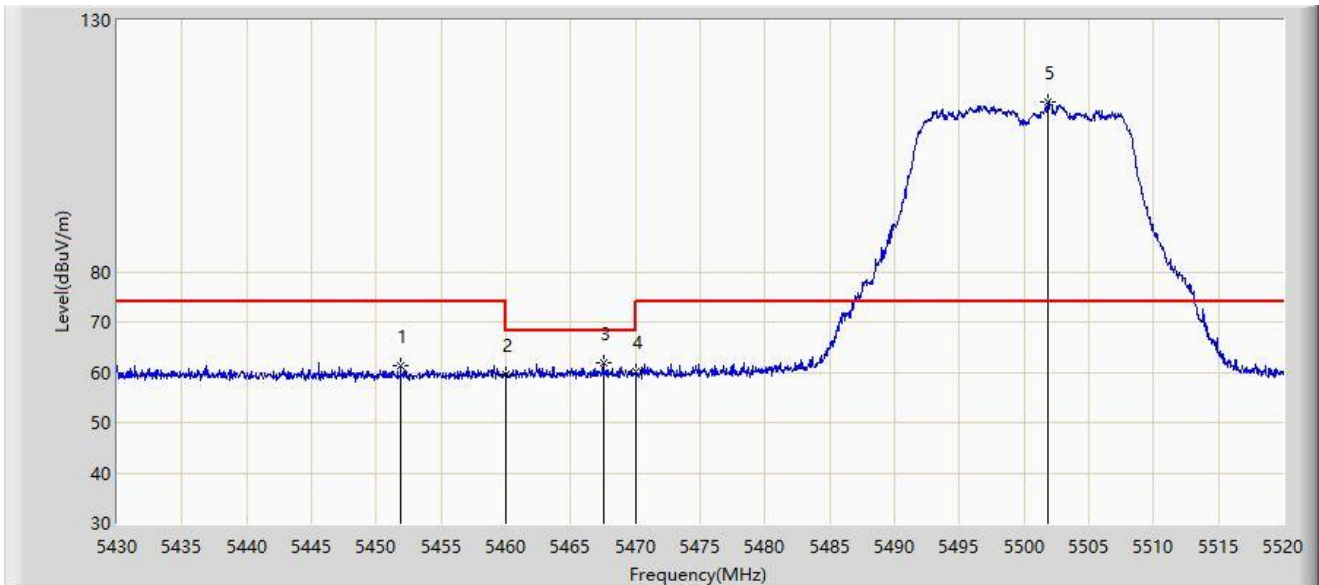


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5451.870	61.197	58.068	-12.803	74.000	3.129	PK
2		5460.000	59.683	56.464	-14.317	74.000	3.219	PK
3	*	5467.530	61.792	58.428	-6.408	68.200	3.364	PK
4		5470.000	60.161	56.749	-8.039	68.200	3.411	PK
5		5501.820	113.710	110.467	N/A	N/A	3.243	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-06-18
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: Wi-Fi 6 Outdoor AP	Power: By PoE
Test Mode: Transmit by 802.11a at 5500MHz	

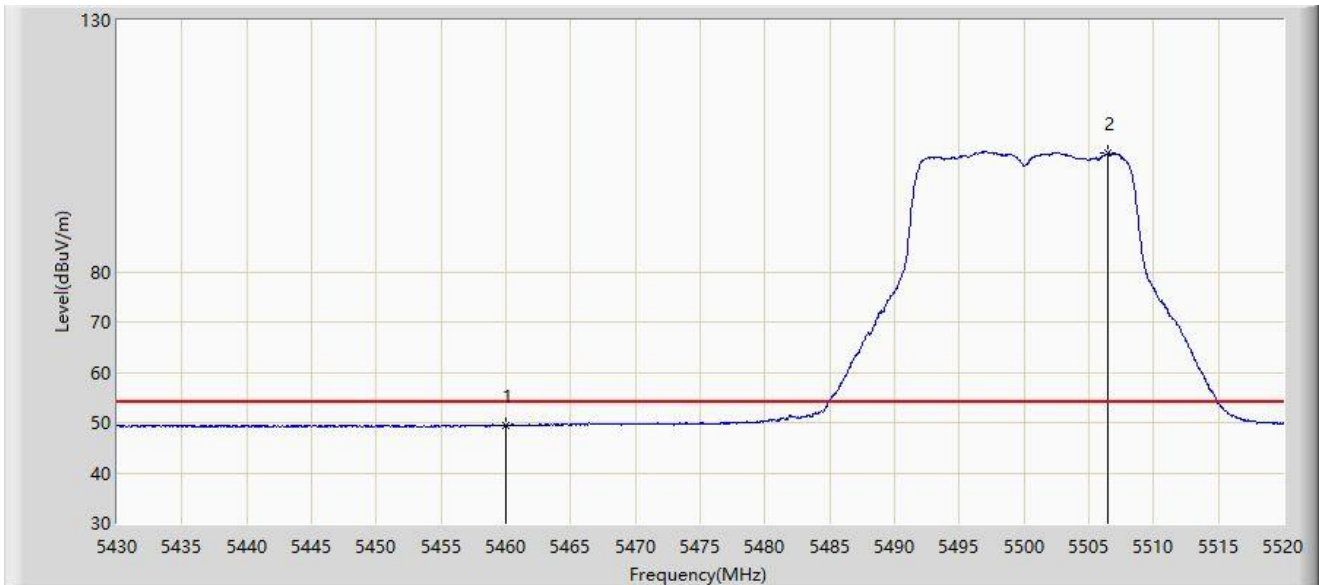


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5460.000	49.459	46.240	-4.541	54.000	3.219	AV
2		5506.455	103.530	100.324	N/A	N/A	3.205	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-06-18
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: Wi-Fi 6 Outdoor AP	Power: By PoE
Test Mode: Transmit by 802.11a at 5700MHz	

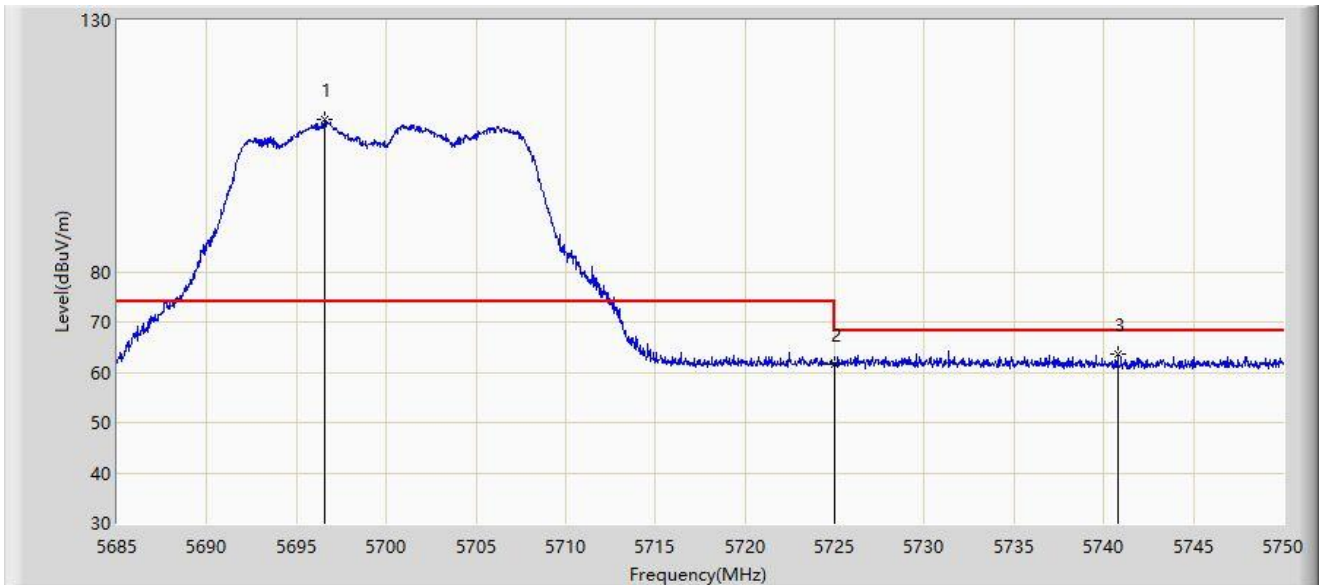


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5696.570	110.340	105.960	N/A	N/A	4.380	PK
2		5725.000	61.701	57.013	-6.499	68.200	4.688	PK
3	*	5740.770	63.762	59.327	-4.438	68.200	4.435	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-06-18
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: Wi-Fi 6 Outdoor AP	Power: By PoE
Test Mode: Transmit by 802.11a at 5700MHz	

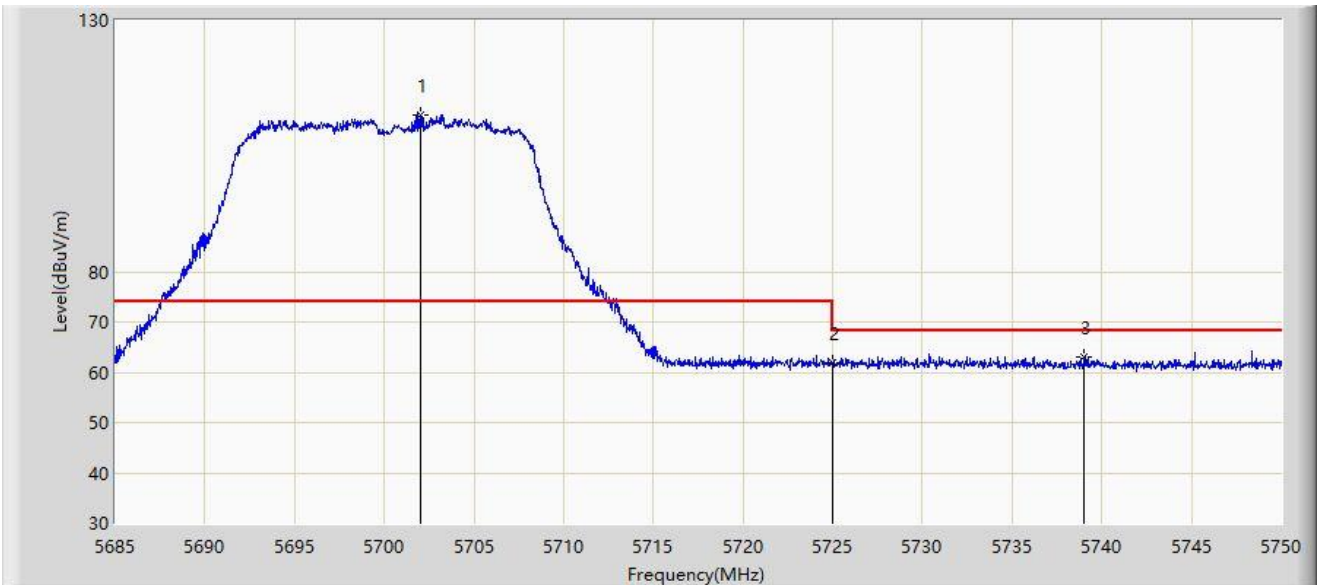


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5702.030	111.215	106.755	N/A	N/A	4.460	PK
2		5725.000	61.747	57.059	-6.453	68.200	4.688	PK
3	*	5739.015	63.109	58.642	-5.091	68.200	4.466	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-06-18
Limit: FCC_5.8G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: Wi-Fi 6 Outdoor AP	Power: By PoE
Test Mode: Transmit by 802.11a at 5745MHz	

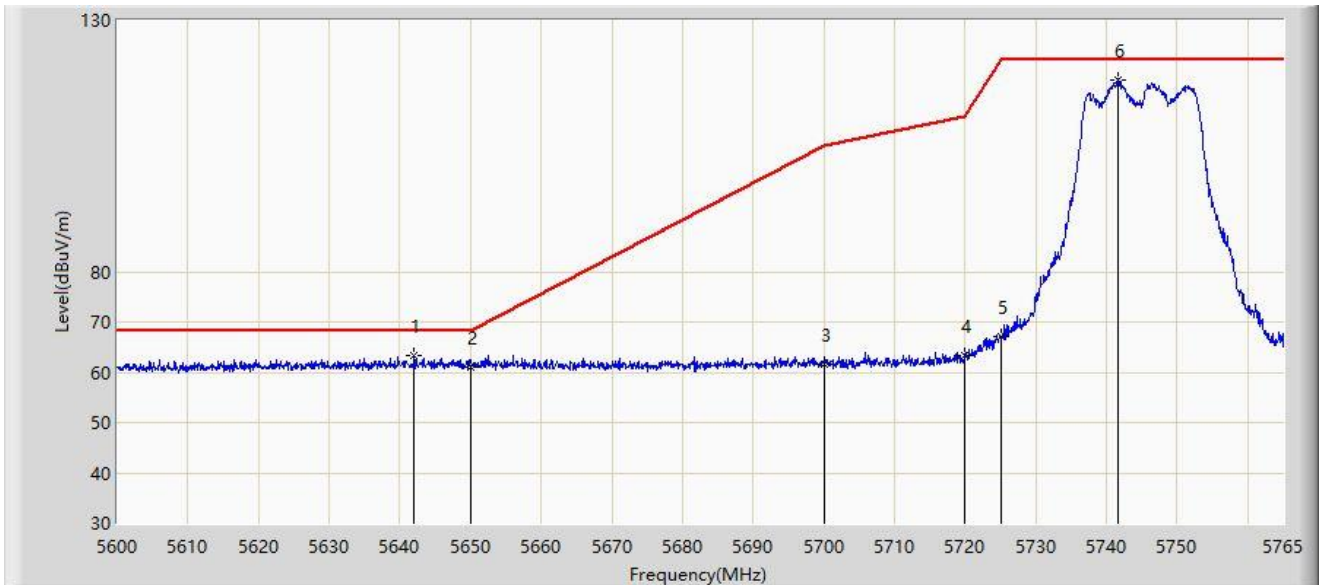


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5641.993	63.223	59.018	-4.977	68.200	4.206	PK
2		5650.000	61.064	56.904	-7.136	68.200	4.160	PK
3		5700.000	61.603	57.173	-43.597	105.200	4.430	PK
4		5720.000	63.338	58.688	-47.462	110.800	4.649	PK
5		5725.000	67.146	62.458	-55.054	122.200	4.688	PK
6		5741.570	118.050	113.629	N/A	N/A	4.421	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-06-18
Limit: FCC_5.8G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: Wi-Fi 6 Outdoor AP	Power: By PoE
Test Mode: Transmit by 802.11a at 5745MHz	

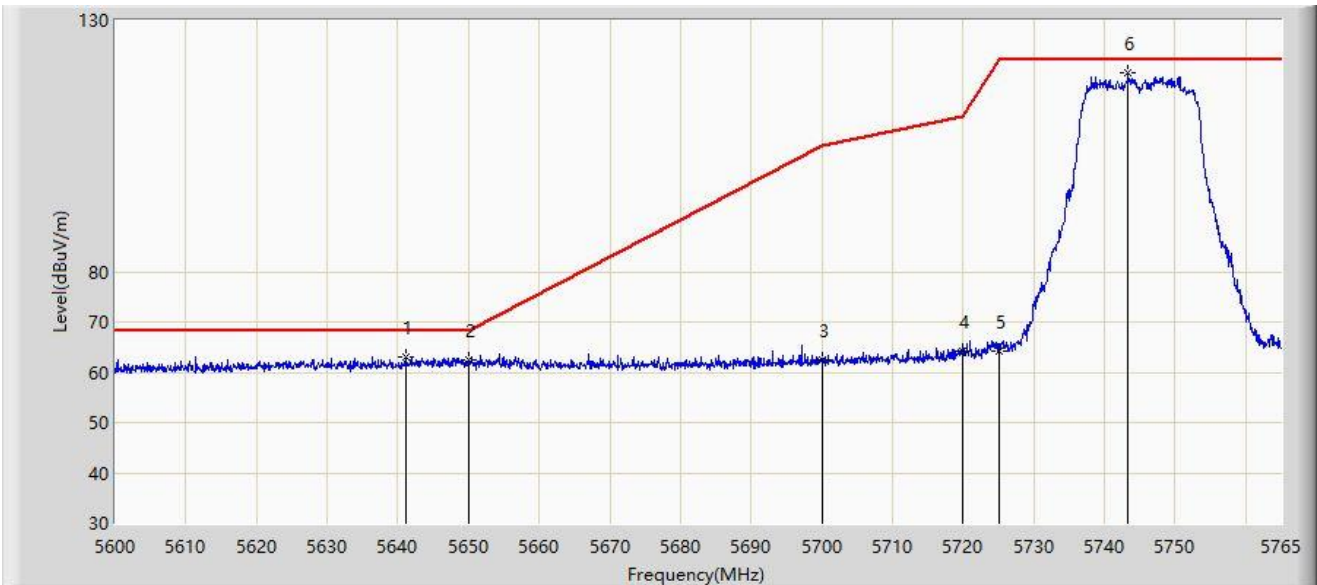


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5641.167	62.989	58.779	-5.211	68.200	4.210	PK
2		5650.000	62.319	58.159	-5.881	68.200	4.160	PK
3		5700.000	62.327	57.897	-42.873	105.200	4.430	PK
4		5720.000	64.315	59.665	-46.485	110.800	4.649	PK
5		5725.000	64.213	59.525	-57.987	122.200	4.688	PK
6		5743.385	119.470	115.075	N/A	N/A	4.395	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-06-18
Limit: FCC_5.8G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: Wi-Fi 6 Outdoor AP	Power: By PoE
Test Mode: Transmit by 802.11a at 5825MHz	

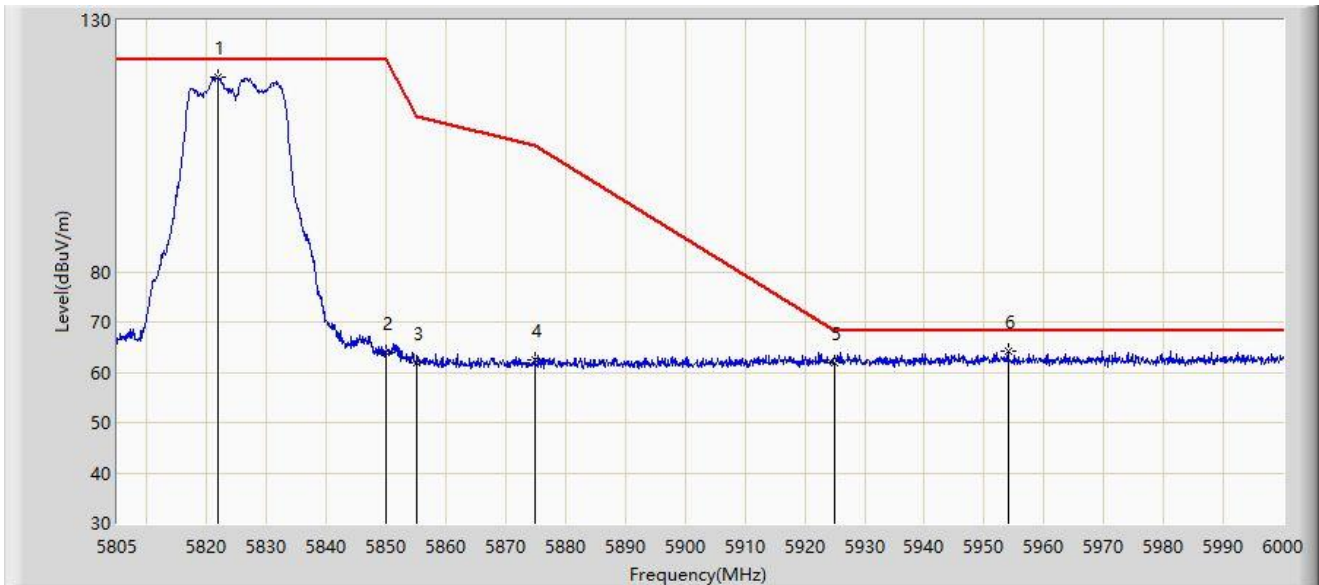


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5821.868	118.838	113.955	N/A	N/A	4.883	PK
2		5850.000	63.939	58.979	-58.261	122.200	4.960	PK
3		5855.000	61.876	56.857	-48.924	110.800	5.019	PK
4		5875.000	62.552	57.416	-42.648	105.200	5.136	PK
5		5925.000	61.963	56.693	-6.237	68.200	5.271	PK
6	*	5953.980	64.079	58.680	-4.121	68.200	5.399	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-06-18
Limit: FCC_5.8G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: Wi-Fi 6 Outdoor AP	Power: By PoE
Test Mode: Transmit by 802.11a at 5825MHz	

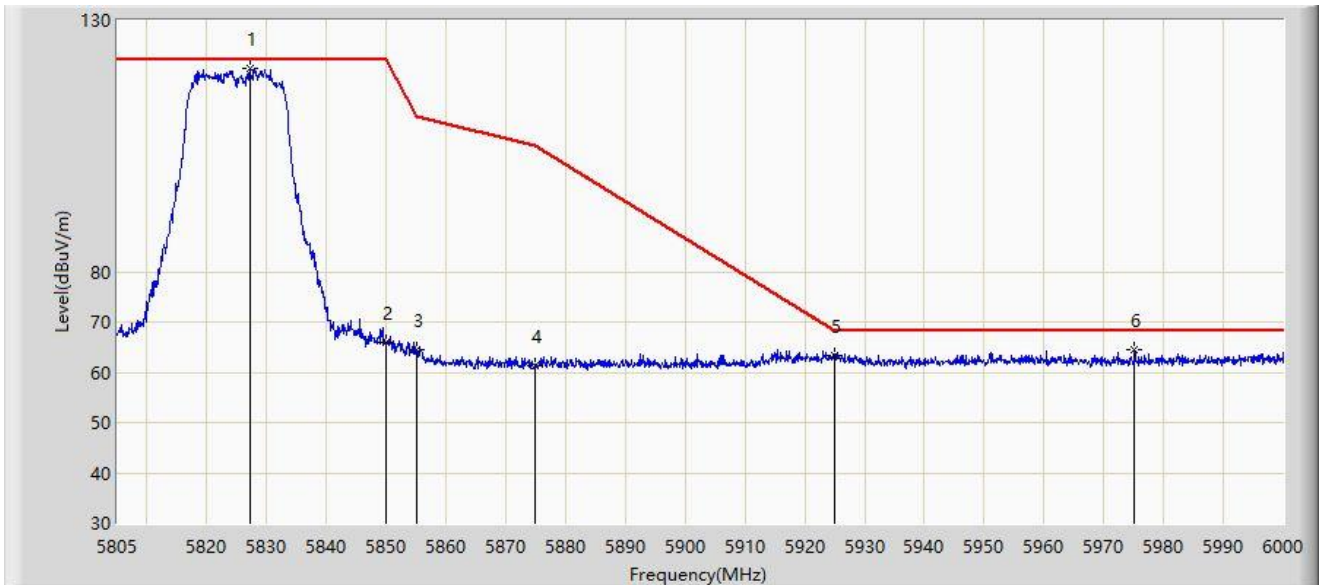


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5827.132	120.385	115.565	N/A	N/A	4.821	PK
2		5850.000	65.937	60.977	-56.263	122.200	4.960	PK
3		5855.000	64.588	59.569	-46.212	110.800	5.019	PK
4		5875.000	61.295	56.159	-43.905	105.200	5.136	PK
5		5925.000	63.444	58.174	-4.756	68.200	5.271	PK
6	*	5975.138	64.412	59.135	-3.788	68.200	5.278	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-07-13
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: Wi-Fi 6 Outdoor AP	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT20 at 5180MHz	

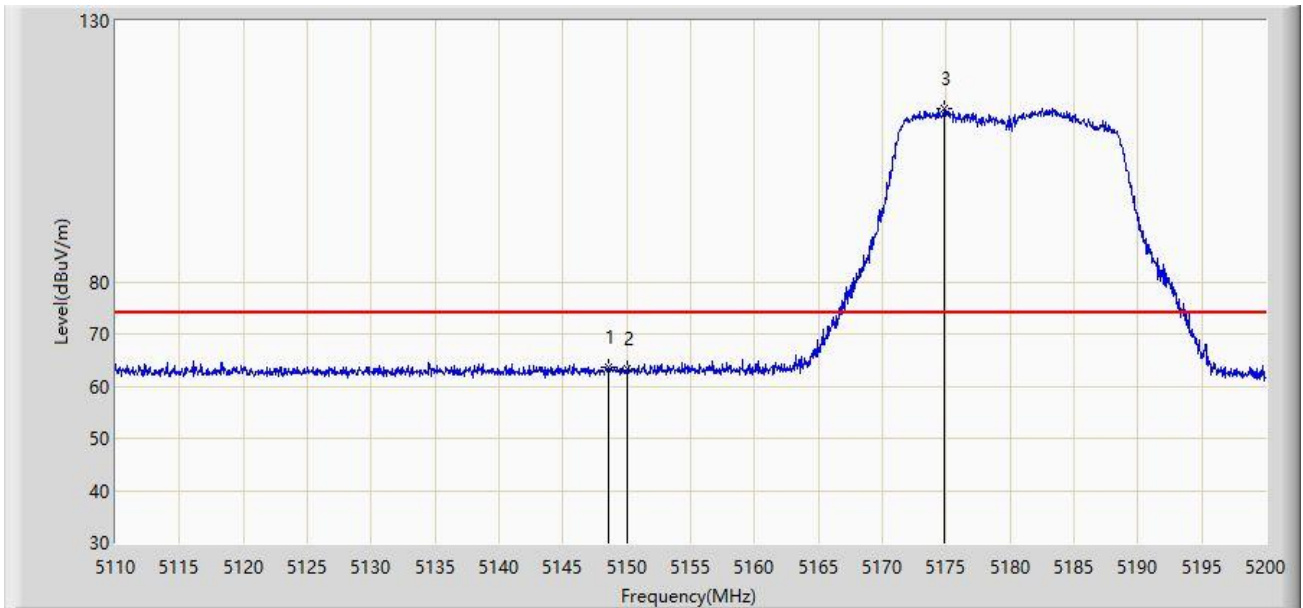


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5148.565	63.734	60.240	-10.266	74.000	3.494	PK
2		5150.000	63.196	59.697	-10.804	74.000	3.499	PK
3		5174.890	113.333	109.921	N/A	N/A	3.412	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-07-13
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: Wi-Fi 6 Outdoor AP	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT20 at 5180MHz	

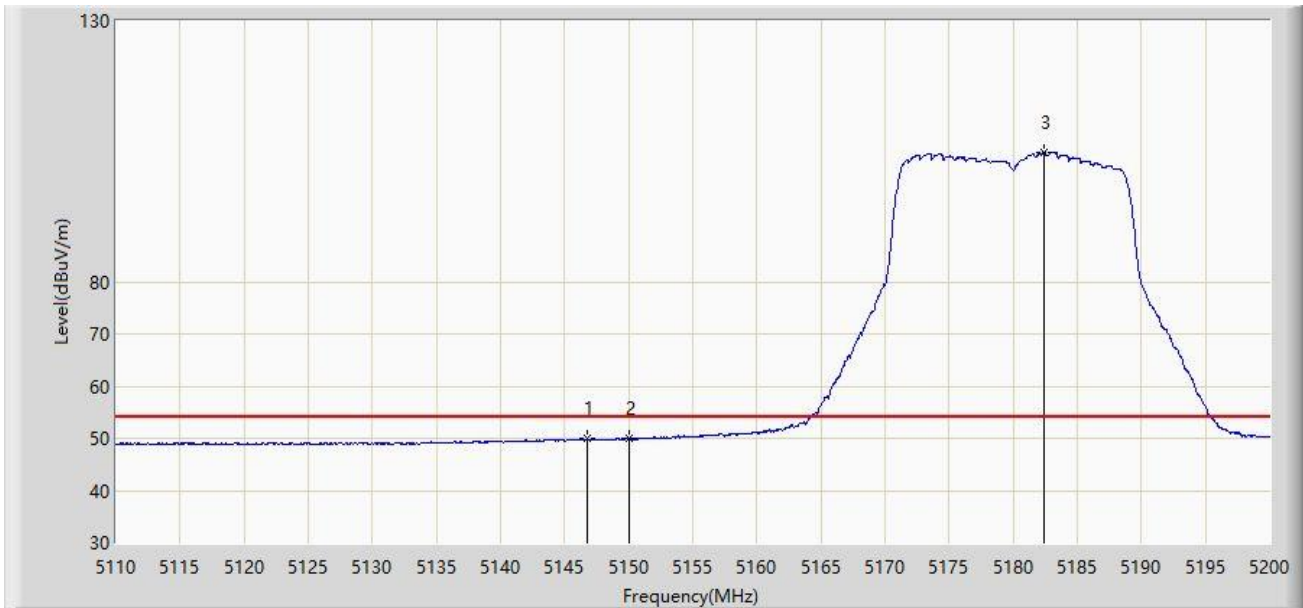


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5146.720	49.860	46.387	-4.140	54.000	3.473	AV
2	*	5150.000	49.975	46.476	-4.025	54.000	3.499	AV
3		5182.450	104.717	101.451	N/A	N/A	3.266	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-07-13
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: Wi-Fi 6 Outdoor AP	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT20 at 5180MHz	

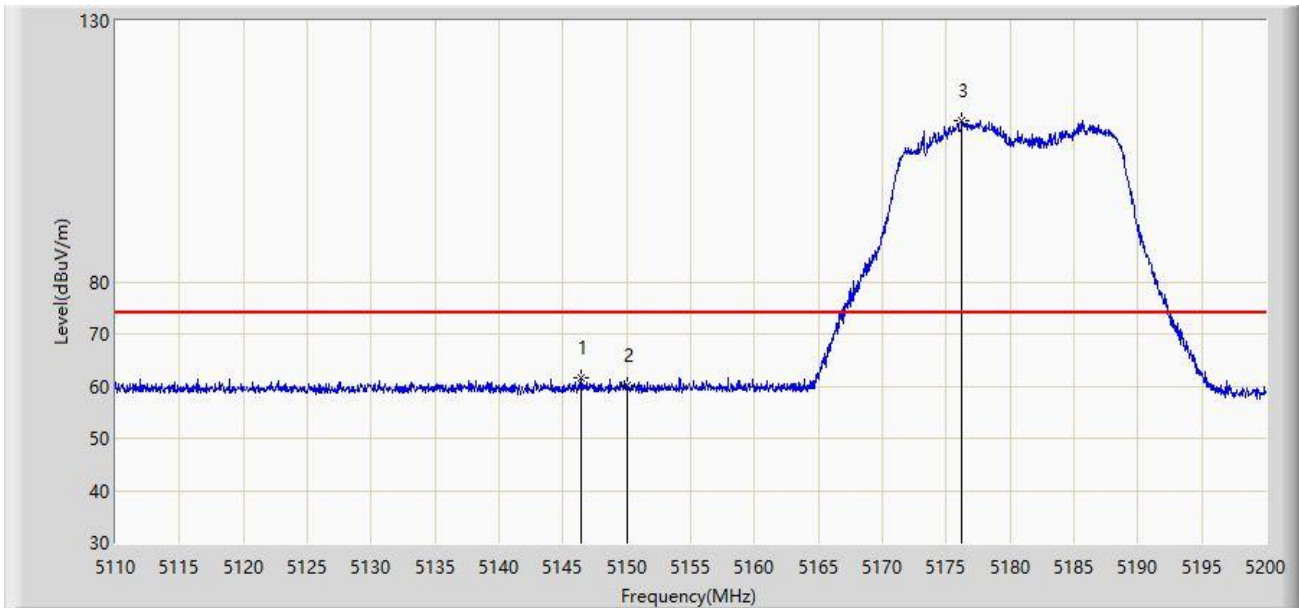


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5146.450	61.567	58.097	-12.433	74.000	3.469	PK
2		5150.000	60.223	56.724	-13.777	74.000	3.499	PK
3		5176.240	110.930	107.544	N/A	N/A	3.386	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-07-13
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: Wi-Fi 6 Outdoor AP	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT20 at 5180MHz	

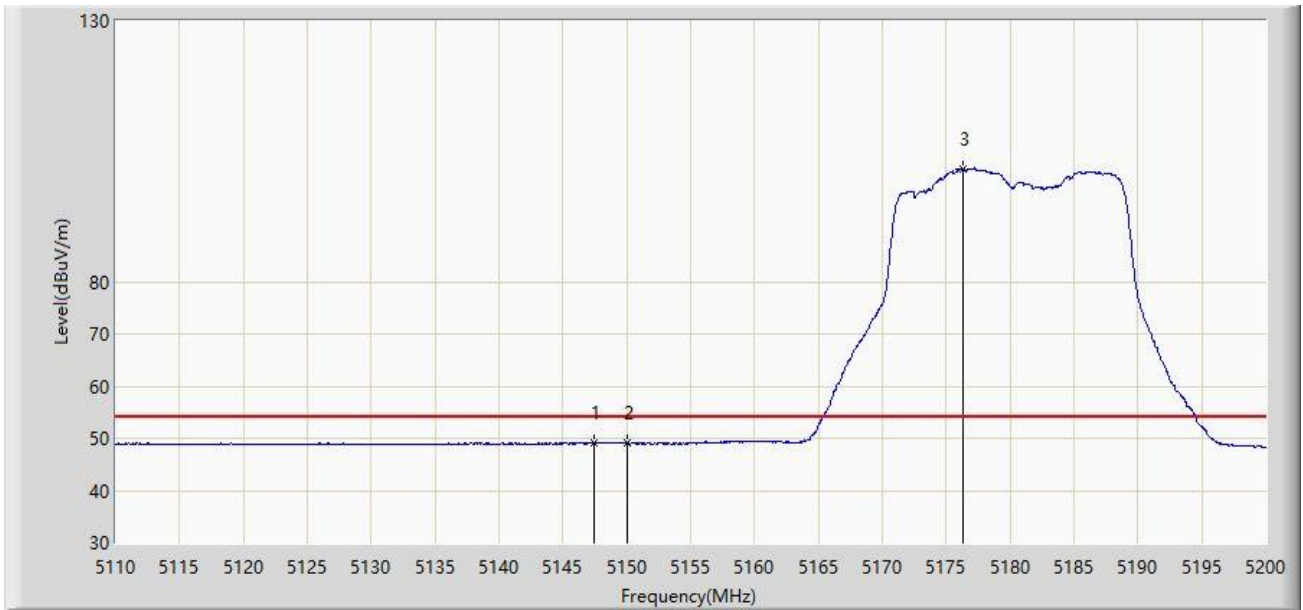


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5147.395	49.223	45.740	-4.777	54.000	3.483	AV
2		5150.000	49.088	45.589	-4.912	54.000	3.499	AV
3		5176.285	101.642	98.257	N/A	N/A	3.386	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-06-21
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: Wi-Fi 6 Outdoor AP	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT20 at 5320MHz	

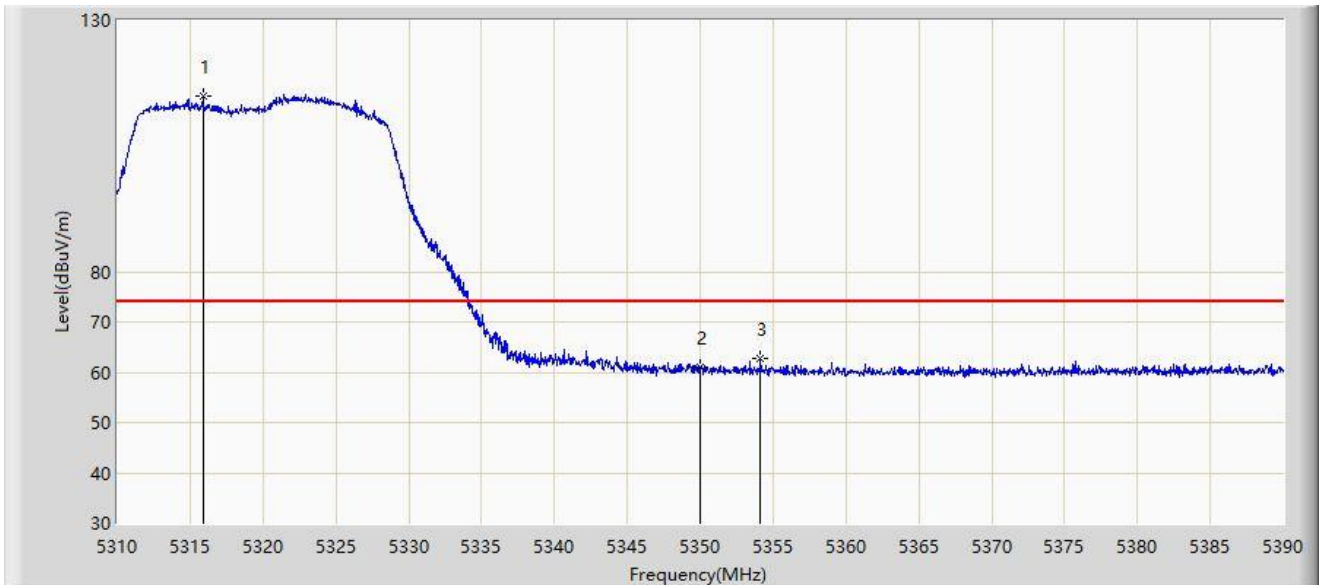


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5315.880	115.011	112.014	N/A	N/A	2.997	PK
2		5350.000	61.153	58.322	-12.847	74.000	2.832	PK
3	*	5354.160	62.669	59.861	-11.331	74.000	2.807	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-06-21
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: Wi-Fi 6 Outdoor AP	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT20 at 5320MHz	

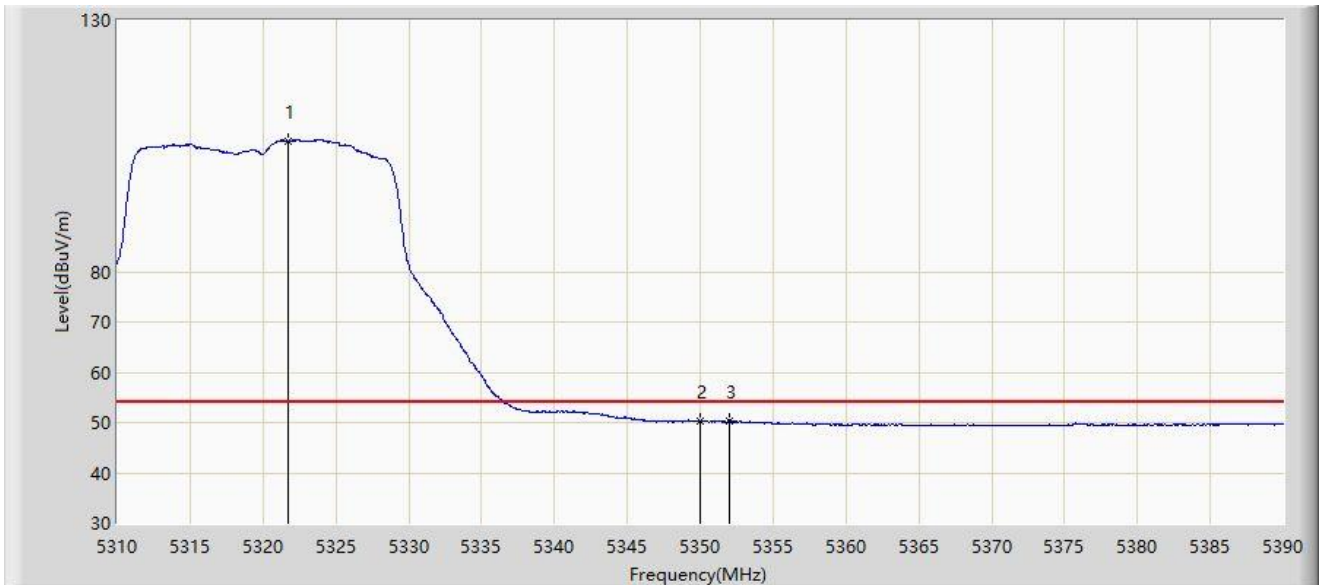


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5321.760	106.050	103.024	N/A	N/A	3.026	AV
2		5350.000	50.229	47.398	-3.771	54.000	2.832	AV
3	*	5351.960	50.423	47.625	-3.577	54.000	2.798	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-06-21
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: Wi-Fi 6 Outdoor AP	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT20 at 5320MHz	

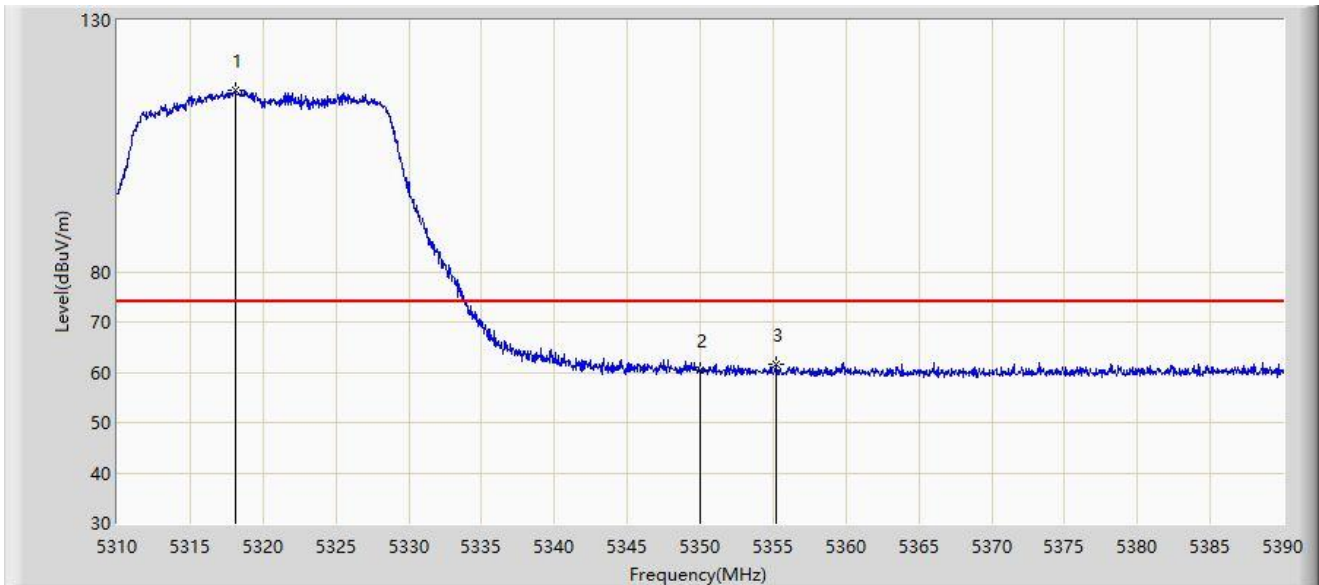


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5318.080	116.215	113.182	N/A	N/A	3.033	PK
2		5350.000	60.512	57.681	-13.488	74.000	2.832	PK
3	*	5355.200	61.577	58.764	-12.423	74.000	2.813	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-06-21
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: Wi-Fi 6 Outdoor AP	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT20 at 5320MHz	

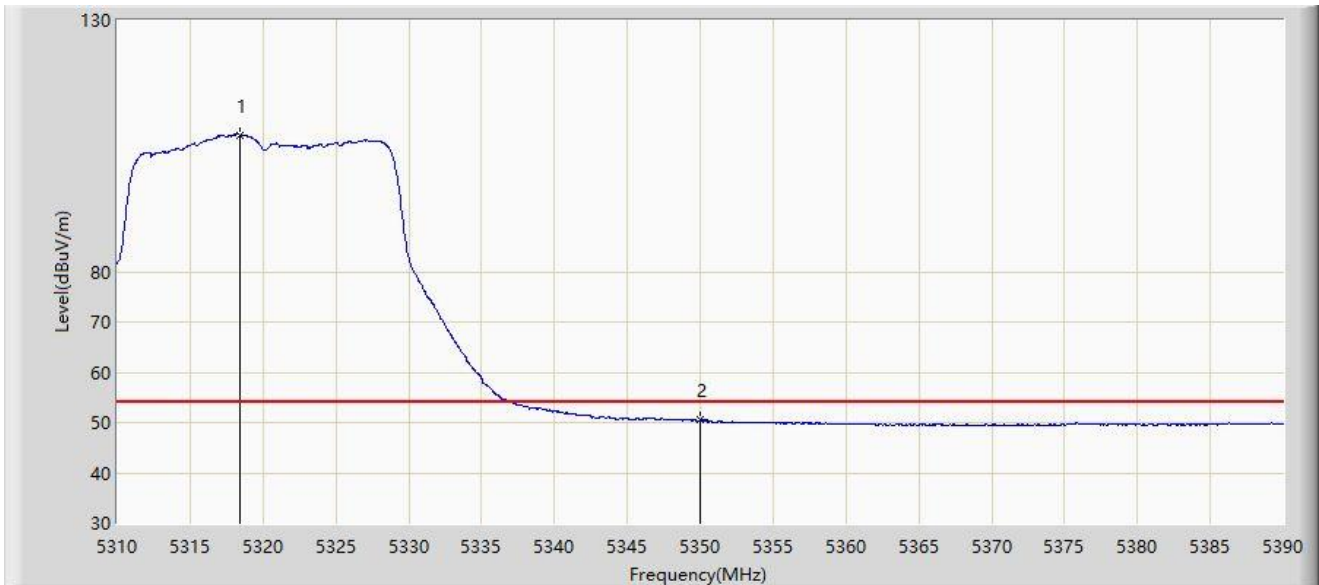


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5318.400	107.244	104.212	N/A	N/A	3.032	AV
2	*	5350.000	50.544	47.713	-3.456	54.000	2.832	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-06-21
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: Wi-Fi 6 Outdoor AP	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT20 at 5500MHz	

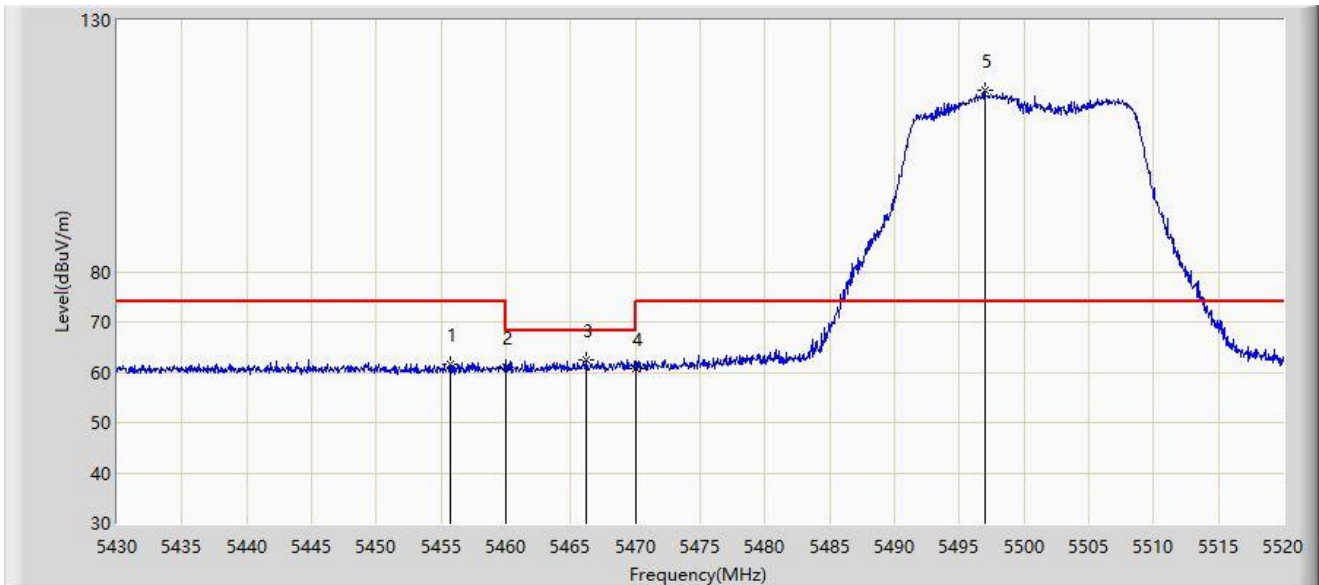


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5455.695	61.566	58.425	-12.434	74.000	3.141	PK
2		5460.000	61.109	57.890	-12.891	74.000	3.219	PK
3	*	5466.180	62.400	59.062	-5.800	68.200	3.338	PK
4		5470.000	60.683	57.271	-7.517	68.200	3.411	PK
5		5496.960	116.087	112.810	N/A	N/A	3.277	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-06-21
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: Wi-Fi 6 Outdoor AP	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT20 at 5500MHz	

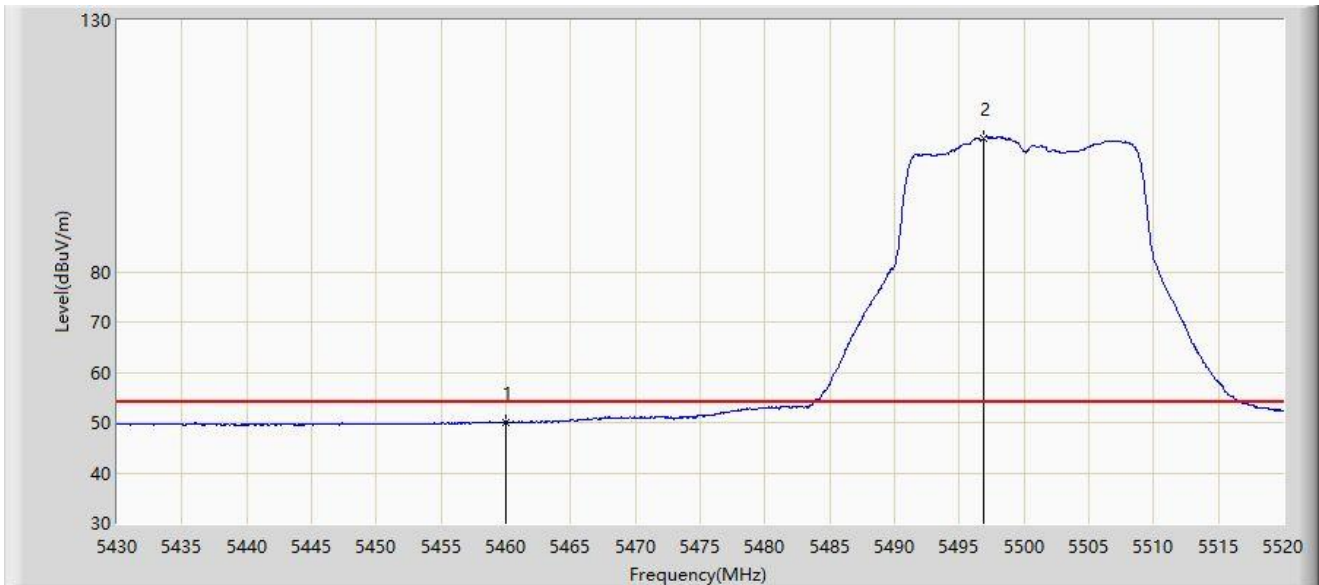


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5460.000	50.095	46.876	-3.905	54.000	3.219	AV
2		5496.915	106.585	103.308	N/A	N/A	3.277	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-06-21
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: Wi-Fi 6 Outdoor AP	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT20 at 5500MHz	

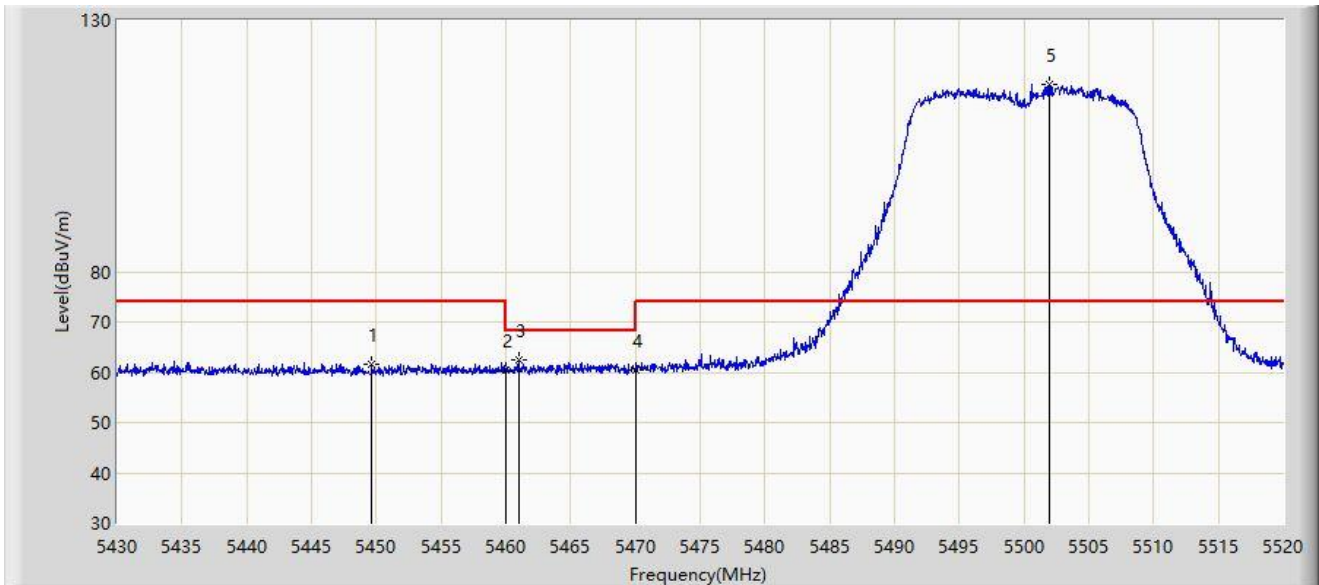


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5449.620	61.631	58.486	-12.369	74.000	3.145	PK
2		5460.000	60.468	57.249	-13.532	74.000	3.219	PK
3	*	5460.960	62.500	59.262	-5.700	68.200	3.237	PK
4		5470.000	60.570	57.158	-7.630	68.200	3.411	PK
5		5501.910	117.386	114.144	N/A	N/A	3.242	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-06-21
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: Wi-Fi 6 Outdoor AP	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT20 at 5500MHz	

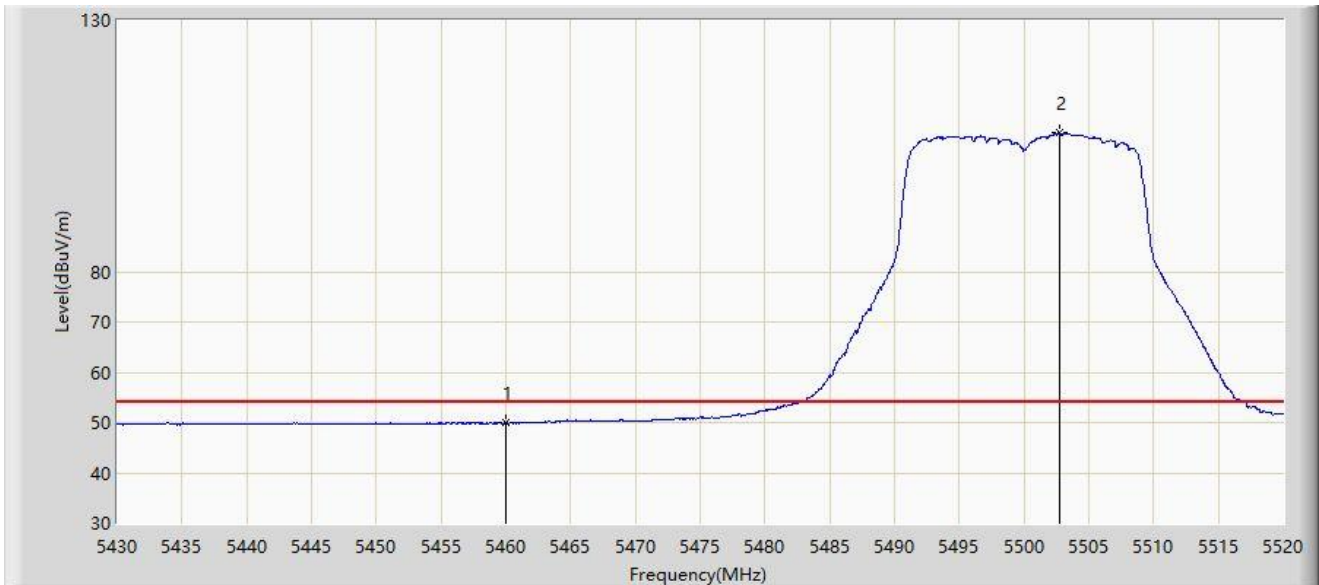


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5460.000	50.072	46.853	-3.928	54.000	3.219	AV
2		5502.720	107.543	104.306	N/A	N/A	3.236	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-06-18
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: Wi-Fi 6 Outdoor AP	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT20 at 5700MHz	

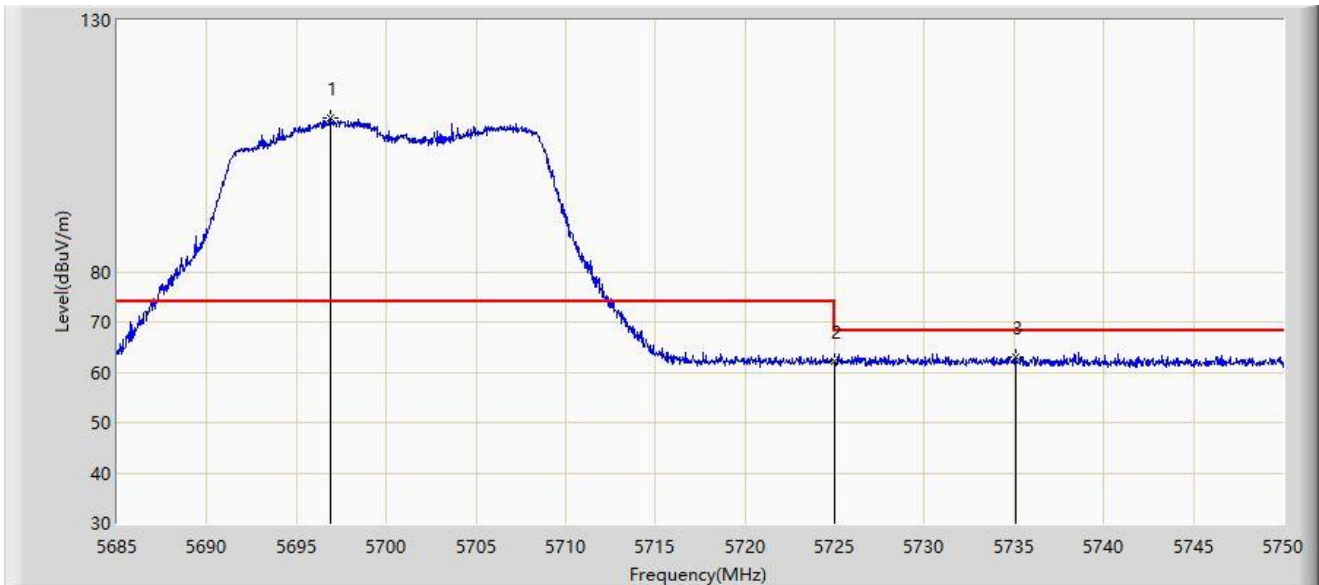


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5696.928	110.578	106.193	N/A	N/A	4.386	PK
2		5725.000	62.135	57.447	-6.065	68.200	4.688	PK
3	*	5735.083	63.094	58.557	-5.106	68.200	4.537	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-06-18
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: Wi-Fi 6 Outdoor AP	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT20 at 5700MHz	

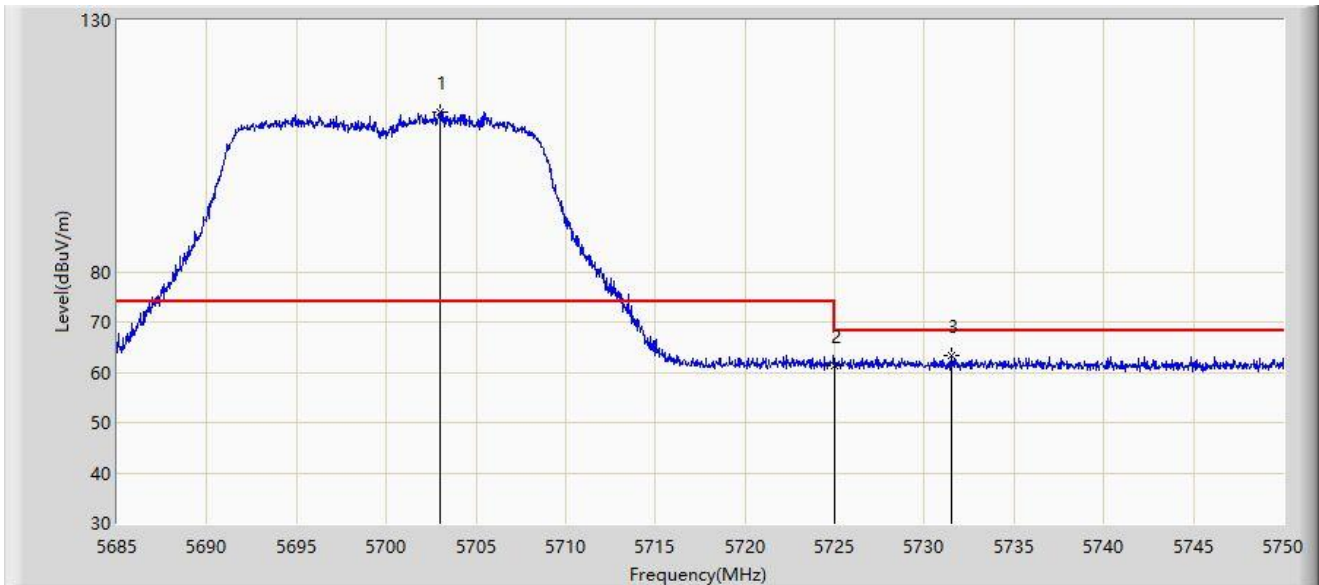


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5703.005	111.851	107.377	N/A	N/A	4.474	PK
2		5725.000	61.315	56.627	-6.885	68.200	4.688	PK
3	*	5731.540	63.451	58.850	-4.749	68.200	4.601	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-06-18
Limit: FCC_5.8G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: Wi-Fi 6 Outdoor AP	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT20 at 5745MHz	

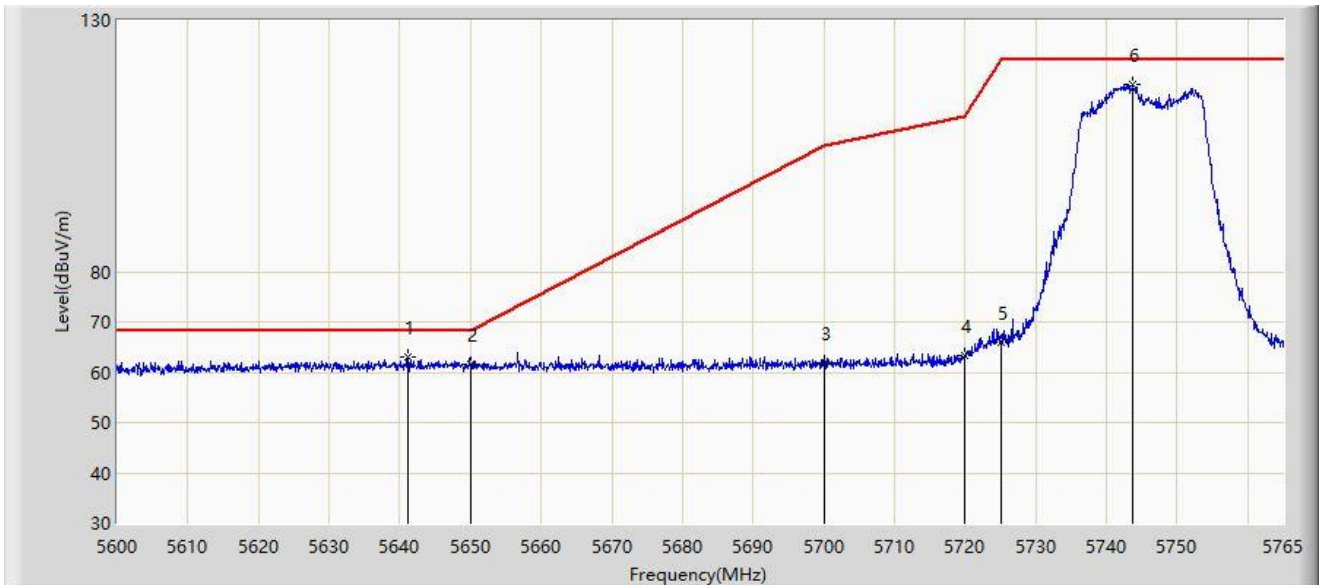


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5641.085	63.134	58.924	-5.066	68.200	4.210	PK
2		5650.000	61.470	57.310	-6.730	68.200	4.160	PK
3		5700.000	61.969	57.539	-43.231	105.200	4.430	PK
4		5720.000	63.232	58.582	-47.568	110.800	4.649	PK
5		5725.000	65.913	61.225	-56.287	122.200	4.688	PK
6		5743.715	117.316	112.921	N/A	N/A	4.395	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-06-18
Limit: FCC_5.8G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: Wi-Fi 6 Outdoor AP	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT20 at 5745MHz	

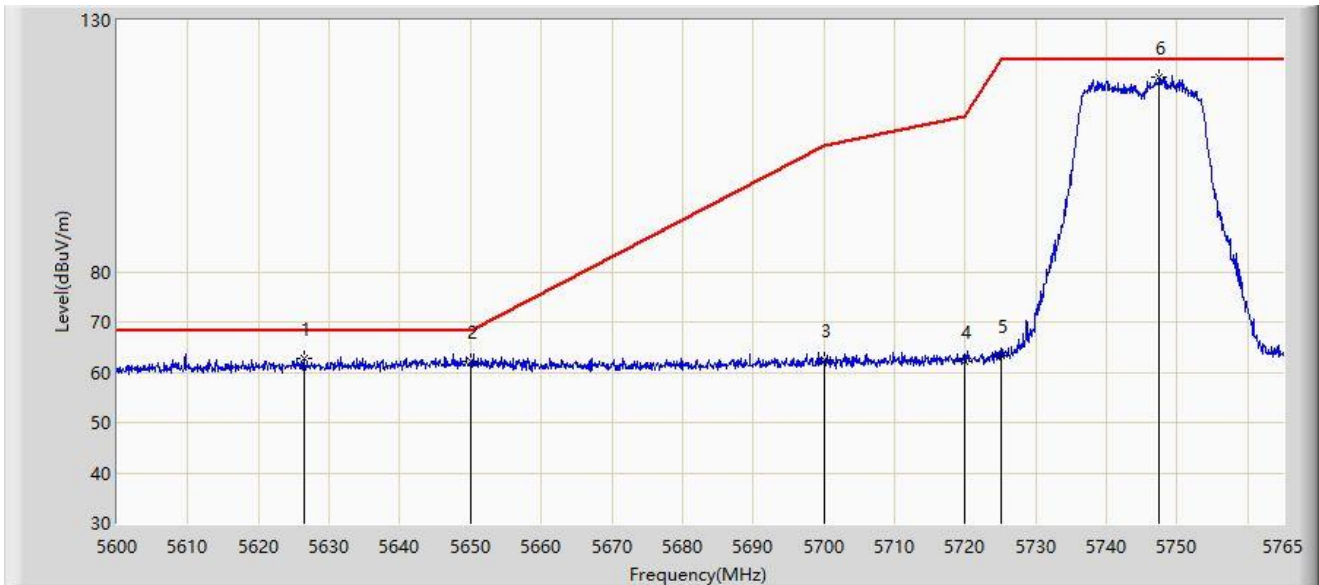


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5626.400	62.671	58.637	-5.529	68.200	4.034	PK
2		5650.000	62.044	57.884	-6.156	68.200	4.160	PK
3		5700.000	62.420	57.990	-42.780	105.200	4.430	PK
4		5720.000	62.195	57.545	-48.605	110.800	4.649	PK
5		5725.000	63.282	58.594	-58.918	122.200	4.688	PK
6		5747.428	118.838	114.407	N/A	N/A	4.431	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-06-18
Limit: FCC_5.8G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: Wi-Fi 6 Outdoor AP	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT20 at 5825MHz	

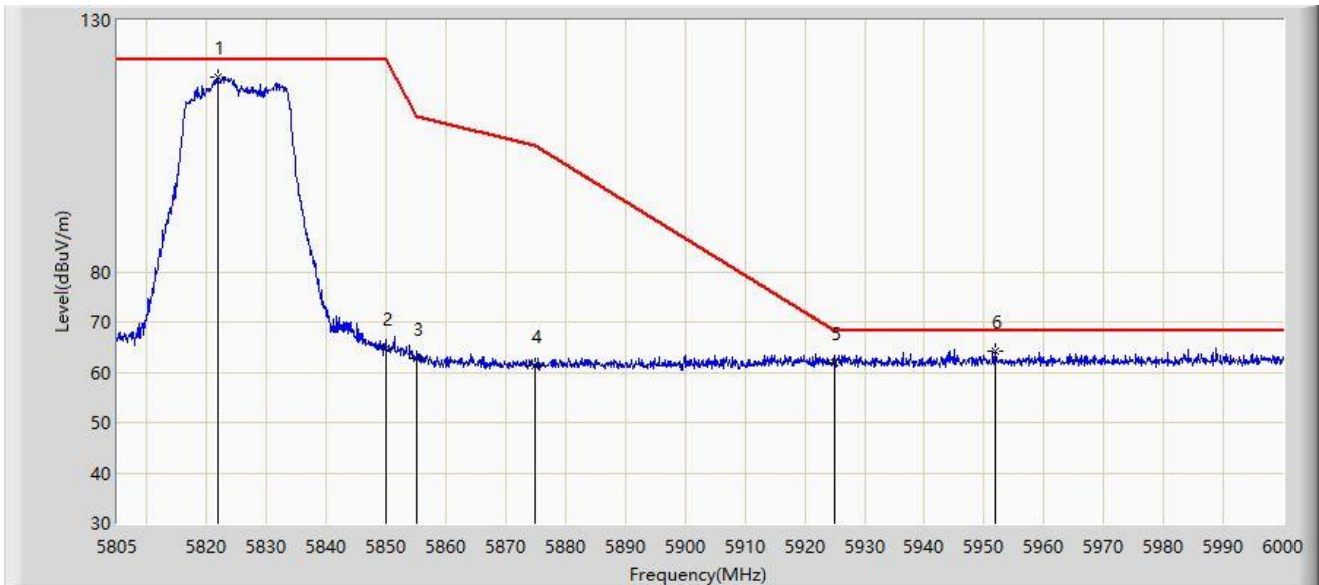


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5821.868	118.642	113.759	N/A	N/A	4.883	PK
2		5850.000	64.905	59.945	-57.295	122.200	4.960	PK
3		5855.000	62.703	57.684	-48.097	110.800	5.019	PK
4		5875.000	61.322	56.186	-43.878	105.200	5.136	PK
5		5925.000	61.870	56.600	-6.330	68.200	5.271	PK
6	*	5951.933	64.333	58.941	-3.867	68.200	5.392	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-06-18
Limit: FCC_5.8G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: Wi-Fi 6 Outdoor AP	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT20 at 5825MHz	

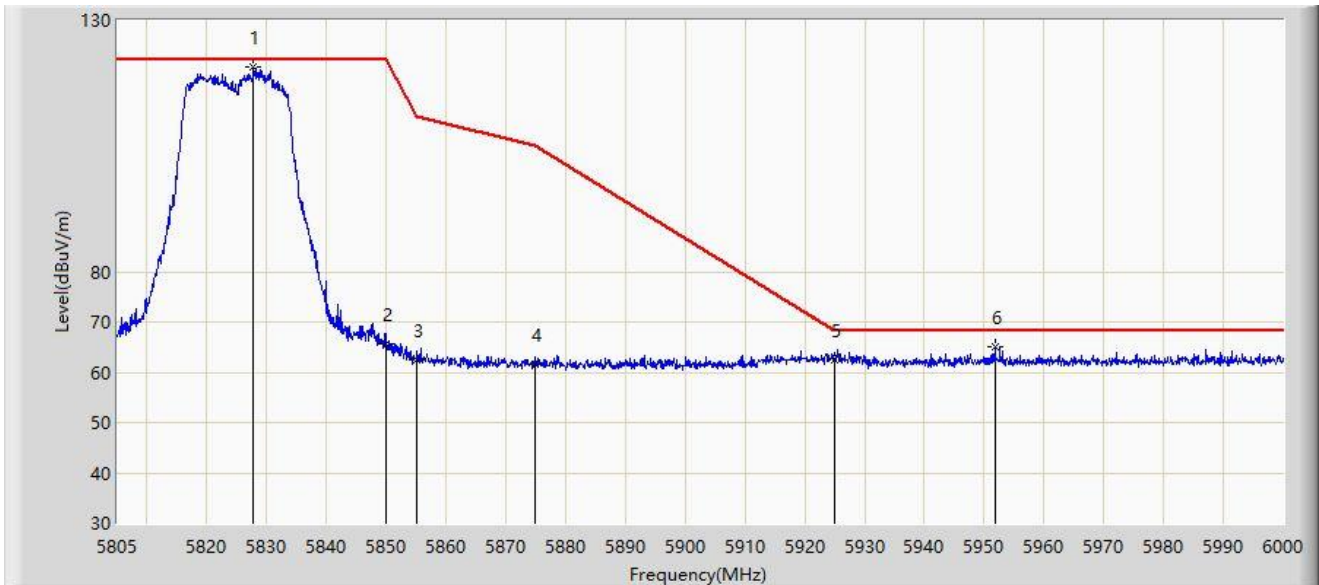


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5827.815	120.656	115.844	N/A	N/A	4.813	PK
2		5850.000	65.775	60.815	-56.425	122.200	4.960	PK
3		5855.000	62.488	57.469	-48.312	110.800	5.019	PK
4		5875.000	61.660	56.524	-43.540	105.200	5.136	PK
5		5925.000	62.354	57.084	-5.846	68.200	5.271	PK
6	*	5951.835	64.967	59.575	-3.233	68.200	5.392	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-07-13
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: Wi-Fi 6 Outdoor AP	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT40 at 5190MHz	

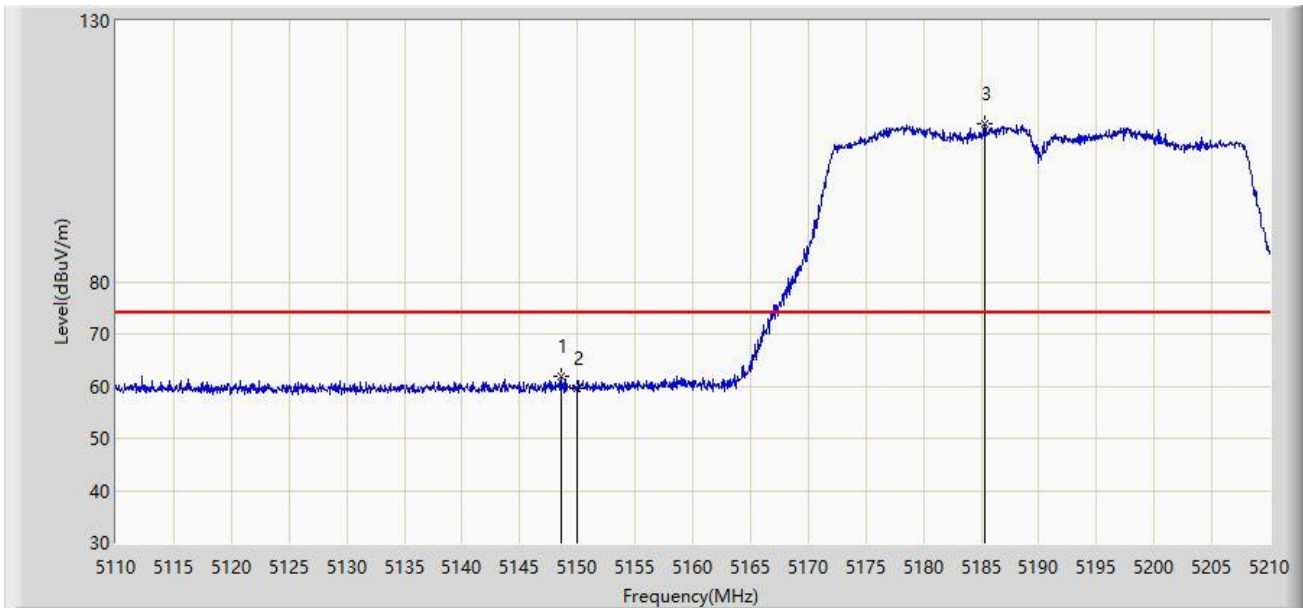


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5148.550	61.876	58.382	-12.124	74.000	3.494	PK
2		5150.000	59.579	56.080	-14.421	74.000	3.499	PK
3		5185.300	110.384	107.181	N/A	N/A	3.202	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-07-13
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: Wi-Fi 6 Outdoor AP	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT40 at 5190MHz	

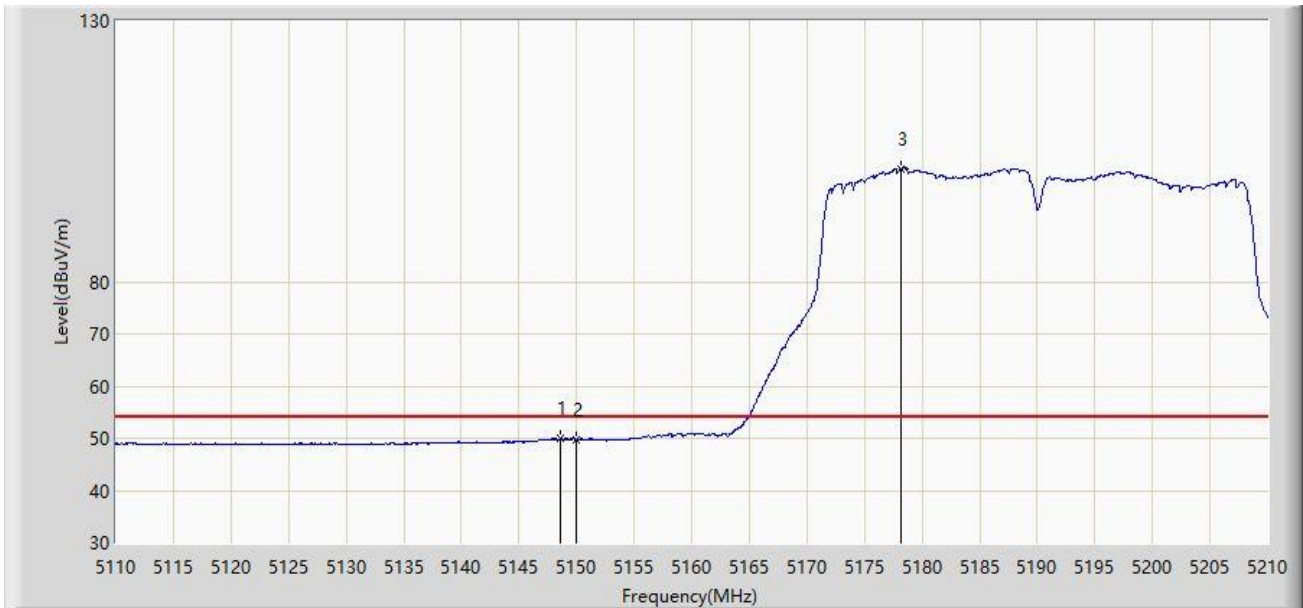


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5148.650	49.930	46.436	-4.070	54.000	3.495	AV
2		5150.000	49.778	46.279	-4.222	54.000	3.499	AV
3		5178.200	101.601	98.252	N/A	N/A	3.349	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-07-13
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: Wi-Fi 6 Outdoor AP	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT40 at 5190MHz	

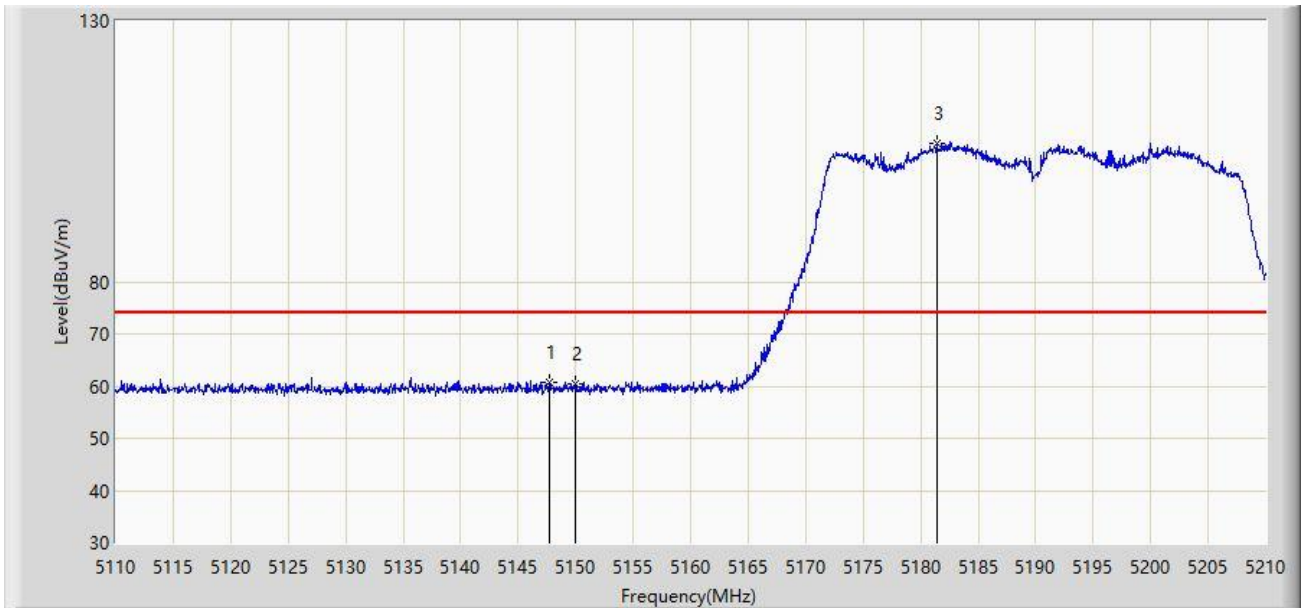


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5147.700	60.837	57.350	-13.163	74.000	3.487	PK
2		5150.000	60.509	57.010	-13.491	74.000	3.499	PK
3		5181.400	106.666	103.379	N/A	N/A	3.288	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-07-13
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: Wi-Fi 6 Outdoor AP	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT40 at 5190MHz	

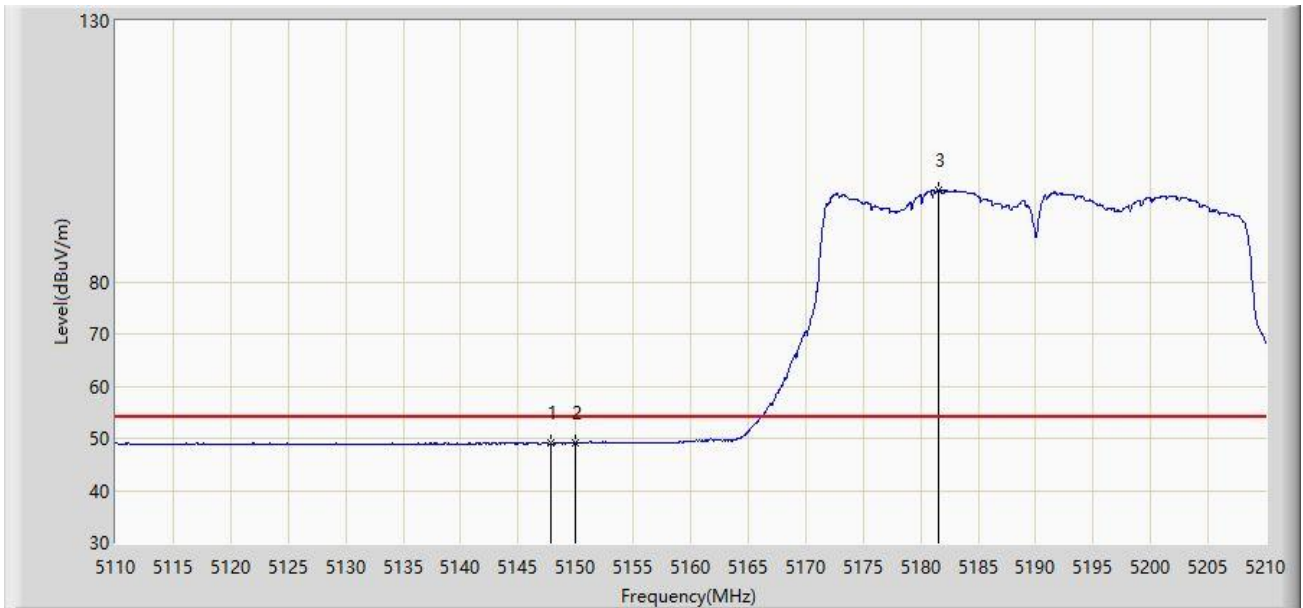


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5147.900	49.063	45.573	-4.937	54.000	3.490	AV
2	*	5150.000	49.110	45.611	-4.890	54.000	3.499	AV
3		5181.600	97.548	94.265	N/A	N/A	3.284	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-06-18
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: Wi-Fi 6 Outdoor AP	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT40 at 5310MHz	

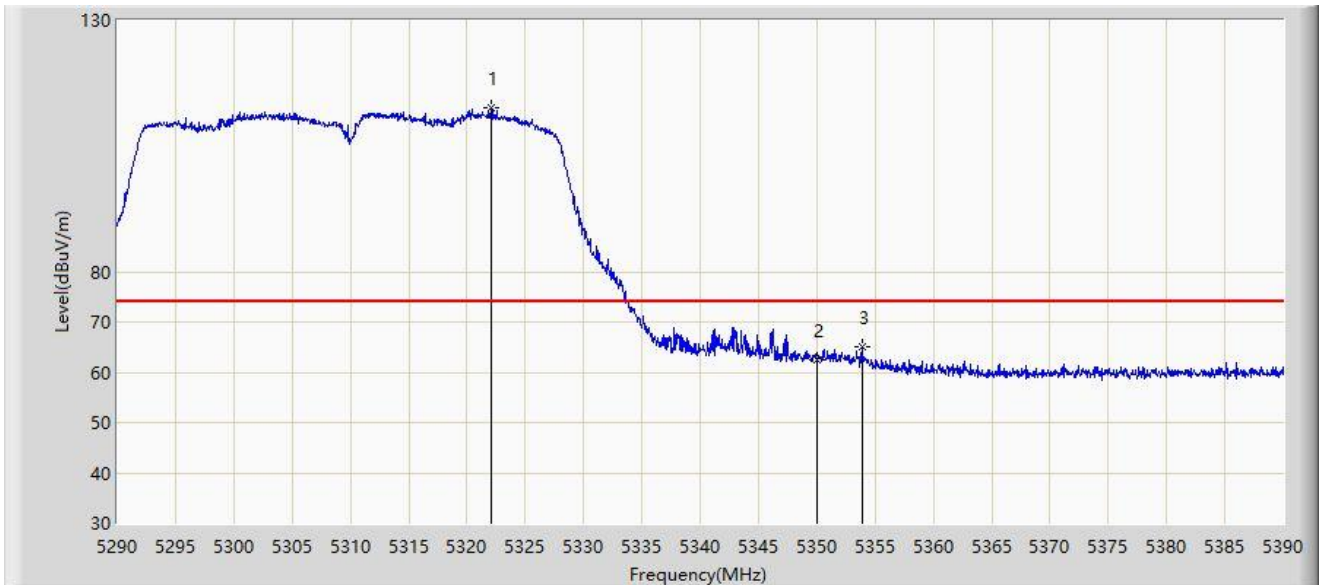


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5322.050	112.620	109.595	N/A	N/A	3.025	PK
2		5350.000	62.325	59.494	-11.675	74.000	2.832	PK
3	*	5353.850	64.945	62.139	-9.055	74.000	2.806	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-06-18
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: Wi-Fi 6 Outdoor AP	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT40 at 5310MHz	

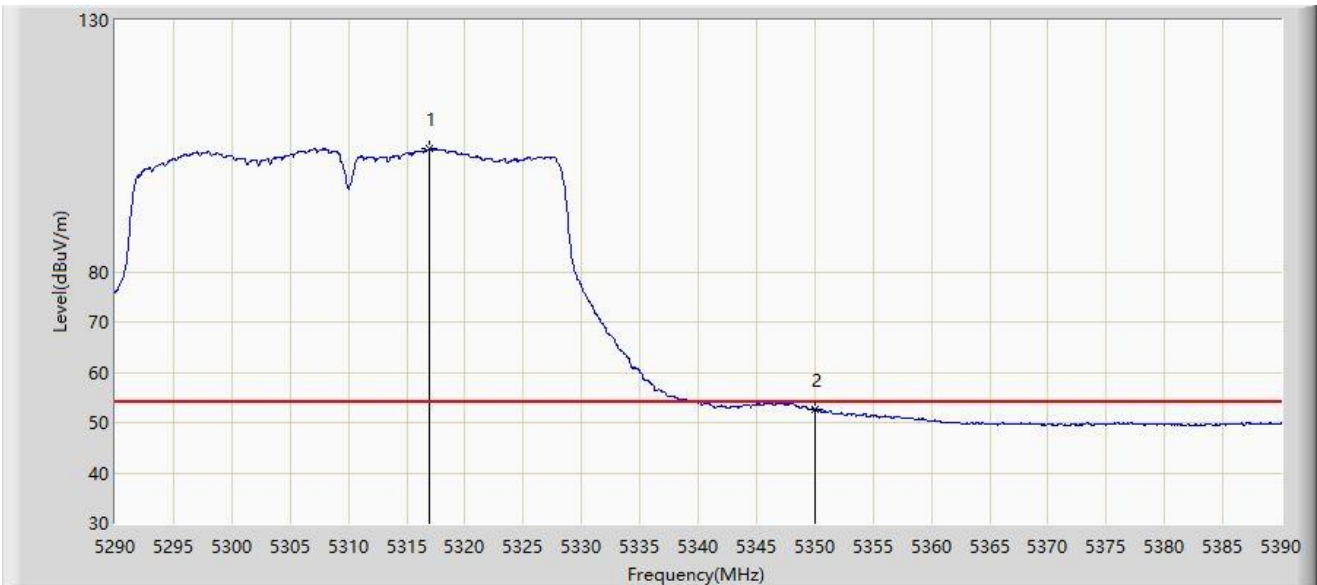


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5316.900	104.382	101.368	N/A	N/A	3.014	AV
2	*	5350.000	52.669	49.838	-1.331	54.000	2.832	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-06-18
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: Wi-Fi 6 Outdoor AP	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT40 at 5310MHz	

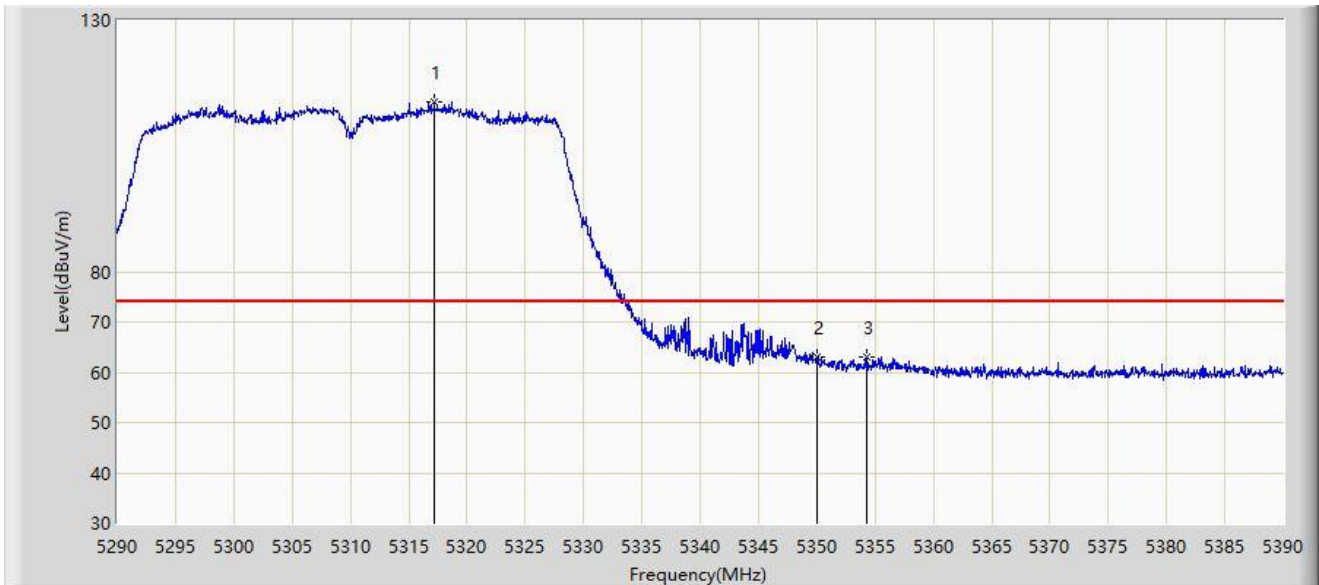


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5317.200	113.758	110.738	N/A	N/A	3.020	PK
2		5350.000	63.020	60.189	-10.980	74.000	2.832	PK
3	*	5354.250	63.041	60.233	-10.959	74.000	2.808	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-06-18
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: Wi-Fi 6 Outdoor AP	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT40 at 5310MHz	

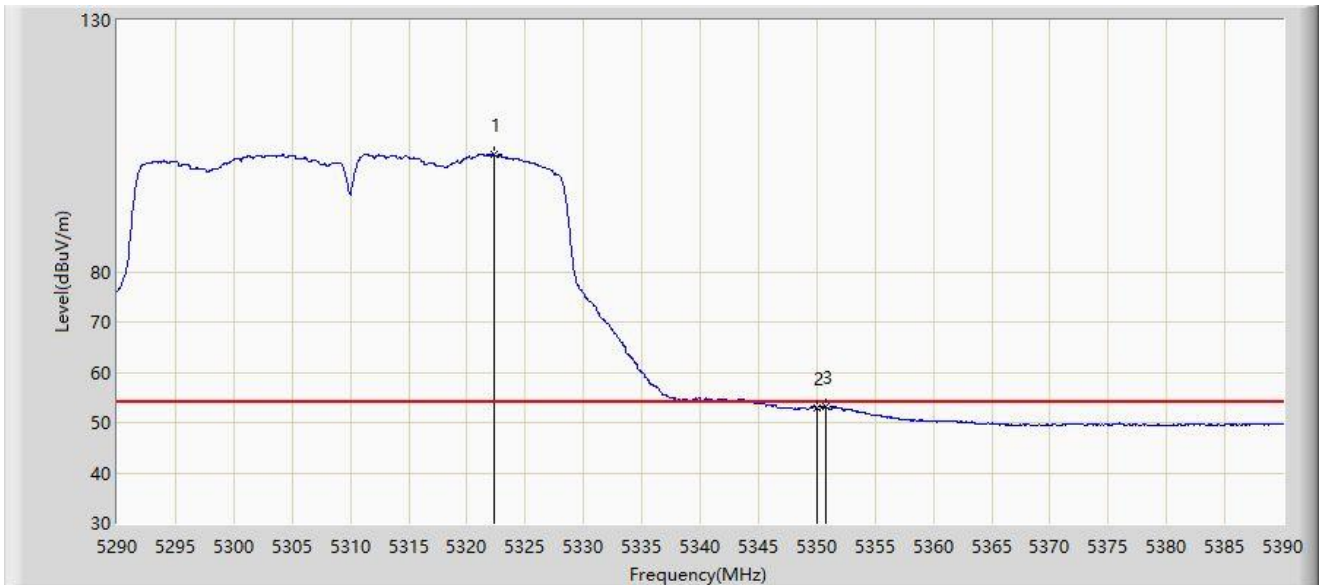


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5322.300	103.199	100.174	N/A	N/A	3.024	AV
2		5350.000	52.975	50.144	-1.025	54.000	2.832	AV
3	*	5350.800	53.160	50.342	-0.840	54.000	2.818	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-06-21
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: Wi-Fi 6 Outdoor AP	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT40 at 5510MHz	

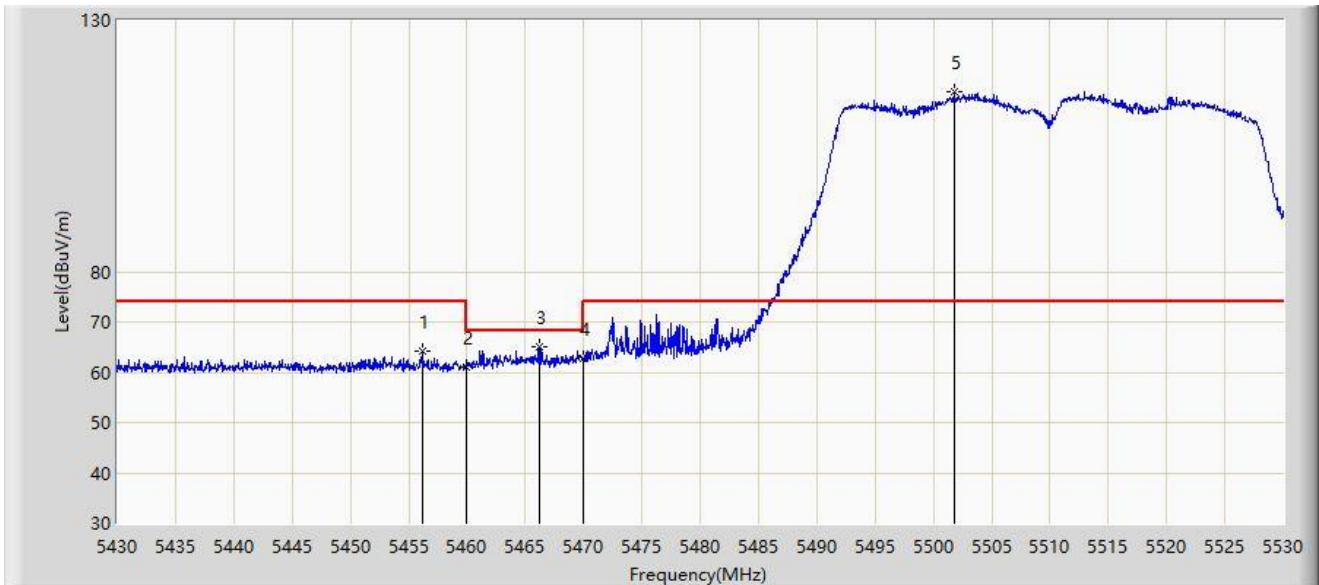


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5456.200	64.327	61.178	-9.673	74.000	3.149	PK
2		5460.000	60.993	57.774	-13.007	74.000	3.219	PK
3	*	5466.200	64.932	61.593	-3.268	68.200	3.338	PK
4		5470.000	62.737	59.325	-5.463	68.200	3.411	PK
5		5501.800	115.718	112.475	N/A	N/A	3.243	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-06-21
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: Wi-Fi 6 Outdoor AP	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT40 at 5510MHz	

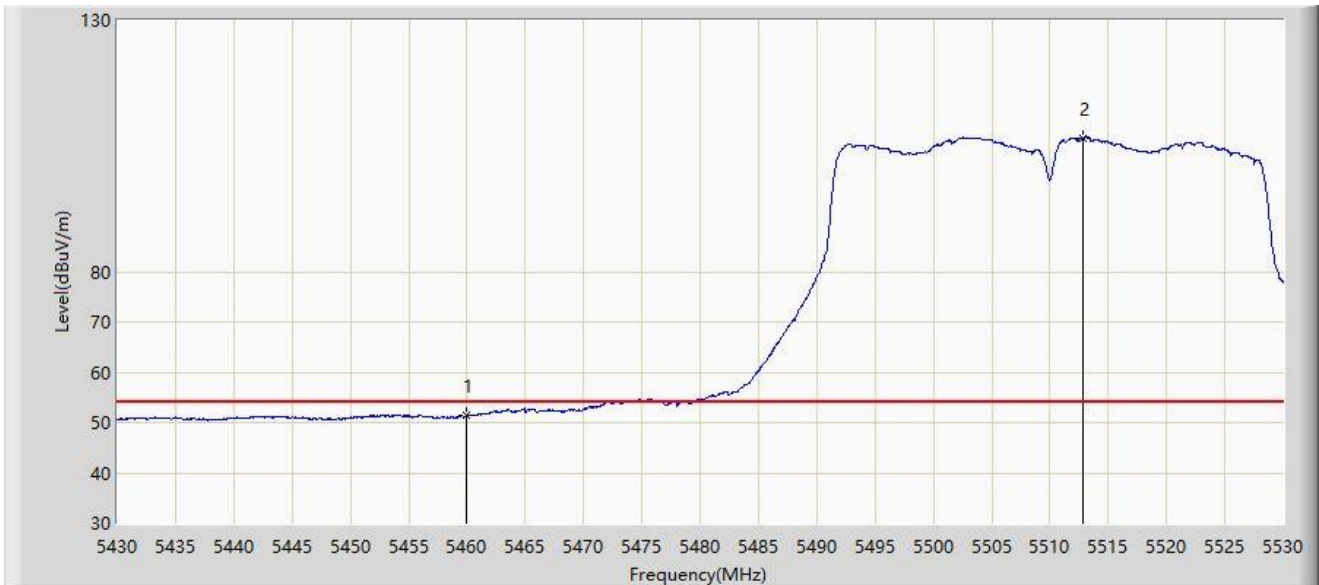


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5460.000	51.407	48.188	-2.593	54.000	3.219	AV
2		5512.800	106.578	103.427	N/A	N/A	3.150	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-06-21
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: Wi-Fi 6 Outdoor AP	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT40 at 5510MHz	

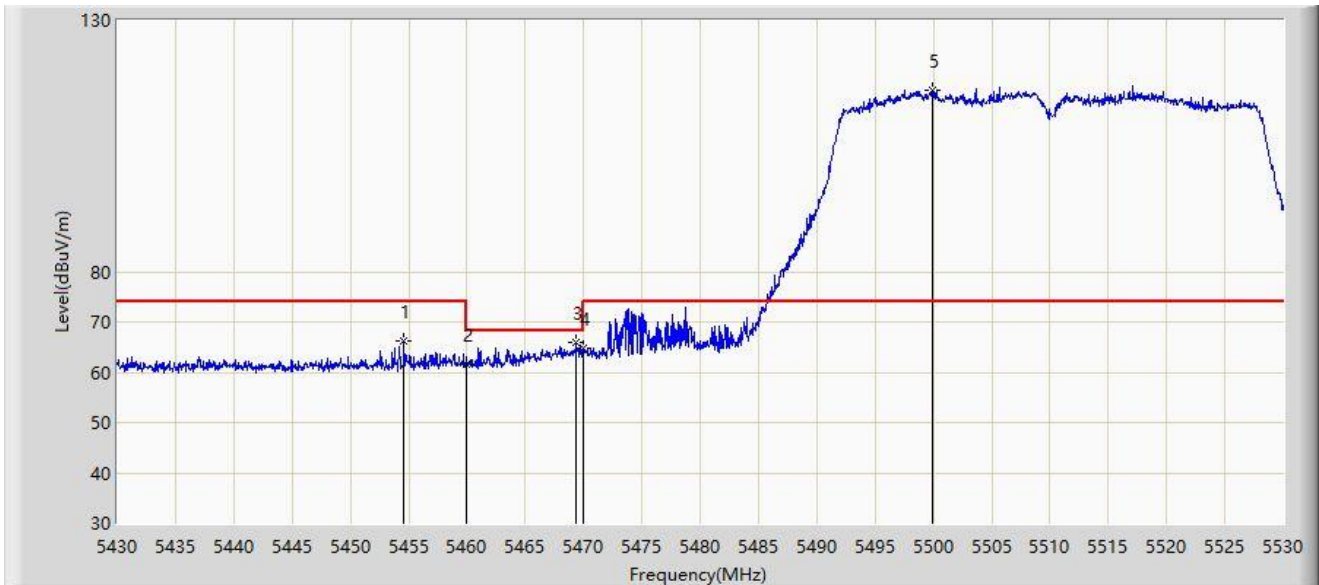


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5454.600	66.185	63.061	-7.815	74.000	3.124	PK
2		5460.000	61.698	58.479	-12.302	74.000	3.219	PK
3	*	5469.400	65.993	62.593	-2.207	68.200	3.400	PK
4		5470.000	64.728	61.316	-3.472	68.200	3.411	PK
5		5499.950	116.020	112.764	N/A	N/A	3.256	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-06-21
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: Wi-Fi 6 Outdoor AP	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT40 at 5510MHz	

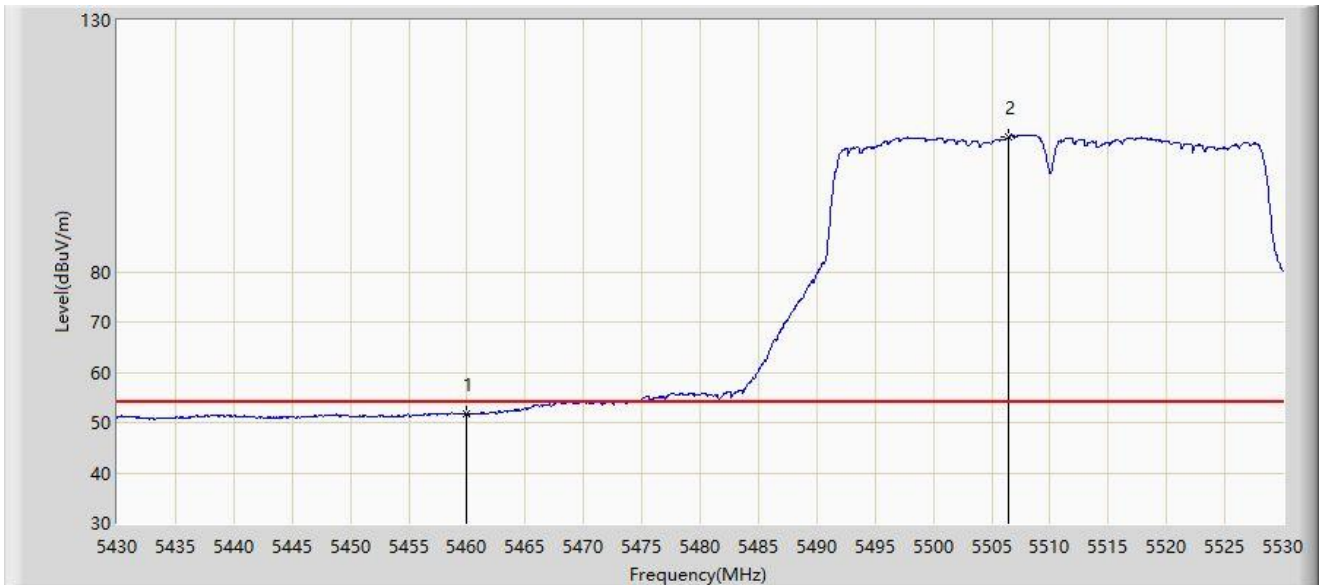


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5460.000	51.770	48.551	-2.230	54.000	3.219	AV
2		5506.500	106.887	103.682	N/A	N/A	3.205	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-06-18
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: Wi-Fi 6 Outdoor AP	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT40 at 5670MHz	

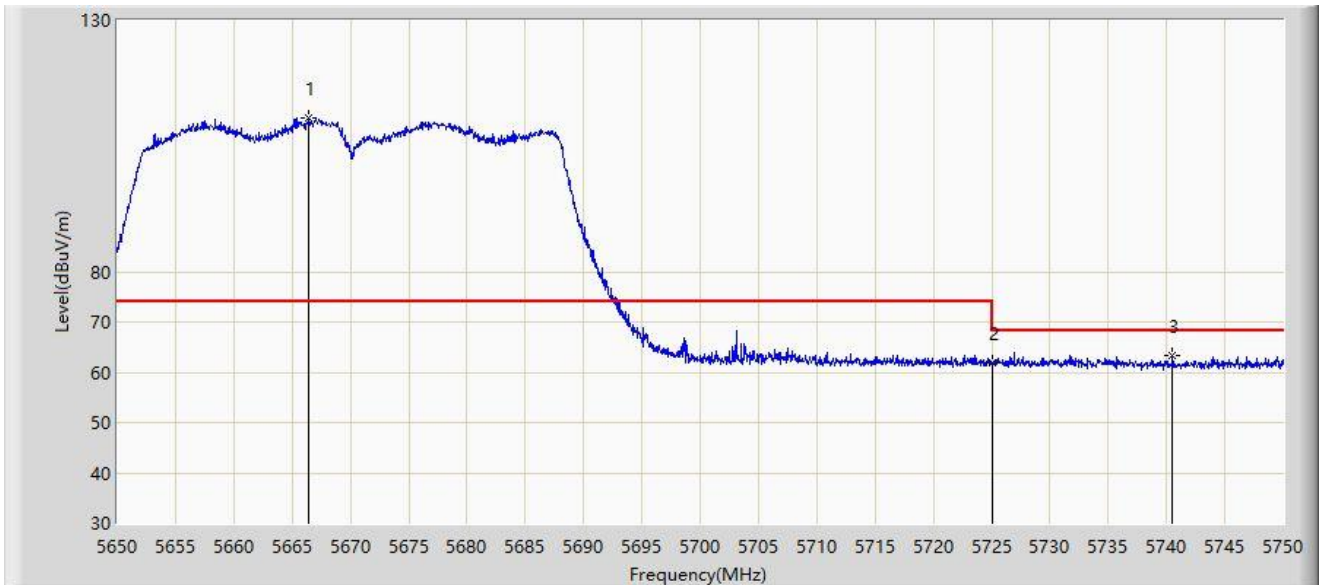


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5666.450	110.636	106.579	N/A	N/A	4.056	PK
2		5725.000	61.834	57.146	-6.366	68.200	4.688	PK
3	*	5740.500	63.394	58.954	-4.806	68.200	4.440	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-06-18
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: Wi-Fi 6 Outdoor AP	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT40 at 5670MHz	

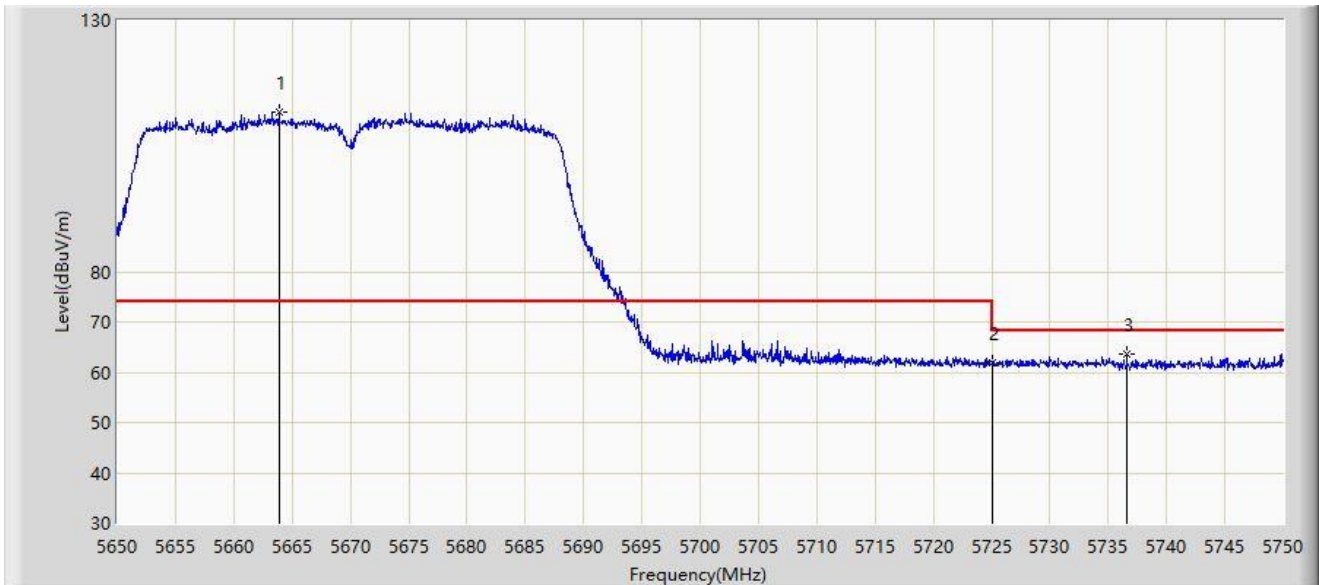


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5663.900	111.750	107.683	N/A	N/A	4.066	PK
2		5725.000	61.753	57.065	-6.447	68.200	4.688	PK
3	*	5736.600	63.604	59.094	-4.596	68.200	4.511	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-06-18
Limit: FCC_5.8G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: Wi-Fi 6 Outdoor AP	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT40 at 5755MHz	

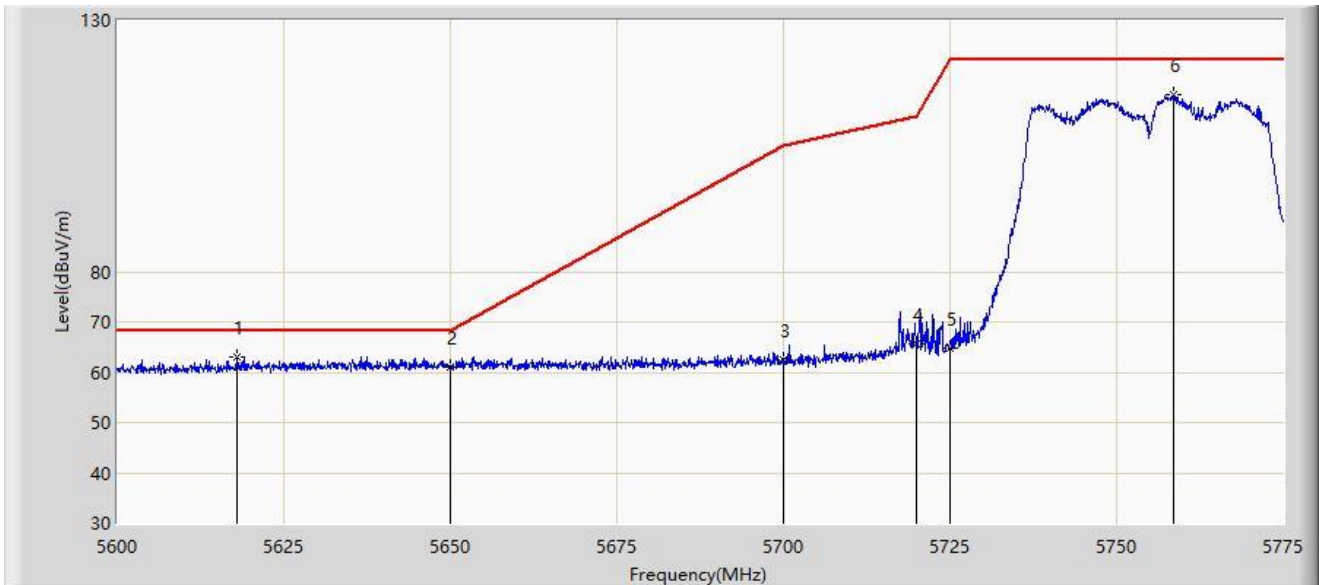


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5618.025	63.095	59.248	-5.105	68.200	3.846	PK
2		5650.000	61.148	56.988	-7.052	68.200	4.160	PK
3		5700.000	62.329	57.899	-42.871	105.200	4.430	PK
4		5720.000	65.723	61.073	-45.077	110.800	4.649	PK
5		5725.000	64.717	60.029	-57.483	122.200	4.688	PK
6		5758.638	115.220	110.655	N/A	N/A	4.565	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-06-18
Limit: FCC_5.8G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: Wi-Fi 6 Outdoor AP	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT40 at 5755MHz	

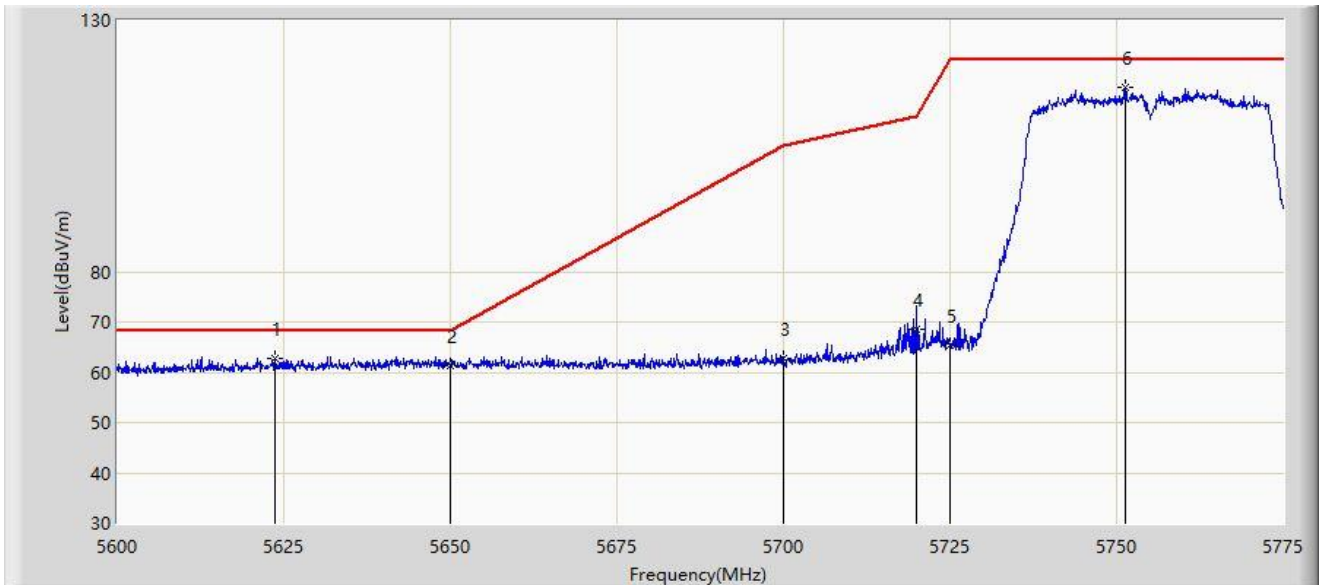


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5623.712	62.860	58.862	-5.340	68.200	3.998	PK
2		5650.000	61.171	57.011	-7.029	68.200	4.160	PK
3		5700.000	62.787	58.357	-42.413	105.200	4.430	PK
4		5720.000	68.445	63.795	-42.355	110.800	4.649	PK
5		5725.000	65.498	60.810	-56.702	122.200	4.688	PK
6		5751.288	116.677	112.200	N/A	N/A	4.477	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-06-18
Limit: FCC_5.8G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: Wi-Fi 6 Outdoor AP	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT40 at 5795MHz	

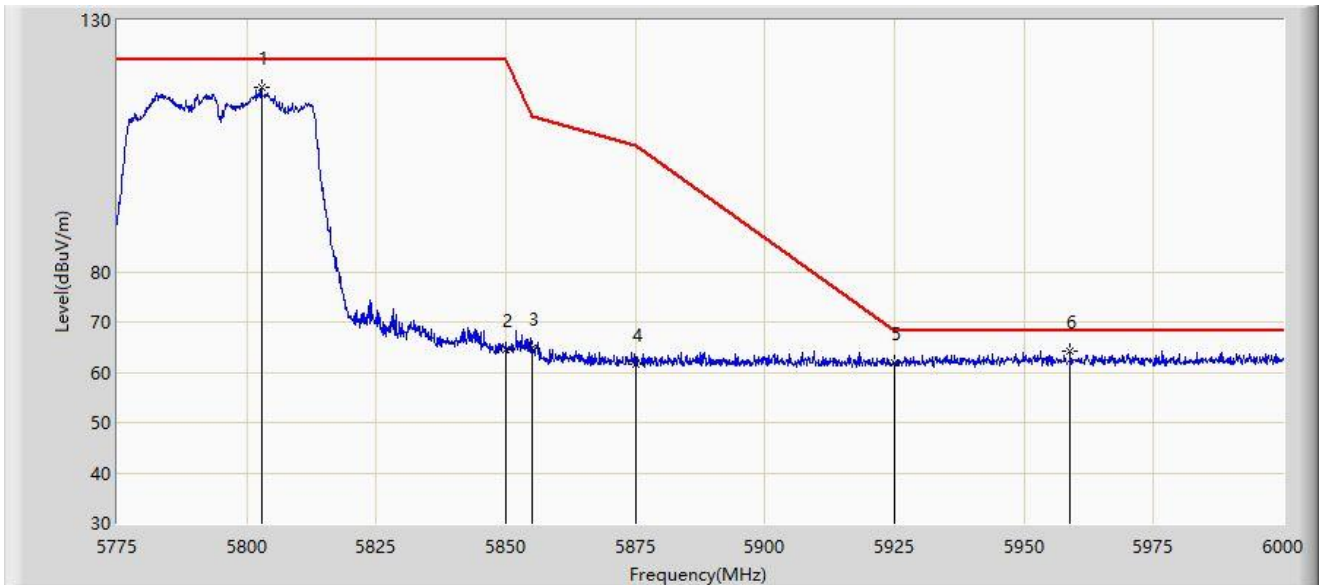


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5802.788	116.573	111.527	N/A	N/A	5.047	PK
2		5850.000	64.400	59.440	-57.800	122.200	4.960	PK
3		5855.000	64.863	59.844	-45.937	110.800	5.019	PK
4		5875.000	61.486	56.350	-43.714	105.200	5.136	PK
5		5925.000	61.835	56.565	-6.365	68.200	5.271	PK
6	*	5958.937	64.117	58.702	-4.083	68.200	5.415	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-06-18
Limit: FCC_5.8G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: Wi-Fi 6 Outdoor AP	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT40 at 5795MHz	

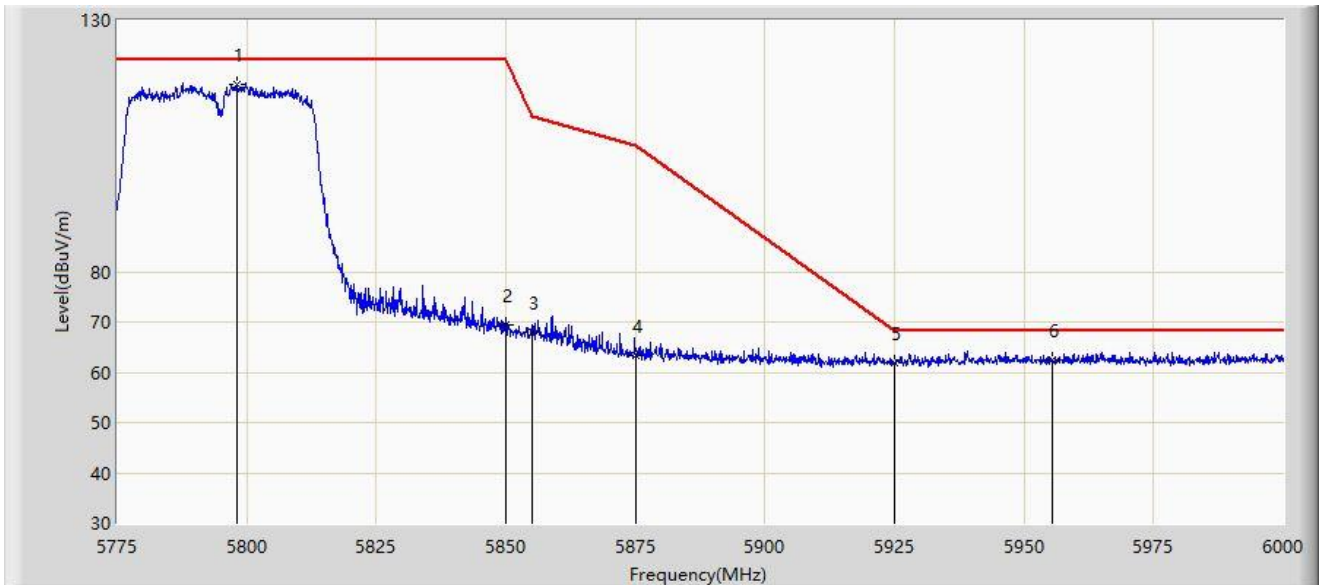


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5798.175	117.112	112.050	N/A	N/A	5.062	PK
2		5850.000	69.519	64.559	-52.681	122.200	4.960	PK
3		5855.000	68.031	63.012	-42.769	110.800	5.019	PK
4		5875.000	63.255	58.119	-41.945	105.200	5.136	PK
5		5925.000	61.887	56.617	-6.313	68.200	5.271	PK
6	*	5955.450	62.350	56.947	-5.850	68.200	5.403	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-07-13
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: Wi-Fi 6 Outdoor AP	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT80 at 5210MHz	

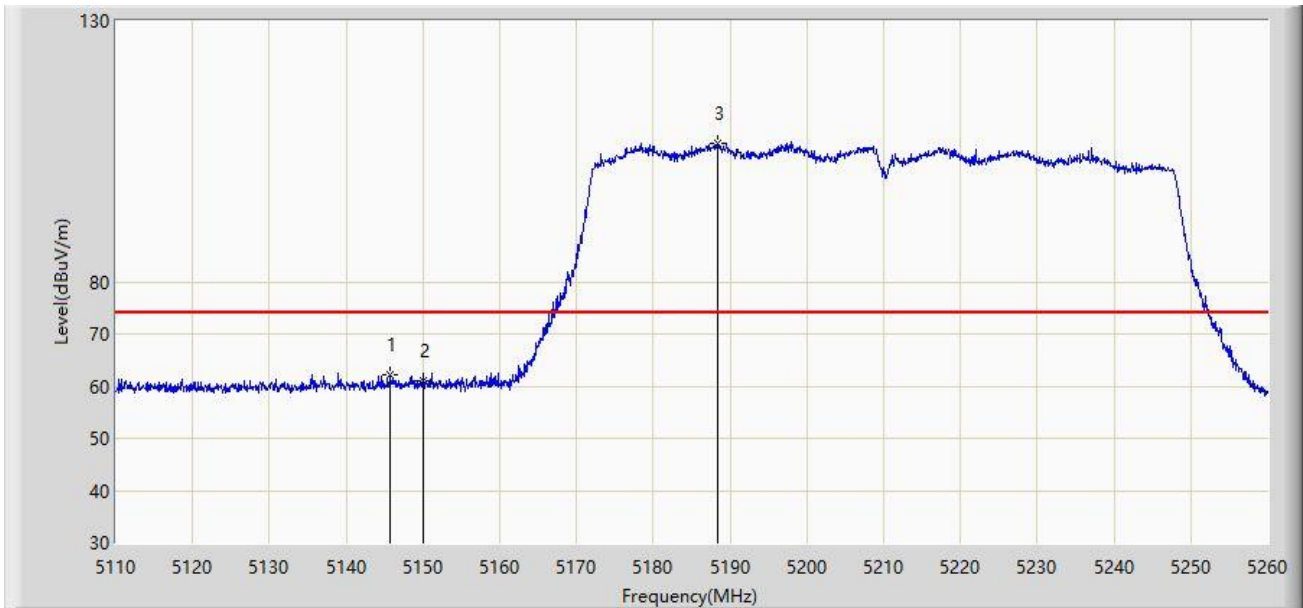


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5145.775	62.228	58.768	-11.772	74.000	3.460	PK
2		5150.000	61.034	57.535	-12.966	74.000	3.499	PK
3		5188.375	106.571	103.435	N/A	N/A	3.136	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-07-13
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: Wi-Fi 6 Outdoor AP	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT80 at 5210MHz	

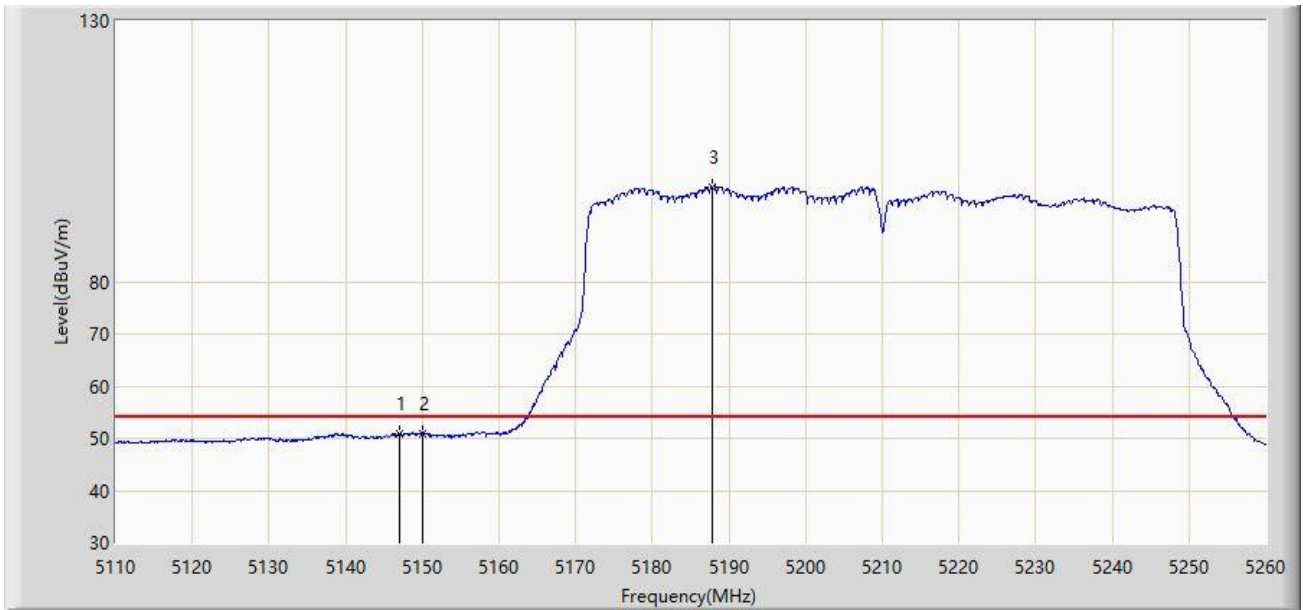


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5147.050	50.890	47.412	-3.110	54.000	3.477	AV
2	*	5150.000	50.927	47.428	-3.073	54.000	3.499	AV
3		5187.775	98.196	95.048	N/A	N/A	3.148	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-07-13
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: Wi-Fi 6 Outdoor AP	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT80 at 5210MHz	

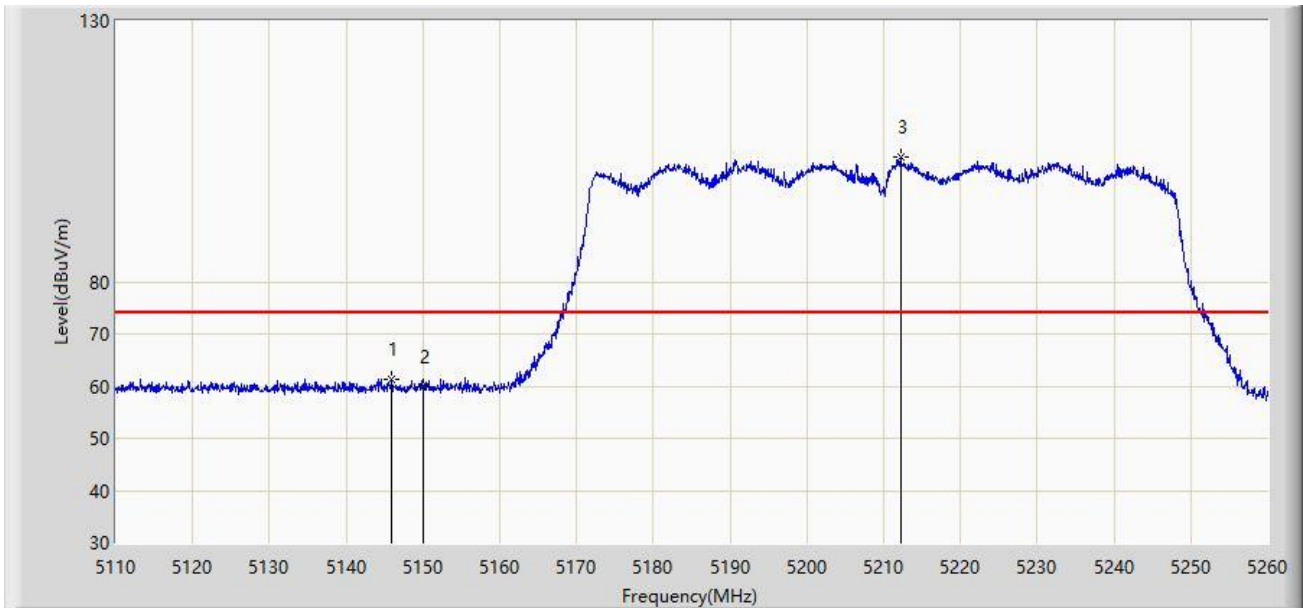


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5145.925	61.446	57.984	-12.554	74.000	3.462	PK
2		5150.000	59.847	56.348	-14.153	74.000	3.499	PK
3		5212.225	103.780	100.822	N/A	N/A	2.959	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-07-13
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: Wi-Fi 6 Outdoor AP	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT80 at 5210MHz	

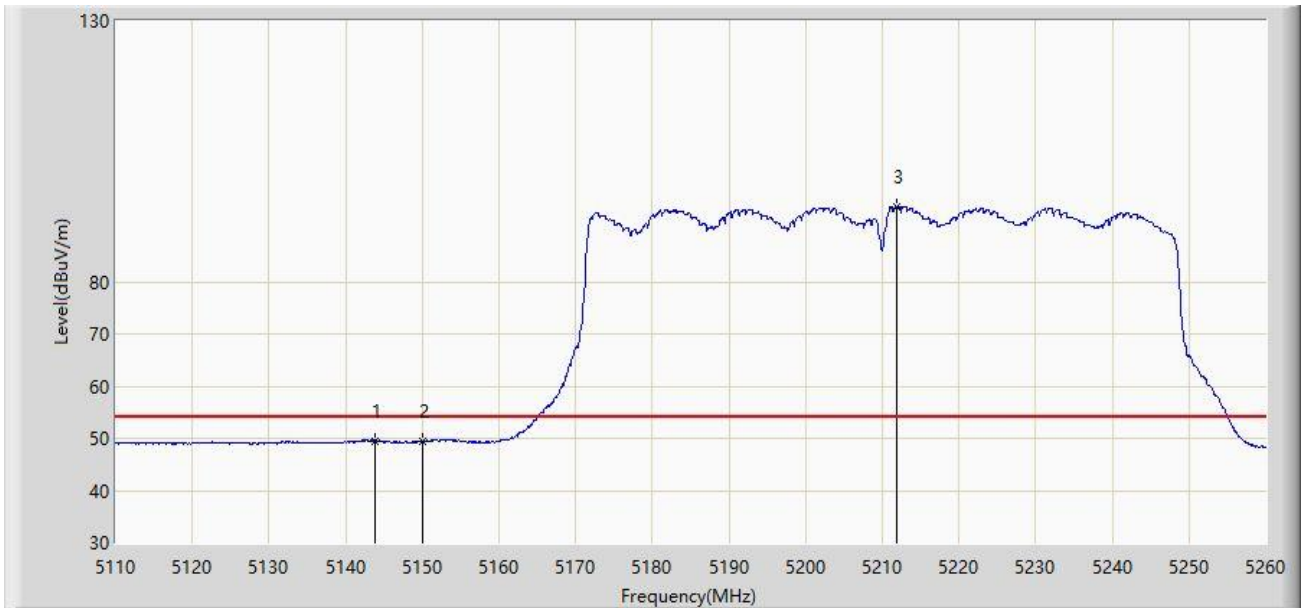


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5143.825	49.563	46.131	-4.437	54.000	3.432	AV
2		5150.000	49.456	45.957	-4.544	54.000	3.499	AV
3		5211.850	94.462	91.505	N/A	N/A	2.957	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-06-18
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: Wi-Fi 6 Outdoor AP	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT80 at 5290MHz	

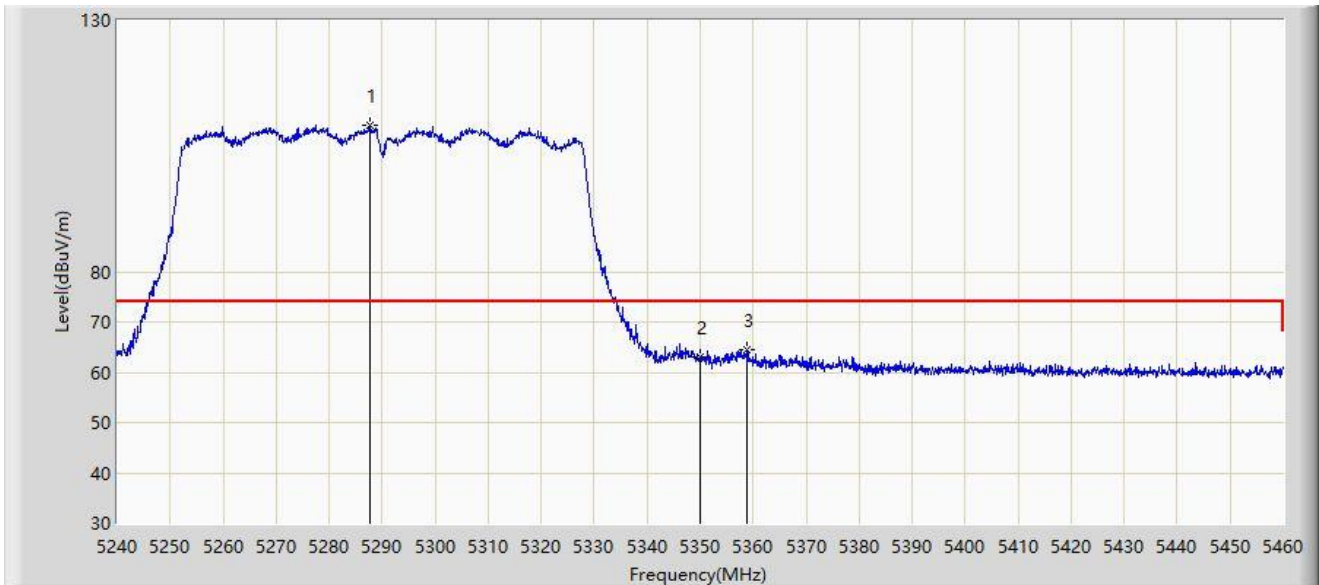


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5287.630	109.008	106.410	N/A	N/A	2.598	PK
2		5350.000	62.977	60.146	-11.023	74.000	2.832	PK
3	*	5358.800	64.632	61.802	-9.368	74.000	2.830	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-06-18
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: Wi-Fi 6 Outdoor AP	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT80 at 5290MHz	

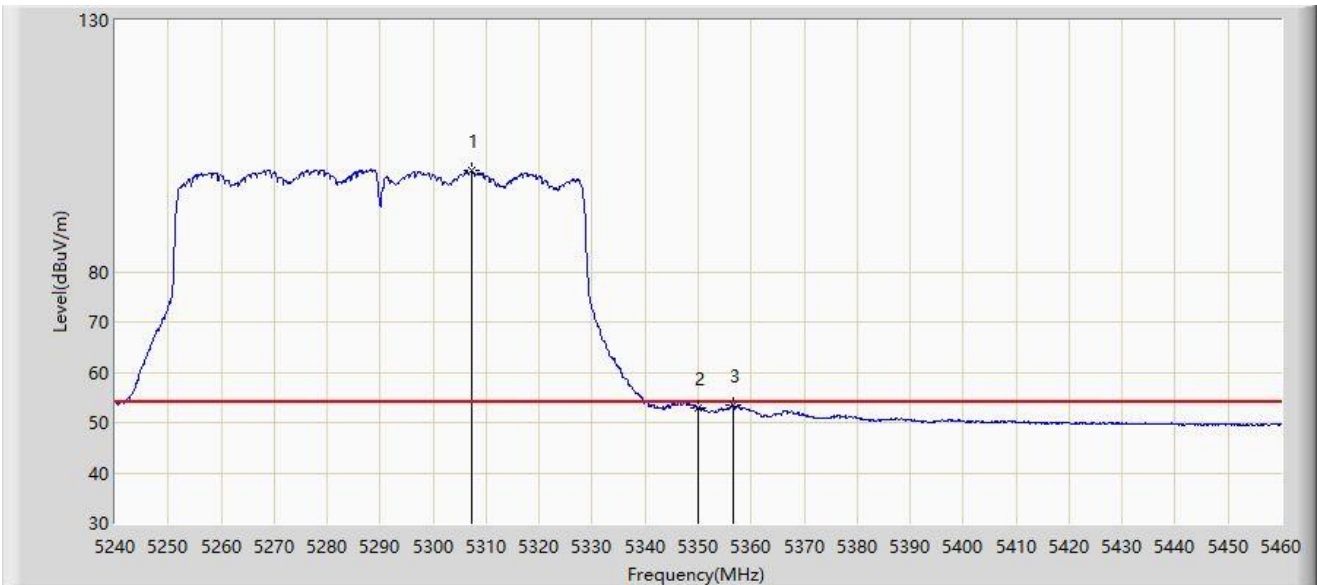


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5307.320	100.137	97.275	N/A	N/A	2.862	AV
2		5350.000	52.949	50.118	-1.051	54.000	2.832	AV
3	*	5356.600	53.341	50.521	-0.659	54.000	2.819	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-06-18
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: Wi-Fi 6 Outdoor AP	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT80 at 5290MHz	

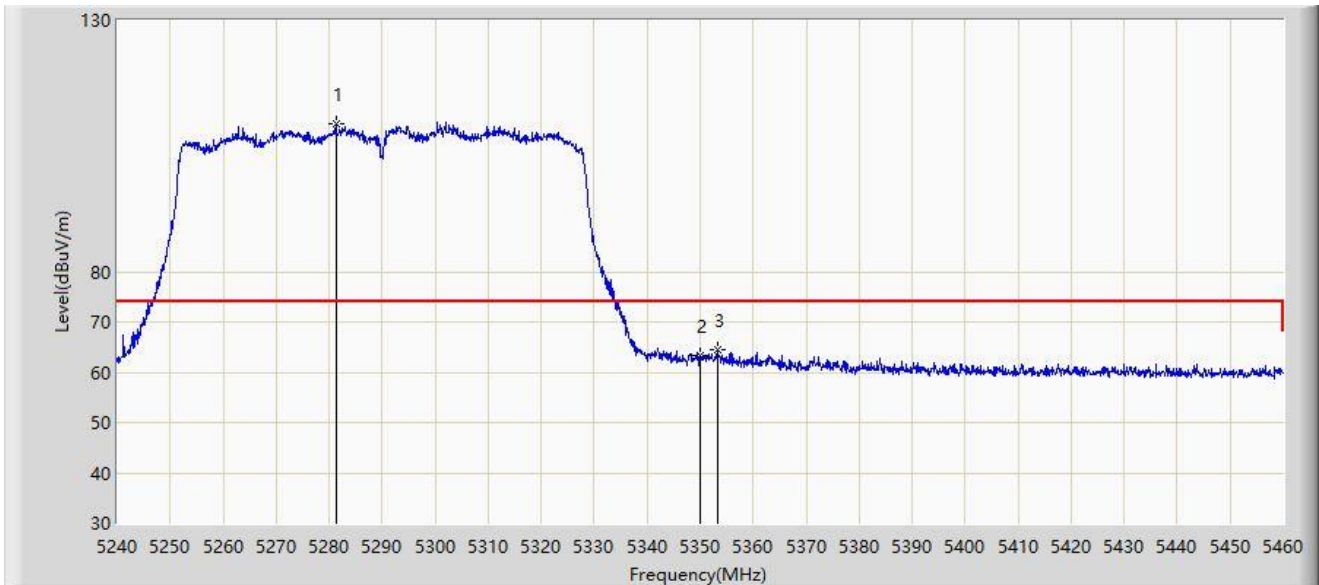


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5281.360	109.378	106.812	N/A	N/A	2.566	PK
2		5350.000	63.323	60.492	-10.677	74.000	2.832	PK
3	*	5353.190	64.610	61.807	-9.390	74.000	2.804	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-06-18
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: Wi-Fi 6 Outdoor AP	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT80 at 5290MHz	

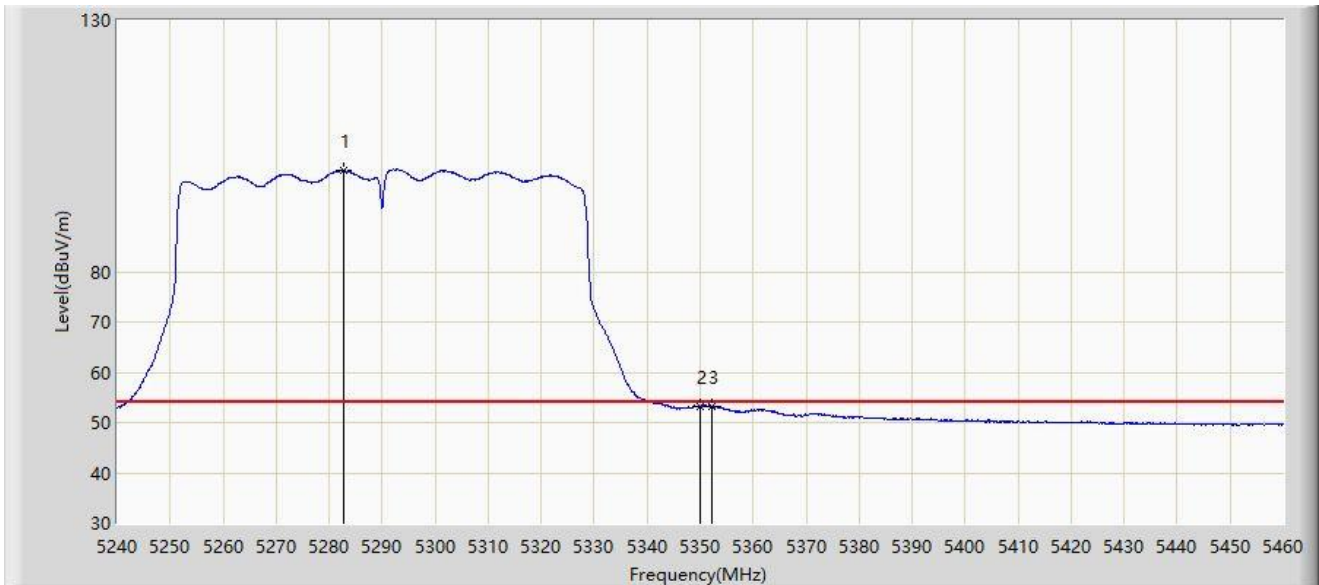


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5282.680	100.085	97.528	N/A	N/A	2.557	AV
2		5350.000	53.115	50.284	-0.885	54.000	2.832	AV
3	*	5352.200	53.262	50.464	-0.738	54.000	2.798	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-06-18
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: Wi-Fi 6 Outdoor AP	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT80 at 5530MHz	

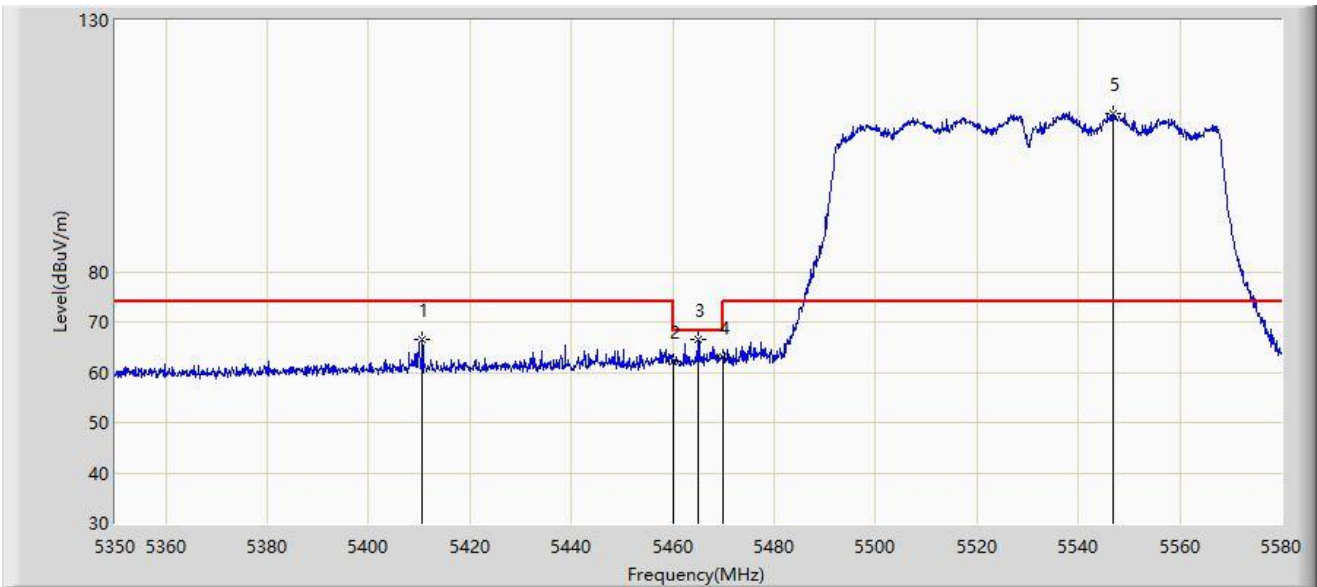


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5410.605	66.389	62.908	-7.611	74.000	3.480	PK
2		5460.000	62.248	59.029	-11.752	74.000	3.219	PK
3	*	5464.885	66.645	63.332	-1.555	68.200	3.314	PK
4		5470.000	63.009	59.597	-5.191	68.200	3.411	PK
5		5546.765	111.526	108.066	N/A	N/A	3.460	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-06-18
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: Wi-Fi 6 Outdoor AP	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT80 at 5530MHz	

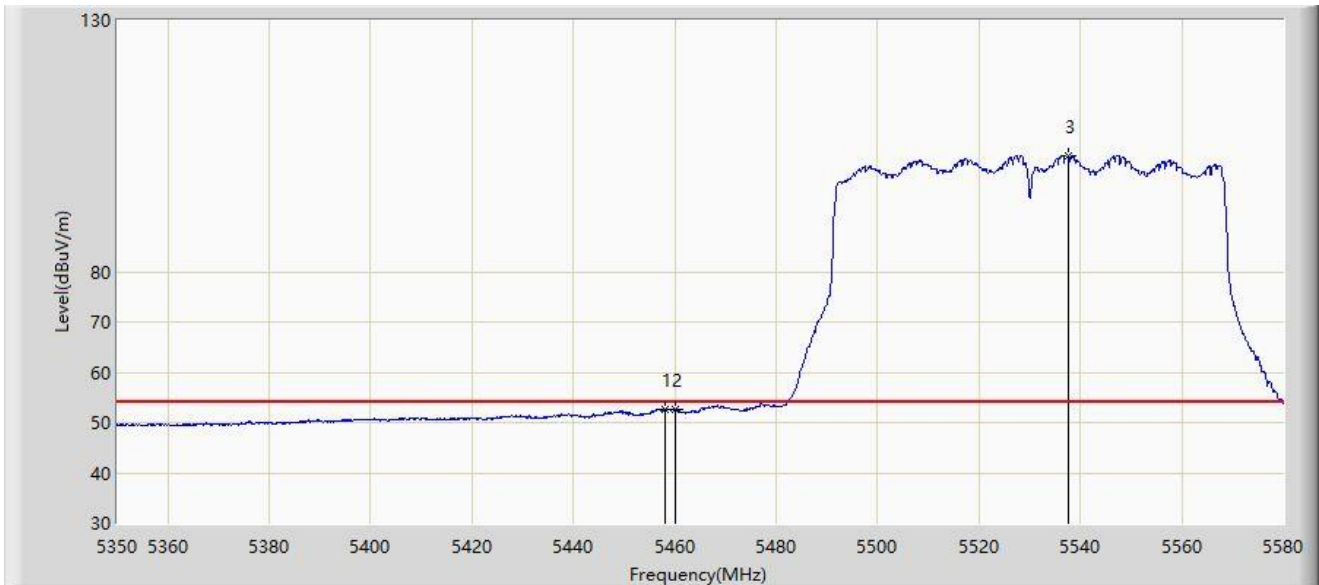


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5457.985	52.533	49.353	-1.467	54.000	3.180	AV
2	*	5460.000	52.571	49.352	-1.429	54.000	3.219	AV
3		5537.680	103.167	99.798	N/A	N/A	3.370	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-06-18
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: Wi-Fi 6 Outdoor AP	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT80 at 5530MHz	

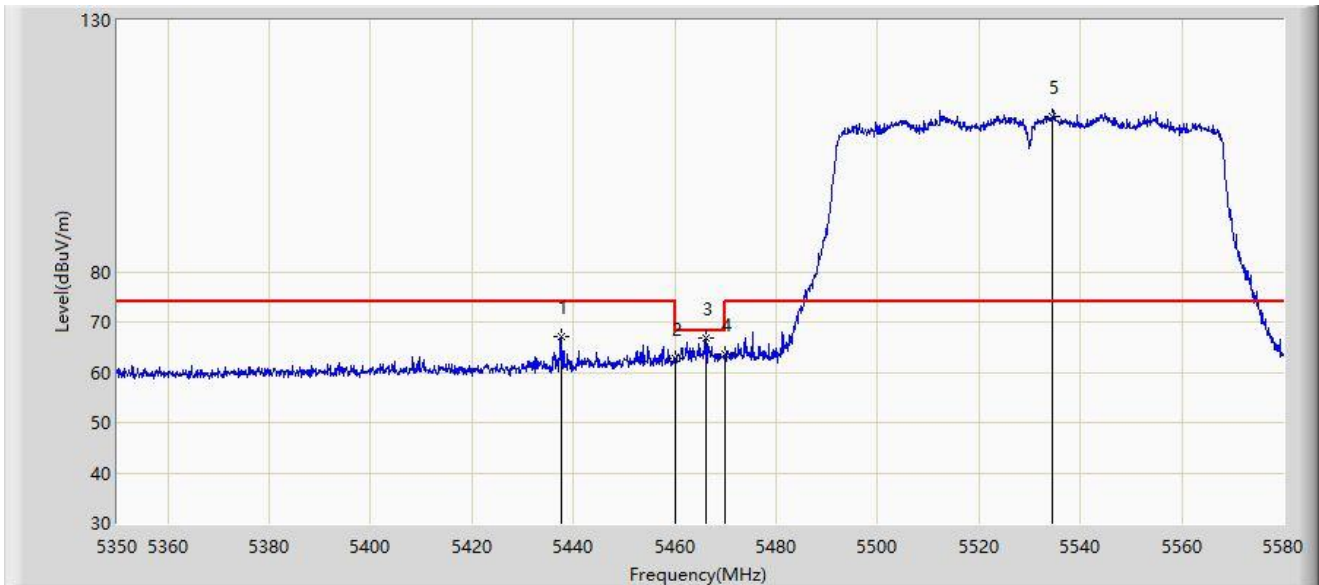


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5437.515	66.959	63.732	-7.041	74.000	3.227	PK
2		5460.000	62.619	59.400	-11.381	74.000	3.219	PK
3	*	5466.035	66.950	63.615	-1.250	68.200	3.336	PK
4		5470.000	63.510	60.098	-4.690	68.200	3.411	PK
5		5534.460	110.879	107.550	N/A	N/A	3.329	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-06-18
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: Wi-Fi 6 Outdoor AP	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT80 at 5530MHz	

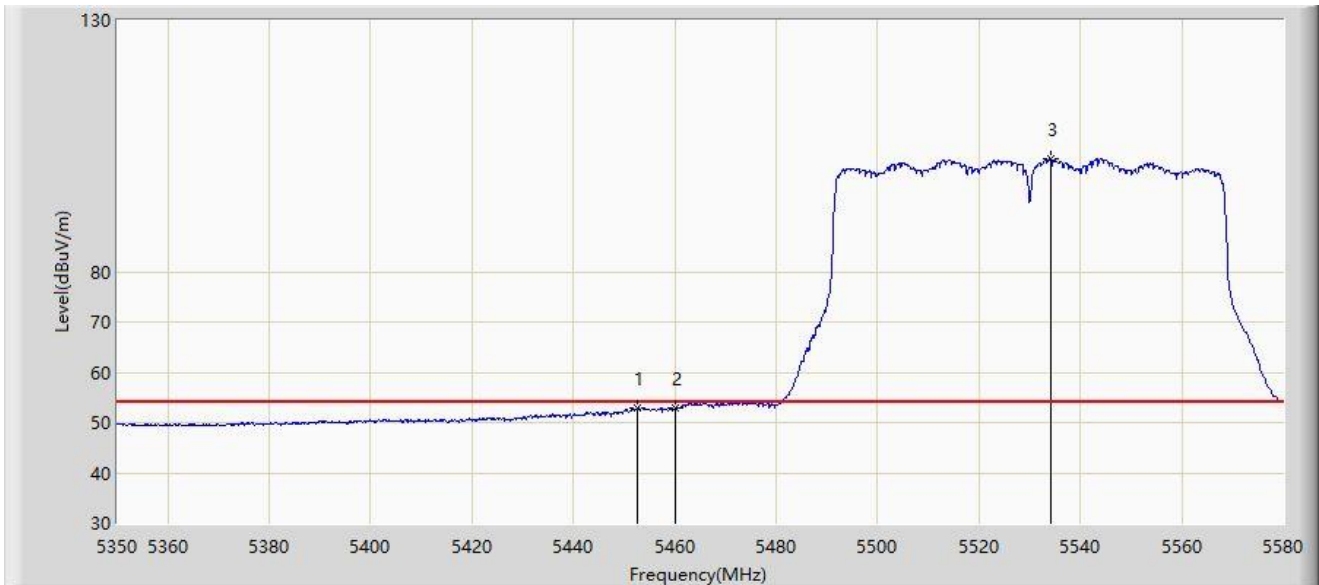


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5452.695	52.869	49.745	-1.131	54.000	3.124	AV
2		5460.000	52.796	49.577	-1.204	54.000	3.219	AV
3		5534.115	102.331	99.006	N/A	N/A	3.325	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-06-18
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: Wi-Fi 6 Outdoor AP	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT80 at 5610MHz	

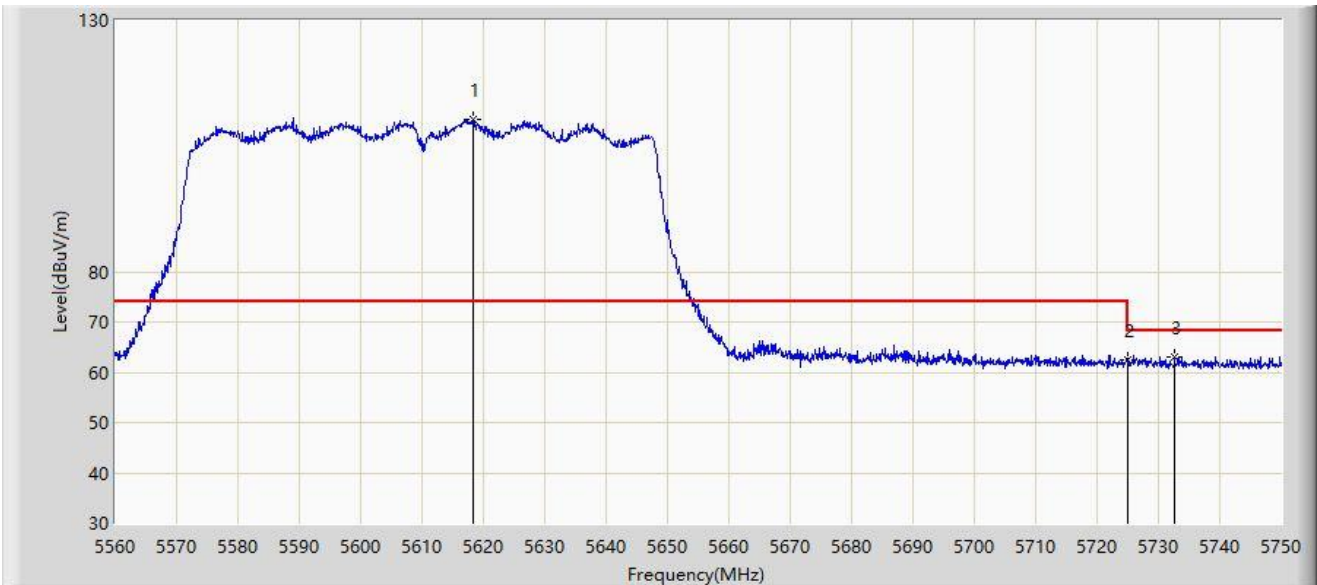


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5618.235	110.418	106.567	N/A	N/A	3.851	PK
2		5725.000	62.532	57.844	-5.668	68.200	4.688	PK
3	*	5732.615	63.091	58.510	-5.109	68.200	4.581	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-06-18
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: Wi-Fi 6 Outdoor AP	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT80 at 5610MHz	

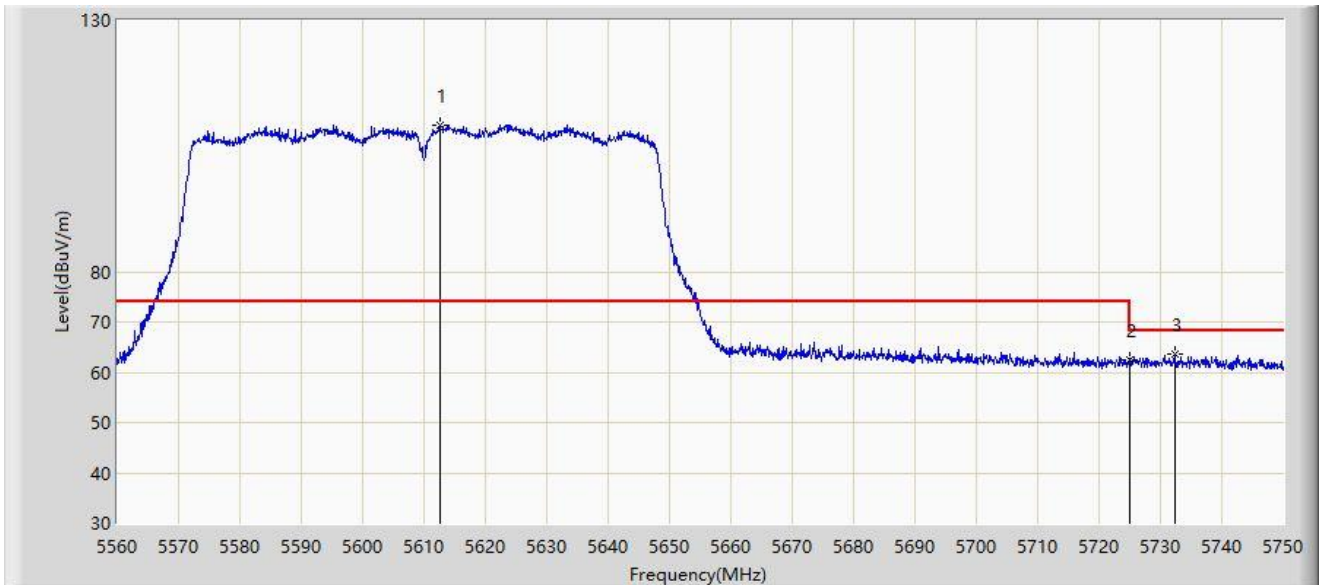


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5612.535	109.102	105.374	N/A	N/A	3.728	PK
2		5725.000	62.366	57.678	-5.834	68.200	4.688	PK
3	*	5732.330	63.697	59.110	-4.503	68.200	4.586	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-06-18
Limit: FCC_5.8G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: Wi-Fi 6 Outdoor AP	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT80 at 5775MHz	

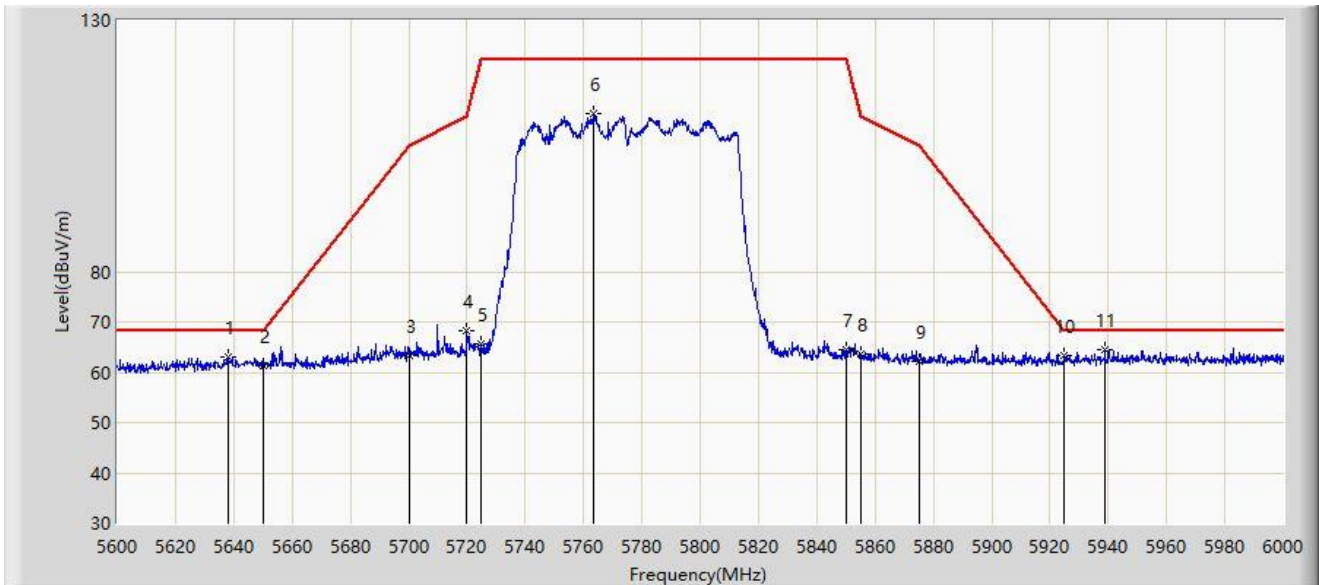


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		5638.000	62.987	58.815	-5.213	68.200	4.173	PK
2		5650.000	61.335	57.175	-6.865	68.200	4.160	PK
3		5700.000	63.442	59.012	-41.758	105.200	4.430	PK
4		5720.000	68.386	63.736	-42.414	110.800	4.649	PK
5		5725.000	65.585	60.897	-56.615	122.200	4.688	PK
6		5763.200	111.345	106.692	N/A	N/A	4.653	PK
7		5850.000	64.369	59.409	-57.831	122.200	4.960	PK
8		5855.000	63.673	58.654	-47.127	110.800	5.019	PK
9		5875.000	62.084	56.948	-43.116	105.200	5.136	PK
10		5925.000	63.338	58.068	-4.862	68.200	5.271	PK
11	*	5938.800	64.587	59.269	-3.613	68.200	5.318	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-06-18
Limit: FCC_5.8G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: Wi-Fi 6 Outdoor AP	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT80 at 5775MHz	

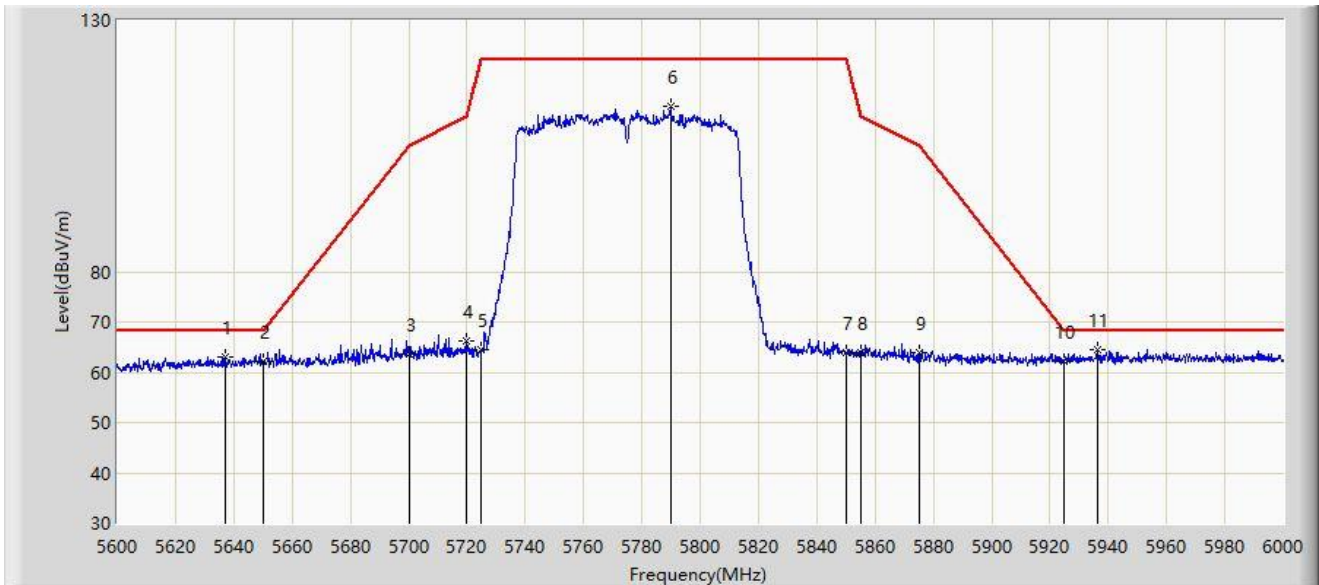


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5637.000	63.126	58.967	-5.074	68.200	4.160	PK
2		5650.000	62.083	57.923	-6.117	68.200	4.160	PK
3		5700.000	63.703	59.273	-41.497	105.200	4.430	PK
4		5720.000	66.297	61.647	-44.503	110.800	4.649	PK
5		5725.000	64.633	59.945	-57.567	122.200	4.688	PK
6		5789.800	112.974	107.961	N/A	N/A	5.014	PK
7		5850.000	63.851	58.891	-58.349	122.200	4.960	PK
8		5855.000	63.917	58.898	-46.883	110.800	5.019	PK
9		5875.000	63.809	58.673	-41.391	105.200	5.136	PK
10		5925.000	62.057	56.787	-6.143	68.200	5.271	PK
11	*	5936.400	64.478	59.165	-3.722	68.200	5.312	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-07-13
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: Wi-Fi 6 Outdoor AP	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at 5180MHz	

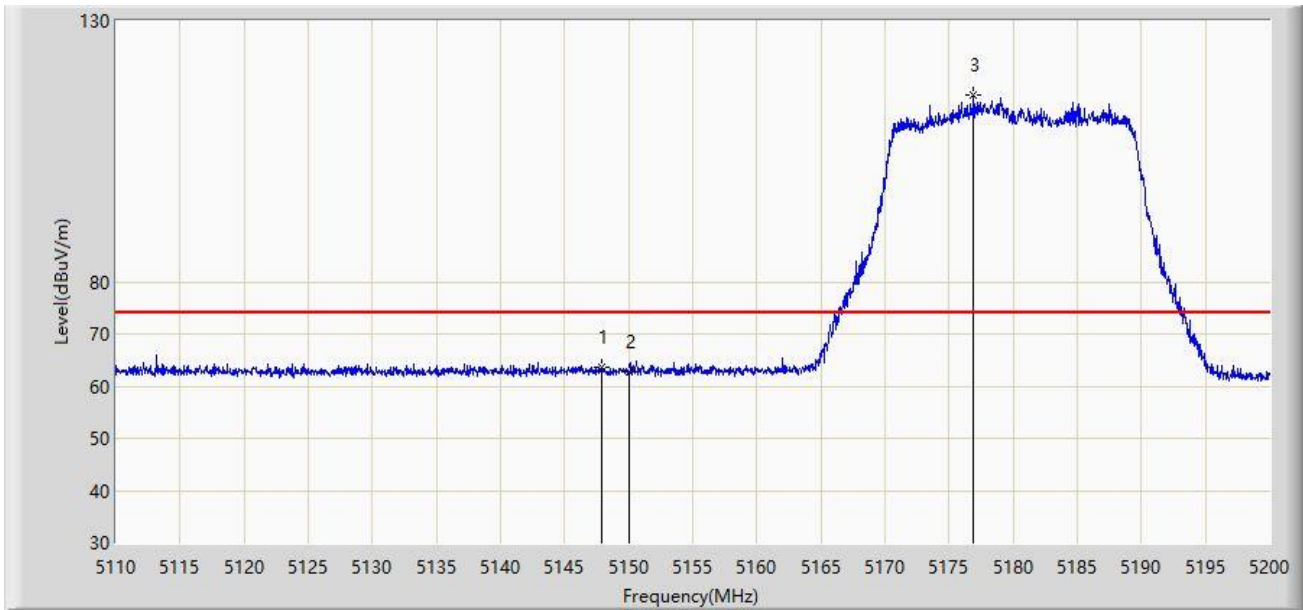


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5147.935	63.567	60.076	-10.433	74.000	3.490	PK
2		5150.000	62.691	59.192	-11.309	74.000	3.499	PK
3		5176.915	115.656	112.283	N/A	N/A	3.373	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-07-13
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: Wi-Fi 6 Outdoor AP	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at 5180MHz	

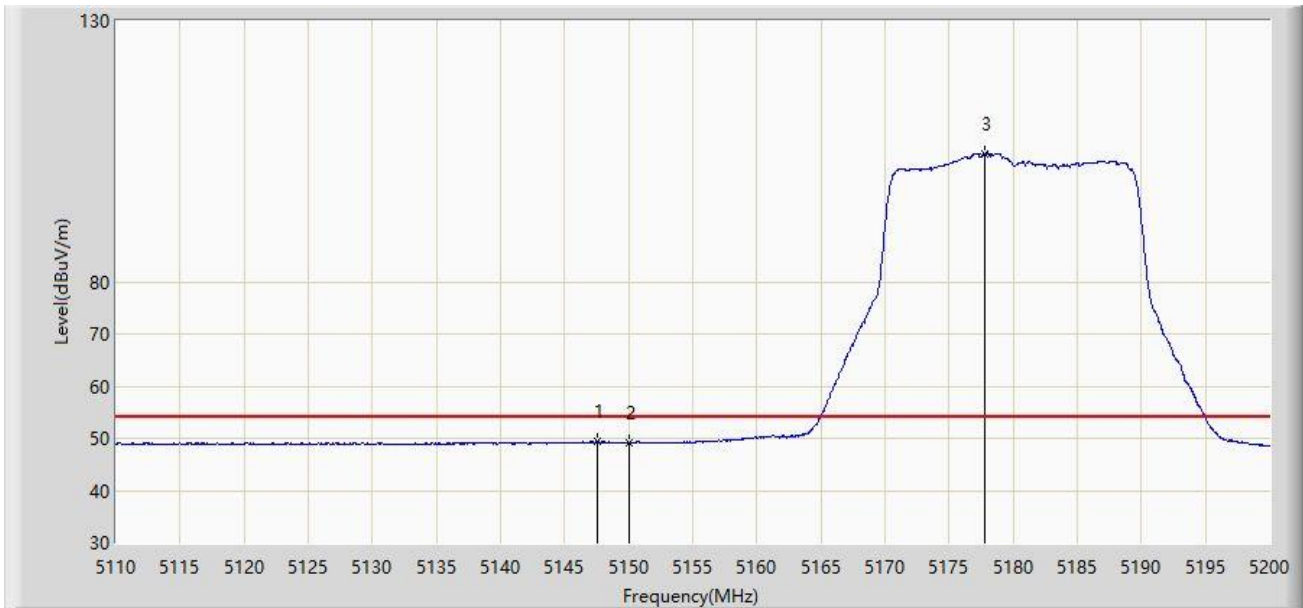


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5147.575	49.362	45.876	-4.638	54.000	3.486	AV
2		5150.000	49.053	45.554	-4.947	54.000	3.499	AV
3		5177.815	104.606	101.250	N/A	N/A	3.356	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-07-13
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: Wi-Fi 6 Outdoor AP	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at 5180MHz	

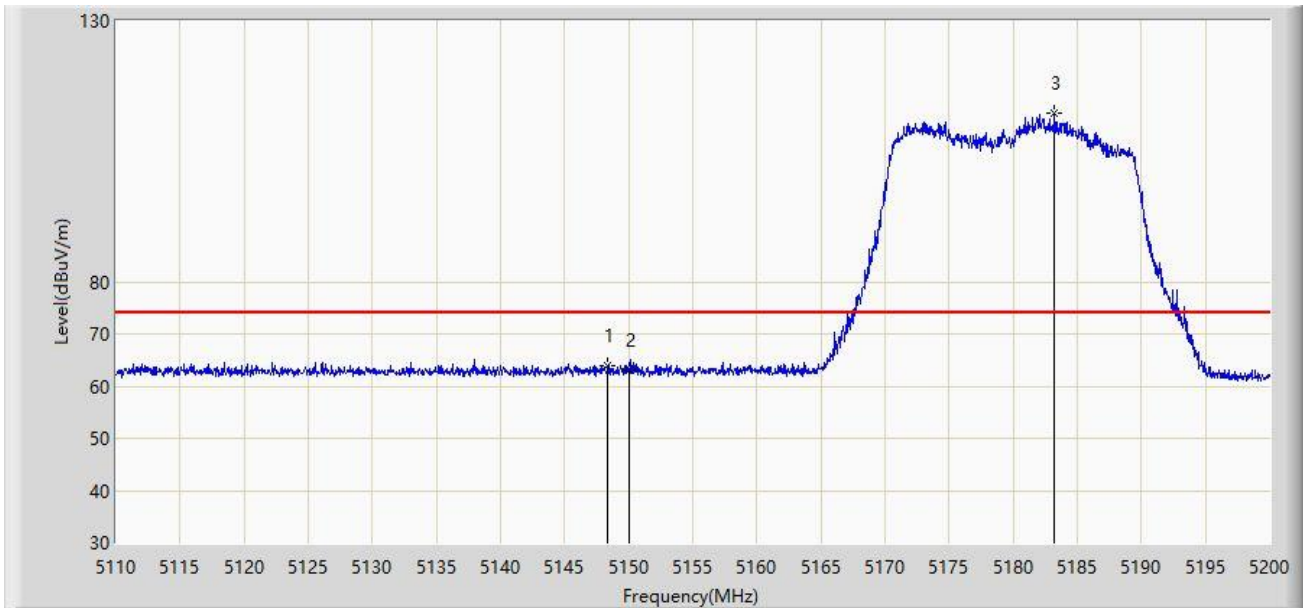


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5148.385	64.007	60.514	-9.993	74.000	3.493	PK
2		5150.000	62.919	59.420	-11.081	74.000	3.499	PK
3		5183.215	112.232	108.983	N/A	N/A	3.249	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-07-13
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: Wi-Fi 6 Outdoor AP	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at 5180MHz	

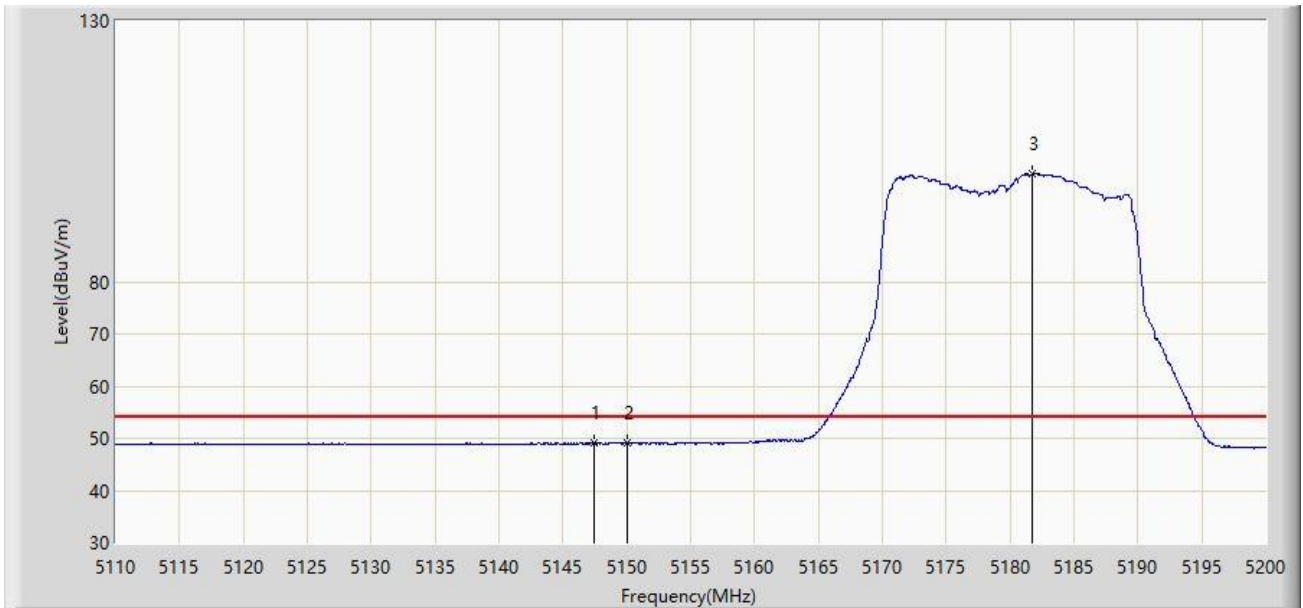


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5147.485	49.100	45.616	-4.900	54.000	3.484	AV
2		5150.000	49.040	45.541	-4.960	54.000	3.499	AV
3		5181.775	100.658	97.378	N/A	N/A	3.281	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-06-21
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: Wi-Fi 6 Outdoor AP	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at 5320MHz	

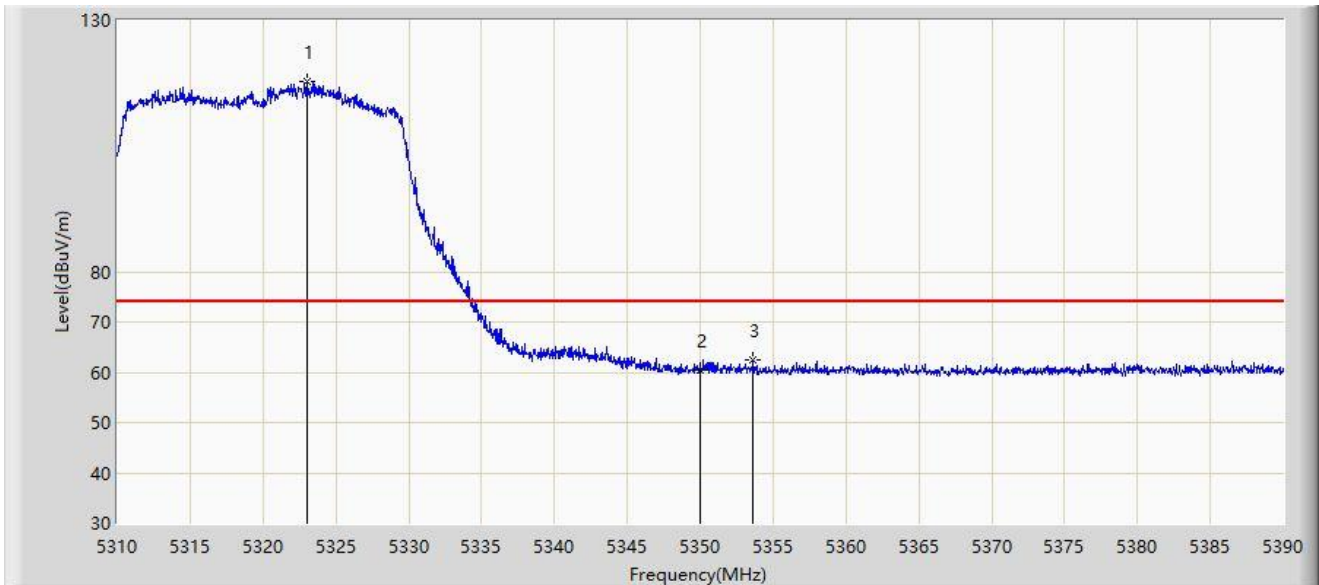


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5323.080	117.739	114.716	N/A	N/A	3.023	PK
2		5350.000	60.399	57.568	-13.601	74.000	2.832	PK
3	*	5353.600	62.520	59.715	-11.480	74.000	2.806	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-06-21
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: Wi-Fi 6 Outdoor AP	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at 5320MHz	

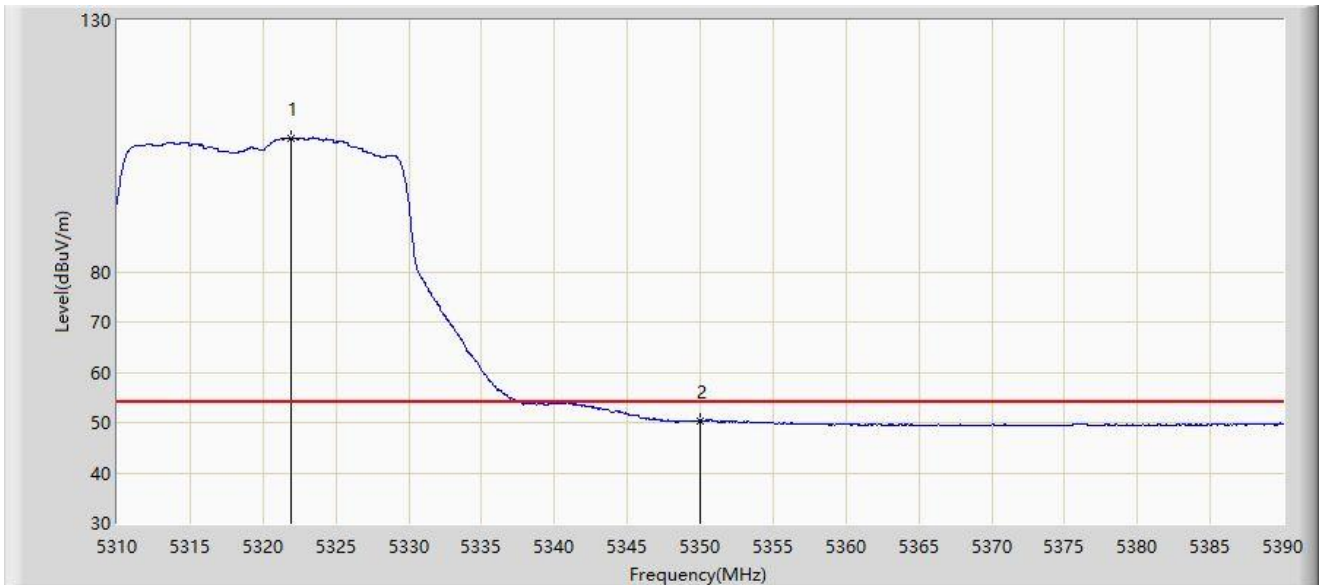


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5321.920	106.614	103.589	N/A	N/A	3.025	AV
2	*	5350.000	50.424	47.593	-3.576	54.000	2.832	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-06-21
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: Wi-Fi 6 Outdoor AP	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at 5320MHz	

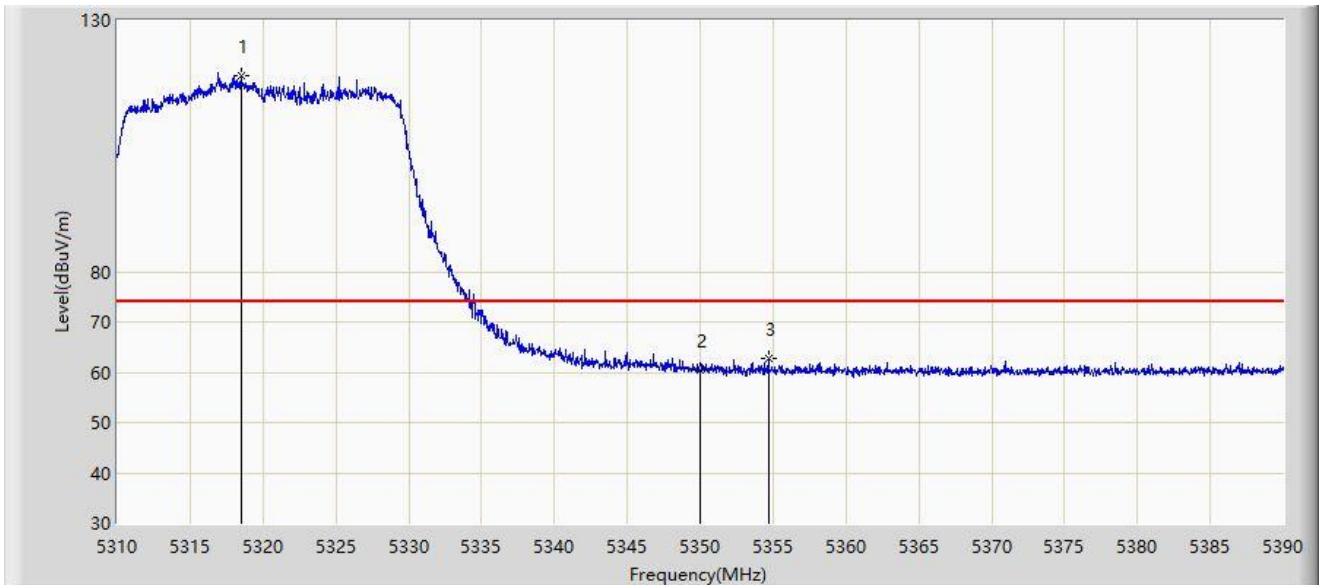


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5318.520	119.097	116.065	N/A	N/A	3.033	PK
2		5350.000	60.437	57.606	-13.563	74.000	2.832	PK
3	*	5354.680	62.857	60.047	-11.143	74.000	2.810	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-06-21
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: Wi-Fi 6 Outdoor AP	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at 5320MHz	

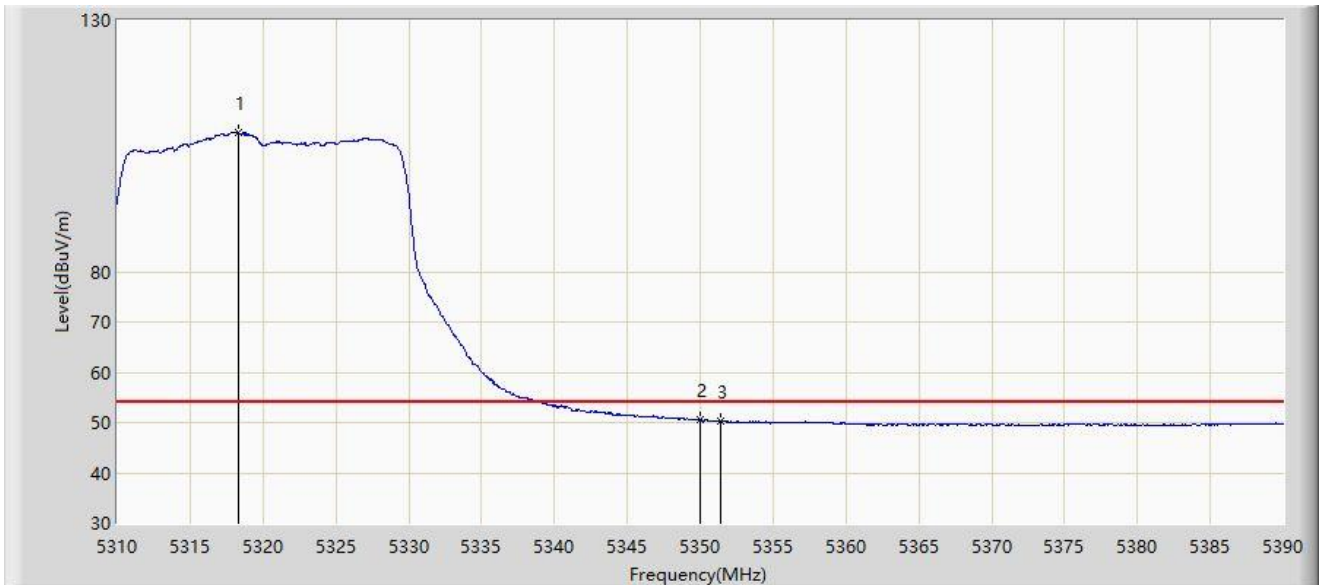


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5318.280	107.690	104.657	N/A	N/A	3.033	AV
2	*	5350.000	50.436	47.605	-3.564	54.000	2.832	AV
3		5351.400	50.434	47.627	-3.566	54.000	2.807	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-06-21
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: Wi-Fi 6 Outdoor AP	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at 5500MHz	

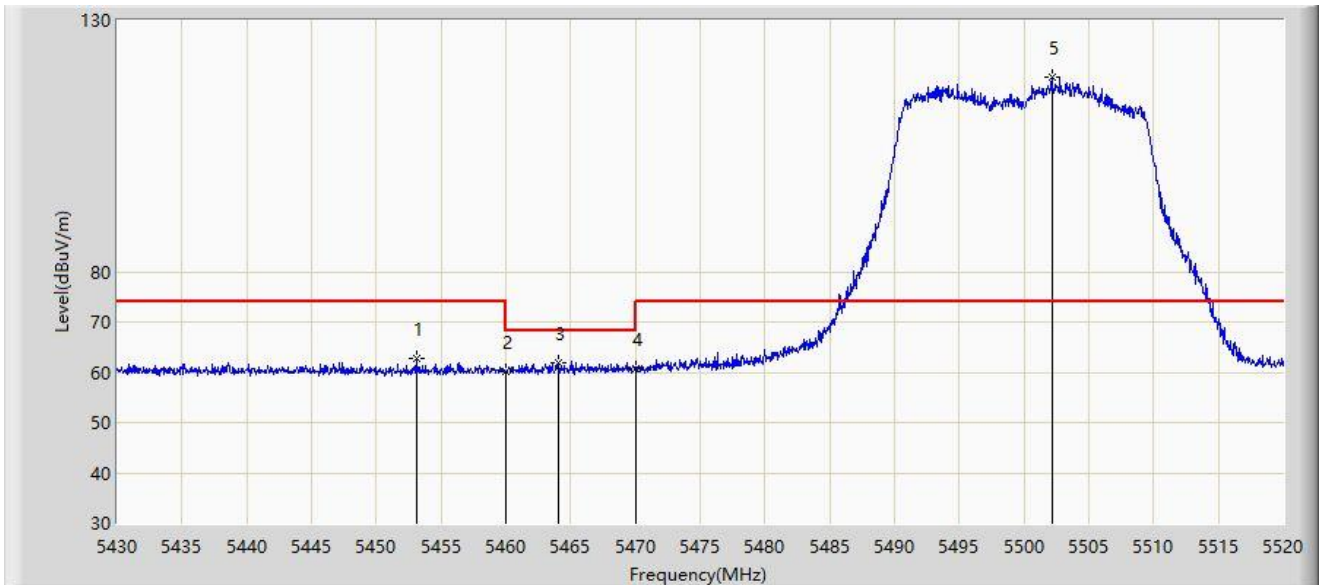


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5453.085	62.684	59.563	-11.316	74.000	3.121	PK
2		5460.000	60.134	56.915	-13.866	74.000	3.219	PK
3	*	5464.110	61.835	58.537	-6.365	68.200	3.298	PK
4		5470.000	60.693	57.281	-7.507	68.200	3.411	PK
5		5502.180	118.613	115.373	N/A	N/A	3.241	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-06-21
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: Wi-Fi 6 Outdoor AP	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at 5500MHz	

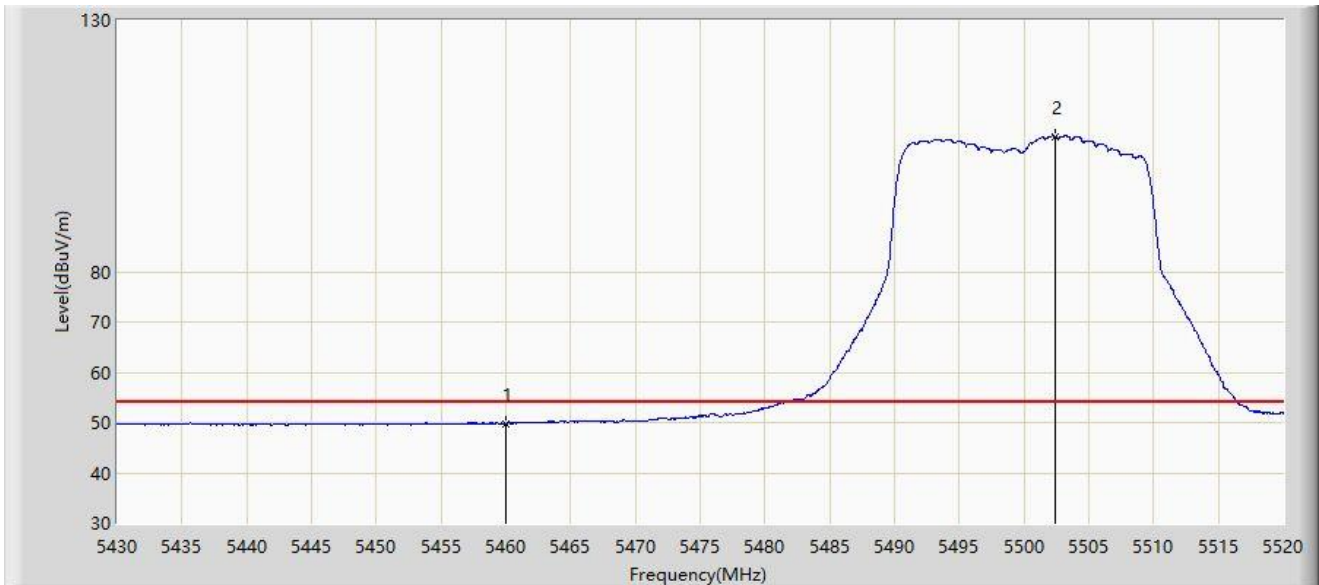


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5460.000	49.792	46.573	-4.208	54.000	3.219	AV
2		5502.450	106.916	103.678	N/A	N/A	3.239	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-06-21
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: Wi-Fi 6 Outdoor AP	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at 5500MHz	

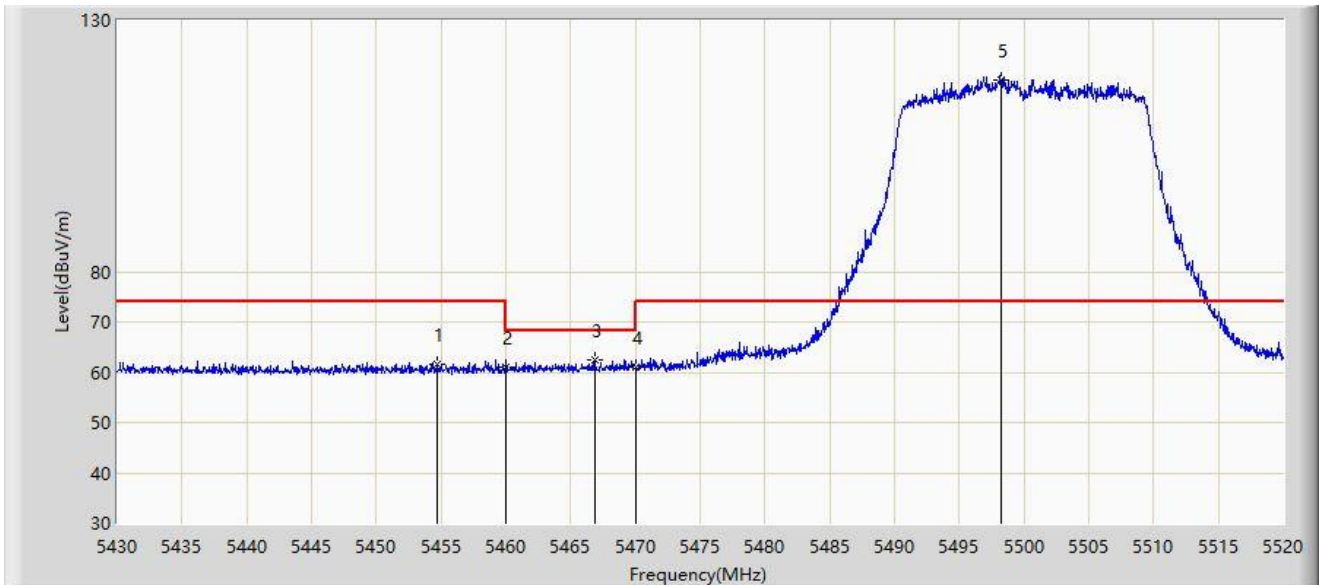


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5454.750	61.726	58.600	-12.274	74.000	3.126	PK
2		5460.000	61.033	57.814	-12.967	74.000	3.219	PK
3	*	5466.855	62.558	59.207	-5.642	68.200	3.351	PK
4		5470.000	61.013	57.601	-7.187	68.200	3.411	PK
5		5498.265	118.237	114.969	N/A	N/A	3.267	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-06-21
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: Wi-Fi 6 Outdoor AP	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at 5500MHz	

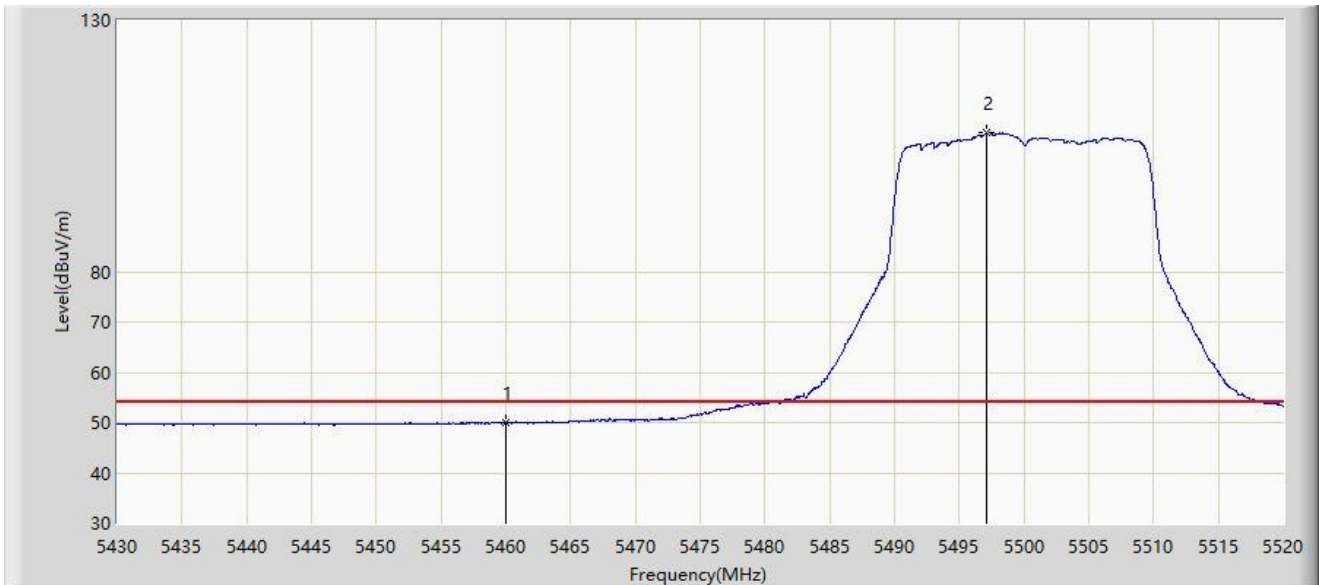


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5460.000	49.932	46.713	-4.068	54.000	3.219	AV
2		5497.095	107.543	104.267	N/A	N/A	3.276	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-06-18
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: Wi-Fi 6 Outdoor AP	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at 5700MHz	

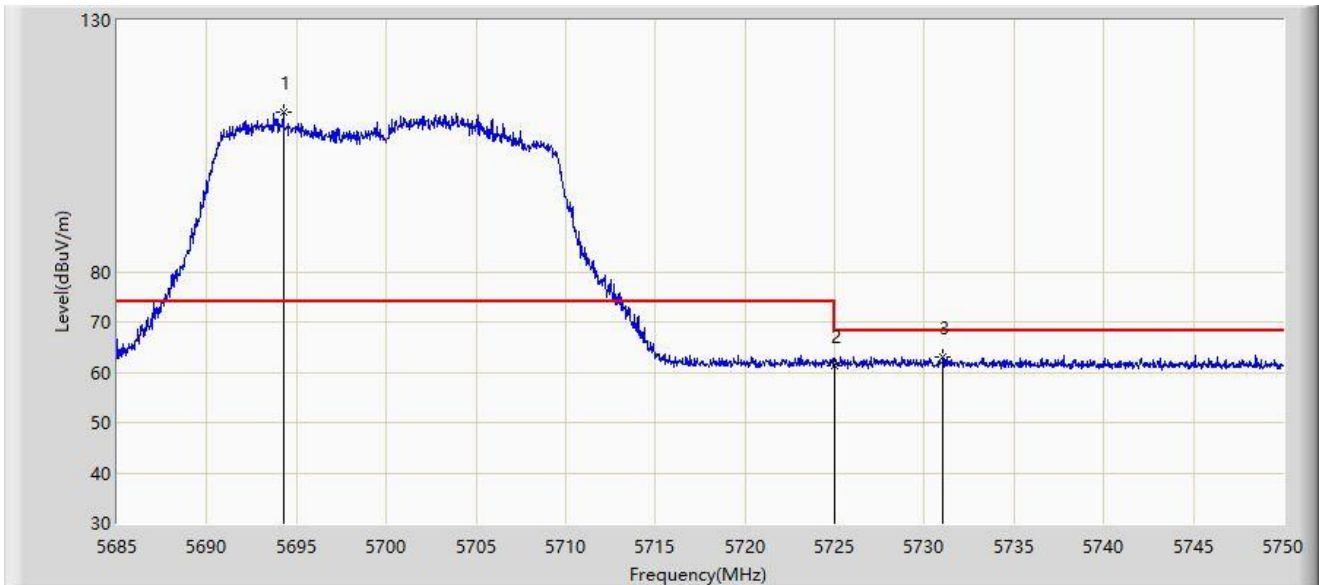


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5694.263	111.622	107.276	N/A	N/A	4.346	PK
2		5725.000	61.432	56.744	-6.768	68.200	4.688	PK
3	*	5731.020	63.054	58.444	-5.146	68.200	4.610	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-06-18
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: Wi-Fi 6 Outdoor AP	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at 5700MHz	

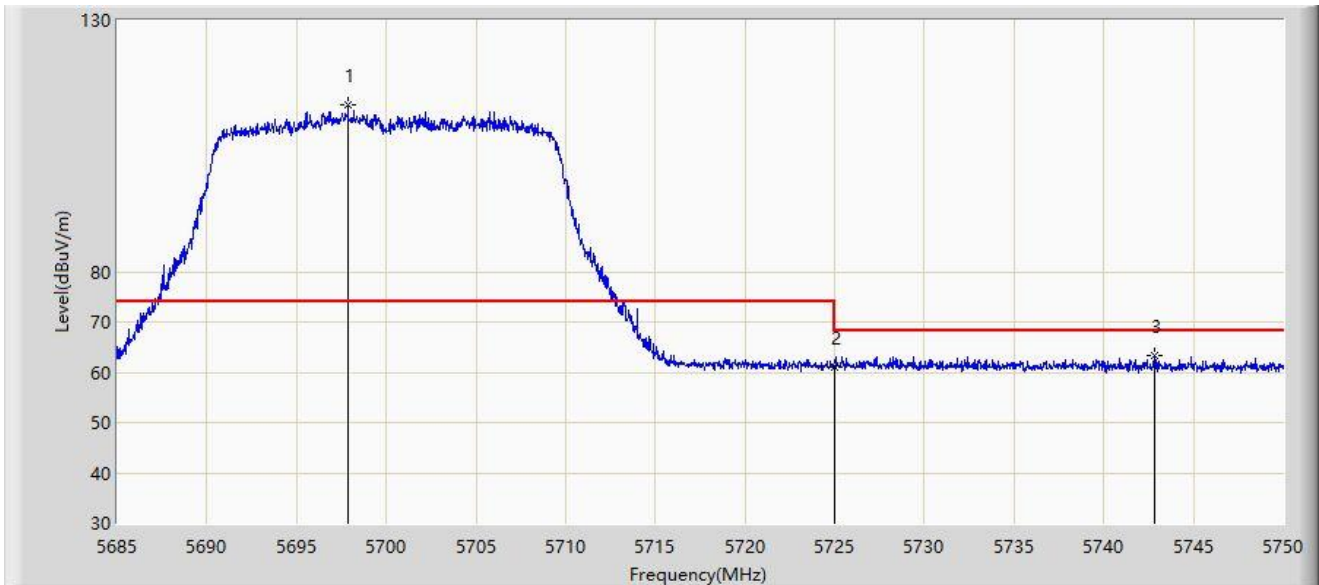


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5697.870	113.157	108.758	N/A	N/A	4.398	PK
2		5725.000	61.013	56.325	-7.187	68.200	4.688	PK
3	*	5742.817	63.288	58.890	-4.912	68.200	4.398	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-06-18
Limit: FCC_5.8G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: Wi-Fi 6 Outdoor AP	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at 5745MHz	

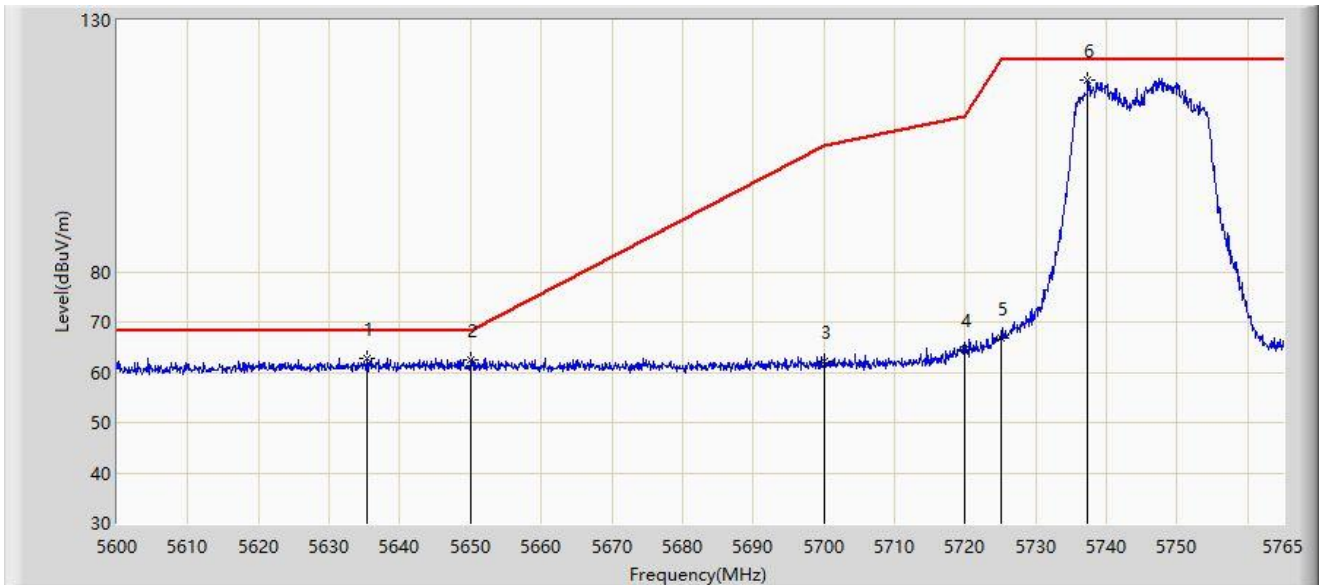


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5635.310	62.864	58.725	-5.336	68.200	4.139	PK
2		5650.000	62.366	58.206	-5.834	68.200	4.160	PK
3		5700.000	62.049	57.619	-43.151	105.200	4.430	PK
4		5720.000	64.360	59.710	-46.440	110.800	4.649	PK
5		5725.000	66.913	62.225	-55.287	122.200	4.688	PK
6		5737.362	118.021	113.525	N/A	N/A	4.496	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-06-18
Limit: FCC_5.8G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: Wi-Fi 6 Outdoor AP	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at 5745MHz	

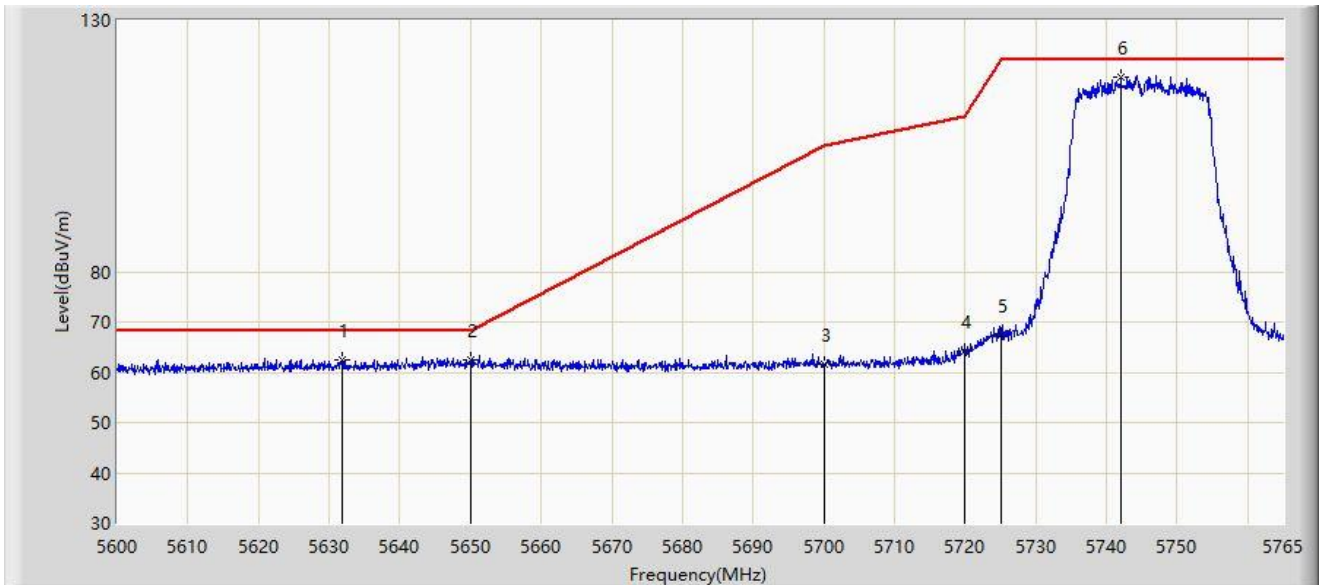


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5631.845	62.516	58.418	-5.684	68.200	4.098	PK
2		5650.000	62.385	58.225	-5.815	68.200	4.160	PK
3		5700.000	61.567	57.137	-43.633	105.200	4.430	PK
4		5720.000	64.059	59.409	-46.741	110.800	4.649	PK
5		5725.000	67.324	62.636	-54.876	122.200	4.688	PK
6		5742.065	118.750	114.338	N/A	N/A	4.412	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-06-18
Limit: FCC_5.8G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: Wi-Fi 6 Outdoor AP	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at 5825MHz	

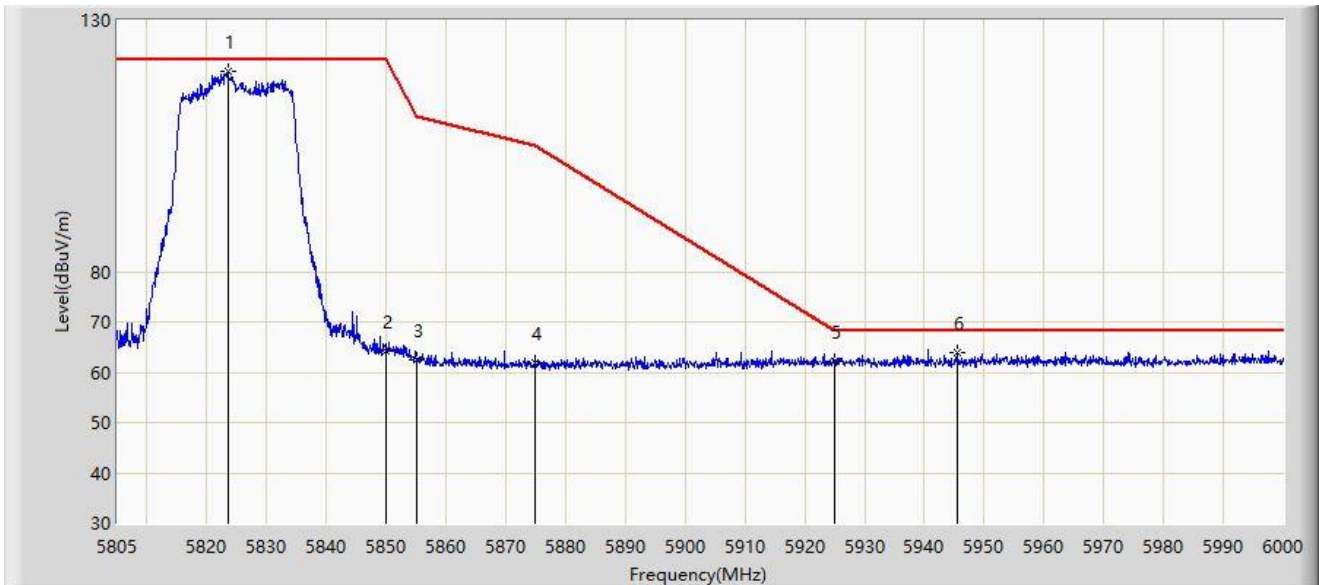


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5823.525	119.971	115.108	N/A	N/A	4.863	PK
2		5850.000	64.222	59.262	-57.978	122.200	4.960	PK
3		5855.000	62.520	57.501	-48.280	110.800	5.019	PK
4		5875.000	61.926	56.790	-43.274	105.200	5.136	PK
5		5925.000	62.311	57.041	-5.889	68.200	5.271	PK
6	*	5945.400	63.877	58.517	-4.323	68.200	5.360	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-06-18
Limit: FCC_5.8G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: Wi-Fi 6 Outdoor AP	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at 5825MHz	

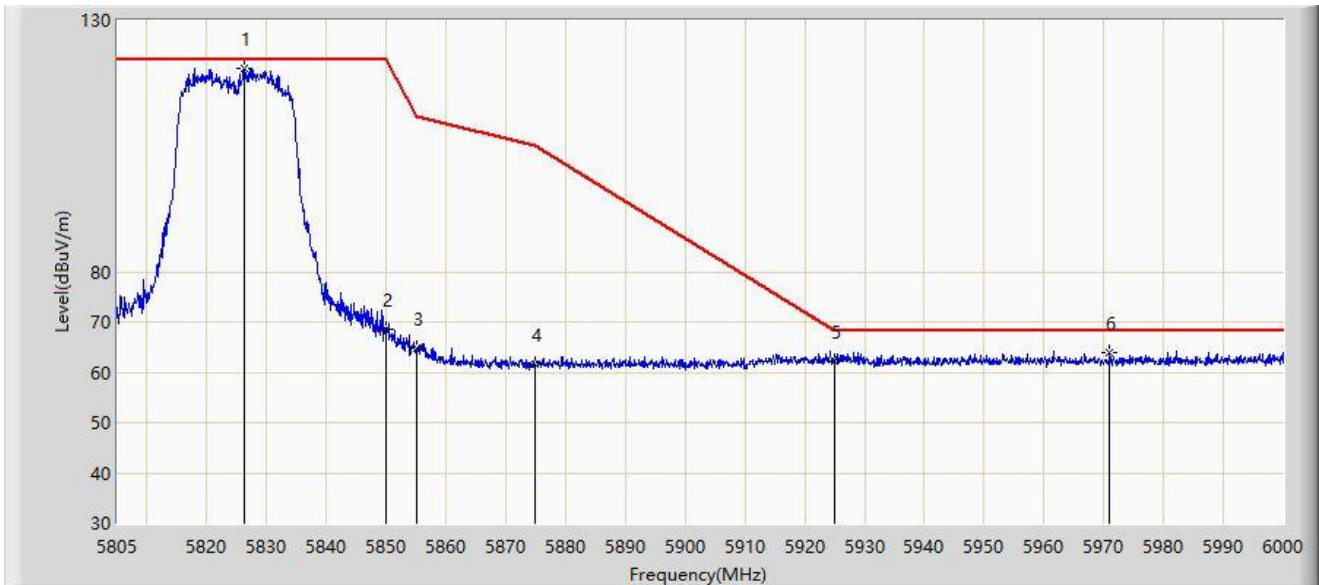


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5826.158	120.414	115.582	N/A	N/A	4.832	PK
2		5850.000	68.577	63.617	-53.623	122.200	4.960	PK
3		5855.000	64.775	59.756	-46.025	110.800	5.019	PK
4		5875.000	61.515	56.379	-43.685	105.200	5.136	PK
5		5925.000	62.055	56.785	-6.145	68.200	5.271	PK
6	*	5970.945	63.779	58.463	-4.421	68.200	5.316	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-07-13
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: Wi-Fi 6 Outdoor AP	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at 5190MHz	

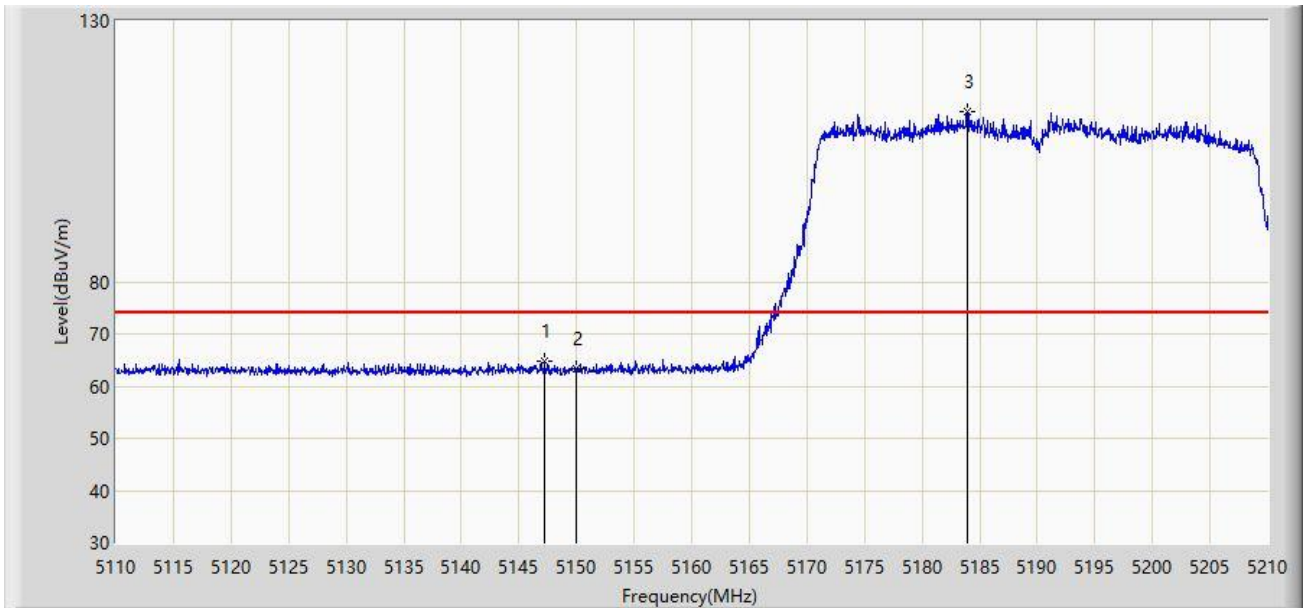


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5147.250	64.699	61.218	-9.301	74.000	3.481	PK
2		5150.000	63.404	59.905	-10.596	74.000	3.499	PK
3		5183.950	112.548	109.315	N/A	N/A	3.232	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-07-13
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: Wi-Fi 6 Outdoor AP	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at 5190MHz	

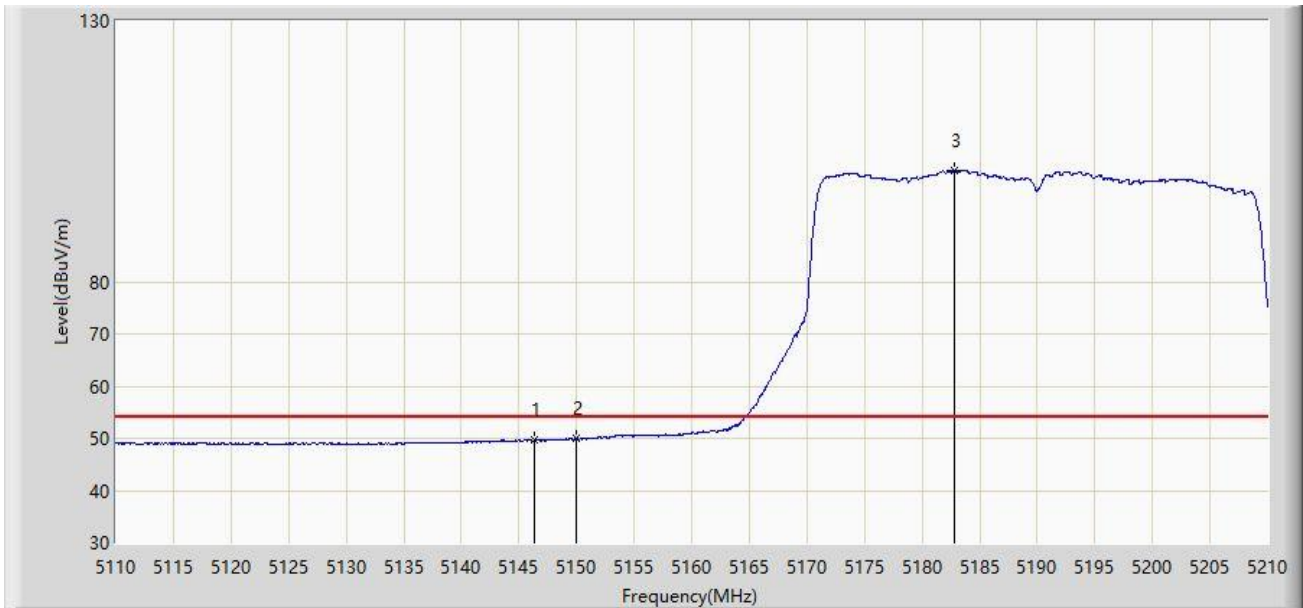


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5146.400	49.718	46.249	-4.282	54.000	3.469	AV
2	*	5150.000	49.917	46.418	-4.083	54.000	3.499	AV
3		5182.750	101.275	98.016	N/A	N/A	3.259	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-07-13
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: Wi-Fi 6 Outdoor AP	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at 5190MHz	

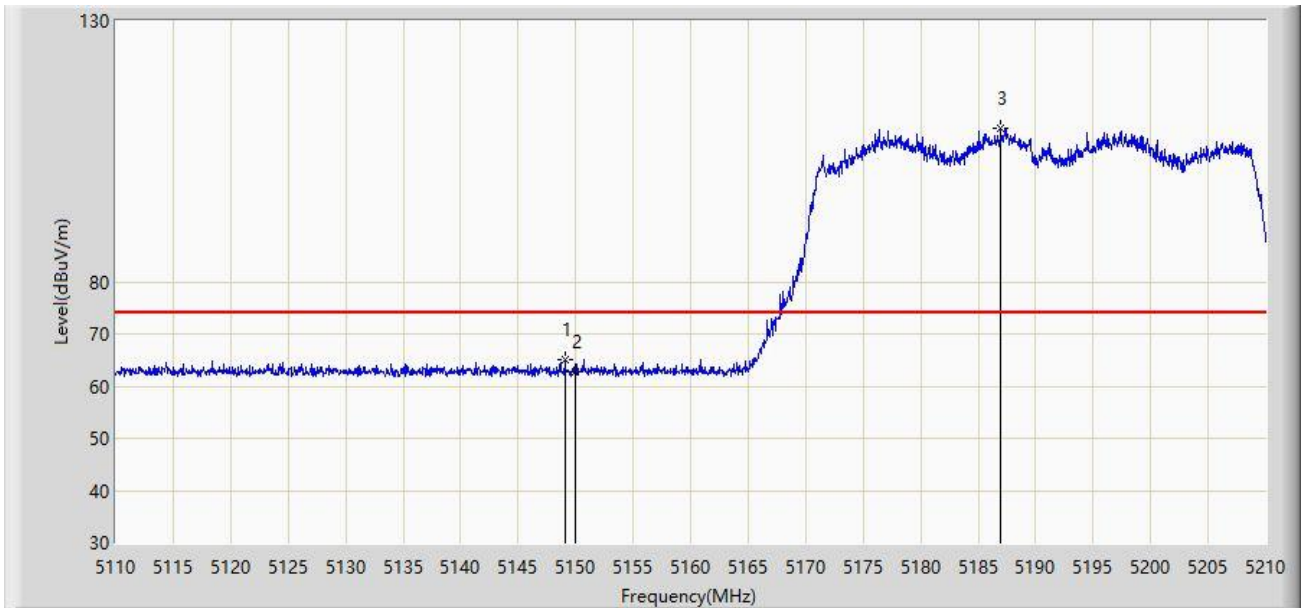


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5149.100	64.935	61.439	-9.065	74.000	3.495	PK
2		5150.000	62.744	59.245	-11.256	74.000	3.499	PK
3		5187.000	109.491	106.326	N/A	N/A	3.165	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-07-13
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: Wi-Fi 6 Outdoor AP	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at 5190MHz	

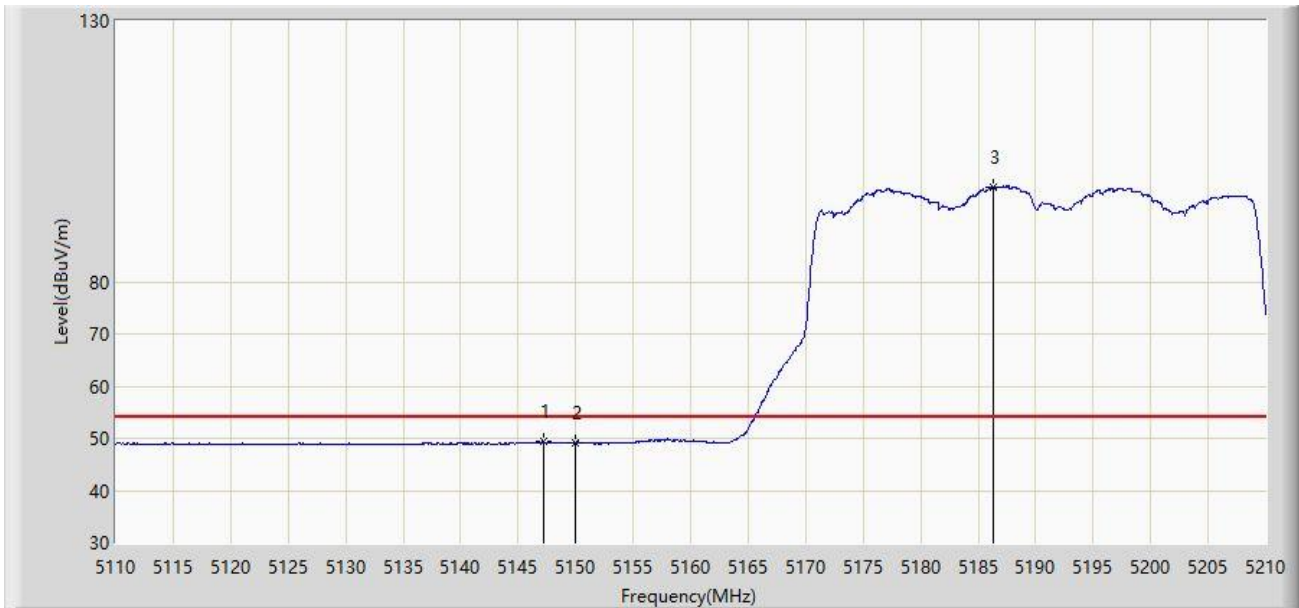


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5147.200	49.399	45.919	-4.601	54.000	3.480	AV
2		5150.000	49.041	45.542	-4.959	54.000	3.499	AV
3		5186.350	98.176	94.997	N/A	N/A	3.180	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-06-18
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: Wi-Fi 6 Outdoor AP	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at 5310MHz	

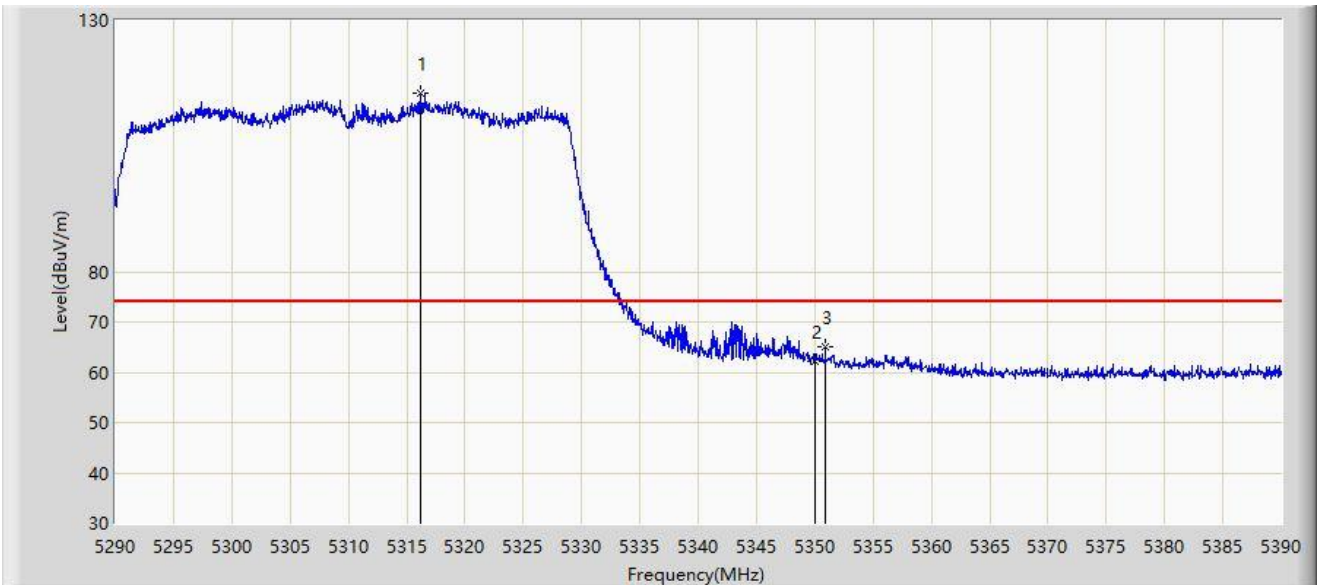


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5316.250	115.578	112.575	N/A	N/A	3.003	PK
2		5350.000	62.305	59.474	-11.695	74.000	2.832	PK
3	*	5350.900	65.197	62.381	-8.803	74.000	2.816	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-06-18
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: Wi-Fi 6 Outdoor AP	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at 5310MHz	

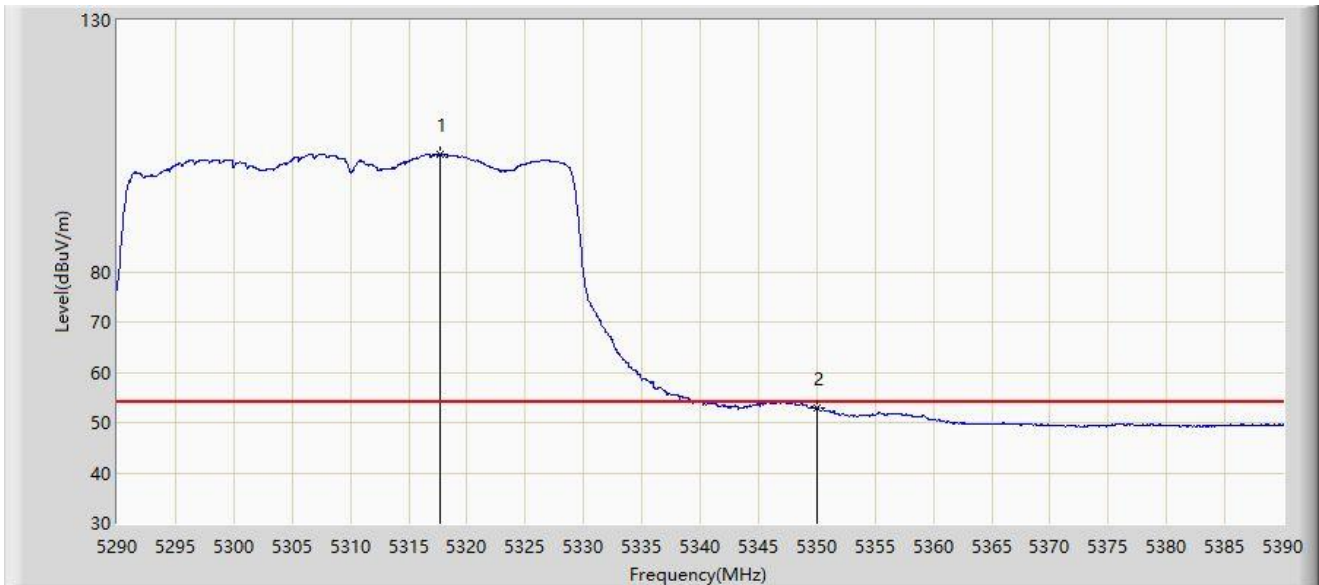


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5317.650	103.219	100.192	N/A	N/A	3.028	AV
2	*	5350.000	52.881	50.050	-1.119	54.000	2.832	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-06-18
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: Wi-Fi 6 Outdoor AP	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at 5310MHz	

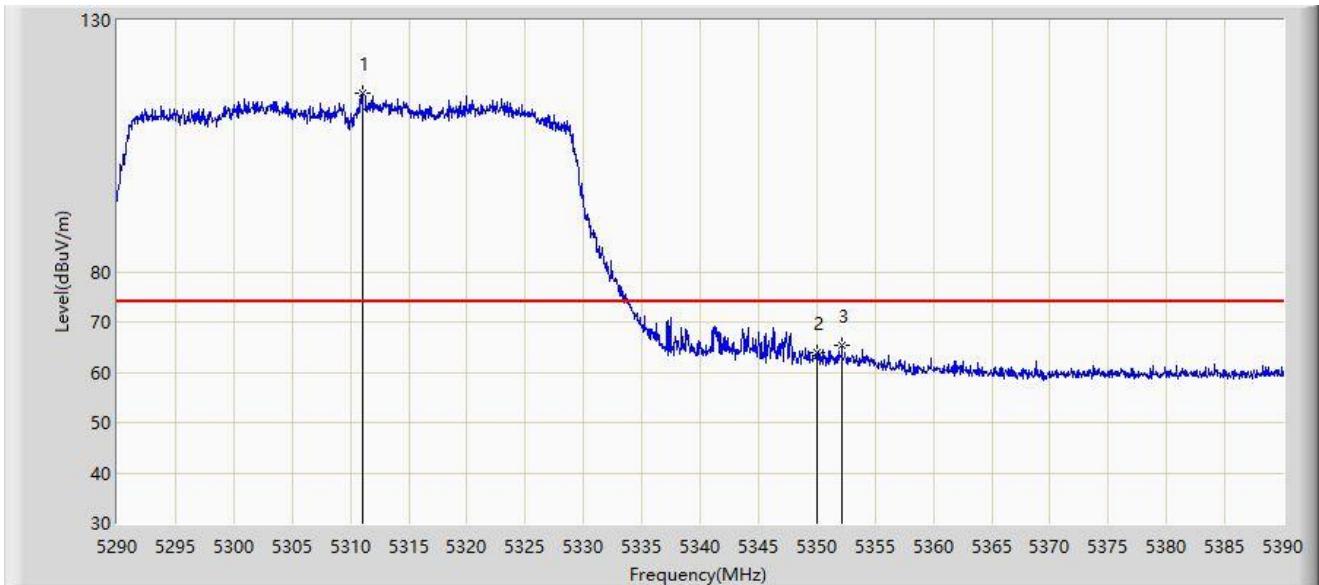


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5311.000	115.397	112.479	N/A	N/A	2.918	PK
2		5350.000	63.967	61.136	-10.033	74.000	2.832	PK
3	*	5352.150	65.292	62.494	-8.708	74.000	2.798	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-06-18
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: Wi-Fi 6 Outdoor AP	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at 5310MHz	

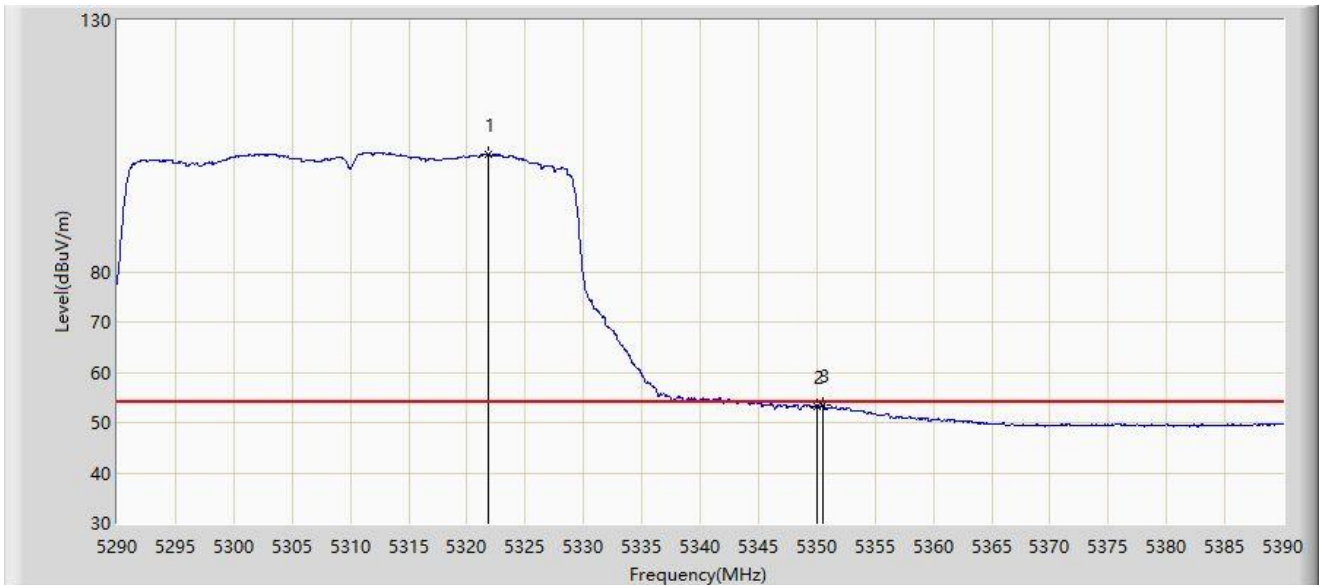


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5321.850	103.198	100.172	N/A	N/A	3.025	AV
2		5350.000	53.253	50.422	-0.747	54.000	2.832	AV
3	*	5350.500	53.446	50.623	-0.554	54.000	2.823	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-06-21
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: Wi-Fi 6 Outdoor AP	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at 5510MHz	

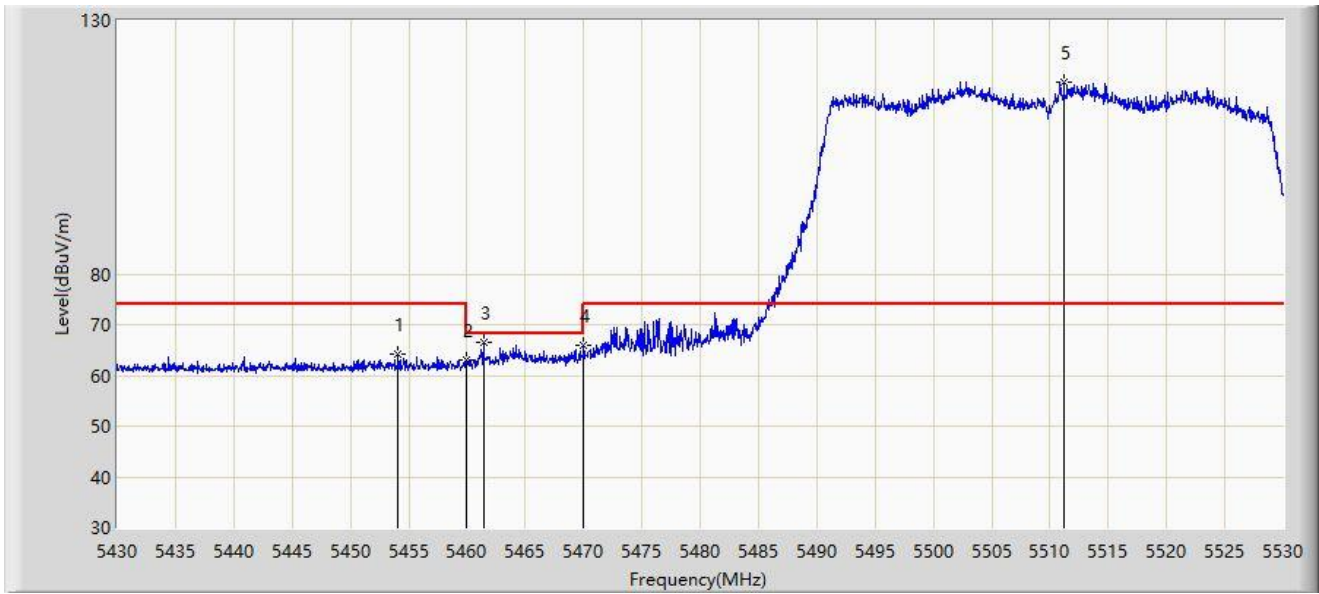


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5454.100	64.083	60.967	-9.917	74.000	3.116	PK
2		5460.000	63.078	59.859	-10.922	74.000	3.219	PK
3	*	5461.400	66.639	63.393	-1.561	68.200	3.246	PK
4		5470.000	65.882	62.470	-2.318	68.200	3.411	PK
5		5511.200	117.854	114.695	N/A	N/A	3.159	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-06-21
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: Wi-Fi 6 Outdoor AP	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at 5510MHz	

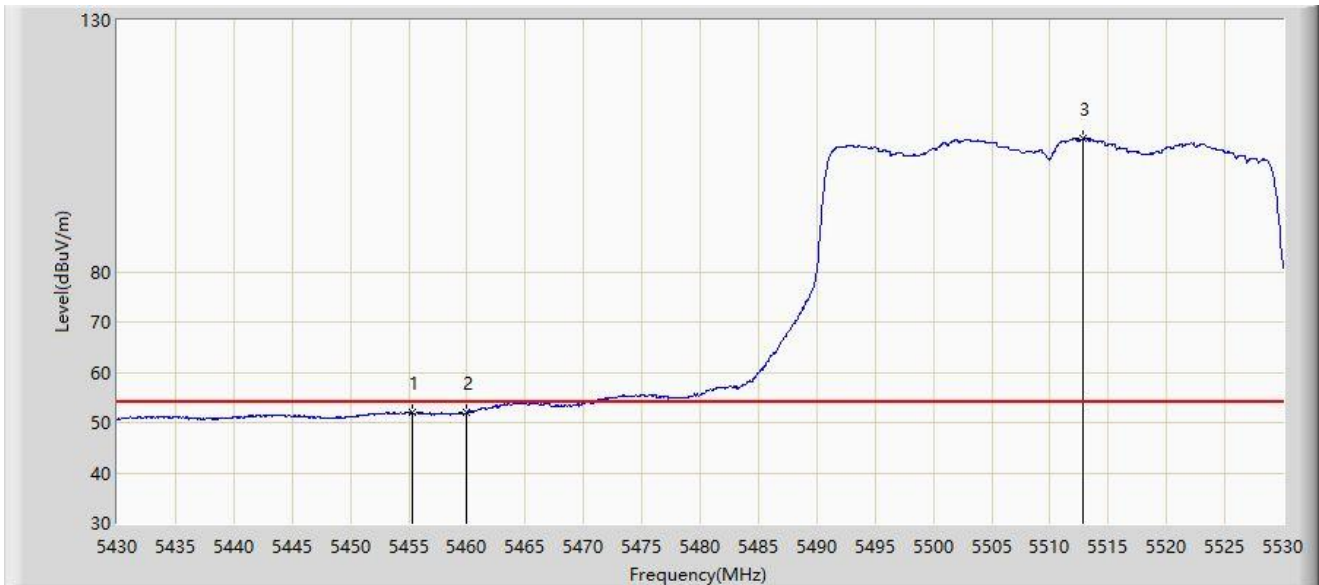


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5455.300	51.912	48.777	-2.088	54.000	3.135	AV
2	*	5460.000	51.989	48.770	-2.011	54.000	3.219	AV
3		5512.850	106.383	103.232	N/A	N/A	3.151	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-06-21
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: Wi-Fi 6 Outdoor AP	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at 5510MHz	

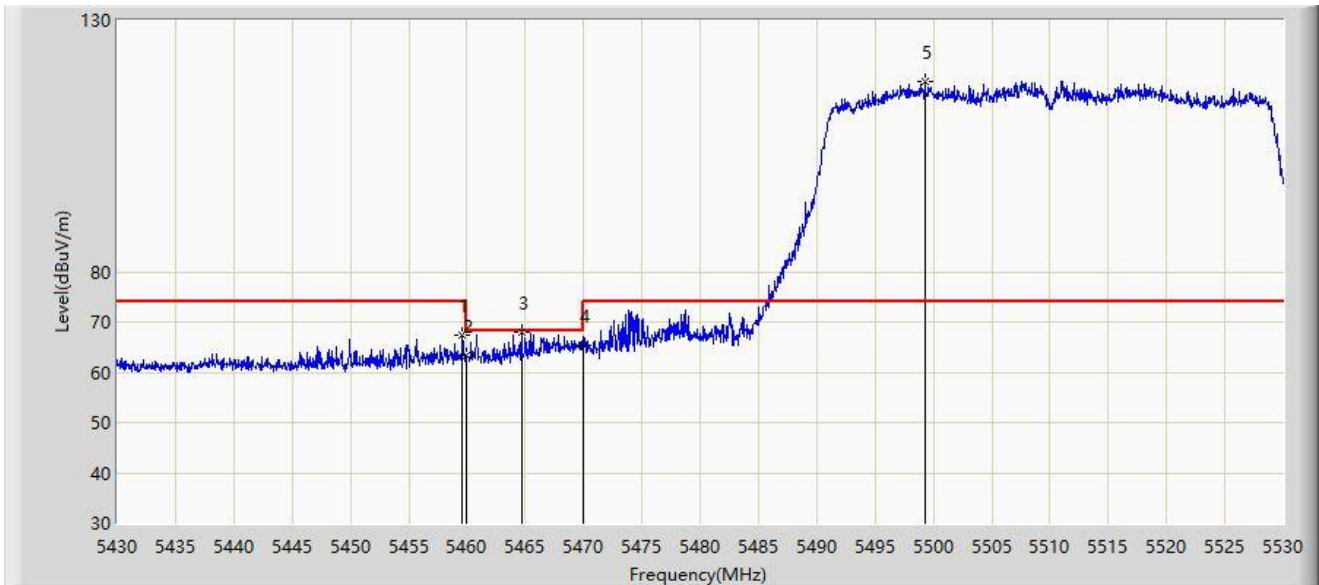


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5459.600	67.309	64.098	-6.691	74.000	3.211	PK
2		5460.000	63.446	60.227	-10.554	74.000	3.219	PK
3	*	5464.650	68.006	64.697	-0.194	68.200	3.309	PK
4		5470.000	65.461	62.049	-2.739	68.200	3.411	PK
5		5499.250	117.777	114.516	N/A	N/A	3.261	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-06-21
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: Wi-Fi 6 Outdoor AP	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at 5510MHz	

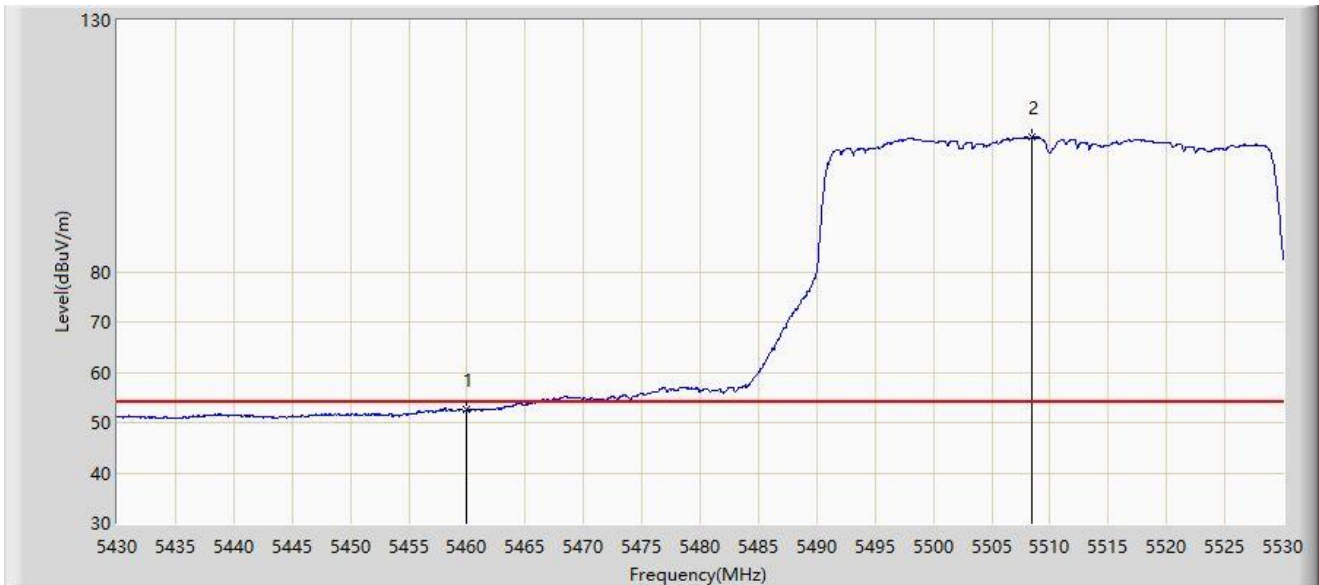


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5460.000	52.504	49.285	-1.496	54.000	3.219	AV
2		5508.500	106.675	103.491	N/A	N/A	3.185	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-06-18
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: Wi-Fi 6 Outdoor AP	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at 5670MHz	

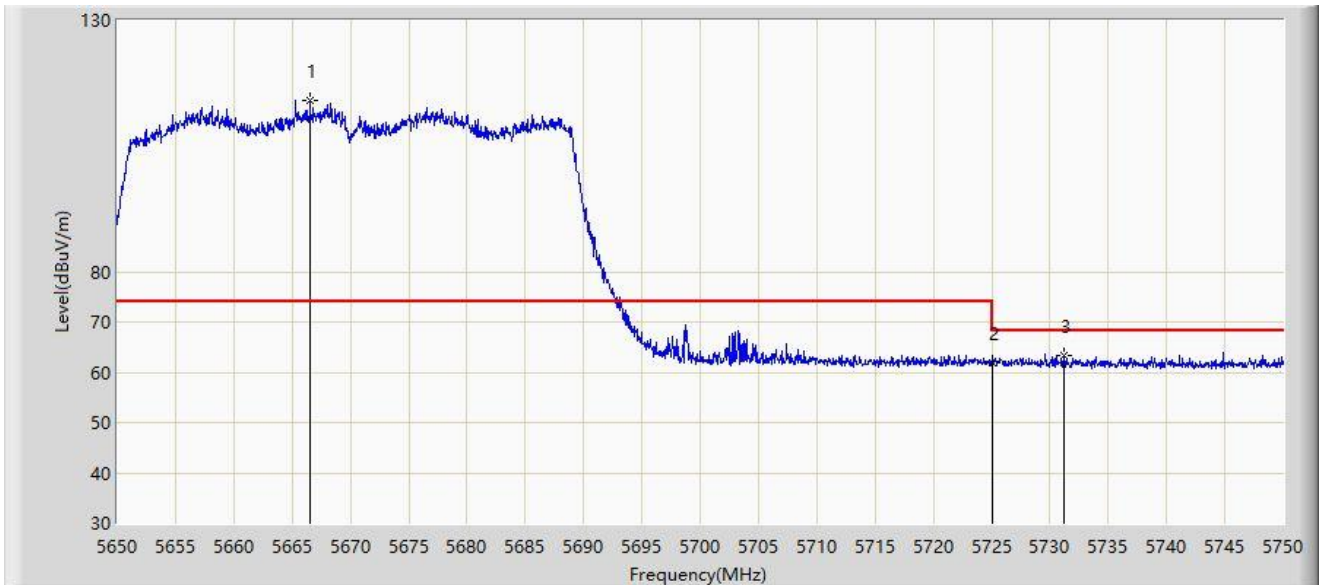


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5666.550	114.039	109.983	N/A	N/A	4.056	PK
2		5725.000	61.927	57.239	-6.273	68.200	4.688	PK
3	*	5731.250	63.425	58.819	-4.775	68.200	4.606	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-06-18
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: Wi-Fi 6 Outdoor AP	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at 5670MHz	

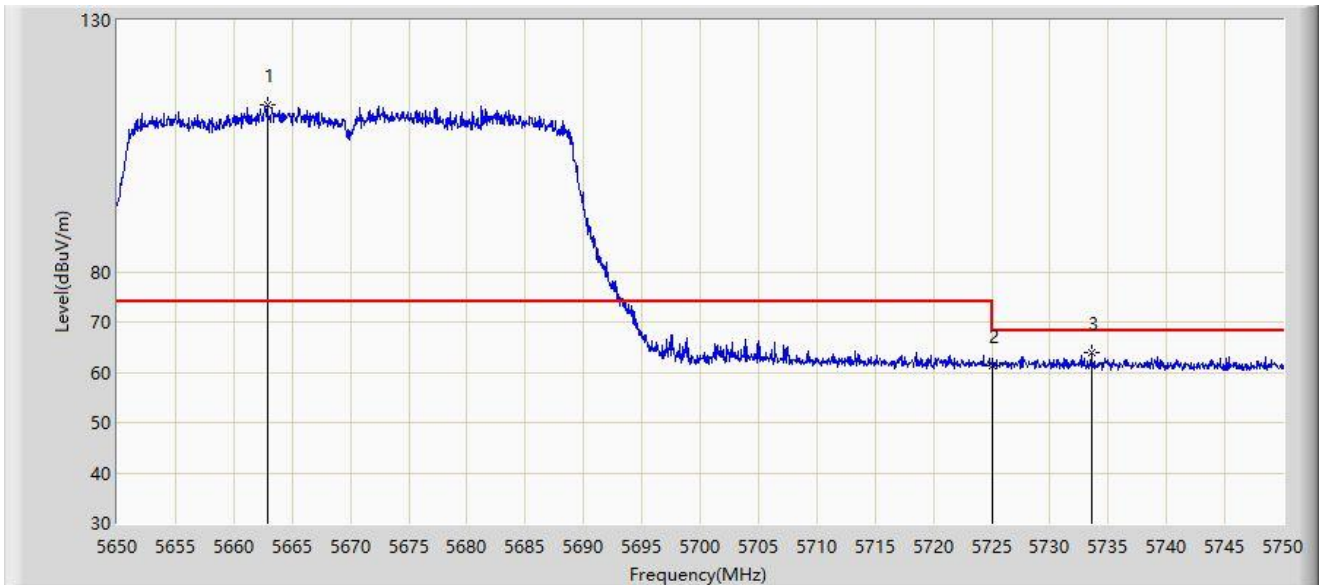


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5662.850	113.327	109.256	N/A	N/A	4.070	PK
2		5725.000	61.173	56.485	-7.027	68.200	4.688	PK
3	*	5733.550	63.891	59.326	-4.309	68.200	4.564	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-06-18
Limit: FCC_5.8G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: Wi-Fi 6 Outdoor AP	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at 5755MHz	

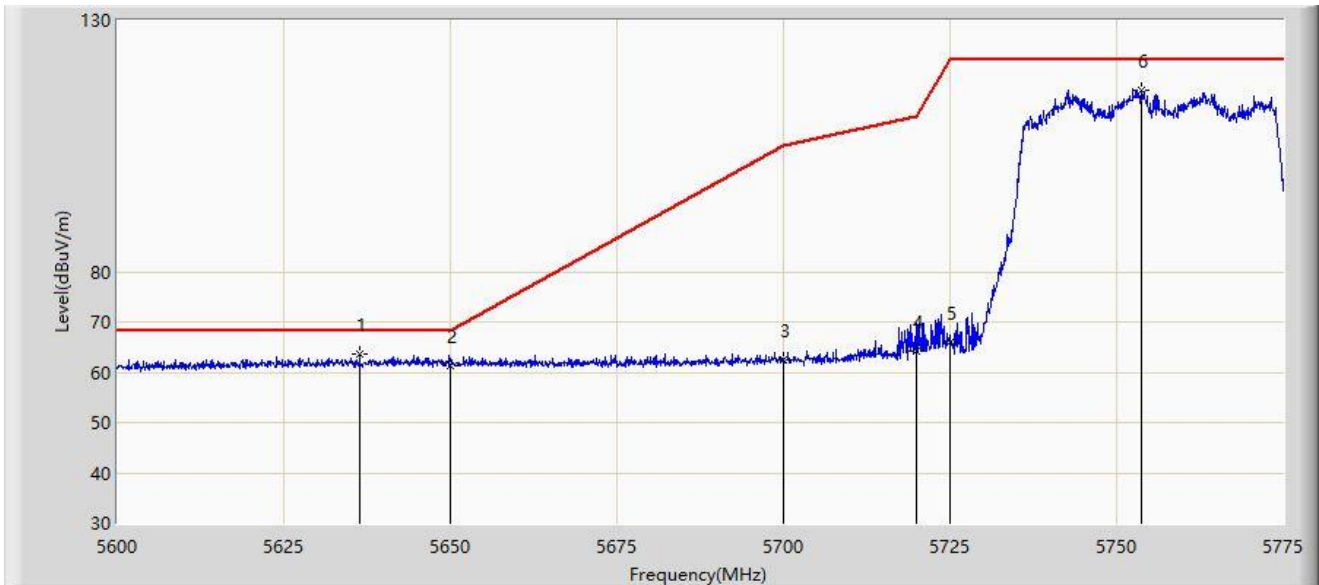


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5636.400	63.736	59.584	-4.464	68.200	4.152	PK
2		5650.000	61.339	57.179	-6.861	68.200	4.160	PK
3		5700.000	62.350	57.920	-42.850	105.200	4.430	PK
4		5720.000	64.305	59.655	-46.495	110.800	4.649	PK
5		5725.000	65.977	61.289	-56.223	122.200	4.688	PK
6		5753.825	116.088	111.581	N/A	N/A	4.507	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-06-18
Limit: FCC_5.8G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: Wi-Fi 6 Outdoor AP	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at 5755MHz	

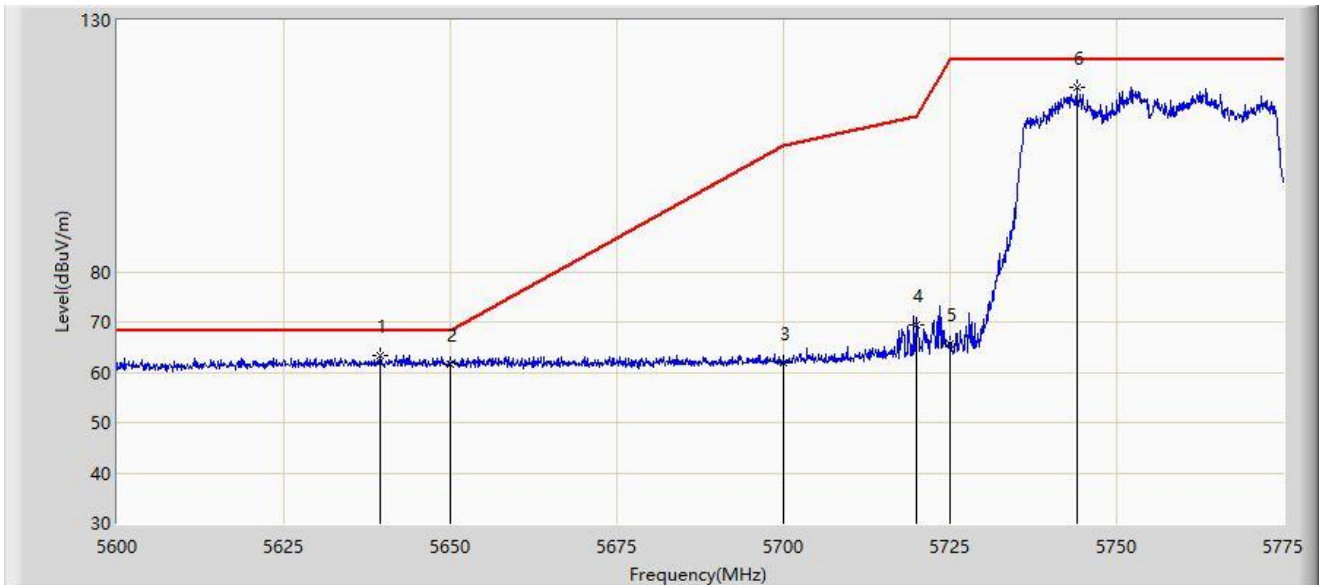


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5639.375	63.277	59.087	-4.923	68.200	4.190	PK
2		5650.000	61.497	57.337	-6.703	68.200	4.160	PK
3		5700.000	61.940	57.510	-43.260	105.200	4.430	PK
4		5720.000	69.299	64.649	-41.501	110.800	4.649	PK
5		5725.000	65.513	60.825	-56.687	122.200	4.688	PK
6		5744.025	116.530	112.135	N/A	N/A	4.395	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-06-18
Limit: FCC_5.8G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: Wi-Fi 6 Outdoor AP	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at 5795MHz	

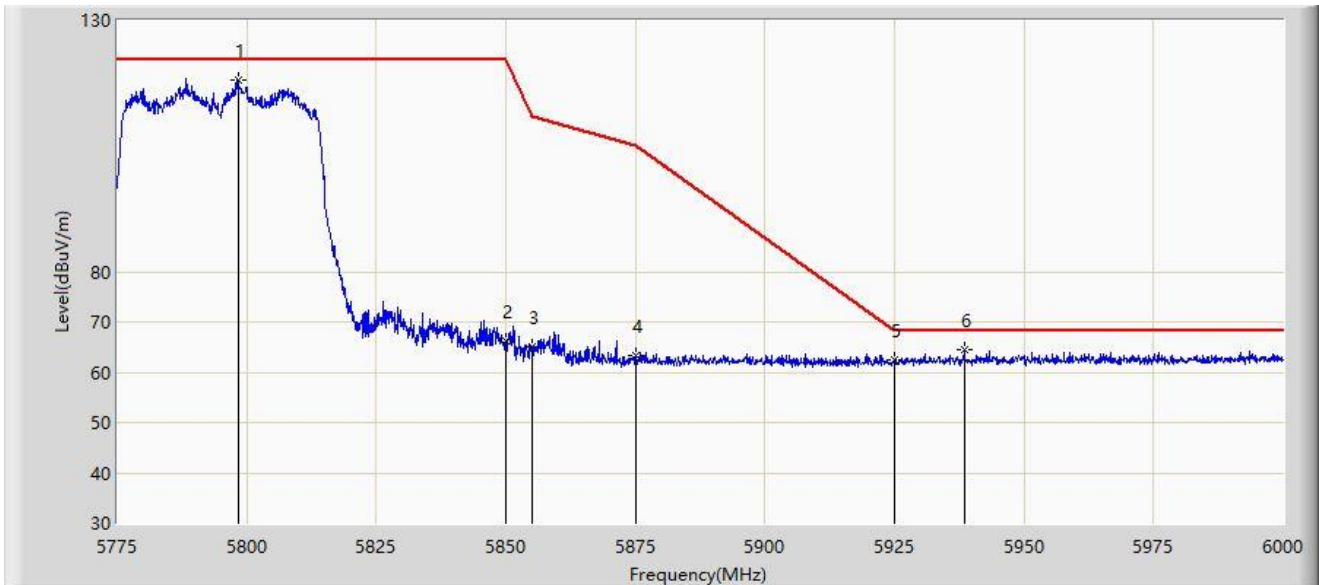


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5798.288	118.218	113.156	N/A	N/A	5.062	PK
2		5850.000	66.185	61.225	-56.015	122.200	4.960	PK
3		5855.000	64.991	59.972	-45.809	110.800	5.019	PK
4		5875.000	63.268	58.132	-41.932	105.200	5.136	PK
5		5925.000	62.347	57.077	-5.853	68.200	5.271	PK
6	*	5938.462	64.388	59.071	-3.812	68.200	5.318	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-06-18
Limit: FCC_5.8G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: Wi-Fi 6 Outdoor AP	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at 5795MHz	

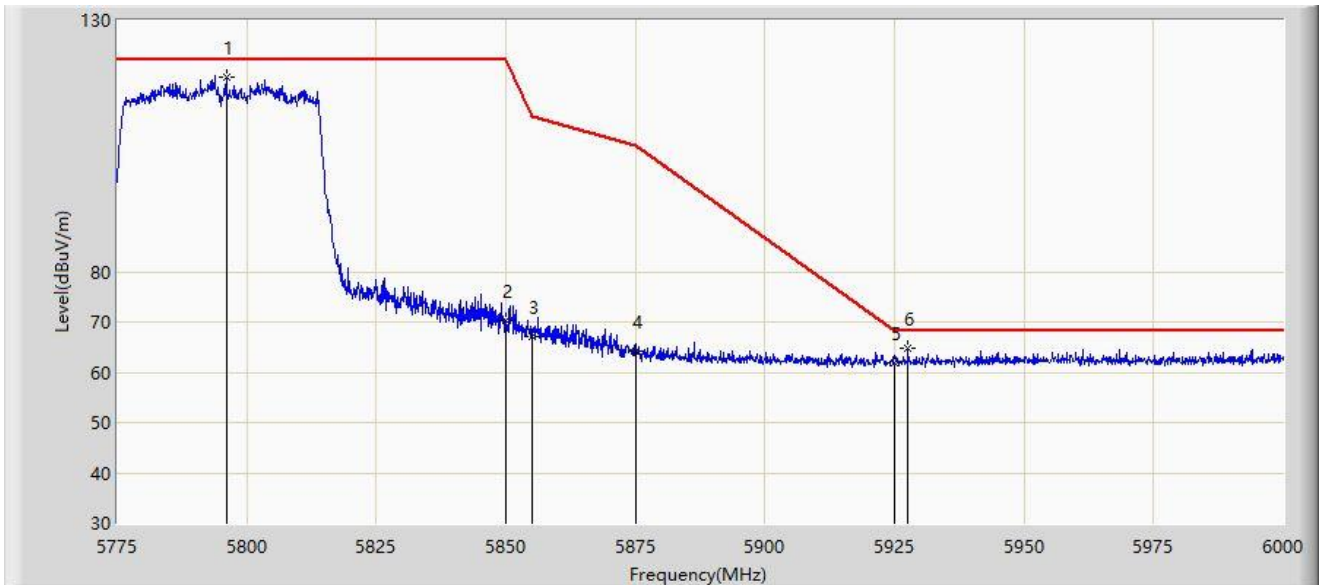


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5796.038	118.586	113.523	N/A	N/A	5.064	PK
2		5850.000	70.282	65.322	-51.918	122.200	4.960	PK
3		5855.000	67.141	62.122	-43.659	110.800	5.019	PK
4		5875.000	64.323	59.187	-40.877	105.200	5.136	PK
5		5925.000	61.823	56.553	-6.377	68.200	5.271	PK
6	*	5927.550	64.675	59.390	-3.525	68.200	5.285	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-07-13
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: Wi-Fi 6 Outdoor AP	Power: By PoE
Test Mode: Transmit by 802.11ax-HE80 at 5210MHz	

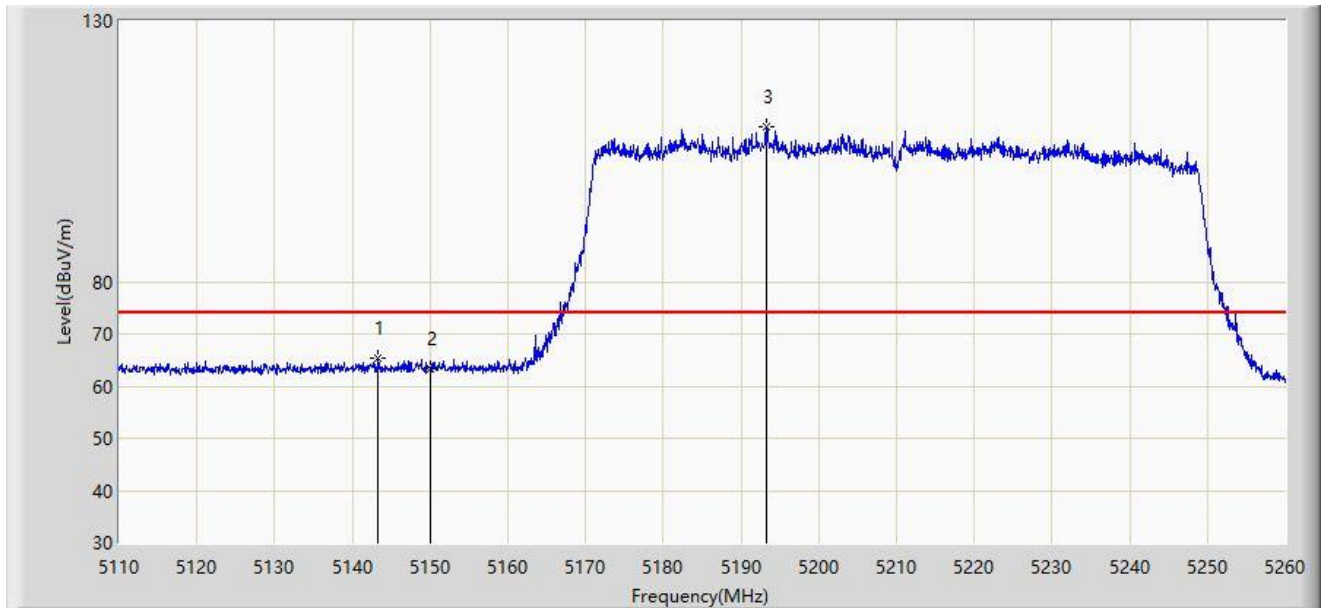


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5143.300	65.220	61.795	-8.780	74.000	3.425	PK
2		5150.000	63.227	59.728	-10.773	74.000	3.499	PK
3		5193.250	109.694	106.660	N/A	N/A	3.035	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-07-13
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: Wi-Fi 6 Outdoor AP	Power: By PoE
Test Mode: Transmit by 802.11ax-HE80 at 5210MHz	

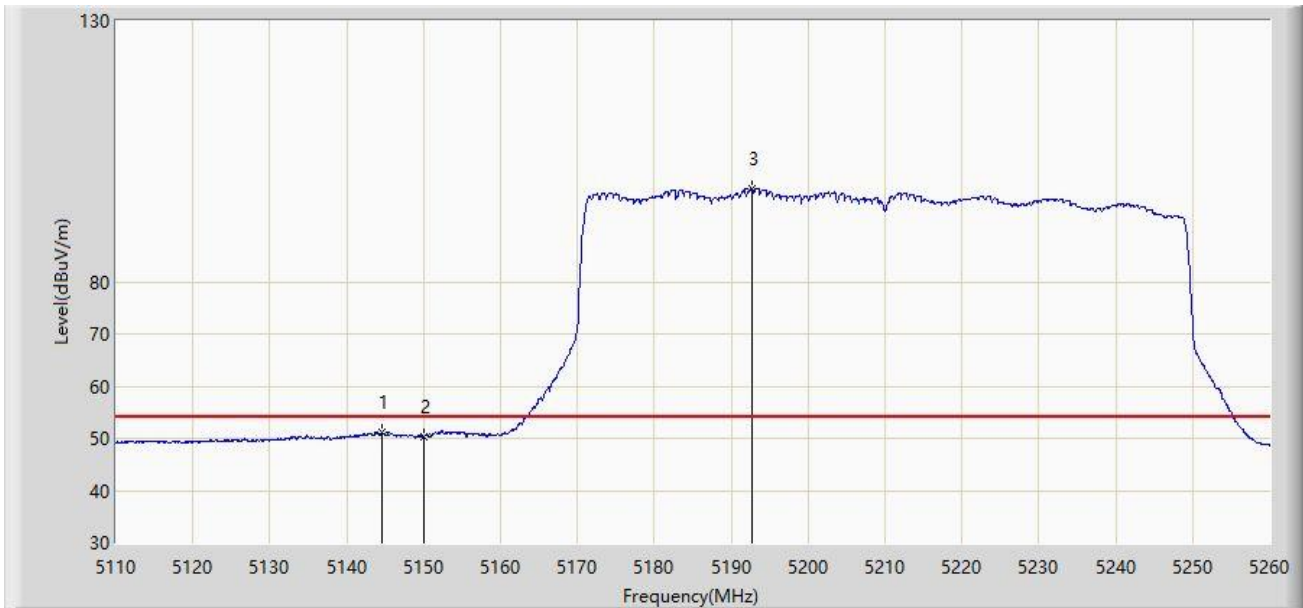


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5144.500	51.041	47.599	-2.959	54.000	3.443	AV
2		5150.000	50.402	46.903	-3.598	54.000	3.499	AV
3		5192.650	97.873	94.827	N/A	N/A	3.046	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-07-13
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: Wi-Fi 6 Outdoor AP	Power: By PoE
Test Mode: Transmit by 802.11ax-HE80 at 5210MHz	

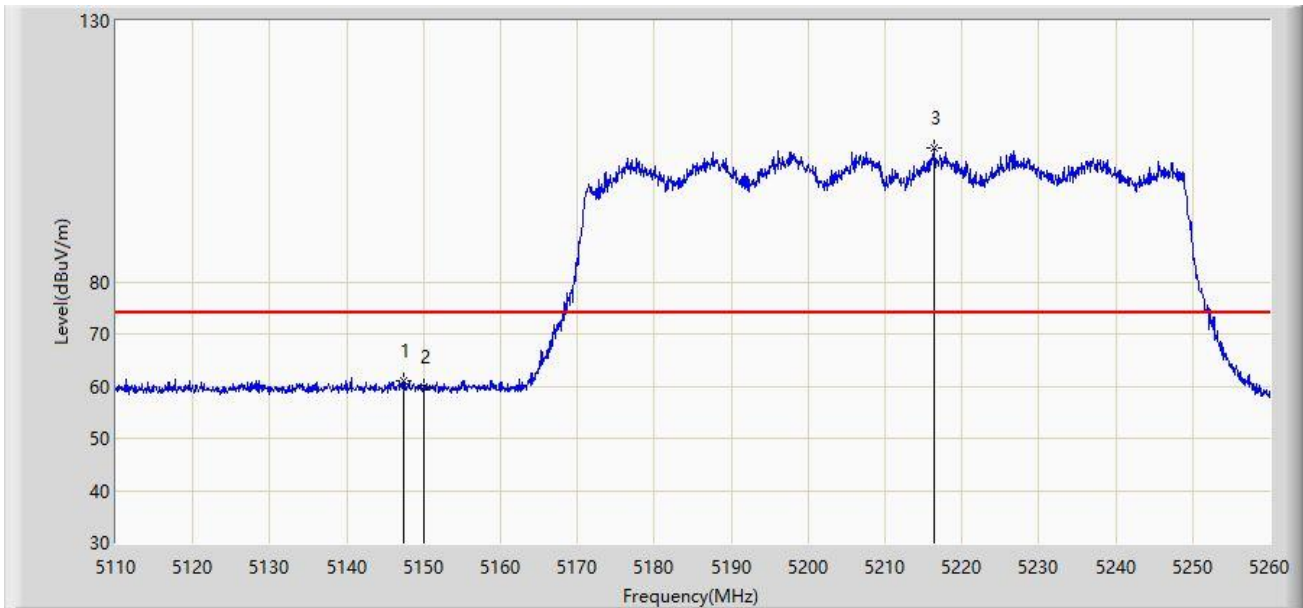


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5147.350	61.157	57.675	-12.843	74.000	3.482	PK
2		5150.000	59.757	56.258	-14.243	74.000	3.499	PK
3		5216.350	105.616	102.640	N/A	N/A	2.977	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-07-13
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: Wi-Fi 6 Outdoor AP	Power: By PoE
Test Mode: Transmit by 802.11ax-HE80 at 5210MHz	

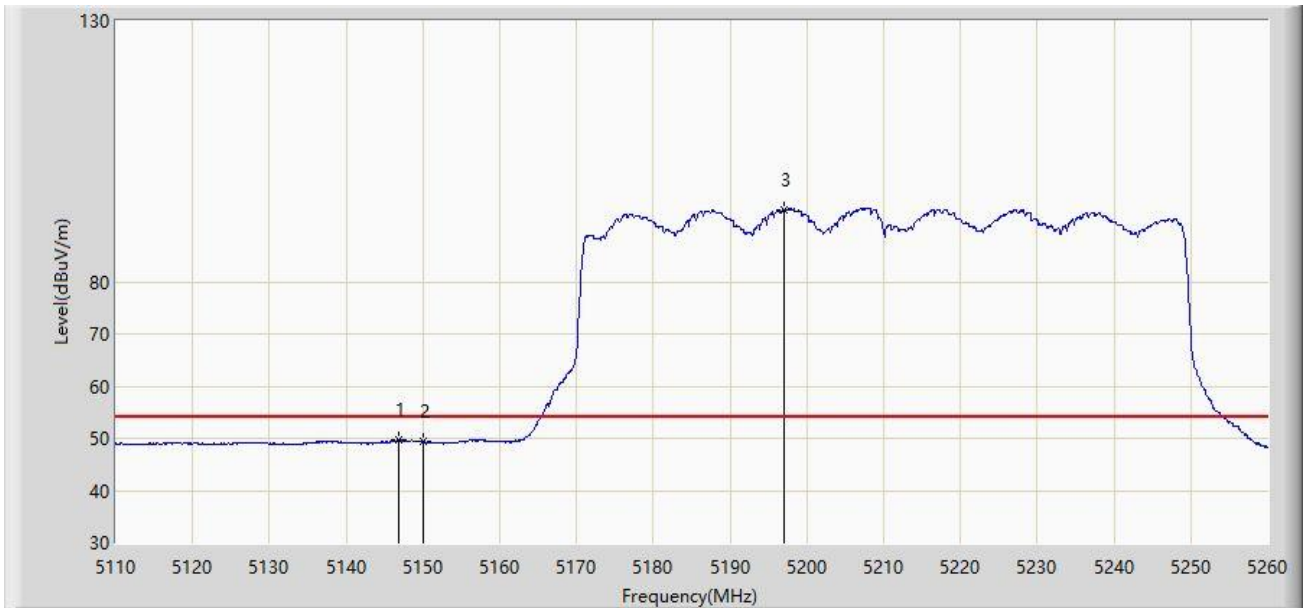


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5146.750	49.650	46.176	-4.350	54.000	3.473	AV
2		5150.000	49.339	45.840	-4.661	54.000	3.499	AV
3		5197.075	93.858	90.904	N/A	N/A	2.954	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-06-18
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: Wi-Fi 6 Outdoor AP	Power: By PoE
Test Mode: Transmit by 802.11ax-HE80 at 5290MHz	

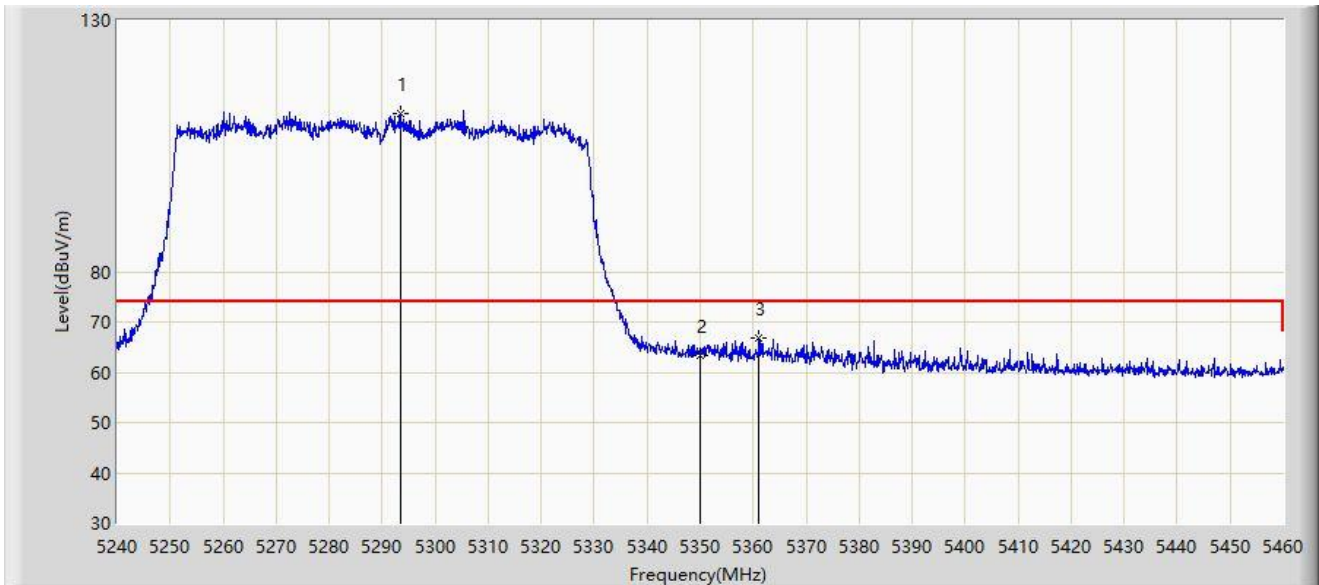


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5293.350	111.524	108.847	N/A	N/A	2.677	PK
2		5350.000	63.370	60.539	-10.630	74.000	2.832	PK
3	*	5361.000	66.937	64.096	-7.063	74.000	2.841	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-06-18
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: Wi-Fi 6 Outdoor AP	Power: By PoE
Test Mode: Transmit by 802.11ax-HE80 at 5290MHz	

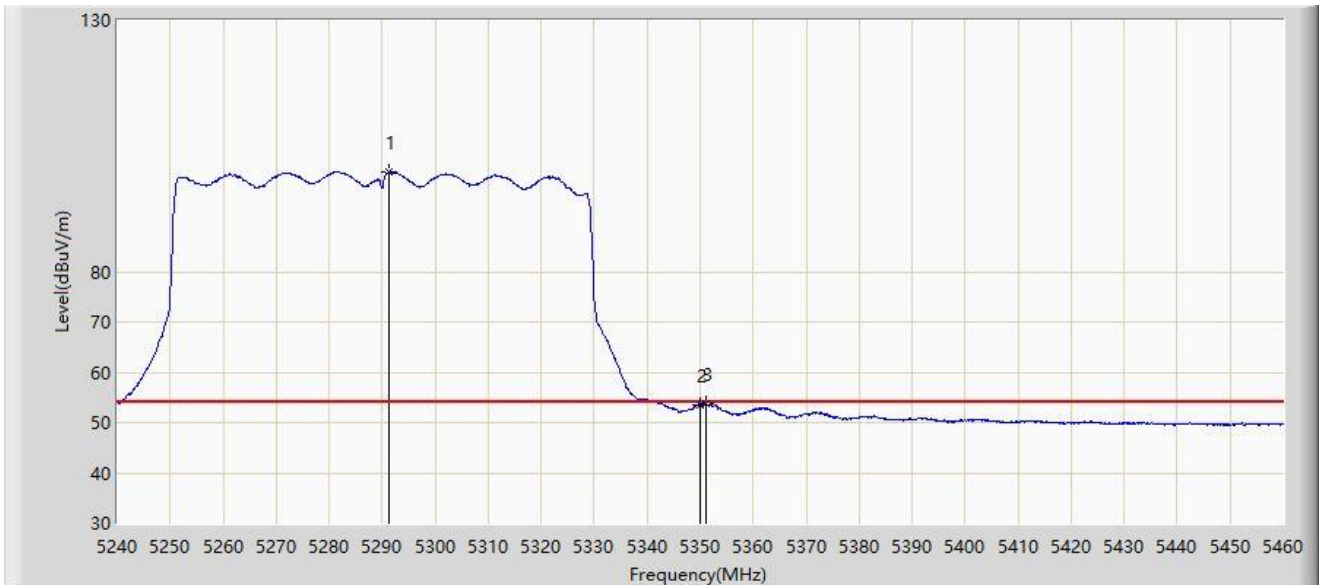


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5291.260	99.732	97.084	N/A	N/A	2.648	AV
2		5350.000	53.428	50.597	-0.572	54.000	2.832	AV
3	*	5350.990	53.722	50.908	-0.278	54.000	2.814	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-06-18
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: Wi-Fi 6 Outdoor AP	Power: By PoE
Test Mode: Transmit by 802.11ax-HE80 at 5290MHz	

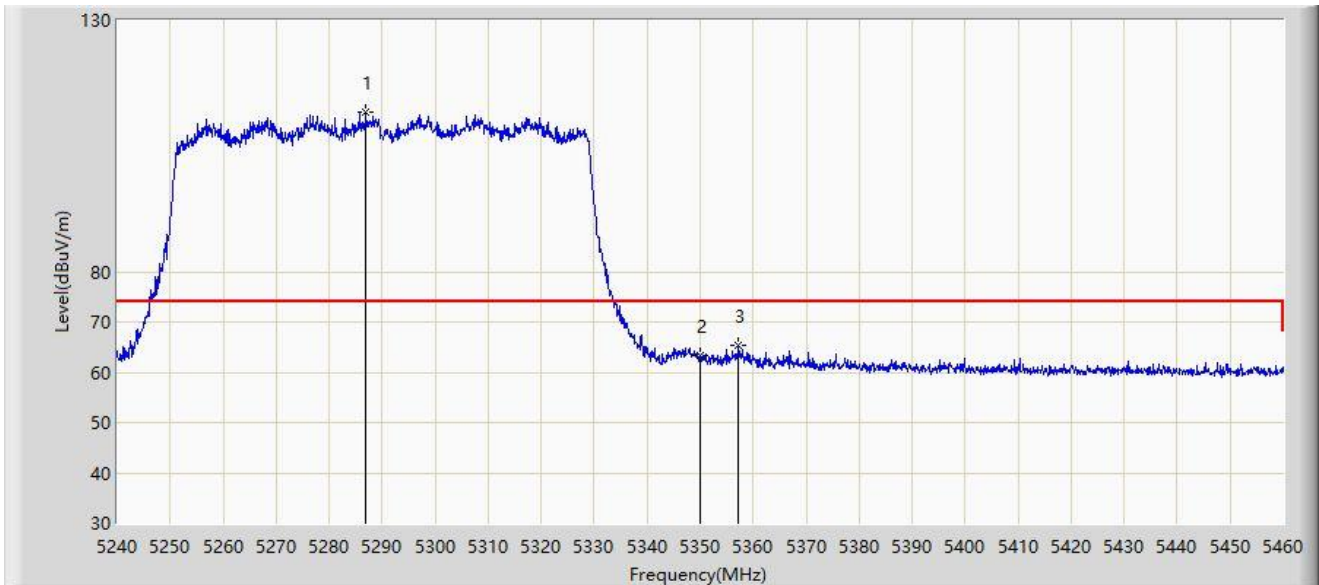

No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5286.970	111.735	109.147	N/A	N/A	2.589	PK
2		5350.000	63.273	60.442	-10.727	74.000	2.832	PK
3	*	5357.150	65.405	62.583	-8.595	74.000	2.822	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).