



# MEASUREMENT REPORT

## FCC PART 15.407 WLAN 802.11a/n/ac

---

**FCC ID:** LNQWXB6X00Q

**APPLICANT:** Actiontec Electronics, Inc.

**Application Type:** Certification

**Product:** WCB6200Q - 802.11ac Wireless Ethernet Bridge with Bonded LAN MoCA  
WCB6000Q - 802.11ac Wireless Ethernet Bridge with LAN MoCA  
WEB6000Q - 802.11ac Wireless Ethernet Bridge

**Model No.:** WCB6200Q, WCB6000Q, WEB6000Q

**Trademark:** Actiontec

**FCC Classification:** Unlicensed National Information Infrastructure (UNII)

**FCC Rule Part(s):** Part 15.407

**Test Procedure(s):** KDB 789033 D02v01, KDB 662911 D01v02r01  
KDB 644545 D03v01

**Test Date:** Dec. 01 ~ 11, 2014

Reviewed By : Robin Wu  
( Robin Wu )

Approved By : Marlin Chen  
( Marlin Chen )



The test results relate only to the samples tested.

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in KDB 789033 D02v01. Test results reported herein relate only to the item(s) tested.

The test report shall not be reproduced except in full without the written approval of MRT Technology (Suzhou) Co., Ltd.

## Revision History

Report No.	Version	Description	Issue Date
1411RSU02902	Rev. 01	Initial report	12-15-2014
1411RSU02902	Rev. 01	Corrected the radiated emission test procedure	12-19-2014
1411RSU02902	Rev. 01	Corrected the model number of power sensor	03-03-2015

## CONTENTS

Description	Page
<b>§2.1033 General Information</b> .....	<b>6</b>
<b>1. INTRODUCTION</b> .....	<b>7</b>
1.1. Scope .....	7
1.2. MRT Test Location .....	7
<b>2. PRODUCT INFORMATION</b> .....	<b>8</b>
2.1. Equipment Description .....	8
2.2. Frequency / Channel Operation .....	9
2.3. Description of Available Antennas .....	10
2.4. Description of Antenna RF Port .....	11
2.5. Test Mode .....	11
2.6. Test Software .....	12
2.7. Device Capabilities .....	13
2.8. Test Configuration .....	13
2.9. EMI Suppression Device(s)/Modifications .....	13
2.10. Labeling Requirements .....	13
<b>3. DESCRIPTION OF TEST</b> .....	<b>14</b>
3.1. Evaluation Procedure .....	14
3.2. AC Line Conducted Emissions .....	14
3.3. Radiated Emissions .....	15
<b>4. ANTENNA REQUIREMENTS</b> .....	<b>16</b>
<b>5. TEST EQUIPMENT CALIBRATION DATE</b> .....	<b>17</b>
<b>6. MEASUREMENT UNCERTAINTY</b> .....	<b>18</b>
<b>7. TEST RESULT</b> .....	<b>19</b>
7.1. Summary .....	19
7.2. 26dB Bandwidth Measurement .....	21
7.2.1. Test Limit .....	21
7.2.2. Test Procedure used .....	21
7.2.3. Test Setting .....	21
7.2.4. Test Setup .....	21
7.2.5. Test Result .....	22
7.3. 6dB Bandwidth Measurement .....	50
7.3.1. Test Limit .....	50
7.3.2. Test Procedure used .....	50

7.3.3. Test Setting.....	50
7.3.4. Test Setup .....	50
7.3.5. Test Result.....	51
7.4. Output Power Measurement .....	77
7.4.1. Test Limit .....	77
7.4.2. Test Procedure Used.....	77
7.4.3. Test Setting.....	77
7.4.4. Test Setup .....	77
7.4.5. Test Result.....	78
7.5. Transmit Power Control.....	81
7.5.1. Test Limit .....	81
7.5.2. Test Procedure Used.....	81
7.5.3. Test Setting.....	81
7.5.4. Test Setup .....	81
7.5.5. Test Result.....	81
7.6. Power Spectral Density Measurement .....	82
7.6.1. Test Limit .....	82
7.6.2. Test Procedure Used.....	82
7.6.3. Test Setting.....	82
7.6.4. Test Setup .....	83
7.6.5. Test Result.....	84
7.7. Frequency Stability Measurement .....	110
7.7.1. Test Limit .....	110
7.7.2. Test Procedure Used.....	110
7.7.3. Test Setup .....	110
7.7.4. Test Result.....	111
7.8. Radiated Spurious Emission Measurement .....	112
7.8.1. Test Limit .....	112
7.8.2. Test Procedure Used.....	112
7.8.3. Test Setting.....	112
7.8.4. Test Setup .....	113
7.8.5. Test Result.....	115
7.9. Radiated Restricted Band Edge Measurement .....	149
7.9.1. Test Limit .....	149
7.9.2. Test Result of Radiated Restricted Band Edge .....	151
7.10. AC Conducted Emissions Measurement.....	219
7.10.1. Test Limit .....	219
7.10.2. Test Procedure .....	219

7.10.3. Test Setup .....220

7.10.4. Test Result.....221

**8. CONCLUSION.....223**

## §2.1033 General Information

<b>Applicant:</b>	Actiontec Electronics, Inc.
<b>Applicant Address:</b>	760 North Mary Ave. Sunnyvale, CA 94085
<b>Manufacturer:</b>	The First Branch of CIG Shanghai Co. Ltd.
<b>Manufacturer Address:</b>	2-3/FL, Building D, 2059 Duhui Road, Minhang District, Shanghai
<b>Test Site:</b>	MRT Technology (Suzhou) Co., Ltd
<b>Test Site Address:</b>	D8 Building, Youxin Industrial Park, No.2 Tian'edang Rd., Wuzhong Economic Development Zone, Suzhou, China
<b>MRT FCC Registration No.:</b>	809388
<b>FCC Rule Part(s):</b>	Part 15.407
<b>Model No.:</b>	WCB6200Q, WCB6000Q, WEB6000Q
<b>FCC ID:</b>	LNQWXB6X00Q
<b>Test Device Serial No.:</b>	N/A <input type="checkbox"/> Production <input checked="" type="checkbox"/> Pre-Production <input type="checkbox"/> Engineering
<b>FCC Classification:</b>	Unlicensed National Information Infrastructure (UNII)

### Test Facility / Accreditations

Measurements were performed at MRT Laboratory located in Tian'edang Rd., Suzhou, China.

- MRT facility is a FCC registered (MRT Reg. No. 809388) test facility with the site description report on file and has met all the requirements specified in Section 2.948 of the FCC Rules.
- MRT facility is an IC registered (MRT Reg. No. 11384A-1) test laboratory with the site description on file at Industry Canada.
- MRT facility is a VCCI registered (R-4179, G-814, C-4664, T-2206) test laboratory with the site description on file at VCCI Council.
- MRT Lab is accredited to ISO 17025 by the American Association for Laboratory Accreditation (A2LA) under the American Association for Laboratory Accreditation Program (A2LA Cert. No. 3628.01) in EMC, Telecommunications and Radio testing for FCC, Industry Canada, EU and TELEC Rules.



# 1. INTRODUCTION

## 1.1. Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Industry Canada Certification and Engineering Bureau.

## 1.2. MRT Test Location

The map below shows the location of the MRT LABORATORY, its proximity to the Taihu Lake. These measurement tests were conducted at the MRT Technology (Suzhou) Co., Ltd. Facility located at D8 Building, Youxin Industrial Park, No.2 Tian'edang Rd., Wuzhong Economic Development Zone, Suzhou, China. The detailed description of the measurement facility was found to be in compliance with the requirements of § 2.948 according to ANSI C63.4-2009 on September 30, 2013.



## 2. PRODUCT INFORMATION

### 2.1. Equipment Description

Product Name	WCB6200Q - 802.11ac Wireless Ethernet Bridge with Bonded LAN MoCA WCB6000Q - 802.11ac Wireless Ethernet Bridge with LAN MoCA WEB6000Q - 802.11ac Wireless Ethernet Bridge
Model No.	WCB6200Q, WCB6000Q, WEB6000Q
Model Difference	WCB6200Q with LAN MoCA "BCM6802" WCB6000Q with LAN MoCA "BCM6803" WEB6000Q without LAN MoCA
Frequency Range	For 802.11a/n-HT20/ac-VHT20: 5180~5240MHz, 5745~5825MHz For 802.11n-HT40/ac-VHT40: 5190~5230MHz, 5755~5795MHz For 802.11ac-VHT80: 5210MHz, 5775MHz
Maximum Output Power	802.11a: 27.34dBm 802.11n-HT20: 27.02dBm 802.11n-HT40: 27.37dBm 802.11ac-VHT20: 27.29dBm 802.11ac-VHT40: 27.70dBm 802.11ac-VHT80: 25.89dBm
Type of Modulation	802.11a/n/ac: OFDM
<b>Component</b>	
Adapter #1	M/N: NBS24J120200VU Input: 100-120V ~ 50/60Hz 0.6A OUTPUT: 12Vdc, 2A
Adapter #2	M/N: CDS024-W120U Input: 100-240V ~ 50/60Hz 0.58A OUTPUT: 12Vdc, 2A
Adapter #3	M/N: WA-24Q12FU Input: 100-240V ~ 50/60Hz 0.7A MAX OUTPUT: 12Vdc, 2A

Note:

1. Three model numbers of EUT with the same RF circuit, and assessments were performed the "WCB6200Q" in this report.
2. Three model numbers and adapters assessments were performed in "FCC 15B Report".



## 2.2. Frequency / Channel Operation

### Channel List for 802.11a/n-HT20/ ac-VHT20

Channel	Frequency	Channel	Frequency	Channel	Frequency
36	5180 MHz	40	5200 MHz	44	5220 MHz
48	5240 MHz	149	5745 MHz	153	5765 MHz
157	5785 MHz	161	5805 MHz	165	5825 MHz

### Channel List for 802.11n-HT40/ ac-VHT40

Channel	Frequency	Channel	Frequency	Channel	Frequency
38	5190 MHz	46	5230 MHz	151	5755 MHz
159	5795 MHz	--	--	--	--

### Channel List for 802.11ac-VHT80

Channel	Frequency	Channel	Frequency	Channel	Frequency
42	5210 MHz	155	5775 MHz	--	--

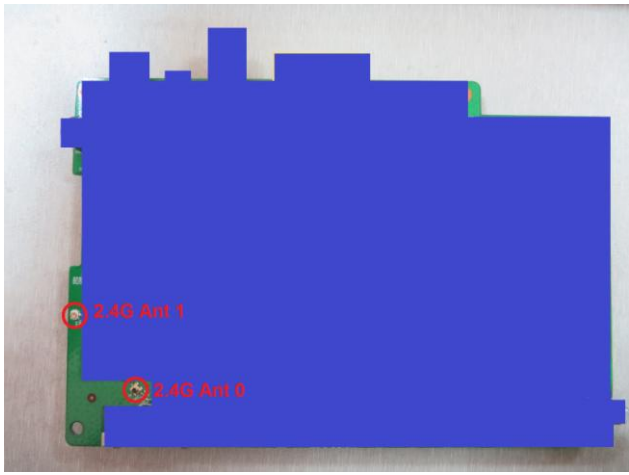
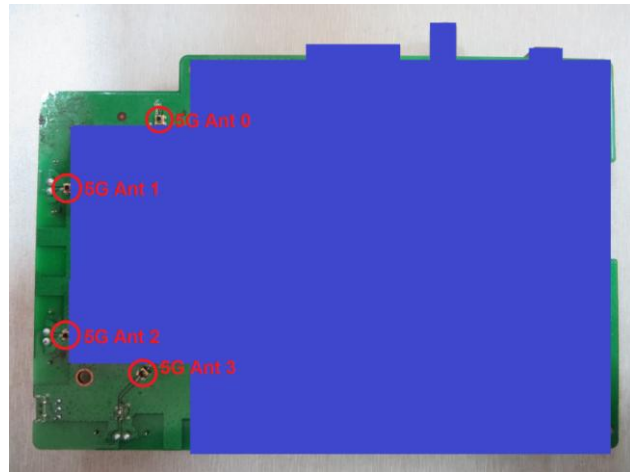
### 2.3. Description of Available Antennas

Antenna Type	Frequency Band (GHz)	T <sub>x</sub> Paths	Directional Gain (dBi)	
			Non Beam Forming	Beam Forming
PCB Antenna	2.4	2	5.22	--
	5.2	4	--	6.92
	5.8	4	--	7.39

Note:

1. Transmit at 2.4GHz support two antennas, transmit at 5GHz support four antennas.
2. The EUT working on Beam Forming mode, and the Beam Forming support 802.11a/n/ac.
3. Correlated signals include, but are not limited to, signals transmitted in any of the following modes:
  - Any transmit Beam Forming mode, whether fixed or adaptive (e.g., phased array modes, closed loop MIMO modes, Transmitter Adaptive Antenna modes, Maximum Ratio Transmission (MRT) modes, and Statistical Eigen Beam Forming (EBF) modes).
4. Unequal antenna gains, with equal transmit powers. For antenna gains given by  $G_1, G_2, \dots, G_N$  dBi
  - transmit signals are correlated
  - Directional gain =  $10 \log[(10^{G_1/20} + 10^{G_2/20} + \dots + 10^{G_N/20})^2 / N_{ANT}]$  dBi [Note the "20"s in the denominator of each exponent and the square of the sum of terms; the object is to combine the signal levels coherently.]

## 2.4. Description of Antenna RF Port

Antenna RF Port						
--	2.4GHz RF Port		5GHz RF Port			
Software Control Port	Ant 0	Ant 1	Ant 0	Ant 1	Ant 2	Ant 3
Antenna RF Port Plot						
						

## 2.5. Test Mode

Test Mode	Mode 1: Transmit by 802.11a
	Mode 2: Transmit by 802.11n-HT20
	Mode 3: Transmit by 802.11n-HT40
	Mode 4: Transmit by 802.11ac-VHT20
	Mode 5: Transmit by 802.11ac-VHT40
	Mode 6: Transmit by 802.11ac-VHT80

## 2.6. Test Software

The test utility software used during testing was “Dos Directive”.

Final Power Parameter Values of the test software.

Test Mode	Test Frequency	Power Parameter Value Ant 0 + 1 + 2 + 3	Test Mode	Test Frequency	Power Parameter Value Ant 0 + 1 + 2 + 3
802.11a	5180	19.0	802.11n-HT20	5180	19.0
	5220	19.0		5220	19.0
	5240	19.0		5240	19.0
	5745	20.0		5745	21.0
	5785	21.0		5785	21.0
	5825	20.0		5825	21.0
802.11n-HT40	5190	15.0	802.11ac-VHT20	5180	19.0
	5230	19.0		5220	19.0
	5755	21.0		5240	19.0
	5795	21.0		5745	21.0
	--	--		5785	21.0
	--	--		5825	20.0
802.11ac-VHT40	5190	14.0	802.11ac-VHT80	5210	15.0
	5230	19.0		5775	21.0
	5755	21.0		--	--
	5795	21.0		--	--

## 2.7. Device Capabilities

This device contains the following capabilities:

2.4GHz WLAN (DTS) and 5GHz WLAN (UNII).

**Note:** 5GHz (NII) operation is possible in 20MHz, 40MHz and 80MHz channel bandwidths. The maximum achievable duty cycles for all modes were determined based on measurements performed on a spectrum analyzer in zero-span mode with RBW = 8MHz, VBW = 50MHz, and detector = peak per the guidance of Section B)2)b) of KDB 789033 D02v01. The RBW and VBW were both greater than  $50/T$ , where T is the minimum transmission duration, and the number of sweep points across T was greater than 100. The duty cycles are as follows:

Mode	On Tmie (ms)	On + Off Tmie (ms)	Duty Cycle (%)	1/T Minimum VBW (kHz)
802.11a	5.360	5.410	99.1	0.01
802.11n-HT20	1.285	1.325	97.0	0.78
802.11n-HT40	0.645	0.711	90.7	1.55
802.11ac-VHT20	2.509	2.562	97.9	0.40
802.11ac-VHT40	1.230	1.290	95.3	0.81
802.11ac-VHT80	0.591	0.660	89.5	1.69

## 2.8. Test Configuration

The **WCB6200Q - 802.11ac Wireless Ethernet Bridge with Bonded LAN MoCA FCC ID: LNQWXB6X00Q** was tested per the guidance of KDB 789033 D02v01. ANSI C63.4-2009 was used to reference the appropriate EUT setup for radiated spurious emissions testing and AC line conducted testing.

## 2.9. EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and/or no modifications were made during testing.

## 2.10. Labeling Requirements

Per 2.1074 & 15.19; Docket 95-19

The label shall be permanently affixed at a conspicuous location on the device; instruction manual or pamphlet supplied to the user and be readily visible to the purchaser at the time of purchase. However, when the device is so small wherein placement of the label with specified statement is not practical, only the trade name and FCC ID must be displayed on the device per Section 15.19(a)(5). Please see attachment for FCC ID label and label location.

### 3. DESCRIPTION OF TEST

#### 3.1. Evaluation Procedure

The measurement procedures described in the American National Standard for Testing Unlicensed Wireless Devices (ANSI C63.4-2009), and the guidance provided in KDB 789033 D02v01 were used in the measurement of the **WCB6200Q - 802.11ac Wireless Ethernet Bridge with Bonded LAN MoCA FCC ID: LNQWXB6X00Q.**

**Deviation from measurement procedure.....None**

#### 3.2. AC Line Conducted Emissions

The line-conducted facility is located inside an 8'x4'x4' shielded enclosure. A 1m x 2m wooden table 80cm high is placed 40cm away from the vertical wall and 80cm away from the sidewall of the shielded room. Two 10kHz-30MHz, 50Ω/50uH Line-Impedance Stabilization Networks (LISNs) are bonded to the shielded room floor. Power to the LISNs is filtered by external high-current high-insertion loss power line filters. These filters attenuate ambient signal noise from entering the measurement lines. These filters are also bonded to the shielded enclosure.

The EUT is powered from one LISN and the support equipment is powered from the second LISN. All interconnecting cables more than 1 meter were shortened to a 1 meter length by non-inductive bundling (serpentine fashion) and draped over the back edge of the test table. All cables were at least 40cm above the horizontal reference ground-plane. Power cables for support equipment were routed down to the second LISN while ensuring that that cables were not draped over the second LISN. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the receiver and exploratory measurements were made to determine the frequencies producing the maximum emission from the EUT. The receiver was scanned from 150kHz to 30MHz. The detector function was set to peak mode for exploratory measurements while the bandwidth of the analyzer was set to 9kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Each emission was also maximized by varying: power lines, the mode of operation or data exchange speed, or support equipment whichever determined the worst-case emission. Once the worst case emissions have been identified, the one EUT cable configuration/arrangement and mode of operation that produced these emissions are used for final measurements on the same test site. The analyzer is set to CISPR quasi-peak and average detectors with a 9kHz resolution bandwidth for final measurements.

An extension cord was used to connect to a single LISN which powered by EUT. The extension cord was calibrated with LISN, the impedance and insertion loss are compliance with the requirements as stated in ANSI C63.4-2009 at Clause 4.3.

Line conducted emissions test results are shown in Section 7.10.

### 3.3. Radiated Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. For measurements above 1GHz absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections. For measurements below 1GHz, the absorbers are removed. An MF Model 210SS turntable is used for radiated measurement. It is a continuously rotatable, remote controlled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. An 80cm high PVC support structure is placed on top of the turntable.

For all measurements, the spectrum was scanned through all EUT azimuths and from 1 to 4 meter receive antenna height using a broadband antenna from 30MHz up to the upper frequency shown in 15.33(b)(1) depending on the highest frequency generated or used in the device or on which the device operates or tunes. For frequencies above 1GHz, linearly polarized double ridge horn antennas were used. For frequencies below 30MHz, a calibrated loop antenna was used. When exploratory measurements were necessary, they were performed at 1 meter test distance inside the semi-anechoic chamber using broadband antennas, broadband amplifiers, and spectrum analyzers to determine the frequencies and modes producing the maximum emissions. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The test set-up was placed on top of the 0.8 meter high, 1 x 1.5 meter table. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Appropriate precaution was taken to ensure that all emissions from the EUT were maximized and investigated. The system configuration, clock speed, mode of operation or video resolution, if applicable, turntable azimuth, and receive antenna height was noted for each frequency found.

Final measurements were made in the semi-anechoic chamber using calibrated, linearly polarized broadband and horn antennas. The test setup was configured to the setup that produced the worst case emissions. The spectrum analyzer was set to investigate all frequencies required for testing to compare the highest radiated disturbances with respect to the specified limits. The turntable containing the EUT was rotated through 360 degrees and the height of the receive antenna was varied 1 to 4 meters and stopped at the azimuth and height producing the maximum emission. Each emission was maximized by changing the orientation of the EUT through three orthogonal planes and changing the polarity of the receive antenna, whichever produced the worst-case emissions.

According to 3dB Beam-width of horn antenna, the horn antenna should be always directed to the EUT when rising height.

## 4. ANTENNA REQUIREMENTS

### Excerpt from §15.203 of the FCC Rules/Regulations:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- The antenna of the **WCB6200Q - 802.11ac Wireless Ethernet Bridge with Bonded LAN MoCA** is **permanently attached**.
- There are no provisions for connection to an external antenna.

### Conclusion:

The **WCB6200Q - 802.11ac Wireless Ethernet Bridge with Bonded LAN MoCA FCC ID: LNQWXB6X00Q** unit complies with the requirement of §15.203.



## 5. TEST EQUIPMENT CALIBRATION DATE

### Conducted Emissions

Instrument	Manufacturer	Type No.	Serial No.	Cali. Interval	Cali. Due Date
EMI Test Receiver	R&S	ESR7	101209	1 year	2015/11/07
Two-Line V-Network	R&S	ENV216	101683	1 year	2015/11/07
Two-Line V-Network	R&S	ENV216	101684	1 year	2015/11/07
Temperature/ Meter Humidity	Anymetre	TH101B	SR2-01	1 year	2015/11/14

### Radiated Emission

Instrument	Manufacturer	Type No.	Serial No.	Cali. Interval	Cali. Due Date
Spectrum Analyzer	Agilent	E4447A	MY45300136	1 year	2015/10/09
EMI Test Receiver	R&S	ESR7	101209	1 year	2015/11/07
Preamplifier	MRT	AP01G18	S-001	1 year	2015/10/06
Preamplifier	MRT	AP18G40	S-001	1 year	2015/12/13
Loop Antenna	Schwarzbeck	FMZB1519	1519-041	1 year	2015/11/08
TRILOG Antenna	Schwarzbeck	VULB9162	9162-047	1 year	2015/11/08
Broad-Band Horn Antenna	Schwarzbeck	BBHA9120D	9120D-1167	1 year	2015/11/08
Broadband Horn Antenna	Schwarzbeck	BBHA9170	9170-549	1 year	2015/12/12
Temperature/Humidity Meter	Anymetre	TH101B	AC1-01	1 year	2015/11/14

### Conducted Test Equipment

Instrument	Manufacturer	Type No.	Serial No.	Cali. Interval	Cali. Due Date
Spectrum Analyzer	Agilent	N9020A	MY52090106	1 year	2015/04/23
USB Wideband Power Sensor	Boonton	55006	8911	1 year	2015/10/15
Temperature & Humidity Chamber	BAOYT	BYH-1500L	1309W043	1 year	2015/11/20
Temperature/Humidity Meter	Anymetre	TH101B	TR3-01	1 year	2015/11/14

## 6. MEASUREMENT UNCERTAINTY

Where relevant, the following test uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k = 2$ .

<b>AC Conducted Emission Measurement</b>
Measuring Uncertainty for a Level of Confidence of 95% ( $U=2Uc(y)$ ): 150kHz~30MHz: $\pm 3.46\text{dB}$
<b>Radiated Emission Measurement</b>
Measuring Uncertainty for a Level of Confidence of 95% ( $U=2Uc(y)$ ): 9kHz ~ 1GHz: $\pm 4.18\text{dB}$ 1GHz ~ 40GHz: $\pm 4.76\text{dB}$

## 7. TEST RESULT

### 7.1. Summary

**Product Name:** WCB6200Q - 802.11ac Wireless Ethernet Bridge with Bonded LAN MoCA  
**FCC ID:** LNQWXB6X00Q  
**FCC Classification:** Unlicensed National Information Infrastructure (UNII)  
**Data Rate(s) Tested:** 6Mbps ~ 54Mbps (a);  
6.5/7.2Mbps ~ 260/288.8Mbps (n-HT20MHz BW);  
13.5/15.0Mbps ~ 540/600Mbps (n-HT40MHz BW);  
6.5/7.2Mbps ~ 312/346.7Mbps (ac-VHT20MHz BW);  
13.5/15Mbps ~ 720/800Mbps (ac-VHT40MHz BW);  
29.3/32.5Mbps ~ 1560/1733.3Mbps (ac-VHT80MHz BW)

FCC Part Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
15.407(a)	26dB Bandwidth	N/A	Conducted	Pass	Section 7.2
15.407(e)	6dB Bandwidth	≥ 500kHz		Pass	Section 7.3
15.407(a)(1)(ii), (3)	Maximum Conducted Output Power	< 29.08dBm U-NII-1 < 28.61dBm U-NII-3		Pass	Section 7.4
15.407(h)(1)	Transmit Power Control	< 24 dBm		N/A	Section 7.5
15.407(a)(1)(ii), (2), (3), (5)	Peak Power Spectral Density	< 16.08dBm/MHz U-NII-1 < 28.61dBm/500kHz U-NII-3		Pass	Section 7.6
15.407(g)	Frequency Stability	N/A		Pass	Section 7.7
15.407(b)(1), (4)	Undesirable Emissions	< -27dBm/MHz EIRP < -17dBm/MHz EIRP		Radiated	Pass
15.205, 15.209 15.407(b)(5), (6), (7)	General Field Strength Limits (Restricted Bands and Radiated Emission Limits)	Emissions in restricted bands must meet the radiated limits detailed in 15.209	Pass		
15.207	AC Conducted Emissions 150kHz - 30MHz	< FCC 15.207 limits	Line Conducted	Pass	Section 7.10

Notes:

- 1) All channels, modes, and modulations/data rates were investigated among all UNII bands. For radiated emission test, every axis (X, Y, Z) was also verified. The test results shown in the following sections

represent the worst case emissions.

- 2) The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.
- 3) All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables and attenuators.

## 7.2. 26dB Bandwidth Measurement

### 7.2.1. Test Limit

N/A

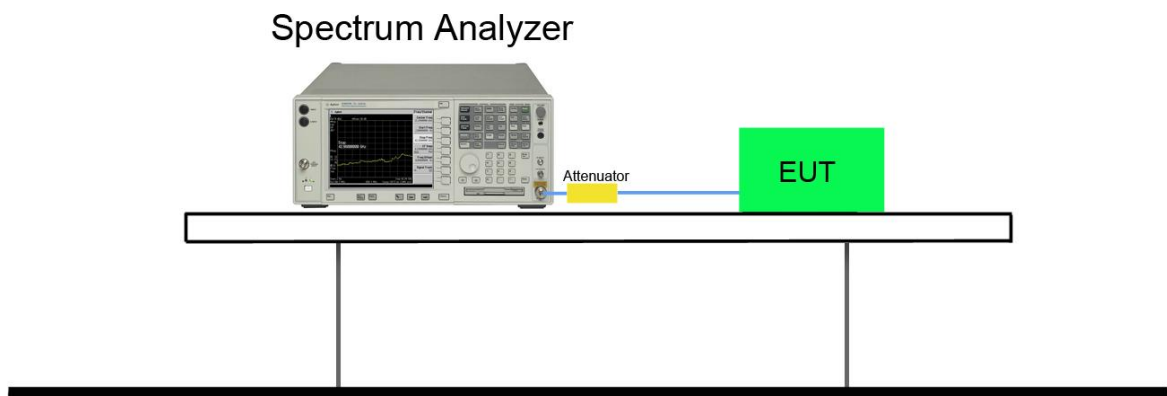
### 7.2.2. Test Procedure used

KDB 789033 D02v01 - Section C.1

### 7.2.3. Test Setting

1. The analyzers' automatic bandwidth measurement capability was used to perform the 26dB bandwidth measurement. The "X" dB bandwidth parameter was set to  $X = 26$ . The automatic bandwidth measurement function also has the capability of simultaneously measuring the 99% occupied bandwidth. The bandwidth measurement was not influenced by any intermediated power nulls in the fundamental emission.
2. RBW = approximately 1% of the emission bandwidth.
3. VBW  $\geq 3 \times$  RBW.
4. Detector = Peak.
5. Trace mode = max hold.

### 7.2.4. Test Setup



**7.2.5. Test Result**

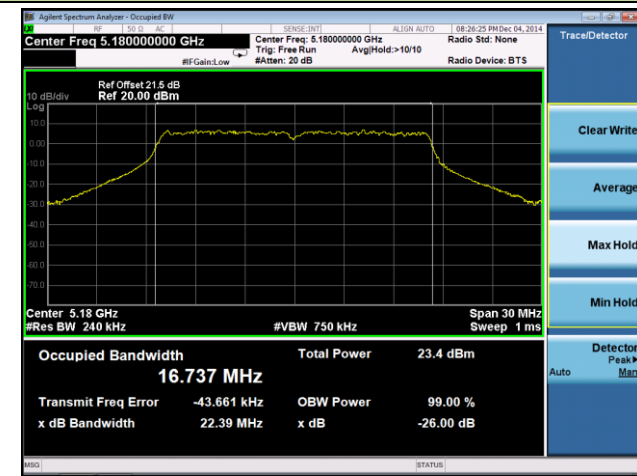
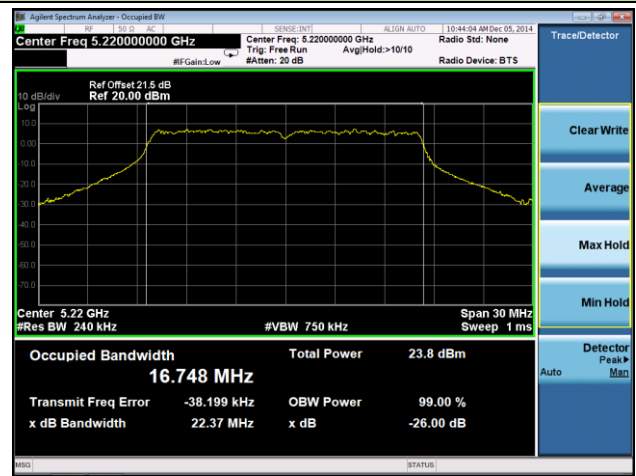
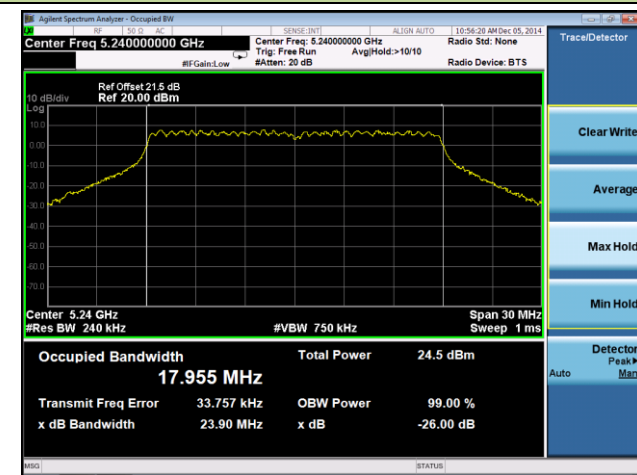
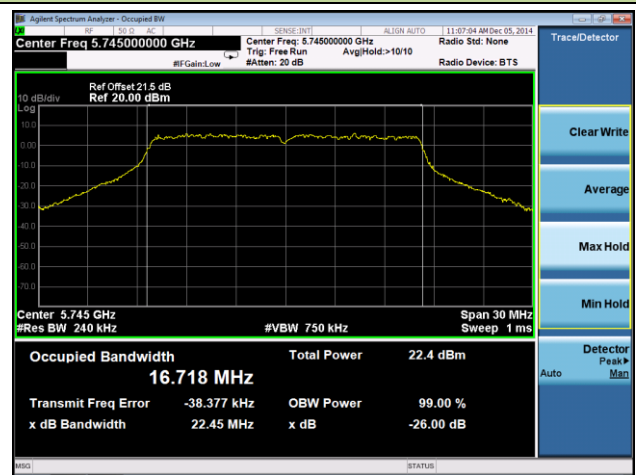
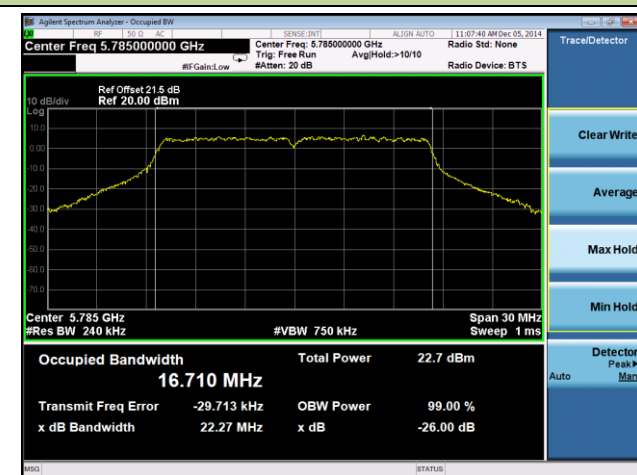
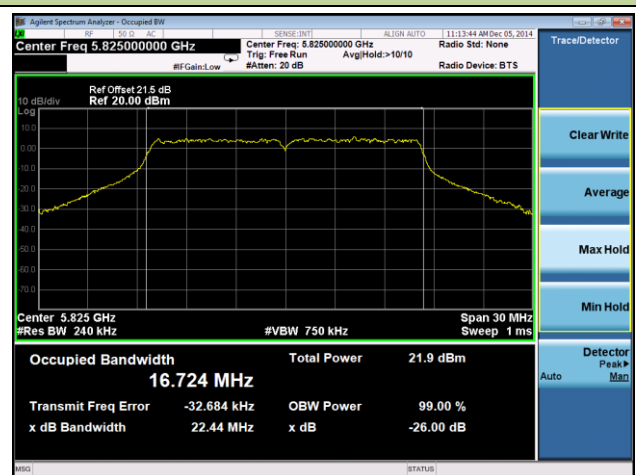
Test Mode	Data Rate (Mbps)	Channel No.	Frequency (MHz)	26dB Bandwidth (MHz)	99% Bandwidth (MHz)	Result
Ant 0 / Ant 0 + 1 + 2 + 3						
802.11a	6	36	5180	22.39	16.74	Pass
802.11a	6	44	5220	22.37	16.75	Pass
802.11a	6	48	5240	23.90	17.96	Pass
802.11a	6	149	5745	22.45	16.72	Pass
802.11a	6	157	5785	22.27	16.71	Pass
802.11a	6	165	5825	22.44	16.72	Pass
802.11n-HT20	26	36	5180	23.79	17.91	Pass
802.11n-HT20	26	44	5220	23.73	17.93	Pass
802.11n-HT20	26	48	5240	23.51	17.94	Pass
802.11n-HT20	26	149	5745	23.91	18.11	Pass
802.11n-HT20	26	157	5785	23.77	17.92	Pass
802.11n-HT20	26	165	5825	23.93	17.92	Pass
802.11n-HT40	54	38	5190	42.85	36.61	Pass
802.11n-HT40	54	46	5230	42.98	36.64	Pass
802.11n-HT40	54	151	5755	42.85	36.55	Pass
802.11n-HT40	54	159	5795	42.82	36.56	Pass
802.11ac-VHT20	26	36	5180	23.73	17.88	Pass
802.11ac-VHT20	26	44	5220	23.68	17.89	Pass
802.11ac-VHT20	26	48	5240	23.56	17.87	Pass
802.11ac-VHT20	26	149	5745	23.66	17.90	Pass
802.11ac-VHT20	26	157	5785	24.03	18.11	Pass
802.11ac-VHT20	26	165	5825	23.48	17.90	Pass
802.11ac-VHT40	54	38	5190	43.17	36.58	Pass
802.11ac-VHT40	54	46	5230	43.05	36.60	Pass
802.11ac-VHT40	54	151	5755	42.60	36.55	Pass
802.11ac-VHT40	54	159	5795	42.44	36.56	Pass
802.11ac-VHT80	117	42	5210	83.50	75.34	Pass
802.11ac-VHT80	117	155	5775	83.89	75.31	Pass

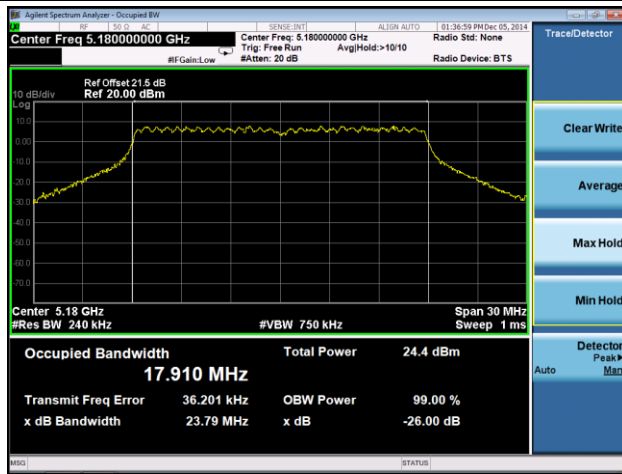
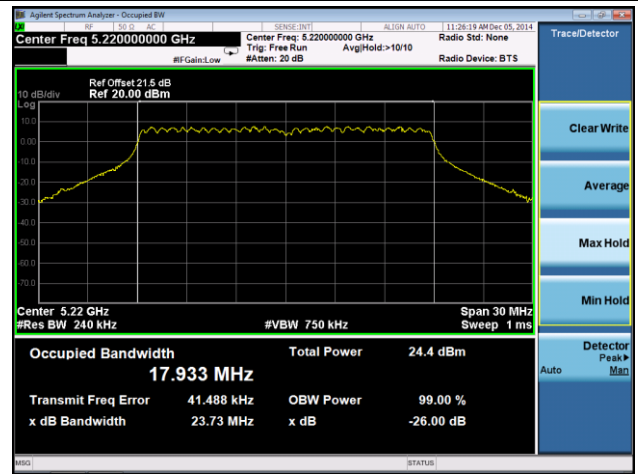
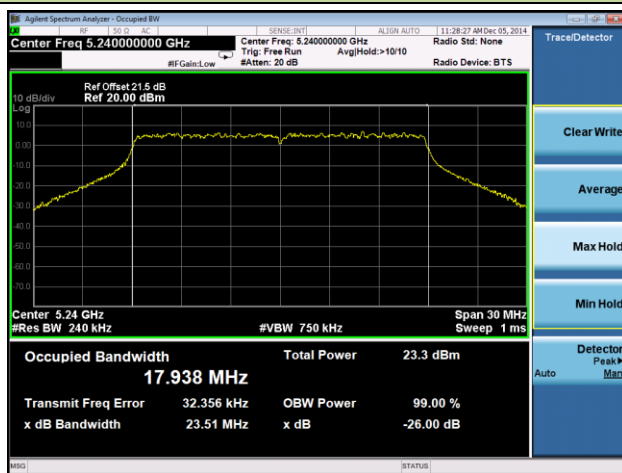
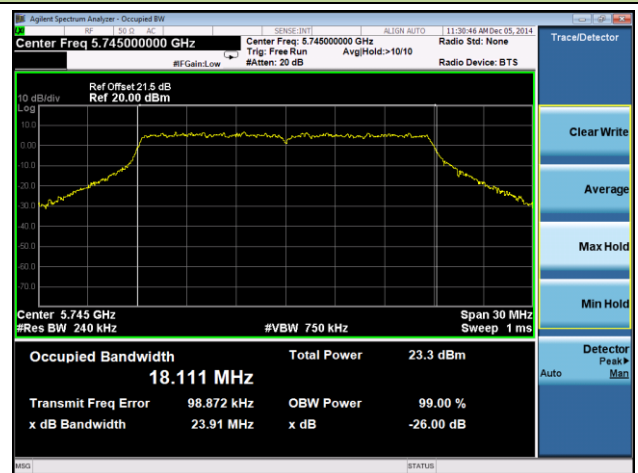
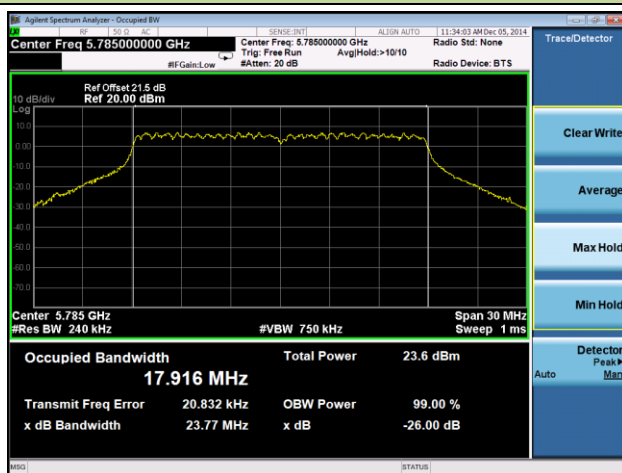
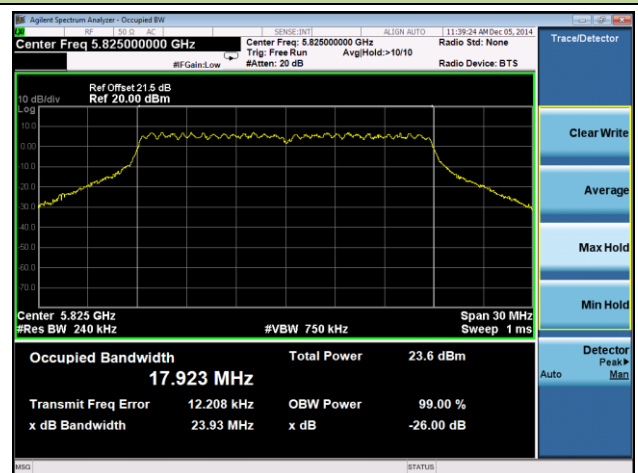
Test Mode	Data Rate (Mbps)	Channel No.	Frequency (MHz)	26dB Bandwidth (MHz)	99% Bandwidth (MHz)	Result
Ant 1 / Ant 0 + 1 + 2 + 3						
802.11a	6	36	5180	22.95	16.84	Pass
802.11a	6	44	5220	23.03	16.83	Pass
802.11a	6	48	5240	23.48	17.92	Pass
802.11a	6	149	5745	23.02	16.88	Pass
802.11a	6	157	5785	23.11	16.89	Pass
802.11a	6	165	5825	23.07	16.85	Pass
802.11n-HT20	13	36	5180	23.66	17.93	Pass
802.11n-HT20	13	44	5220	23.71	17.91	Pass
802.11n-HT20	13	48	5240	23.43	17.92	Pass
802.11n-HT20	13	149	5745	23.86	17.92	Pass
802.11n-HT20	13	157	5785	23.78	17.94	Pass
802.11n-HT20	13	165	5825	23.75	17.92	Pass
802.11n-HT40	27	38	5190	41.96	36.39	Pass
802.11n-HT40	27	46	5230	41.99	36.39	Pass
802.11n-HT40	27	151	5755	41.59	36.37	Pass
802.11n-HT40	27	159	5795	41.57	36.37	Pass
802.11ac-VHT20	13	36	5180	23.72	17.88	Pass
802.11ac-VHT20	13	44	5220	23.71	17.87	Pass
802.11ac-VHT20	13	48	5240	23.64	17.88	Pass
802.11ac-VHT20	13	149	5745	23.60	17.90	Pass
802.11ac-VHT20	13	157	5785	23.50	17.92	Pass
802.11ac-VHT20	13	165	5825	23.31	17.90	Pass
802.11ac-VHT40	27	38	5190	41.55	36.32	Pass
802.11ac-VHT40	27	46	5230	41.69	36.36	Pass
802.11ac-VHT40	27	151	5755	41.60	36.31	Pass
802.11ac-VHT40	27	159	5795	41.57	36.32	Pass
802.11ac-VHT80	58.6	42	5210	82.14	75.33	Pass
802.11ac-VHT80	58.6	155	5775	84.13	75.38	Pass

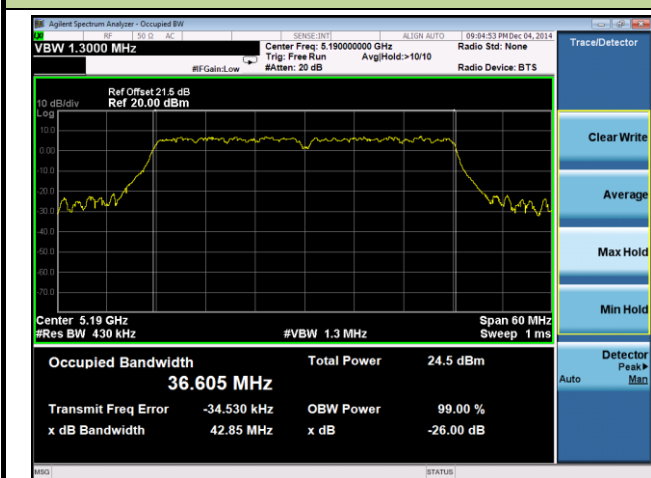
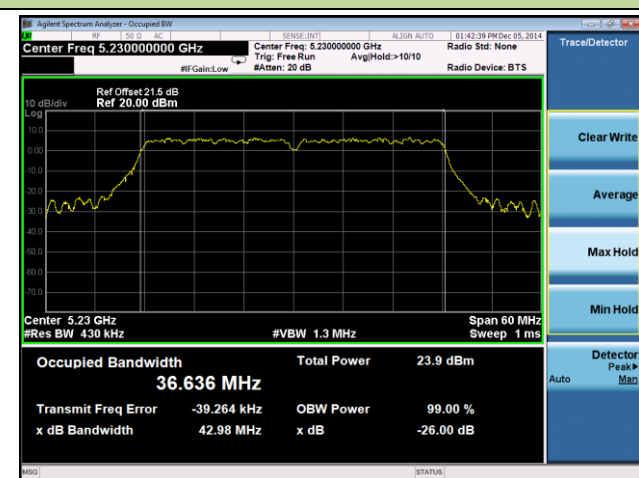
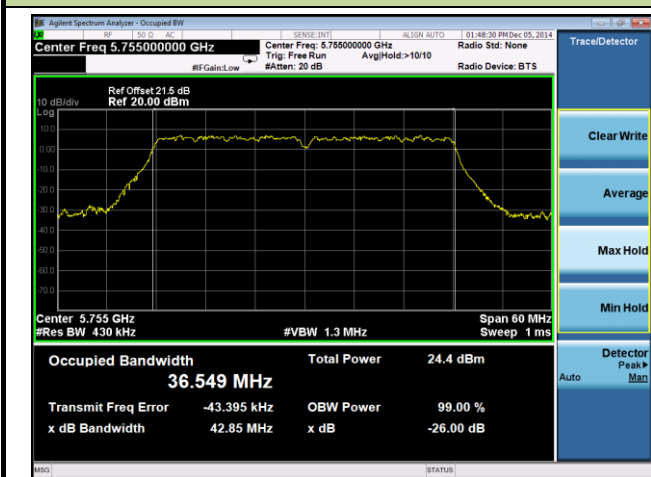
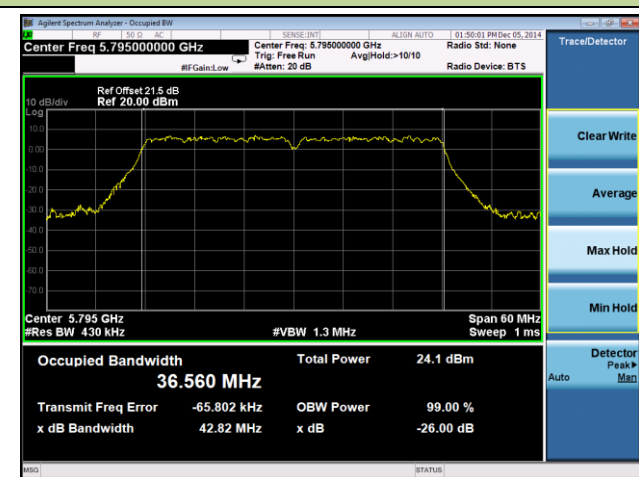
Test Mode	Data Rate (Mbps)	Channel No.	Frequency (MHz)	26dB Bandwidth (MHz)	99% Bandwidth (MHz)	Result
Ant 2 / Ant 0 + 1 + 2 + 3						
802.11a	6	36	5180	22.57	16.71	Pass
802.11a	6	44	5220	22.42	16.70	Pass
802.11a	6	48	5240	23.76	17.92	Pass
802.11a	6	149	5745	23.07	16.82	Pass
802.11a	6	157	5785	23.09	16.79	Pass
802.11a	6	165	5825	23.20	16.79	Pass
802.11n-HT20	13	36	5180	23.78	17.91	Pass
802.11n-HT20	13	44	5220	23.75	17.91	Pass
802.11n-HT20	13	48	5240	23.80	17.92	Pass
802.11n-HT20	13	149	5745	23.74	17.97	Pass
802.11n-HT20	13	157	5785	23.90	17.97	Pass
802.11n-HT20	13	165	5825	23.89	17.98	Pass
802.11n-HT40	27	38	5190	41.51	36.30	Pass
802.11n-HT40	27	46	5230	41.66	36.31	Pass
802.11n-HT40	27	151	5755	41.79	36.31	Pass
802.11n-HT40	27	159	5795	41.67	36.32	Pass
802.11ac-VHT20	13	36	5180	23.81	18.15	Pass
802.11ac-VHT20	13	44	5220	23.84	18.13	Pass
802.11ac-VHT20	13	48	5240	23.95	18.14	Pass
802.11ac-VHT20	13	149	5745	23.56	17.89	Pass
802.11ac-VHT20	13	157	5785	23.25	18.07	Pass
802.11ac-VHT20	13	165	5825	23.55	17.90	Pass
802.11ac-VHT40	27	38	5190	42.48	36.52	Pass
802.11ac-VHT40	27	46	5230	42.55	36.52	Pass
802.11ac-VHT40	27	151	5755	42.60	36.56	Pass
802.11ac-VHT40	27	159	5795	42.42	36.52	Pass
802.11ac-VHT80	58.6	42	5210	83.29	75.34	Pass
802.11ac-VHT80	58.6	155	5775	83.44	75.34	Pass

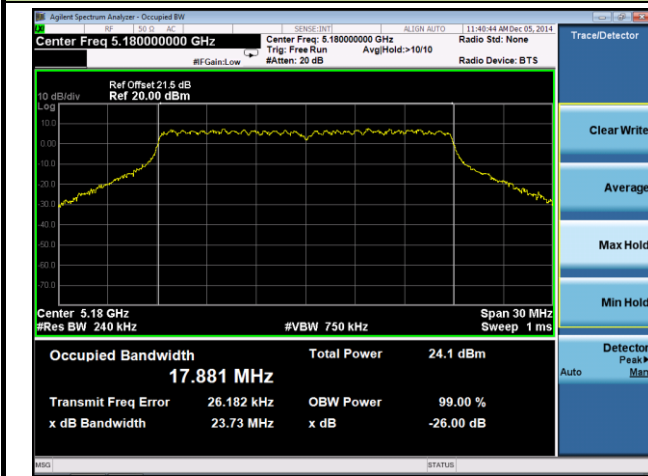
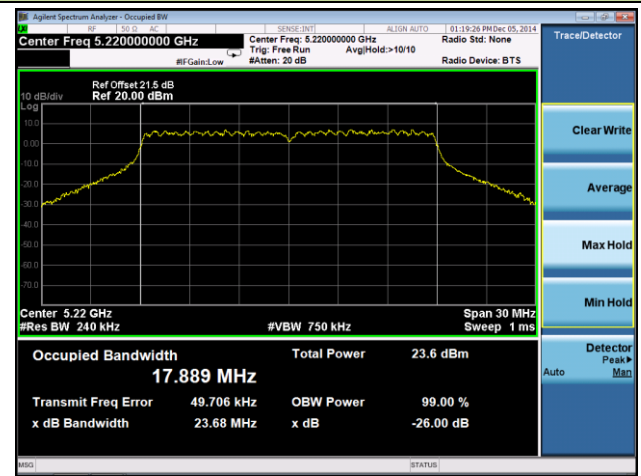
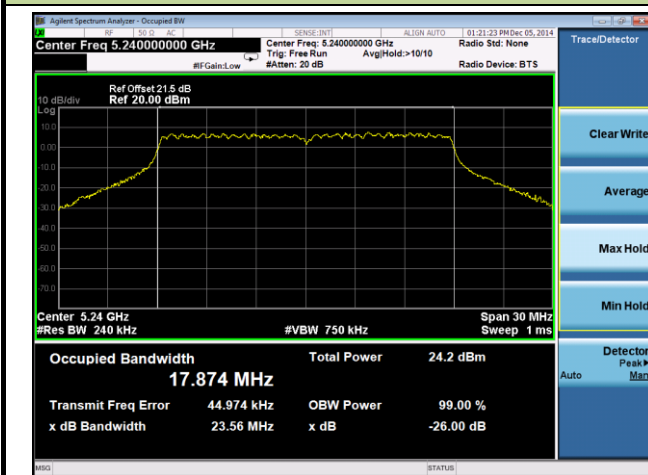
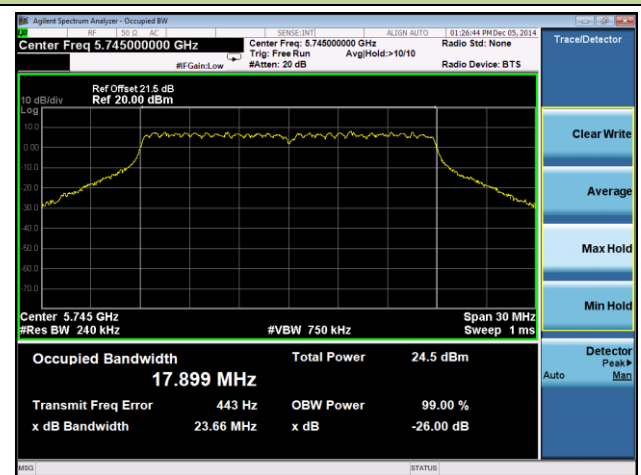
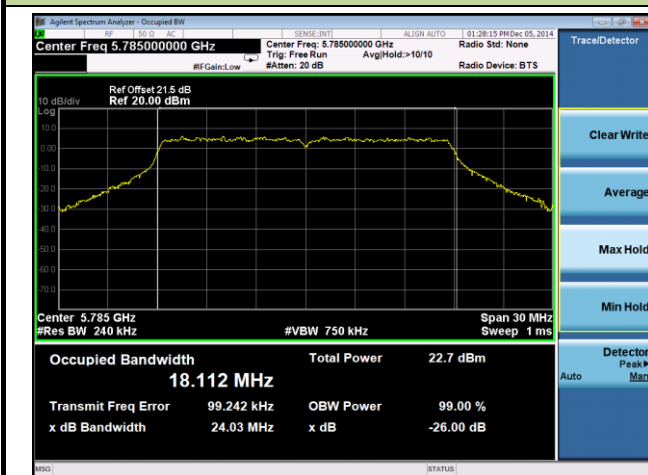
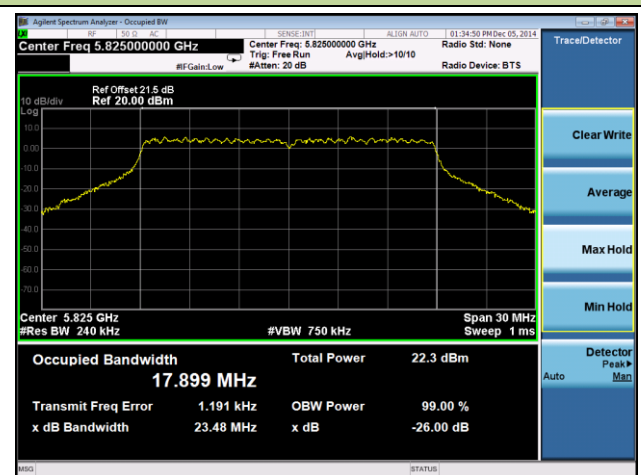


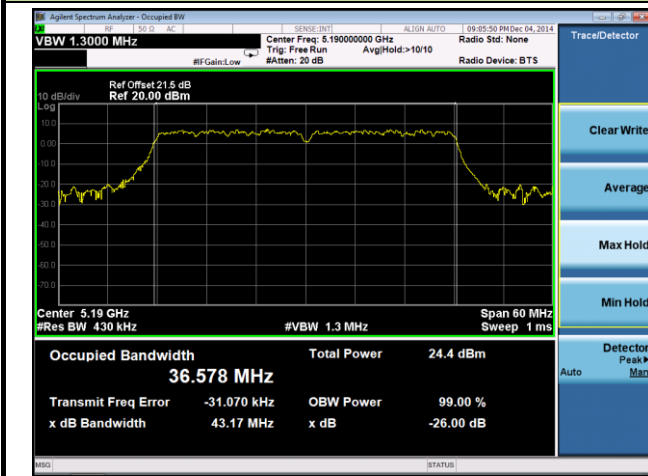
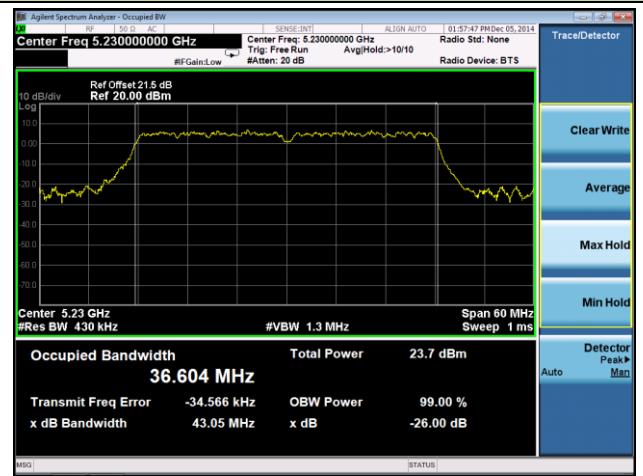
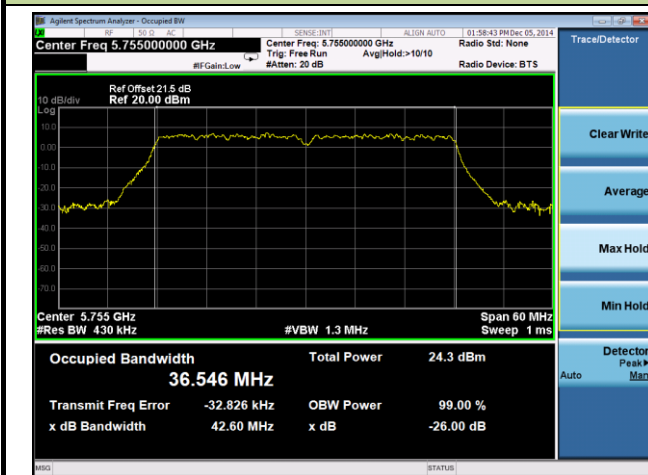
Test Mode	Data Rate (Mbps)	Channel No.	Frequency (MHz)	26dB Bandwidth (MHz)	99% Bandwidth (MHz)	Result
Ant 3 / Ant 0 + 1 + 2 + 3						
802.11a	6	36	5180	23.13	16.84	Pass
802.11a	6	44	5220	22.75	16.81	Pass
802.11a	6	48	5240	23.75	17.94	Pass
802.11a	6	149	5745	22.92	16.74	Pass
802.11a	6	157	5785	23.17	16.78	Pass
802.11a	6	165	5825	23.34	16.79	Pass
802.11n-HT20	13	36	5180	23.65	17.95	Pass
802.11n-HT20	13	44	5220	23.69	17.94	Pass
802.11n-HT20	13	48	5240	23.57	17.95	Pass
802.11n-HT20	13	149	5745	23.94	18.00	Pass
802.11n-HT20	13	157	5785	23.74	17.97	Pass
802.11n-HT20	13	165	5825	23.78	17.95	Pass
802.11n-HT40	27	38	5190	41.52	36.25	Pass
802.11n-HT40	27	46	5230	41.65	36.27	Pass
802.11n-HT40	27	151	5755	41.50	36.25	Pass
802.11n-HT40	27	159	5795	41.44	36.24	Pass
802.11ac-VHT20	13	36	5180	23.37	17.89	Pass
802.11ac-VHT20	13	44	5220	23.22	17.87	Pass
802.11ac-VHT20	13	48	5240	23.55	17.87	Pass
802.11ac-VHT20	13	149	5745	23.39	17.88	Pass
802.11ac-VHT20	13	157	5785	23.53	17.88	Pass
802.11ac-VHT20	13	165	5825	23.74	17.88	Pass
802.11ac-VHT40	27	38	5190	41.54	36.35	Pass
802.11ac-VHT40	27	46	5230	41.89	36.37	Pass
802.11ac-VHT40	27	151	5755	41.79	36.33	Pass
802.11ac-VHT40	27	159	5795	41.79	36.33	Pass
802.11ac-VHT80	58.6	42	5210	82.40	75.38	Pass
802.11ac-VHT80	58.6	155	5775	83.03	75.38	Pass

**802.11a 26dB Bandwidth & 99% Bandwidth - Ant 0 / Ant 0 + 1 + 2 + 3**
**Channel 36 (5180MHz)**

**Channel 44 (5220MHz)**

**Channel 48 (5240MHz)**

**Channel 149 (5745MHz)**

**Channel 157 (5785MHz)**

**Channel 165 (5825MHz)**


**802.11n-HT20 26dB Bandwidth & 99% Bandwidth - Ant 0 / Ant 0 + 1 + 2 + 3**
**Channel 36 (5180MHz)**

**Channel 44 (5220MHz)**

**Channel 48 (5240MHz)**

**Channel 149 (5745MHz)**

**Channel 157 (5785MHz)**

**Channel 165 (5825MHz)**


**802.11n-HT40 26dB Bandwidth & 99% Bandwidth - Ant 0 / Ant 0 + 1 + 2 + 3**
**Channel 38 (5190MHz)**

**Channel 46 (5230MHz)**

**Channel 151 (5755MHz)**

**Channel 159 (5795MHz)**


**802.11ac-VHT20 26dB Bandwidth & 99% Bandwidth - Ant 0 / Ant 0 + 1 + 2 + 3**
**Channel 36 (5180MHz)**

**Channel 44 (5220MHz)**

**Channel 48 (5240MHz)**

**Channel 149 (5745MHz)**

**Channel 157 (5785MHz)**

**Channel 165 (5825MHz)**


**802.11ac-VHT40 26dB Bandwidth & 99% Bandwidth - Ant 0 / Ant 0 + 1 + 2 + 3**
**Channel 38 (5190MHz)**

**Channel 46 (5230MHz)**

**Channel 151 (5755MHz)**

**Channel 159 (5795MHz)**
