



Engineering and Testing for EMC and Safety Compliance



Accredited under A2LA Testing Certificate # 2653.01

**Certification Application Report for Full Modular Approval
FCC Part 15.247 & Industry Canada RSS-210**

Test Lab: Rhein Tech Laboratories, Inc. Tel: 703-689-0368 360 Herndon Parkway Fax: 703-689-2056 Suite 1400 www.rheintech.com Herndon, VA 20170 E-Mail: atcbinfo@rheintech.com		Applicant: Hunter Engineering Co. Tel: 314-731-3020 11250 Hunter Drive Fax: 314-731-9932 Bridgeton, MO 63044-2391 Contact: Jim McClenahan	
FCC ID/IC:	LS3-45-1281/ 2938A-451281	Test Report Date:	September 28, 2009
Platform:	N/A	RTL Work Order #:	2009249
Model:	45-1281	RTL Quote #:	QRTL09-384A
American National Standard Institute:	ANSI C63.4-2003: Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz		
FCC Classification:	DTS – Part 15 Digital Transmission System		
FCC Rule Part(s)/Guidance:	FCC Rules Part 15.247: Operation within the bands 920-928 MHz, 2400-2483.5 MHz and 5725-5850 MHz Direct Sequence System October 1, 2008, DA 00-705		
Industry Canada:	RSS-210 Issue 7: Low Power License-Exempt Communications Devices		
Digital Interface Information:	Digital Interface was found to be compliant		
Frequency Range (MHz)	Output Power (W)*	Frequency Tolerance	Emission Designator
2405 – 2480	0.00004	N/A	3M30FXD

* power is peak conducted

I, the undersigned, hereby declare that the equipment tested and referenced in this report conforms to the identified standard(s) as described in this test report. No modifications were made to the equipment during testing in order to achieve compliance with these standards. Furthermore, there was no deviation from, additions to, or exclusions from, the applicable parts of FCC Part 2, FCC Part 15, Industry Canada RSS-210 and ANSI C63.4.

Signature: Desmond A. Fraser

Date: September 28, 2009

Typed/Printed Name: Desmond A. Fraser

Position: President

This report may not be reproduced, except in full, without the written approval of Rhein Tech Laboratories, Inc. and Hunter Engineering Company. The test results relate only to the item(s) tested.

Table of Contents

1	General Information	5
1.1	Scope	5
1.2	Description of EUT	5
1.3	Test Facility	5
1.4	Related Submittal(s)/Grant(s)	5
1.5	Modifications	5
2	Test Information	6
2.1	Description of Test Modes	6
2.2	Exercising the EUT	6
2.3	Test Result Summary.....	6
2.4	Test System Details	7
2.5	Configuration of Tested System.....	7
3	Peak Output Power - 15.247(b)(3); RSS-Gen	8
3.1	Power Output Test Procedure.....	8
3.2	Power Output Test Data.....	8
4	Compliance with the Band Edge – FCC 15.247(d); RSS-Gen	9
4.1	Band Edge Test Procedure.....	9
4.2	Band Edge Test Results	10
4.2.1	Calculation of Lower Band Edge.....	10
4.2.2	Lower Band Edge – Conducted Delta Plot	10
4.2.3	Calculation of Upper Band Edge.....	11
4.2.4	Upper Band Edge – Conducted Delta Plot	11
5	Antenna Conducted Spurious Emissions - 15.247(d); RSS-Gen	12
5.1	Antenna Conducted Spurious Emissions Test Procedures	12
6	6 dB Bandwidth - 15.247(a)(2); RSS-210 A8.2(a)	13
6.1	6 dB Bandwidth Test Procedure – Minimum 6 dB Bandwidth	13
6.2	6 dB Bandwidth Test Results	13
7	Power Spectral Density - 15.247(e); RSS-210 A8.2(b)	17
7.1	Power Spectral Density Test Procedure	17
7.2	Power Spectral Density Test Data	17
8	Conducted Emissions Measurement Limits – FCC 15.207; RSS-Gen	21
8.1	Limits of Conducted Emissions Measurement.....	21
8.2	Site and Test Description	21
8.3	Conducted Emissions Test Data.....	22
9	Radiated Emissions - 15.209; RSS-210 6.2.1	23
9.1	Limits of Radiated Emissions Measurement.....	23
9.2	Radiated Emissions Measurement Test Procedure.....	23
9.3	Radiated Emissions Test Results	25
9.3.1	Radiated Emissions Digital Test Data.....	25
9.3.2	Radiated Emissions Harmonics/Spurious Test Data	25
10	99% Bandwidth - RSS-Gen 4.6.1	27
10.1	99% Bandwidth Test Data.....	27
11	Conclusion	30

Figure Index

Figure 2-1:	Configuration of System under Test.....	7
-------------	---	---

Table Index

Table 2-1:	Channels Tested	6
Table 2-2:	Test Result Summary – FCC Part 15 Subpart C (Section 15.247).....	6
Table 2-3:	Equipment under Test.....	7
Table 3-1:	Power Output Test Equipment	8
Table 3-2:	Power Output Test Data.....	8
Table 4-1:	Band Edge Test Equipment	9
Table 5-1:	Antenna Conducted Spurious Emissions Test Equipment	12
Table 6-1:	6 dB Bandwidth Test Equipment.....	13
Table 6-2:	6 dB Bandwidth Test Data	13
Table 7-1:	Power Spectral Density Test Equipment	17
Table 7-2:	Power Spectral Density Test Data	17
Table 8-1:	Conducted Emissions Test Equipment	21
Table 8-2:	Conducted Emissions Test Data – Neutral - TX Mode	22
Table 8-3:	Conducted Emissions Test Data – Hot – TX Mode	22
Table 9-1:	Radiated Emissions Test Equipment	24
Table 9-2:	Digital Radiated Emissions Test Data.....	25
Table 9-3:	Radiated Emissions Harmonics/Spurious - 2405 MHz	25
Table 9-4:	Radiated Emissions Harmonics/Spurious - 2440 MHz	25
Table 9-5:	Radiated Emissions Harmonics/Spurious 2480 MHz	26
Table 10-1:	99% Bandwidth Test Equipment.....	27
Table 10-2:	99% Bandwidth Test Data.....	27

Plot Index

Plot 4-1:	Lower Band Edge.....	10
Plot 4-2:	Upper Band Edge.....	11
Plot 6-1:	6 dB Bandwidth – 2405 MHz.....	14
Plot 6-2:	6 dB Bandwidth – 2440 MHz.....	15
Plot 6-3:	6 dB Bandwidth – 2480 MHz.....	16
Plot 7-1:	Power Spectral Density – 2405 MHz	18
Plot 7-2:	Power Spectral Density – 2440 MHz	19
Plot 7-3:	Power Spectral Density – 2480 MHz	20
Plot 10-1:	99% Bandwidth – 2405 MHz.....	27
Plot 10-2:	99% Bandwidth – 2440 MHz.....	28
Plot 10-3:	99% Bandwidth – 2480 MHz.....	29

Appendix Index

Appendix A:	FCC Part 1.1307, 1.1310, 2.1091, 2.1093; IC RSS-Gen: RF Exposure.....	31
Appendix B:	ATCB Agency Authorization Letter	32
Appendix C:	FCC Confidentiality Request Letter.....	33
Appendix D:	FCC Modular Approval – DA 00-1407	34
Appendix E:	IC Listing Requirements & IC Agent Authority Letters	35
Appendix F:	IC Confidentiality Request.....	36
Appendix G:	IC Modular Construction – RSS-Gen 7.1.1	37
Appendix H:	Label and Label Location	38
Appendix I:	Technical Operational Description	40
Appendix J:	Schematics	41
Appendix K:	Block Diagram	42
Appendix L:	Manual.....	43
Appendix M:	Test Photographs.....	44
Appendix N:	External Photographs.....	48
Appendix O:	Internal Photographs.....	51

Photograph Index

Photograph 1:	ID Label & Location	38
Photograph 2:	“Contains FCC ID.....” Label Sample	39
Photograph 3:	Radiated Emissions Testing – Front View	44
Photograph 4:	Radiated Emissions Testing – Back View	45
Photograph 5:	Conducted Emissions Testing – Front View	46
Photograph 6:	Conducted Emissions Testing – Back View.....	47
Photograph 7:	Top of PCB.....	48
Photograph 8:	Top of PCB without Shield	49
Photograph 9:	Bottom of PCB.....	50
Photograph 10:	Top of PCB.....	51
Photograph 11:	Top of PCB without Shield	52
Photograph 12:	Bottom of PCB.....	53

1 General Information

1.1 Scope

This is an original certification application request.

Applicable Standards:

- FCC Rules Part 15.247: Frequency Hopping, Direct Spread Spectrum and Hybrid Systems that are in operation within the bands of 902-928 MHz, 2400-2483.5 MHz and 5725-5850 MHz.
- Industry Canada RSS-210: Low Power License-Exempt Communications Devices

1.2 Description of EUT

Equipment Under Test	Transceiver
Model	45-1281
Power Supply	2 AA batteries (1.5V each)
Modulation Type	DSSS
Frequency Range	2405 – 2480 MHz
Antenna Types	PCB inverted F

1.3 Test Facility

The open area test site and conducted measurement facility used to collect the radiated data is located at 360 Herndon Parkway, Suite 1400, Herndon, Virginia 20170. This site has been fully described in a report and approved by the Federal Communications Commission to perform AC line conducted and radiated emissions testing (ANSI C63.4-2003).

1.4 Related Submittal(s)/Grant(s)

This is an original application for **full modular approval** for Hunter Engineering Company Model 45-1281, FCC ID: LS3-45-1281, IC: 2938A-451281.

1.5 Modifications

No modifications were made to the equipment during testing in order to achieve compliance with these standards.

2 Test Information

2.1 Description of Test Modes

In accordance with FCC 15.31(m), and because the EUT utilizes an operating band greater than 10 MHz, the following frequencies were tested:

Table 2-1: Channels Tested

Channel	Frequency
Low	2405
Middle	2440
High	2480

2.2 Exercising the EUT

The EUT was supplied with test firmware programmed with a high, mid, and low channel for testing. The EUT was tested in all three orthogonal planes in order to determine worst-case emissions. The EUT was provided with software to continuously transmit during testing. The carrier was also checked to verify that information was being transmitted. There were no deviations from the test standard(s) and/or methods. The test results reported relate only to the item tested.

2.3 Test Result Summary

Table 2-2: Test Result Summary – FCC Part 15 Subpart C (Section 15.247)

Standard	Test	Pass/Fail or N/A
FCC 15.207	AC Power Conducted Emissions	Pass
FCC 15.209	Radiated Emissions	Pass
FCC 15.247(a)(2)	6 dB Bandwidth	Pass
FCC 15.247(b)	Maximum Peak Power Output	Pass
FCC 15.247(d)	Antenna Conducted Spurious Emissions	Pass
FCC 15.247(e)	Power Spectral Density	Pass
FCC 15.247(d)	Band Edge Measurement	Pass
RSS-Gen	99% Bandwidth	N/A

2.4 Test System Details

The test samples were received on August 27, 2009. The FCC identifiers for all applicable equipment, plus descriptions of all cables used in the tested system, are identified in the following table.

Table 2-3: Equipment under Test

Part	Manufacturer	Model	Serial Number	FCC ID	Cable Description	RTL Bar Code
Transceiver	Hunter Engineering Company	45-1281	10502ET	LS3-45-1281	N/A	19239
Transceiver	Hunter Engineering Company	45-1281	10505ET	LS3-45-1281	N/A	19240
Test Controller	Hunter Engineering Company	N/A	N/A	N/A	N/A	19183

2.5 Configuration of Tested System

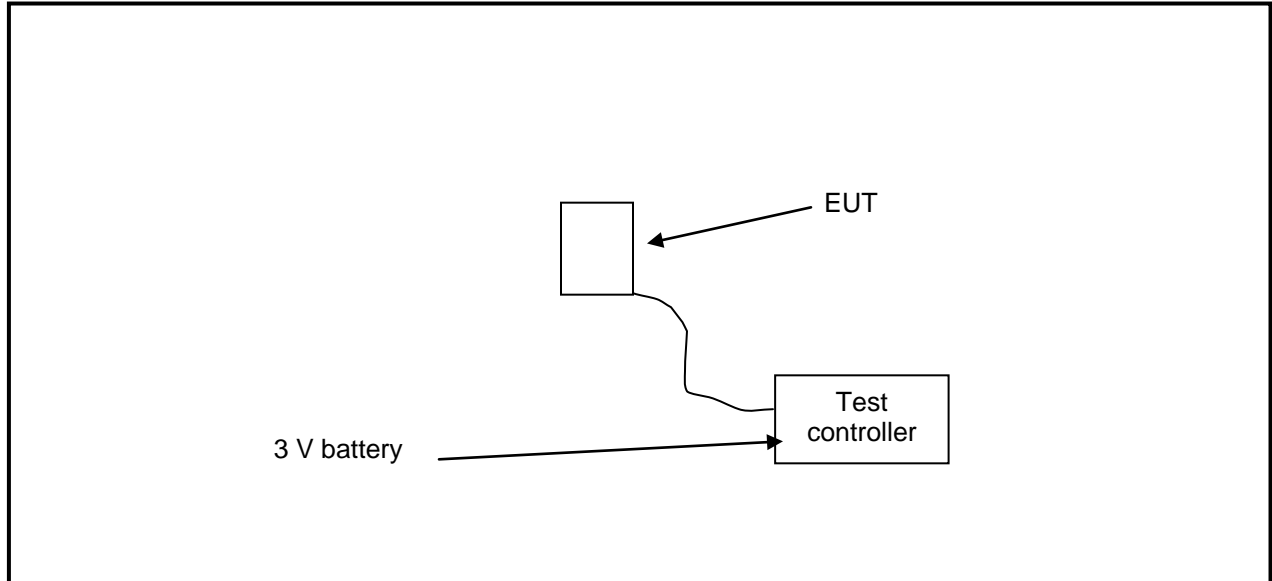


Figure 2-1: Configuration of System under Test

3 Peak Output Power - 15.247(b)(3); RSS-Gen

3.1 Power Output Test Procedure

A conducted power measurement of the EUT was taken.

Table 3-1: Power Output Test Equipment

RTL Asset #	Manufacturer	Model	Part Type	Serial Number	Calibration Due Date
901413	Agilent Technologies	E4448A	Spectrum Analyzer (3 Hz – 50 GHz)	US440203416	7/31/10

3.2 Power Output Test Data

Table 3-2: Power Output Test Data

Channel	Frequency (MHz)	Peak Power Conducted Output (dBm)
Low	2405	-13.8
Middle	2440	-14.3
High	2480	-15.2

Test Personnel:

Dan Baltzell
Test Engineer



Signature

September 24, 2009
Date Of Test

4 Compliance with the Band Edge – FCC 15.247(d); RSS-Gen

4.1 Band Edge Test Procedure

The transmitter output was connected to its appropriate antenna. A conducted antenna port delta measurement was performed from the highest peak in the restricted band to the peak of the fundamental, and subtracted from the radiated field strength; the result was compared to the limit.

Table 4-1: Band Edge Test Equipment

RTL Asset #	Manufacturer	Model	Part Type	Serial Number	Calibration Due Date
900772	EMCO	3161-02	Horn Antenna 2 - 4 GHz	9804-1044	6/14/10
900878	Rhein Tech Laboratories	AM3-1197-0005	3 meter Antenna Mast, polarizing	Outdoor Range 1	Not Required
901516	Insulated Wire, Inc.	KPS-1503-2400-KPS-09302008	RF cable, 20'	NA	10/17/09
901517	Insulated Wire Inc.	KPS-1503-360-KPS-09302008	RF cable 36"	NA	10/17/09
901242	Rhein Tech Laboratories	WRT-000-0003	Wood Rotating Table	N/A	Not Required
900913	Hewlett Packard	85462A	EMI Receiver RF Section (9 KHz – 6.5 GHz)	3325A00159	6/8/10
900914	Hewlett Packard	85460A	RF Filter Section, 100 KHz to 6.5 GHz	3330A00107	6/8/10
901215	Hewlett Packard	8596EM	Spectrum Analyzer (9 kHz - 12.8 GHz)	3826A00144	10/23/09

4.2 Band Edge Test Results

4.2.1 Calculation of Lower Band Edge

77.8 dBuV/m is the field strength measurement, from which the delta measurement of 48 dB is subtracted, resulting in a level of 29.8 dB. This level has a margin of 24.2 dB below the limit of 54 dBuV/m.


Calculation: $77.8 \text{ dBuV/m} - 48 \text{ dB} - 54 \text{ dBuV/m} = -24.2 \text{ dB}$

Peak Field Strength of Lower Band Edge (1 MHz RBW/8 MHz VBW) = 81.5 dBuV/m

Average Field Strength of Lower Band Edge (1 MHz RBW/10 Hz VBW) = 77.8 dBuV/m

Delta measurement = 48 dB

4.2.2 Lower Band Edge – Conducted Delta Plot

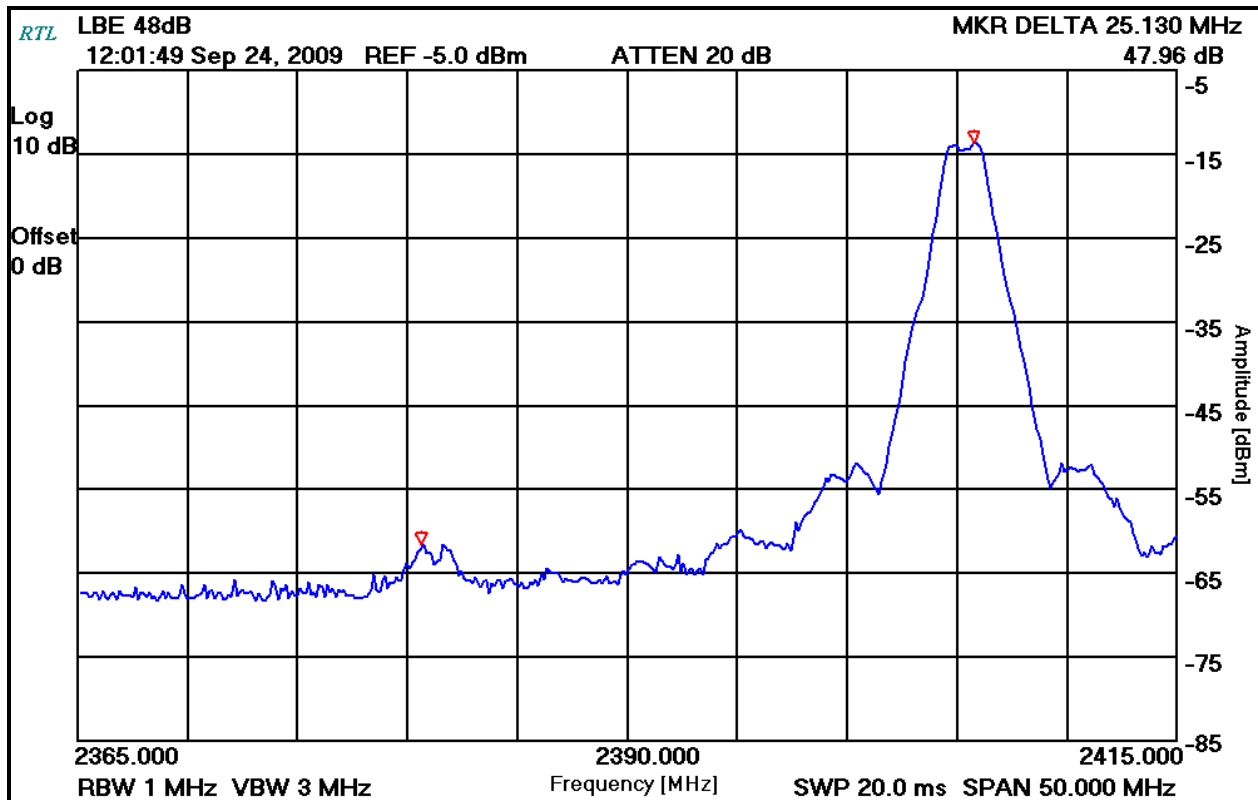

Plot 4-1: Lower Band Edge


4.2.3 Calculation of Upper Band Edge

75.6 dBuV/m is the field strength measurement, from which the delta measurement of 50.7 dB is subtracted, resulting in a level of 24.9 dB. This level has a margin of 29.1 dB below the limit of 54 dBuV/m.

Calculation: $75.6 \text{ dBuV/m} - 50.7 \text{ dB} - 54 \text{ dBuV/m} = -29.1 \text{ dB}$

Peak Field Strength of Lower Band Edge (1 MHz RBW/8 MHz VBW) = 78.7 dBuV/m
 Average Field Strength of Lower Band Edge (1 MHz RBW/10 Hz VBW) = 75.6 dBuV/m
 Delta measurement = 50.7 dB

4.2.4 Upper Band Edge – Conducted Delta Plot

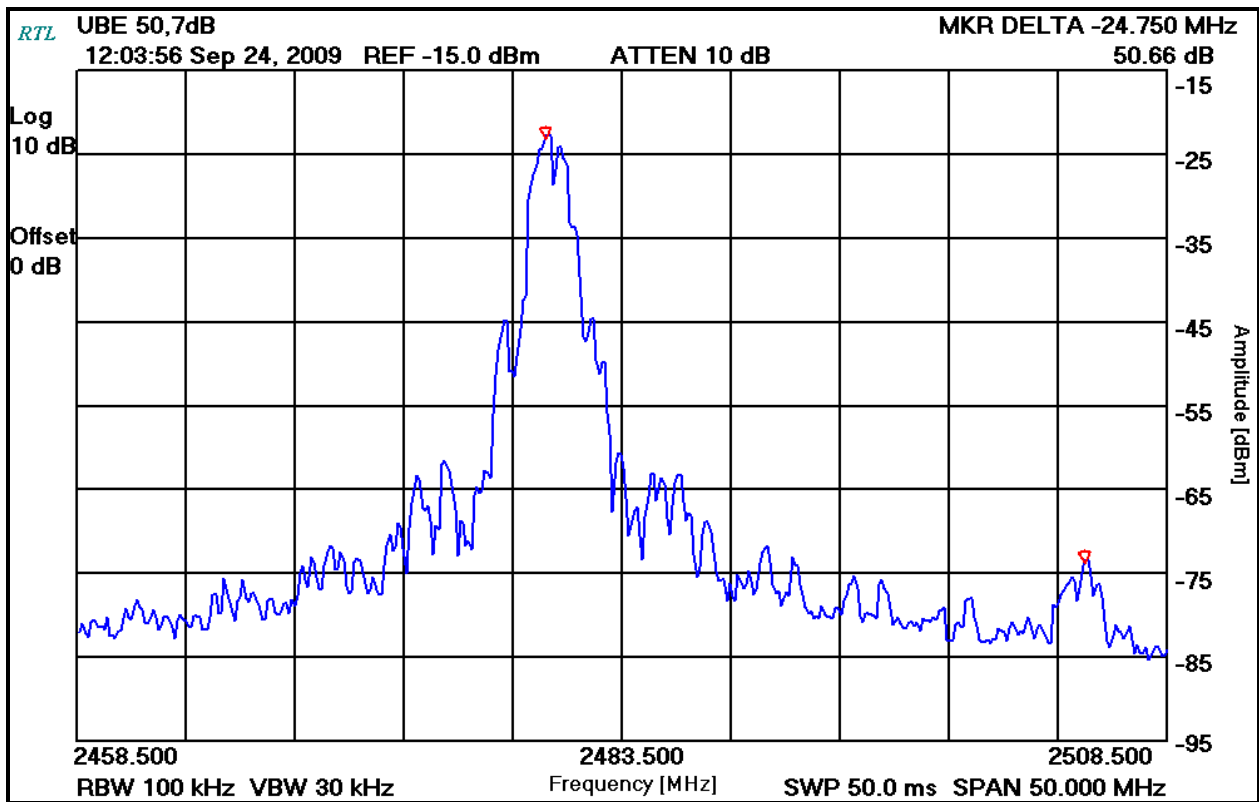

Plot 4-2: Upper Band Edge

Test Personnel:

Dan Baltzell
 Test Engineer

Signature

September 24, 2009
 Date Of Test

5 Antenna Conducted Spurious Emissions - 15.247(d); RSS-Gen

5.1 Antenna Conducted Spurious Emissions Test Procedures


Antenna spurious emissions per FCC 15.247(c) was measured from the EUT antenna port using a 50 ohm spectrum analyzer with the resolution bandwidth set at 100 kHz, and the video bandwidth set at 1 MHz. The modulated carrier was identified at the following frequencies: 2405 MHz, 2440 MHz and 2480 MHz.

Other than the data presented below, no harmonics or spurs were found within 20 dB (note that we are reporting power as peak) of the limit from the carrier to the 10th harmonic of the carrier frequency. Per FCC 15.31(o), no other data is being reported.

Table 5-1: Antenna Conducted Spurious Emissions Test Equipment

RTL Asset #	Manufacturer	Model	Part Type	Serial Number	Calibration Due Date
901413	Agilent Technologies	E4448A	Spectrum Analyzer	US44020346	7/31/10

Test Personnel:

Richard B. McMurray, P.E. Test Engineer	 Signature	August 28, 2009 Date Of Test
--	--	---------------------------------

6 6 dB Bandwidth - 15.247(a)(2); RSS-210 A8.2(a)

6.1 6 dB Bandwidth Test Procedure – Minimum 6 dB Bandwidth

The minimum 6 dB bandwidths per FCC 15.247(a)(2) were measured using a 50 ohm spectrum analyzer with the resolution bandwidth set at 100 kHz, and the video bandwidth set at 300 Hz. The device was modulated. The minimum 6 dB bandwidths are presented below.

Table 6-1: 6 dB Bandwidth Test Equipment


RTL Asset #	Manufacturer	Model	Part Type	Serial Number	Calibration Due Date
901413	Agilent Technologies	E4448A	Spectrum Analyzer (3 Hz – 50 GHz)	US440203416	7/31/10

6.2 6 dB Bandwidth Test Results


Table 6-2: 6 dB Bandwidth Test Data

Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)	Pass/Fail
2405	1.33	0.5	Pass
2440	1.34	0.5	Pass
2480	1.50	0.5	Pass


Plot 6-1: 6 dB Bandwidth – 2405 MHz

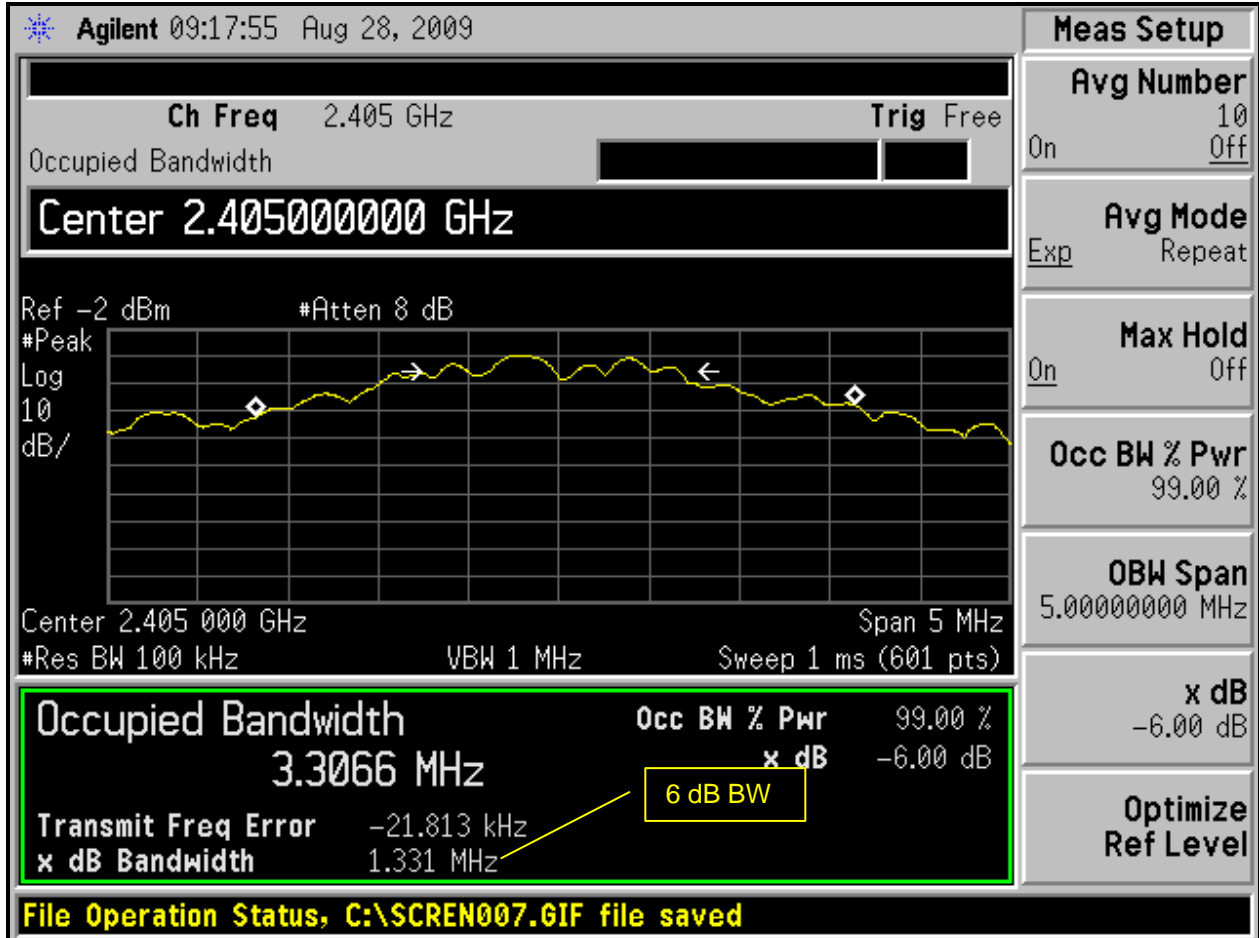

Plot 6-2: 6 dB Bandwidth – 2440 MHz

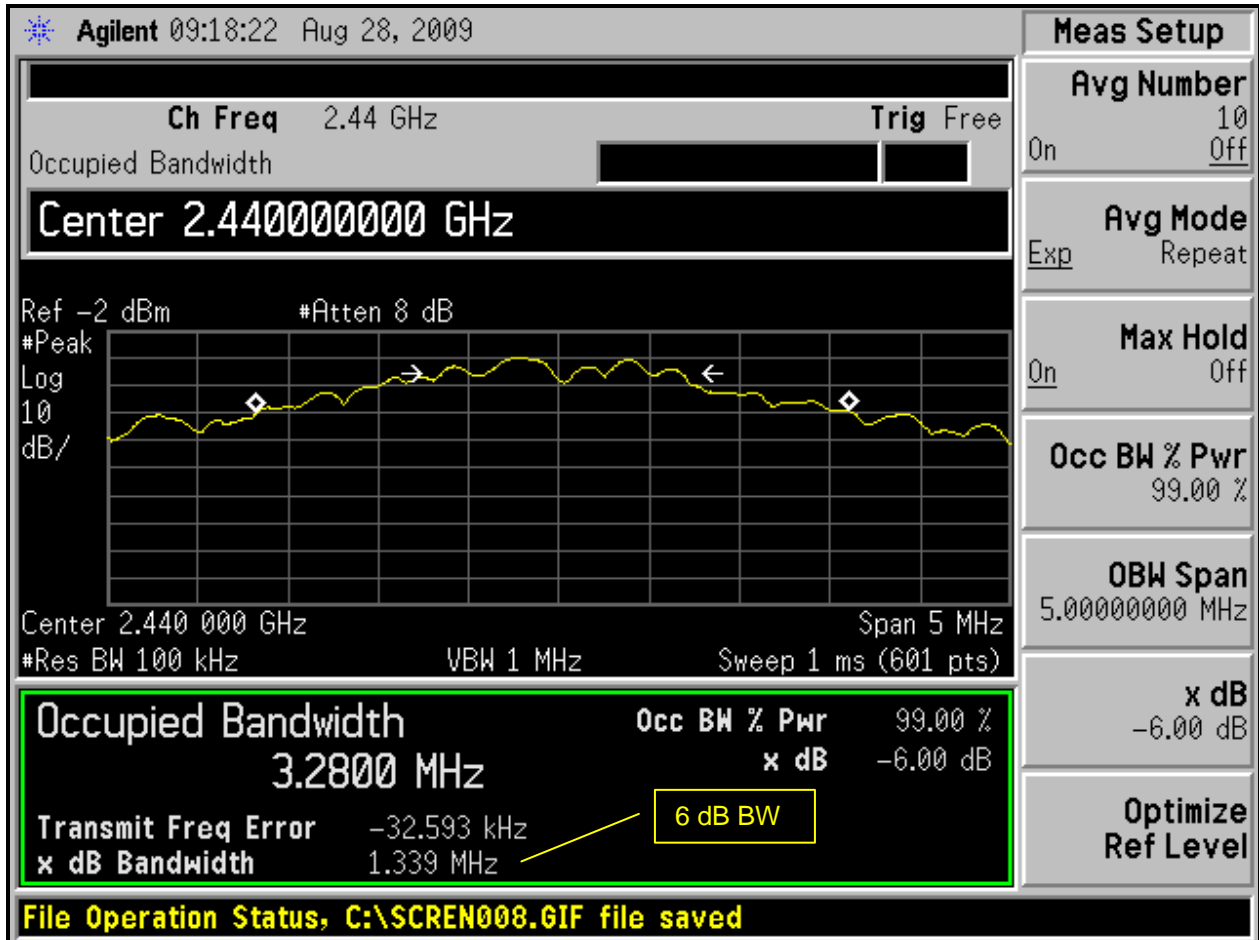

Plot 6-3: 6 dB Bandwidth – 2480 MHz

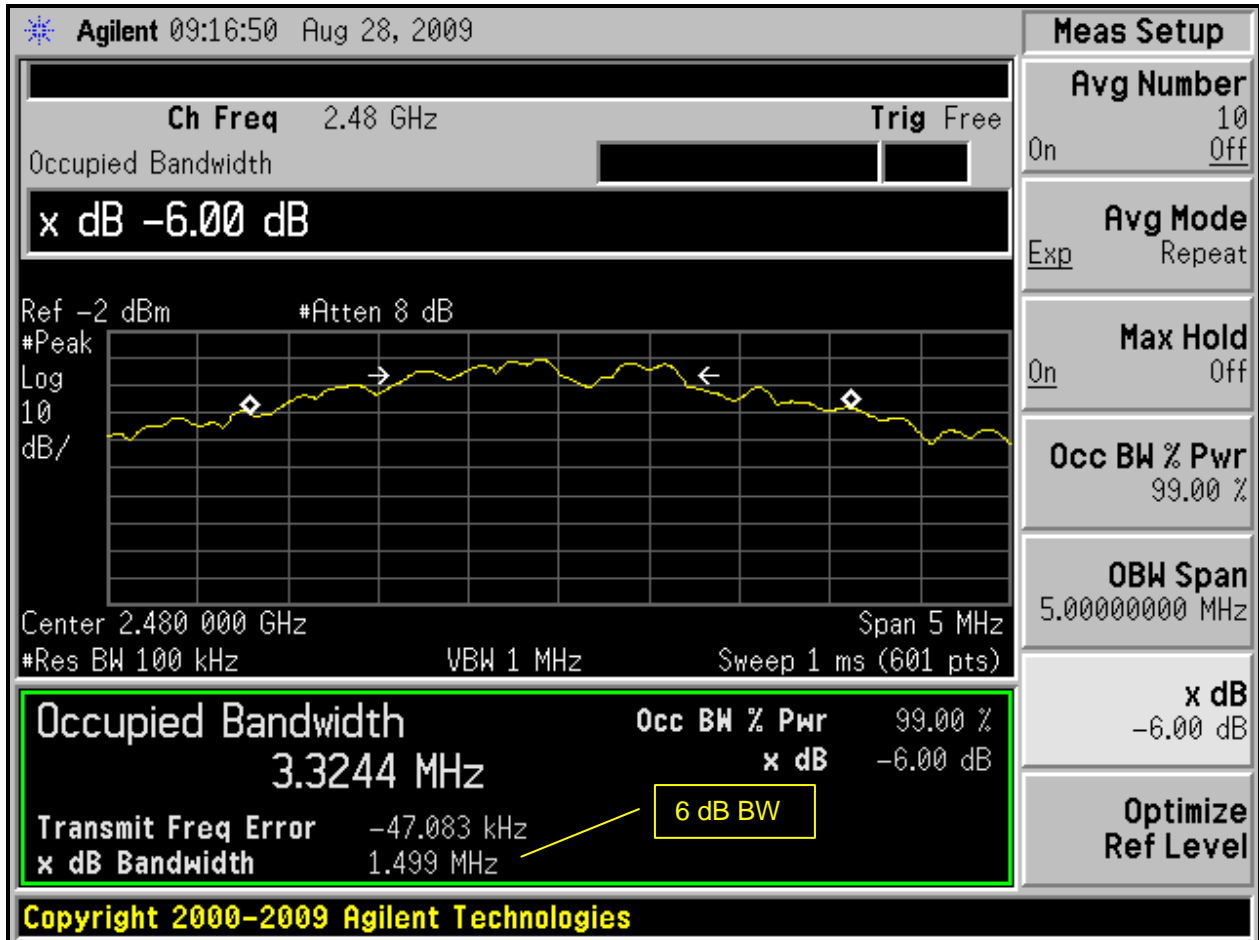

Test Personnel:

Richard B. McMurray, P.E.
 Test Engineer

Richard B. McMurray

Signature

August 28, 2009
 Date Of Test

7 Power Spectral Density - 15.247(e); RSS-210 A8.2(b)

7.1 Power Spectral Density Test Procedure

The power spectral density per FCC 15.247(e) was measured using a 50 ohm spectrum analyzer with the resolution bandwidth set at 3 kHz, the video bandwidth set at 30 kHz, and the sweep time set at 100 seconds. The spectral lines were resolved for the modulated carriers at 2405, 2440 and 2480 MHz. These levels are below the +8 dBm limit. See the power spectral density table and plots.

Table 7-1: Power Spectral Density Test Equipment


RTL Asset #	Manufacturer	Model	Part Type	Serial Number	Calibration Due Date
901413	Agilent Technologies	E4448A	Spectrum Analyzer (3 Hz – 50 GHz)	US440203416	7/31/10

7.2 Power Spectral Density Test Data


Table 7-2: Power Spectral Density Test Data

Frequency (MHz)	RF Power Level (dBm)	Maximum Limit +8dBm	Pass/Fail
2405	-16.9	8	Pass
2440	-16.9	8	Pass
2480	-17.0	8	Pass


Plot 7-1: Power Spectral Density – 2405 MHz

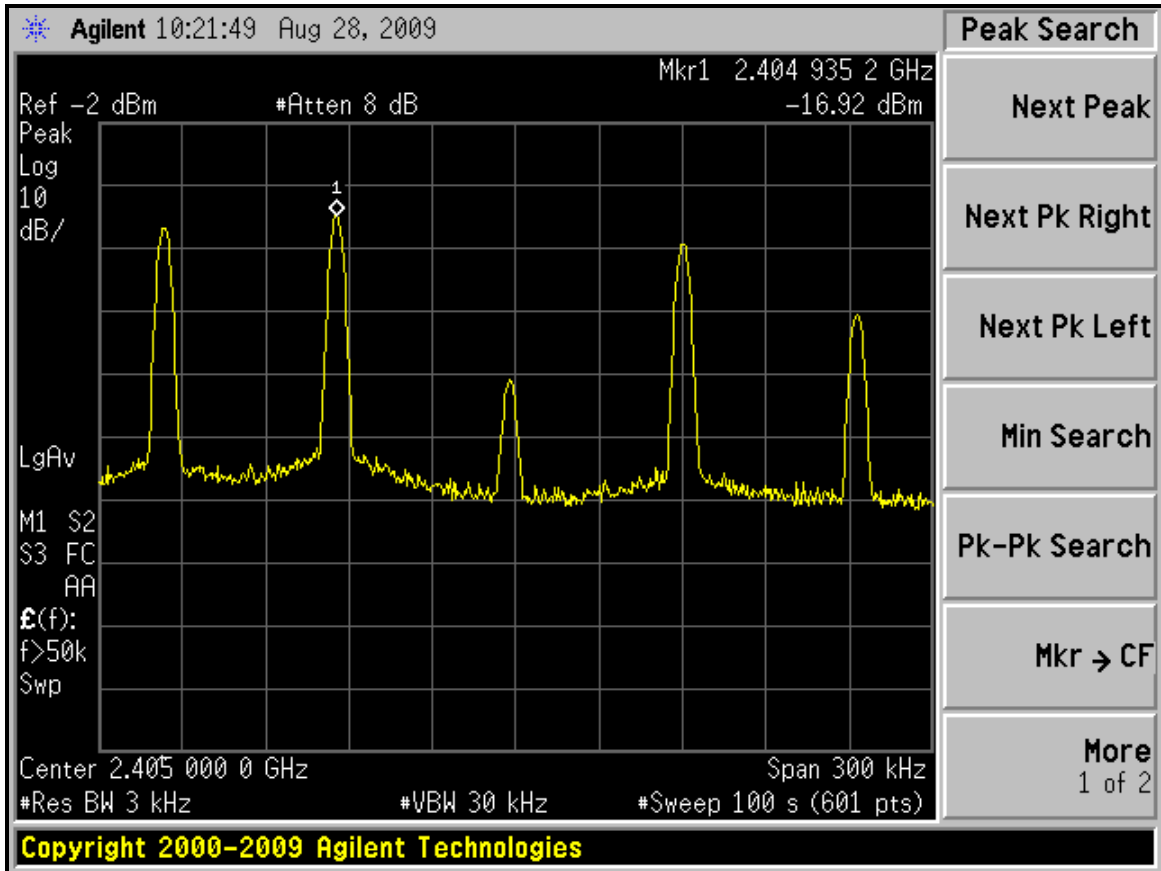

Plot 7-2: Power Spectral Density – 2440 MHz

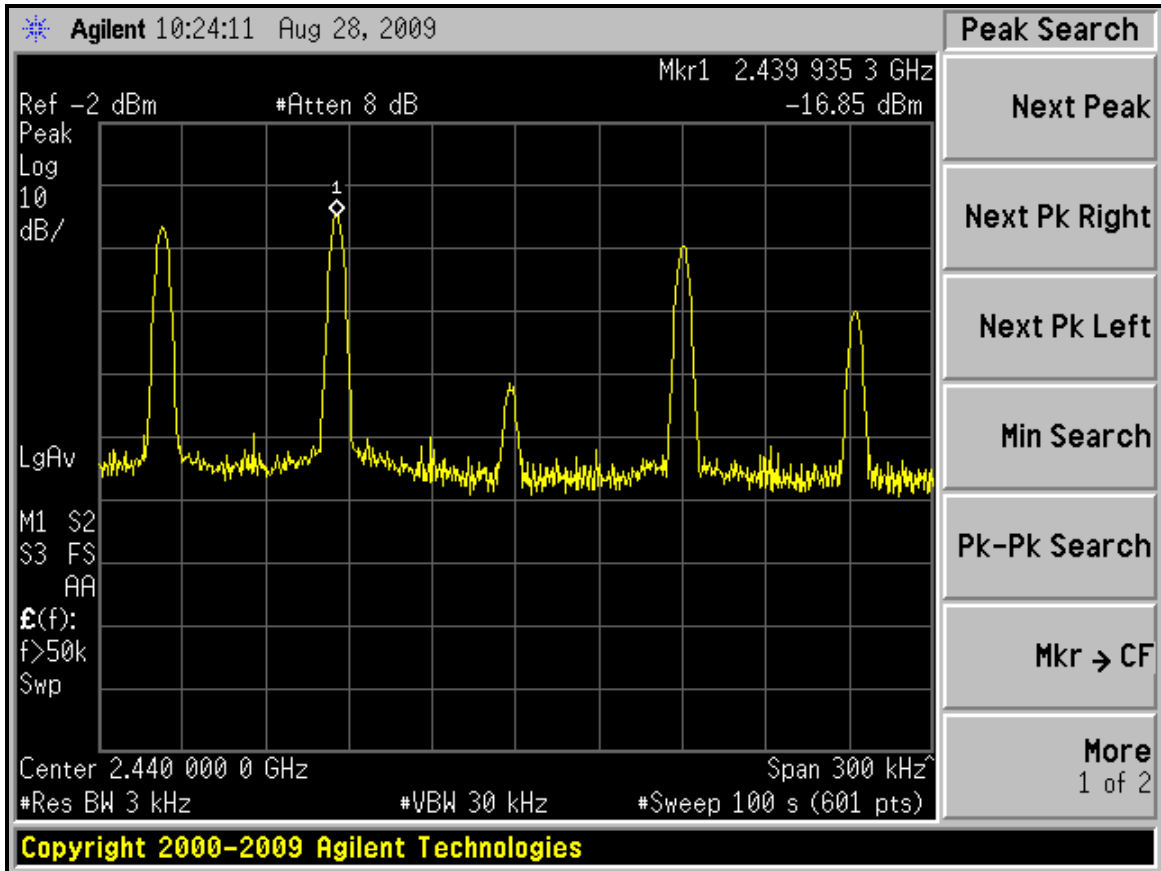

Plot 7-3: Power Spectral Density – 2480 MHz

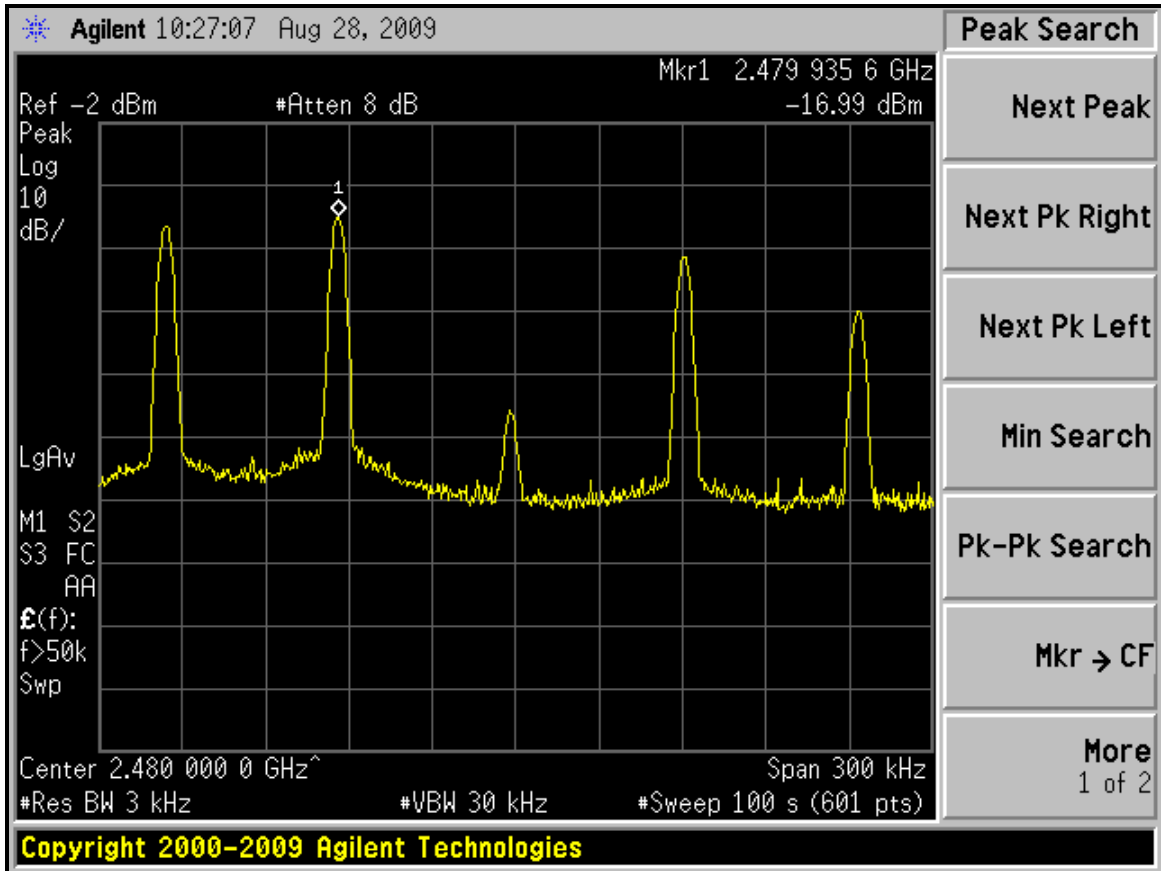

Test Personnel:

Richard B. McMurray, P.E.
 Test Engineer

Richard B. McMurray

Signature

August 28, 2009
 Date Of Test

8 Conducted Emissions Measurement Limits – FCC 15.207; RSS-Gen

8.1 Limits of Conducted Emissions Measurement

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66-56	56-46
0.5-5.0	56	46
5.0-30.0	60	50

8.2 Site and Test Description

The power line conducted emissions measurements were performed in a Series 81 type shielded enclosure manufactured by Rayproof. The EUT was assembled on a wooden table 80 centimeters high. Power was fed to the EUT through a 50 ohm/50 microhenry Line Impedance Stabilization Network (LISN). The EUT LISN was fed power through an A.C. filter box on the outside of the shielded enclosure. The filter box and EUT LISN housing are bonded to the ground plane of the shielded enclosure. A second LISN, the peripheral LISN, provides isolation for the EUT test peripherals. This peripheral LISN was also fed A.C. power. A metal power outlet box, which is bonded to the ground plane and electrically connected to the peripheral LISN, powers the EUT host peripherals.

The spectrum analyzer was connected to the A.C. line through an isolation transformer. The 50 ohm output of the EUT LISN was connected to the spectrum analyzer input through a Solar 100 kHz high-pass filter. The filter is used to prevent overload of the spectrum analyzer from noise below 100 kHz. Conducted emission levels were measured on each current-carrying line with the spectrum analyzer operating in the CISPR quasi-peak mode (or peak mode if applicable).

The analyzer's 6 dB bandwidth was set to 9 kHz. Video filter less than 10 times the resolution bandwidth is not used. Average measurements are performed in linear mode using a 10 kHz resolution bandwidth, a 1 Hz video bandwidth, and by increasing the sweep time in order to obtain a calibrated measurement. The emission spectrum was scanned from 150 kHz to 30 MHz. The highest emission amplitudes relative to the appropriate limits were measured and have been recorded.

Table 8-1: Conducted Emissions Test Equipment

RTL Asset #	Manufacturer	Model	Part Type	Serial Number	Calibration Due Date
901215	Hewlett Packard	8596EM	Spectrum Analyzer (9 kHz - 12.8 GHz)	3826A00144	10/16/07
901084	AFJ International	LS16	16A LISN	16010020082	3/28/08

8.3 Conducted Emissions Test Data

Table 8-2: Conducted Emissions Test Data – Neutral - TX Mode


Temperature: 74°F Humidity: 36%									
Emission Frequency (MHz)	Test Detector	Analyzer Reading (dBuV)	Site Correction Factor (dB)	Emission Level (dBuV)	FCC 15.207 QP Limit (dBuV)	FCC 15.207 QP Margin (dBuV)	FCC 15.207 AV Limit (dBuV)	FCC 15.207 AV Margin (dBuV)	Pass/Fail
0.237	Pk	19.6	0.1	19.7	62.2	-42.5	52.2	-32.5	Pass
0.398	Pk	11.3	0.3	11.6	57.9	-46.3	47.9	-36.3	Pass
20.200	Pk	15.0	2.4	17.4	60.0	-42.6	50.0	-32.6	Pass
22.930	Pk	19.9	2.4	22.3	60.0	-37.7	50.0	-27.7	Pass
24.120	Pk	26.6	2.5	29.1	60.0	-30.9	50.0	-20.9	Pass
28.180	Pk	17.2	2.3	19.5	60.0	-40.5	50.0	-30.5	Pass

Table 8-3: Conducted Emissions Test Data – Hot – TX Mode

Temperature: 74°F Humidity: 36%									
Emission Frequency (MHz)	Test Detector	Analyzer Reading (dBuV)	Site Correction Factor (dB)	Emission Level (dBuV)	FCC 15.207 QP Limit (dBuV)	FCC 15.207 QP Margin (dBuV)	FCC 15.207 AV Limit (dBuV)	FCC 15.207 AV Margin (dBuV)	Pass/Fail
0.252	Pk	18.9	0.1	19.0	61.7	-42.7	51.7	-32.7	Pass
0.399	Pk	12.4	0.3	12.7	57.9	-45.2	47.9	-35.2	Pass
20.130	Pk	15.2	2.4	17.6	60.0	-42.4	50.0	-32.4	Pass
23.560	Pk	19.5	2.5	22.0	60.0	-38.0	50.0	-28.0	Pass
24.120	Pk	26.4	2.5	28.9	60.0	-31.1	50.0	-21.1	Pass
28.110	Pk	18.1	2.3	20.4	60.0	-39.6	50.0	-29.6	Pass

Test Personnel:

Daniel W. Baltzell
 Test Engineer



Signature

August 28, 2009
 Date Of Test

9 Radiated Emissions - 15.209; RSS-210 6.2.1

9.1 Limits of Radiated Emissions Measurement

Frequency (MHz)	Field Strength (uV/m)	Measurement Distance (m)
0.009-0.490	2400/f (kHz)	300
0.490-1.705	2400/f (kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

As shown in 15.35(b), for frequencies above 1000 MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20 dB under any circumstances of modulation.

9.2 Radiated Emissions Measurement Test Procedure

Before final measurements of radiated emissions were made on the open-field three/ten meter range, the EUT was scanned indoors at one and three meter distances. This was done in order to determine its emissions spectrum signature. The physical arrangement of the test system and associated cabling was varied in order to determine the effect on the EUT's emissions in amplitude, direction and frequency. This process was repeated during final radiated emissions measurements on the open-field range, at each frequency, in order to ensure that maximum emission amplitudes were attained.

Final radiated emissions measurements were made on the three/ten-meter, open-field test site. The EUT was placed on a nonconductive turntable 0.8 meters above the ground plane. The spectrum was examined from 9 kHz to the 10th harmonic of the highest fundamental transmitter frequency (24.8 GHz).

At each frequency, the EUT was rotated 360°, and the antenna was raised and lowered from 1 to 4 meters in order to determine the emission's maximum level. Measurements were taken using both horizontal and vertical antenna polarizations. For frequencies between 30 and 1000 MHz, the spectrum analyzer's 6 dB bandwidth was set to 120 kHz, and the analyzer was operated in the CISPR quasi-peak detection mode. For emissions above 1000 MHz, emissions are measured using the average detector function with a minimum resolution bandwidth of 1 MHz. No video filter less than 10 times the resolution bandwidth was used. The highest emission amplitudes relative to the appropriate limit were measured and recorded in this report.

Table 9-1: Radiated Emissions Test Equipment

RTL Asset #	Manufacturer	Model	Part Type	Serial Number	Calibration Due Date
900151	Rohde and Schwarz	HFH2-Z2	Loop Antenna (9 kHz - 30 MHz)	827525/019	9/15/10
901365	MITEQ	JS4-00102600-41-5P	Amplifier, 0.1-26 GHz, 30dB gain	N/A	3/4/10
900905	Rhein Tech Laboratories	PR-1040	OATS 1 Preamplifier 40dB (30 MHz – 2 GHz)	1006	4/10/10
900878	Rhein Tech Laboratories	AM3-1197-0005	3 meter antenna mast, polarizing	Outdoor Range 1	Not Required
901516	Insulated Wire, Inc.	KPS-1503-2400-KPS-09302008	RF cable, 20'	NA	10/17/09
901517	Insulated Wire Inc.	KPS-1503-360-KPS-09302008	RF cable 36"	NA	10/17/09
901242	Rhein Tech Laboratories	WRT-000-0003	Wood rotating table	N/A	Not Required
900913	Hewlett Packard	85462A	EMI Receiver RF Section (9 kHz – 6.5 GHz)	3325A00159	6/8/10
900772	EMCO	3161-02	Horn Antenna (2 - 4 GHz)	9804-1044	6/14/10
900321	EMCO	3161-03	Horn Antenna (4.0 - 8.2 GHz)	9508-1020	6/14/10
900323	EMCO	3160-07	Horn Antenna (8.2 - 12.4 GHz)	9605-1054	6/14/10
900356	EMCO	3160-08	Horn Antenna (12.4 - 18 GHz)	9607-1044	6/14/10
900325	EMCO	3160-9	Horn Antennas (18 - 26.5 GHz)	9605-1051	6/14/10
901215	Hewlett Packard	8596EM	Spectrum Analyzer (9 kHz - 12.8 GHz)	3826A00144	10/23/09

9.3 Radiated Emissions Test Results

9.3.1 Radiated Emissions Digital Test Data

Table 9-2: Digital Radiated Emissions Test Data

Temperature: 77°F Humidity: 92%										
Emission Frequency (MHz)	Test Detector	Antenna Polarity (H/V)	Turntable Azimuth (deg)	Antenna Height (m)	Analyzer Reading (dBuV)	Site Correction Factor (dB/m)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pass/Fail
96.015	Qp	H	0	1.0	25.5	-23.4	2.1	43.5	-41.4	Pass
120.015	Qp	H	90	1.0	21.9	-21.2	0.7	46.0	-45.3	Pass
144.015	Qp	V	0	1.0	19.8	-21.7	-1.9	46.0	-47.9	Pass
192.015	Qp	H	180	1.0	18.4	-22.0	-3.6	46.0	-49.6	Pass
240.015	Qp	V	90	1.0	23.0	-20.7	2.3	46.0	-43.7	Pass
288.015	Qp	H	30	1.0	17.5	-17.9	-0.4	46.0	-46.4	Pass

9.3.2 Radiated Emissions Harmonics/Spurious Test Data

Table 9-3: Radiated Emissions Harmonics/Spurious - 2405 MHz

Fundamental amplitude = 77.8 dBuV/m

Emission Frequency (MHz)	Peak Analyzer Reading (dBuV) (1 MHz RBW/VBW)	Average Analyzer Reading (dBuV)	Site Correction Factor (dB/m)	Average Emission Level (dBuV/m)	Average Limit (dBuV/m)	Average Margin (dB)
4810.000	37.3	25.0	2.0	27.0	54.0	-27.0
7215.000	34.9	24.8	5.5	30.3	57.8	-27.4
9620.000	40.4	28.9	12.9	41.8	57.8	-16.0
12025.000	39.2	28.5	13.5	42.0	54.0	-12.0

Table 9-4: Radiated Emissions Harmonics/Spurious - 2440 MHz

Fundamental amplitude = 76.5 dBuV/m

Emission Frequency (MHz)	Peak Analyzer Reading (dBuV) (1 MHz RBW/VBW)	Average Analyzer Reading (dBuV)	Site Correction Factor (dB/m)	Average Emission Level (dBuV/m)	Average Limit (dBuV/m)	Average Margin (dB)
4880.000	27.9	26.1	2.0	28.1	54.0	-25.9
7320.000	39.0	24.7	5.3	30.0	54.0	-24.0
9760.000	38.3	28.4	12.5	40.9	86.1	-45.2
12200.000	38.7	29.7	13.5	43.2	54.0	-10.8


Table 9-5: Radiated Emissions Harmonics/Spurious 2480 MHz

Fundamental amplitude = 75.6 dBuV/m

Emission Frequency (MHz)	Peak Analyzer Reading (dBuV) (1 MHz RBW/VBW)	Average Analyzer Reading (dBuV)	Site Correction Factor (dB/m)	Average Emission Level (dBuV/m)	Average Limit (dBuV/m)	Average Margin (dB)
4960.000	39.5	28.6	2.2	30.8	54.0	-23.2
7440.000	37.4	24.6	5.8	30.4	54.0	-23.6
9920.000	40.0	29.2	12.5	41.7	85.4	-43.7
12400.000	38.3	29.2	15.8	45.0	54.0	-9.0

Test Personnel:

Daniel W. Baltzell
 Test Engineer



Signature

September 23, 2009
 Date Of Test

10 99% Bandwidth - RSS-Gen 4.6.1

Table 10-1: 99% Bandwidth Test Equipment


RTL Asset #	Manufacturer	Model	Part Type	Serial Number	Calibration Due Date
901413	Agilent Technologies	E4448A	Spectrum Analyzer (3 Hz – 50 GHz)	US440203416	7/31/10

10.1 99% Bandwidth Test Data


Table 10-2: 99% Bandwidth Test Data

Frequency (MHz)	99% Bandwidth (MHz)
2405	3.3
2440	3.3
2480	3.3


Plot 10-1: 99% Bandwidth – 2405 MHz

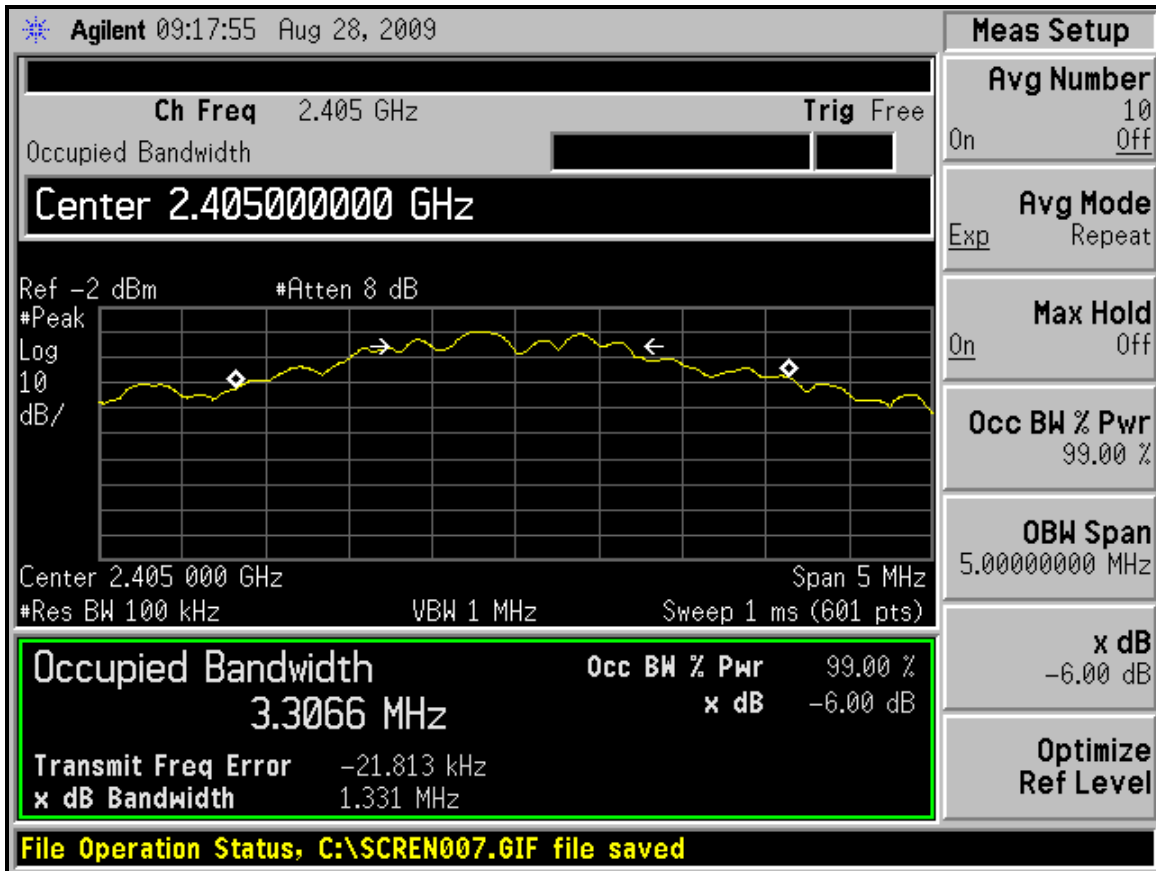

Plot 10-2: 99% Bandwidth – 2440 MHz

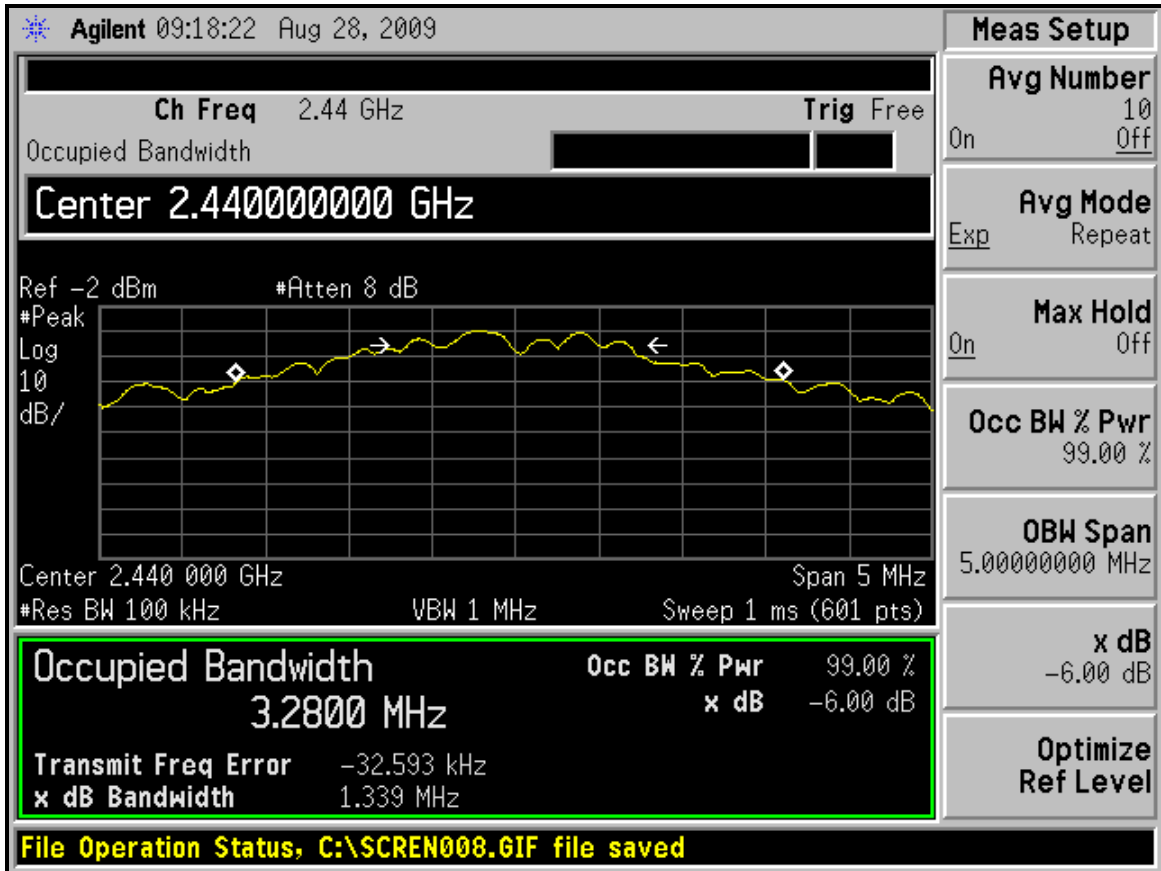

Plot 10-3: 99% Bandwidth – 2480 MHz

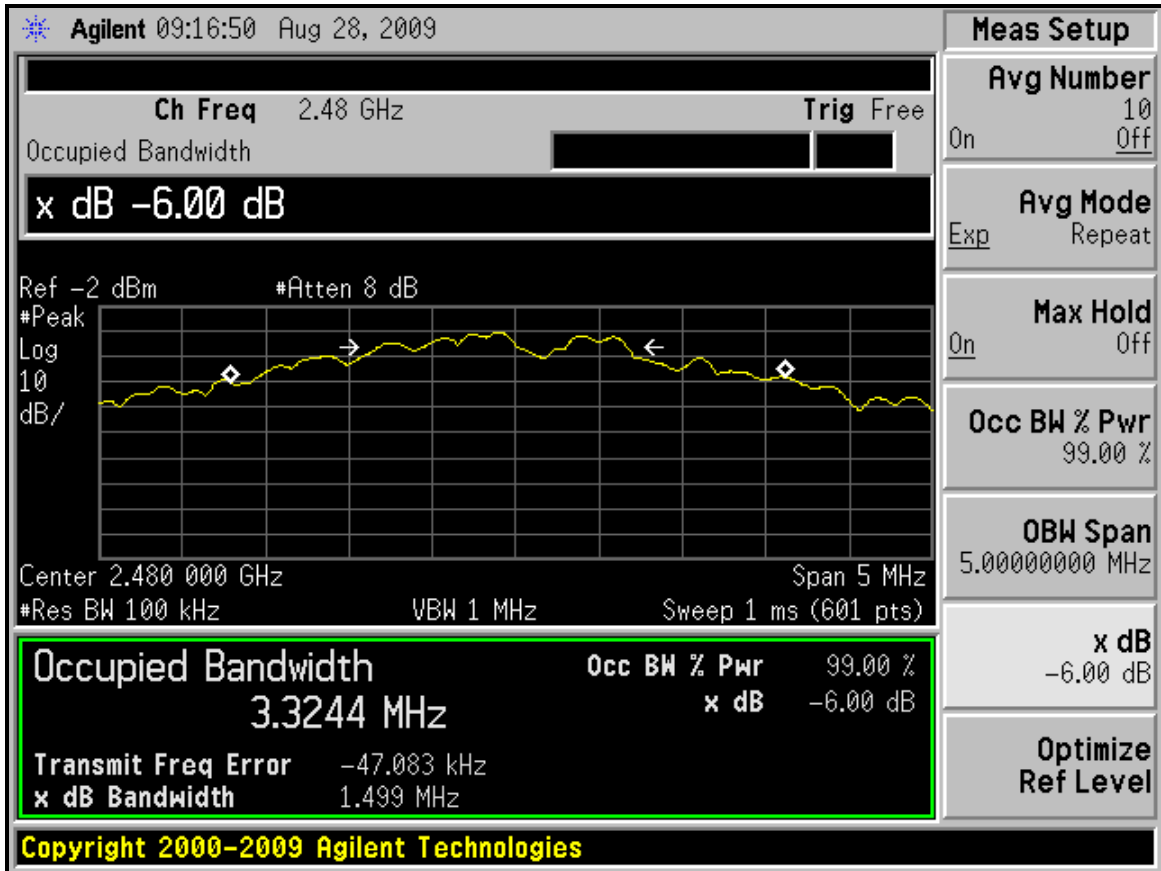

Test Personnel:

Richard B. McMurray, P.E.
 Test Engineer

Richard B. McMurray

Signature

August 28, 2009
 Date Of Test

Rhein Tech Laboratories, Inc.
360 Herndon Parkway
Suite 1400
Herndon, VA 20170
<http://www.rheintech.com>

Client: Hunter Engineering Company
Model: 45-1281
Standards: FCC 15.247/IC RSS-210
ID's: LS3-45-1281/2938A-451281
Report #: 2009249

11 Conclusion

The data in this measurement report shows that the EUT as tested, Hunter Engineering Company, Model 45-1281, FCC ID: LS3-45-1281, IC: 2938A-451281, complies with all the applicable requirements of Parts 2 and 15 of the FCC Rules and Regulations and Industry Canada RSS-210.