



Test Report No. 8812343125

For ElmoTech Ltd.

Equipment Under Test:

Data receiver

Model: MU-800-2

FCC ID: LSQ-MU-800-2

***From The Standards Institution
Of Israel
Industry Division
Electronics & Telematics Laboratory
EMC Section***





Test Report No.: 8812343125

Page 1 of 17 pages

Title: Test on Data receiver

Model: MU-800-2

Order placed by:	ElmoTech Ltd.
Address:	2 Habarzel Street, POB 13236, Tel-Aviv, Israel
Sample for test selected by:	The customer
The date of test:	1, 3 July 2008

Description of Equipment Under Test (EUT):	Data receiver
Model:	MU-800-2
Serial Number	NA
Manufactured by:	ElmoTech Ltd.

Reference Documents:

- ❖ CFR 47 FCC: Rules and Regulations; Part 15. "Radio frequency devices";
Subpart B: "Unintentional radiators" (2007)
Section 15.107. "Conducted emission limits".
Section 15.109. "Radiated emission limits".

Test Results: The EUT meets the following requirements of:

CFR 47 FCC Part 15:

- Subpart B Section 15.107 (a)
- Subpart B Section 15.109 (a)

This Test Report contains 17 pages and may be used only in full.	This Test Report applies only to the specimen tested and may not be applied to other specimens of the same product.
--	---



Test Report No.: 8812343125

Page 2 of 17 pages

Title: Test on Data receiver

Model: MU-800-2

1. Test summary

Parameter	FCC Part 15 Reference paragraph	Comply/not comply with the requirements
Radiated emission test.	Subpart B Section 15.109	Comply
Conducted emissions test	Subpart B Section 15.107	Comply

Electronics &
Telematics
Laboratory

July 2008

Name: Eng. Yuri Rozenberg
Position: Head of EMC Branch

Name: Michael Feldman
Position: Test Technician



Test Report No.: 8812343125

Page 3 of 17 pages

Title: Test on Data receiver

Model: MU-800-2

Table of Contents

1. Test summary	2
2. EUT Description and operation	4
2.1. General description:	4
2.2. Potential emission sources:	7
2.3. EUT setup and operation:	7
3. Measurements, examinations and derived results	7
3.1. Location of the Test Site:	7
3.2. Test condition:	7
3.3. Initial visual check and functional test:	7
3.4. Radiated emission test.	8
3.5. Test of radiated emissions from unintentional radiator	9
3.6. AC main conducted emissions test	11
4. Appendix 1. Test equipment used	14
5. Appendix 2: Antenna Factor and Cable Loss	15

2. EUT Description and operation

2.1. General description:

* Note: the customer supplied all information in clause below.

The MU-800-2 is a portable receiver at 433.92 MHz frequency for reception digital data from ankle transmitters. Receiver operates from recharged Li – ion battery 7.2V. External AC/DC converter - ElmoTech mod. S15AD090133 intended for charging purpose only.

The EUT's block diagram is shown in Figures #1 and external view is presented in photos #1.

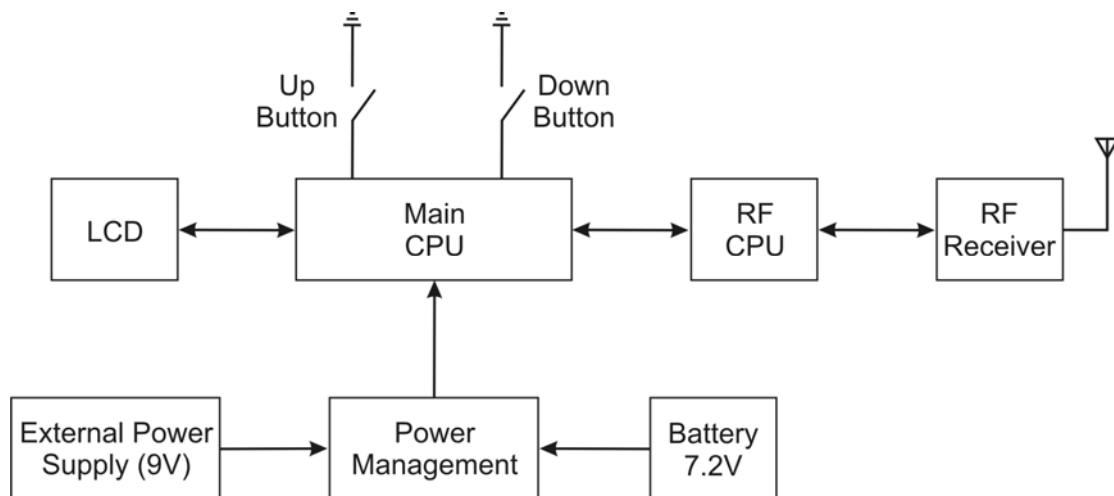


Figure 1. MU-800-2 block diagram.

Test Report No.: 8812343125

Page 5 of 17 pages

Title: Test on Data receiver

Model: MU-800-2



Photo 1. EUT's external view

Test Report No.: 8812343125

Page 6 of 17 pages

Title: Test on Data receiver

Model: MU-800-2



Photo 2. Emissions test setup on OATS. Charge mode.



Photo 3. Emissions test setup on OATS. Receive mode.

Test Report No.: 8812343125

Page 7 of 17 pages

Title: Test on Data receiver**Model:** MU-800-2

2.2. *Potential emission sources:*

The potential emission sources are detailed in Table 1.

Table 1. Potential emission sources

Frequency	Location
32.768 KHz crystal	Real time clock
3.99 MHz	Infrared communication
4.0 MHz	Main CPU
16.0 MHz	RF CPU
26.451 MHz	Receiver reference frequency
423.22 MHz	Voltage control oscillator

2.3. *EUT setup and operation:*

Measurements of receiver were performed in receive and charging modes.

3. Measurements, examinations and derived results

3.1. *Location of the Test Site:*

Preliminary radiated test was conducted at the EMC laboratory of the Standards Institution of Israel in Tel-Aviv.

Final test was conducted in an Open Area Test Site located at Kibbutz Native Halamed Hai in Emek HaEla, Israel.

3.2. *Test condition:*

Temperature: 20°C. Humidity: 59 %. Atmospheric pressure: 1012 mbar.

3.3. *Initial visual check and functional test:*

Initial visual check and brief built-in-test of the EUT was performed before testing.

- No external damages were found.
- The test on the EUT passed successfully.

**Test Report No.:** 8812343125

Page 8 of 17 pages

Title: Test on Data receiver**Model:** MU-800-2

3.4. Radiated emission test.

3.4.1. General:

Per FCC Part 15 subpart B Section 15.109

- * Initial scans were made using a peak detector but still using the appropriate ANSI IF bandwidth.
- * A tolerance limit was set 10 dB below the specification limit. Levels above the tolerance limit were retested using the Peak and Q. Peak detector.

3.4.2. Preliminary radiated emission tests:

Preliminary investigation measurements were performed up to 5 GHz in a semi-anechoic chamber at distance 3 meter. The EUT was setup in its typical configuration and operated in its various modes. For each mode of operation the frequency spectrum was monitored. EUT configuration, cable configuration and mode of operation, which produced the maximum level of emission, were documented. A list of frequencies to be tested was prepared.

3.4.3. Final measurements procedure:

The final radiated emission measurements were performed at the Open Area Test Site at the same (3 m) test distance. The EUT was operated as described above. The EUT was installed on a turn - table. Measurements were performed with Biconilog 30 MHz-2 GHz antenna and with Double Ridged Guide horn antenna from 30 MHz up to 5 GHz. The measurements were performed at each frequency that founded previously at which the signal level was 10 dB below the limit or less. The levels were maximized by rotating turntable through 360° and changing antenna-to-EUT polarization from vertical to horizontal. The worse case result was noted in tables.

3.4.4. Radiated emission test results:

All received emissions from the EUT were found below FCC Part 15 Subpart B Section 15.109. Final result measurements in receive and charge modes are presented in table #2 in section 3.5.



Test Report No.: 8812343125

Page 9 of 17 pages

Title: Test on Data receiver

Model: MU-800-2

3.5. Test of radiated emissions from unintentional radiator

Per FCC Part 15 subpart B Section 15.109

3.5.1. Test procedure:

The EUT was operated through the customer software. First, initial scans were performed. Final measurements were performed according to clause 3.4.3.

Initial scan:

Detector type	Peak
Mode	Max hold
Bandwidth	120 kHz
Step size	Continuous sweep
Sweep time	>1 seconds/MHz

Measurements:

Detector type	Quasi-peak (CISPR)
Bandwidth	120 kHz
Measurement time	20 seconds/MHz
Observation	>15 seconds

3.5.2. Radiated emission test results:

All received emissions from EUT were found below FCC Part 15 class B limits. Worse emission test result was found in charging mode and presented in table # 2 below.

**Table 2. Radiated emission test results
Subpart B class B 3m distance.**

Frequency (MHz)	Antenna Polariz. V/H	Antenna Height (m)	Turn- table Angle (°)	Emission Level Note 1 (dBµV/m)	Limit @ 3 m (dBµV/m)	Margin (dB)	Results
45.6	V	1.0	237	33.6.	40.0	6.4	Complies

Note 1: Emission level = E Reading (dBµV) + Cable loss (dB) + Antenna Factor (dB/m)
For Cable Loss and Antenna Factor refer to Appendix 2



Test Report No.: 8812343125


Page 10 of 17 pages

Title: Test on Data receiver

Model: MU-800-2

11:54:00 01 JUL 2008
ElmoTech EUT-MU-800-2


ACTV DET: PEAK
MEAS DET: PEAK QP AVG
MKR 47.6 MHz
21.26 dB μ V/m

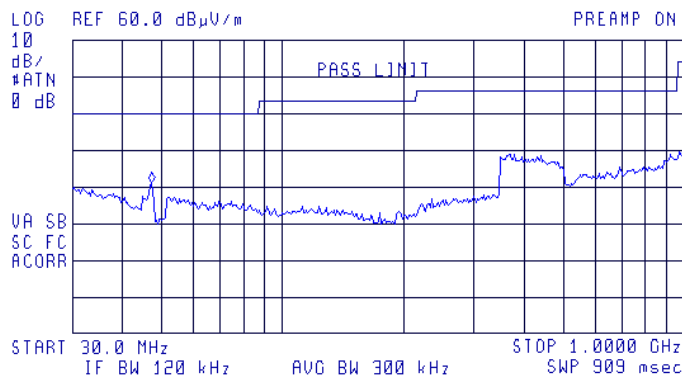

Plot # 1. Preliminary scan 30 – 1000 MHz. Test distance =3m.

12:15:26 01 JUL 2008
ElmoTech EUT-MU-800-2

ACTV DET: PEAK
MEAS DET: PEAK QP AVG
MKR 4.930 GHz
42.74 dB μ V/m

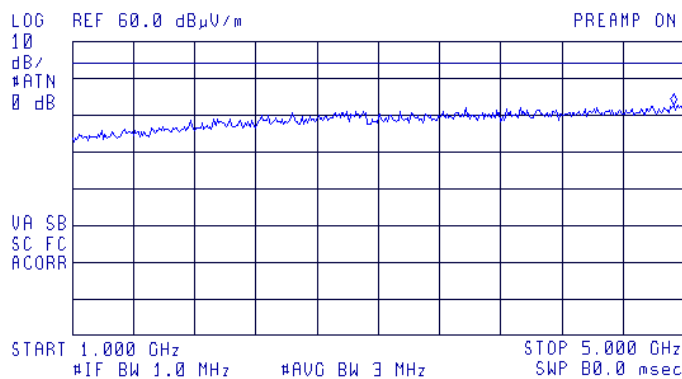

Plot # 2. Preliminary scan 1.0 – 5.0 GHz. Test distance =3m.

**Test Report No.:** 8812343125

Page 11 of 17 pages

Title: Test on Data receiver**Model:** MU-800-2

3.6. AC main conducted emissions test

Per FCC Part 15 subpart B Section 15.107

Test configuration:

The EUT was placed on a non-metallic table in a shielded chamber at a height of 80 cm from the floor and 40 cm from the vertical ground plane (wall) of the chamber.

3.6.1. **Test procedure:**

The EUT was operated to transmitting through the customer software. First, initial scans were performed. Final measurements were performed at the frequencies where emission exceeded the tolerance limit.

Test equipment (EMI receiver) setup was as follow:

Initial scan:

Detector type	Peak
Mode	Max hold
Bandwidth	9 kHz
Step size	Continuous sweep
Sweep time	>100 msec

Measurements:

Detector type	Quasi-peak (CISPR)
Bandwidth	9 kHz
Observation	>15 seconds

3.6.2. **Test results:**

All received emissions from EUT were found below FCC Part 15.107 limits (see Plots #3, 4 and tables #3, 4 below).


The worst result measured on Neutral line at 0.163 MHz with Quasi peak detector was found 1.1 dB below the Average limit.

Test Report No.: 8812343125

Page 12 of 17 pages

Title: Test on Data receiver

Model: MU-800-2

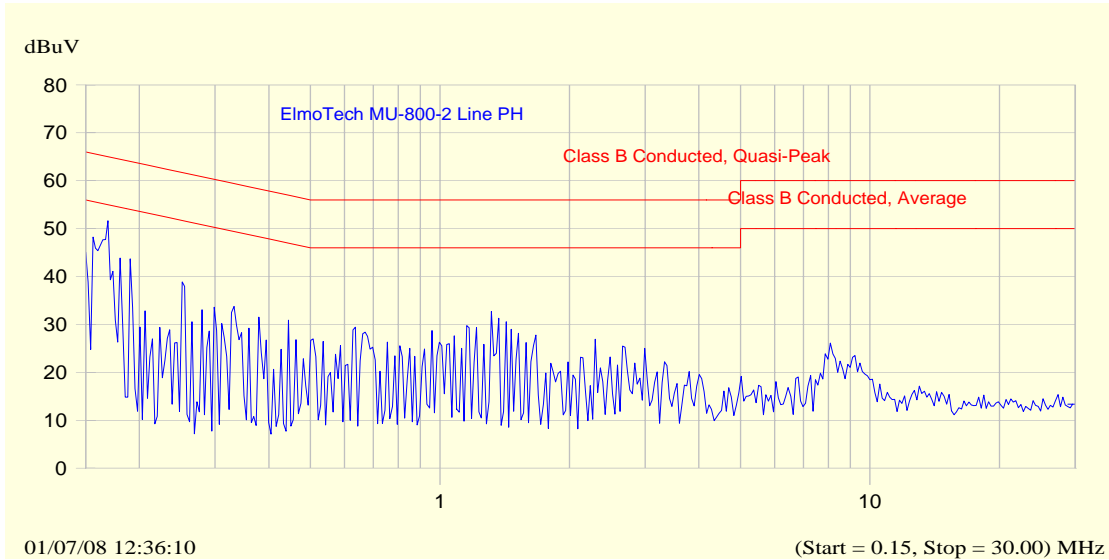

Plot # 3. Tested line Phase

Table 3. Measured result. Line Phase


Frequency MHz	Peak dB μ V	QP dB μ V	Limit Average dB μ V	QP - Avg Limit dB
0.163	56.7	50.5	55.3	-4.8
0.341	34.9	33.1	49.2	-16.0
1.182	32.1	28.8	46.0	-17.2
1.347	35.7	31.5	46.0	-14.5
1.479	34.5	28.5	46.0	-17.5
1.692	31.5	28.5	46.0	-17.5

Test Report No.: 8812343125

Page 13 of 17 pages

Title: Test on Data receiver

Model: MU-800-2

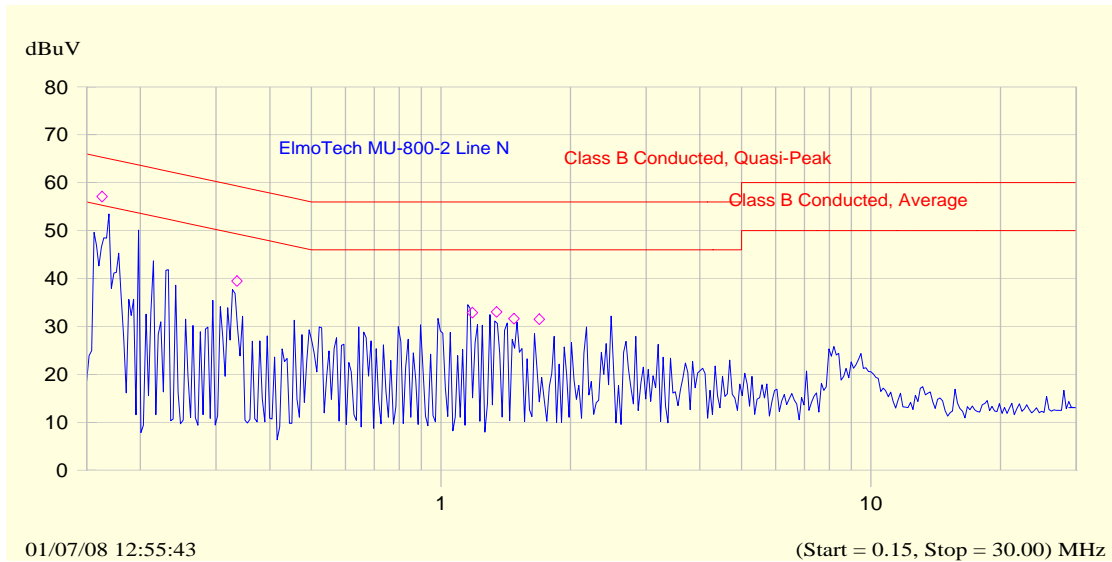

Plot # 4. Tested line Neutral

Table 4. Measured result. Line Neutral.

Frequency MHz	Peak dB μ V	QP dB μ V	Limit Average dB μ V	QP - Avg Limit dB
0.163	57.1	54.2	55.3	-1.1
0.336	39.5	37.6	49.3	-11.7
1.183	32.9	29.9	46.0	-16.1
1.347	33.0	29.4	46.0	-16.6
1.479	31.6	26.0	46.0	-20.0
1.692	31.5	29.5	46.0	-16.5

**Test Report No.:** 8812343125**Page 14 of 17 pages****Title:** Test on Data receiver**Model:** MU-800-2

4. Appendix 1. Test equipment used

All measurements equipment is on SII calibration schedule with a recalibration interval not exceeding one year.

Instrument	MFR	Model	Serial No.	Due calibration date
EMI Receiver 9 kHz – 6.5 GHz	HP	8546A+85460 A	SII 4068	April 2009
Double Ridged Guide Antenna 1 – 18 GHz	EMCO	3115	SII 5802	August 2008
Antenna Biconilog 30 – 2000 MHz	Schaffner- Chase	CBL6112B	S/N 23181	May 2009
EMI Analyser 9 kHz - 26.5 GHz	HP	E7405A	SII 4944	March 2009
LISN 9 kHz – 30 MHz	FCC	LISN 250-32- 4-16	SII5023	July 2009
Transient limiter 0.009-200 MHz	HP	11947A	3107105	March 2009
Oscilloscope	HP	54610B	US37340682	May 2009
RF cable, 3m	Sucoflex	104PE	21328/4PE	August 2008
Antenna Mast	R&S	HCM	100002	N/A
Metallic turntable	R&S	HCT12	100001	N/A
Positioning controller	R&S	HCC	100002	N/A

Test Report No.: 8812343125

Page 15 of 17 pages

Title: Test on Data receiver

Model: MU-800-2

5. Appendix 2: Antenna Factor and Cable Loss

Table 5. Cables #8 and #10 loss (10m cable + Mast).

Point	Frequency (MHz)	Cable Loss (dB)	Point	Frequency (MHz)	Cable Loss (dB)
1	30	0.53	21	1000	3.68
2	50	0.75	22	1100	3.82
3	100	1.08	23	1200	4.07
4	150	1.39	24	1300	4.24
5	200	1.61	25	1400	4.43
6	250	1.752	26	1500	4.6
7	300	2.00	27	1600	4.7
8	350	2.15	28	1700	4.85
9	400	2.26	29	1800	4.98
10	450	2.383	30	1900	5.19
11	500	2.52	31	2000	5.34
12	550	2.606	32	2100	5.51
13	600	2.75	33	2200	5.69
14	650	2.856	34	2300	5.89
15	700	3.06	35	2400	6.07
16	750	3.20	36	2500	6.22
17	800	3.27	37	2600	6.28
18	850	3.38	38	2700	6.41
19	900	3.46	39	2800	6.53
20	950	3.55	40	2900	6.84



Test Report No.: 8812343125

Page 16 of 17 pages

Title: Test on Data receiver

Model: MU-800-2

Table 6. Antenna Factor

For Biconilog Antenna, Model Number: CBL 6112D, S/N: 23181

No.	f / MHz)	AF / dB/m	f / MHz)	AF / dB/m	f / MHz)	AF / dB/m	f / MHz)	AF / dB/m
1	30	17.90	170	9.40	530	17.70	1040	22.20
2	32	16.70	175	9.00	540	18.25	1060	22.50
3	34	15.55	180	8.50	550	18.60	1080	22.50
4	36	14.35	185	8.45	560	14.45	1100	22.40
5	38	13.30	190	8.60	570	18.40	1120	22.60
6	40	12.20	195	8.85	580	18.50	1140	22.45
7	42	11.05	200	8.95	590	18.60	1160	22.50
8	44	9.95	205	8.80	600	18.60	1180	22.40
9	46	8.90	210	8.50	610	18.80	1200	22.80
10	48	8.05	215	8.20	620	18.99	1220	22.95
11	50	7.30	220	8.50	630	19.05	1240	23.10
12	52	6.80	225	9.00	640	19.23	1260	23.40
13	54	6.45	230	9.65	650	19.10	1280	23.35
14	56	6.00	235	10.30	660	19.13	1300	23.62
15	58	5.70	240	11.00	670	19.04	1320	23.64
16	60	5.45	245	11.60	680	19.00	1340	23.86
17	62	5.30	250	12.00	690	19.17	1360	23.95
18	64	5.20	255	12.45	700	19.28	1380	23.90
19	66	5.30	260	12.85	710	19.25	1400	24.45
20	68	5.30	265	12.50	720	19.45	1420	24.74
21	70	5.35	270	12.45	730	19.75	1440	24.93
22	72	5.50	275	12.40	740	19.95	1460	25.03
23	74	5.80	280	12.55	750	20.07	1480	25.45
24	76	6.00	285	12.65	760	19.85	1500	25.30
25	78	6.60	290	12.75	770	19.80	1520	25.25
26	80	6.70	295	12.95	780	19.85	1540	25.36
27	82	7.15	300	13.00	790	19.95	1560	25.58
28	84	7.60	310	13.35	800	20.05	1580	25.50
29	86	8.10	320	13.75	810	20.10	1600	25.65
30	88	8.50	330	13.85	820	20.35	1620	25.60
31	90	8.90	340	14.10	830	20.40	1640	25.70
32	92	9.20	350	14.50	840	20.35	1660	25.83
33	94	9.75	360	14.70	850	20.46	1680	25.97
34	96	9.95	370	14.90	860	20.39	1700	26.10
35	98	10.20	380	15.10	870	20.29	1720	26.25
36	100	10.50	390	15.45	880	20.24	1740	26.04
37	105	11.25	400	16.00	890	20.35	1760	26.14
38	110	11.70	410	16.40	900	20.55	1780	26.20
39	115	11.70	420	16.70	910	20.45	1800	26.40
40	120	11.80	430	16.35	920	20.60	1820	26.64
41	125	11.80	440	16.30	930	20.60	1840	26.86
42	130	11.70	450	16.30	940	20.66	1860	27.12
43	135	11.35	460	16.70	950	20.88	1880	27.00
44	140	10.95	470	17.05	960	21.11	1900	27.25
45	145	10.35	480	17.20	970	20.93	1920	27.36
46	150	10.05	490	17.30	980	21.03	1940	27.68
47	155	9.70	500	17.40	990	21.05	1960	27.10
48	160	9.70	510	17.50	1000	21.10	1980	27.06
49	165	9.45	520	17.60	1020	21.40	2000	27.25

**Test Report No.:** 8812343125

Page 17 of 17 pages

Title: Test on Data receiver**Model:** MU-800-2

Antenna Factor
Double Ridged Guide Antenna mfr EMCO model 3115 1m calibration

Point	Frequency (MHz)	Antenna Factor (dB/m)
1	1000	23.9
2	2000	28.3
3	3000	31.0
4	4000	33.1
5	4500	32.5
6	5000	32.4
7	6000	53.7
8	6500	35.6
9	7000	36.4
10	7500	36.9
11	8000	37.0
12	8500	38.0
13	9000	38.6
14	9500	38.4
15	10000	38.4
16	10500	38.4
17	11000	38.9
18	11500	39.6
19	12000	39.4
20	12500	39.2
21	13000	40.3
22	13500	41.0
23	14000	41.2
24	14500	41.3
25	15000	40.0
26	15500	38.0
27	16000	38.1
28	16500	40.3
29	17000	42.2
30	17500	44.6
31	18000	46.2

Cable Loss
Type: Sucoflex 104PE; Ser.No.21328/4PE; 3 m length

Point	Frequency (GHz)	Cable Loss (dB)
0	0.0-1.8	1.67
1	1.8 – 3.6	2.39
2	3.6 – 5.4	3.04
3	5.4-7.2	3.58
4	7.2-9.0	4.06
5	9.0-10.8	4.49
6	10.8-12.6	4.91
7	12.6-14.4	5.31
8	14.4-16.2	5.66
9	16.2-18.00	6.01