



HERMON LABORATORIES



Hermon Laboratories Ltd.
P.O.Box 23
Binyamina 30550, Israel
Tel. +972 46288001
Fax. +972 46288277
e-mail: mail@hermonlabs.com

RADIO TEST REPORT

**ACCORDING TO 47 CFR Part 15 SUBPART C §15.231, §15.205, §15.209 and SUBPART B
for**

HomeFree Systems Ltd.

EQUIPMENT UNDER TEST:

Pendant (Panic button)

Model: PB-500

This report is in conformity with ISO/IEC 17025. The A2LA logo endorsement applies only to the test methods and the standards that are listed in the scope of Hermon Laboratories accreditation.
The test results relate only to the items tested. **This test report must not be reproduced in any form except in full with the approval of Hermon Laboratories Ltd.**

Page 1 of 34

Document ID: HOMRAD_FCC.15253_rev.1.doc
Date of Issue: October 2002



Contents

CONTENTS	2
1 PROJECT INFORMATION	3
2 SUMMARY OF TESTS AND REQUIREMENTS	4
3 EUT DESCRIPTION	6
3.1 GENERAL DESCRIPTION	6
3.2 EUT TEST CONFIGURATION	6
3.3 TRANSMITTER DESCRIPTION	7
4 TEST RESULTS	8
4.1 BANDWIDTH OF EMISSION ACCORDING TO § 15.231 (c) AND RSS-210 § 6.1.1(c).....	8
4.2 FIELD STRENGTH OF FUNDAMENTAL, § 15.231 AND RSS-210 § 6.1.1(B).....	9
4.3 FIELD STRENGTH OF SPURIOUS RADIATION, § 15.231 AND RSS-210 § 6.1.1(B).....	10
4.4 UNINTENTIONAL RADIATED EMISSIONS TEST ACCORDING TO §15.109 AND ICES-003.....	11
APPENDIX A - PLOTS	12
APPENDIX B – TEST SETUP PHOTOGRAPHS.....	22
APPENDIX C - TEST EQUIPMENT USED FOR TESTS	26
APPENDIX E TEST EQUIPMENT CORRECTION FACTORS	27
APPENDIX E - GENERAL INFORMATION	33
TEST FACILITY DESCRIPTION.....	33
ABBREVIATIONS AND ACRONYMS.....	33
SPECIFICATION REFERENCES	33
FCC EQUIPMENT CODES AND DESCRIPTIONS.....	34



1 Project information

Description of equipment under test

Test item	Pendant (panic button)
Manufacturer	ElmoTech Ltd.
Type (Model)	PB-500
Transmitter operating frequency	318 MHz
Equipment FCC code ¹	DSC

Applicant information

Applicant's responsible person	Mr. Alex Rachman, Project Manager
Company	HomeFree Systems Ltd.
P.O. Box	13236
Address	2, Habarzel street, 5 th floor
City	Tel Aviv
Postal code	61132
Country	Israel
Telephone number	+972 36478871
Telefax number	+972 36478872

Test performance

Project number:	15253
Location	Hermon Laboratories
Receipt date	August 26, 2002
Test started	August 26, 2002
Test performed	August 28, 2002
Purpose of test	Apparatus compliance verification in accordance with emission requirements
Test specifications	47CFR Part 15, subpart C, §15.231, §15.205, §15.209, and subpart B §15.109

¹ FCC Equipment codes – see Appendix D



2 Summary of tests and requirements

Parameter	Subclause	C	NC	NT	NA	Tested by	Date tested	Remarks
Transmitter characteristics, §15.231								
Periodic operation	15.231(a)	X				Refer to Installation instructions		
Bandwidth of emission	15.231(c)	X				Mrs. E. Pitt, test engineer	August 26, 2002	
Field strength of fundamental	15.231(b)(2)	X				Mrs. E. Pitt, test engineer	August 26, 2002	
Field strength of spurious radiation	15.231(b)(3)	X				Mrs. E. Pitt, test engineer	August 26 and 28, 2002	
Unintentional radiation, §15.107, §15.109								
Conducted emissions	15.107				X			
Radiated emissions	15.109	X				Mrs. E. Pitt, test engineer	August 26, 2002	
General conditions under §15.231, Periodic operation in the band 40.66 - 40.70 MHz and above 70 MHz								
The intentional radiator does not operate in the restricted bands of operation.	15.205	X						
The intentional radiator has permanently attached antenna or antenna that uses a unique coupling to the intentional radiator.	15.203	X				Refer to operational description		
No antenna other than that furnished by the responsible party can be used with the device.	15.203	X						
The intentional radiator has no standard antenna jack or electrical connector.	15.203				X	This requirement does not apply to intentional radiators that must be professionally installed		
The intentional radiator must be professionally installed.	15.203				X			
The Intentional radiator operates at 318 MHz.	15.231 (a)	X						
Intentional radiator is restricted to the transmission of a control signal such as those used with alarm systems, door openers, remote switches, etc.	15.231 (a)	X				Refer to operational description		
Radio control of toys is not permitted.	15.231 (a)	X				Refer to operational description		



Parameter	Subclause	C	NC	NT	NA	Tested by	Date tested	Remarks
Continuous transmissions, such as voice or video, and data transmissions are not permitted.	15.231 (a)	X						Refer to operational description
A manually operated transmitter shall employ a switch that will automatically deactivate the transmitter within not more than 5 seconds of being released.	15.231 (a) (1)	X						Refer to operational description
A transmitter activated automatically shall cease transmission within 5 seconds after activation.	15.231 (a) (2)				X			
Periodic transmissions at regular predetermined intervals are not permitted.	15.231 (a) (3)	X						Refer to operational description
The intentional radiator polling or supervision transmissions to determine system integrity of transmitters used in security or safety applications are allowed if the periodic rate of transmission does not exceed one transmission of not more than one second duration per hour for each transmitter.	15.231 (a) (3)	X						Refer to operational description
The intentional radiators, employed for radio control purposes during emergencies involving fire, security, and safety of life, when activated to signal an alarm, may operate during the pendency of the alarm condition.	15.231 (a) (4)	X						Refer to operational description
NOTE: C: The parameter is compliant with the requirements. NC: The parameter is not compliant with the requirements. NT: The parameter is not tested. NA: The test of this parameter is not applicable.								

Test report prepared by: Ms. N. Averin, certification engineer

Test report approved by: Mr. M. Nikishin, EMC group leader

Mr. A. Usoskin, QA manager









3 EUT description


3.1 General description

The EUT is a transmitter intended for panic transmission in care center environments. The transmitter is powered by two 3.0 V lithium batteries.

3.2 EUT test configuration

During the testing the EUT was powered by one external nickel battery instead of two lithium batteries to provide the continuous operation of the transmitter. Test configuration is provided in Figure 3.2.1.

Figure 3.2.1 EUT test configuration





3.3 Transmitter description

Operating frequency:		318 MHz	
Maximum rated output power			
At transmitter permanent external 50Ω rf output connector (dBm)			
Effective radiated power (for equipment with integral antenna) (dBm)		-3	
Transmitter duty cycle (worst case)			
Tx on (ms)		0.006	
Tx off (ms)		> 0.1	
Modulation			
Amplitude			
Frequency			
<input type="checkbox"/> Other (specify): FSK			
Can the transmitter be operated without modulation		<input type="checkbox"/> yes	<input type="checkbox"/> no
Transmitter power source			
Battery		Nominal rated voltage (VDC)	3.0 x 2
Nickel Cadmium			
<input type="checkbox"/> Lithium			
Other:			
DC		Nominal rated voltage (VDC)	
AC mains		Nominal rated voltage (VAC)	
Is there common power source for transmitter and receiver		<input type="checkbox"/> yes	<input type="checkbox"/> no
Antenna type			
<input type="checkbox"/> Integral			
<input type="checkbox"/> External			
Type of antenna jack² - NA			
standard		connector type	<input type="checkbox"/> Male <input type="checkbox"/> Female
unique		connector type	<input type="checkbox"/> Male <input type="checkbox"/> Female

² Standard antenna jack use is prohibited excluding devices which must be professionally installed



4 Test results

4.1 Bandwidth of emission according to § 15.231 (c)

METHOD OF MEASUREMENT:	ANSI 63.4 §13.1.7
DATE:	August 26, 2002
RELATIVE HUMIDITY:	44 %
AMBIENT TEMPERATURE:	24 °C
AIR PRESSURE:	1008 hPa
MODULATION:	ON
DETECTOR USED:	Peak

Carrier frequency MHz	Occupied bandwidth, kHz	Reference to plot in Annex A
318	575	A1
Measurement uncertainty, ppm		0.2

TEST EQUIPMENT USED:

HL 0465	HL 0521	HL 0589	HL 0604	HL 1003	HL 1004	HL 1947
---------	---------	---------	---------	---------	---------	---------

LIMIT (§ 15.231 (c))

The bandwidth of the emission shall be no wider than 0.25% of the center frequency for devices operating above 70 MHz and below 900 MHz. For devices operating above 900 MHz, the emission shall be no wider than 0.5% of the center frequency. Bandwidth is determined at the points 20 dB down from the modulated carrier.

For 318 MHz frequency the specified limit is 795 kHz

TEST PROCEDURE

The spectrum trace data around transmitter fundamental frequency was obtained with the spectrum analyzer in "Max Hold" mode. The bandwidth value was determined between two points 20 dBc.



4.2 Field strength of fundamental, § 15.231

METHOD OF MEASUREMENT: ANSI 63.4 §13.1.5
DATE: August 26, 2002
RELATIVE HUMIDITY: 44 %
AMBIENT TEMPERATURE: 24 °C
AIR PRESSURE: 1008 hPa
SITE DESCRIPTION: ANECHOIC CHAMBER
MODULATION: ON
DETECTOR USED: PEAK

	§ 15.231 (b)	§ 15.231 (e)
The EUT complies with the requirements of	X	

Peak detector

Frequency, MHz	Measured field strength, dB(uV/m)	Specification limit, dB(uV/m)	Margin, dB	Reference to plot in Annex A
318.030	91.38	95.8	4.42	A2
Measurement uncertainty, dB				

Peak detector + average factor

Frequency, MHz	Measured field strength, dB(uV/m)	Average factor, dB	Calculated result, dB(uV/m)	Specification limit, dB(uV/m)	Reference to plot in Annex A
318.030	91.38	-24.1	67.28	75.8	A2
Measurement uncertainty, dB					
-5.73 dB/ -5.57 dB					

4.2.1 Average factor calculation, §15.35

Tx ON	Duty cycle	Average factor	Reference to plot in Annex A
6.255 ms	0.062	-24.1	A3, A4

TEST EQUIPMENT USED:

HL 0465	HL 0521	HL 0589	HL 0604	HL 1003	HL 1004	HL 1947
---------	---------	---------	---------	---------	---------	---------

LIMIT § 15.231 (b)

Fundamental frequency (MHz)	Field strength of fundamental (b) (mV/m) @ 3 m
260 – 470	3,750 to 12,500

The specified average limit for 318 MHz frequency is 75.8 dB(μV/m)

The specified peak limit for 318 MHz frequency is 95.8 dB(μV/m)

TEST PROCEDURE

The EUT was tested, being placed on a wooden 80 cm height turntable in each of three orthogonal planes in turn. To find maximum radiation the turntable was rotated 360°, measuring antenna height was changed from 1 to 4 m, and the antenna polarization was changed from vertical to horizontal.



4.3 Field strength of spurious radiation, § 15.231

METHOD OF MEASUREMENT: ANSI 63.4 §13.1.4
TEST PERFORMED IN: ANECHOIC CHAMBER
DATE: August 26 and 28, 2002
RELATIVE HUMIDITY: 44 %
AMBIENT TEMPERATURE: 24 °C
AIR PRESSURE: 1008 hPa
TEST PERFORMED AT FIELD STRENGTH: 91.38 dB(μ V/m)
MODULATION ON
DETECTOR USED: PEAK
RANGE OF MEASUREMENTS 9 kHz to 4000 MHz

Frequency, MHz	RBW, kHz	VBW, kHz	Radiated emission (peak), dB(μ V/m)	Limit (peak) @ 3 m, dB(μ V/m)	Radiated emission, (avrg) dB(μ V/m)	Limit (avrg) @ 3 m, dB(μ V/m)	Ref. to plot in App. A
636.060	120	300	52.12	75.8	28.02*	55.8	A7, A8
Measurement uncertainty, dB				-5.73 dB/ -5.57 dB			

For test results refer to Plots A5 to A10.

* Radiated emission value was calculated: Peak value + Average factor

Notes to table:

RBW: resolution bandwidth

VBW: video bandwidth

4.3.1 Average factor calculation, §15.35

Tx ON	Duty cycle	Average factor	Reference to plot in Annex A
6.255 ms	0.062	-24.1	A3, A4

TEST EQUIPMENT USED:

HL 0041	HL 0446	HL 0465	HL 0521	HL 0589	HL 0604	HL 1003
HL 1004	HL 1947					

LIMIT § 15.231 (b)

Fundamental frequency (MHz)	Field strength of harmonics (b) (mV/m) @ 3 m
260 – 470	375 to 1,250

The specified limit for 318 MHz frequency is 55.8 dB(μ V/m)

TEST PROCEDURE

The EUT was tested, being placed on a wooden 80 cm height turntable in each of three orthogonal planes in turn.

9 kHz – 30 MHz frequency range. The loop antenna was positioned with its plane vertical. The loop center was 1 meter above the ground plane. To find maximum radiation the turntable was rotated 360° and the measuring antenna was rotated about its vertical axis.

30 MHz – 9.5 GHz frequency range. To find maximum radiation the turntable was rotated 360°, measuring antenna height was changed from 1 to 4 m, and the antennas polarization was changed from vertical to horizontal.



4.4 Unintentional radiated emissions test according to §15.109

METHOD OF MEASUREMENT:	ANSI 63.4 §11.6 / ANSI 63.4 §12.1.4
TEST PERFORMED IN:	ANECHOIC CHAMBER
DATE:	August 26, 2002
RELATIVE HUMIDITY:	44 %
AMBIENT TEMPERATURE:	24 °C
AIR PRESSURE:	1008 hPa
DISTANCE BETWEEN ANTENNA AND EUT:	3 m
THE EUT WAS TESTED AS:	TABLE-TOP
FREQUENCY RANGE:	30 MHz – 2 GHz
DETECTOR TYPE:	Peak
RESOLUTION BANDWIDTH:	120 kHz below 1 GHz, 1 MHz above 1 GHz

The EUT highest used frequency (not including operating frequency), MHz	Upper frequency of measurement range, MHz
Below 1.705	30
1.705 – 108	1000
108 – 500	2000
500 – 1000	5000
Above 1000	5 th harmonic of the highest frequency or 40 GHz, whichever is lower

Frequency, MHz	Antenna polarization	Antenna height, m	Turntable position (°)	Radiated emissions, dB (μV/m)	Specification limit, dB (μV/m)	Ref. to plot in App. A
30 - 2000	The limit for unintentional radiated emission, class B was used throughout spurious emission measurements in Tx mode. All emissions except carrier and 2 nd harmonic were found below the limit					A7, A9
Measurement uncertainty, dB		-5.73 dB/ -5.57 dB				

Table abbreviations:

Antenna polarization: V = vertical, H = horizontal

Turntable position: 0° = EUT front panel faces the receiving antenna

TEST EQUIPMENT USED:

HL 0465	HL 0521	HL 0589	HL 0604	HL 1003	HL 1004	HL 1947
---------	---------	---------	---------	---------	---------	---------

LIMIT (§ 15.109)

Frequency, MHz	Class A equipment @ 10 m dB(μV/m)	Class B equipment @ 3 m dB(μV/m)
30 - 88	39.0	40
88 - 216	43.5	43.5
216 - 960	46.4	46
960 - 5000	49.5	54

TEST PROCEDURE

The EUT was placed on a wooden 80 cm height turntable. To find maximum radiation the turntable was rotated 360°, measuring antenna height was changed from 1 to 4 m, and the antennas polarization was changed from vertical to horizontal.



Appendix A - Plots

Plot A1

Occupied bandwidth measurements

16:30:27 AUG 26, 2002

ACTV DET: PEAK
MEAS DET: PEAK OP AVG
MKR Δ 575 kHz
-.02 dB


MEASURE
AT MKR

ADD TO
LIST

LOG REF 94.0 dB μ V/m

10
dB/
ATN
20 dB

VA SB
SC FC
ACORR

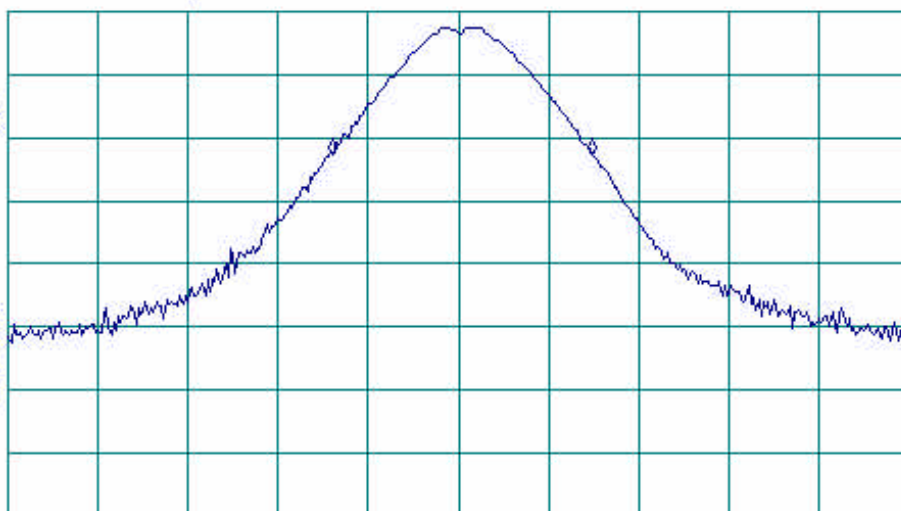

MARKER
NORMAL

MARKER
 Δ

MARKER
AMPTD

SELECT
1 2 3 4

MARKER 1
ON OFF

CENTER 318.000 MHz

RL #1F BW 100 kHz

#AVG BW 100 kHz

SPAN 2.000 MHz

SWP 20.0 msec

More

1 of 2



Plot A2

Field strength of fundamental measurements

16:23:12 AUG 26, 2002

ACTV DET: PEAK
MEAS DET: PEAK OP AVG
MKR 318.030 MHz
91.38 dBμV/m

MEASURE
AT MKR

ADD TO
LIST

MARKER
↓ CF

MARKER
△

NEXT
PEAK

NEXT PK
RIGHT


NEXT PK
LEFT

More
1 of 2

LOC REF 94.0 dBμV/m

10
dB/
ATN
20 dB

UA SB
SC FC
ACORR

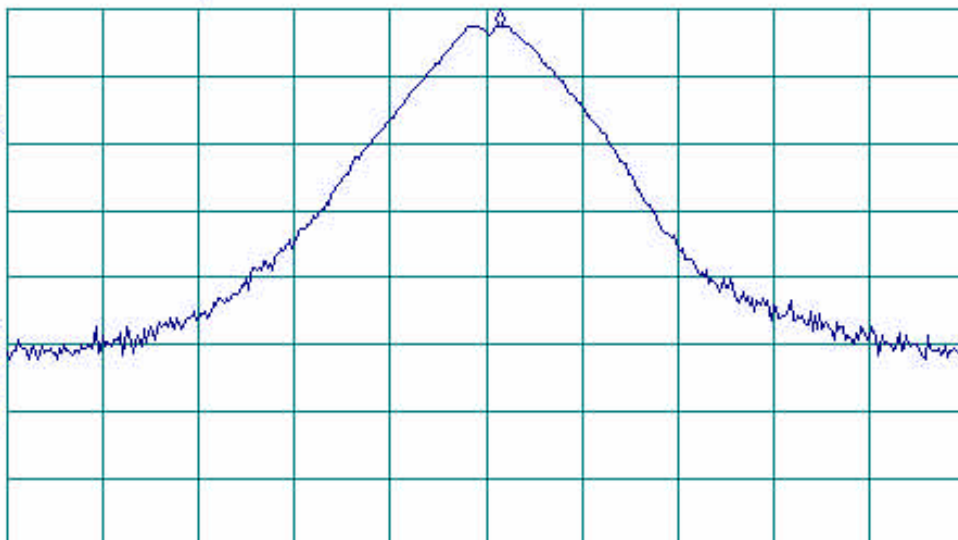

CENTER 318.000 MHz

RL #1F BW 120 kHz

#AVG BW 300 kHz

SPAN 2.000 MHz

SWP 20.0 msec

Average factor = $20\log(\text{Tx ON} / 100) = 20\log(6.255/100) = -24.1 \text{ dB}$

Average result = peak result + average factor = $91.38 - 24.1 = 67.28 \text{ dBuV/m}$ (Limit_{AVR} = 75.8 dBuV/m @3m)

Peak result = 91.38 dBuV/m (Limit_{PEAK} = 95.8 dBuV/m @3m)



Plot A3

Average factor measurements, 100 ms interval

17:34:17 AUG 26, 2002

ACTV DET: PEAK
MEAS DET: PEAK OP AVG
MKR Δ 6.2500 msec
.34 dB


MEASURE
AT MKR
ADD TO
LIST

LOG REF 93.0 dB μ V/m

PREAMP ON

10
dB/
ATN
30 dB

VA SB
SC LC
ACORR

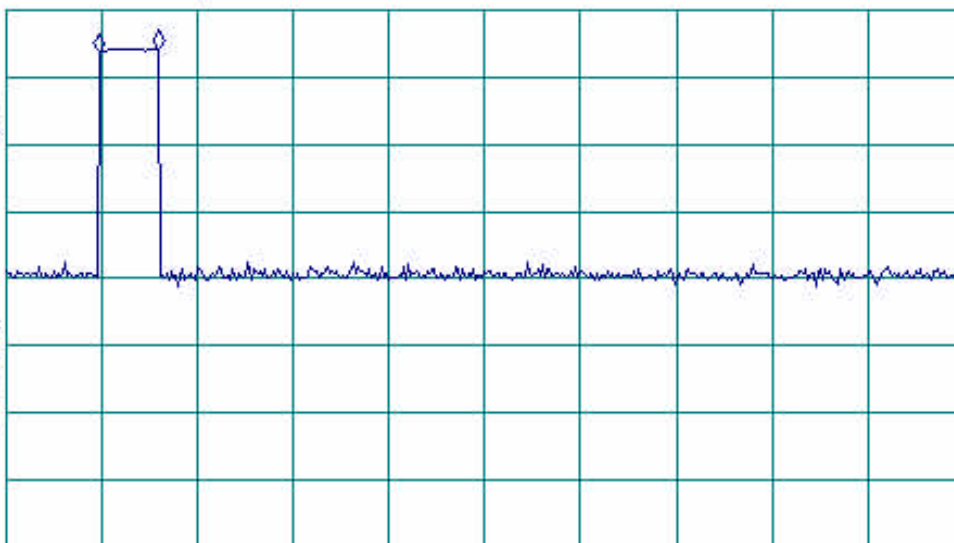

CENTER 318.000 MHz

SPAN 0 Hz

RL #1F BW 300 kHz

#AVC BW 1 MHz

#SWP 100 msec

CLEAR
WRITE A

MAX
HOLD A

VIEW A

BLANK A

Trace
A B C

More
1 of 3



Plot A4

Average factor measurements, 52.1 ms interval

17:38:23 AUG 26, 2002

ACTV DET: PEAK
MEAS DET: PEAK OP AVG
MKRΔ 6.2550 msec
.53 dB


MEASURE
AT MKR
ADD TO
LIST

LOG REF 93.0 dBμV/m

PREAMP ON

10
dB/
ATN
30 dB

VA SB
SC LC
ACORR

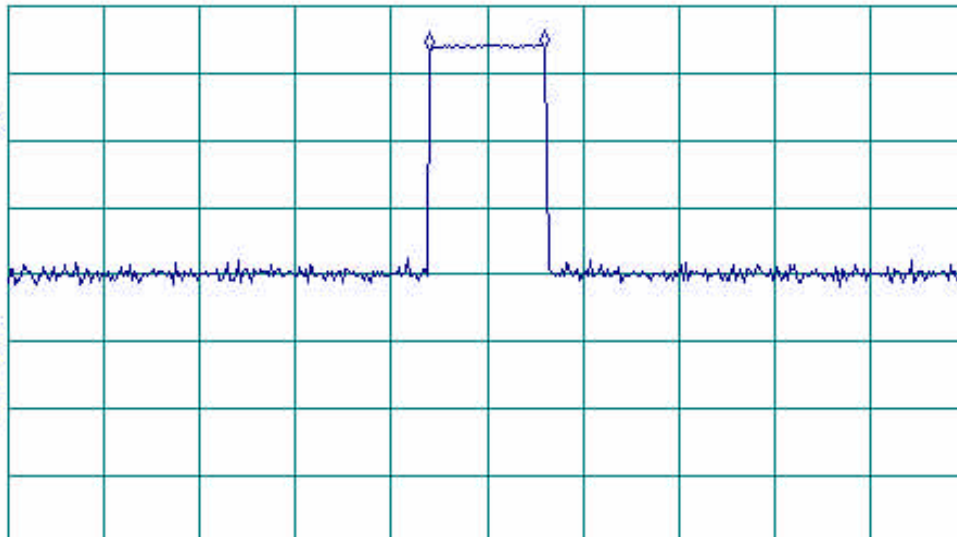

CENTER 318.000 MHz

SPAN 0 Hz

R #1F BW 300 kHz

#AVG BW 1 MHz

#SWP 52.1 msec

MARKER
NORMAL

MARKER
Δ

MARKER
AMPTD

SELECT
1 2 3 4

MARKER 1
ON OFF

More
1 of 2

Average factor = $20\log(\text{Tx ON} / 100) = 20\log(6.255/100) = -24.1 \text{ dB}$



Plot A5

Spurious emission measurements
9 kHz – 150 kHz frequency range

12:56:25 AUG 20, 2002


ACTV DET: PEAK
MEAS DET: PEAK OP AVG
MKR 10.7 kHz
68.05 dB μ V/m

MEASURE
AT MKR
ADD TO
LIST

LOG REF 130.0 dB μ V/m

10
dB/
ATN
50 dB

VA SB
SC FC
ACORR

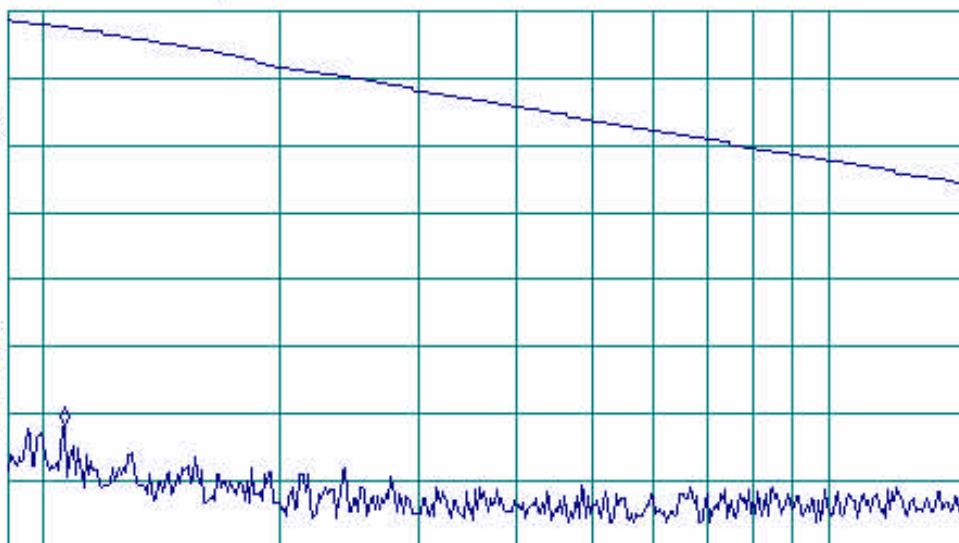

START 9.0 kHz STOP 150.0 kHz
R IF BW 200 Hz AVG BW 300 Hz SWP 10.3 sec

MARKER
↓ CF

MARKER
▲

NEXT
PEAK

NEXT PK
RIGHT


NEXT PK
LEFT

More
1 of 2



Plot A6

Spurious emission measurements
150 kHz – 30 MHz frequency range

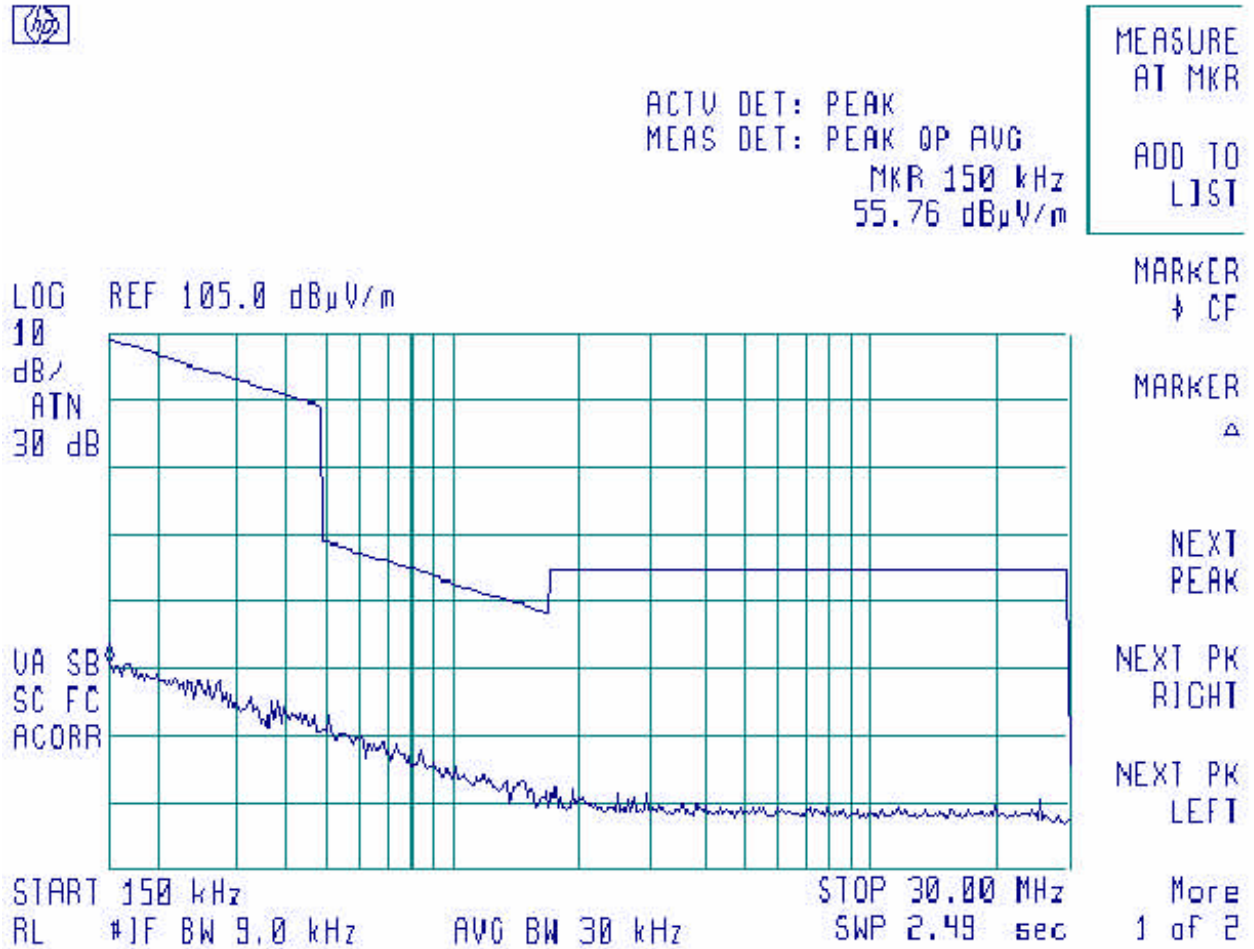



Plot A7

Spurious emission measurements
30 MHz – 1000 MHz frequency range


16:41:48 AUG 26, 2002

ACTV DET: PEAK
MEAS DET: PEAK OP AVG
MKR 641.1 MHz
50.40 dB μ V/m

MEASURE
AT MKR
ADD TO
LIST

LOG REF 92.0 dB μ V/m
10
dB/
#ATN
10 dB

VA SB
SC FC
ACORR

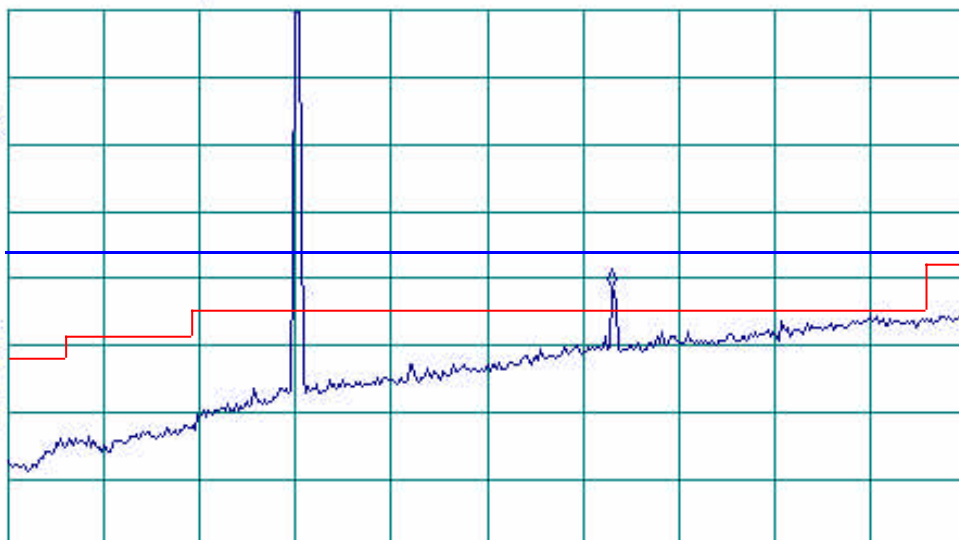

START 30.0 MHz STOP 1.0000 GHz
RL #1F BW 120 kHz #AVG BW 300 kHz SWP 909 msec

MARKER
↓ CF
MARKER
▲
NEXT
PEAK
NEXT PK
RIGHT
NEXT PK
LEFT

More
1 of 2

The red line is unintentional radiated emission limit according to § 15.109.

The blue line is spurious radiated emission limit according to § 15.231.



Plot A8

Field strength of 2nd harmonic

16:46:05 AUG 26, 2002

ACTV DET: PEAK
MEAS DET: PEAK OP AVG
MKR 636.060 MHz
52.12 dB μ V/m

MEASURE
AT MKR

ADD TO
LIST

MARKER
↓ CF

MARKER
△

NEXT
PEAK


NEXT PK
RIGHT

NEXT PK
LEFT

More
1 of 2

LOG REF 60.0 dB μ V/m

10
dB/
#ATN
0 dB

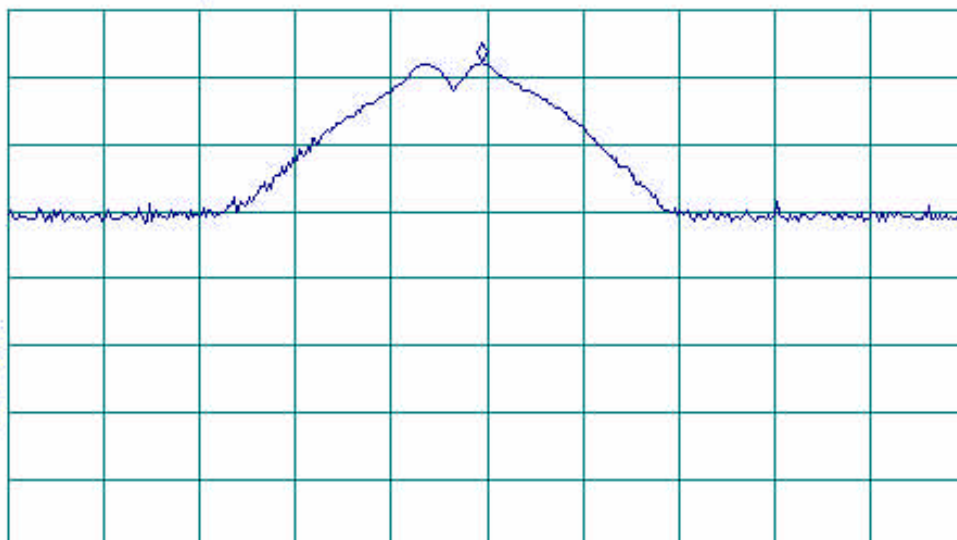

CENTER 636.070 MHz

SPAN 2.000 MHz

RL #1F BW 120 kHz

#AVG BW 300 kHz

SWP 20.0 msec



Plot A9

Spurious emission measurements
1 – 2 GHz frequency range

16:51:24 AUG 26, 2002

ACTV DET: PEAK
MEAS DET: PEAK OP AVG
MKR 1.985 GHz
45.92 dB μ V/m

MEASURE
AT MKR


ADD TO
LIST

LOG REF 60.0 dB μ V/m

PREAMP ON

MARKER
↓ CF

10
dB/
#ATN
0 dB

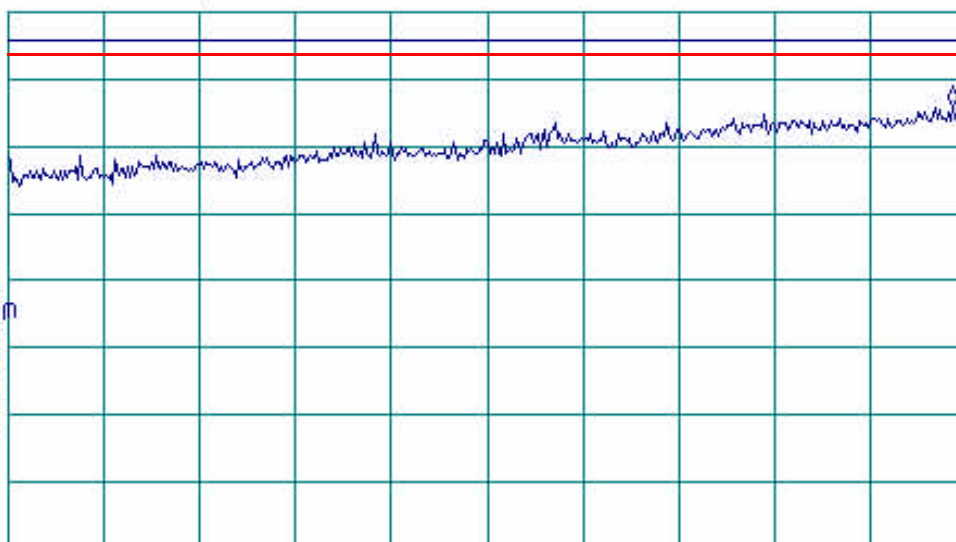

MARKER
△

NEXT
PEAK

NEXT PK
RIGHT

NEXT PK
LEFT

START 1.000 GHz

STOP 2.000 GHz

More

RL #1F BW 1.0 MHz

#AVG BW 1 MHz

SWP 20.0 msec

1 of 2

The red line is unintentional radiated emission limit according to § 15.109.

The blue line is spurious radiated emission limit according to § 15.231.



Plot A10

Spurious emission measurements
2 - 4 GHz frequency range

19:29:03 AUG 26, 2002 9K

ACTV DET: PEAK
MEAS DET: PEAK OP AVG
MKR 2.866 GHz
48.94 dB μ V/m


MEASURE
AT MKR
ADD TO
LIST

LOG REF 65.0 dB μ V/m

PREAMP ON

10
dB/
#ATN
0 dB

VA SB
SC LC
ACORR

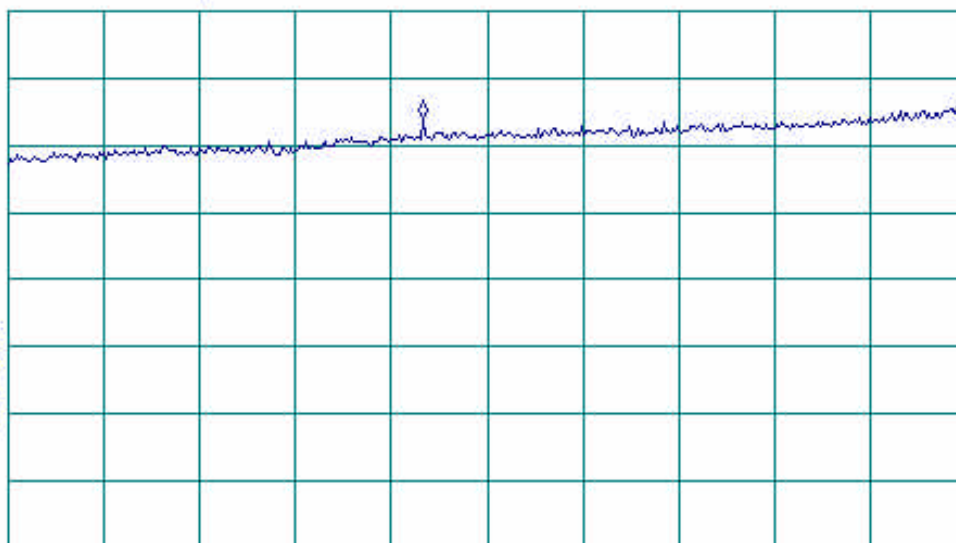

MARKER
NORMAL

MARKER
 Δ

MARKER
AMPTD

SELECT
1 2 3 4

MARKER 1
ON OFF

START 2.000 GHz

STOP 4.000 GHz

RL #1F BW 1.0 MHz

#AVG BW 1 MHz


#SWP 52.1 msec

More
1 of 2




Appendix B – Test setup photographs

RADIATED EMISSION MEASUREMENT SETUP, 9 kHz – 30 MHz FREQUENCY RANGE

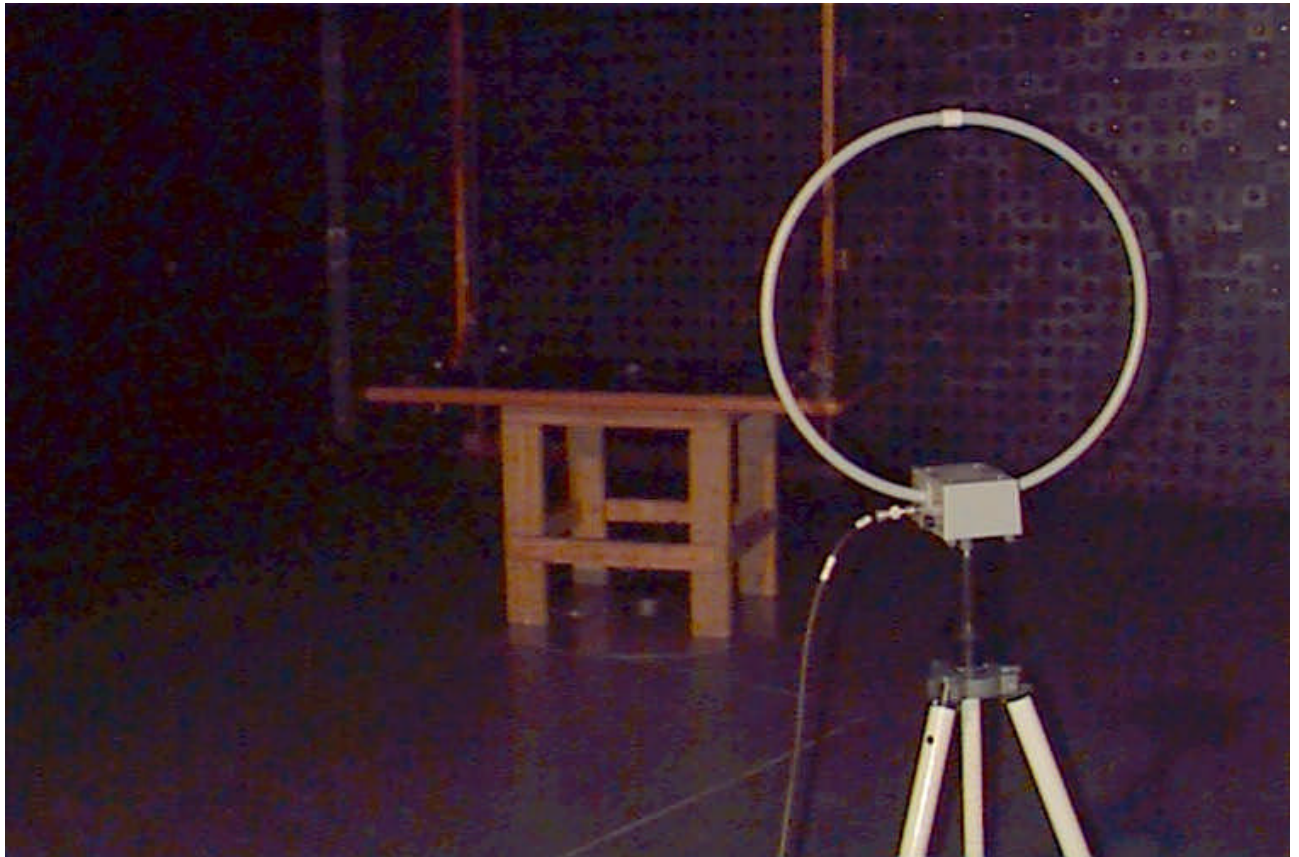




RADIATED EMISSION MEASUREMENT SETUP, 30 – 2000 MHz FREQUENCY RANGE

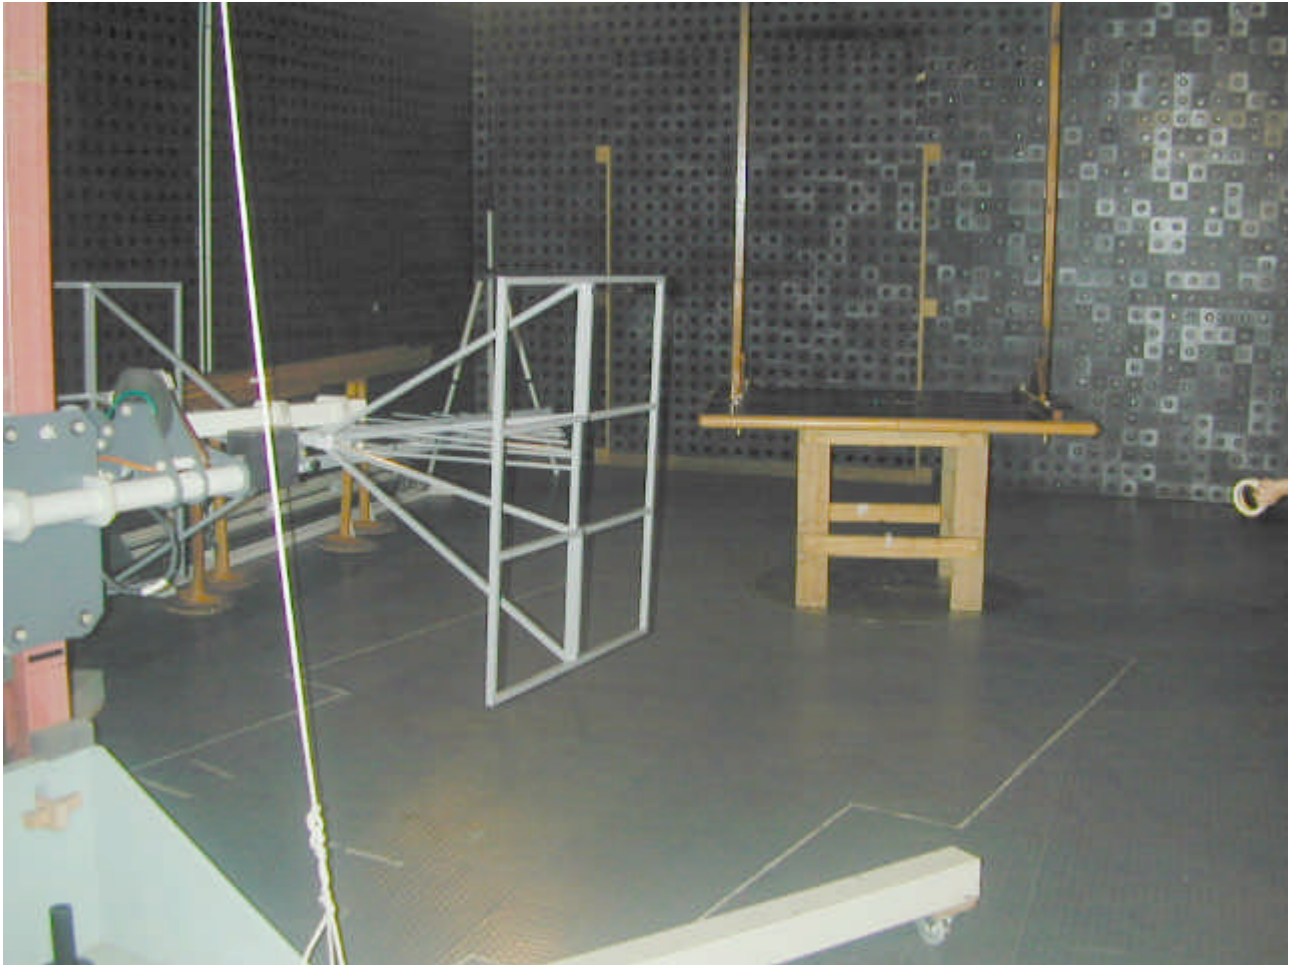



RADIATED EMISSION MEASUREMENT SETUP, 2000 – 4000 MHz FREQUENCY RANGE

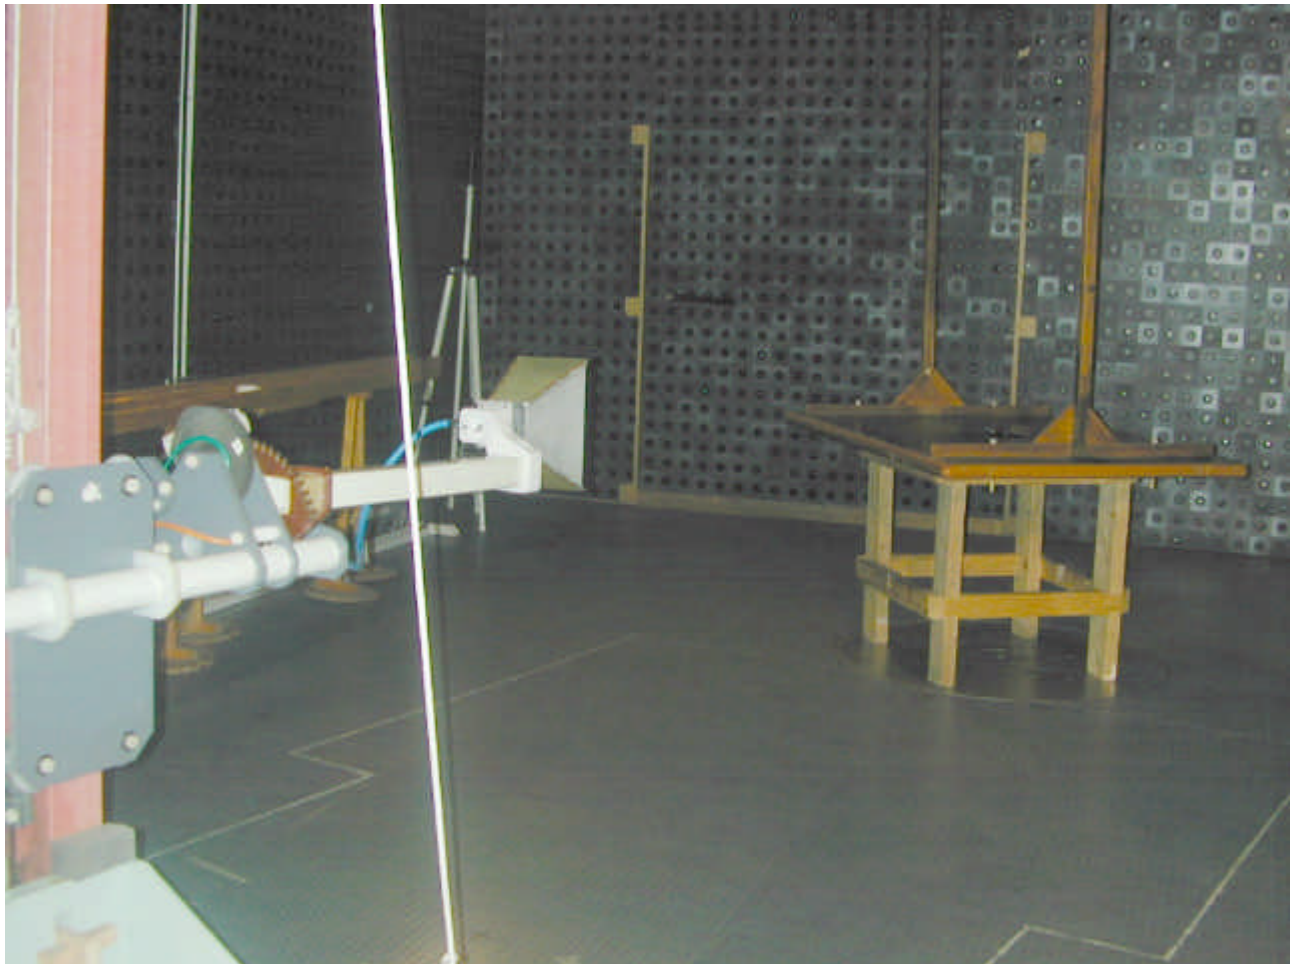



RADIATED EMISSION MEASUREMENTS, THE EUT VIEW





Appendix C - Test equipment used for tests

HL Serial No.	Description	Manufacturer information			Due Calibration Month/ year
		Name	Model No.	Serial No.	
0041	Double ridged guide antenna, 1-18 GHz	Electro-Metrics	RGA 50/60	2811	3/03
0446	Active Loop Antenna 10 kHz-30 MHz	Electro-Mechanics	6502	2857	10/03
0465	Anechoic Chamber 9 (L) x 6.5 (W) x 5.5 (H) m	Hermon Labs	AC-1	023	11/02
0521	Spectrum Analyzer with RF filter section (EMI Receiver 9 kHz - 6.5 GHz)	Hewlett Packard	8546A	0319	7/03
0589	Cable Coaxial, GORE A2POL118.2, 3m	Hermon Labs	GORE-3	589	12/02
0604	Antenna Biconilog Log-Periodic/T Bow-Tie, 26 - 2000 MHz	EMCO	3141	9611-1011	1/03
1003	Cable coaxial, M17/164, 10 m	Hermon Labs	C17164-10	161	12/02
1004	Cable, coaxial ANDREW PSWJ4, 6 m	Hermon Labs	ANDREW-6	163	12/02
1947	Cable 18 GHz, 6.5 m, blue	Rhophase Microwave Ltd	NPS-1803A-6500-NPS	T4974	10/03



Appendix E Test equipment correction factors

Antenna factor, Active Loop Antenna
Model 6502
S/N 2857

Frequency, MHz	Antenna Factor, dB
0.009	-32.8
0.010	-33.8
0.020	-38.3
0.050	-41.1
0.075	-41.3
0.100	-41.6
0.150	-41.7
0.250	-41.6
0.500	-41.8
0.750	-41.9
1.000	-41.4
2.000	-41.5
3.000	-41.4
4.000	-41.4
5.000	-41.5
10.000	-41.9
15.000	-41.9
20.000	-42.2
25.000	-42.8
30.000	-44.0

Antenna factor is to be added to receiver meter reading in dB(μ V) to convert to field intensity in dB(μ V/meter)



Antenna Factor
Biconilog Antenna EMCO Model 3141
Ser.No.1011

Frequency, MHz	Antenna Factor, dB(1/m)
26	7.8
28	7.8
30	7.8
40	7.2
60	7.1
70	8.5
80	9.4
90	9.8
100	9.7
110	9.3
120	8.8
130	8.7
140	9.2
150	9.8
160	10.2
170	10.4
180	10.4
190	10.3
200	10.6
220	11.6
240	12.4
260	12.8
280	13.7
300	14.7
320	15.2
340	15.4
360	16.1
380	16.4
400	16.6
420	16.7
440	17.0
460	17.7
480	18.1
500	18.5
520	19.1
540	19.5
560	19.8
580	20.6
600	21.3
620	21.5
640	21.2
660	21.4
680	21.9
700	22.2
720	22.2
740	22.1
760	22.3
780	22.6
800	22.7
820	22.9
840	23.1
860	23.4
880	23.8
900	24.1
920	24.1

Frequency, MHz	Antenna Factor, dB(1/m)
940	24.0
960	24.1
980	24.5
1000	24.9
1020	25.0
1040	25.2
1060	25.4
1080	25.6
1100	25.7
1120	26.0
1140	26.4
1160	27.0
1180	27.0
1200	26.7
1220	26.5
1240	26.5
1260	26.5
1280	26.6
1300	27.0
1320	27.8
1340	28.3
1360	28.2
1380	27.9
1400	27.9
1420	27.9
1440	27.8
1460	27.8
1480	28.0
1500	28.5
1520	28.9
1540	29.6
1560	29.8
1580	29.6
1600	29.5
1620	29.3
1640	29.2
1660	29.4
1680	29.6
1700	29.8
1720	30.3
1740	30.8
1760	31.1
1780	31.0
1800	30.9
1820	30.7
1840	30.6
1860	30.6
1880	30.6
1900	30.6
1920	30.7
1940	30.9
1960	31.2
1980	31.6
2000	32.0

Antenna factor is to be added to receiver meter reading in dB(μ V) to convert to field intensity in dB(μ V/meter).



Antenna Factor
Double Ridged Guide Antenna
Model RGA-50/60
S/N 2811

Frequency, MHz	Antenna Factor, dB
1000	24.3
1500	25.4
2000	28.4
2500	29.2
3000	30.5
3500	31.6
4000	33.7
4500	32.2
5000	34.5
5500	34.5
6000	34.6
6500	35.3
7000	35.5
7500	35.9
8000	36.6
8500	37.3
9000	37.7
9500	37.7
10000	38.2
10500	38.5
11000	39.0
11500	40.1
12000	40.2
12500	39.3
13000	39.9
13500	40.6
14000	41.1
14500	40.5
15000	39.9
15500	37.8
16000	39.1
16500	41.1
17000	41.7
17500	45.1
18000	44.3

Antenna factor is to be added to receiver meter reading in dB(μ V) to convert to field intensity in dB(μ V/meter)



**Cable Coaxial, GORE A2P01POL118, 2.3 m, model:GORE-3, s/n 176 (HL 0589)
+ Cable Coaxial, ANDREW PSWJ4, 6m, model: ANDREW -6, s/n 163 (HL 1004)
Calibration data**

No.	Parameter	SET, MHz	Measured, dB	Deviation, dB	Tolerance (Specification), dB	Meas. Uncert., dB	Notes
1	Insertion Loss	30	0.33	-	6.5	±0.12	
2		50	0.40	-			
3		100	0.57	-			
4		300	0.97	-			
5		500	1.25	-			
6		800	1.59	-			
7		1000	1.81	-			
8		1200	1.97	-			
9		1400	2.15	-			
10		1600	2.28	-			
11		1800	2.43	-			
12		2000	2.61	-			
13		2200	2.75	-			
14		2400	2.89	-			
15		2600	2.97	-			
16	Insertion Loss	2800	3.21	-	6.5	±0.12	
17		3000	3.32	-			
18		3300	3.47	-			
19		3600	3.62	-			
20		3900	3.84	-			
21		4200	3.92	-			
22		4500	4.07	-		±0.17	
23		4800	4.36	-			
24		5100	4.62	-			
25		5400	4.78	-			
26		5700	5.16	-			
27		6000	5.67	-			
28		6500	5.99	-			



Cable coaxial M17/164
Model: C17164-10, s/n 161 (HL 1003)
Calibration data

No.	Parameter	SET, MHz	Measured, dB	Deviation, dB	Tolerance (Specification), dB	Meas. Uncert., dB	Notes
1	Insertion Loss	30	0.41	-	12.5	±0.12	
2		50	0.52	-			
3		100	0.75	-			
4		300	1.45	-			
5		500	2.01	-			
6		800	2.71	-			
7		1000	3.14	-			
8		1200	3.56	-			
9		1400	3.93	-			
10		1600	4.31	-			
11		1800	4.63	-			
12		2000	4.97	-			
13		2200	5.32	-			
14		2400	5.65	-			
15		2600	6.01	-			
16	Insertion Loss	2800	6.42	-	12.5	±0.12	
17		3000	6.76	-			
18		3300	7.12	-			
19		3600	7.53	-			
20		3900	7.95	-			
21		4200	8.32	-			
22		4500	8.72	-		±0.17	
23		4800	9.14	-			
24		5100	9.59	-			
25		5400	10.00	-			
26		5700	10.49	-			
27		6000	11.07	-			
28		6500	11.80	-			

**Cable 18GHz, 6.5 m, blue, model: NPS-1803A-6500-NPS, s/n T4974 (HL 1947)**
Calibration data

Frequency, GHz	Insertion Loss, dB
	HL1947
0.03	0.30
0.05	0.38
0.10	0.53
0.20	0.74
0.30	0.91
0.40	1.05
0.50	1.18
0.60	1.29
0.70	1.40
0.80	1.50
0.90	1.59
1.00	1.68
1.10	1.77
1.20	1.86
1.30	1.94
1.40	2.01
1.50	2.08
1.60	2.16
1.70	2.22
1.80	2.29
1.90	2.36
2.00	2.42
2.10	2.48
2.20	2.54
2.30	2.60
2.40	2.66
2.50	2.71
2.60	2.77
2.70	2.83
2.80	2.89
2.90	2.95
3.10	3.06
3.30	3.17
3.50	3.28
3.70	3.39
3.90	3.51
4.10	3.62
4.30	3.76
4.50	3.87
4.70	4.01
4.90	4.10
5.10	4.21
5.30	4.31
5.50	4.43
5.70	4.56
5.90	4.71

Frequency, GHz	Insertion Loss, dB
	HL1947
6.10	4.87
6.30	4.95
6.50	4.94
6.70	4.88
6.90	4.87
7.10	4.83
7.30	4.85
7.50	4.86
7.70	4.91
7.90	4.96
8.10	5.03
8.30	5.08
8.50	5.13
8.70	5.21
8.90	5.22
9.10	5.34
9.30	5.35
9.50	5.52
9.70	5.51
9.90	5.66
10.10	5.70
10.30	5.78
10.50	5.79
10.70	5.82
10.90	5.86
11.10	5.94
11.30	6.06
11.50	6.21
11.70	6.44
11.90	6.61
12.10	6.76
12.40	6.68
13.00	6.66
13.50	6.81
14.00	6.90
14.50	6.90
15.00	6.97
15.50	7.17
16.00	7.28
16.50	7.27
17.00	7.38
17.50	7.68
18.00	7.92



Appendix E - General information

Test facility description

Tests were performed at Hermon Laboratories Ltd., which is a fully independent, private EMC, Safety and Telecommunication testing facility. Hermon Laboratories is listed by the Federal Communications Commission (USA) for all parts of Code of Federal Regulations 47 (CFR 47) and by Industry Canada for electromagnetic emissions (file numbers IC 2186-1 for OATS and IC 2186-2 for anechoic chamber), certified by VCCI, Japan (the registration numbers are R-808 for OATS, R-1082 for anechoic chamber, C-845 for conducted emissions site), assessed by TNO Certification EP&S (Netherlands) for a number of EMC, Telecommunications, Safety standards, and by AMTAC (UK) for safety of Medical Devices. The laboratory is accredited by American Association for Laboratory Accreditation (USA) according to ISO/IEC 17025 for Electromagnetic Compatibility, Product Safety, Telecommunications Testing and Environmental Simulation (for exact scope please refer to Certificate No. 839.01).

Address: PO Box 23, Binyamina 30550, Israel.
Telephone: +972 4628 8001
Fax: +972 4628 8277
e-mail: mail@hermonlabs.com

Person for contact: Mr. Alex Usoskin, QA manager.

Abbreviations and acronyms

The following abbreviations and acronyms are applicable to this test report:

AC	alternating current
cm	centimeter
dB	decibel
dBm	decibel referred to one milliwatt
dB(μ V)	decibel referred to one microvolt
dB(μ V/m)	decibel referred to one microvolt per meter
EMC	electromagnetic compatibility
EUT	equipment under test
GHz	gigahertz
H	height
Hz	hertz
kHz	kilohertz
kV	kilovolt
L	length
m	meter
MHz	megahertz
NA	not applicable
QP	quasi-peak
RF	radio frequency
RE	radiated emission
rms	root mean square
s	second
V	volt
W	width

Specification references

47CFR part 15: 2001	Radio Frequency Devices
ANSI C63.2:96	American National Standard for Instrumentation-Electromagnetic Noise and Field Strength, 10 kHz to 40 GHz-Specifications.
ANSI C63.4:92	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz.



FCC Equipment codes and descriptions

CYY	Communications Receiver used w/ P.15 transmitter
DCD	Part 15 Low Power transmitter Below 1705 kHz
DSC	Part 15 Security/Remote Control Transmitter
DSR	Part 15 Remote Control/Security Device Transceiver
DSS	Part 15 Spread Spectrum Transmitter
DXX	Part 15 Low Power Communication Device Transmitter
EAV	Part 15 Automatic Vehicle Identification System
ETB	Part 15 Cordless Telephone Base Transceiver
ETR	Part 15 Cordless Telephone Remote Transceiver
ETS	Part 15 Cordless telephone system
FAP	Part 15 Anti-Pilferage Device
FDS	Part 15 Field Disturbance Sensor
GAT	Part 15 Auditory Assistance Device (Transmitter)
HID	Part 15 TV Interface Device
JBC	Part 15 Class B Computing Device/ Personal Computer
JBP	Part 15 Class B Computing Device Peripheral
PUB	Part 15 Unlicensed PCS base station
PUE	Part 15 Unlicensed PCS portable Tx held to ear
PUF	Part 15 Unlicensed PCS portable Tx held to face
PUT	Part 15 Unlicensed PCS portable Tx worn on body