



FCC LISTED,  
 REGISTRATION NUMBER:  
 720267

Informe de ensayo nº:  
 Test report No:

IC LISTED REGISTRATION  
 NUMBER IC 4621A-2

**NIE: 52668RRF.001**

## Test report

USA FCC Part 15.231, 15.209

CANADA RSS-210, RSS-Gen

Radio Frequency Devices. Periodic operation in the band 40.66-40.70 MHz and above 70 MHz.

Licence-Exempt Radio Apparatus (All Frequency Bands): Category I Equipment.  
 General Requirements and Information for the Certification of Radio Apparatus.

<b>Identificación del objeto ensayado</b> .....:	ITE
Identification of item tested	
<b>Marca</b> .....	3M One Piece GPS Tracking Device 4i
Trademark	
<b>Modelo y/o referencia tipo</b> .....	1 Piece GPS TD4i
Model and /or type reference	
<b>Other identification of the product</b> .....	FCC ID: LSQ-TD4i-433
<b>Final HW version</b> .....	(Prototype) 100
<b>Final SW version</b> .....	4.10.56.29
<b>Características</b> .....	Data not provided.
Features	
<b>Solicitante</b> .....	3M ELECTRONIC MONITORING
Applicant	2 Habarzel St. Tel-Aviv, 69710, Israel
<b>Método de ensayo solicitado, norma</b> .....:	USA FCC Part 15.231 10-1-15 Edition: Periodic operation in the band 40.66-40.70 MHz and above 70 MHz.
Test method requested, standard	USA FCC Part 15.209 10-1-15 Edition: Radiated emission limits; general requirements.
	CANADA RSS-210 Issue 9 (August 2016).
	CANADA RSS-Gen Issue 4 (November 2014).
	ANSI C63.10-2013: American National Standard for Testing Unlicensed Wireless Devices.
<b>Resultado</b> .....:	IN COMPLIANCE
Summary	
<b>Aprobado por (nombre / cargo y firma)</b> .....	A. Llamas / RF Lab. Manager
Approved by (name / position & signature)	
<b>Fecha de realización</b> .....	2017-04-17
Date of issue	
<b>Formato de informe No.</b> .....	FDT08_19
Report template No	

# Index

Competences and guarantees.....	3
General conditions.....	3
Uncertainty .....	3
Usage of samples.....	3
Test sample description .....	4
Identification of the client .....	4
Testing period.....	5
Environmental conditions.....	5
Remarks and comments.....	6
Testing verdicts .....	7
Appendix A – Test result.....	8

## Competences and guarantees

DEKRA Testing and Certification is a testing laboratory accredited by the National Accreditation Body (ENAC - Entidad Nacional de Acreditación), to perform the tests indicated in the Certificate No. 51/LE 147.

DEKRA Testing and Certification is a laboratory with a measurement facility in compliance with the requirements of Section 2.948 of the FCC rules and has been added to the list of facilities whose measurements data will be accepted in conjunction with applications for Certification under Parts 15 or 18 of the Commission's Rules. Registration Number: 720267.

DEKRA Testing and Certification is a laboratory with a measurement site in compliance with the requirements of RSS 212, Issue 1 (Provisional) and has been added to the list of filed sites of the Canadian Certification and Engineering Bureau. Reference File Number: IC 4621A-2.

In order to assure the traceability to other national and international laboratories, DEKRA Testing and Certification has a calibration and maintenance program for its measurement equipment.

DEKRA Testing and Certification guarantees the reliability of the data presented in this report, which is the result of the measurements and the tests performed to the item under test on the date and under the conditions stated on the report and, it is based on the knowledge and technical facilities available at DEKRA Testing and Certification at the time of performance of the test.

DEKRA Testing and Certification is liable to the client for the maintenance of the confidentiality of all information related to the item under test and the results of the test.

The results presented in this Test Report apply only to the particular item under test established in this document.

**IMPORTANT:** No parts of this report may be reproduced or quoted out of context, in any form or by any means, except in full, without the previous written permission of DEKRA Testing and Certification.

## General conditions

1. This report is only referred to the item that has undergone the test.
2. This report does not constitute or imply on its own an approval of the product by the Certification Bodies or competent Authorities.
3. This document is only valid if complete; no partial reproduction can be made without previous written permission of DEKRA Testing and Certification.
4. This test report cannot be used partially or in full for publicity and/or promotional purposes without previous written permission of DEKRA Testing and Certification and the Accreditation Bodies.

## Uncertainty

Uncertainty (factor  $k=2$ ) was calculated according to the DEKRA Testing and Certification internal document PODT000.

## Usage of samples

Samples undergoing test have been selected by: **the client**

Sample S/01 is composed of the following elements:

Control N°	Description	Model	Serial N°	Date of reception
52668/004	ITE	1 Piece GPS TD4i	34688811	2017-03-13
52668/006	AC/DC adapter	DSA-24PFM-12	---	2017-03-13

1. Sample S/01 has undergone following test(s) in appendix A:

Section 15.231 Subclause (c) / RSS-210 A.1.3: 20 dB Emission Bandwidth and Occupied Bandwidth.

Section 15.231 Subclause (e) / RSS-210 A.1.4. Transmitter deactivation (Periodic transmission).

Sample S/02 is composed of the following elements:

Control N°	Description	Model	Serial N°	Date of reception
52668/005	ITE	1 Piece GPS TD4i	34688808	2017-03-13
52668/006	AC/DC adapter	DSA-24PFM-12	---	2017-03-13

1. Sample S/02 has undergone following test(s) in appendix A:

Section 15.231 Subclause (e) & 15.209 / RSS-210 A.1.4. & RSS-Gen: Field strength and Emission limitations radiated (Transmitter).

Sample S/03 is composed of the following elements:

Control N°	Description	Model	Serial N°	Date of reception
52668/005	ITE	1 Piece GPS TD4i	34688808	2017-03-13
52668/002	AC/DC adapter	KSASB0241200200HU	---	2017-03-09

1. Sample S/03 has undergone following test(s) in appendix A:

Section 15.231 Subclause (e) & 15.209 / RSS-210 A.1.4. & RSS-Gen: Field strength and Emission limitations radiated (Transmitter).

Sample S/04 is composed of the following elements:

Control N°	Description	Model	Serial N°	Date of reception
52668/005	ITE	1 Piece GPS TD4i	34688808	2017-03-13
52668/007	Power bank	Cordless charger	261600382	2017-03-17

1. Sample S/04 has undergone following test(s) in appendix A:

Section 15.231 Subclause (e) & 15.209 / RSS-210 A.1.4. & RSS-Gen: Field strength and Emission limitations radiated (Transmitter).

## Test sample description

The test sample consists of a self-contained device designed to track offender's whereabouts using GPS technology for outdoor tracking. The system features a complementary RF, communication for indoor use option to use a cordless charger for enhanced user experience.

## Identification of the client

3M ELECTRONIC MONITORING

2 Habarzel St. Tel-Aviv, 69710, Israel

## Testing period

The performed test started on 2017-03-17 and finished on 2017-03-29.

The tests have been performed at DEKRA Testing and Certification.

## Environmental conditions

In the control chamber, the following limits were not exceeded during the test:

<b>Temperature</b>	Min. = 15 °C Max. = 35 °C
<b>Relative humidity</b>	Min. = 20 % Max. = 75 %
<b>Shielding effectiveness</b>	> 100 dB
<b>Electric insulation</b>	> 10 kΩ
<b>Reference resistance to earth</b>	< 1 Ω

In the semianechoic chamber, the following limits were not exceeded during the test.

<b>Temperature</b>	Min. = 15 °C Max. = 35 °C
<b>Relative humidity</b>	Min. = 20 % Max. = 75 %
<b>Air pressure</b>	Min. = 860 mbar Max. = 1060 mbar
<b>Shielding effectiveness</b>	> 100 dB
<b>Electric insulation</b>	> 10 kΩ
<b>Reference resistance to earth</b>	< 1 Ω
<b>Normal site attenuation (NSA)</b>	< ±4 dB at 10 m distance between item under test and receiver antenna, (30 MHz to 1000 MHz)
<b>Field homogeneity</b>	More than 75% of illuminated surface is between 0 and 6 dB (26 MHz to 1000 MHz).

In the chamber for conducted measurements, the following limits were not exceeded during the test:

<b>Temperature</b>	Min. = 15 °C Max. = 35 °C
<b>Relative humidity</b>	Min. = 20 % Max. = 35 %
<b>Air pressure</b>	Min. = 860 mbar Max. = 1060 mbar
<b>Shielding effectiveness</b>	> 100 dB
<b>Electric insulation</b>	> 10 kΩ
<b>Reference resistance to earth</b>	< 1 Ω

## Remarks and comments

1: Used instrumentation:

### Conducted Measurements

		Last Cal. date	Cal. due date
1.	Spectrum analyser Agilent E4440A	2015/10	2017/10
2.	Spectrum analyser Rohde & Schwarz FSQ8	2016/06	2018/06

### Radiated Measurements

		Last Cal. date	Cal. due date
1.	Semianechoic Absorber Lined Chamber ETS FACT3 200STP	N.A.	N.A.
2.	BiconicalLog antenna ETS LINDGREN 3142E	2015/06	2018/06
3.	Multi Device Controller EMCO 2090	N.A.	N.A.
4.	Double-ridge Guide Horn antenna 1-18 GHz SCHWARZBECK BBHA 9120 D	2016/11	2019/11
5.	EMI Test Receiver R&S ESU 40	2016/03	2018/03
6.	Spectrum analyser Rohde & Schwarz FSW50	2015/12	2017/12
7.	RF pre-amplifier 10 MHz-6 GHz SCHWARZBECK BBV9743	2016/04	2017/04
8.	RF pre-amplifier 1-18 GHz Bonn Elektronik BLMA 0118-1M	2016/02	2018/02

## Testing verdicts

<b>Not applicable</b> .....	N/A
<b>Pass</b> .....	P
<b>Fail</b> .....	F
<b>Not measured</b> .....	N/M

FCC PART 15 PARAGRAPH / RSS-210		VERDICT			
		NA	P	F	NM
Section 15.231 Subclause (a) (1) / RSS-210 A.1.1.	Transmitter deactivation		P		
Section 15.231 Subclause (c) / RSS-210 A.1.3...	Bandwidth		P		
Section 15.231 Subclause (e) / 15.209 / RSS-210 A.1.4. / RSS-Gen	Field strength and Emission limitations radiated (Transmitter)		P		

## Appendix A – Test result



## INDEX

TEST CONDITIONS .....	10
Section 15.231 Subclause (e) / RSS-210 A.1.4. Transmitter deactivation.....	12
Section 15.231 Subclause (c) / RSS-210 A.1.3. Bandwidth .....	14
Occupied Bandwidth .....	15
Section 15.231 Subclause (e) / 15.209 / RSS-210 A.1.4. / RSS-Gen. Field strength and Emission limitations radiated (Transmitter).....	16

## TEST CONDITIONS

Power supply (V):

$$V_{\text{nominal}} = 115 \text{ Vac}$$

Type of power supply = External power supply by AC/DC adapter.

Type of antenna = Integral antenna

### TEST FREQUENCIES:

The equipment transmits at the nominal frequency of 433.92 MHz.

### CONDUCTED MEASUREMENTS

The equipment under test was set up in a shielded room and it is directly connected to the spectrum analyzer.



### RADIATED MEASUREMENTS

The equipment under test was scanned for spurious emissions in the frequency range 30 to 10000 MHz.


All radiated tests were performed in a semi-anechoic chamber. The measurement antenna is situated at a distance of 3 m for the frequency range 30 MHz-1000 MHz (30 MHz-1000 MHz Bilog antenna) and at a distance of 1m for the frequency range 1 GHz-10 GHz (1 GHz-18 GHz Double ridge horn antenna).

For radiated emissions in the range 1 GHz-10 GHz that is performed at a distance closer than the specified distance, an inverse proportionality factor of 20 dB per decade is used to normalize the measured data for determining compliance. The sample is prepared so that transmits continuously when the batteries are connected


The equipment under test was set up on a non-conductive platform above the ground plane and the situation and orientation was varied to find the maximum radiated emission. It was also rotated 360° and the antenna height was varied from 1 to 4 meters to find the maximum radiated emission.

Measurements were made in both horizontal and vertical planes of polarization.

### Radiated measurements setup $f < 1$ GHz

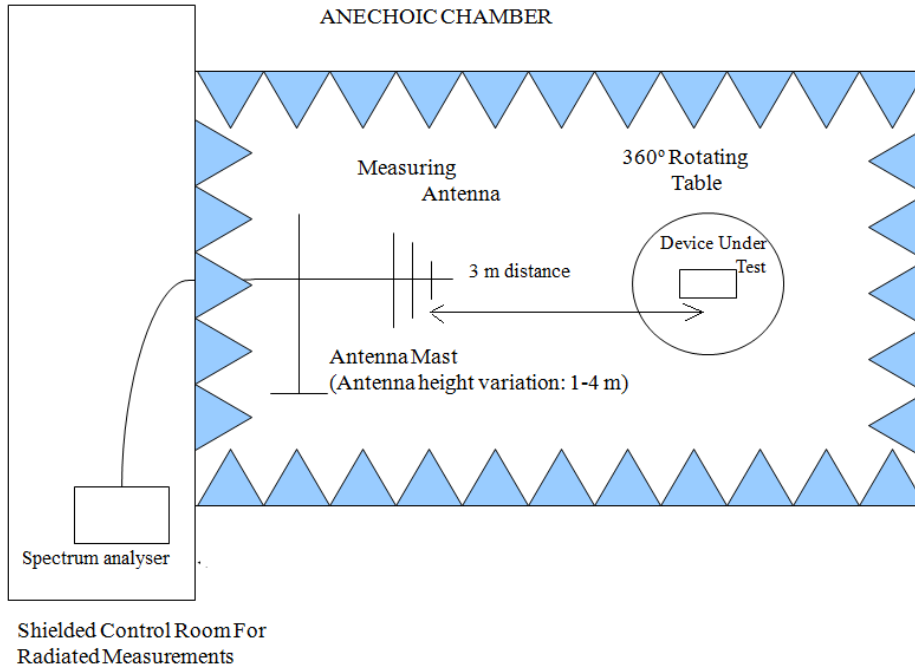

### Radiated measurements setup $f > 1$ GHz

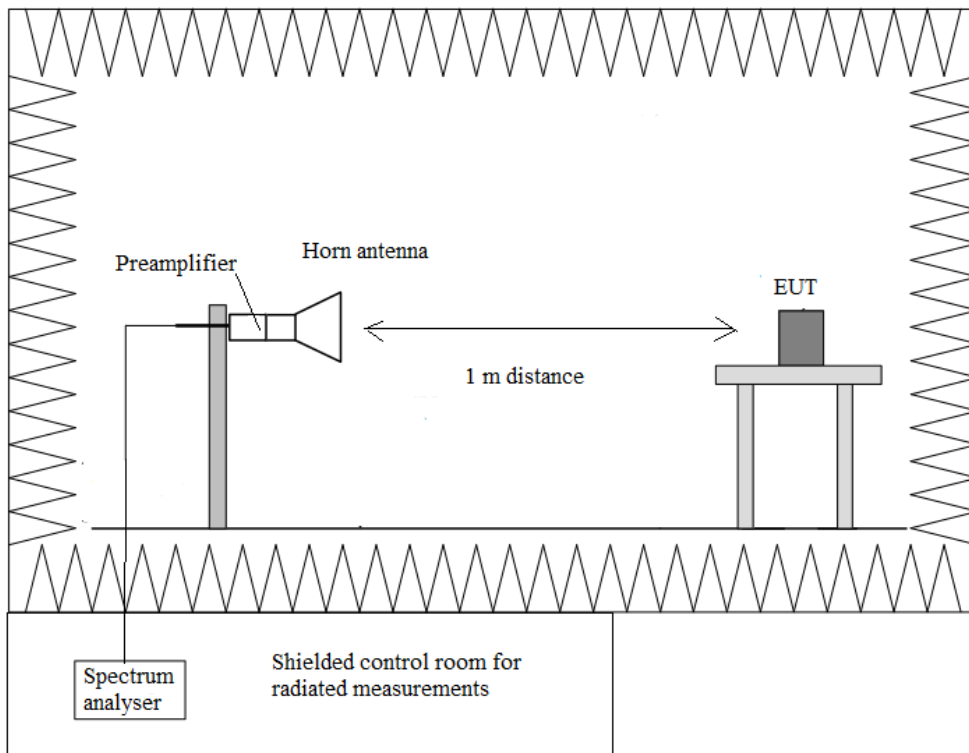

### Section 15.231 Subclause (e) / RSS-210 A.1.4. Transmitter deactivation.

#### SPECIFICATION

##### FCC 15.231:

Devices operated under the provisions of this paragraph shall be provided with a means for automatically limiting operation so that the duration of each transmission shall not be greater than one second and the silent period between transmissions shall be at least 30 times the duration of the transmission but in no case less than 10 seconds.


##### RSS-210:

Devices operated under the provisions of this section shall be capable of automatically limiting their operation so that the duration of each transmission is not greater than 1 second and the silent period between transmissions is at least 30 times the duration of the transmission, but not less than 10 seconds under any circumstances. However, devices that are designed for limited use for the purpose of initial programming, reprogramming or installing, and not for regular operations, may operate for up to 5 seconds, provided such devices are used only occasionally in connection with each unit being programmed or installed.


#### RESULTS

In normal operation the equipment transmits a pulse periodically (see next plots).

1. Pulse period = 19.90 s.

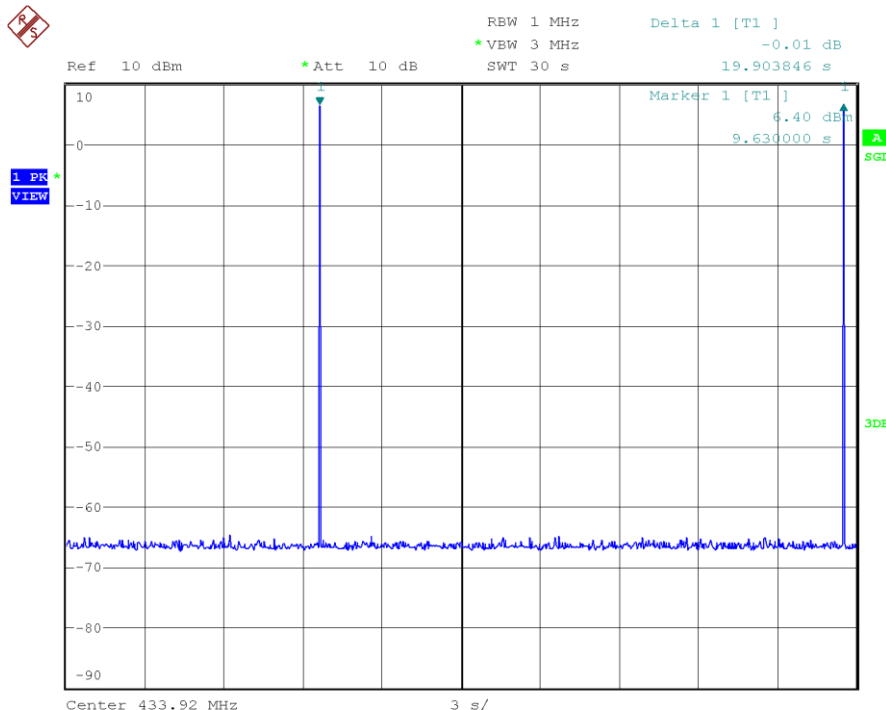

2. Pulse duration = 3.04 ms.

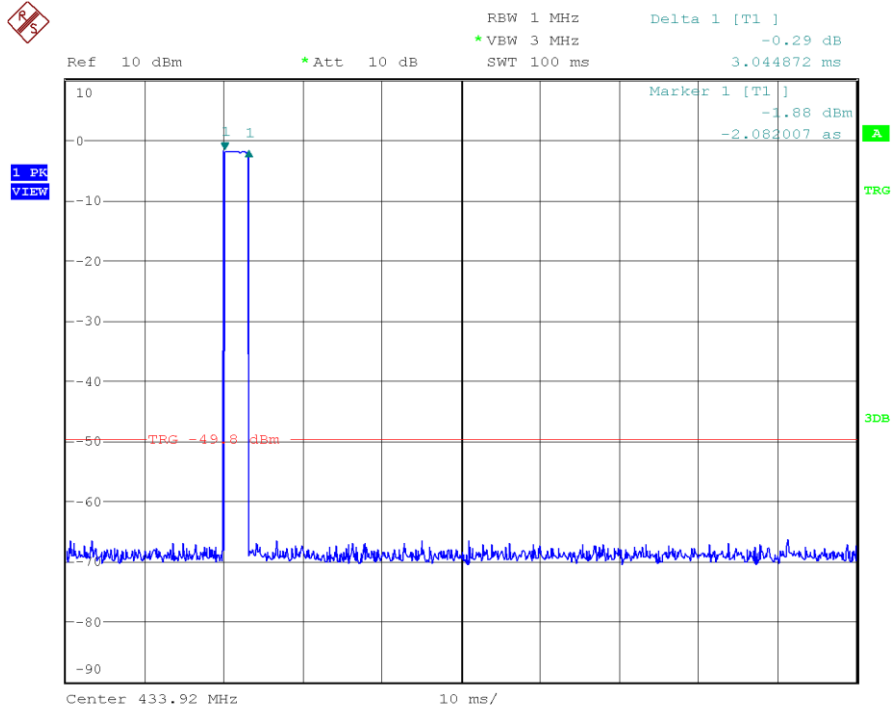

The equipment transmits one pulse of 3.04 ms every 19.90 seconds (see plots above). 30 times the duration of the transmission is 91.20 milliseconds.

The silent period between transmissions is 19.897 seconds.

Verdict: Pass

**Section 15.231 Subclause (c) / RSS-210 A.1.3. Bandwidth**

SPECIFICATION


FCC 15.231: The bandwidth of the emission shall be no wider than 0.25 % of the centre frequency for devices operating above 70 MHz and below 900 MHz. Bandwidth is determined at the points 20 dB down from the modulated carrier.

RESULTS (see next plots)

Nominal centre frequency = 433.92 MHz

Limit of spectrum bandwidth = 0.25 % of 433.92 MHz = 1084.80 kHz

Measured 20 dB Bandwidth (kHz)	110.50
Measurement uncertainty (kHz)	<±4.50

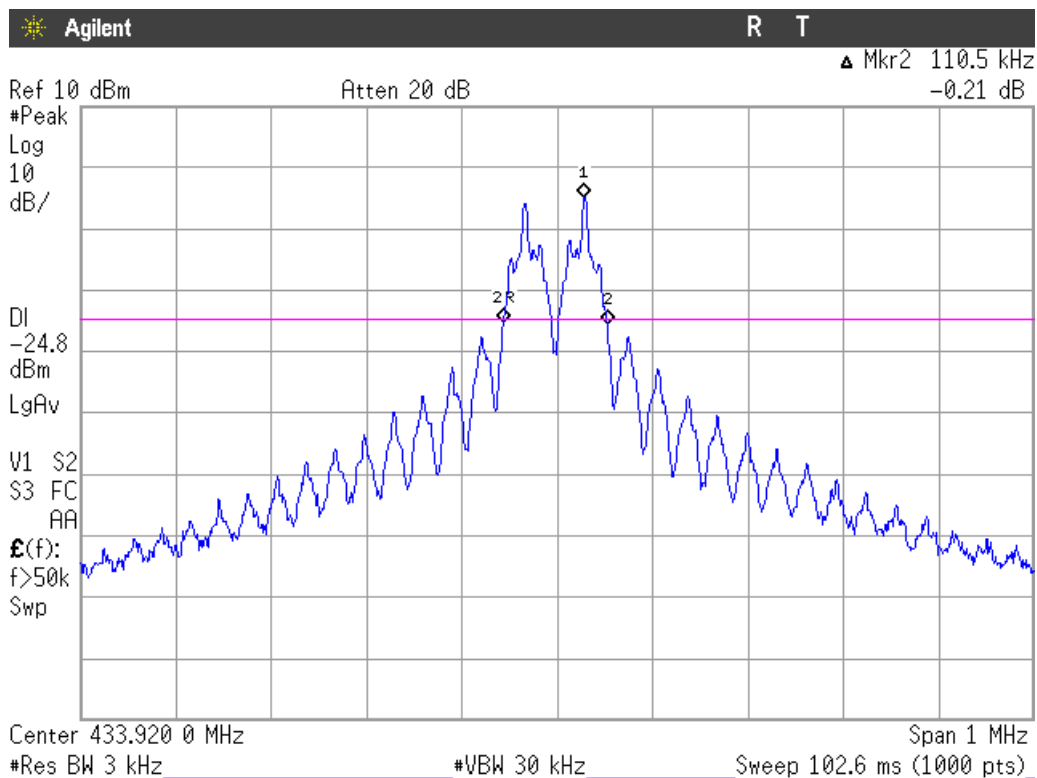

Verdict: PASS

### Occupied Bandwidth

#### SPECIFICATION


RSS-210. A.1.3.: the 99% bandwidth shall be no wider than 0.25% of the centre frequency for devices operating between 70 MHz and 900 MHz.

RESULTS (see next plots).

Nominal centre frequency = 433.92 MHz

Limit of spectrum bandwidth = 0.25 % of 433.92 MHz = 1084.80 kHz

99% bandwidth (kHz)	130.420
-26 dBc bandwidth (kHz)	167.766
Measurement uncertainty (kHz)	<±1.67

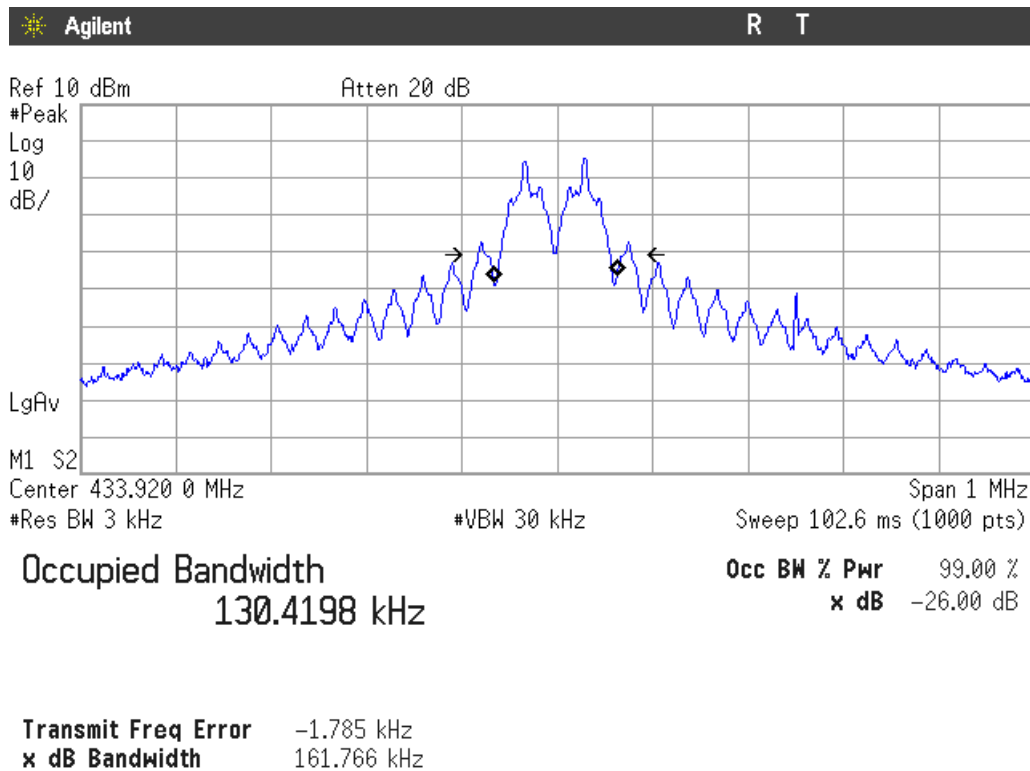

**Section 15.231 Subclause (e) / 15.209 / RSS-210 A.1.4. / RSS-Gen. Field strength and Emission limitations radiated (Transmitter)**

**SPECIFICATION**

Intentional radiators may operate at a periodic rate exceeding that specified in paragraph (a) of this section and may be employed for any type of operation, including operation prohibited in paragraph (a) of this section, provided the intentional radiator complies with the provisions of paragraphs (b) through (d) of this section, except the field strength table in paragraph (b) of this section is replaced by the following:

Fundamental frequency (MHz)	Field strength of fundamental ( $\mu\text{V/m}$ )	Field strength of spurious emissions ( $\mu\text{V/m}$ )
40.66 – 40.70	1,000	100
70 – 130	500	50
130 - 174	500 to 1,500 **	50 to 150 **
174 - 260	1,500	150
260 - 470	1,500 to 5,000 **	150 to 500 **
Above 470	5,000	500

\*\* : Linear Interpolations. The maximum permitted unwanted emission level is 20dB below the maximum permitted fundamental level.

Spurious emissions shall be attenuated to the limits shown in the above table or to the general limits shown in Section 15.209/RSS-Gen, whichever limit permits a higher field strength.

For average radiated emission measurements above 1000 MHz, there is also a limit corresponding to 20 dB above the indicated values in the table is specified when measuring with peak detector function.

**RESULTS:**

A preliminary scan determined the sample S/02 (ITE device plus AC/DC adapter model DSA-24PFM-12) as the worst case.

For radiated spurious emissions, the test was performed first with the equipment transmitting with the 433.92 MHz radio only and then repeated with the 433.92 MHz and cellular 2G/3G radios (worst case) transmitting simultaneously to check the impact of the co-location of both radio interfaces. The results and plots below show the worst results obtained.



The field strength is calculated by adding correction factor to the measured level from the spectrum analyser. This correction factor includes antenna factor, cable loss and pre-amplifiers gain.

The transmission is pulsed so the average values of transmitter fundamental and spurious emissions are calculated from the measured peak values using the duty cycle correction factor  $\delta$  as indicated in standard ANSI C63.10-2013.



### Computation of duty-cycle correction factor

Number of pulses within 100 ms:

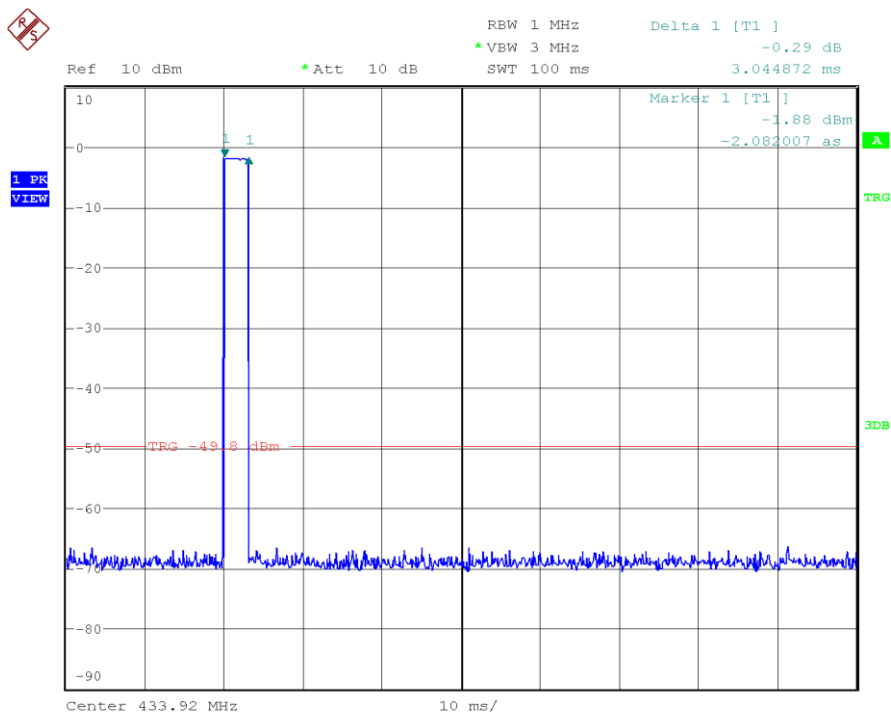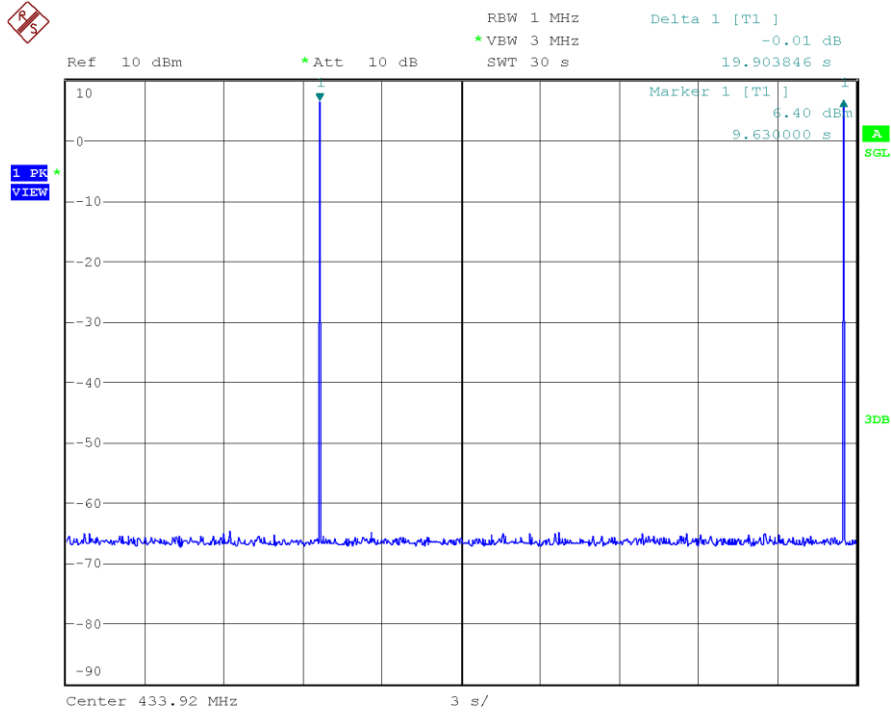

Duty-cycle correction factor calculation.

Sub-pulse	Duration (ms)	Number of pulses	Sub-pulse “On Time” (ms)
1	3.04	1	3.04
		TOTAL ON TIME	3.04

Duty cycle correction factor  $\delta = 3.04 / 100 = 0.0304$

$\delta = 20 \log (0.0304) = -30.34 \text{ dB}$

**Frequency range 30 MHz-1000 MHz (see next plots)**

Frequency (MHz)	Polarization	Detector	Emission Level	Limits 15.231 (e) / 15.209
433.92 (Fundamental)	V	Peak	24,406.19 $\mu\text{V/m}$ (87.75 $\text{dB}\mu\text{V/m}$ )	43,992.5 $\mu\text{V/m}$ / --- (92.87 $\text{dB}\mu\text{V/m}$ ) / ---
867.9745	V	Peak	340.02 ( $\mu\text{V/m}$ ) / 50.63 ( $\text{dB}\mu\text{V/m}$ )	4,399.25 / 2,000 ( $\mu\text{V/m}$ ) 72.87 / 66 ( $\text{dB}\mu\text{V/m}$ )

Calculation for average level

Spurious frequency (MHz)	Emission Level ( $\text{dB}\mu\text{V/m}$ ) Peak	Duty-cycle correction factor $\delta$ (dB)	Corrected Emission Level ( $\text{dB}\mu\text{V/m}$ ) Average	Limits 15.231 (e) / 15.209
433.92 (Fundamental)	87.75	-30.34	57.41	4,399.25 $\mu\text{V/m}$ / --- (72.87 $\text{dB}\mu\text{V/m}$ ) / ---
867.9745	50.63	-30.34	20.29	439.925 / 200 ( $\mu\text{V/m}$ ) 52.87 / 46 ( $\text{dB}\mu\text{V/m}$ )

Measurement uncertainty (dB):  $\pm 3.88 \text{ dB}$ .

**Frequency range 1 GHz-5 GHz (see next plots)**

Highest spurious levels.


Frequency (GHz)	Polarization	Detector	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m) 15.231 (e) / 15.209
3.03780	V	Peak	42.20	72.87 / 74
3.47167	H	Peak	43.48	72.87 / 74
4.77273	H	Peak	47.22	72.87 / 74

The peak levels are below the average limit (52.87 dB $\mu$ V/m / 54 dB $\mu$ V/m).

Measurement uncertainty (dB):  $\pm 4.87$  dB.

Verdict: PASS.

FREQUENCY RANGE 30 MHz-1000 MHz

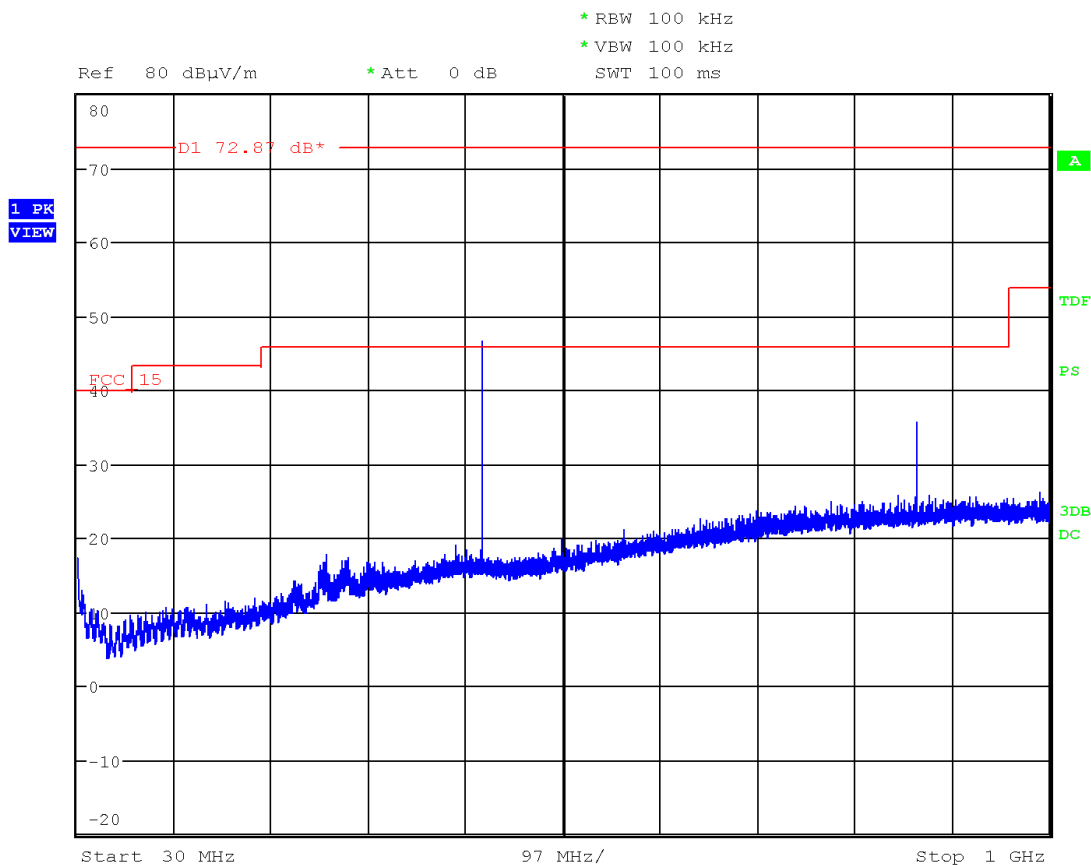

Note: For spurious emissions measurement the carrier frequency (fundamental) was attenuated using a notch filter.

FREQUENCY RANGE 1 GHz to 5 GHz

