

DATE: 09 August 2010

I.T.L. (PRODUCT TESTING) LTD.

FCC Radio Test Report


for


ElmoTech Ltd.


Equipment under test:

Tracking Bracelet

TRX 900F-4

Written by: 
D. Shidlow, Documentation

Approved by: 
A. Sharabi, Test Engineer

Approved by: 
I. Raz, EMC Laboratory Manager

This report must not be reproduced, except in full, without the written permission of I.T.L. (Product Testing) Ltd.

This report relates only to items tested.

TABLE OF CONTENTS

1.	GENERAL INFORMATION -----	4
1.1	Administrative Information.....	4
1.2	List of Accreditations.....	5
1.3	Product Description.....	6
1.4	Test Methodology.....	6
1.5	Test Facility.....	6
1.6	Measurement Uncertainty.....	6
2.	SYSTEM TEST CONFIGURATION -----	7
2.1	Justification.....	7
2.2	Special Accessories.....	7
2.3	Equipment Modifications.....	7
2.4	Configuration of Tested System.....	7
3.	RADIATED MEASUREMENT TEST SET-UP PHOTO -----	8
4.	AVERAGE FACTOR CALCULATION -----	9
4.1	Test Instrumentation Used.....	11
5.	PERIODIC OPERATION -----	12
5.1	Specification.....	12
5.2	Requirements.....	12
5.3	Results.....	12
6.	FIELD STRENGTH OF FUNDAMENTAL -----	15
6.1	Test Specification.....	15
6.2	Test Procedure.....	15
6.3	Measured Data.....	15
6.4	Test Instrumentation Used, Field Strength of Fundamental.....	19
7.	RADIATED EMISSION, 9 KHZ – 30 MHZ -----	20
7.1	Test Specification.....	20
7.2	Test Procedure.....	20
7.3	Measured Data.....	20
7.4	Test Instrumentation Used, Radiated Measurements.....	21
7.5	Field Strength Calculation.....	21
8.	SPURIOUS RADIATED EMISSION -----	22
8.1	Test Specification.....	22
8.2	Test Procedure.....	22
8.3	Test Data.....	23
8.4	Test Instrumentation Used, Radiated Measurements.....	25
9.	BANDWIDTH -----	26
9.1	Test procedure.....	26
9.2	Results table.....	27
9.3	Test Equipment Used.....	28
10.	APPENDIX A - CORRECTION FACTORS -----	29
10.1	Correction factors for CABLE.....	29
10.2	Correction factors for CABLE.....	30
10.3	Correction factors for CABLE.....	31
10.4	Correction factors for LOG PERIODIC ANTENNA.....	32
10.5	Correction factors for LOG PERIODIC ANTENNA.....	33
10.6	Correction factors for BICONICAL ANTENNA.....	34
10.7	Correction factors for ACTIVE LOOP ANTENNA.....	35

1. General Information

1.1 *Administrative Information*

Manufacturer:	ElmoTech Ltd.
Manufacturer's Address:	2 Habarzel St., P.O.B. 13236 Tel Aviv 61132 Israel Tel: +972-3-767-1700 Fax: +972-3-767-1701
Manufacturer's Representative:	Raphael Hadar
Equipment Under Test (E.U.T):	Tracking Bracelet
Equipment Model No.:	TRX 900F-4
Equipment Serial No.:	Not Designated
Date of Receipt of E.U.T:	24.03.10
Start of Test:	24.03.10
End of Test:	24.03.10
Test Laboratory Location:	I.T.L (Product Testing) Ltd. Kfar Bin Nun, ISRAEL 99780
Test Specifications:	FCC Part 15 Subpart C

1.2 List of Accreditations

The EMC laboratory of I.T.L. is accredited by the following bodies:

1. The American Association for Laboratory Accreditation (A2LA) (U.S.A.), Certificate No. 1152.01.
2. The Federal Communications Commission (FCC) (U.S.A.), Registration No. 90715.
3. The Israel Ministry of the Environment (Israel), Registration No. 1104/01.
4. The Voluntary Control Council for Interference by Information Technology Equipment (VCCI) (Japan), Registration Numbers: C-1350, R-1285.
5. Industry Canada (Canada), File No. IC 4025.
6. TUV Product Services, England, ASLLAS No. 97201.
7. Nemko (Norway), Authorization No. ELA 207.

I.T.L. Product Testing Ltd. is accredited by the American Association for Laboratory Accreditation (A2LA) and the results shown in this test report have been determined in accordance with I.T.L.'s terms of accreditation unless stated otherwise in the report.

1.3 Product Description

The TRX-900F-4 is a small ankle worn device designed for offender monitoring applications.

The device comprises a printed circuit board (PCB) that includes a RF transceiver module with an integral antenna and a microcontroller that controls its operation.

The TRX-900F-4 has one 418MHz RF channel over which it communicates with its allocated home unit and/or GPS tracking device.

The unit is powered by an internal 3.6V Lithium Thionyl Chloride battery.

The TRX-900F is attached to the ankle of the offender by means of a fiber optic strap. When attached to the offender, the strap is connected in such a way that the optical fiber is facing an IR transmitter on one side and an IR receiver on the other. The IR transmitter sends light signals periodically via the fiber. The reception of these signals by the IR receiver proves the integrity of the strap.

When activated, the TRX-900F-4 transmits signals separated by a pseudorandom interval of between 15 and 16 seconds. After each transmission, the TRX-900F listens for an acknowledge signal in order to ascertain whether its home unit/tracking device is within range. If a defined timeout has expired without receiving an acknowledge signal, the TRX-900F-4 activates an internal vibrator so as to warn the offender that they are out of range before a violation event is generated.

1.4 Test Methodology

Both conducted and radiated testing were performed according to the procedures in ANSI C63.4: 2003. Radiated testing was performed at an antenna to EUT distance of 3 meters.

1.5 Test Facility

The radiated emissions tests were performed at I.T.L.'s testing facility at Kfar Bin-Nun, Israel. This site is a FCC listed test laboratory (FCC Registration No. 90715, date of listing August 22, 2006). I.T.L.'s EMC Laboratory is also accredited by A2LA, certificate No. 1152.01.

1.6 Measurement Uncertainty

Radiated Emission

The Open Site complies with the ± 4 dB Normalized Site Attenuation requirements of ANSI C63.4-2003. In accordance with Paragraph 5.4.6.1 of this standard, this tolerance includes instrumentation calibration errors, measurement technique errors, and errors due to site anomalies.

2. System Test Configuration

2.1 *Justification*

Radiated emission screening was performed in 3 orthogonal orientations. The worst case orientation was the vertical position.

2.2 *Special Accessories*

No special accessories were needed.

2.3 *Equipment Modifications*

No modifications were needed in order to achieve compliance

2.4 *Configuration of Tested System*




Figure 1. Configuration of Tested System

3. Radiated Measurement Test Set-up Photo




Figure 2. Radiated Emission Test


4. Average Factor Calculation

1. Burst duration = 3.4 msec
2. Time between bursts = 15sec , >100ms
3. Average Factor = $20 \log \left[\frac{\text{Pulse duration}}{\text{Pulse period}} \times \frac{\text{burst duration}}{100\text{msec}} \times \text{Num of burst within 100msec} \right]$

Note Pulse duration and pulse period was considered worst case always ON cines unit transmits randomly.

 15:46:29 MAR 24, 2010

ACTV DET: PEAK
MEAS DET: PEAK QP AVG
MKR Δ 3.4000 msec
1.10 dB

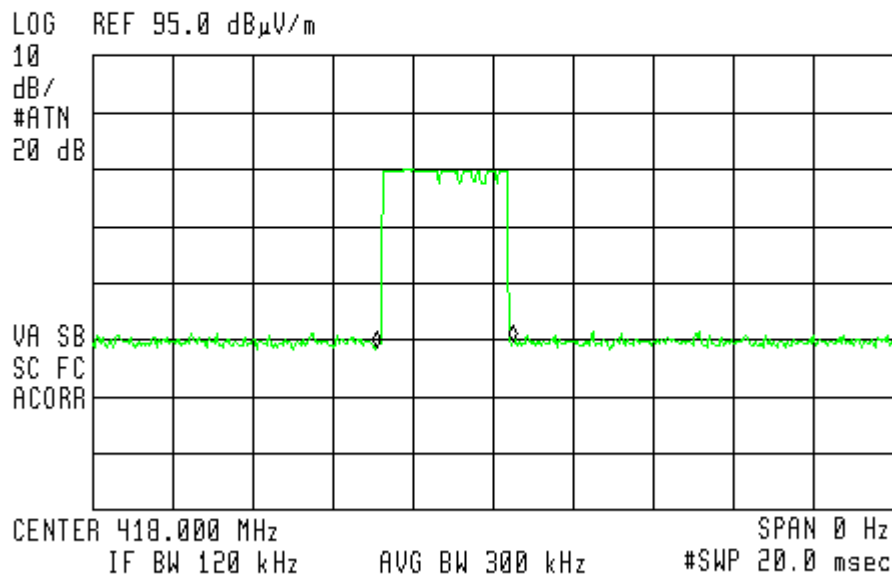

$$\text{Average Factor} = 20 \log \left[1 \times \frac{3.4}{100} \times 1 \right] = -29.37 \text{ dB}$$

Figure 3. Burst duration = 3.4msec

15:51:06 MAR 24, 2010

ACTV DET: PEAK
MEAS DET: PEAK QP AVG

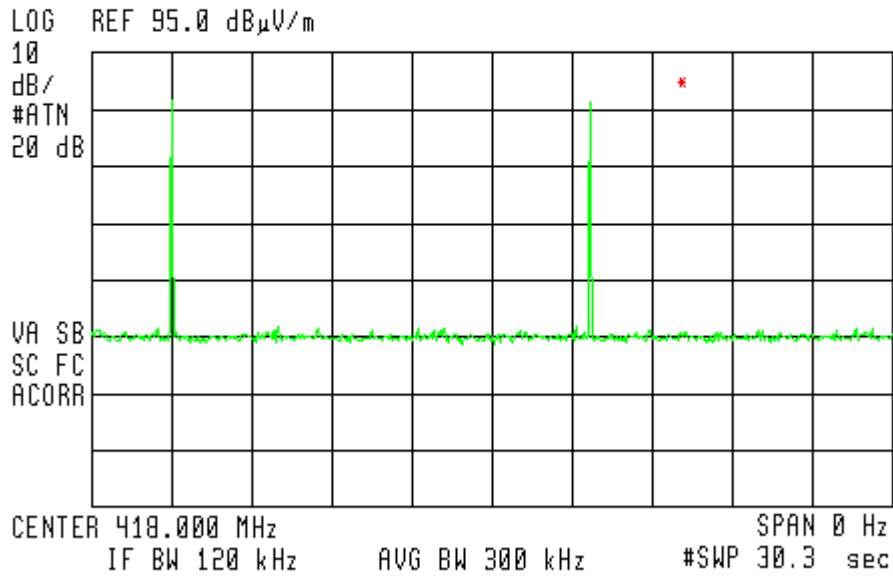


Figure 4. Time between bursts = 15sec , >100ms

4.1 Test Instrumentation Used

Instrument	Manufacturer	Model	Serial Number	Calibration	Period
Spectrum Analyzer	HP	8592L	3826A01204	March 14, 2010	1 Year
Antenna Bioconical	ARA	BCD 235/B	1041	August 03, 2009	1 Year
Antenna Log Periodic	ARA	LPD-2010/A	1038	March 26, 2009	1 Year
Antenna-Log Periodic	A.H.System	SAS-200/511	253	January 29, 2009	2 Years
Antenna Mast	ARA	AAM-4A	1001	N/A	N/A
Turntable	ARA	ART-1001/4	1001	N/A	N/A
Mast & Table Controller	ARA	ACU-2/5	1001	N/A	N/A

5. Periodic Operation

5.1 Specification

F.C.C., Part 15, Subpart C, Section 15.231(a)

5.2 Requirements


Requirement	Rationale	Verdict
Continuous transmissions are not permitted.	N/A	Complies
A manually operated transmitter shall be deactivated within not more than 5 seconds after releasing the switch.	N/A	Complies
An automatically operated transmitter shall cease operation within 5 seconds after activation.	N/A	Complies
Periodic transmissions at regular predetermined intervals are not permitted.	N/A	Complies
Polling or supervised transmissions to determine system integrity of transmitter used in security or safety applications shall not exceed more than 2 seconds per hour.	Figure 5, 6	Complies

5.3 Results

JUDGEMENT: Passed

The EUT met the FCC Part 15, Subpart C, Section 15.231(a) specification requirements.

TEST PERSONNEL:

Tester Signature:  _____


Date: 06.06.10

Typed/Printed Name: A. Sharabi

Periodic Operation

E.U.T Description Tracking Bracelet
 Type TRX 900F-4
 Serial Number: Not Designated

Specification: F.C.C., Part 15, Subpart C, 15.231(a)

 15:51:06 MAR 24, 2010

ACTV DET: PEAK
 MEAS DET: PEAK QP AVG

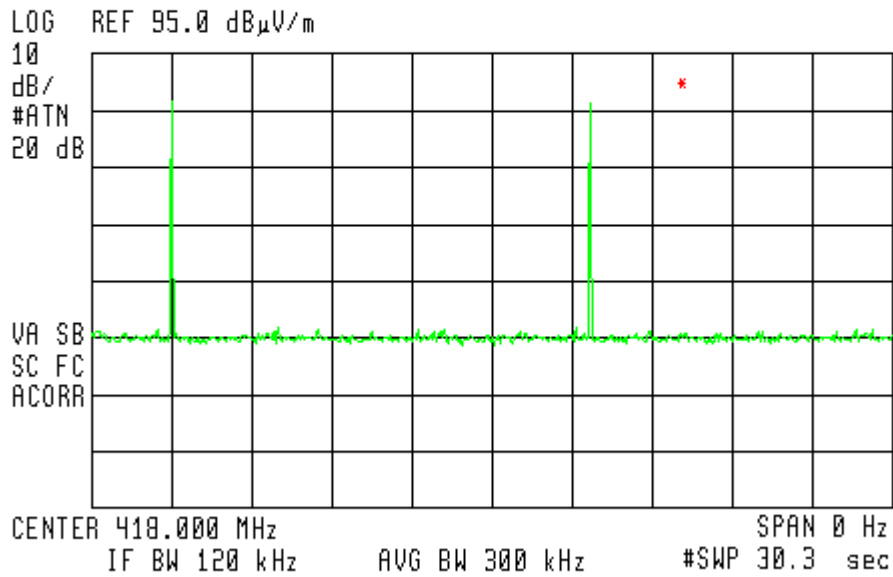



Figure 5. System Integrity Pulse every 15sec


Periodic Operation

E.U.T Description Tracking Bracelet
 Type TRX 900F-4
 Serial Number: Not Designated

Specification: F.C.C., Part 15, Subpart C, 15.231(a)

 15:46:29 MAR 24, 2010

ACTV DET: PEAK
 MEAS DET: PEAK QP AVG
 MKRΔ 3.4000 msec
 1.10 dB

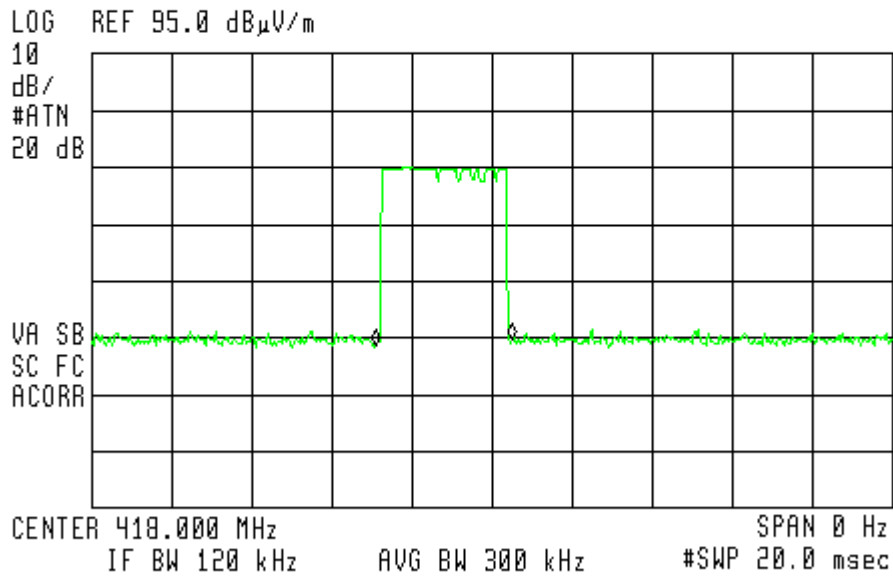

**Figure 6. System Integrity burst width Within 1minute
 (3.4milliseconds X 4 X 60= 816 milliseconds)**

6. Field Strength of Fundamental

6.1 Test Specification

F.C.C., Part 15, Subpart C, Section 15.231(b)

6.2 Test Procedure

The E.U.T. operation mode and test set-up are as described in Section 3.

The E.U.T. was placed on a non-conductive table, 0.8 meters above the O.A.T.S. ground plane.

The EMI receiver was set to the E.U.T. Fundamental Frequency (418 MHz) and Peak Detection.

The turntable and antenna mast were adjusted for maximum level reading on the EMI receiver.

The measurement was performed for vertical and horizontal polarizations of the test antenna.

The average result is:

Peak Level(dB μ V/m) + E.U.T. Duty Cycle Factor, in 100msec time window (dB)

6.3 Measured Data

JUDGEMENT: Passed by 18.72 dB

The EUT met the FCC Part 15, Subpart C, Section 15.231(b) specification requirements.

The details of the highest emissions are given in Figure 7 to Figure 9.

TEST PERSONNEL:

Tester Signature: _____ Date: 06.06.10

Typed/Printed Name: A. Sharabi

Field Strength of Fundamental

E.U.T Description Tracking Bracelet
 Type TRX 900F-4
 Serial Number: Not Designated

Specification: F.C.C., Part 15, Subpart C, 15.231(b)

Antenna Polarization: Horizontal/Vertical

Test Distance: 3 meters

Detector: Peak

Freq.	Pol.	Peak Amp	Average Factor	AVG Result	AVG Specification	Margin
(MHz)	V/H	(dB μ V/m)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
418.00	H	91.47	-29.37	62.10	80.82	-18.72
418.00	V	88.84	-29.37	59.47	80.82	-21.35

Figure 7. Field Strength of Fundamental. Antenna Polarization: HORIZONTAL/VERTICAL. Detector: Peak

Notes:

1. Margin refers to the test results obtained minus specified requirement; thus a positive number indicates failure, and a negative result indicates that the product passes the test.
2. "Peak Amp." (dB μ V/m) included the "Correction Factors".
 "Correction Factors" (dB) = Test Antenna Correction Factor(dB) + Cable Loss.

Field Strength of Fundamental


E.U.T Description Tracking Bracelet
 Type TRX 900F-4
 Serial Number: Not Designated

Specification: F.C.C., Part 15, Subpart C, 15.231(b)


Antenna Polarization: Horizontal

Test Distance: 3 meters

Detectors: Peak, Quasi-peak, Average

 14:33:06 MAR 24, 2010

ACTV DET: PEAK
 MEAS DET: PEAK QP AVG
 MKR 418.030 MHz
 91.47 dB μ V/m

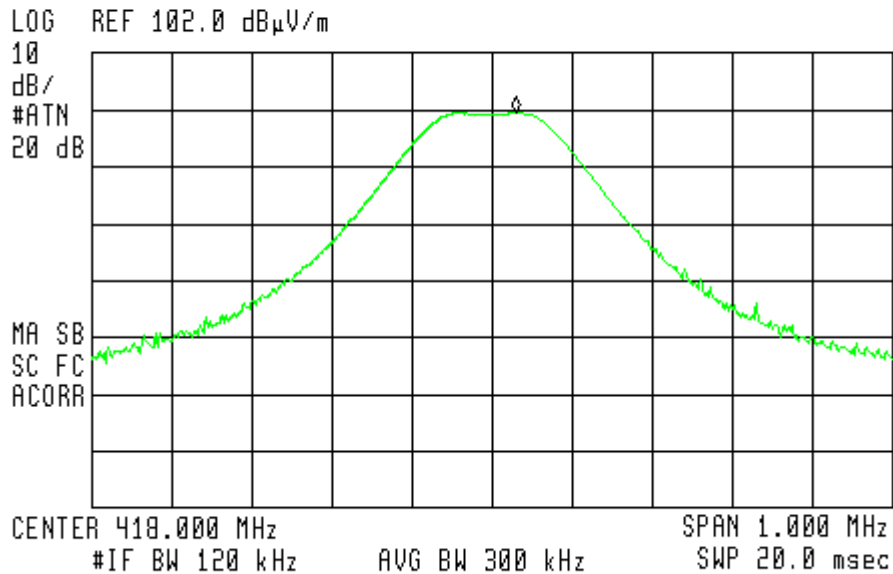

**Figure 8. Field Strength of Fundamental. Antenna Polarization: HORIZONTAL.
 Detectors: Peak, Quasi-peak, Average**

Field Strength of Fundamental


E.U.T Description Tracking Bracelet
 Type TRX 900F-4
 Serial Number: Not Designated

Specification: F.C.C., Part 15, Subpart C, 15.231(b)


Antenna Polarization: Vertical

Test Distance: 3 meters

Detectors: Peak, Quasi-peak, Average

 14:36:19 MAR 24, 2010

ACTV DET: PEAK
 MEAS DET: PEAK QP AVG
 MKR 417.958 MHz
 88.84 dB μ V/m

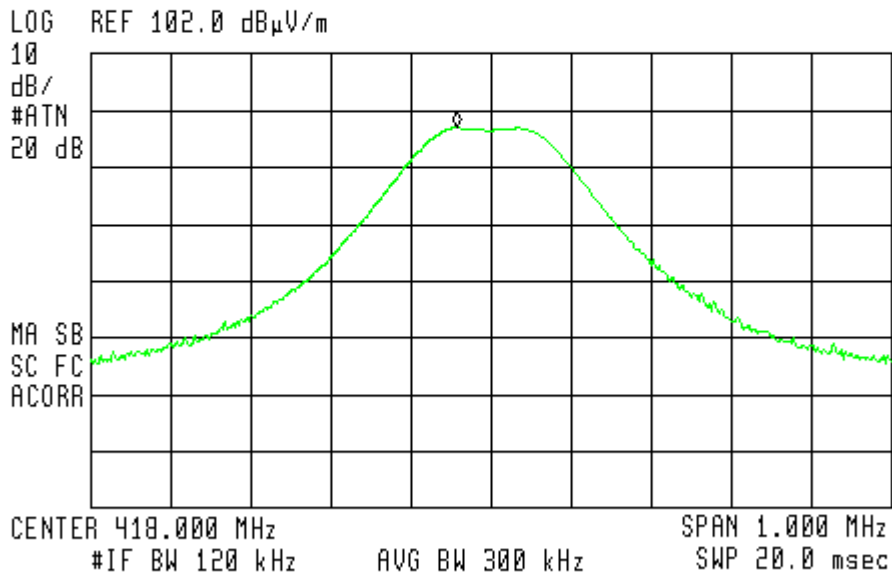

**Figure 9. Field Strength of Fundamental. Antenna Polarization: VERTICAL.
 Detectors: Peak, Quasi-peak, Average**

6.4 Test Instrumentation Used, Field Strength of Fundamental

Instrument	Manufacturer	Model	Serial Number	Calibration	Period
EMI Receiver	HP	85422E	3906A00276	November 10, 2009	1 Year
RF Section	HP	85420E	3705A00248	November 10, 2009	1 Year
Antenna Log Periodic	ARA	LPD-2010/A	1038	March 26, 2009	1 Year
Antenna Mast	ARA	AAM-4A	1001	N/A	N/A
Turntable	ARA	ART-1001/4	1001	N/A	N/A
Mast & Table Controller	ARA	ACU-2/5	1001	N/A	N/A
Printer	HP	LaserJet 2200	JPKG19982	N/A	N/A

7. Radiated Emission, 9 kHz – 30 MHz

7.1 Test Specification

9 kHz-30 MHz, FCC, Part 15, Subpart C, Section 209

7.2 Test Procedure

The E.U.T. operation mode and test set-up are as described in Section 3.

A preliminary measurement to characterize the E.U.T was performed inside the shielded room at a distance of 3 meters, using peak detection mode and broadband antennas. The preliminary measurements produced a list of the highest emissions. The E.U.T was then transferred to the open site, and placed on a remote-controlled turntable. The E.U.T was placed on a non-metallic table, 0.8 meters above the ground. The configuration tested is shown in Figure 3.1.

The frequency range 9 kHz-30 MHz was scanned.

The emissions were measured using a computerized EMI receiver complying to CISPR 16 requirements. The specification limits and applicable correction factors are loaded to the receiver via a 3.5" floppy disk.

In the frequency range 9 kHz-30MHz, the loop antenna was rotated on its vertical axis. The antenna height (center of loop) was 1 meter at a distance of 10 meters.


The E.U.T. was operated at the frequency of 418 MHz. This frequency was measured using a peak detector.

7.3 Measured Data

JUDGEMENT: Passed

The signals were more than 20 dB below the specification limit.

TEST PERSONNEL:

Tester Signature:  Date: 06.06.10

Typed/Printed Name: A. Sharabi

7.4 Test Instrumentation Used, Radiated Measurements

Instrument	Manufacturer	Model	Serial Number	Calibration	Period
EMI Receiver	HP	85422E	3906A00276	November 10, 2009	1 Year
RF Section	HP	85420E	3705A00248	November 10, 2009	1 Year
Active Loop Antenna	EMCO	6502	9506-2950	October 19, 2009	1 year
Antenna Mast	ARA	AAM-4A	1001	N/A	N/A
Turntable	ARA	ART-1001/4	1001	N/A	N/A
Mast & Table Controller	ARA	ACU-2/5	1001	N/A	N/A

7.5 Field Strength Calculation

The field strength is calculated directly by the EMI Receiver software, and a "Correction Factors" data disk, using the following equation:

$$FS = RA + AF + CF$$

- FS: Field Strength [dB μ v/m]
 RA: Receiver Amplitude [dB μ v]
 AF: Receiving Antenna Correction Factor [dB/m]
 CF: Cable Attenuation Factor [dB]

No external pre-amplifiers are used.

8. Spurious Radiated Emission

8.1 Test Specification

30 - 4500 MHz, F.C.C., Part 15, Subpart C

8.2 Test Procedure

The E.U.T. operation mode and test set-up are as described in Section 3. See Section 3.1 Justification of the System Test Configuration concerning the E.U.T. orientation for this test.

A preliminary measurement to characterize the E.U.T was performed inside the shielded room at a distance of 3 meters, using peak detection mode and broadband antennas. The preliminary measurements produced a list of the highest emissions. The E.U.T was then transferred to the open site, and placed on a remote-controlled turntable. The E.U.T was placed on a non-metallic table, 0.8 meters above the ground. The configuration tested is shown in Figure 1. The signals from the list of the highest emissions were verified and the list was updated accordingly.

The levels of the emissions within the frequency ranges of the restricted bands (Section 15.205 of FCC Part 15) were compared to the limits of the table in Section 15.209 (a), General Requirements.

The emissions were measured using a computerized EMI receiver complying to CISPR 16 requirements. The specification limits and applicable correction factors are loaded to the receiver via a 3.5" floppy disk.

In the frequency range 2.9 – 4.5 GHz, a spectrum analyzer including a low noise amplifier was used. The test distance was 3 meters. During peak measurements, the I.F. bandwidth was 1 MHz, and video bandwidth 3 MHz. During average measurements, the I.F. bandwidth was 1 MHz and video bandwidth was 100 Hz.

The readings were maximized by adjusting the antenna height between 1-4 meters, the turntable azimuth between 0-360°, and the antenna polarization. Verification of the E.U.T emissions was based on the following methods: turning the E.U.T on and off; using a frequency span less than 10 MHz; observation of the signal level during turntable rotation. (Background noise is not affected by the rotation of the E.U.T.)

The emissions were measured at a distance of 3 meters.


8.3 Test Data

JUDGEMENT: Passed by 28.45 dB

The EUT met the requirements of the F.C.C. Part 15, Subpart C, specification.

The margin between the emission level and the specification limit was 28.45 dB in the worst case at the frequency of 1254.00 MHz, vertical polarization.

TEST PERSONNEL:

Tester Signature:  _____

Date: 09.08.10

Typed/Printed Name: A. Sharabi

Radiated Emission

E.U.T Description Tracking Bracelet
 Type TRX 900F-4
 Serial Number: Not Designated

Specification: FCC Part 15, Subpart C

Antenna Polarization: Horizontal/Vertical Frequency range: 30 MHz to 4500 MHz
 Antenna: 3 meters distance Detectors: Peak, Quasi-peak

Frequency (MHz)	Peak Reading (dB μ V/m)	Average Factor	Average Result (dB μ V/m)	Antenna Polarity (H/V)	Average Specification (dB μ V/m)	Margin (dB)
836.00	39.68	-29.37	10.31	V	60.82	-50.51
1254.00	61.74	-29.37	32.37	V	60.82	-28.45
1672.00	52.29	-29.37	22.92	V	54.00	-31.08
2090.00	54.78	-29.37	25.41	V	60.82	-35.41

**Figure 10. Radiated Emission. Antenna Polarization: VERTICAL.
 Detectors: Peak, Quasi-peak**

Note: Margin refers to the test results obtained minus specified requirement; thus a positive number indicates failure, and a negative result indicates that the product passes the test.

8.4 Test Instrumentation Used, Radiated Measurements

Instrument	Manufacturer	Model	Serial Number	Calibration	Period
EMI Receiver	HP	85422E	3906A00276	November 10, 2009	1 year
RF Section	HP	85420E	3705A00248	November 10, 2009	1 year
Low Noise Amplifier	DBS MICROWAVE	LNA-DBS- 0411N313	013	January 13, 2010	1 Year
Spectrum Analyzer	HP	8592L	3826A01204	March 14, 2010	1 Year
Antenna Bioconical	ARA	BCD 235/B	1041	August 03, 2009	1Year
Antenna Log Periodic	ARA	LPD-2010/A	1038	March 26, 2009	1 Year
Antenna-Log Periodic	A.H.System	SAS-200/511	253	January 29, 2009	2 Years
Antenna Mast	ARA	AAM-4A	1001	N/A	N/A
Turntable	ARA	ART-1001/4	1001	N/A	N/A
Mast & Table Controller	ARA	ACU-2/5	1001	N/A	N/A
Printer	HP	LaserJet 2200	JPKG19982	N/A	N/A

9. Bandwidth

9.1 Test procedure

The transmitter unit operated with normal modulation. The spectrum analyzer was set to 30 kHz resolution BW and center frequency of the transmitter fundamental. The spectrum bandwidth of the transmitter unit was measured and recorded. The BW was measured at 20 dBc points.

The EUT was set up as shown in Figure 1, and its proper operation was checked. The transmitter occupied bandwidth was measured with the EMI receiver as frequency delta between reference points on the modulation envelope.

15:02:57 MAR 24, 2010

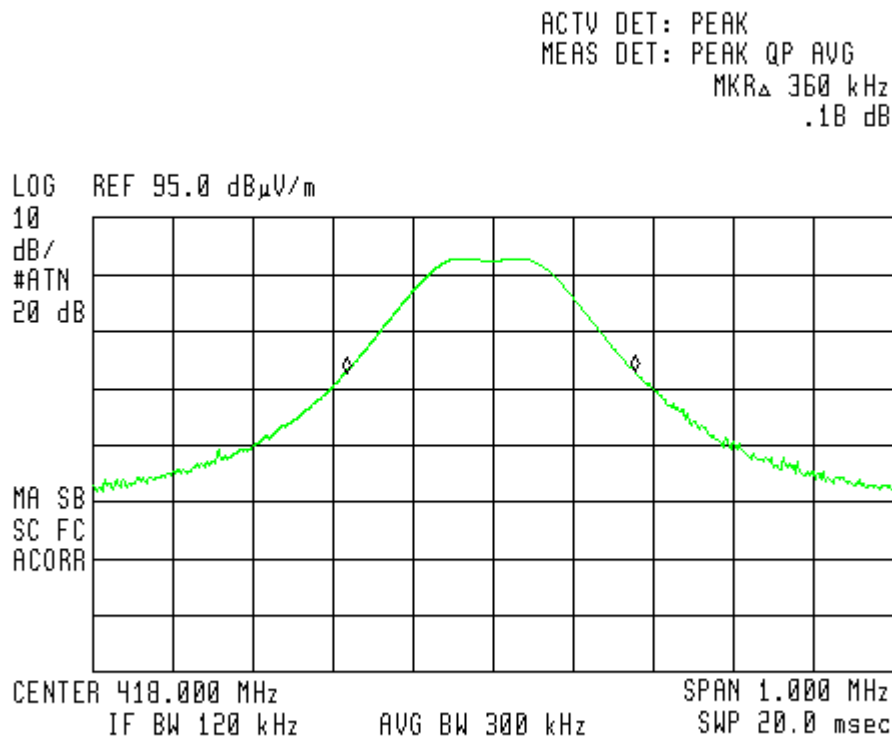


Figure 11

9.2 Results table

E.U.T Description: Tracking Bracelet
 Model: TRX 900F-4
 Serial Number: Not Designated
 Specification: F.C.C. Part 15, Subpart C: (15.231(c))

Bandwidth Reading	Specification (kHz)	Margin (kHz)
360	1045	-685

Figure 12 Bandwidth

JUDGEMENT: Passed by 685 kHz

TEST PERSONNEL:

Tester Signature: _____ Date: 09.08.10

Typed/Printed Name: A. Sharabi

(1) 0.25% of the E.U.T. fundamental frequency, Section 15.231(c).

9.3 Test Equipment Used.

Bandwidth

Instrument	Manufacturer	Model	Serial Number	Calibration	Period
EMI Receiver	HP	85422E	3906A00276	November 10, 2009	1 Year
RF Section	HP	85420E	3705A00248	November 10, 2009	1 Year
Antenna Log Periodic	ARA	LPD-2010/A	1038	March 26, 2009	1 Year
Antenna Mast	ARA	AAM-4A	1001	N/A	N/A
Turntable	ARA	ART-1001/4	1001	N/A	N/A
Mast & Table Controller	ARA	ACU-2/5	1001	N/A	N/A
Printer	HP	LaserJet 2200	JPKGC19982	N/A	N/A

Figure 13 Test Equipment Used

10. APPENDIX A - CORRECTION FACTORS

10.1 Correction factors for CABLE from EMI receiver to test antenna at 3 meter range.

FREQUENCY (MHz)	CORRECTION FACTOR (dB)	FREQUENCY (MHz)	CORRECTION FACTOR (dB)
10.0	0.3	1200.0	7.3
20.0	0.6	1400.0	7.8
30.0	0.8	1600.0	8.4
40.0	0.9	1800.0	9.1
50.0	1.1	2000.0	9.9
60.0	1.2	2300.0	11.2
70.0	1.3	2600.0	12.2
80.0	1.4	2900.0	13.0
90.0	1.6		
100.0	1.7		
150.0	2.0		
200.0	2.3		
250.0	2.7		
300.0	3.1		
350.0	3.4		
400.0	3.7		
450.0	4.0		
500.0	4.3		
600.0	4.7		
700.0	5.3		
800.0	5.9		
900.0	6.3		
1000.0	6.7		

NOTES:

1. The cable type is RG-214.
2. The overall length of the cable is 27 meters.
3. The above data is located in file 27MO3MO.CBL on the disk marked "Radiated Emission Tests EMI Receiver".

10.2 Correction factors for CABLE
from EMI receiver
to test antenna
at 3 meter range.

FREQUENCY (GHz)	CORRECTION FACTOR (dB)
1.0	1.2
2.0	1.6
3.0	2.0
4.0	2.4
5.0	3.0
6.0	3.4
7.0	3.8
8.0	4.2
9.0	4.6
10.0	5.0
12.0	5.8

NOTES:

- 1. The cable type is RG-8.*
- 2. The overall length of the cable is 10 meters.*

10.3 Correction factors for CABLE
from spectrum analyzer
to test antenna above 2.9 GHz

FREQUENCY (GHz)	CORRECTION FACTOR (dB)	FREQUENCY (GHz)	CORRECTION FACTOR (dB)
1.0	1.9	14.0	9.1
2.0	2.7	15.0	9.5
3.0	3.5	16.0	9.9
4.0	4.2	17.0	10.2
5.0	4.9	18.0	10.4
6.0	5.5	19.0	10.7
7.0	6.0	20.0	10.9
8.0	6.5	21.0	11.2
9.0	7.0	22.0	11.6
10.0	7.5	23.0	11.9
11.0	7.9	24.0	12.3
12.0	8.3	25.0	12.6
13.0	8.7	26.0	13.0

NOTES:

1. The cable type is *SUCOFLEX 104 E* manufactured by *SUHNER*.
2. The cable is used for measurements above 2.9 GHz.
3. The overall length of the cable is 10 meters.

10.4 Correction factors for LOG PERIODIC ANTENNA

Type LPD 2010/A at 3 and 10 meter ranges.

Distance of 3 meters

FREQUENCY (MHz)	AFE (dB/m)
200.0	9.1
250.0	10.2
300.0	12.5
400.0	15.4
500.0	16.1
600.0	19.2
700.0	19.4
800.0	19.9
900.0	21.2
1000.0	23.5

Distance of 10 meters

FREQUENCY (MHz)	AFE (dB/m)
200.0	9.0
250.0	10.1
300.0	11.8
400.0	15.3
500.0	15.6
600.0	18.7
700.0	19.1
800.0	20.2
900.0	21.1
1000.0	23.2

NOTES:

1. Antenna serial number is 1038.
2. The above lists are located in file number 38M30.ANT for a 3 meter range,
and file number 38M100.ANT for a 10 meter range.
3. The files mentioned above are located on the disk marked "Radiated Emission
Test EMI Receiver".

10.5 Correction factors for

LOG PERIODIC ANTENNA

Type SAS-200/511

at 3 meter range.

FREQUENCY (GHz)	ANTENNA FACTOR (dB)
1.0	24.9
1.5	27.8
2.0	29.9
2.5	31.2
3.0	32.8
3.5	33.6
4.0	34.3
4.5	35.2
5.0	36.2
5.5	36.7
6.0	37.2
6.5	38.1

FREQUENCY (GHz)	ANTENNA FACTOR (dB)
7.0	38.6
7.5	39.2
8.0	39.9
8.5	40.4
9.0	40.8
9.5	41.1
10.0	41.7
10.5	42.4
11.0	42.5
11.5	43.1
12.0	43.4
12.5	44.4
13.0	44.6

NOTES:

1. Antenna serial number is 253.
2. The above lists are located in file number SAS3M0.ANT for a 3 meter range.
3. The files mentioned above are located on the disk marked "Antenna Factors".

**10.6 Correction factors for BICONICAL ANTENNA
Type BCD-235/B,
at 3 meter range**

FREQUENCY (MHz)	AFE (dB/m)
20.0	19.4
30.0	14.8
40.0	11.9
50.0	10.2
60.0	9.1
70.0	8.5
80.0	8.9
90.0	9.6
100.0	10.3
110.0	11.0
120.0	11.5
130.0	11.7
140.0	12.1
150.0	12.6
160.0	12.8
170.0	13.0
180.0	13.5
190.0	14.0
200.0	14.8
210.0	15.3
220.0	15.8
230.0	16.2
240.0	16.6
250.0	17.6
260.0	18.2
270.0	18.4
280.0	18.7
290.0	19.2
300.0	19.9
310	20.7
320	21.9
330	23.4
340	25.1
350	27.0

NOTES:

1. Antenna serial number is 1041.
2. The above list is located in file 19BC10M1.ANT on the disk marked "Radiated Emissions Tests EMI Receiver".

10.7 Correction factors for ACTIVE LOOP ANTENNA
Model 6502
S/N 9506-2950

FREQUENCY (MHz)	Magnetic Antenna Factor (dB)	Electric Antenna Factor (dB)
.009	-35.1	16.4
.010	-35.7	15.8
.020	-38.5	13.0
.050	-39.6	11.9
.075	-39.8	11.8
.100	-40.0	11.6
.150	-40.0	11.5
.250	-40.0	11.6
.500	-40.0	11.5
.750	-40.1	11.5
1.000	-39.9	11.7
2.000	-39.5	12.0
3.000	-39.4	12.1
4.000	-39.7	11.9
5.000	-39.7	11.8
10.000	40.2	11.3
15.000	-40.7	10.8
20.000	-40.5	11.0
25.000	-41.3	10.2
30.000	42.3	9.2