

FCC PART 15C TEST REPORT FOR CERTIFICATION  
On Behalf of

APTIVPORT SERVICES, S.A.

Display Head Unit

Model No.: DHU 1.0

FCC ID: LTQDHU1

APTIV

Prepared for : APTIVPORT SERVICES, S.A.  
Rua Max Grundig, N° 1 4705-820 Braga Portugal

Prepared By : Audix Technology (Shenzhen) Co., Ltd.  
No. 6, Kefeng Road, Science & Technology Park,  
Nanshan District , Shenzhen, Guangdong, China

Tel: (0755) 26639496

Report Number : ACS-F22192  
Date of Test : Oct.17~Nov.11, 2022  
Date of Report : Feb.20, 2023

**TABLE OF CONTENTS**

Description	Page
<b>1. SUMMARY OF STANDARDS AND RESULTS .....</b>	<b>5</b>
1.1. Description of Standards and Results .....	5
<b>2. GENERAL INFORMATION.....</b>	<b>6</b>
2.1. Description of Equipment Under Test .....	6
2.2. Feature of Equipment Under Test .....	7
2.3. Tested Supporting System Details .....	8
2.4. Block diagram of connection between the EUT and simulators .....	8
2.5. Test Information.....	8
2.6. Test Facility.....	9
2.7. Measurement Uncertainty (95% confidence levels, k=2) .....	9
<b>3. POWER LINE CONDUCTED EMISSION TEST .....</b>	<b>10</b>
<b>4. RADIATED EMISSION TEST.....</b>	<b>11</b>
4.1. Test Equipments.....	11
4.2. Block Diagram of Test Setup .....	12
4.3. Radiated Emission Limits .....	13
4.4. EUT Configuration on Test.....	13
4.5. Operating Condition of EUT.....	14
4.6. Test Procedure.....	14
4.7. Radiated Emission Test Results .....	14
<b>5. CONDUCTED SPURIOUS EMISSIONS .....</b>	<b>44</b>
5.1. Test Equipments.....	44
5.2. Limit.....	44
5.3. Test Procedure.....	44
5.4. Test result .....	44
<b>6. BAND EDGE COMPLIANCE TEST.....</b>	<b>81</b>
6.1. Test Equipments.....	81
6.2. Limit.....	81
6.3. Test Procedure.....	81
6.4. Test Results .....	81
<b>7. 6dB &amp; 99% Bandwidth Test.....</b>	<b>94</b>
7.1. Test Equipments.....	94
7.2. Limit.....	94
7.3. Test Procedure.....	94
7.4. Test Results .....	95
<b>8. OUTPUT POWER TEST .....</b>	<b>109</b>
8.1. Limit (FCC Part 15C 15.247 b(3)).....	109
8.2. Test Procedure.....	109
8.3. Test Results .....	110
<b>9. POWER SPECTRAL DENSITY TEST .....</b>	<b>121</b>
9.1. Test Equipments.....	121
9.2. Limit .....	121
9.3. Test Procedure.....	121
9.4. Test Results .....	122
<b>10. ANTENNA REQUIREMENT .....</b>	<b>129</b>
10.1. Standard Applicable .....	129

10.2. Antenna Connected Construction .....	129
<b>11. DEVIATION TO TEST SPECIFICATIONS .....</b>	<b>130</b>
Appendix A. Photograph of Test	
Appendix B. Photo of the EUT	

### TEST REPORT

Applicant : APTIVPORT SERVICES, S.A.  
 Manufacturer : APTIV Services Deutschland GmbH  
 Product : Display Head Unit  
 FCC ID : LTQDHU1  
 (A) Model No. : DHU 1.0  
 (B) Brand : APTIV  
 (B) Test Voltage : DC 12V

Tested for comply with:  
FCC CFR 47 Part 15 Subpart C

Test procedure used:  
ANSI C63.10: 2020  
KDB 558074 D01v05

The device described above is tested by Audix Technology (Shenzhen) Co., Ltd. to confirm comply with all the FCC Part 15 Subpart C requirements. The test results are contained in this test report and Audix Technology (Shenzhen) Co., Ltd. is assumed full responsibility for the accuracy and completeness of these tests. Also, this report shows that the Equipment Under Test (EUT) is to be technically compliant with the FCC and IC requirements. This report contains data that are not covered by the NVLAP accreditation.

This Report is made under FCC Part 2.1075. No modifications were required during testing to bring this product into compliance.

This report applies to single evaluation of one sample of above mentioned product and shall not be reproduced in part without written approval of Audix Technology (Shenzhen) Co., Ltd.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government.

Date of Test : Oct.17~Nov.11, 2022 Report of date: Feb.20, 2023

Prepared by : Mia Zhao Reviewed by : Sunny Lu  
 Mia Zhao / Assistant Sunny Lu / Manager



Approved & Authorized Signer: David Jin  
David Jin / Deputy General Manager

## 1. SUMMARY OF STANDARDS AND RESULTS

### 1.1. Description of Standards and Results

The EUT has been tested according to the applicable standards as referenced below.

EMISSION		
Description of Test Item	Standard	Results
Power Line Conducted Emission	FCC Part 15: 15.207	N/A
Radiated Emission	FCC Part 15: 15.209 FCC Part 15: 15.205	PASS
Band Edge Compliance	FCC Part 15: 15.247(d)	PASS
Conducted spurious emissions	FCC Part 15: 15.247(d)	PASS
6dB Bandwidth	FCC Part 15: 15.247(a)(2)	PASS
Peak Output Power	FCC Part 15: 15.247(b)(3)	PASS
Power Spectral Density	FCC Part 15: 15.247(e)	PASS
Antenna requirement	FCC Part 15: 15.203	PASS

N/A is an abbreviation for Not Applicable.

Note: Measurement uncertainty affection to the result is considered, the EUT is technically compliant with standard requirements.

## 2. GENERAL INFORMATION

### 2.1. Description of Equipment Under Test

Applicant	APTIVPORT SERVICES, S.A.
Applicant Address	Rua Max Grundig, N° 1 4705-820 Braga Portugal
Manufacturer	APTIV Services Deutschland GmbH
Manufacturer Address	Am Technologiepark 1 42119 Wuppertal Germany
Product	Display Head Unit
Model No.	DHU 1.0
FCC ID	LTQDHU1
Sample Type	Prototype production
Date of Receipt	Oct.14, 2022
Date of Test	Oct.17~Nov.11, 2022
Remark: This report only for WIFI 2.4GHz.	

2.2.Feature of Equipment Under Test

Product Feature & Specification		
Product	Display Head Unit	
Model No.	DHU 1.0	
Radio	IEEE802.11 a/b/g/n/ac/ax	
Power Source	<input checked="" type="checkbox"/> Commercial Power	AC 100 ~ 240V, 50-60Hz, 1.1A
	<input checked="" type="checkbox"/> External Power Source	DC 12V
	<input type="checkbox"/> Lithium battery	DC V, mAh
	<input type="checkbox"/> UM battery	DC V
Bluetooth		
Radio	BDR +EDR; BLE	
Frequency Range	2402-2480MHz	
Type of Modulation	GFSK, $\pi/4$ DQPSK, 8DPSK	
Data Rate	1Mbps, 2Mbps, 3Mbps	
Quantity of Channels	79/40	
Channel Separation	1MHz/2MHz	
2.4GHz Wi-Fi		
Support Modes	802.11b/g/n20/n40/ax20/ax40	
Frequency Range	2412-2462MHz	
Type of Modulation	802.11b(DSSS): CCK, QPSK, BPSK; 802.11g/n(OFDM): 64QAM,16QAM, QPSK, BPSK 802.11ax(OFDM): 64QAM,16QAM, QPSK, BPSK, 1024QAM	
Data Rate	802.11b: 1/2/5.5/11 Mbps; 802.11g: 6/9/12/18/24/36/48/54 Mbps; 802.11n: up to 300Mbps 802.11ax: up to 574Mbps	
Channel Separation	5MHz	
5GHz Wi-Fi		
Support Modes	802.11a/n20/n40/ac20/ac40/ac80 /ax20/ax40/ax80	
Frequency Range	5180-5240MHz, 5745-5825MHz	
Type of Modulation	802.11a/n (OFDM): QPSK, BPSK, 16QAM, 64QAM 802.11ac (OFDM): QPSK, BPSK, 16QAM, 64QAM,256QAM 802.11ax (OFDM): QPSK, BPSK, 16QAM, 64QAM,256QAM, 1024QAM	
Data Rate	802.11a: 6/9/12/18/24/36/48/54 Mbps; 802.11n: up to 300Mbps; 802.11ac: up to 867Mbps; 802.11ax: up to 1201Mbps	
Channel Separation	5MHz	

Antenna System	
Type of Antenna	Internal Cable Assembly Metal Antenna
Antenna Number	2 (ANT 1 and ANT 2)
Operation Modes	SISO and MIMO mode supported
Antenna Peak Gain	Bluetooth Peak Gain: 1.6dBi WiFi 2.4GHz (2400-2483.5MHz) Peak Gain: ant1: 2.4dBi ; ant2: 1.4dB WiFi 5GHz Band1: ant1: 1.8dBi ; ant2: 2.6dBi WiFi 5GHz Band4: ant1: 2.1dBi ; ant2: 2.2dBi

### 2.3. Tested Supporting System Details

No.	Description	ACS No.	Manufacturer	Model	Serial Number
1.	Notebook	N/A	ACER	ZOW	N/A
		Power Cord(3C): Unshielded, Detachable, 1.8m Power Adapter: Manufacturer: Lite-On, M/N: PA-1900-32 Data Cable: Shielded, Undetectable, 4.0m(Bond one ferrite core)			

### 2.4. Block diagram of connection between the EUT and simulators



(EUT: Display Head Unit)

### 2.5. Test Information

A special test software (Termite RS232 terminal, termite-3.4) was used to control EUT work in Continuous TX mode(The duty cycle of the test signal is 100%), and select test channel, wireless mode and data rate.

Tested mode, channel, and data rate information			
Mode	data rate (Mbps)(see Note)	Channel	Frequency (MHz)
IEEE 802.11b	1	Low :CH1	2412
	1	Middle: CH6	2437
	1	High: CH11	2462
IEEE 802.11g	6	Low :CH1	2412
	6	Middle: CH6	2437
	6	High: CH11	2462
IEEE 802.11n HT20	MCS0	Low :CH1	2412
	MCS0	Middle: CH6	2437
	MCS0	High: CH11	2462
IEEE 802.11n HT40	MCS0	Low :CH3	2422
	MCS0	Middle: CH6	2437
	MCS0	High: CH9	2452
IEEE 802.11ax HE20	MCS0	Low :CH1	2412
	MCS0	Middle: CH6	2437
	MCS0	High: CH11	2462
IEEE 802.11ax HE40	MCS0	Low :CH3	2422
	MCS0	Middle: CH6	2437
	MCS0	High: CH9	2452

Note: 1. According exploratory test, EUT will have maximum output power in those data rate, so those data rate were used for all test.

Note: 2. This is MIMO 2\*2 device for 2.4GHz band, test compliance with KDB 662911 D01, The radiated emission and band edge tested with two antenna transmit simultaneously for 11n mode. 11b/g mode support SISO, Choose antenna which has the maximum power for the test.



**2.6. Test Facility**

Site Description  
Name of Firm

: Audix Technology (Shenzhen) Co., Ltd.  
No. 6, Kefeng Road, Science & Technology Park,  
Nanshan District , Shenzhen, Guangdong, China

EMC Lab.

- : Certificated by ISED, Canada  
Company Number: 5183A  
CAB identifier: CN0034  
Valid Date: Mar.31, 2023
- : Certificated by FCC, USA  
Designation No.: CN5022  
Valid Date: Mar.31, 2023
- : Accredited by NVLAP, USA  
NVLAP Code: 200372-0  
Valid Date: Mar.31, 2023

**2.7. Measurement Uncertainty (95% confidence levels, k=2)**

Test Item	Uncertainty
Uncertainty for Radiation Emission test in 3m chamber	± 3.4dB(30~200MHz, Polarization: H)
	± 3.6dB(30~200MHz, Polarization: V)
	± 3.0dB(200M~1GHz, Polarization: H)
	± 3.2dB(200M~1GHz, Polarization: V)
Uncertainty for Radiation Emission test in 3m chamber(1GHz-25GHz)	± 4.6dB(1~6GHz, Distance: 3m)
	± 4.8dB(6~25GHz, Distance: 3m)
Uncertainty for Radiated Spurious Emission test in RF chamber	± 3.7dB(30MHz~1000MHz)
	± 3.3dB(1~26.5GHz)
Uncertainty for Conduction Spurious emission test	± 2.0dB
Uncertainty for Output power test	± 0.8dB
Uncertainty for Bandwidth test	± 83kHz
Uncertainty for DC power test	± 1%
Uncertainty for test site temperature and humidity	± 0.6°C
	± 3%

### **3. POWER LINE CONDUCTED EMISSION TEST**

According to Paragraph (c) of FCC Part 15 section 15.207, Tests to demonstrate compliance with the conducted limits are not required for devices which only employ battery power for operation and which do not operate from the AC power lines or contain provisions for operation while connected to the AC power lines.

## 4. RADIATED EMISSION TEST

### 4.1. Test Equipments

#### 4.1.1. For frequency range 30MHz~1000MHz (In 3m Anechoic Chamber)

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	3#Chamber(NSA)	AUDIX	N/A	N/A	Aug.11,22	5 Year
2.	3#Chamber(SE)	AUDIX	N/A	N/A	Sep.16,22	5 Year
3.	Signal Analyzer	Rohde & Schwarz	FSV30	104050	Apr.06,22	1 Year
4.	Tri-log-Broadband Antenna	SCHWARZBECK	VULB 9168	710	Dec.13,21	1 Year
5.	NSA Cable	HUBER+SUHNER	CFD400NL-LW	No.3	Oct.09,22	1 Year
6.	Coaxial Switch	Anritsu	MP59B	6201397223	Apr.06,22	1 Year
7.	EMI Test Receiver	Rohde & Schwarz	ESR7	101547	Apr.06,22	1 Year
8.	Amplifier	HP	8447D	2944A11159	Apr.06,22	1 Year
9.	Test Software	AUDIX	e3	6.100913a	N/A	N/A

Note: N/A means Not applicable.


#### 4.1.2. For frequency range 1GHz~25GHz (In 3m Anechoic Chamber)

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	3#Chamber(Svswr)	AUDIX	N/A	N/A	Aug.09,22	5 Year
2.	3#Chamber(SE)	AUDIX	N/A	N/A	Sep.16,22	5 Year
3.	Signal Analyzer	Rohde & Schwarz	FSV30	104050	Apr.06,22	1 Year
4.	Amplifier	Agilent	83017A	MY53270084	Oct.09,22	1 Year
5.	RF Cable	EMCI	EMC104-SM-SM-15000	190407	Jul.01,22	1 Year
6.	Test Software	AUDIX	e3	6.100913a	N/A	N/A
7.	Horn Antenna	ETC	MCTD 1209	DRH15F03006	Aug.12,22	1 Year


Note: N/A means Not applicable.

### 4.2. Block Diagram of Test Setup

For frequency range 30MHz-1000MHz

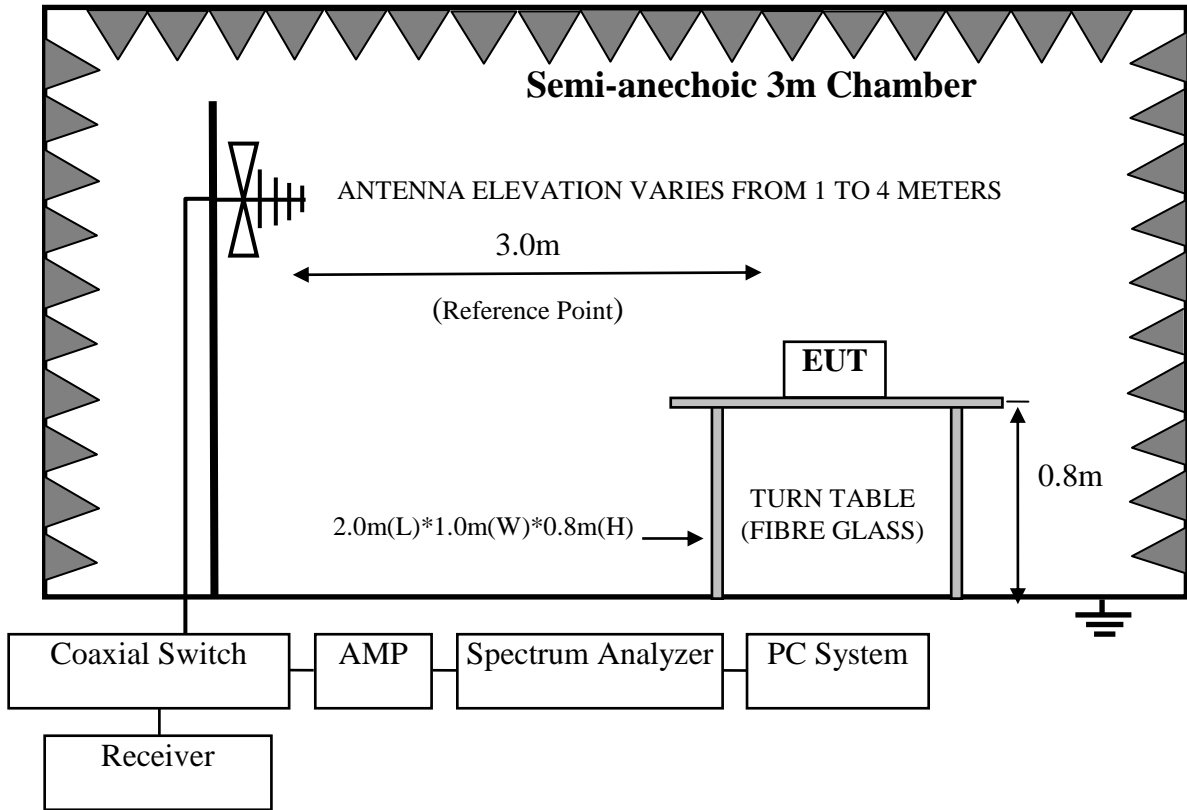

For frequency range 1GHz-25GHz

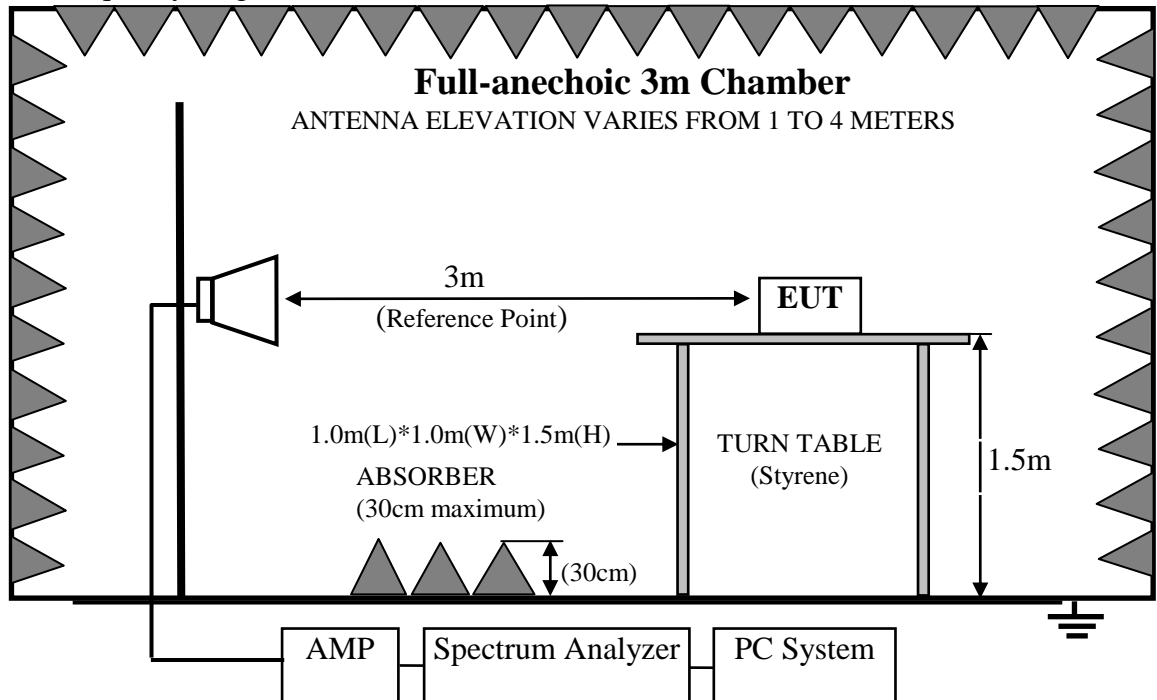

### 4.3. Radiated Emission Limits

#### 4.3.1. 15.247&209 limits

FREQUENCY MHz	DISTANCE Meters	FIELD STRENGTHS LIMIT	
		μV/m	dB(μV)/m
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
960 ~ 1000	3	500	54.0
Above 1000	3	74.0 dB(μV)/m (Peak) 54.0 dB(μV)/m (Average)	

Remark: (1) Emission Level (dBμV/m) = Reading (Receiver) (dBμV) + Antenna Factor (dB/m) + Cable Loss (dB)

Emission Level (dBμV/m) = Reading (Spectrum) (dBμV) + Antenna Factor (dB/m) – Amp Factor (dB) + Cable Loss (dB)(above 1000MHz)

(2) The smaller limit shall apply at the cross point between two frequency bands.

(3) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.

#### 4.3.2. 15.205 Restricted bands of operation

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
<sup>1</sup> 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	( <sup>2</sup> )

All the emissions appearing within 15.205 restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions shall be at least 20dB below the fundamental emissions, or comply with 15.209 limits.

### 4.4. EUT Configuration on Test

The following equipment are installed on Power Line Conducted Emission Test to meet the commission requirement and operating regulations in a manner which tends to maximize its emission characteristics in a normal application.

#### 4.4.1. Display Head Unit (EUT)

Model No. : DHU 1.0

Serial No. : N/A

#### 4.4.2. Support Equipment: As Tested Supporting System Details, in Section 2.2.

#### 4.5. Operating Condition of EUT

- 4.5.1. Setup the EUT and simulator as shown as Section 4.2.
- 4.5.2. Turn on the power of all equipments.
- 4.5.3. Let EUT work in Tx(WiFi 2.4GHz) mode

#### 4.6. Test Procedure

##### **Frequency below 30MHz:**

The EUT setup on the turn table which has 0.8 m height to the ground. The turn table rotated 360 degrees and antenna fixed to 1 m to find the maximum emission level. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10 regulation.

EUT and its simulators are placed on a turn table, which is 0.8 meter high above ground for frequency 30MHz~1000MHz, 1.5 meter high above ground for frequency above 1GHz and put the absorbing with 2.4m(L)\*2.4m(W)\*0.3m(H) on the ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. Power on the EUT and let it working in test mode, then test it. EUT is set 3 meters away from the receiving antenna, which is mounted on a antenna tower. The antenna can be moved up and down between 1 meter and 4 meters to find out the maximum emission level. Broadband antenna (calibrated bilog antenna) is used as receiving antenna for frequency 30MHz~1000MHz, and the Horn antenna is used as receiving antenna for frequency above 1GHz. Both horizontal and vertical polarization of the antenna are set on test.

This test was performed with EUT in X, Y, Z position, and the worse case was found when EUT in X position as test photo indicated.

The bandwidth of the EMI test receiver (R&S ESR7) is set at 120kHz for frequency range from 30MHz to 1000 MHz.

The bandwidth of the Spectrum's VBW is set at 3MHz and RBW is set at 1MHz for peak emissions measurement above 1GHz and 1MHz RBW, 10Hz VBW for average emissions measure above 1GHz

The frequency range from 30MHz to 10<sup>th</sup> harmonic (25GHz) are checked. and no any emissions were found from 18GHz to 25GHz, So the radiated emissions from 18GHz to 25GHz were not record.

#### 4.7. Radiated Emission Test Results


##### **PASS.**

All the emissions from 30MHz to 25 GHz were comply with 15.209 limits.

Note 1: For emissions above 1GHz, if peak level comply with average limit, then the average level is deemed to comply with average limit.


Note 2: The emissions (9kHz~30MHz) not reported for there is no emission be found.

### Duty cycle

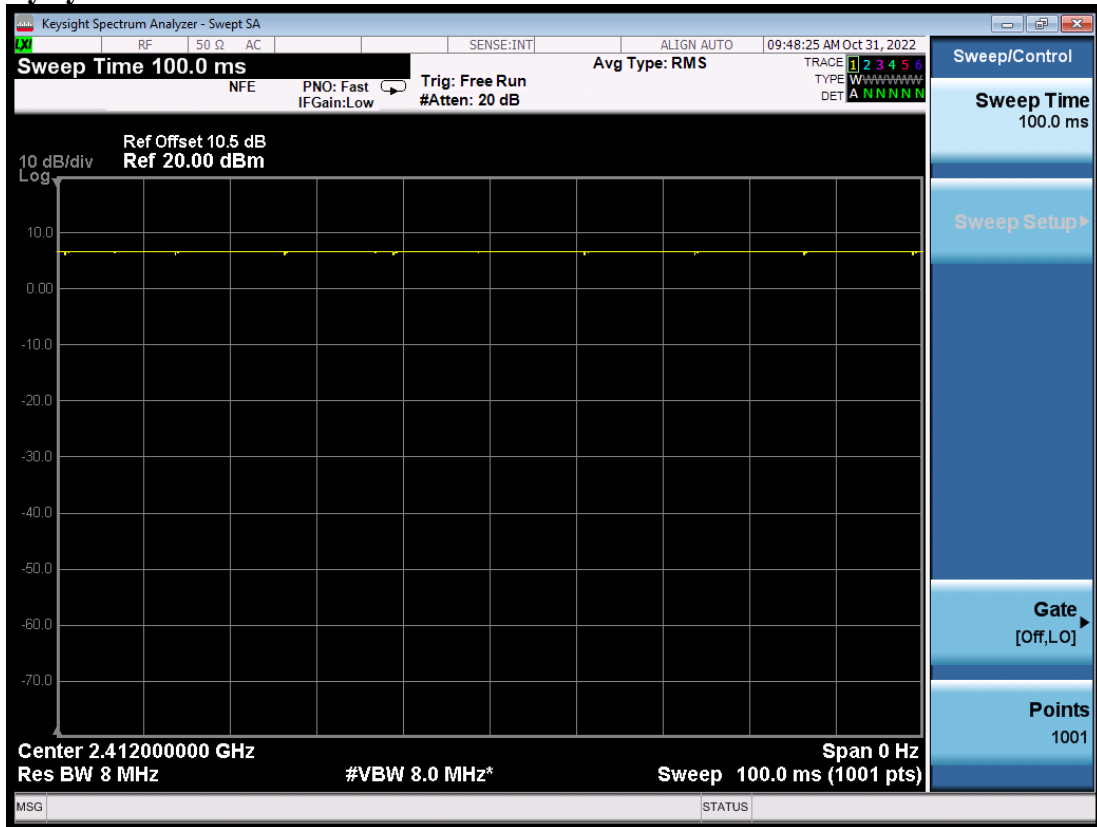

Note: The duty cycle of the test signal is  $\geq 98\%$ .


### Frequency: 30MHz~1GHz

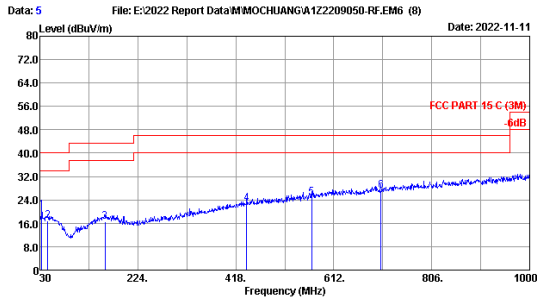

Site no. : 3m Chamber Data no. : 5  
 Dis. / Ant. : 3m 2021 VULB9168-710 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15 C (3M)  
 Env. / Ins. : 23.3°C/53% Engineer : Abel  
 Test Mode : WIFI2.4G TX

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	33.880	19.40	0.58	0.31	20.29	40.00	19.71	QP
2	45.520	20.30	0.67	-4.08	16.89	40.00	23.11	QP
3	159.010	19.61	1.26	-4.26	16.61	43.50	26.89	QP
4	439.340	23.20	2.19	-2.79	22.60	46.00	23.40	QP
5	568.350	25.30	2.57	-3.09	24.78	46.00	21.22	QP
6	705.120	27.08	2.89	-2.73	27.24	46.00	18.76	QP

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.

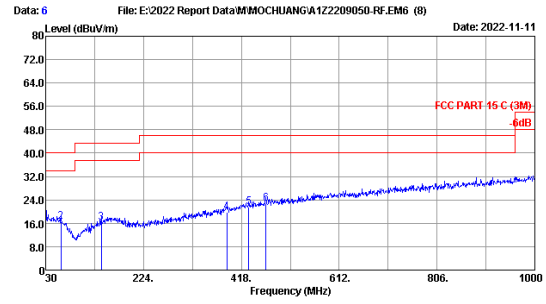


Site no. : 3m Chamber Data no. : 6  
 Dis. / Ant. : 3m 2021 VULB9168-710 Ant. pol. : VERTICAL  
 Limit : FCC PART 15 C (3M)  
 Env. / Ins. : 23.3°C/53% Engineer : Abel  
 Test Mode : WIFI2.4G TX

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	30.000	18.80	0.55	0.76	20.11	40.00	19.89	QP
2	60.070	19.50	0.78	-3.82	16.46	40.00	23.54	QP
3	140.580	18.88	1.19	-3.69	16.38	43.50	27.12	QP
4	388.900	21.82	2.03	-4.07	19.78	46.00	26.22	QP
5	432.550	23.02	2.16	-3.77	21.41	46.00	24.59	QP
6	466.500	23.63	2.27	-3.19	22.71	46.00	23.29	QP

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.




Frequency: 1GHz~18GHz

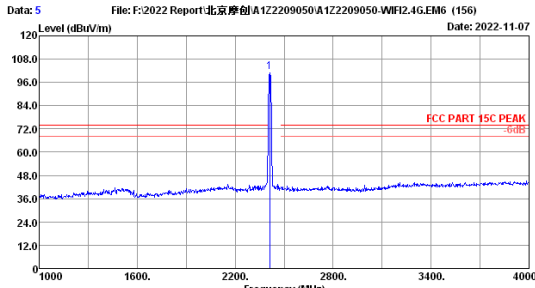

File: F:\2022 Report\北京摩创\A1Z2209050\A1Z2209050-WIFI2.4G.EM6 (156)  
 Date: 2022-11-07  
 Site no. : 3m Chamber Data no. : 5  
 Dis. / Ant. : 3m 2022 MCTD1209-3006 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23.8°C/53.5% Engineer : Allen  
 Test Mode : 11b 2412MHz Tx

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2412.00	27.73	2.30	105.82	34.36	101.49	-----	-----	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

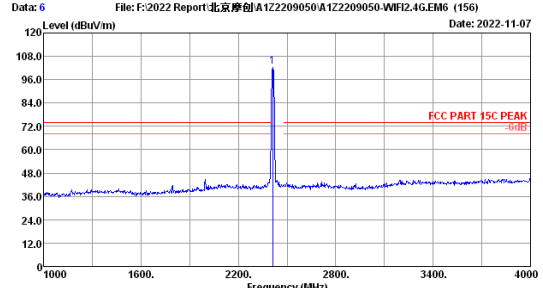

File: F:\2022 Report\北京摩创\A1Z2209050\A1Z2209050-WIFI2.4G.EM6 (156)  
 Date: 2022-11-07  
 Site no. : 3m Chamber Data no. : 6  
 Dis. / Ant. : 3m 2022 MCTD1209-3006 Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23.8°C/53.5% Engineer : Allen  
 Test Mode : 11b 2412MHz Tx

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2412.00	27.73	2.30	107.12	34.36	102.79	-----	-----	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

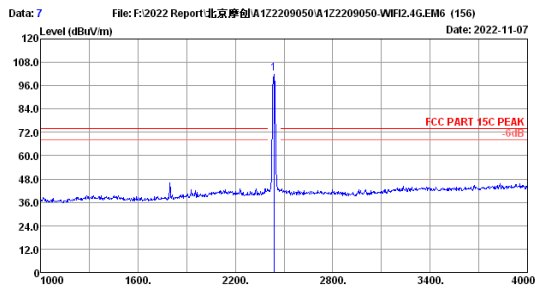

File: F:\2022 Report\北京摩创\A1Z2209050\A1Z2209050-WIFI2.4G.EM6 (156)  
 Date: 2022-11-07  
 Site no. : 3m Chamber Data no. : 7  
 Dis. / Ant. : 3m 2022 MCTD1209-3006 Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23.8°C/53.5% Engineer : Allen  
 Test Mode : 11b 2437MHz Tx

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2437.00	27.80	2.32	106.56	34.36	102.32	-----	-----	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

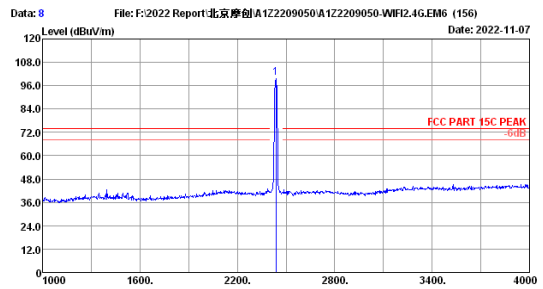

File: F:\2022 Report\北京摩创\A1Z2209050\A1Z2209050-WIFI2.4G.EM6 (156)  
 Date: 2022-11-07  
 Site no. : 3m Chamber Data no. : 8  
 Dis. / Ant. : 3m 2022 MCTD1209-3006 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23.8°C/53.5% Engineer : Allen  
 Test Mode : 11b 2437MHz Tx

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2437.00	27.80	2.32	104.51	34.36	100.27	-----	-----	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

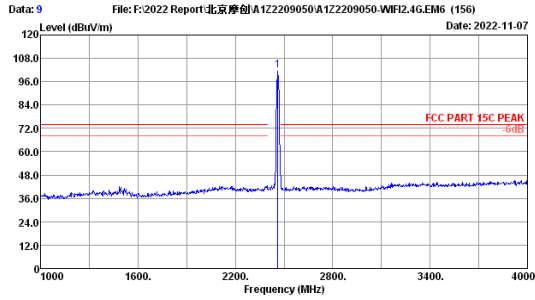

Site no. : 3m Chamber Data no. : 9  
 Dis. / Ant. : 3m 2022 MCTD1209-3006 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23.8°C/53.5% Engineer : Allen  
 Test Mode : 11b 2462MHz Tx

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2462.00	27.80	2.33	105.97	34.35	101.75	72.00	29.75	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

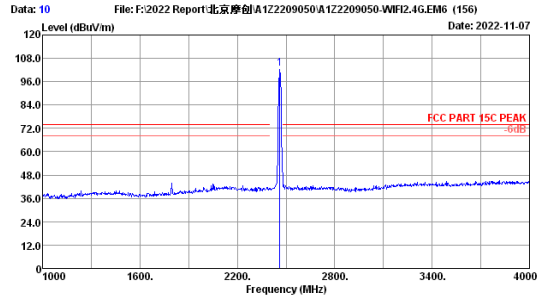

Site no. : 3m Chamber Data no. : 10  
 Dis. / Ant. : 3m 2022 MCTD1209-3006 Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23.8°C/53.5% Engineer : Allen  
 Test Mode : 11b 2462MHz Tx

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2462.00	27.80	2.33	106.84	34.35	102.62	72.00	30.62	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

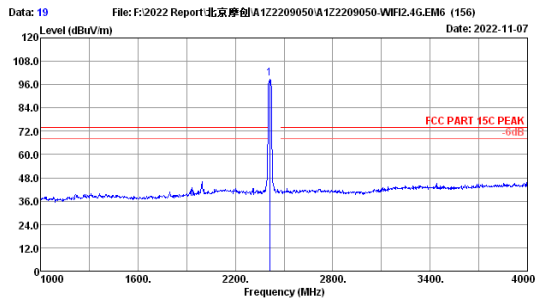

Site no. : 3m Chamber Data no. : 19  
 Dis. / Ant. : 3m 2022 MCTD1209-3006 Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23.8°C/53.5% Engineer : Allen  
 Test Mode : 11g 2412MHz Tx

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2412.00	27.73	2.30	103.60	34.36	99.27	72.00	27.27	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

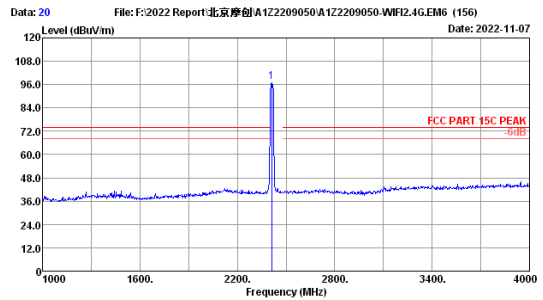

Site no. : 3m Chamber Data no. : 20  
 Dis. / Ant. : 3m 2022 MCTD1209-3006 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23.8°C/53.5% Engineer : Allen  
 Test Mode : 11g 2412MHz Tx

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2412.00	27.73	2.30	101.92	34.36	97.59	72.00	25.59	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

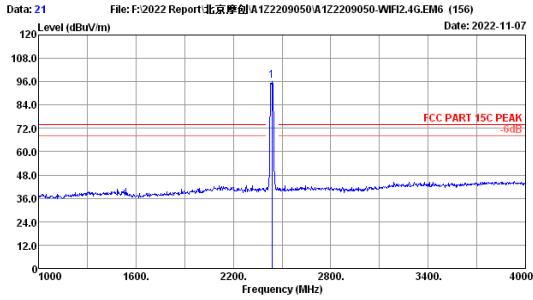

Site no. : 3m Chamber Data no. : 21  
 Dis. / Ant. : 3m 2022 MCTD1209-3006 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23.8°C/53.5% Engineer : Allen  
 Test Mode : 11g 2437MHz Tx

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2437.00	27.80	2.32	100.84	34.36	96.60	72.00	24.60	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

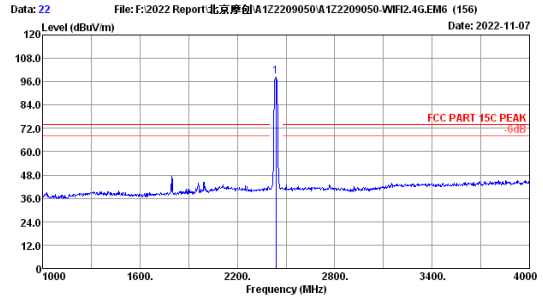

Site no. : 3m Chamber Data no. : 22  
 Dis. / Ant. : 3m 2022 MCTD1209-3006 Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23.8°C/53.5% Engineer : Allen  
 Test Mode : 11g 2437MHz Tx

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2437.00	27.80	2.32	103.14	34.36	98.90	72.00	26.90	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

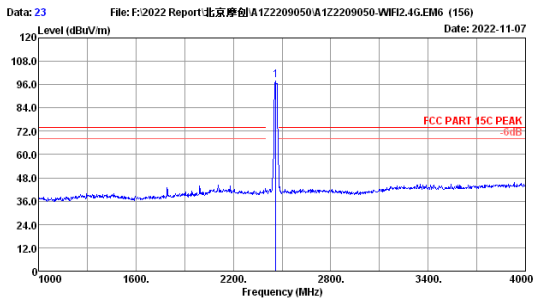

Site no. : 3m Chamber Data no. : 23  
 Dis. / Ant. : 3m 2022 MCTD1209-3006 Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23.8°C/53.5% Engineer : Allen  
 Test Mode : 11g 2462MHz Tx

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2462.00	27.80	2.33	102.34	34.35	98.12	72.00	26.12	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

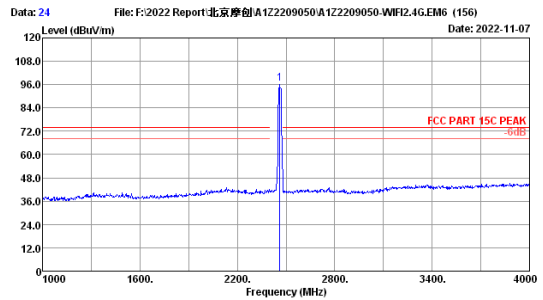

Site no. : 3m Chamber Data no. : 24  
 Dis. / Ant. : 3m 2022 MCTD1209-3006 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23.8°C/53.5% Engineer : Allen  
 Test Mode : 11g 2462MHz Tx

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2462.00	27.80	2.33	100.75	34.35	96.53	72.00	24.53	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

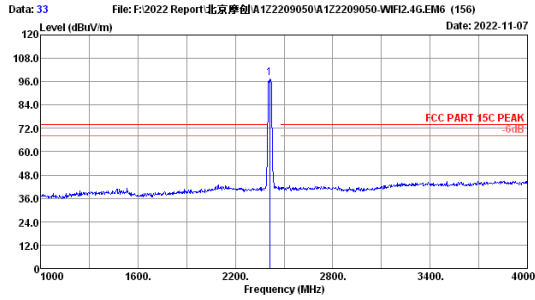

Site no. : 3m Chamber Data no. : 33  
 Dis. / Ant. : 3m 2022 MCTD1209-3006 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23.8°C/53.5% Engineer : Allen  
 Test Mode : 11n20 2412MHz Tx

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2412.00	27.73	2.30	102.04	34.36	97.71	72.00	25.71	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

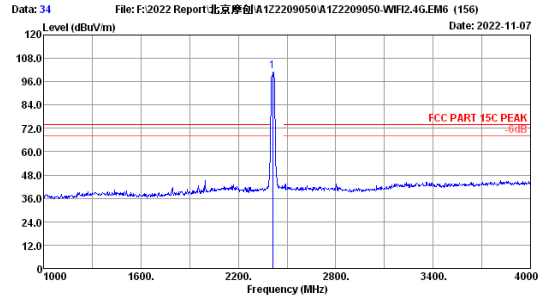

Site no. : 3m Chamber Data no. : 34  
 Dis. / Ant. : 3m 2022 MCTD1209-3006 Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23.8°C/53.5% Engineer : Allen  
 Test Mode : 11n20 2412MHz Tx

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2412.00	27.73	2.30	105.57	34.36	101.24	72.00	29.24	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

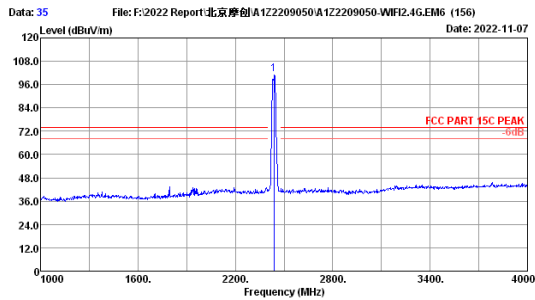

Site no. : 3m Chamber Data no. : 35  
 Dis. / Ant. : 3m 2022 MCTD1209-3006 Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23.8°C/53.5% Engineer : Allen  
 Test Mode : 11n20 2437MHz Tx

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2437.00	27.80	2.32	105.73	34.36	101.49	72.00	29.49	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

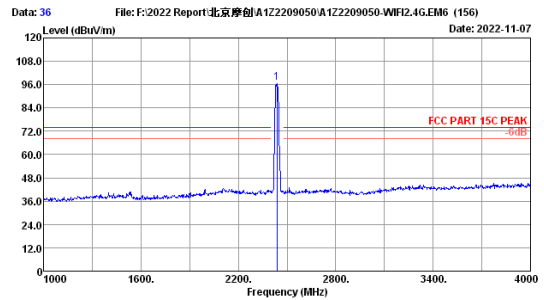

Site no. : 3m Chamber Data no. : 36  
 Dis. / Ant. : 3m 2022 MCTD1209-3006 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23.8°C/53.5% Engineer : Allen  
 Test Mode : 11n20 2437MHz Tx

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2437.00	27.80	2.32	101.29	34.36	97.05	72.00	25.05	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

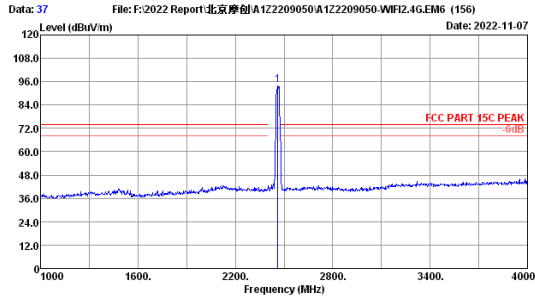

Site no. : 3m Chamber Data no. : 37  
 Dis. / Ant. : 3m 2022 MCTD1209-3006 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23.8°C/53.5% Engineer : Allen  
 Test Mode : 11n20 2462MHz Tx

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2462.00	27.80	2.33	98.72	34.35	94.50			Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

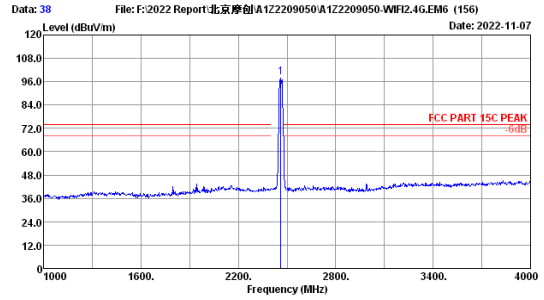

Site no. : 3m Chamber Data no. : 38  
 Dis. / Ant. : 3m 2022 MCTD1209-3006 Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23.8°C/53.5% Engineer : Allen  
 Test Mode : 11n20 2462MHz Tx

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2462.00	27.80	2.33	102.61	34.35	98.39			Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

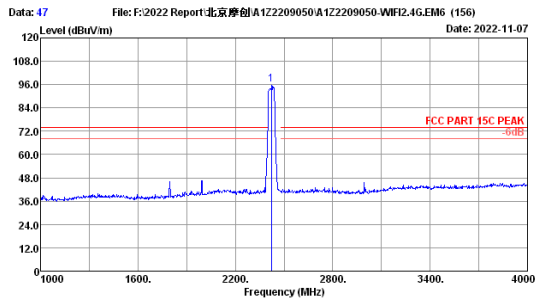

Site no. : 3m Chamber Data no. : 47  
 Dis. / Ant. : 3m 2022 MCTD1209-3006 Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23.8°C/53.5% Engineer : Allen  
 Test Mode : 11n40 2422MHz Tx

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2422.00	27.77	2.31	100.33	34.36	96.05			Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

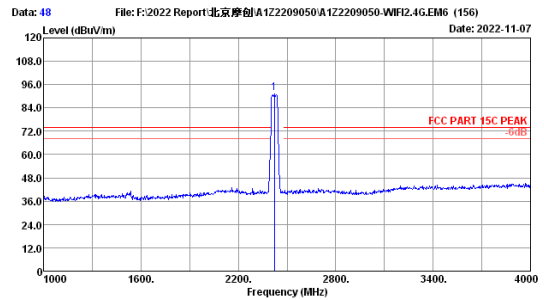

Site no. : 3m Chamber Data no. : 48  
 Dis. / Ant. : 3m 2022 MCTD1209-3006 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23.8°C/53.5% Engineer : Allen  
 Test Mode : 11n40 2422MHz Tx

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2422.00	27.77	2.31	96.08	34.36	91.80			Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

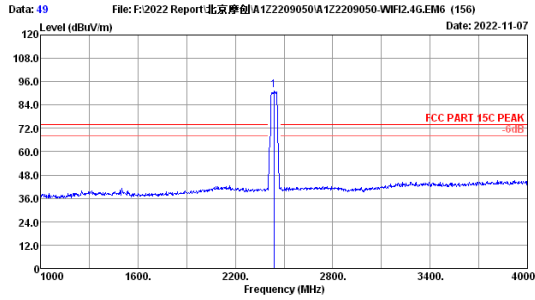

Site no. : 3m Chamber Data no. : 49  
 Dis. / Ant. : 3m 2022 MCTD1209-3006 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23.8°C/53.5% Engineer : Allen  
 Test Mode : 11n40 2437MHz Tx

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2437.00	27.80	2.32	95.95	34.36	91.71	72.0	19.71	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

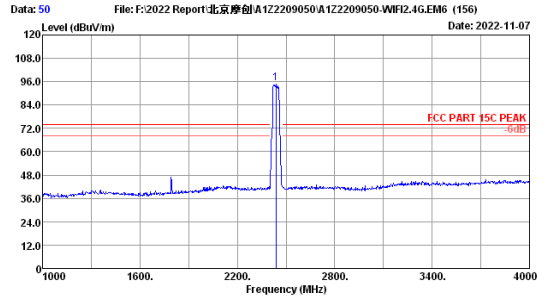

Site no. : 3m Chamber Data no. : 50  
 Dis. / Ant. : 3m 2022 MCTD1209-3006 Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23.8°C/53.5% Engineer : Allen  
 Test Mode : 11n40 2452MHz Tx

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2437.00	27.80	2.32	99.50	34.36	95.26	72.0	23.26	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

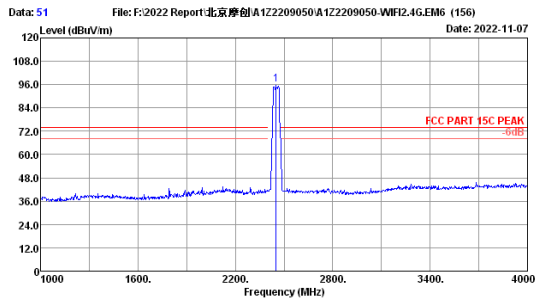

Site no. : 3m Chamber Data no. : 51  
 Dis. / Ant. : 3m 2022 MCTD1209-3006 Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23.8°C/53.5% Engineer : Allen  
 Test Mode : 11n40 2437MHz Tx

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2452.00	27.80	2.32	100.51	34.35	96.28	72.0	24.28	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

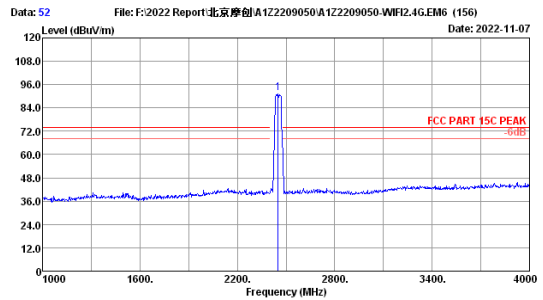

Site no. : 3m Chamber Data no. : 52  
 Dis. / Ant. : 3m 2022 MCTD1209-3006 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23.8°C/53.5% Engineer : Allen  
 Test Mode : 11n40 2452MHz Tx

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2452.00	27.80	2.32	95.91	34.35	91.68	72.0	19.68	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

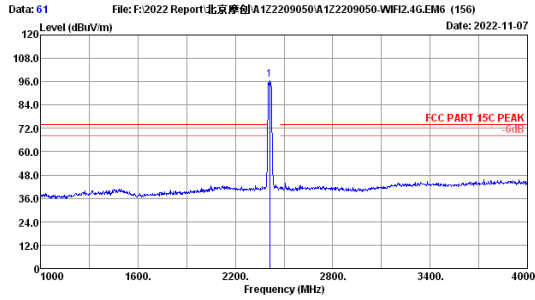


File: F:\2022 Report\北京摩创\A122209050\A122209050-WIFI2.4G.EM6 (156)  
 Date: 2022-11-07

Site no. : 3m Chamber Data no. : 61  
 Dis. / Ant. : 3m 2022 MCTD1209-3006 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23.8°C/53.5% Engineer : Allen  
 Test Mode : 11ax20 2412MHz Tx

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2412.00	27.73	2.30	101.31	34.36	96.98	72.00	24.98	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

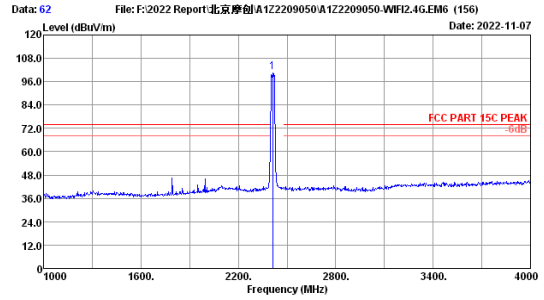


File: F:\2022 Report\北京摩创\A122209050\A122209050-WIFI2.4G.EM6 (156)  
 Date: 2022-11-07

Site no. : 3m Chamber Data no. : 62  
 Dis. / Ant. : 3m 2022 MCTD1209-3006 Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23.8°C/53.5% Engineer : Allen  
 Test Mode : 11ax20 2412MHz Tx

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2412.00	27.73	2.30	105.48	34.36	101.15	72.00	29.15	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

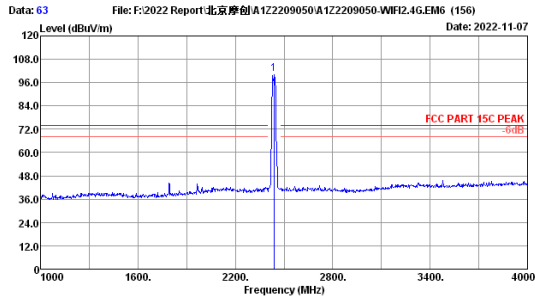


File: F:\2022 Report\北京摩创\A122209050\A122209050-WIFI2.4G.EM6 (156)  
 Date: 2022-11-07

Site no. : 3m Chamber Data no. : 63  
 Dis. / Ant. : 3m 2022 MCTD1209-3006 Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23.8°C/53.5% Engineer : Allen  
 Test Mode : 11ax20 2437MHz Tx

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2437.00	27.80	2.32	104.88	34.36	100.64	72.00	28.64	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

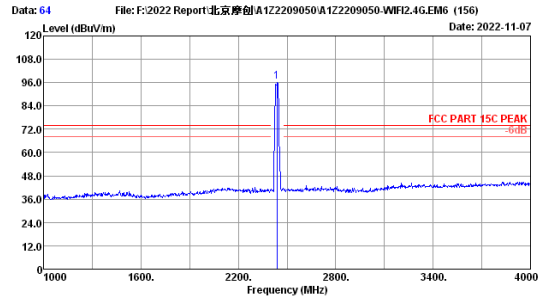


File: F:\2022 Report\北京摩创\A122209050\A122209050-WIFI2.4G.EM6 (156)  
 Date: 2022-11-07

Site no. : 3m Chamber Data no. : 64  
 Dis. / Ant. : 3m 2022 MCTD1209-3006 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23.8°C/53.5% Engineer : Allen  
 Test Mode : 11ax20 2437MHz Tx

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2437.00	27.80	2.32	100.61	34.36	96.37	72.00	24.37	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

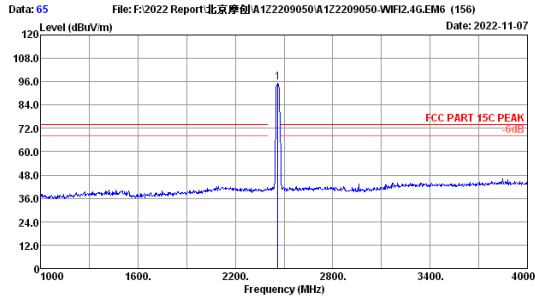

Site no. : 3m Chamber Data no. : 65  
 Dis. / Ant. : 3m 2022 MCTD1209-3006 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23.8°C/53.5% Engineer : Allen  
 Test Mode : 11ax20 2462MHz Tx

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2462.00	27.80	2.33	99.98	34.35	95.76	72.00	23.76	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

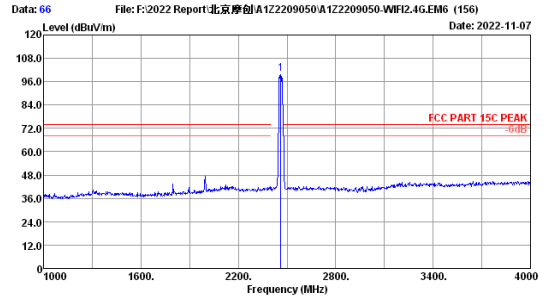

Site no. : 3m Chamber Data no. : 66  
 Dis. / Ant. : 3m 2022 MCTD1209-3006 Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23.8°C/53.5% Engineer : Allen  
 Test Mode : 11ax20 2462MHz Tx

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2462.00	27.80	2.33	104.39	34.35	100.17	72.00	28.17	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

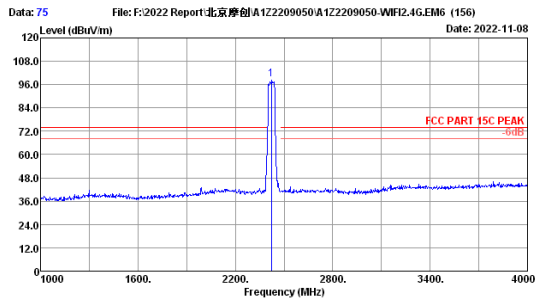

Site no. : 3m Chamber Data no. : 75  
 Dis. / Ant. : 3m 2022 MCTD1209-3006 Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23.8°C/53.5% Engineer : Allen  
 Test Mode : 11ax40 2422MHz Tx

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2422.00	27.77	2.31	102.86	34.36	98.58	72.00	26.58	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

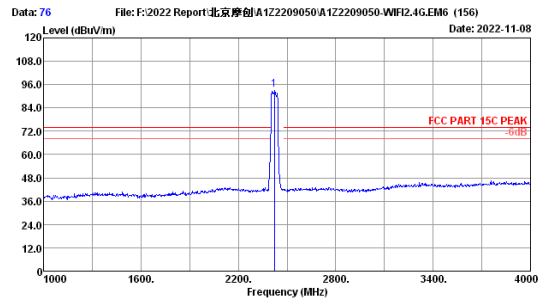


Site no. : 3m Chamber Data no. : 76  
 Dis. / Ant. : 3m 2022 MCTD1209-3006 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23.8°C/53.5% Engineer : Allen  
 Test Mode : 11ax40 2422MHz Tx

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2422.00	27.77	2.31	97.87	34.36	93.59	72.00	21.59	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.




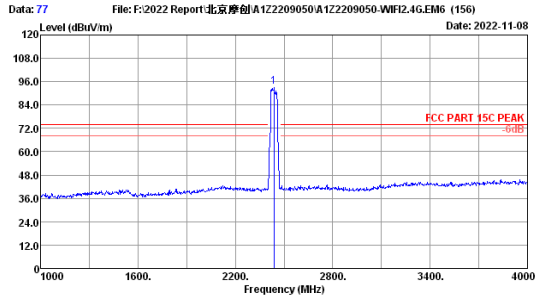

Site no. : 3m Chamber Data no. : 77  
 Dis. / Ant. : 3m 2022 MCTD1209-3006 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23.8°C/53.5% Engineer : Allen  
 Test Mode : 11ax40 2437MHz Tx

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2437.00	27.80	2.32	97.76	34.36	93.52	72.0	21.52	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

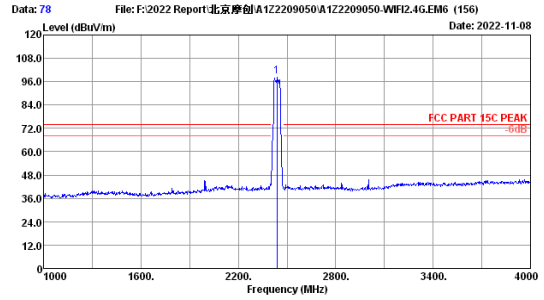

Site no. : 3m Chamber Data no. : 78  
 Dis. / Ant. : 3m 2022 MCTD1209-3006 Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23.8°C/53.5% Engineer : Allen  
 Test Mode : 11ax40 2437MHz Tx

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2437.00	27.80	2.32	102.94	34.36	98.70	72.0	26.70	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

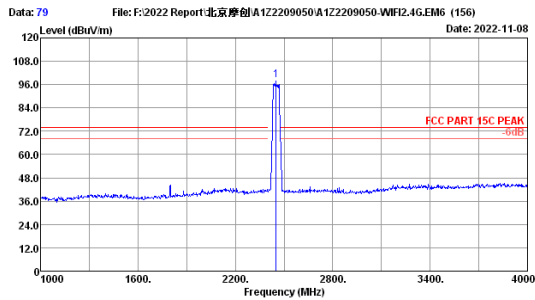

Site no. : 3m Chamber Data no. : 79  
 Dis. / Ant. : 3m 2022 MCTD1209-3006 Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23.8°C/53.5% Engineer : Allen  
 Test Mode : 11ax40 2452MHz Tx

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2452.00	27.80	2.32	102.57	34.35	98.34	72.0	26.34	Peak



Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

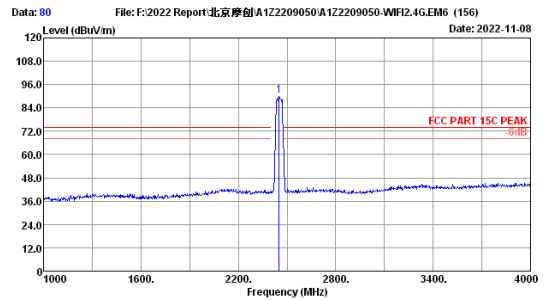

Site no. : 3m Chamber Data no. : 80  
 Dis. / Ant. : 3m 2022 MCTD1209-3006 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23.8°C/53.5% Engineer : Allen  
 Test Mode : 11ax40 2452MHz Tx



No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2452.00	27.80	2.32	94.56	34.35	90.33	72.0	18.33	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

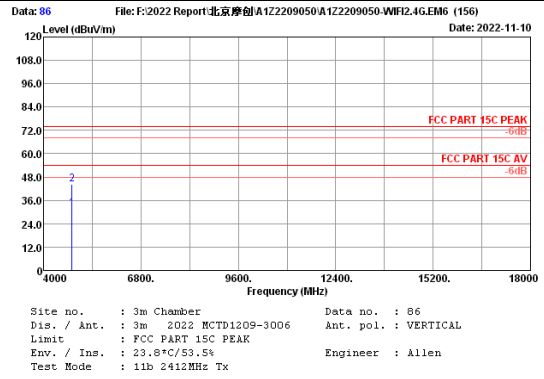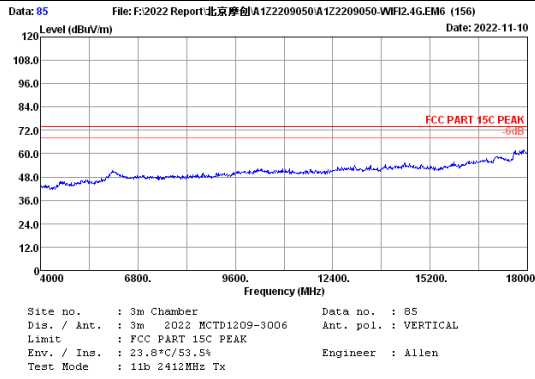



No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4824.00	31.25	3.33	31.13	33.68	32.03	54.00	21.97	Average
2	4824.00	31.25	3.33	43.20	33.68	44.10	74.00	29.90	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

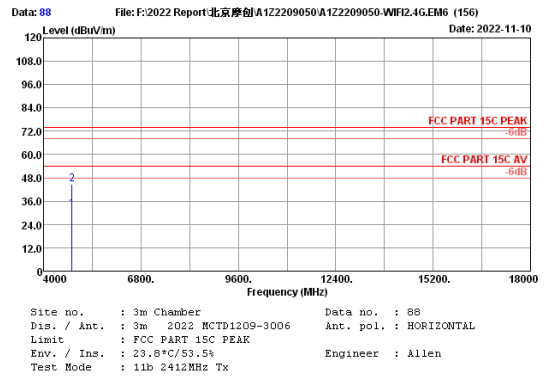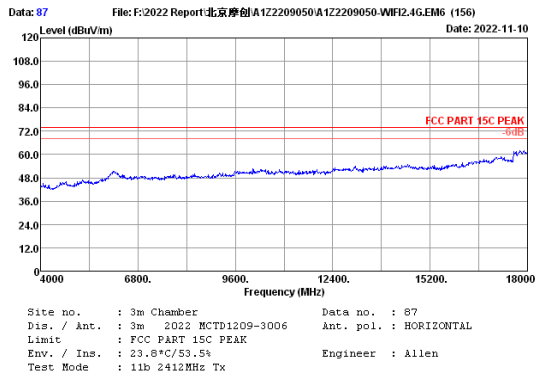



No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4824.00	31.25	3.33	31.08	33.68	31.98	54.00	22.02	Average
2	4824.00	31.25	3.33	43.70	33.68	44.60	74.00	29.40	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

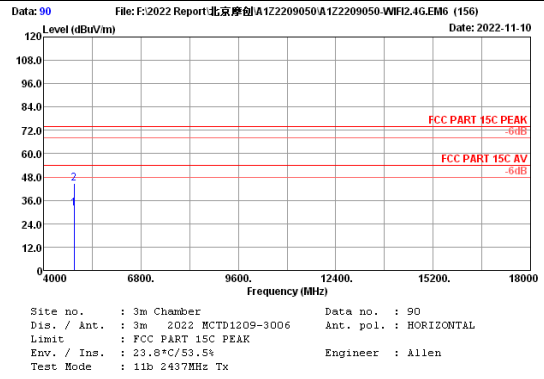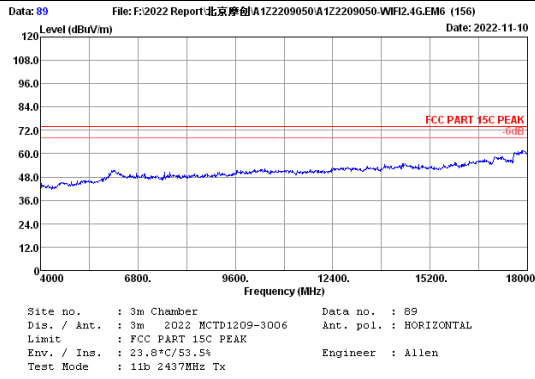



No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4874.00	31.43	3.35	30.79	33.69	31.88	54.00	22.12	Average
2	4874.00	31.43	3.35	43.63	33.69	44.72	74.00	29.28	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

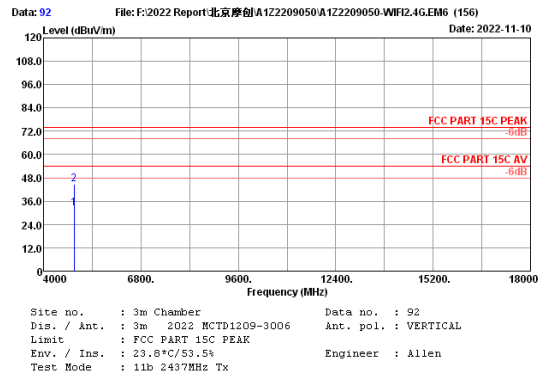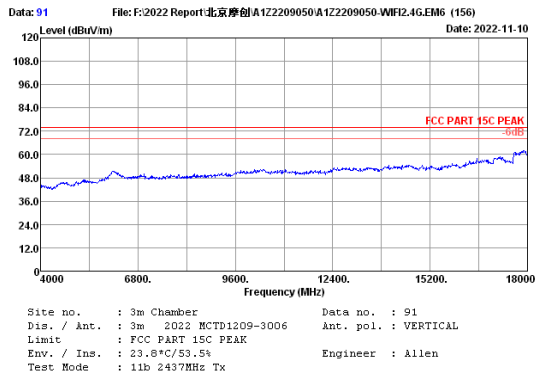



No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4874.00	31.43	3.35	31.08	33.69	32.17	54.00	21.83	Average
2	4874.00	31.43	3.35	43.46	33.69	44.55	74.00	29.45	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

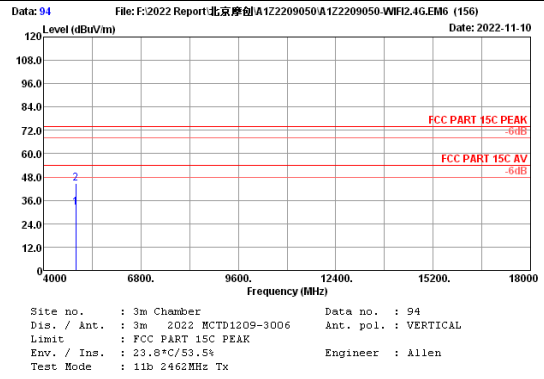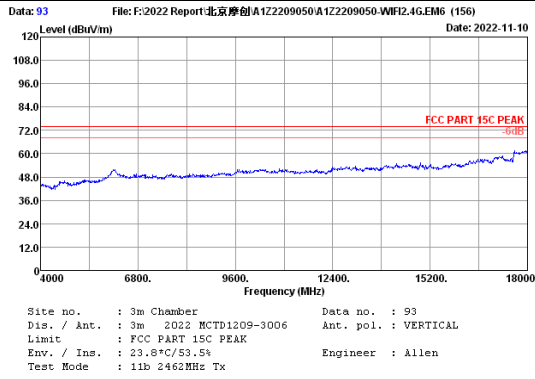



No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4924.00	31.70	3.37	30.87	33.69	32.25	54.00	21.75	Average
2	4924.00	31.70	3.37	43.14	33.69	44.52	74.00	29.48	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

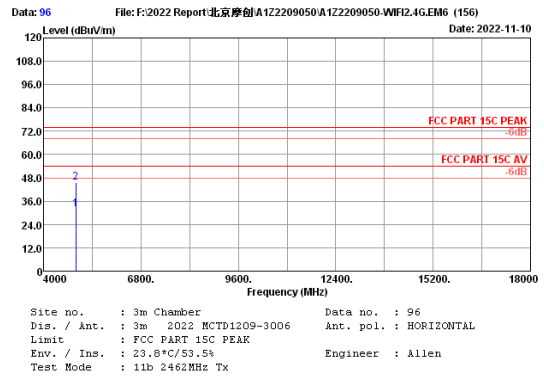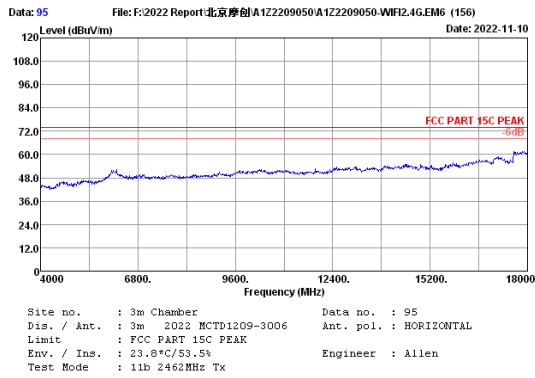



No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4924.00	31.70	3.37	30.64	33.69	32.02	54.00	21.98	Average
2	4924.00	31.70	3.37	44.19	33.69	45.57	74.00	28.43	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

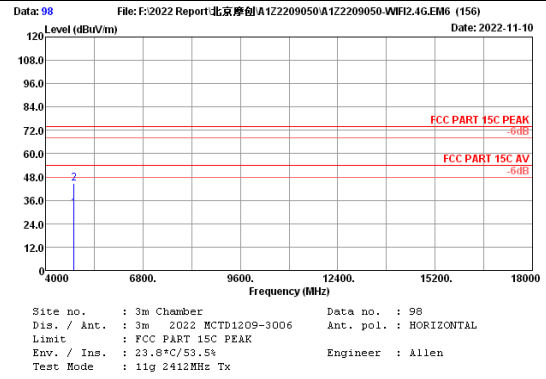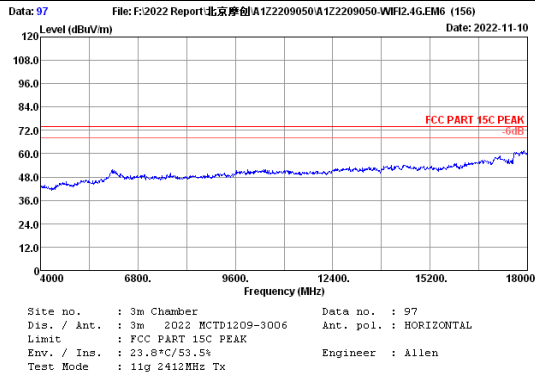



No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4824.00	31.25	3.33	30.79	33.68	31.69	54.00	22.31	Average
2	4824.00	31.25	3.33	43.64	33.68	44.54	74.00	29.46	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

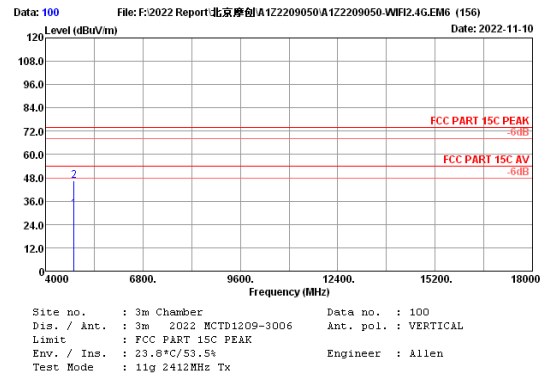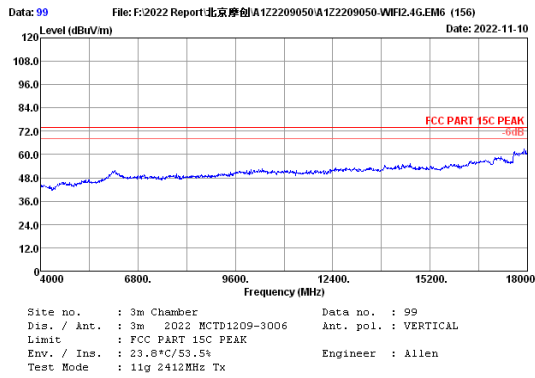



No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4824.00	31.25	3.33	30.98	33.68	31.88	54.00	22.12	Average
2	4824.00	31.25	3.33	45.44	33.68	46.34	74.00	27.66	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

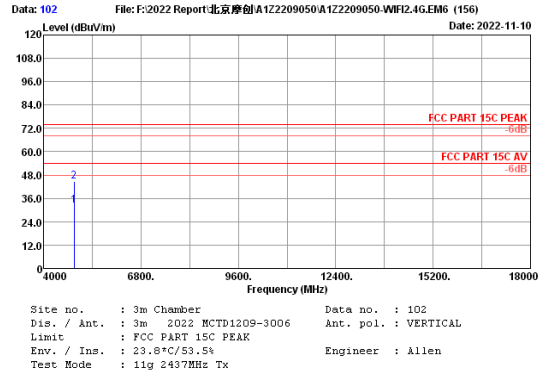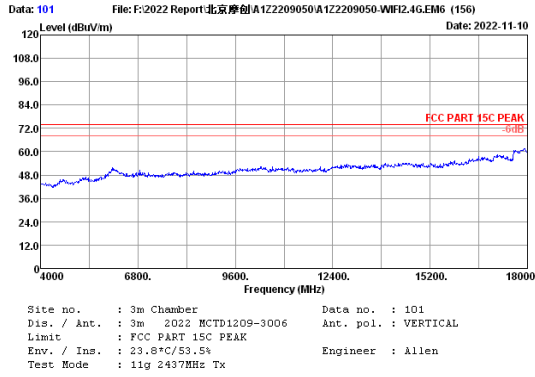


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4874.00	31.43	3.35	31.22	33.69	32.31	54.00	21.69	Average
2	4874.00	31.43	3.35	43.51	33.69	44.60	74.00	29.40	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

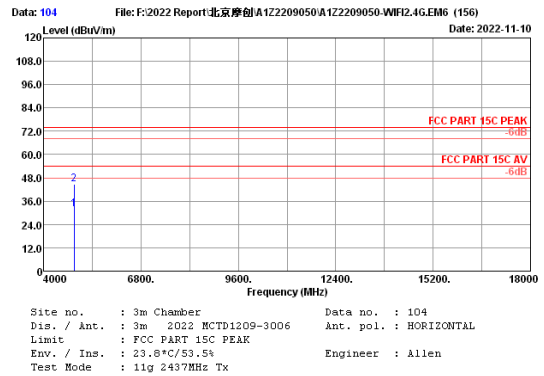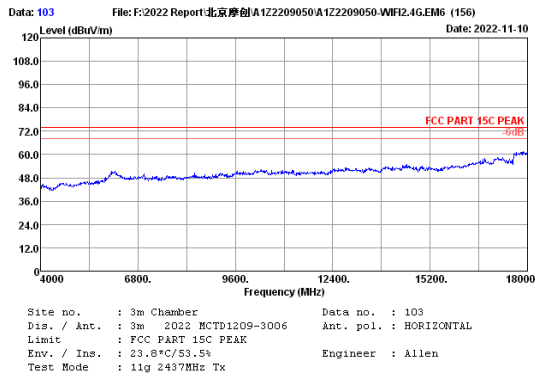

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4874.00	31.43	3.35	30.78	33.69	31.87	54.00	22.13	Average
2	4874.00	31.43	3.35	43.45	33.69	44.54	74.00	29.46	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

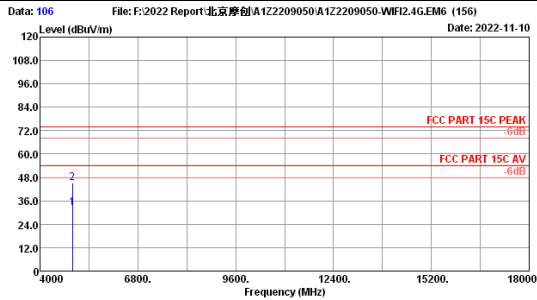

Site no. : 3m Chamber Data no. : 106  
 Dis. / Ant. : 3m 2022 MCTD1209-3006 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23.8°C/53.5% Engineer : Allen  
 Test Mode : 11g 2462MHz Tx

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4924.00	31.70	3.37	30.74	33.69	32.12	54.00	21.88	Average
2	4924.00	31.70	3.37	43.64	33.69	45.02	74.00	28.98	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

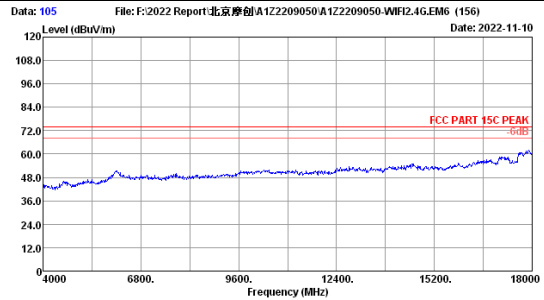


Site no. : 3m Chamber Data no. : 105  
 Dis. / Ant. : 3m 2022 MCTD1209-3006 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23.8°C/53.5% Engineer : Allen  
 Test Mode : 11g 2462MHz Tx

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4924.00	31.70	3.37	30.74	33.69	32.12	54.00	21.88	Average
2	4924.00	31.70	3.37	43.64	33.69	45.02	74.00	28.98	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

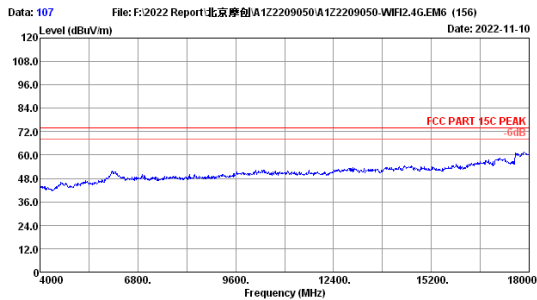



Site no. : 3m Chamber Data no. : 107  
 Dis. / Ant. : 3m 2022 MCTD1209-3006 Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23.8°C/53.5% Engineer : Allen  
 Test Mode : 11g 2462MHz Tx

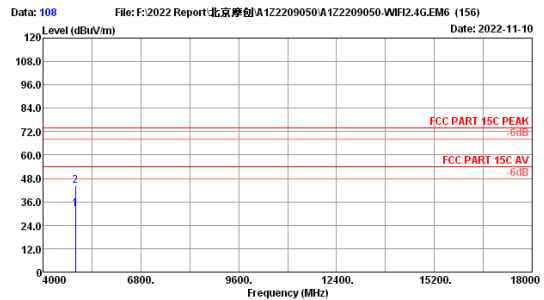

Site no. : 3m Chamber Data no. : 108  
 Dis. / Ant. : 3m 2022 MCTD1209-3006 Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23.8°C/53.5% Engineer : Allen  
 Test Mode : 11g 2462MHz Tx



No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4924.00	31.70	3.37	31.06	33.69	32.44	54.00	21.56	Average
2	4924.00	31.70	3.37	42.81	33.69	44.19	74.00	29.81	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.  
 2. The emission levels that are 30dB below the official limit are not reported.

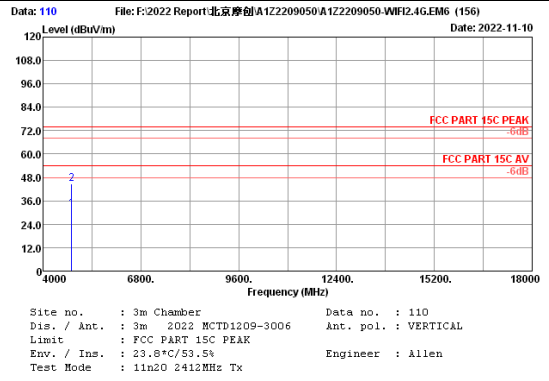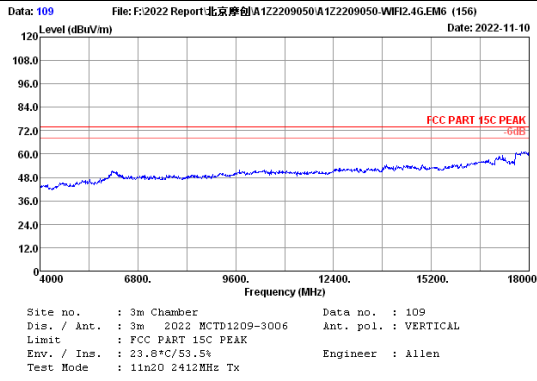

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4824.00	31.25	3.33	31.03	33.68	31.93	54.00	22.07	Average
2	4824.00	31.25	3.33	43.89	33.68	44.79	74.00	29.21	Peak



Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

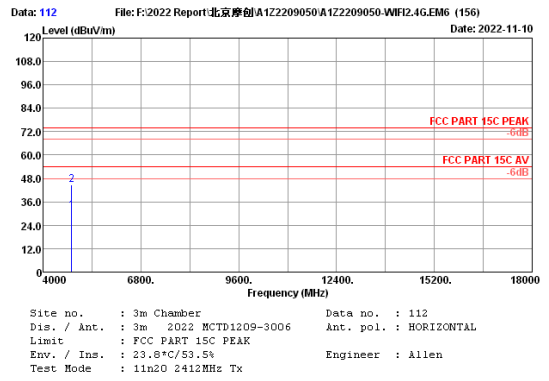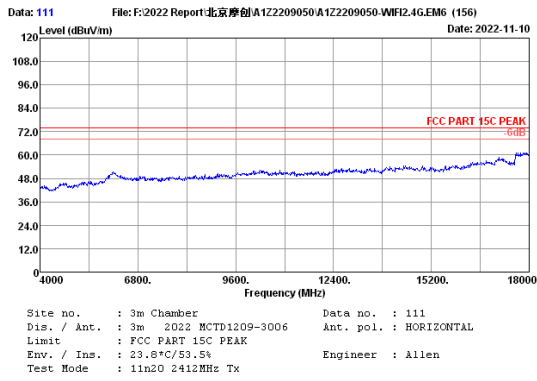

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4824.00	31.25	3.33	30.69	33.68	31.59	54.00	22.41	Average
2	4824.00	31.25	3.33	43.96	33.68	44.86	74.00	29.14	Peak



Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.



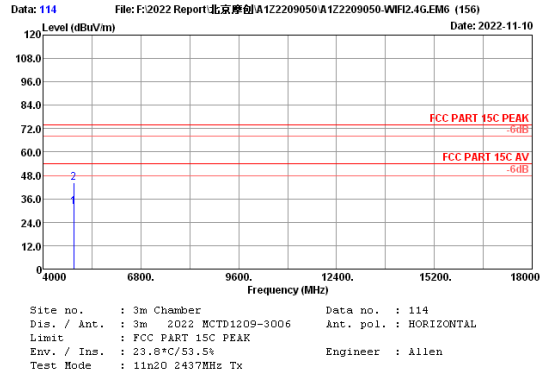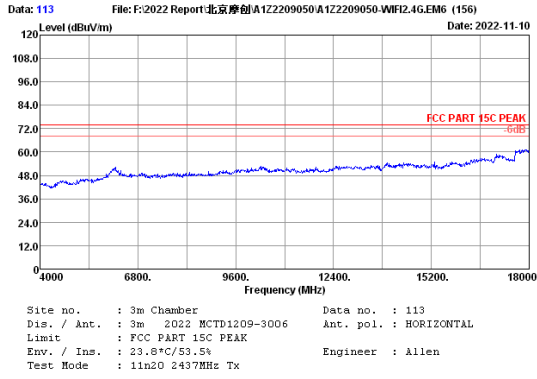



No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4874.00	31.43	3.35	30.79	33.69	31.88	54.00	22.12	Average
2	4874.00	31.43	3.35	43.36	33.69	44.45	74.00	29.55	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

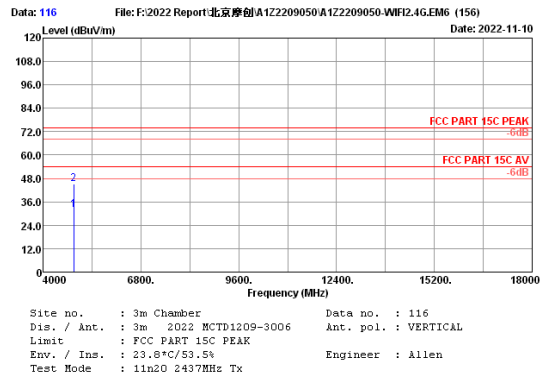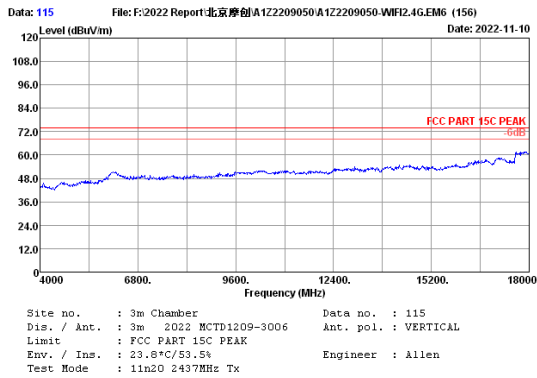



No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4874.00	31.43	3.35	31.00	33.69	32.09	54.00	21.91	Average
2	4874.00	31.43	3.35	43.94	33.69	45.03	74.00	28.97	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.  
 2. The emission levels that are 30dB below the official limit are not reported.

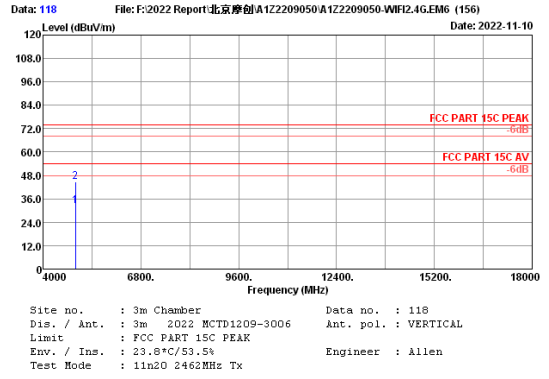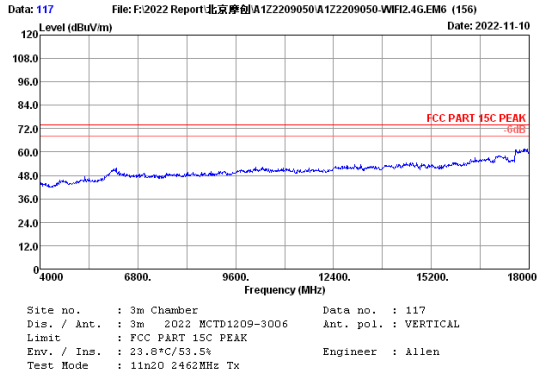



No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4924.00	31.70	3.37	31.02	33.69	32.40	54.00	21.60	Average
2	4924.00	31.70	3.37	43.38	33.69	44.76	74.00	29.24	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

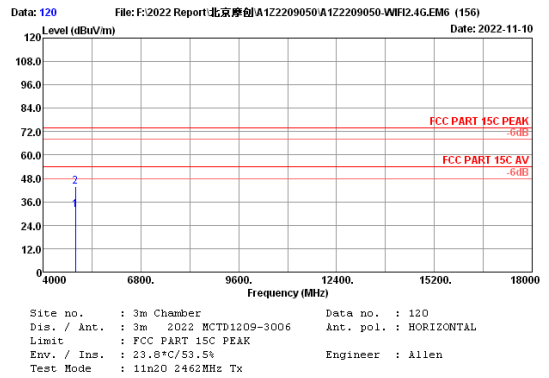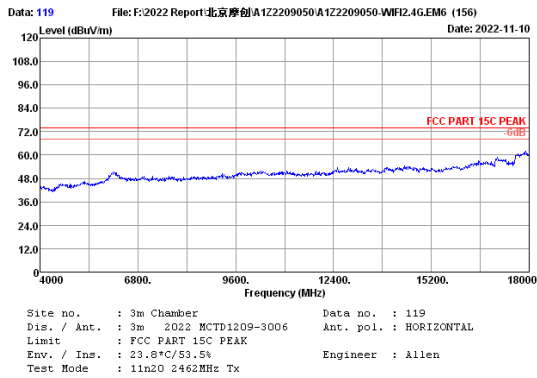



No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4924.00	31.70	3.37	30.67	33.69	32.05	54.00	21.95	Average
2	4924.00	31.70	3.37	42.64	33.69	44.02	74.00	29.98	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

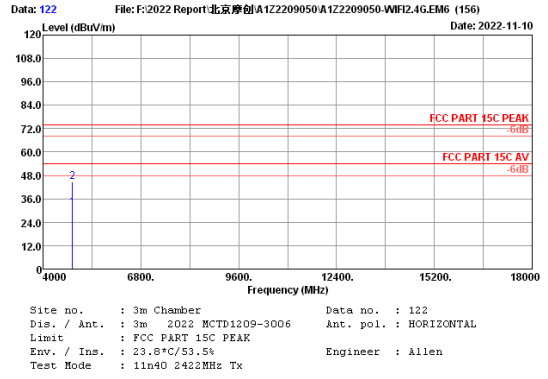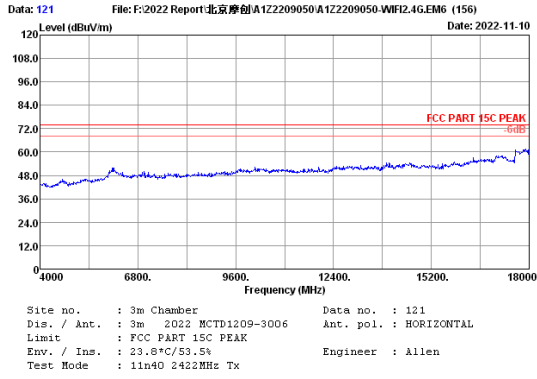



No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4844.00	31.30	3.34	30.64	33.68	31.60	54.00	22.40	Average
2	4844.00	31.30	3.34	43.67	33.68	44.63	74.00	29.37	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

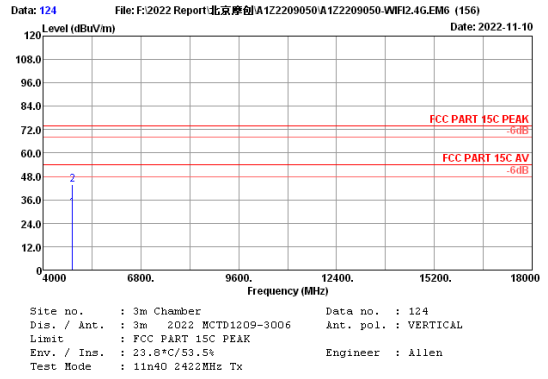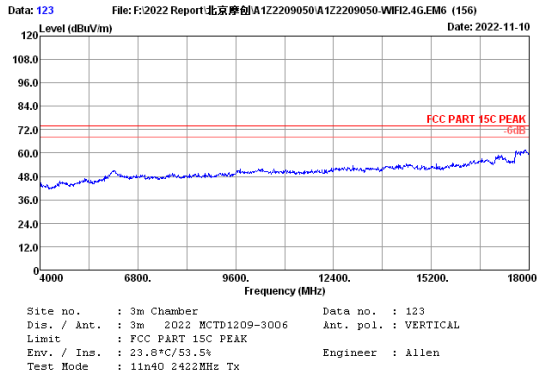



No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4844.00	31.30	3.34	30.95	33.68	31.91	54.00	22.09	Average
2	4844.00	31.30	3.34	43.05	33.68	44.01	74.00	29.99	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

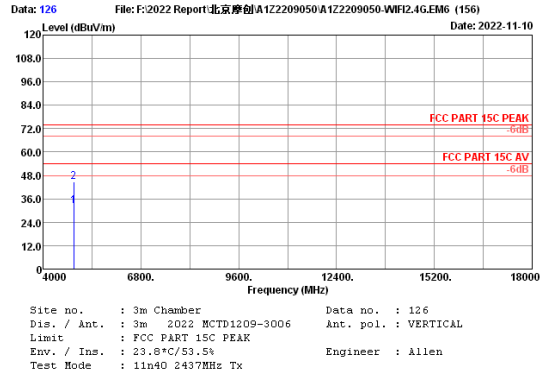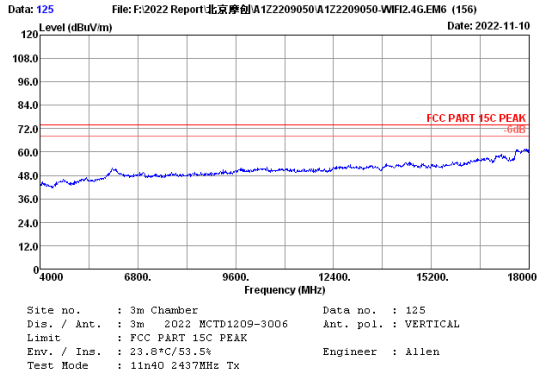



No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4874.00	31.43	3.35	31.06	33.69	32.15	54.00	21.85	Average
2	4874.00	31.43	3.35	43.65	33.69	44.74	74.00	29.26	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

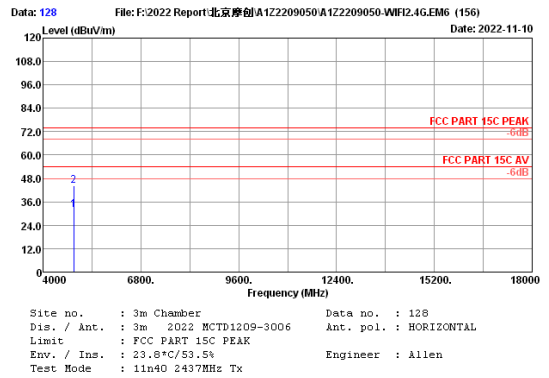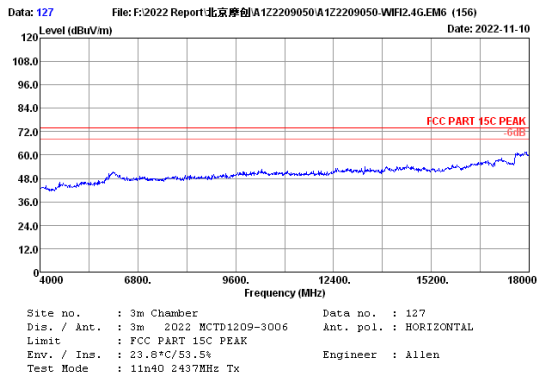



No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4874.00	31.43	3.35	30.77	33.69	31.86	54.00	22.14	Average
2	4874.00	31.43	3.35	43.41	33.69	44.50	74.00	29.50	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

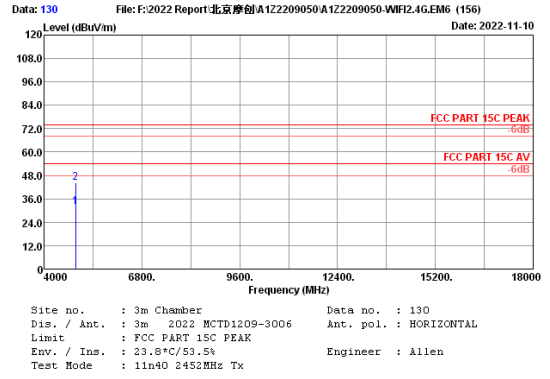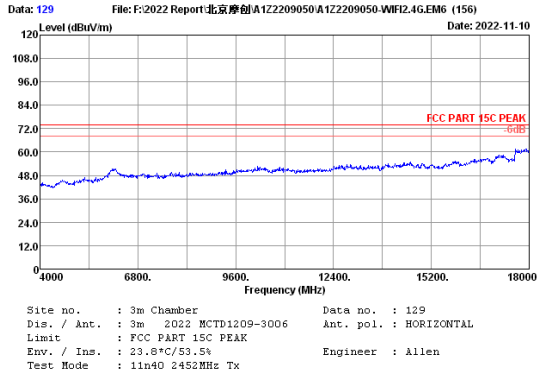



No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4904.00	31.60	3.37	30.72	33.69	32.00	54.00	22.00	Average
2	4904.00	31.60	3.37	43.02	33.69	44.30	74.00	29.70	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

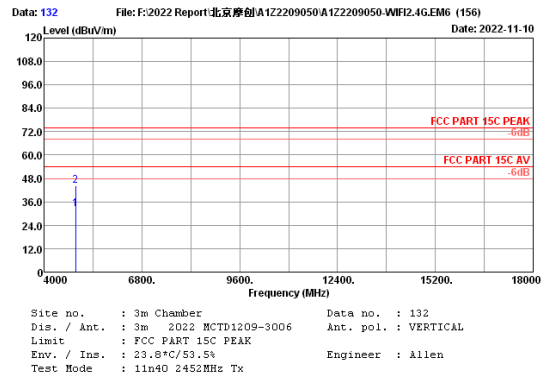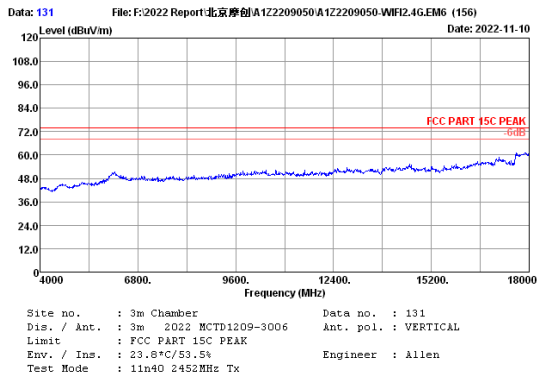



No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4904.00	31.60	3.37	31.14	33.69	32.42	54.00	21.58	Average
2	4904.00	31.60	3.37	42.94	33.69	44.22	74.00	29.78	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -amp factor.  
 2. The emission levels that are 30dB below the official limit are not reported.

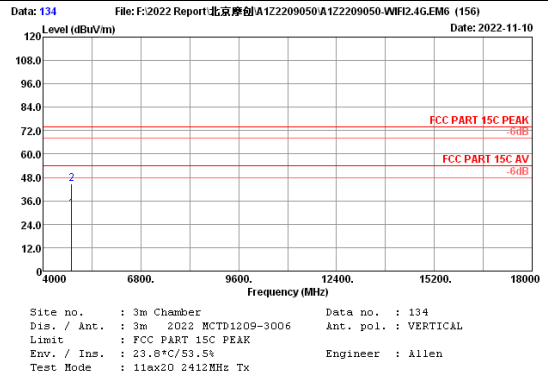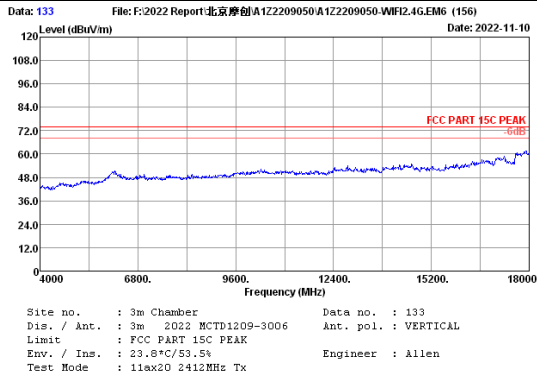



No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4824.00	31.25	3.33	30.98	33.68	31.88	54.00	22.12	Average
2	4824.00	31.25	3.33	43.77	33.68	44.67	74.00	29.33	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

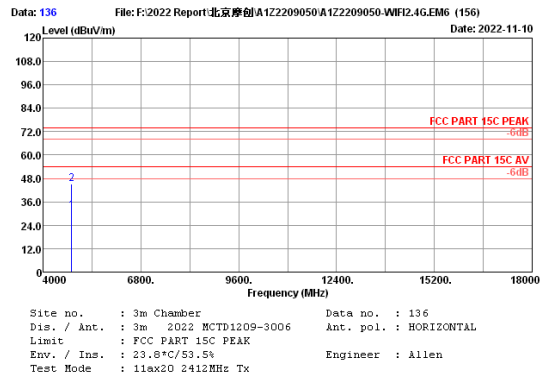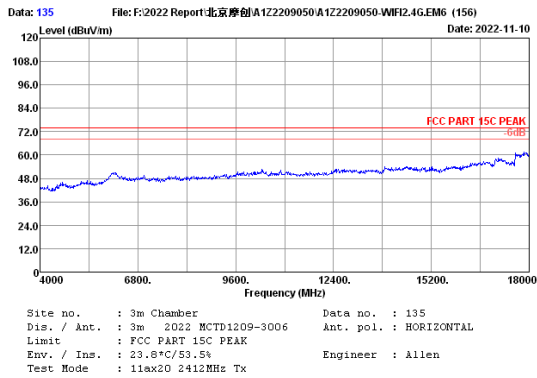



No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4824.00	31.25	3.33	30.63	33.68	31.53	54.00	22.47	Average
2	4824.00	31.25	3.33	44.33	33.68	45.23	74.00	28.77	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

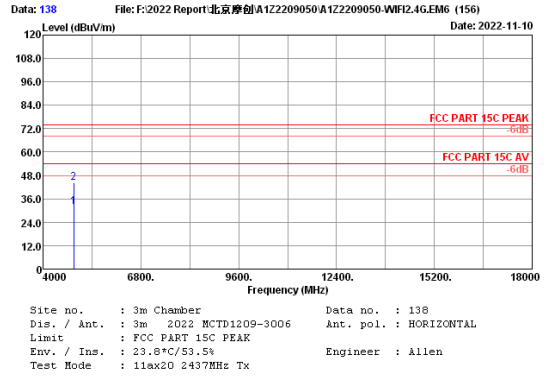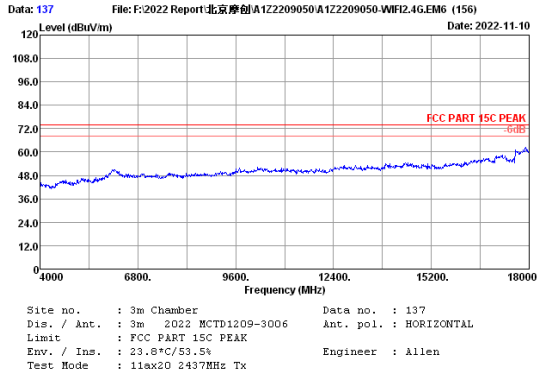



No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4874.00	31.43	3.35	30.60	33.69	31.69	54.00	22.31	Average
2	4874.00	31.43	3.35	43.34	33.69	44.43	74.00	29.57	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

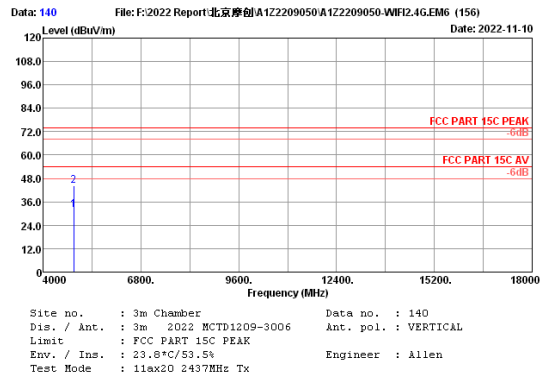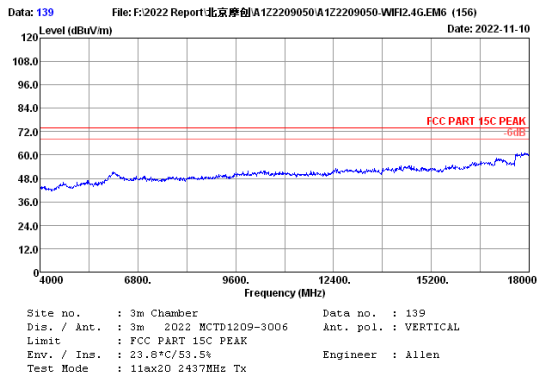



No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4874.00	31.43	3.35	30.89	33.69	31.98	54.00	22.02	Average
2	4874.00	31.43	3.35	43.15	33.69	44.24	74.00	29.76	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

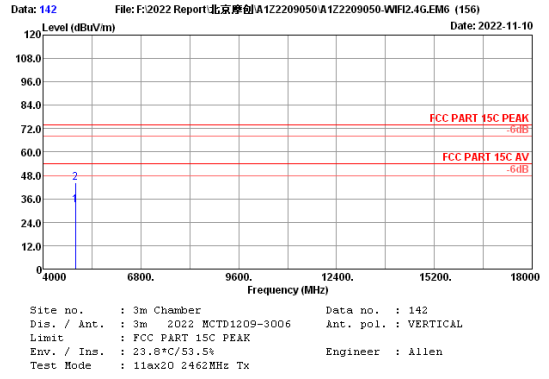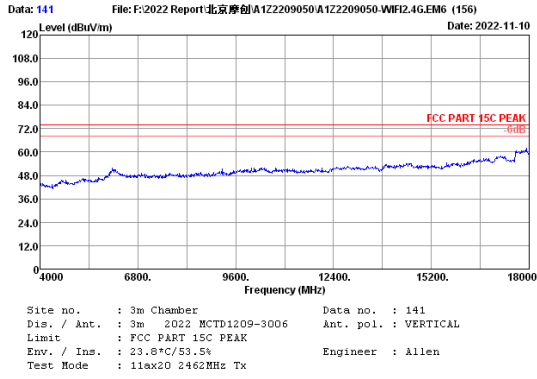

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4924.00	31.70	3.37	31.18	33.69	32.56	54.00	21.44	Average
2	4924.00	31.70	3.37	42.78	33.69	44.16	74.00	29.84	Peak



Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

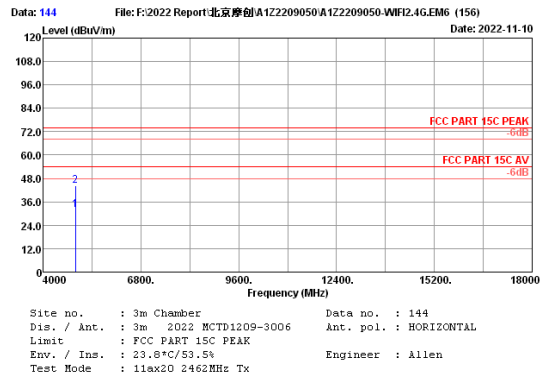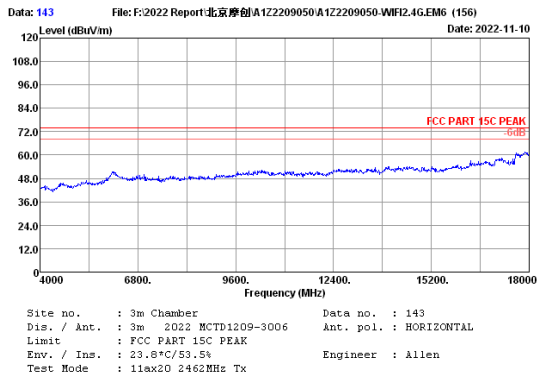

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4924.00	31.70	3.37	30.68	33.69	32.06	54.00	21.94	Average
2	4924.00	31.70	3.37	42.97	33.69	44.35	74.00	29.65	Peak



Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.



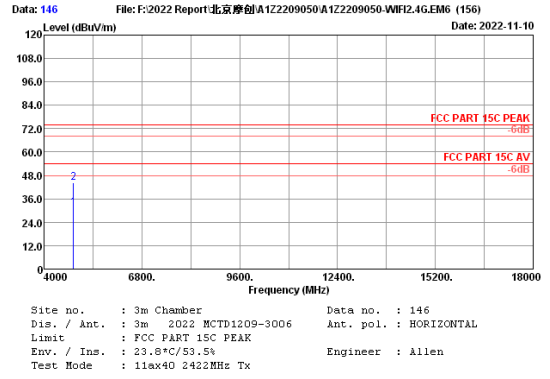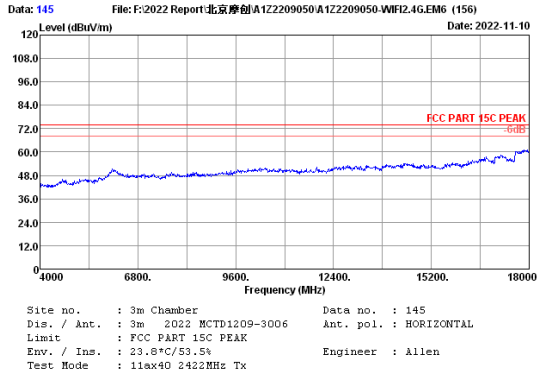



No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4844.00	31.30	3.34	30.68	33.68	31.64	54.00	22.36	Average
2	4844.00	31.30	3.34	43.23	33.68	44.19	74.00	29.81	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

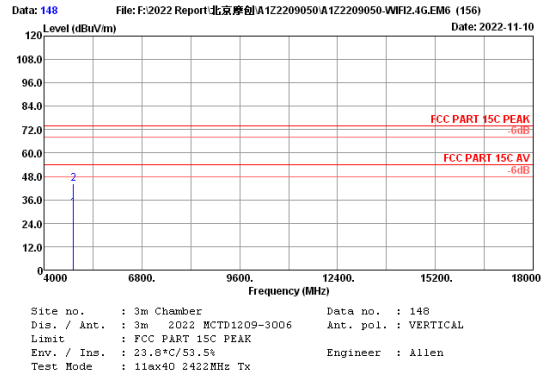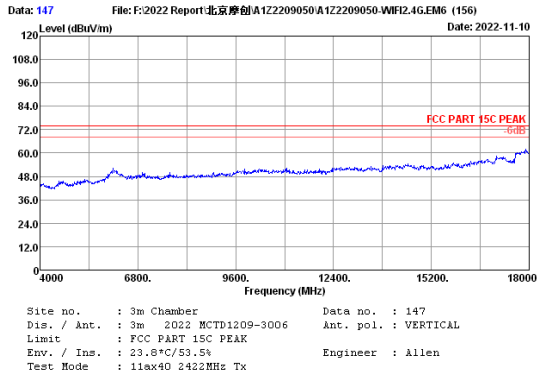



No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4844.00	31.30	3.34	30.98	33.68	31.94	54.00	22.06	Average
2	4844.00	31.30	3.34	43.32	33.68	44.28	74.00	29.72	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

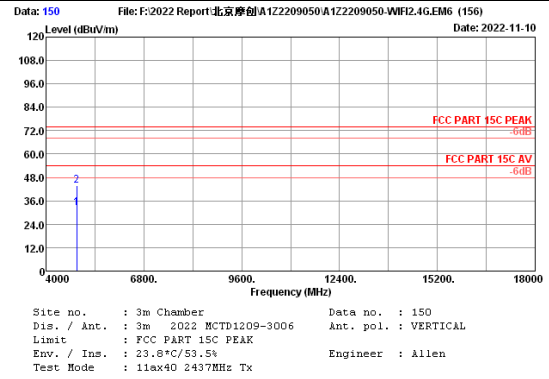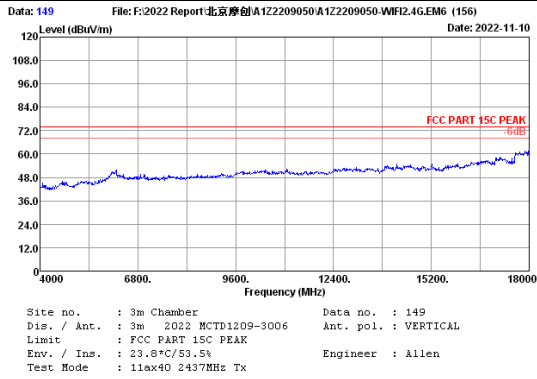



No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4874.00	31.43	3.35	31.03	33.69	32.12	54.00	21.88	Average
2	4874.00	31.43	3.35	42.90	33.69	43.99	74.00	30.01	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

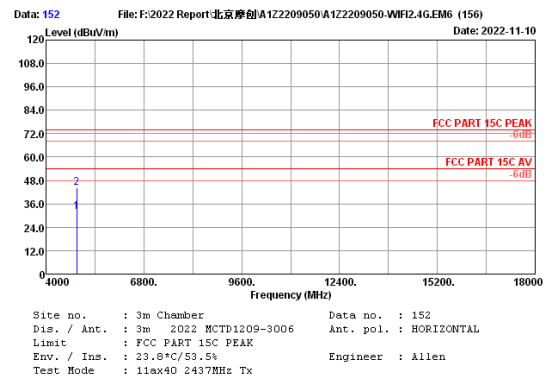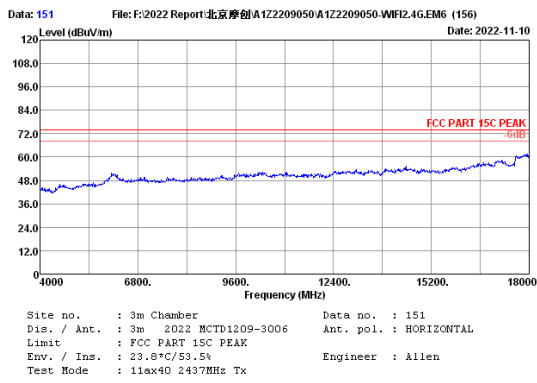



No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4874.00	31.43	3.35	30.76	33.69	31.85	54.00	22.15	Average
2	4874.00	31.43	3.35	43.40	33.69	44.49	74.00	29.51	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -amp factor.  
 2. The emission levels that are 30dB below the official limit are not reported.

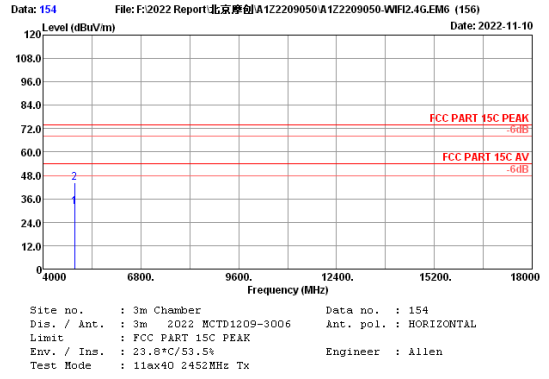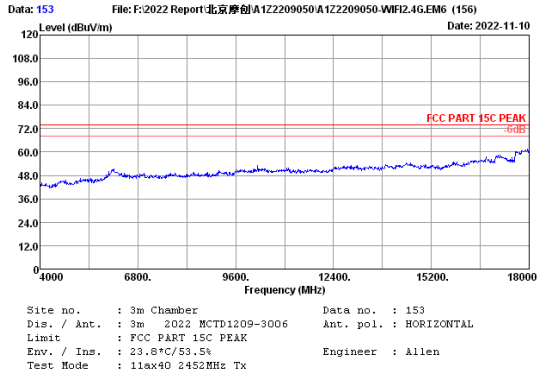

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4904.00	31.60	3.37	30.68	33.69	31.96	54.00	22.04	Average
2	4904.00	31.60	3.37	43.14	33.69	44.42	74.00	29.58	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

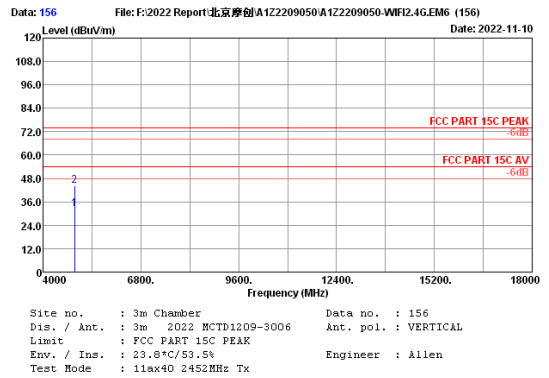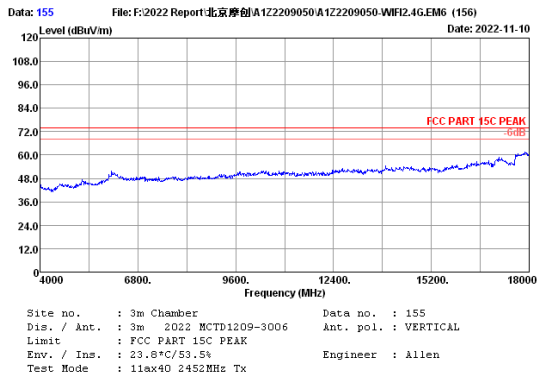

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4904.00	31.60	3.37	31.03	33.69	32.31	54.00	21.69	Average
2	4904.00	31.60	3.37	43.02	33.69	44.30	74.00	29.70	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.  
 2. The emission levels that are 30dB below the official limit are not reported.

## 5. CONDUCTED SPURIOUS EMISSIONS

### 5.1. Test Equipments

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	PXA Signal Analyzer	Agilent	N9030A	MY51380221	Apr.07,22	1 Year
2.	RF Cable	HUBER+SUHNER	SUCOFLEX-106	505238/6	Apr.06,22	1 Year

### 5.2. Limit

In any 100kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30dB instead of 20dB.

### 5.3. Test Procedure

The transmitter output was connected to a spectrum analyzer, The resolution bandwidth is set to 100 kHz, The video bandwidth is set to 300 kHz and measure all the emissions with peak detector.

### 5.4. Test result





**PASS** (The testing data was attached in the next pages.)

EUT: Display Head Unit		
M/N: DHU 1.0		
Test date: 2022-10-18~31	Pressure: 102.1 ±1.0 kpa	Humidity: 53.2 ±3.0%
Tested by: Xinyao	Test site: RF site	Temperature: 22.3 ±0.1 °C




ANT1

Test Mode: IEEE 802.11b






Test CH1: 2412MHz

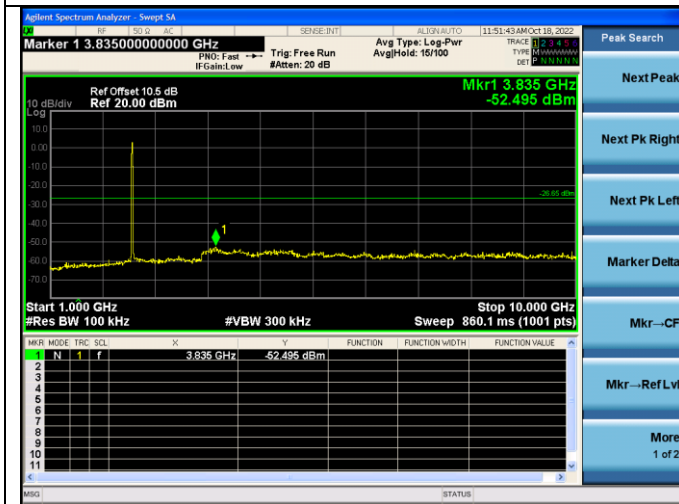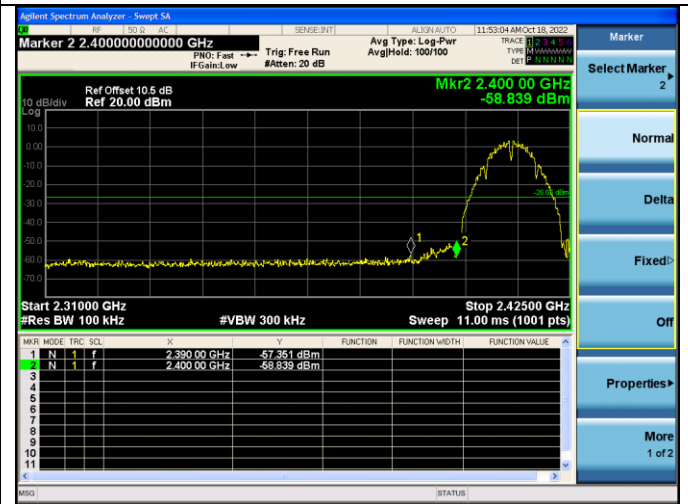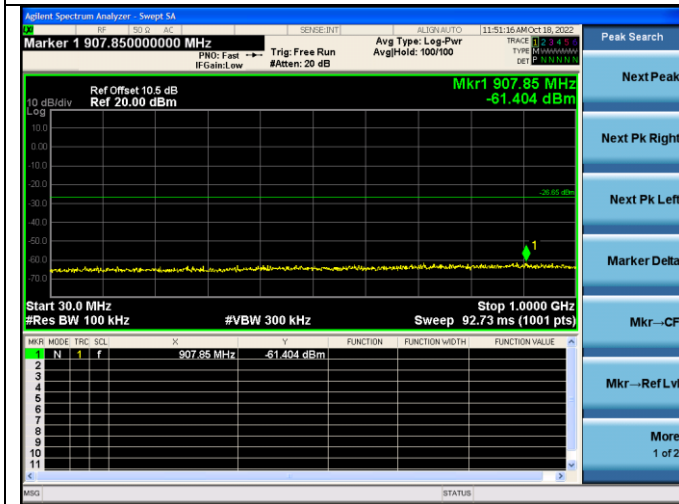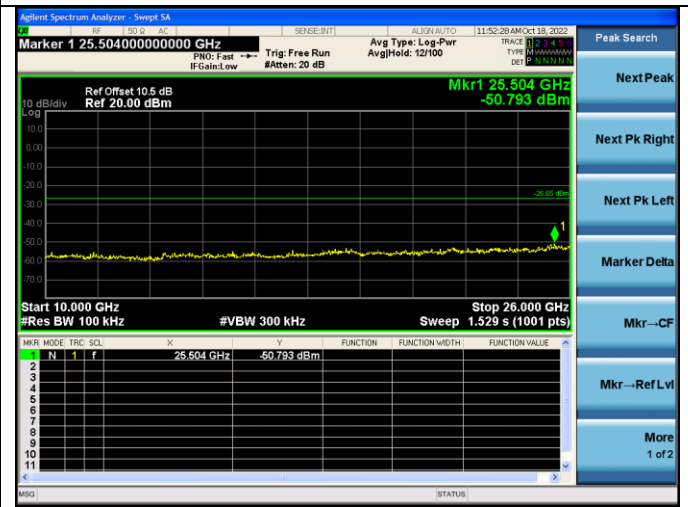







Test CH6: 2437MHz

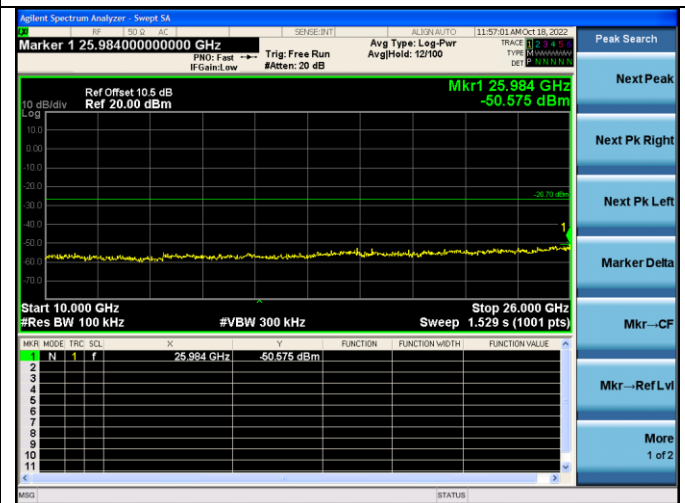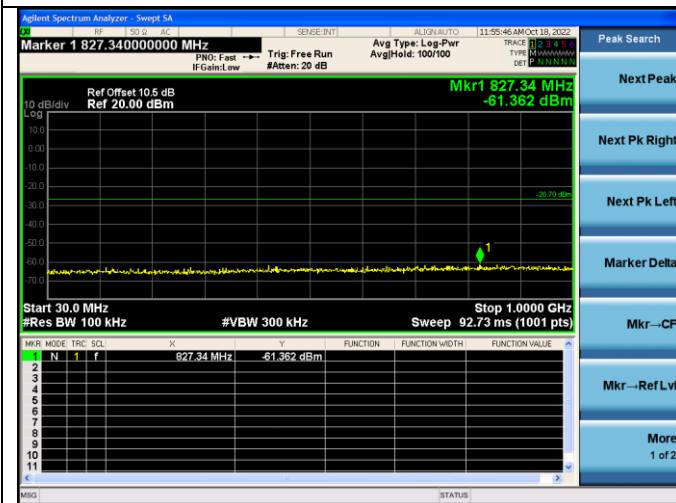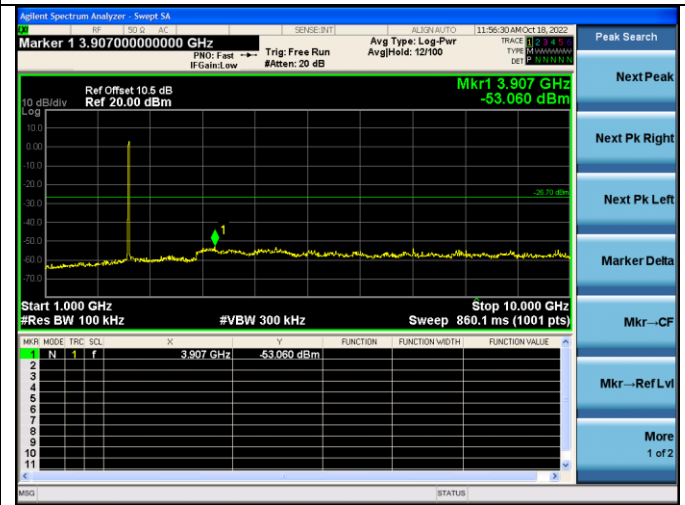

Test CH11: 2462MHz

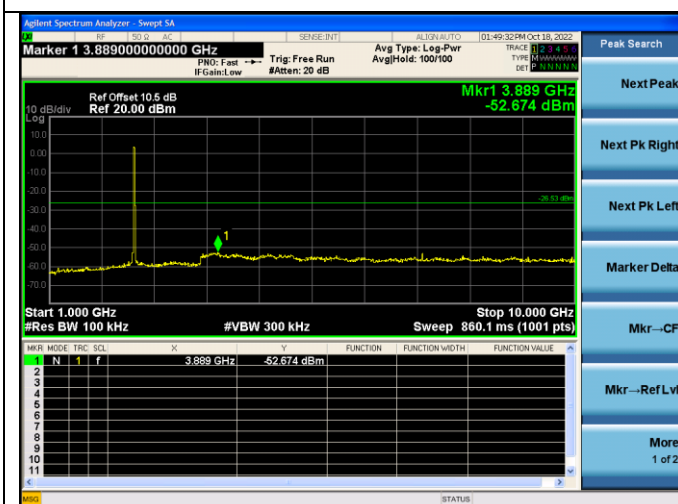
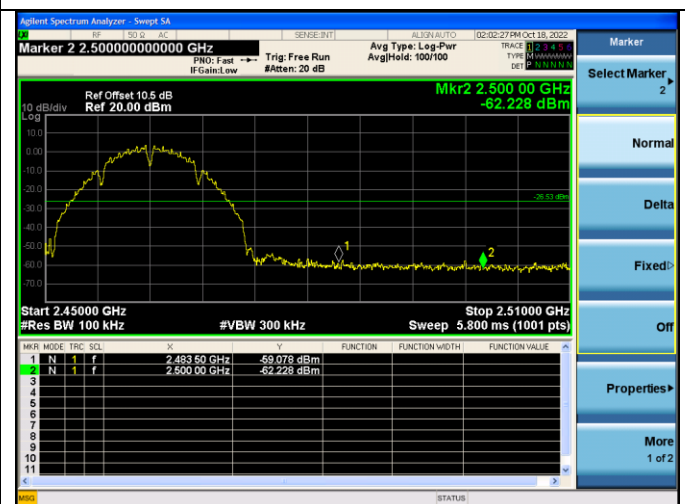
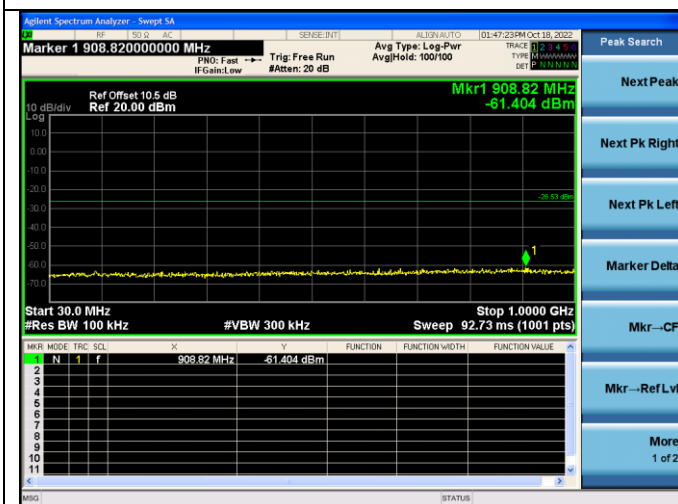
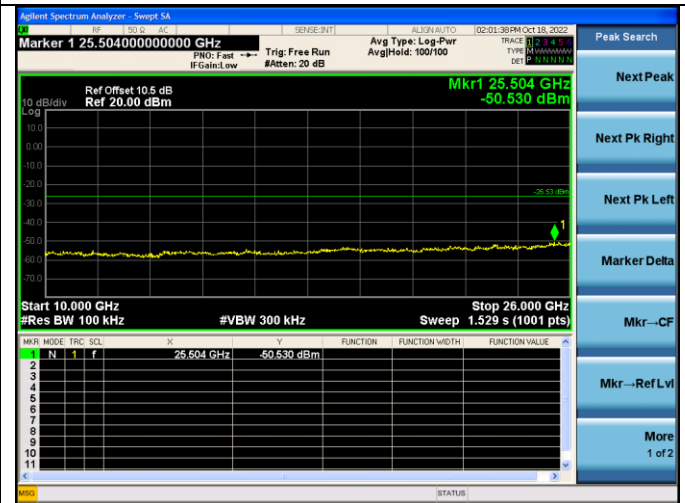


Test Mode: IEEE 802.11g  
Test CH1: 2412MHz

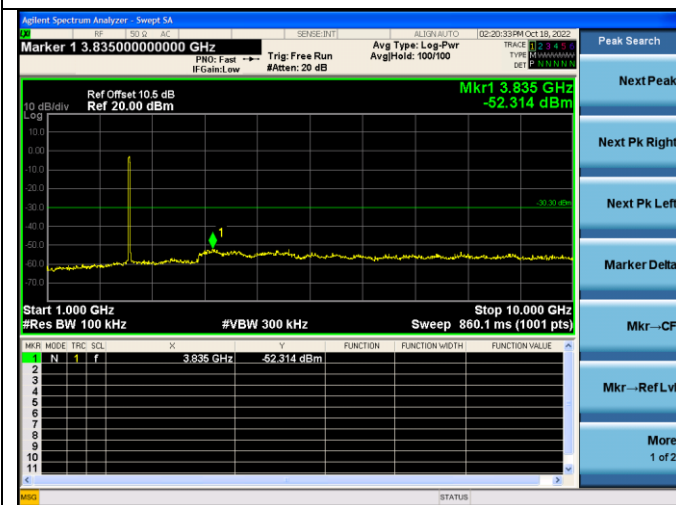
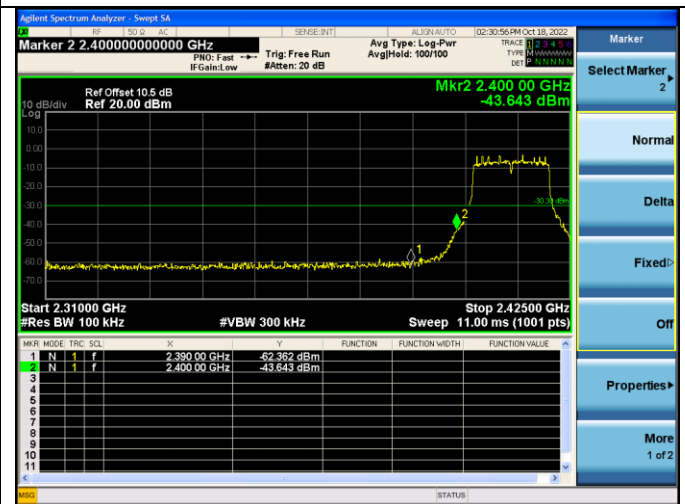
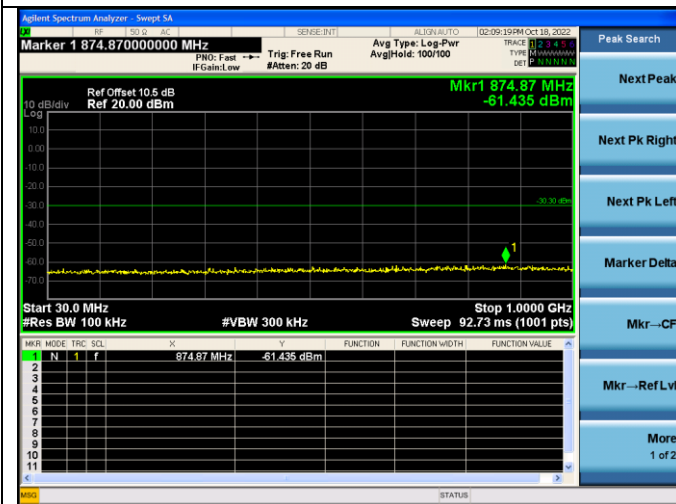
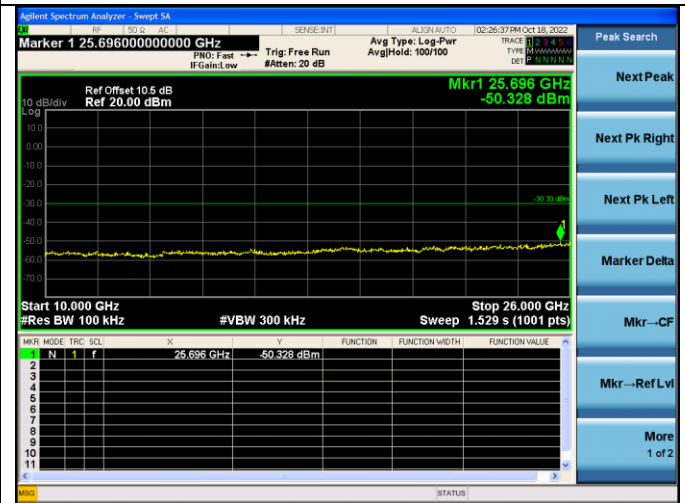
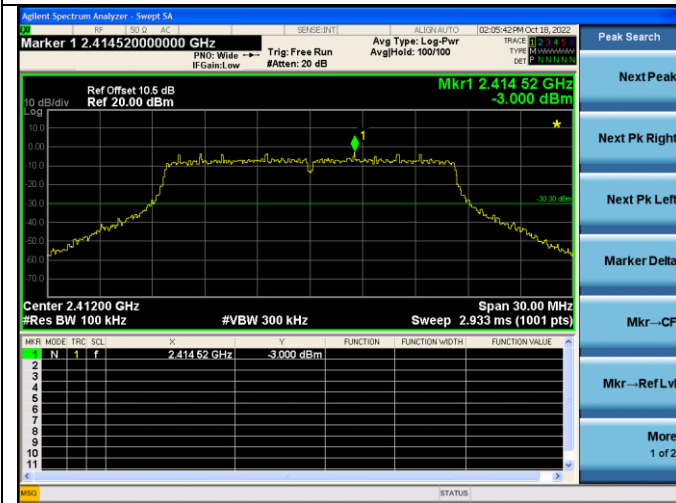




Test CH6: 2437MHz

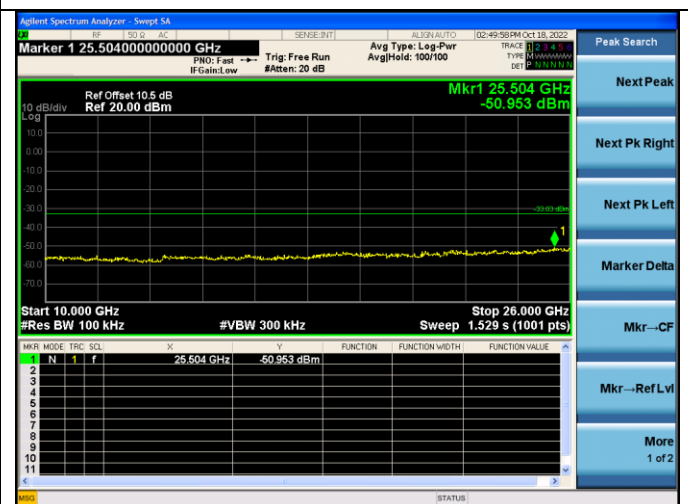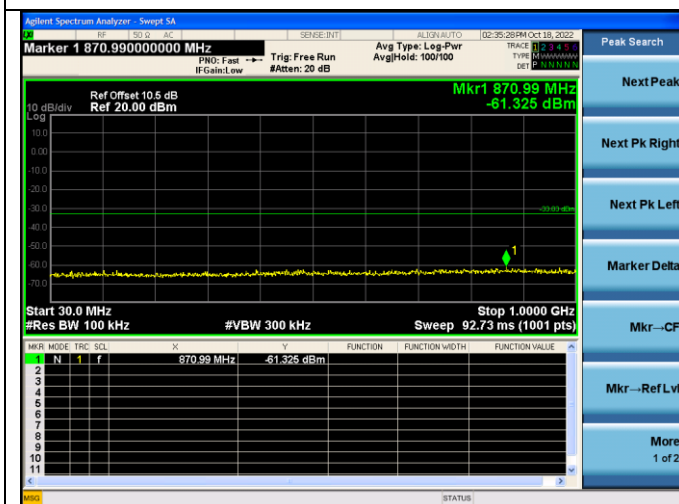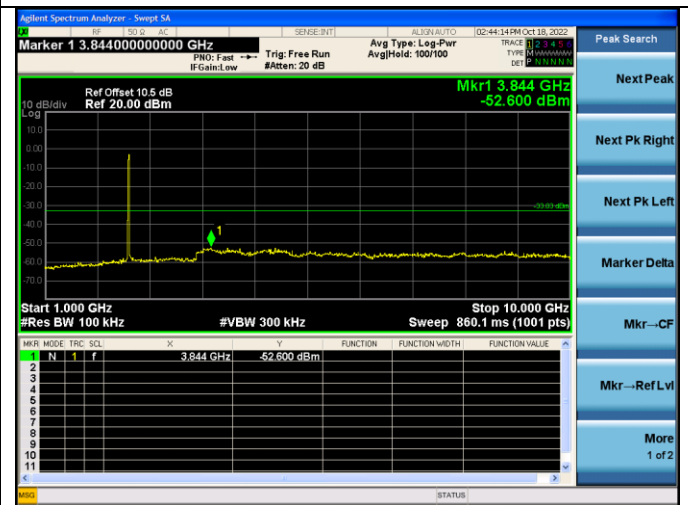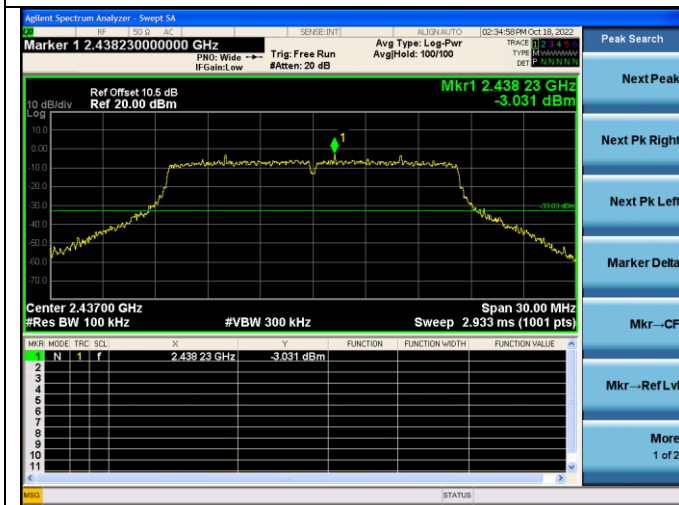

Test CH11: 2462MHz

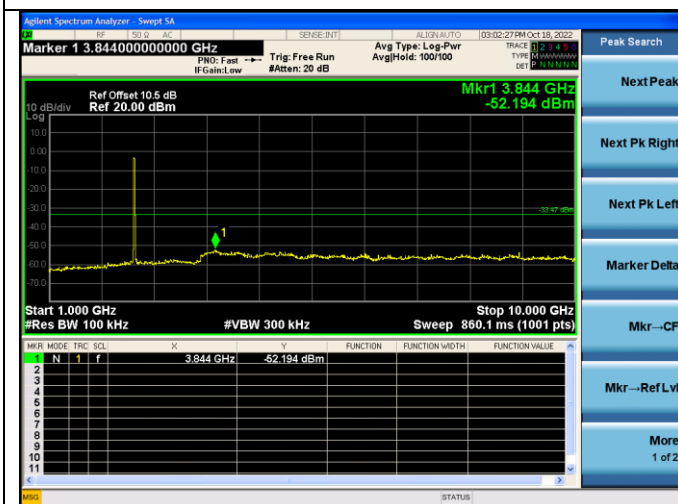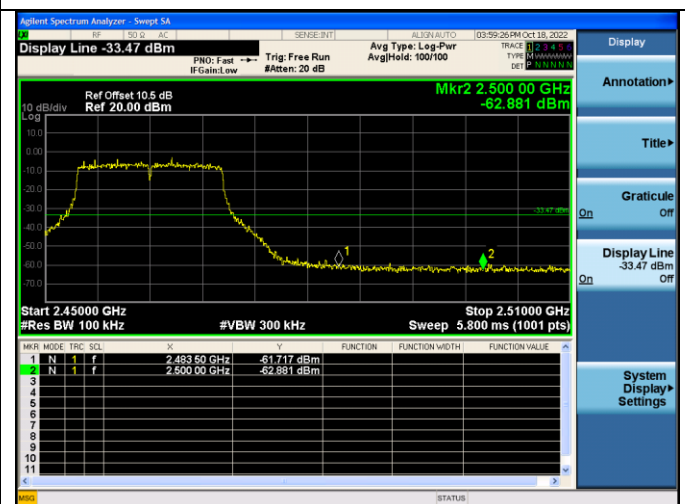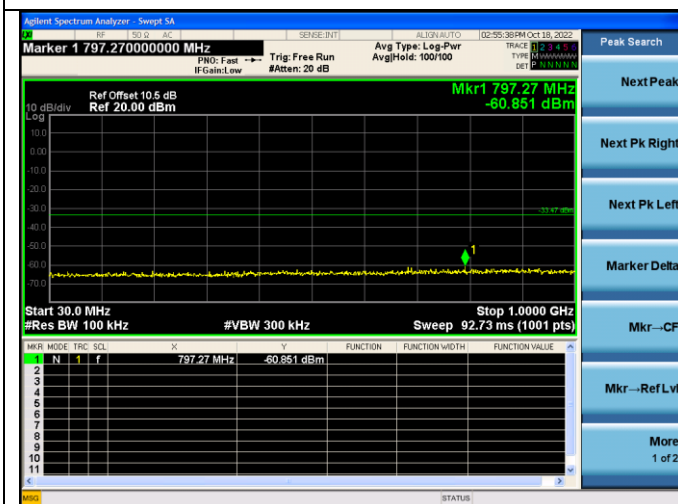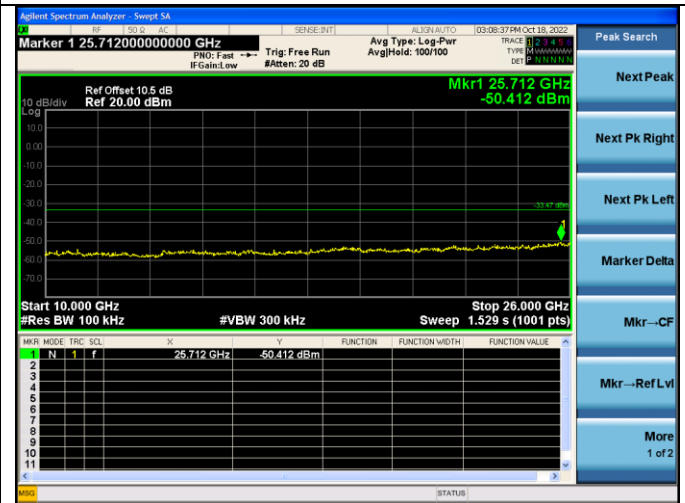

Test Mode: IEEE 802.11n HT20  
 Test CH1: 2412MHz

