

FCC ID: LTQFI2125

EMI - TEST REPORT

- FCC Part 15.209 -



Test Report No. :	T31654-26-00HU	03. August 2011 Date of issue
--------------------------	-----------------------	----------------------------------

Type / Model Name : FI2-125kHz

Product Description : Vehicle Immobilizer

Applicant : Delphi Deutschland GmbH

Address : Wiehlpuhl 4

D-51766 Engelskirchen

Manufacturer : Delphi Deutschland GmbH

Address : Wiehlpuhl 4

D-51766 Engelskirchen

Licence holder : Delphi Deutschland GmbH

Address : Wiehlpuhl 4

D-51766 Engelskirchen

Test Result according to the standards listed in clause 1 test standards:	POSITIVE
--	-----------------



The test report merely corresponds to the test sample.
It is not permitted to copy extracts of these test results without the written permission of the test

FCC ID: LTQFI2125

Contents

1	<u>TEST STANDARDS</u>	<u>3</u>
2	<u>SUMMARY</u>	<u>4</u>
3	<u>EQUIPMENT UNDER TEST</u>	<u>5</u>
3.1	Photo documentation of the EUT	5
3.2	Power supply system utilised	12
3.3	Short description of the Equipment under Test (EUT)	12
4	<u>TEST ENVIRONMENT</u>	<u>13</u>
4.1	Address of the test laboratory	13
4.2	Environmental conditions	13
4.3	Statement of the measurement uncertainty	13
4.4	Measurement Protocol for FCC, VCCI and AUSTEL	14
5	<u>TEST CONDITIONS AND RESULTS</u>	<u>15</u>
5.1	Conducted emissions	15
5.2	Field strength of the fundamental wave	16
5.3	Spurious emissions (magnetic field) 9 kHz – 30 MHz	19
5.4	Emission Bandwidth	22
6	<u>USED TEST EQUIPMENT AND ACCESSORIES</u>	<u>24</u>

1 TEST STANDARDS

The tests were performed according to following standards:

FCC Rules and Regulations Part 15, Subpart A - General (September, 2010)

Part 15, Subpart A, Section 15.31	Measurement standards
Part 15, Subpart A, Section 15.33	Frequency range of radiated measurements
Part 15, Subpart A, Section 15.35	Measurement detector functions and bandwidths

FCC Rules and Regulations Part 15, Subpart C - Intentional Radiators (September, 2010)

Part 15, Subpart C, Section 15.203	Antenna requirement
Part 15, Subpart C, Section 15.204	External radio frequency power amplifiers and antenna modifications
Part 15, Subpart C, Section 15.205	Restricted bands of operation
Part 15, Subpart C, Section 15.209	Radiated emission limits, general requirements

ANSI C63.4: 2003	Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz.
------------------	---

ANSI C95.1:1992	IEEE Standard for Safety Levels with respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz
-----------------	--

CISPR 16-4-2: 2003	Uncertainty in EMC measurement
--------------------	--------------------------------

FCC ID: LTQFI2125

2 SUMMARY

GENERAL REMARKS:

The carrier frequency is 125.0 kHz

FINAL ASSESSMENT:

The equipment under test **fulfills** the EMI requirements cited in clause 1 test standards.

Date of receipt of test sample : acc. to storage records

Testing commenced on : 21. July 2011

Testing concluded on : 25. July 2011

Checked by:

Tested by:

Gegenfurtner Klaus
Dipl.-Ing.(FH)
Manager: Radio Group


Huber Markus

FCC ID: LTQFI2125

3 EQUIPMENT UNDER TEST


3.1 Photo documentation of the EUT

Test Setup:

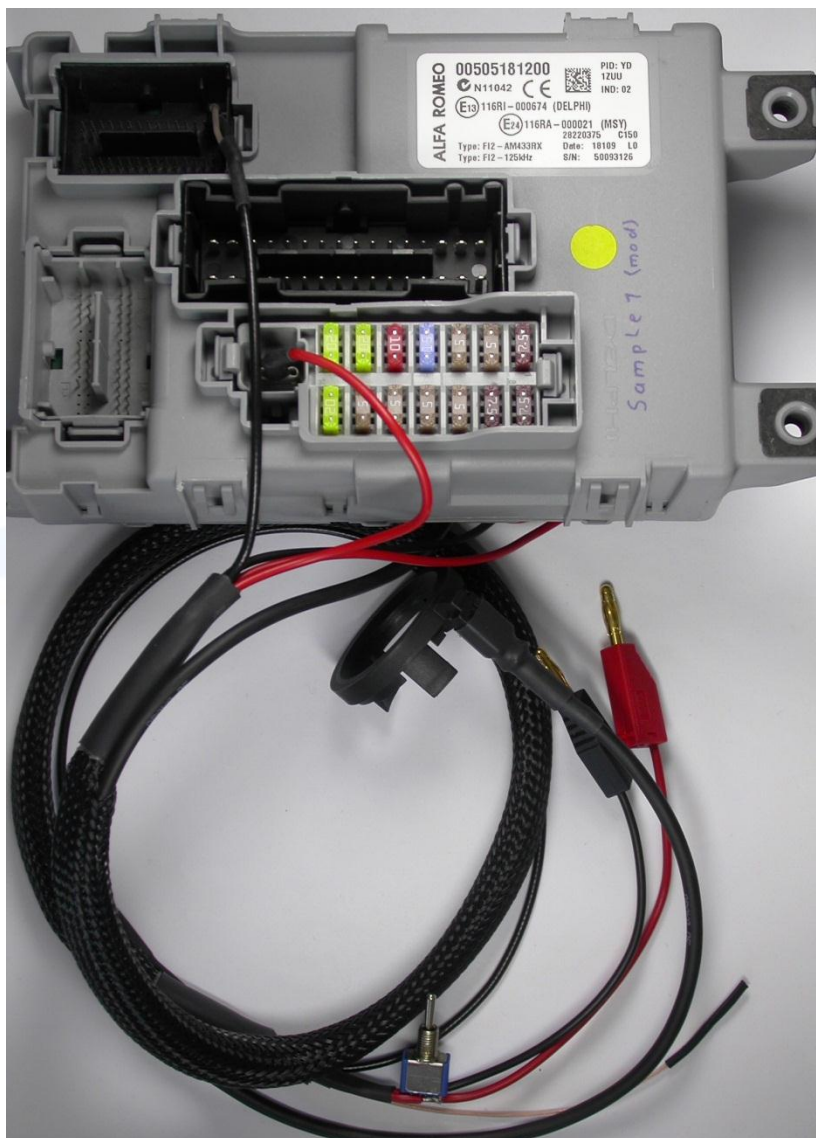

FCC ID: LTQFI2125

Front view



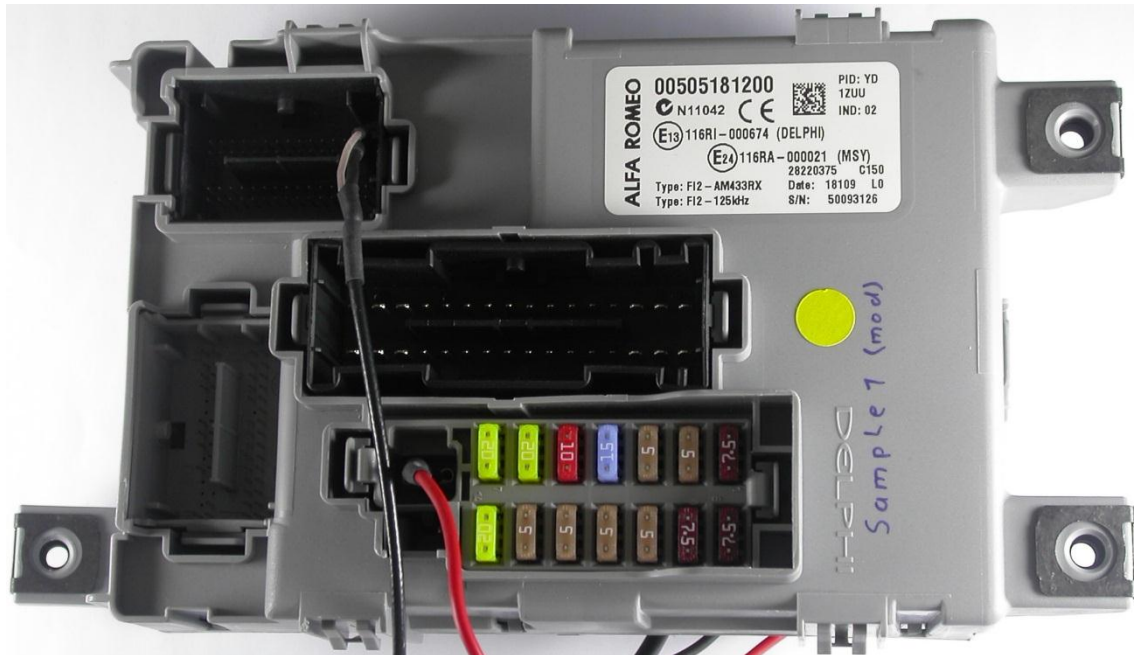


Rear view




FCC ID: LTQFI2125

Side views:

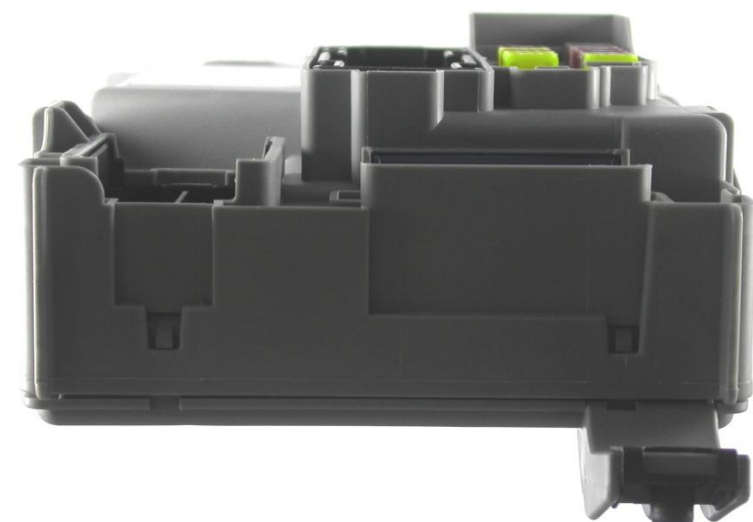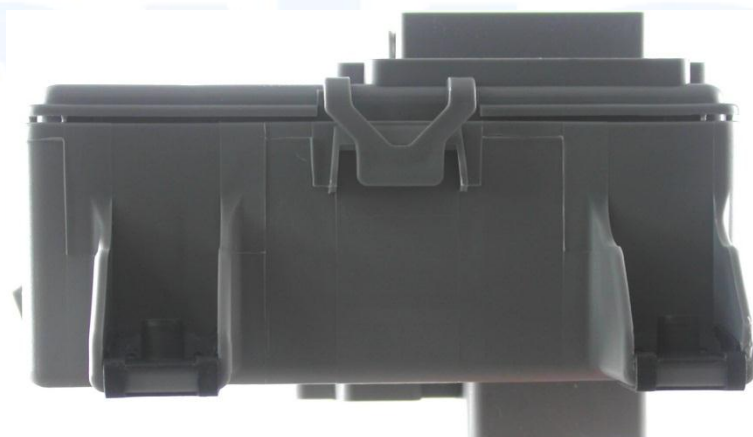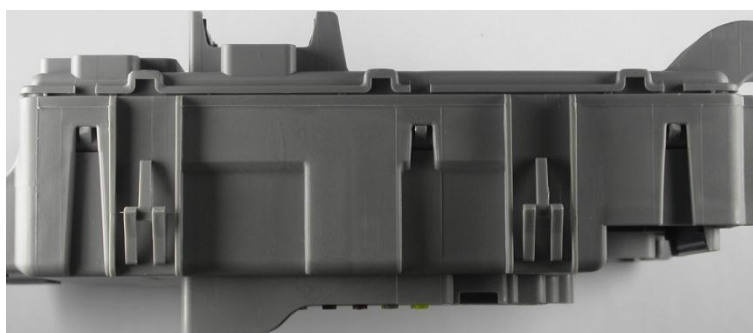


FCC ID: LTQFI2125

Bottom view:


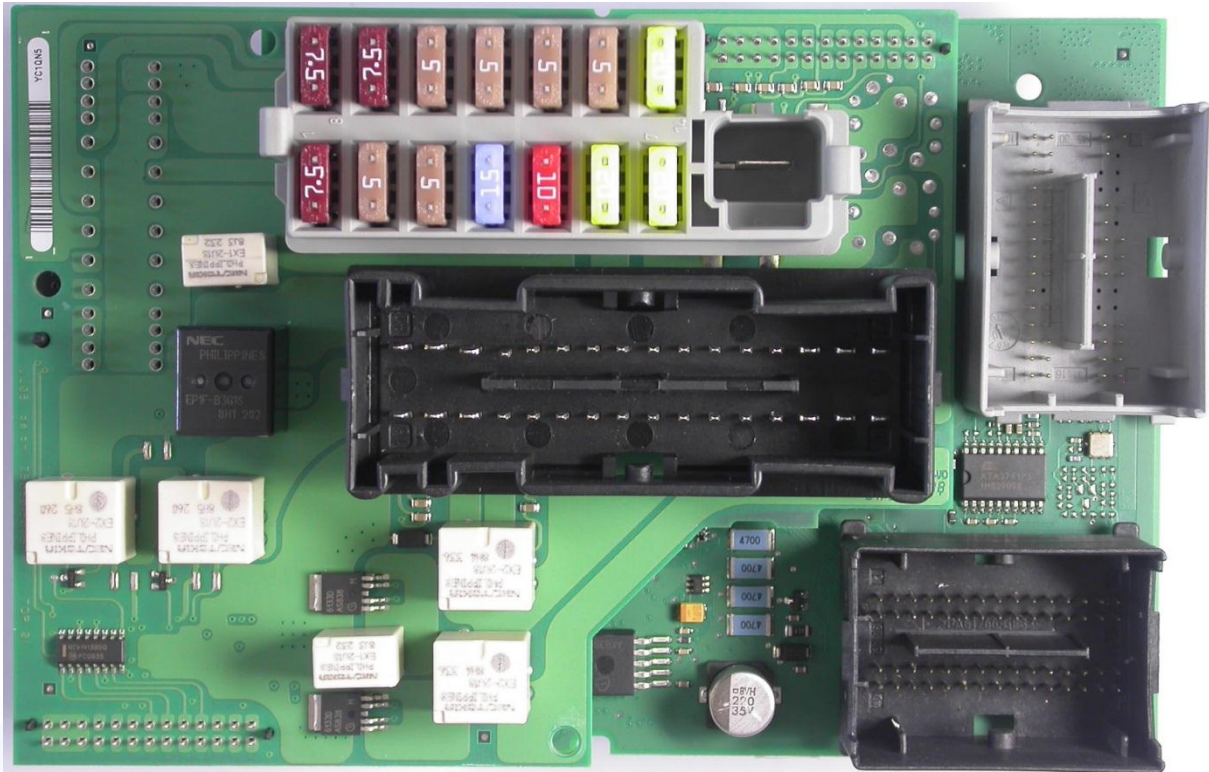


Rear view:

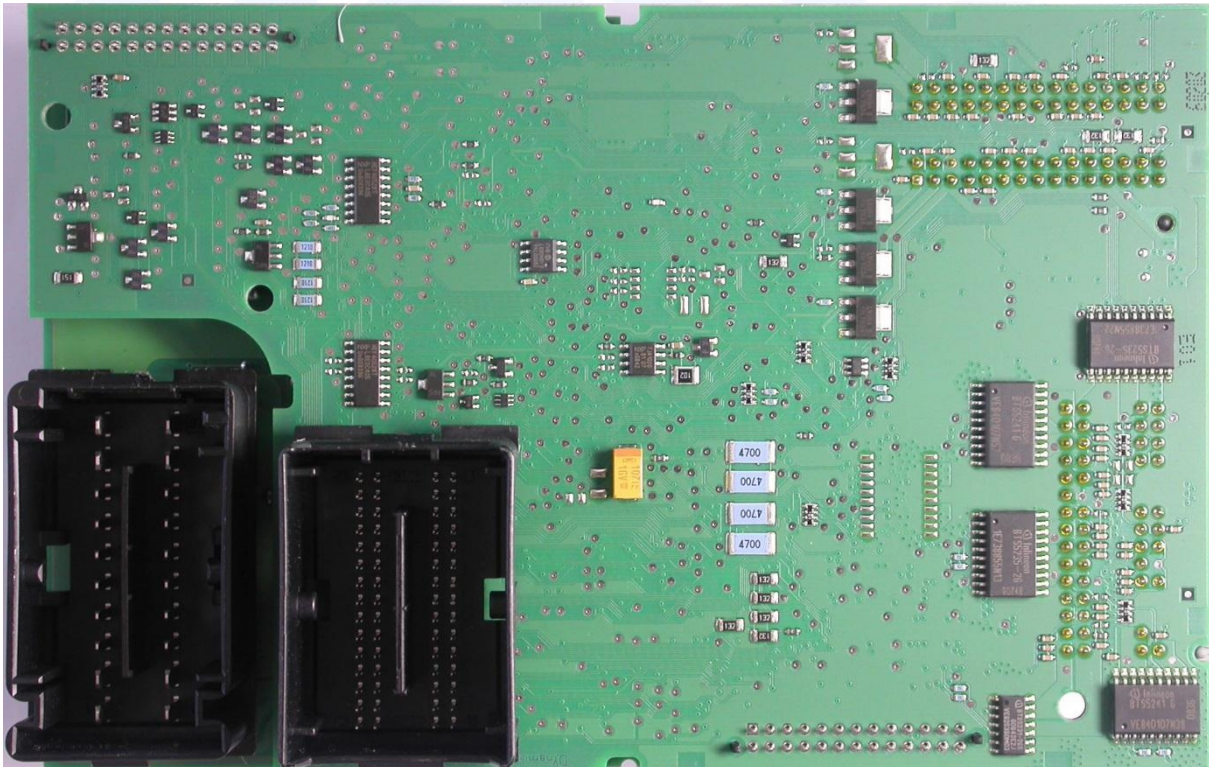

FCC ID: LTQFI2125

Side views:

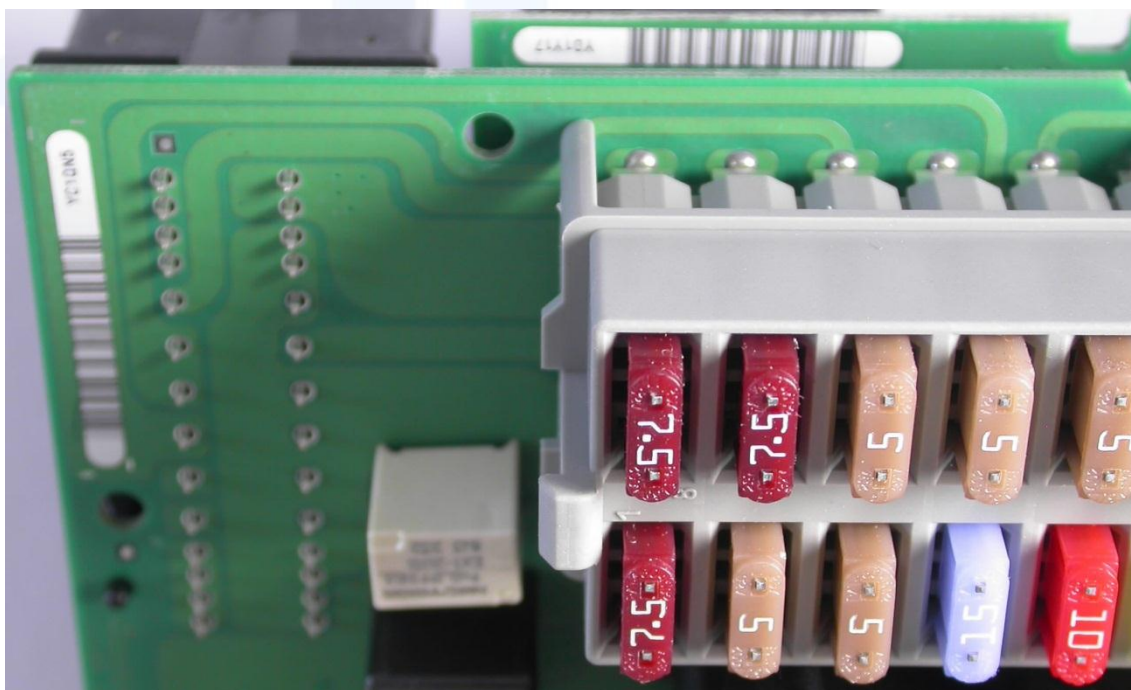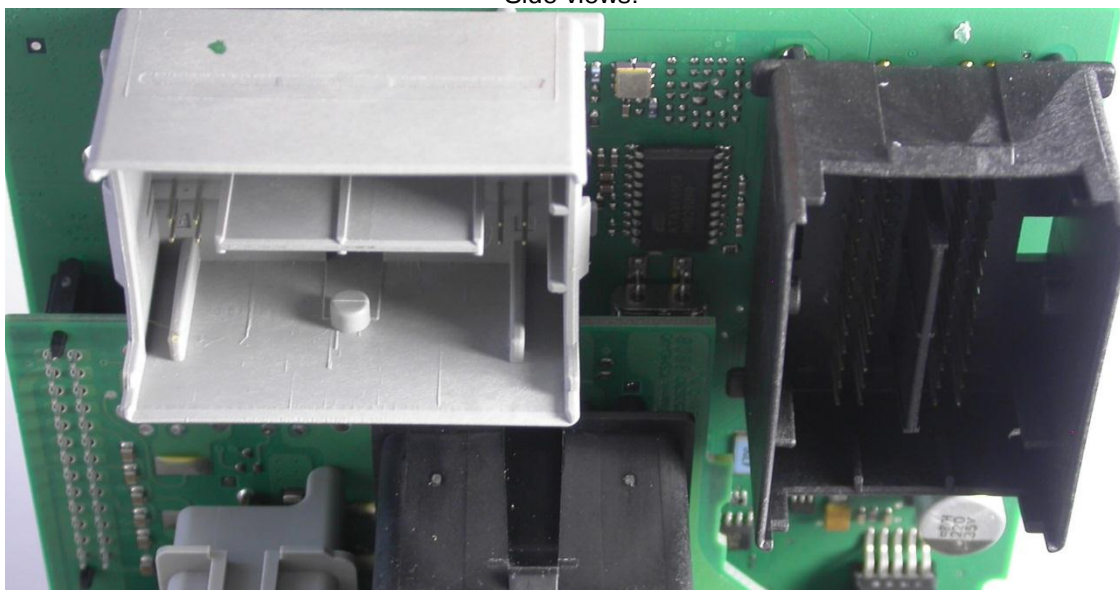


FCC ID: LTQFI2125

Rear View:



Front view:

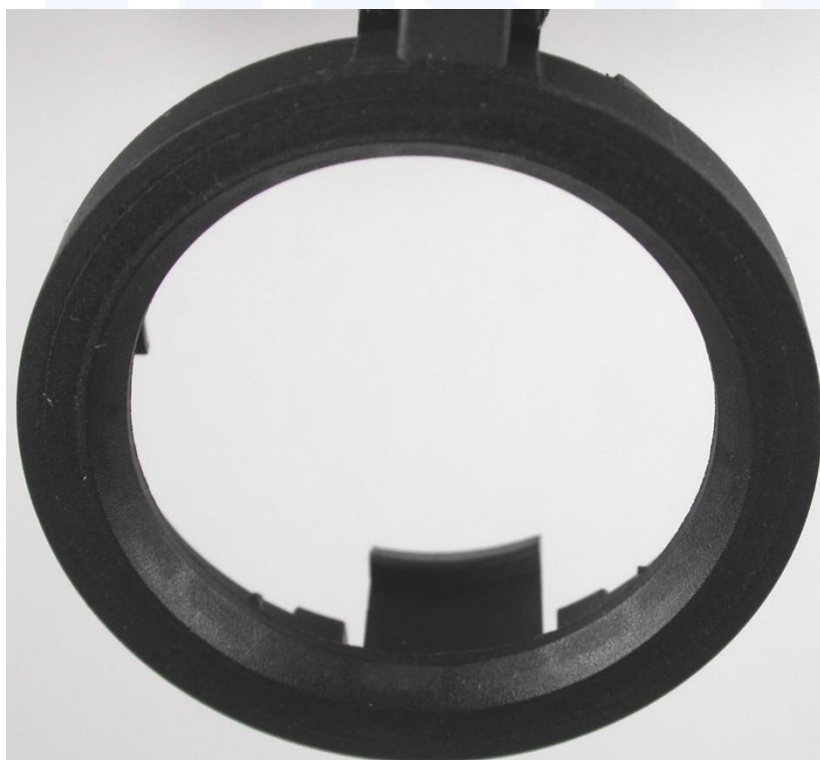


FCC ID: LTQFI2125

Front view open cover:



Side view:

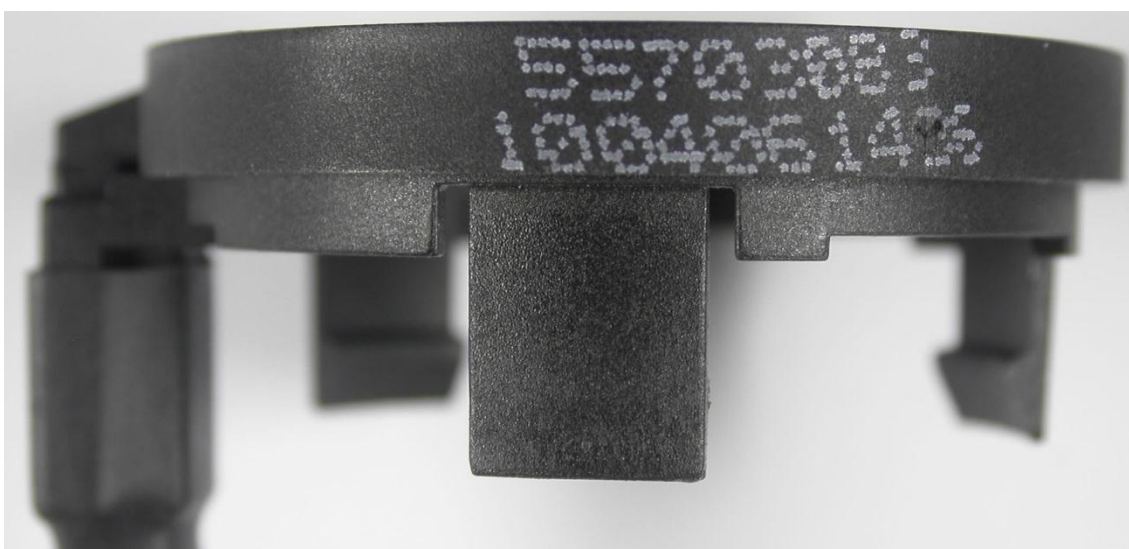

FCC ID: LTQFI2125

3.2 Power supply system utilised

Power supply voltage: : 13.5 V / DC

3.3 Short description of the Equipment under Test (EUT)

The EuT is an immobilizer for vehicular use.

Number of tested samples: 1
Serial number: Pre Series

FI61BC:

Variant:	FIAT Art. No.:	Delphi Art. No.:
L4	51912569	28330968
L3	51912568	28330969
L2	51912567	28330970

FI64BC:

Variant:	FIAT Art. No.:	Delphi Art. No.:
L3	50518123	28218148
L2	50518121	28177152

Project: FI60BC / FI61BC / FI64BC / FI65BC / FI50BCSM2

EUT operation mode:

The equipment under test was operated during the measurement under the following conditions:

- Tx mode at 125 kHz

-

-

EUT configuration:

(The CDF filled by the applicant can be viewed at the test laboratory.)

The following peripheral devices and interface cables were connected during the measurements:

- _____	Model : _____
- _____	Model : _____
- _____	Model : _____

- customer specific cables

- unscreened power cables

4 TEST ENVIRONMENT

4.1 Address of the test laboratory

**mikes-testingpartners gmbh
Ohmstrasse 2-4
94342 STRASSKIRCHEN
GERMANY**

4.2 Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature: 15-35 ° C

Humidity: 30-60 %

Atmospheric pressure: 86-106 kPa

4.3 Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader may notice that tolerances within the calibration of the equipment and facilities may cause additional uncertainty. The measurement uncertainty is calculated for all measurements listed in this test report acc. to CISPR 16-4-2 „Uncertainties, statistics and limit modelling – Uncertainty in EMC measurement“ and documented in the mikes-testingpartners gmbh quality system acc. to DIN EN ISO/IEC 17025. For all measurements shown in this report, the measurement uncertainty of the test laboratory, mikes-testingpartners gmbh, is below the measurement uncertainty as defined by CISPR. Therefore, no special measures must be taken into consideration with regard to the limits according to CISPR. Furthermore, component diversity and modifications in production process of devices may result in additional deviation. If necessary, refer to the test lab for the actual measurement uncertainty for the specific test. The manufacturer has the sole responsibility of continued compliance of the EUT.

4.4 Measurement Protocol for FCC, VCCI and AUSTEL

4.4.1 GENERAL INFORMATION

4.4.1.1 Test Methodology

Conducted and radiated disturbance testing is performed according to the procedures set out by the International Special Committee on Radio Interference (CISPR) Publication 22, European Standard EN 55022 as shown under section 1 of this report.

The test methods used comply with CISPR Publication 22, EN 55022 - "Information technology equipment - Radio disturbance characteristics - Limits and methods of measurement" and with ANSI C63.4 - "Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz."

In compliance with 47 CFR Part 15 Subpart A, Section 15.38 testing for FCC compliance may be achieved by following the procedures set out in ANSI C63.4 and applying the CISPR 22 limits.

4.4.1.2 Justification

The Equipment Under Test (EUT) is configured in a typical user arrangement in accordance with the manufacturer's instructions. A cable is connected to each available port and either terminated with a peripheral using the appropriate impedance characteristic or left unterminated. Where appropriate, cables are manually manipulated with respect to each other thus obtaining maximum disturbances from the unit.

mikes

FCC ID: LTQFI2125

5 TEST CONDITIONS AND RESULTS

5.1 Conducted emissions

For test instruments and accessories used see section 6 Part A 4.

5.1.1 Description of the test location

5.1.2 Photo documentation of the test set-up

5.1.3 Applicable standard

According to FCC Part 15, Section 15.207(a):

Except as shown in paragraphs (b) and (c) of this Section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of Emission (MHz)	Conducted Limit (dBμV)	
	Quasi-peak	Average
0.15-0.5	66 to 56 *	56 to 46 *
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency

5.1.4 Test result

Frequency range:

Min. limit margin

Remarks: The measurement is not applicable. The EuT is battery powered.

FCC ID: LTQFI2125

5.2 Field strength of the fundamental wave

For test instruments and accessories used see section 6 Part CPR 1.

5.2.1 Description of the test location

Test location: OATS1

Test distance: 3 metres

5.2.2 Photo documentation of the test set-up



FCC ID: LTQFI2125

5.2.1 Applicable standard

According to FCC Part 15C, Section 15.209:

The emissions from intentional radiators shall not exceed the effective field strength limits.

5.2.2 Description of Measurement

The spurious emissions of the EUT have to be measured at an open area test site in the frequency range from 9 kHz to 1000 MHz using a tuned EMI receiver. The set up of the equipment under test will be in accordance with ANSI C63.4. The measurement has been performed at 3 m. The results have been compared to the limits defined at 30 m or 300 m distances according to FCC Part 15C, Section 15.31(f)(2) using an inverse linear distance extrapolation factor of 40 dB/decade. The final measurement has been performed with the EMI receiver using Quasi peak detector except for the frequency bands 9 kHz to 90 kHz and 110 to 490 kHz where an average detector will be used, according to Section 15.209(d).

The resolution bandwidth during the measurement is as follows:

9 kHz – 150 kHz: RBW: 200 Hz

150 kHz – 30 MHz: RBW: 9 kHz

Example:

$$\begin{array}{rclclclclclclcl}
 \text{Frequency} & & \text{Level} & + & \text{Factor} & = & \text{Level} & - & \text{Limit} & = & \text{Delta} \\
 (\text{MHz}) & & (\text{dB}\mu\text{V}) & & (\text{dB}) & & (\text{dB}\mu\text{V/m}) & & (\text{dB}\mu\text{V/m}) & & (\text{dB}) \\
 1.705 & & 5 & + & 20 & = & 25 & - & 30 & = & -5
 \end{array}$$

5.2.3 Test result

Measurement distance: 3 m

Frequency (MHz)	Level PK (dBμV)	Level AV (dBμV)	Level QP (dBμV)	Band- width (kHz)	Correct. factor (dB)	Corrected Level PK dB(μV/m)	Corrected Level AV dB(μV/m)	Corrected Level QP dB(μV/m)	Limit AV dB(μV/m)	Delta (dB)
0.125	54.7	49.2	52.6	0.2	20	74.7	69.2	72.6	105.0	-35.8

Calculated value at distance: 300 m

Frequency (MHz)	Level PK (dBμV)	Level AV (dBμV)	Level QP (dBμV)	Band- width (kHz)	Correct. factor (dB)	Corrected Level PK dB(μV/m)	Corrected Level AV dB(μV/m)	Corrected Level QP dB(μV/m)	Limit AV dB(μV/m)	Delta (dB)
0.125	-25.3	-30.8	-27.4	0.2	20	-5.3	-10.8	-7.4	25.0	-35.8

Limit according to FCC Part 15C, Section 15.209(a):

Frequency (MHz)	Field strength of fundamental wave (μV/m) dB(μV/m)		Measurement distance (metres)
0.009-0.490	2400/F(kHz)	--	300
0.490-1.705	24000/F (kHz)	--	30
1.705-30.0	30	29.5	30

FCC ID: LTQFI2125

The requirements are **FULFILLED**.

Remarks:

mikes

FCC ID: LTQFI2125

5.3 Spurious emissions (magnetic field) 9 kHz – 30 MHz

For test instruments and accessories used see section 6 Part SER 1.

5.3.1 Description of the test location

Test location: OATS1

Test distance: 3 metres

5.3.2 Photo documentation of the test set-up



FCC ID: LTQFI2125

5.3.3 Applicable standard

According to FCC Part 15C, Section 15.209:

The emissions from intentional radiators shall not exceed the effective field strength limits.

5.3.4 Description of Measurement

The spurious emissions of the EUT have to be measured at an open area test site in the frequency range from 9 kHz to 1000 MHz using a tuned EMI receiver. The set up of the equipment under test will be in accordance with ANSI C63.4. The measurement has been performed at 3 m. The results have been compared to the limits defined at 30 m or 300 m distances according to FCC Part 15C, Section 15.31(f)(2) using an inverse linear distance extrapolation factor of 40 dB/decade. The final measurement has been performed with the EMI receiver using Quasi peak detector except for the frequency bands 9 kHz to 90 kHz and 110 to 490 kHz where an average detector will be used, according to Section 15.209(d).

The resolution bandwidth during the measurement is as follows:

9 kHz – 150 kHz: RBW: 200 Hz

150 kHz – 30 MHz: RBW: 9 kHz

Example:

Frequency (MHz)	Level (dBμV)	+	Factor (dB)	=	Level dB(μV/m)	-	Limit dB(μV/m)	=	Delta (dB)
1.705	5	+	20	=	25	-	30	=	-5

5.3.5 Test result

Measurement distance: 3 m

Frequency (MHz)	Level PK (dBμV)	Level AV (dBμV)	Level QP (dBμV)	Band- width (kHz)	Correct. factor (dB)	Corrected Level PK dB(μV/m)	Corrected Level AV dB(μV/m)	Corrected Level QP dB(μV/m)	Limit AV dB(μV/m)	Delta (dB)
0.375	30.6	4.7	20.4	9	20	50.6	24.7	40.4	95.5	-70.8

Calculated value at distance: 300m

Frequency (MHz)	Level PK (dBμV)	Level AV (dBμV)	Level QP (dBμV)	Band- width (kHz)	Correct. factor (dB)	Corrected Level PK dB(μV/m)	Corrected Level AV dB(μV/m)	Corrected Level QP dB(μV/m)	Limit AV dB(μV/m)	Delta (dB)
0.375	-49.4	-75.3	-59.6	9	20	-29.4	-55.3	-39.6	15.5	-70.8

Values at distance: 30m

Frequency (MHz)	Level PK (dBμV)	Level AV (dBμV)	Level QP (dBμV)	Band- width (kHz)	Correct. factor (dB)	Corrected Level PK dB(μV/m)	Corrected Level AV dB(μV/m)	Corrected Level QP dB(μV/m)	Limit dB(μV/m)	Delta (dB)
0.49 – 30.0				9	20				29.5	> 40

FCC ID: LTQFI2125

Limit according to FCC Part 15 Subpart 15.209(a):

Frequency (MHz)	Field strength of spurious emissions		Measurement distance
	($\mu\text{V/m}$)	dB($\mu\text{V/m}$)	(metres)
0.009-0.490	2400/F(kHz)	--	300
0.490-1.705	24000/F (kHz)	--	30
1.705-30.0	30	29.5	30

The requirements are **FULFILLED**.

Remarks: All other unwanted emissions in the frequency range from 9 kHz to 30 MHz were
below $< -10.5 \text{ dB}\mu\text{V/m}$.

FCC ID: LTQFI2125


5.4 Emission Bandwidth

For test instruments and accessories used see section 6 Part MB.

5.4.1 Description of the test location

Test location: AREA4

5.4.2 Photo documentation of the test set-up

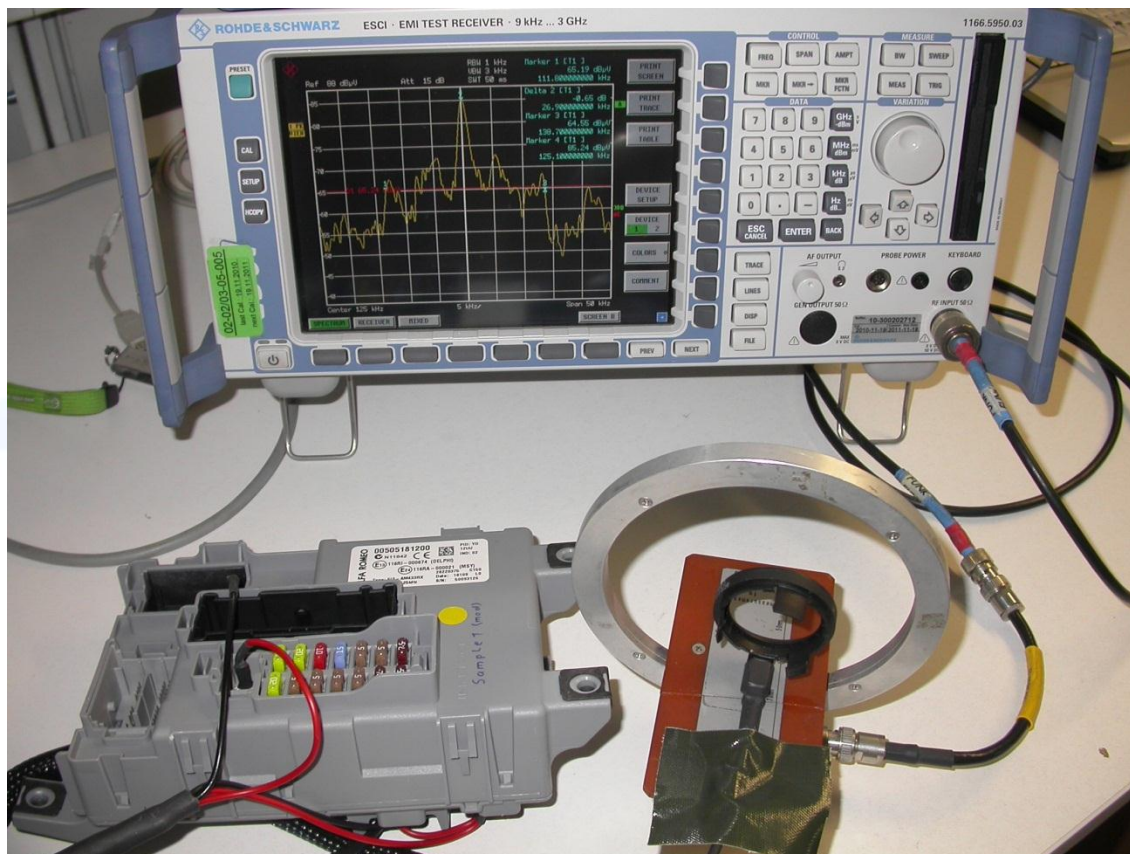


Fundamental [kHz] See Plot 1	20dB Bandwidth F1	20dB Bandwidth F2	Measured Bandwidth [kHz]
125.00	111.80	138.70	26.90

FCC ID: LTQFI2125

5.4.3 Test protocol

Emission Bandwidth plots

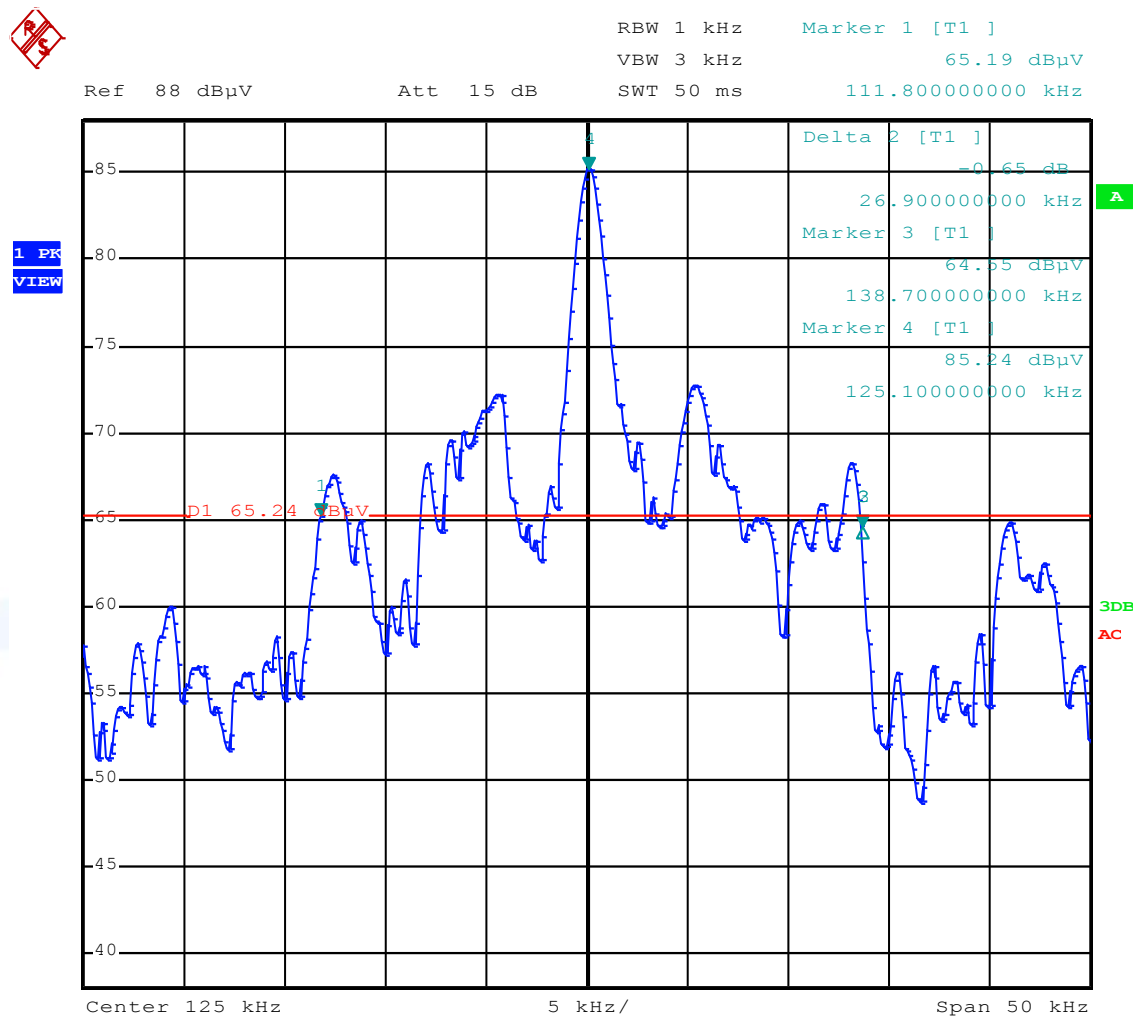

FCC ID: LTQFI2125

6 USED TEST EQUIPMENT AND ACCESSORIES

All test instruments used are calibrated and verified regularly. The calibration history is available on request.

Test ID	Model Type	Equipment No.	Next Calib.	Last Calib.	Next Verif.	Last Verif.
CPR 1	FMZB 1516	01-02/24-01-018			16/02/2012	16/02/2011
	ESCI	02-02/03-05-005	19/11/2011	19/11/2010		
	S10162-B	02-02/50-05-031				
	KK-EF393-21N-16	02-02/50-05-033				
	NW-2000-NB	02-02/50-05-113				
MB	ESCI	02-02/03-05-005	19/11/2011	19/11/2010		
	HZ-10	02-02/24-05-012				
SER 1	FMZB 1516	01-02/24-01-018			16/02/2012	16/02/2011
	ESCI	02-02/03-05-005	19/11/2011	19/11/2010		
	S10162-B	02-02/50-05-031				
	KK-EF393-21N-16	02-02/50-05-033				
	NW-2000-NB	02-02/50-05-113				

mikes