




ITEM	PART NO.	DESCRIPTION	QTY
1	00088829	RIBN 2.36 (59.9MM)	1
2	16236840	LABEL-BLANK	1

DESIGNATED CHARACTERISTICS				OCI	KPC
0	LAST NO USED	K OR Q IN SYMBOL INDICATES CHECKPOINT	FIT/FUNCTION	C1	FF
0	0	TOTAL ON DRAWING			
KPC	OCI	SAFETY/COMPLIANCE		SC	
NO	NO	TYPE	DESCRIPTION	RATIONALE	ZONE SH PTS

DWG STATUS					REVISION HISTORY			AUTH	DR	APVD
DATE	STG	REV	N/P	CHK	ZONE			1080647495	LIU	1
02FE19		A								

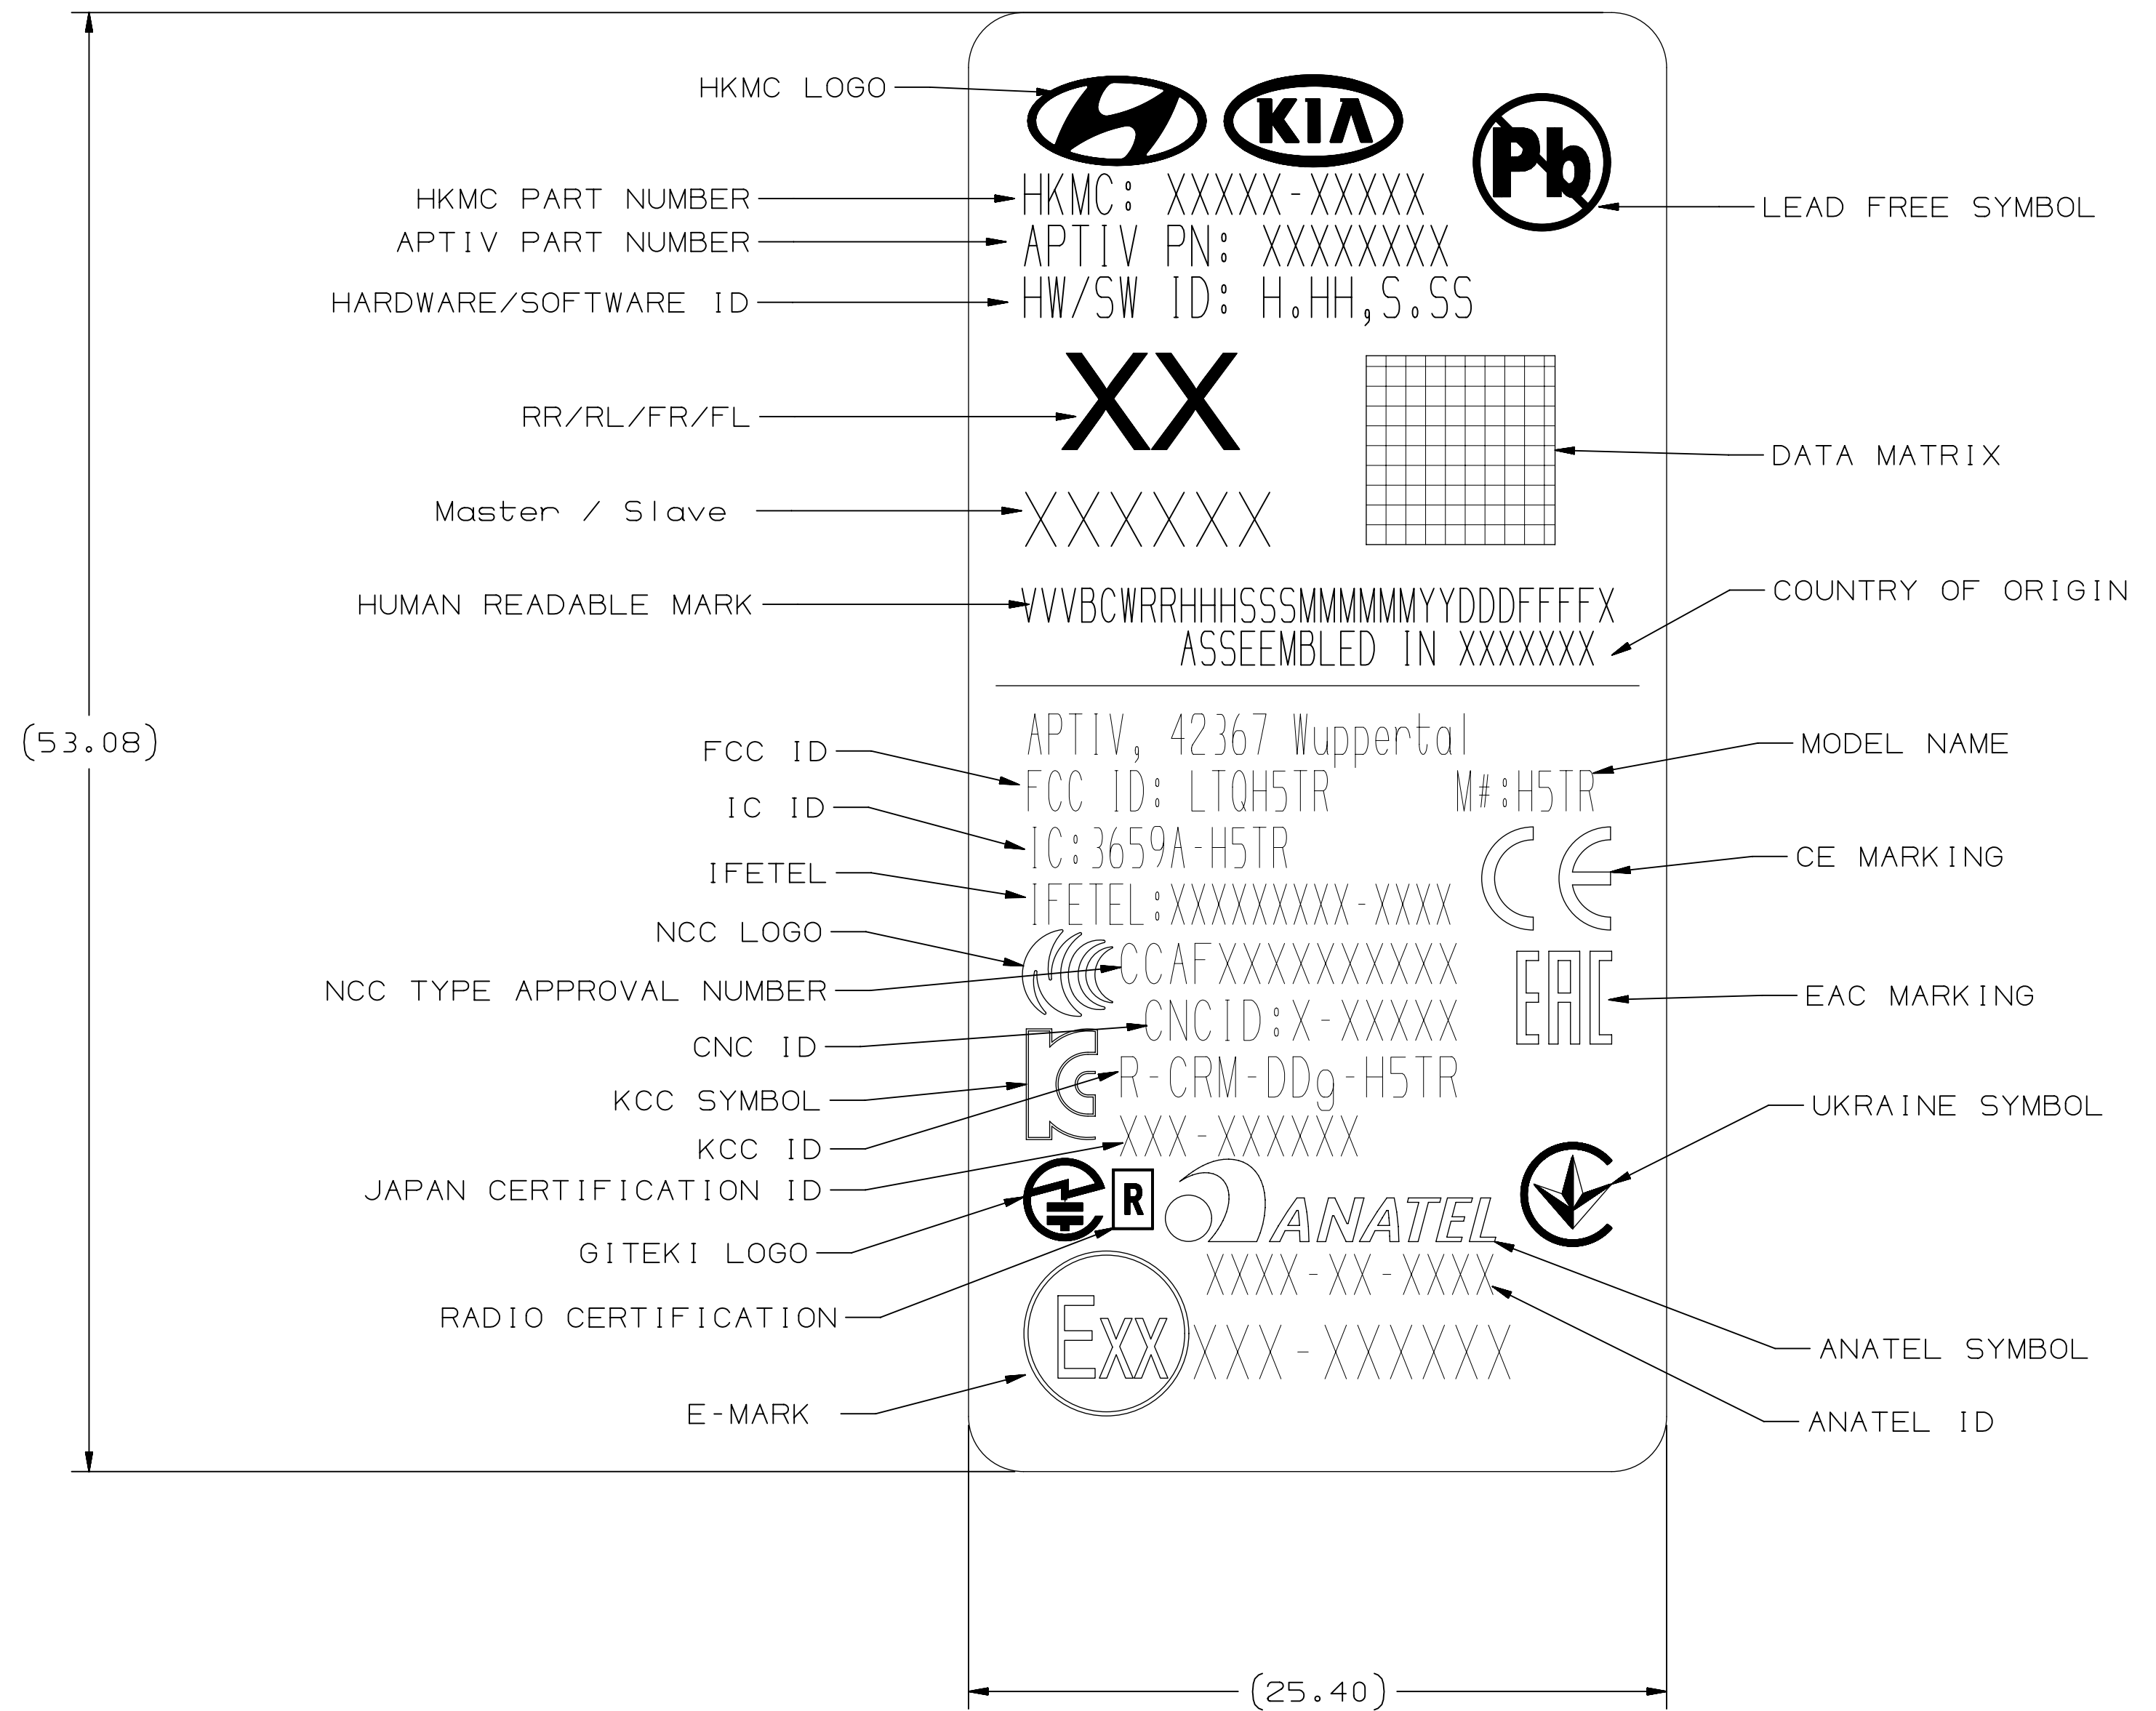

LOGOS FOR PRINTING DOWNLOAD  
SCALE 10:1

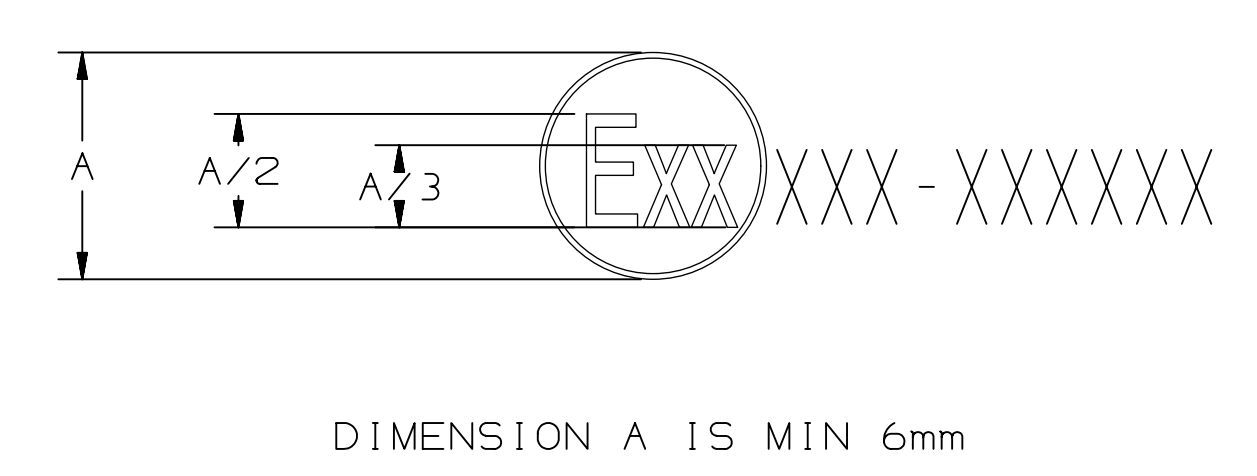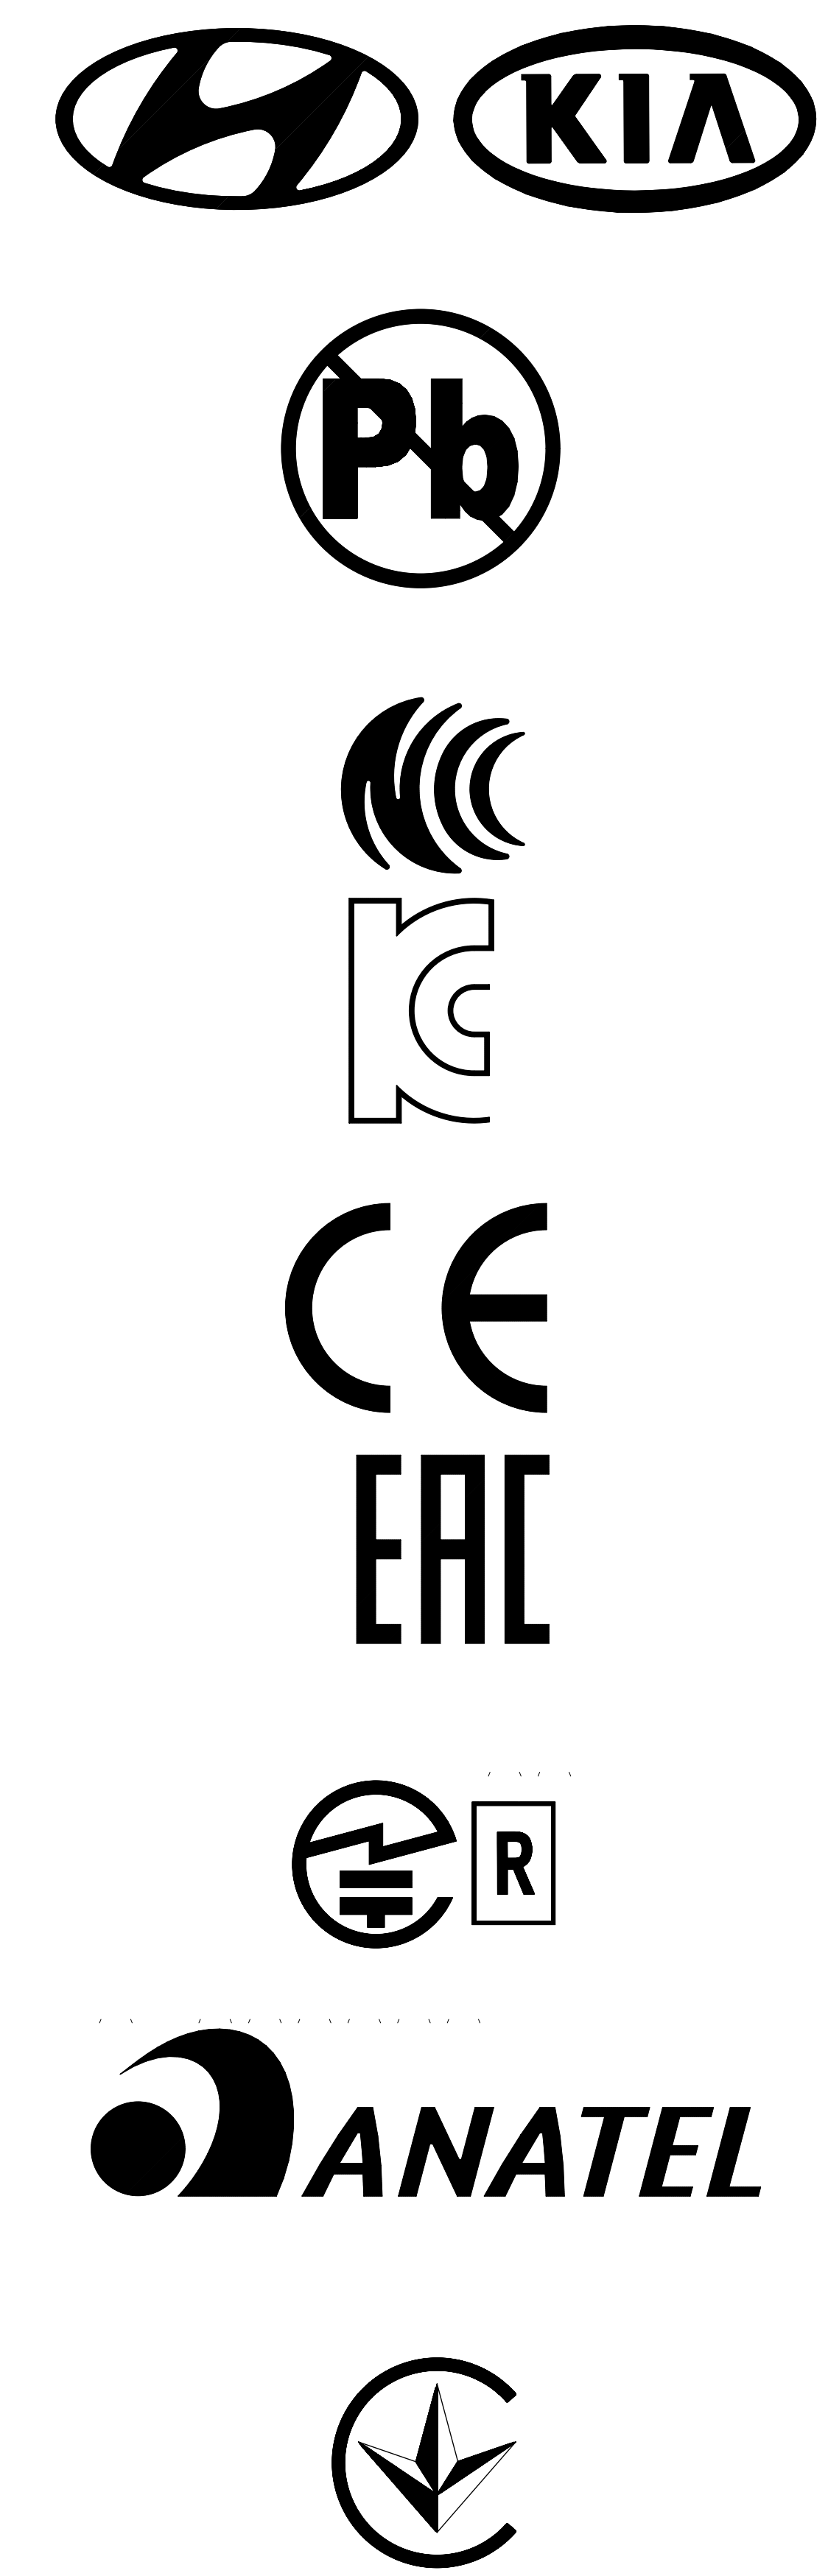

- PURPOSE  
LABEL SHALL BE USED FOR IDENTIFICATION OF COMPONENT PART NUMBER (HKMC AND DELPHI), DATE
- PRINTING
  - DATAMATRIX 2D SYMBOL
    - 2D BLACK SYMBOL ON WHITE LABEL SHALL BE USED
    - LABEL PRINTER OF 600 DPI (9 DOTS) SHALL BE USED
    - AIM USS DATAMATRIX SYMBOLOGY WITH ECC200 ERROR CORRECTION SHALL BE USED
    - MINIMUM ELEMENT WIDTH SHALL BE 0.015 INCHES
    - CONTENT SHALL BE 33 ALPHANUMERIC CHARACTERS AS FOLLOWS:  
VVBCWRRH.HH.S.SMMMMMYDDDDFFFX  
VVV: PLATFORM  
BCW: 'BCW' AS SYSTEM ID  
RR: RR OR RL  
H.HH: HARDWARE VERSION  
S.SS: SOFTWARE VERSION  
MMMM: LAST 6 DIGIT OF DELPHI END MODEL NUMBER  
YY: LAST 2 DIGIT OF PRODUCTION YEAR  
DD: PRODUCTION DAY  
FFF: SEQUENCE NUMBER  
X: MANUFACTURING SITE CODE
  - SYMBOL LOCATION SHALL BE APPROXIMATELY AS SHOWN
  - QUIET ZONE AROUND SYMBOL SHALL BE 4 ELEMENTS MINIMUM, EACH EDGE
  - HUMAN READABLE MARK
    - MARK SHALL HAVE 28 ALPHANUMERIC CHARACTERS AS DEFINED ABOVE IN 2.1.5
    - HUMAN READABLE MARK SHALL BE LOCATED BELOW DATAMATRIX SYMBOL
    - MARK SIZE 1.2mm RECOMMENDED
  - HKMC PART NUMBER
    - FORMAT SHALL BE XXXXX-XXXX
    - MIN CHARACTER HEIGHT: 1.5mm
    - LOCATE APPROXIMATELY AS SHOWN
  - APTIV PART NUMBER
    - FORMAT SHALL BE XXXXXXXX
    - MIN CHARACTER HEIGHT: 1.5mm
    - LOCATE APPROXIMATELY AS SHOWN
  - SOFTWARE ID
    - MIN CHARACTER HEIGHT: 1.5mm
    - LOCATE APPROXIMATELY AS SHOWN
  - COUNTRY WHERE ASSEMBLED
    - INDICATE COUNTRY WHERE ASSEMBLED, LOCATE APPROXIMATELY AS SHOWN
    - MARK SIZE 1.5mm RECOMMENDED
  - LR OR RH
    - MINIMUM MARK HEIGHT: 3MM
    - LOCATE APPROXIMATELY AS SHOWN
  - LAYOUT OF PRINTED INFORMATION TO ALLOW FOR 2mm EDGE CLEARANCE AT ALL EDGES FOR ACCOMMODATION OF LABEL STOCK SHIFT/REGISTRATION DURING PRINTING

PRODUCT IDENTIFICATION LABEL INFORMATION	
VARIABLE	VALUE
HKMC PART NUMBER	
APTIV PART NUMBER	
HW/SW ID	SEE PARENT END MODEL DRAWING
RR/RL	
Master/Slave	
COUNTRY OF ORIGIN	
MODEL NAME	M# H5TR
FCC ID	LTOH5TR
IC ID	3659A-H5TR
IFETEL	XXXXXXXX-XXXX
NCC TYPE APPROVAL NUMBER	CCAFXXXXXXXXXX
CNC ID	X-XXXX
KCC ID	R-CRM-DDg-H5TR
JAPAN CERTIFICATION ID	XXX-XXXXXX
ANATEL ID	XXXX-XX-XXXX
E-MARK	XX XXX-XXXXXX

ADVANCED PRINT FOR REFERENCE ONLY  
2018/05/31

UNLESS OTHERWISE SPECIFIED	
THIS DOCUMENT IS IN ACCORDANCE WITH ASME Y14.5M-1994. SEE DELPHI ENGINEERING DESIGN STANDARD 06 FOR ISO 1101:2014 RECONCILIATION REQUIREMENTS.	
ALL DIMENSIONS ARE IN MILLIMETERS	
ZERO PLACE DECIMALS ±NA	
ONE PLACE DECIMALS ±NA	
TWO PLACE DECIMALS ±NA	
ANGLES ±NA DEGREE	
REFERENCE	
THIRD ANGLE PROJECTION	DO NOT SCALE
USE MATH DATA	NX V11.0

DELPHI	
COPYRIGHT 2018 DELPHI CORPORATION AND/OR ITS AFFILIATES. ALL RIGHTS RESERVED.	
THIS DRAWING IS THE PROPERTY OF APTIV AND CONTAINS APTIV CONFIDENTIAL INFORMATION. THE REPRODUCTION, DISTRIBUTION AND UTILIZATION OF THIS DOCUMENT OR ITS RELATED CAD DATA, AS WELL AS COMMUNICATION OF ANY CONTENT TO OTHERS, WITHOUT EXPRESS AUTHORIZATION, IS PROHIBITED.	
DATE	
DR	SHIHAO MA 31MY18
APVD1	ZHONGSHI LIU 31MY18
APVD2	PARK PENG 31MY18
APVD3	TERENCE TAN 31MY18
APVD4	
SUBSTANCES OF CONCERN AND RECYCLED CONTENT PER DELPHI 1094901	
MATERIAL	
SEE ITEM LIST	
DRAWING NAME	
LABEL MAKE-ID, SRR5	
DRAWING NUMBER	
28619271	
SIZE	SCALE
A0	(1:1)
2	1 OF 1

FIRST USED	DK 318587
REFERENCE	N/A
REPLACES	N/A
REPLACED BY	28619271