

Report on the FCC and IC Testing of the
 APTIV Services Deutschland GmbH
 Radar Sensor. Model: R5TR
 In accordance with CFR 47, Part 95, Subpart M
 and
 ISED RSS-251, Issue 2



Product Service

Choose certainty.
 Add value.

Prepared for: APTIV Services Deutschland GmbH
 Am Technologiepark 1
 42119 Wuppertal
 Germany

FCC ID: LTQR5TR
 IC: 3659A-R5TR

COMMERCIAL-IN-CONFIDENCE

Date: 2020-11-27
 Document Number: TR-00237-97005-03 | Issue: 3

RESPONSIBLE FOR	NAME	DATE	SIGNATURE
Project Management	Alex Fink	2020-11-27	 SIGN-ID 426924
Authorised Signatory	Matthias Stumpe	2020-11-27	 SIGN-ID 427180

Signatures in this approval box have checked this document in line with the requirements of TÜV SÜD Product Service document control rules.

ENGINEERING STATEMENT

The measurements shown in this report were made in accordance with the procedures described on test pages. All reported testing was carried out on a sample equipment to demonstrate limited compliance with FCC 47 CFR Part 95, Subpart M and ISED Canada RSS-251. The sample tested was found to comply with the requirements defined in the applied rules.

RESPONSIBLE FOR	NAME	DATE	SIGNATURE
Testing	Alex Fink	2020-11-27	 SIGN-ID 426924

Laboratory Accreditation Laboratory recognition ISED Canada test site registration
 DAkkS Reg. No. D-PL-11321-11-02 Registration No. BNetzA-CAB-16/21-15 3050A-2
 DAkkS Reg. No. D-PL-11321-11-03

EXECUTIVE SUMMARY

A sample of this product was tested and found to be compliant with FCC 47 CFR Part 95, Subpart M (2018), ISED Canada RSS-251 Issue 2 (2018-06).

DISCLAIMER AND COPYRIGHT

This non-binding report has been prepared by TÜV SÜD Product Service with all reasonable skill and care. The document is confidential to the potential Client and TÜV SÜD Product Service. No part of this document may be reproduced without the prior written approval of TÜV SÜD Product Service. © 2020 TÜV SÜD Product Service.

ACCREDITATION

Our BNetzA Accreditation does not cover opinions and interpretations and any expressed are outside the scope of our BNetzA Accreditation.



Summary

Prüfergebnisse / Test Results	Auftragsnummer / Order No. 453590529			
Die Prüfungen wurden nach folgenden Vorschriften durchgeführt: <i>Tests were performed according to:</i> CFR 47, Part 95, Subpart M ISED RSS-251, Issue 2				
Durchgeführte Prüfung Test performed	Prüfergebnis Test result			
Power Density	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Occupied Bandwidth	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Spurious Radiated Emissions	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Frequency Stability	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
SAR Evaluation	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

Bemerkungen / Remarks:

Die Prüfergebnisse beziehen sich ausschließlich auf das zur Prüfung vorgestellte Prüfmuster. Ohne schriftliche Genehmigung des Prüflabors darf der Prüfbericht auszugsweise nicht vervielfältigt werden. *The test results relate only to the individual item which has been tested. Without the written approval of the test laboratory this report may not be reproduced in extracts.*



Table of Contents

1	Administrative Data	4
2	Details about the Test Laboratory	5
3	Description of the Equipment Under Test	6
4	Operation Mode and Configuration of EUT	8
5	Test Setups	9
6	Photographs Taken During Testing	13
7	Referenced Regulations.....	14
8	Measurement Uncertainty Values	15
9	Test Equipment used	18
10	Test Results	19
10.1	Radiated Power.....	21
10.2	Occupied Bandwidth	31
10.3	Spurious Radiated Emissions	37
10.4	Frequency Stability.....	59
10.5	SAR Evaluation	72
11	Revision History	73

1 Administrative Data

Application details

Applicant:	APTIV Services Deutschland GmbH Am Technologiepark 1 42119 Wuppertal Germany
Contact person:	Ljiljana TRIVIC
Order number:	453590529
Receipt of EUT:	2020-10-12
Return of EUT:	---
Date(s) of test:	2020-10-13 to 2020-10-21
Note(s):	---
Responsible for testing:	Mr. Alex Fink
Responsible for test report:	Mr. Alex Fink
Test report checked by:	Mr. Matthias Stumpe

Report details

Report number:	TR-00237-97005-03
Edition:	3
Issue date:	27



2 Details about the Test Laboratory

Details about the Test Laboratory

Company name:	TÜV SÜD Product Service GmbH
Address:	Äußere Frühlingstraße 45 D-94315 Straubing Germany
Laboratory accreditation:	DAkKS Registration No. D-PL-11321-11-02 DAkKS Registration No. D-PL-11321-11-03
Laboratory recognition:	Registration No. BNetzA-CAB-16/21-15
Industry Canada test site registration:	3050A-2
Contact:	Mr. Markus Biberger
	Phone: +49 9421 5522-0 Fax: +49 9421 5522-99

3 Description of the Equipment Under Test

Equipment characteristics									
Type designation:	R5TR								
Parts of the system:	---								
Options and accessories:	---								
Type of equipment:	Radar Sensor								
Serial number:	20226 07122								
Manufacturer:	APTIV Services Deutschland GmbH								
Hardware version:	D1								
Software version:	6.1.2								
Drawing number:	N/A								
Build status:	6.0								
Power supply:	Battery supply (regulated lead-acid)								
	<table border="0"> <tr> <td>Nominal:</td> <td>13.2 V DC</td> </tr> <tr> <td>Minimum:</td> <td>10.8 V DC</td> </tr> <tr> <td>Maximum:</td> <td>15.6 V DC</td> </tr> <tr> <td>Nominal frequency:</td> <td>0 Hz (DC)</td> </tr> </table>	Nominal:	13.2 V DC	Minimum:	10.8 V DC	Maximum:	15.6 V DC	Nominal frequency:	0 Hz (DC)
Nominal:	13.2 V DC								
Minimum:	10.8 V DC								
Maximum:	15.6 V DC								
Nominal frequency:	0 Hz (DC)								
Highest internal frequency:	240 MHz (non-radio) / 76.9 GHz (radio)								

Technical Description

The Equipment Under Test (EUT) was a Aptiv R5TR. The EUT operates in the 76 GHz – 77 GHz band. The device employs a dynamic chirp modulated transmit array. Multiple receive antennas are used to determine target angular resolution through digital beam forming. The device is intended to be mounted at the front and rear corners of a vehicle. The EUTs normal operating voltage is DC 13.2 V

Marking Plate





4 Operation Mode and Configuration of EUT

Operation Mode(s)

The operating modes with single frequency, 175 MHz, 300 MHz and 425 MHz were tested on the lowest, middle and highest frequency configuration, each, as provided by the manufacturer.

List of ports and cables

No.	Description	Classification ¹	Cable type	Cable length	
				used	maximum ²
D1	DC 12 V supply	dc power	Unshielded	2 m	2 m
S1	Wiring harness (CAN, Ethernet)	signal/control port	Unshielded	2 m	2 m

List of devices connected to EUT

No.	Description	Type designation	Serial no. or ID	Manufacturer
---	---	---	---	---

List of support devices


No.	Description	Type designation	Serial no. or ID	Manufacturer
1	CAN/LIN-Interface	VN1640A		Vector
2	Notebook	Latitude 5480	---	Dell

¹ Ports shall be classified as ac power, dc power or signal/control port.

² As specified by applicant

5 Test Setups

Radiated Emission in Fully or Semi Anechoic Room

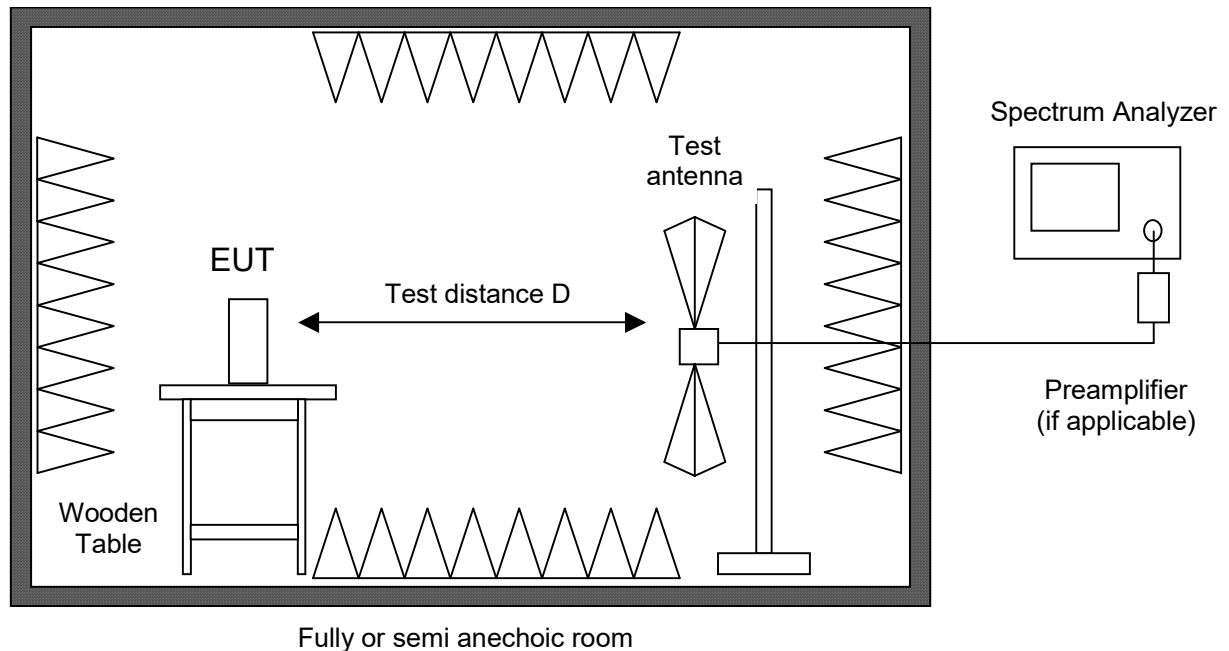

Radiated emission in fully or semi anechoic room is measured in the frequency range from 30 MHz to the maximum frequency as specified in CFR 47 Part 15 section 15.33.

Measurements are made in both the horizontal and vertical planes of polarization using a spectrum analyzer with the detector function set to peak and resolution as well as video bandwidth set to 100 kHz (below 1 GHz) or 1 MHz (above 1 GHz).

Testing up to 1 GHz is performed with a linear polarized logarithmic periodic antenna combined with a 4:1 broadband dipole ("Trilog broadband antenna"). For testing above 1 GHz horn antennas are used.

All tests below 8.2 GHz are performed at a test distance D of 3 meters. For higher frequencies the test distance may be reduced (e.g. to 1 meter) due to the sensitivity of the measuring instrument(s) and the test results are calculated according to CFR 47 Part 15 section 15.31(f)(1) using an extrapolation factor of 20 dB/decade. If required, preamplifiers are used for the whole frequency range. Special care is taken to avoid overload, using appropriate attenuators and filters, if necessary.

If the radiated emission limits are expressed in terms of the average value of the emission there also is a peak limit corresponding to 20 dB above the maximum permitted average limit. Additionally, if pulsed operation is employed, the average field strength is determined by averaging over one complete pulse train, including blanking intervals, as specified in CFR 47 Part 15 section 15.35(c). If the pulse train exceeds 0.1 second that 0.1 second interval during which the value of the emission is at its maximum is selected for calculation. The pulse train correction is added to the peak value of the emission to get the average value.

Hand-held or body-worn devices are rotated through three orthogonal axes to determine which attitude and configuration produces the highest emission relative to the limit and therefore shall be used for final testing.

During testing the EUT is rotated all around to find the maximum levels of emissions. Equipment and cables are placed and moved within the range of position likely to find their maximum emissions.

For final testing below 1 GHz a semi anechoic room complying with the NSA requirements of ANSI C63.4 for alternative test sites is used (see 0). If prescans are recorded in fully anechoic room they are indicated appropriately.

According to section 13 of KDB558074 the requirement for radiated emissions on the band edges was performed with a reduced bandwidth of 100 kHz instead of 1 MHz.

Radiated emission in the frequency range 9 kHz to 30 MHz is measured using an active loop antenna. First the whole spectrum of emission caused by the equipment is recorded at a distance of 3 meters in a fully or semi anechoic room with the detector of the spectrum analyzer or EMI receiver set to peak. This configuration is also used for recording the spectrum of intentional radiators.

Hand-held or body-worn devices are rotated through three orthogonal axes to determine which attitude and configuration produces the highest emission relative to the limit and therefore shall be used for final testing.


EUT is rotated all around to find the maximum levels of emissions. Equipment and cables are placed and moved within the range of position likely to find their maximum emissions.

If worst case emission of the EUT cannot be recorded with EUT in standard position and loop antenna in vertical polarization the EUT (or the radiating part of the EUT) is rotated by 90 degrees instead of changing the loop antenna to horizontal polarization. This procedure is selected to minimize the influence of the environment (e.g. effects caused by the floor especially with longer distances).

Final measurement is performed at a test distance D of 30 meters using an open field test site. In case the regulation requires testing at other distances, the result is extrapolated by either making measurements at an additional distance D of 10 meters to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade). In cases of very low emissions measurements are performed at shorter distances and results are extrapolated to the required distance. The provisions of CFR 47 Part 15 sections 15.31(d) and (f)(2) apply. According to CFR 47 Part 15 section 15.209(d) final measurement is performed with detector function set to quasi-peak except for the frequency bands 9 to 90 kHz and 110 to 490 kHz where, for non-pulsed operation, average detector is employed.

If the radiated emission limits are expressed in terms of the average value of the emission there also is a peak limit corresponding to 20 dB above the maximum permitted average limit. Additionally, if pulsed operation is employed, the average field strength is determined by averaging over one complete pulse train, including blanking intervals, as specified in CFR 47 Part 15 section 15.35(c). If the pulse train exceeds 0.1 second that 0.1 second interval during which the value of the emission is at its maximum is selected for calculation. The pulse train correction is added to the peak value of the emission to get the average value.

Radiated Emission at Alternative Test Site

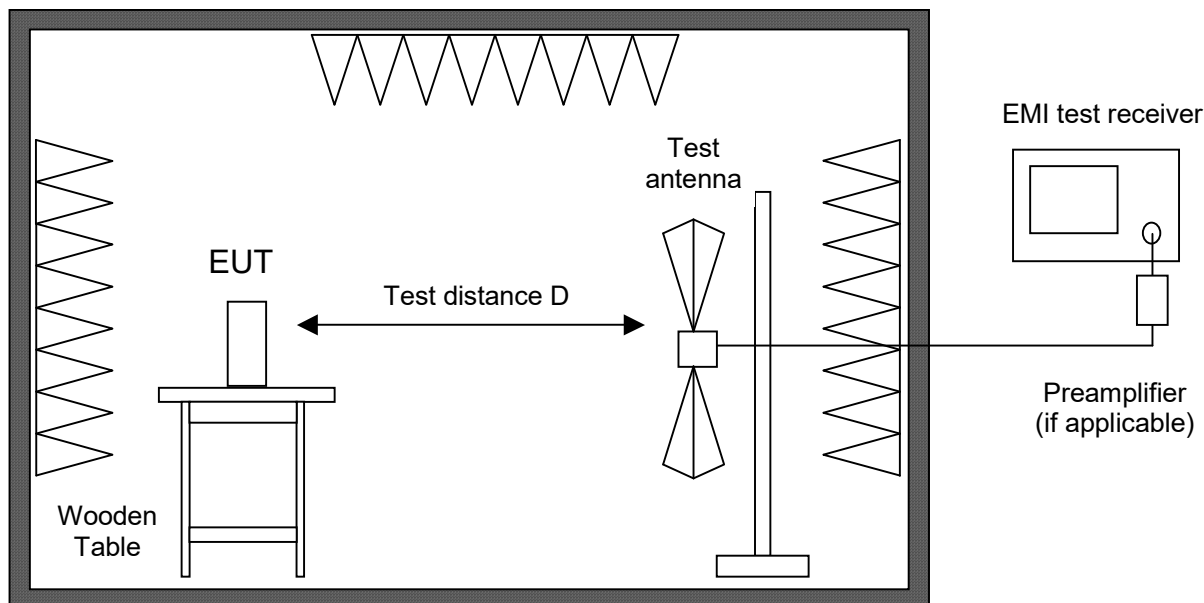

Alternate test site (semi anechoic room)

Radiated emission in the frequency range 30 MHz to 1 GHz is measured within a semi-anechoic room with groundplane complying with the NSA requirements of ANSI C63.4 for alternative test sites. A linear polarized logarithmic periodic antenna combined with a 4:1 broadband dipole ("Trilog broadband antenna") is used. The measurement bandwidth of the test receiver is set to 120 kHz with quasi-peak detector selected.

If the radiated emission limits are expressed in terms of the average value of the emission there also is a peak limit corresponding to 20 dB above the maximum permitted average limit. Additionally, if pulsed operation is employed, the average field strength is determined by averaging over one complete pulse train, including blanking intervals, as specified in CFR 47 Part 15 section 15.35(c). If the pulse train exceeds 0.1 second that 0.1 second interval during which the value of the emission is at its maximum is selected for calculation. The pulse train correction is added to the peak value of the emission to get the average value.

Hand-held or body-worn devices are tested in the position producing the highest emission relative to the limit as verified by prescans in fully anechoic room.

If no prescan in a fully anechoic room is used first a peak scan is performed in four positions to get the whole spectrum of emission caused by EUT with the measuring antenna raised and lowered from 1 to 4 m to find table position, antenna height and antenna polarization for the maximum emission levels.

Data reduction is applied to these results to select those levels having less margin than 10 dB to or exceeding the limit using subranges and limited number of maximums. Further maximization is following.

With detector of the test receiver set to quasi-peak final measurements are performed immediately after frequency zoom (for drifting disturbances) and maximum adjustment.

Equipment and cables are placed and moved within the range of position likely to find their maximum emissions.

In cases where prescans in a fully anechoic room are taken (e. g. if EUT is operating for a short time only or battery is discharged quickly) final measurements with quasi-peak detector are performed manually at frequencies indicated by prescan with EUT rotating all around and receiving antenna raising and lowering within 1 meter to 4 meters to find the maximum levels of emission.

Equipment and cables are placed and moved within the range of position likely to find their maximum emissions.



For measuring emissions of intentional radiators and receivers a test distance D of 3 meters is selected. Testing of unintentional radiators is performed at a distance of 10 meters. If limits specified for 3 meters shall be used for measurements performed at 10 meters distance the limits are calculated according to CFR 47 Part 15 section 15.31(d) and (f)(1) using an inverse linear-distance extrapolation factor of 20 dB/decade.



6 Photographs Taken During Testing

See "Annex to Test Report TR00237-97005-03 | Issue: 01"

7 Referenced Regulations

<i>Publication</i>	<i>Title</i>
CFR 47, Part 2	Code of Federal Regulations Part 2 (Frequency allocation and radio treaty matters; General rules and regulations) of the Federal Communications Commission (FCC)
CFR 47, Part 95, Subpart M	Code of Federal Regulations Part 95 (Personal Radio Services), Subpart M (76 – 77 GHz Band Radar Service) of the Federal Communications Commission (FCC)
RSS-251, Issue 2	Vehicular Radar and Airport Fixed or Mobile Radar in the 76 – 81 GHz Frequency band
ANSI C63.4-2014	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz
ANSI C63.10-2013	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices

8 Measurement Uncertainty Values

The measurement uncertainty in the laboratory is less than or equal to the maximum measurement uncertainty according to EN 55016-4-2: 2011 + A1 + A2 + AC and CISPR16-4-2: 2011 + A1 + A2 + Cor1 (UCISPR). This normative regulation means that the measured value is also the value to be assessed in relation to the limit value.

For a 95% confidence level, the measurement uncertainties for defined systems are:

Radio Testing			
Test Name	kp	Expanded Uncertainty	Note
Occupied Bandwidth	2.0	±1.14 %	2
RF-Frequency error	1.96	±1 · 10 ⁻⁷	7
RF-Power, conducted carrier	2	±0.079 dB	2
RF-Power uncertainty for given BER	1.96	+0.94 dB / -1.05	7
RF power, conducted, spurious emissions	1.96	+1.4 dB / -1.6 dB	7
RF power, radiated			
25 MHz – 4 GHz	1.96	+3.6 dB / -5.2 dB	8
1 GHz – 18 GHz	1.96	+3.8 dB / -5.6 dB	8
18 GHz – 26.5 GHz	1.96	+3.4 dB / -4.5 dB	8
40 GHz – 170 GHz	1.96	+4.2 dB / -7.1 dB	8
Spectral Power Density, conducted	2.0	±0.53 dB	2
Maximum frequency deviation			
300 Hz – 6 kHz	2	±2,89 %	2
6 kHz – 25 kHz	2	±0.2 dB	2
Maximum frequency deviation for FM	2	±2,89 %	2
Adjacent channel power 25 MHz – 1 GHz	2	±2.31 %	2
Temperature	2	±0.39 K	4
(Relative) Humidity	2	±2.28 %	2
DC- and low frequency AC voltage			
DC voltage	2	±0.01 %	2
AC voltage up to 1 kHz	2	±1.2 %	2
Time	2	±0.6 %	2

Radio Interference Emission Testing			
Test Name	kp	Expanded Uncertainty	Note
Conducted Voltage Emission			
9 kHz to 150 kHz (50Ω/50μH AMN)	2	± 3.8 dB	1
150 kHz to 30 MHz (50Ω/50μH AMN)	2	± 3.4 dB	1
100 kHz to 200 MHz (50Ω/5μH AMN)	2	± 3.6 dB	1
Discontinuous Conducted Emission			
9 kHz to 150 kHz (50Ω/50μH AMN)	2	± 3.8 dB	1
150 kHz to 30 MHz (50Ω/50μH AMN)	2	± 3.4 dB	1
Conducted Current Emission			
9 kHz to 200 MHz	2	± 3.5 dB	1
Magnetic Fieldstrength			
9 kHz to 30 MHz (with loop antenna)	2	± 3.9 dB	1
9 kHz to 30 MHz (large-loop antenna 2 m)	2	± 3.5 dB	1
Radiated Emission			
Test distance 1 m (ALSE)			
9 kHz to 150 kHz	2	± 4.6 dB	1
150 kHz to 30 MHz	2	± 4.1 dB	1
30 MHz to 200 MHz	2	± 5.2 dB	1
200 MHz to 2 GHz	2	± 4.4 dB	1
2 GHz to 3 GHz	2	± 4.6 dB	1
Test distance 3 m			
30 MHz to 300 MHz	2	± 4.9 dB	1
300 MHz to 1 GHz	2	± 5.0 dB	1
1 GHz to 6 GHz	2	± 4.6 dB	1
Test distance 10 m			
30 MHz to 300 MHz	2	± 4.9 dB	1
300 MHz to 1 GHz	2	± 4.9 dB	1
Radio Interference Power			
30 MHz to 300 MHz	2	± 3.5 dB	1
Harmonic Current Emissions			
			4
Voltage Changes, Voltage Fluctuations and Flicker			
			4

Immunity Testing			
Test Name	kp	Expanded Uncertainty	Note
Electrostatic Discharges			4
Radiated RF-Field			
Pre-calibrated field level	2	+32.2 / -24.3 %	5
Dynamic feedback field level	2.05	+21.2 / -17.5 %	3
Electrical Fast Transients (EFT) / Bursts			4
Surges			4
Conducted Disturbances, induced by RF-Fields			
via CDN	2	+15.1 / -13.1 %	6
via EM clamp	2	+42.6 / -29.9 %	6
via current clamp	2	+43.9 / -30.5 %	6
Power Frequency Magnetic Field	2	+20.7 / -17.1 %	2
Pulse Magnetic Field			4
Voltage Dips, Short Interruptions and Voltage Variations			4
Oscillatory Waves			4
Conducted Low Frequency Disturbances			
Voltage setting	2	± 0.9 %	2
Frequency setting	2	± 0.1 %	2
Electrical Transient Transmission in Road Vehicles			4

Note 1:

The expanded uncertainty reported according to CISPR 16-4-2:2003-11 is based on a standard uncertainty multiplied by a coverage factor of $k_p = 2$, providing a level of confidence of $p = 95.45\%$

Note 2:

The expanded uncertainty reported according to UKAS Lab 34 (Edition 1, 2002-08) is based on a standard uncertainty multiplied by a coverage factor of $k_p = 2$, providing a level of confidence of $p = 95.45\%$

Note 3:

The expanded uncertainty reported according to UKAS Lab 34 (Edition 1, 2002-08) is based on a standard uncertainty multiplied by a coverage factor of $k_p = 2.05$, providing a level of confidence of $p = 95.45\%$

Note 4:

It has been demonstrated that the used test equipment meets the specified requirements in the standard with at least a 95% confidence.

Note 5:

The expanded uncertainty reported according to IEC 61000-4-3 is based on a standard uncertainty multiplied by a coverage factor of $k_p = 2$, providing a level of confidence of $p = 95.45\%$

Note 6:

The expanded uncertainty reported according to IEC 61000-4-6 is based on a standard uncertainty multiplied by a coverage factor of $k_p = 2$, providing a level of confidence of $p = 95.45\%$

Note 7:

The expanded uncertainty reported according to ETSI TR 100 028 V1.4.1 (all parts) is based on a standard uncertainty multiplied by a coverage factor of $k_p = 1.96$, providing a level of confidence of $p = 95.45\%$

Note 8:

The expanded uncertainty reported according to ETSI TR 102 273 V1.2.1 (all parts) is based on a standard uncertainty multiplied by a coverage factor of $k_p = 1.96$, providing a level of confidence of $p = 95.45\%$



9 Test Equipment used

<i>T-ID</i>	<i>Designation</i>	<i>Type</i>	<i>Last Cal.</i>	<i>Next Cal.</i>
18874	Horn antenna	3160-07	Verified	
18875	Horn antenna	3160-08	Verified	
19125	Horn antenna	3160-09	Verified	
19383	Double ridged waveguide horn antenna	3115	2020-03	2023-03
19442	Horn antenna	3160-10	Verified	
19533	Spectrum analyser	FSP30	2019-02	2022-03
19933	Double ridged horn antenna	HF907	2019-07	2021-07
19946	Horn antenna	24240-20	Verified	
20219	Signal and Spectrum Analysator	FSV40 for TS8997	2020-01	2021-01
22553	Waveguide mixer	FS-Z170	2020-02	2023-02
25849	Waveguide mixer	FS-Z60	2020-02	2023-02
25850	Waveguide mixer	FS-Z90	2020-02	2023-02
25851	Waveguide mixer	FS-Z110	2020-02	2023-02
27898	Horn antenna	26240-20	Verified	
27899	Horn antenna	27240-20	Verified	
39897	EMI test receiver	ESW44	2020-03	2021-03
36954	Harmonic Mixer	FS-Z220	2018-03	2021-03
36955	Harmonic Mixer	FS-Z325	2018-02	2021-02
37863	Horn antenna	30240-20 WG30	Verified	
37864	Horn antenna	32240-20 WG32	Verified	
38401	ULTRALOG Antenna	HL562E	2018-05	2021-05

Test software for: EMC32 V10.



10 Test Results

CFR 47, Part 2

<i>Section(s)</i>	<i>Test performed</i>	<i>Page</i>	<i>Test Result</i>
§ 2.202 (a); § 2.1049	Occupied Bandwidth	31	Test passed

CFR 47, Part 95, Subpart M,

<i>Section(s)</i>	<i>Test performed</i>	<i>Page</i>	<i>Test Result</i>
§ 95.3367 (a)	Radiated Power – Average	21	Test passed
§ 95.3367 (b)	Radiated Power – Peak	21	Test passed
§ 95.3379 (a)	Spurious Emissions	37	Test passed
§95.3379 (b)	Frequency Stability	59	Test passed



ISED RSS-GEN, Issue 4

<i>Section(s)</i>	<i>Test performed</i>	<i>Page</i>	<i>Test Result</i>
6.6	Occupied Bandwidth	31	Test passed

ISED RSS-251, Issue 2

<i>Section(s)</i>	<i>Test performed</i>	<i>Page</i>	<i>Test Result</i>
7	Occupied Bandwidth	31	Test passed
8	Average equivalent isotropically radiated power (e.i.r.p.)	21	Test passed
9	Peak (e.i.r.p.)	21	Test passed
10	Unwanted Emissions	37	Test passed
11	Frequency Stability	59	Test passed

10.1 Radiated Power

Date of Test	2020-10-13
Operator	Alex Fink
Test Site	Semi anechoic room, cabin no. 11

Test Result	
<input checked="" type="checkbox"/>	Passed
<input type="checkbox"/>	Not Passed


Barometric pressure:	974 hPa
Relative humidity:	45 %
Ambient temperature:	21 °C

Specifications:	Part 95, Subpart M, § 95.3367(a) and (b) RSS-251 Issue 2, Sections 8 and 9
Description:	The fundamental radiated emission limits within the 76 – 81 GHz band are expressed in terms of Equivalent Isotropically Radiated Power (EIRP) and are as follows: a) The maximum power (EIRP) within the 76 – 81 GHz band shall not exceed 50 dBm based on measurements employing a power averaging detector with a 1 MHz Resolution Bandwidth (RBW). b) The maximum peak power (EIRP) within the 76 – 81 GHz band shall not exceed 55 dBm based on measurements employing a peak detector with a 1 MHz RBW.
Operation mode:	Transmitting continuously on frequency with modulation bandwidth as stated in table below
Comment :	Test was performed as radiated test. The test distance was 3 m. A correction factor of -58 dB and mixer conversion loss table were used to account for the test antenna gain, free-space loss and external mixer loss.


Modulation	Detector	Lowest Channel	Middle Channel	Highest Channel	Limit	Note
175 MHz	Average	17.48	17.67	17.40	50 dBm	NA
	Peak	26.10	26.08	25.66	55 dBm	
300 MHz	Average	17.89	17.73	17.54	50 dBm	NA
	Peak	26.25	26.03	25.74	55 dBm	
425 MHz	Average	18.68	18.68	18.47	50 dBm	NA
	Peak	26.18	26.03	26.05	55 dBm	

Note(s):	---
----------	-----

Plots taken during test

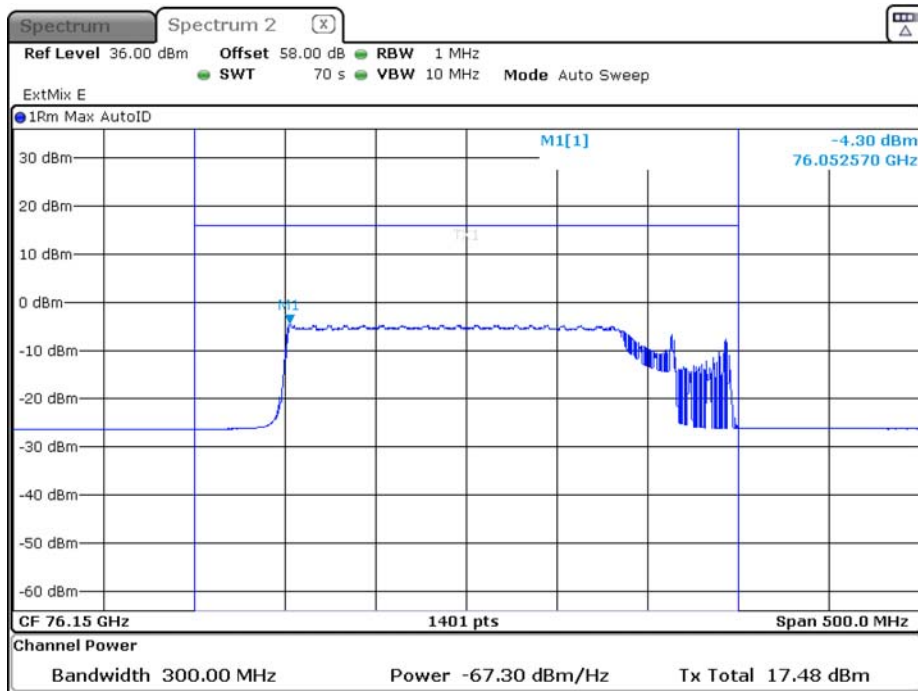


Date: 13.OCT.2020 10:01:57

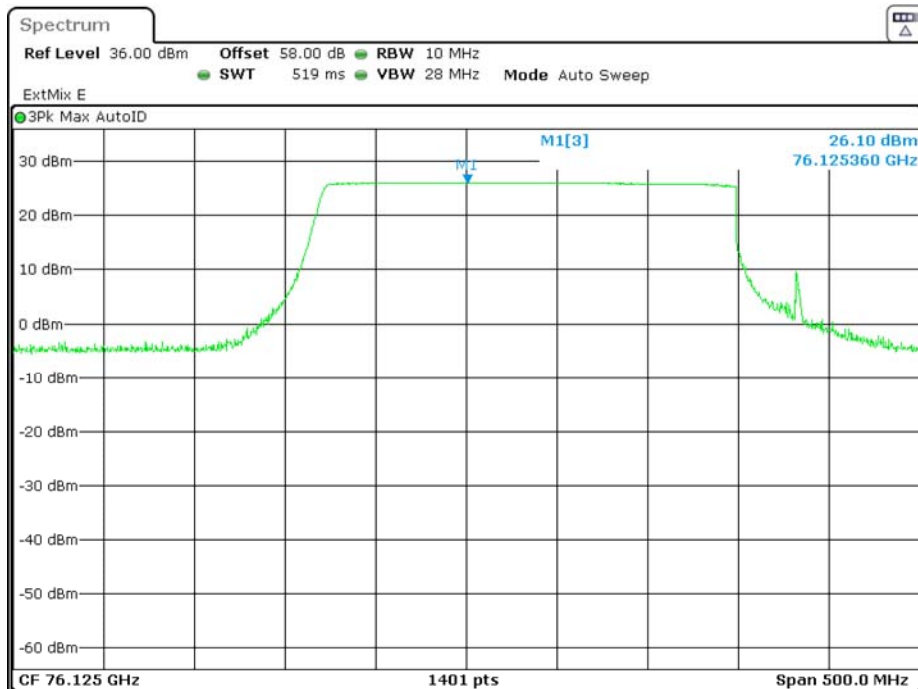


Date: 13.OCT.2020 09:47:44

175 MHz, Lowest Channel

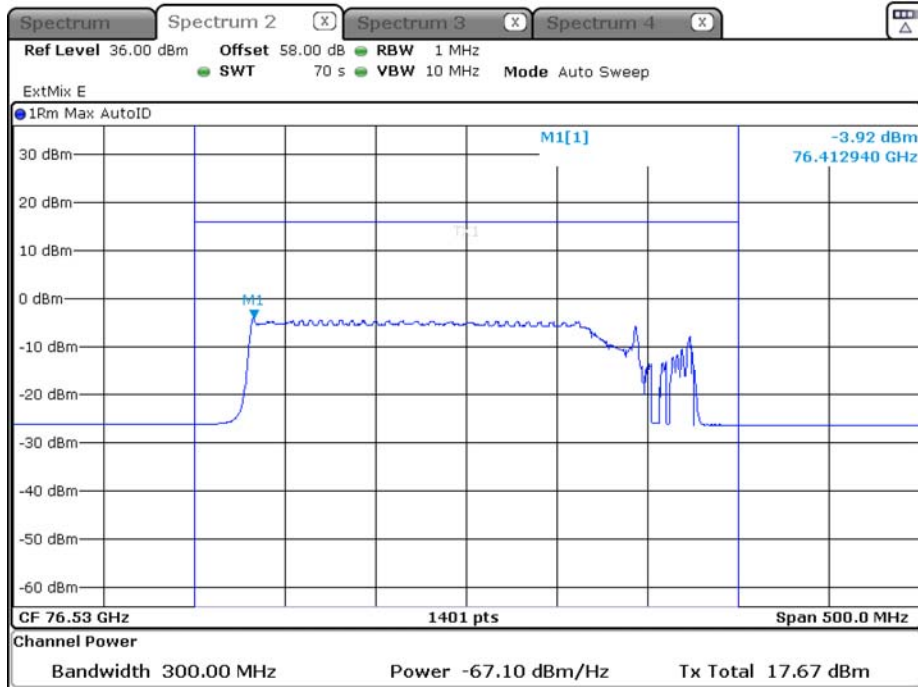


Date: 13.OCT.2020 11:29:29

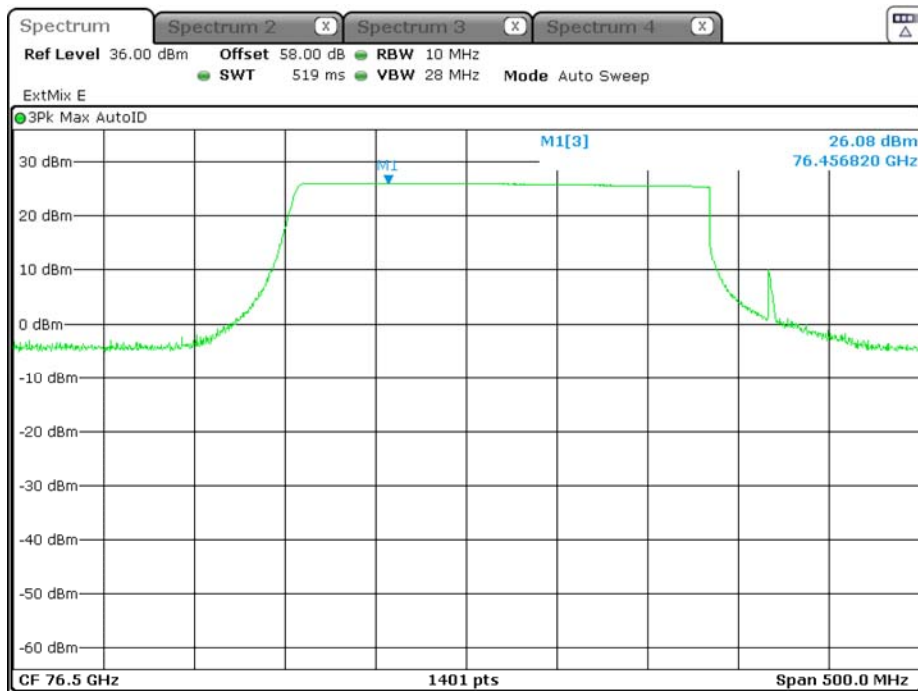


Date: 13.OCT.2020 10:29:18

175 MHz, Middle Channel

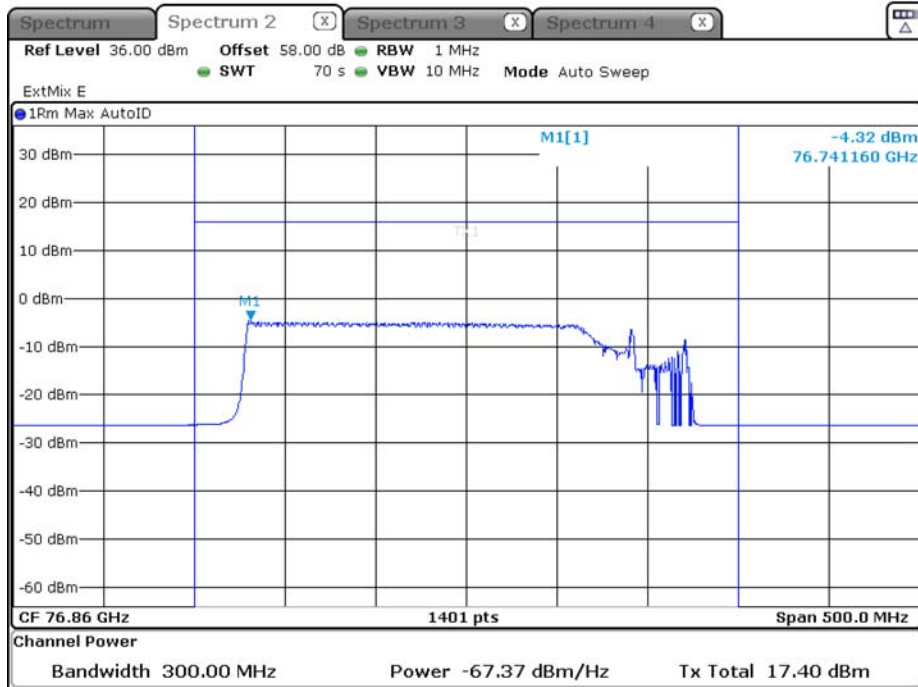


Date: 13.OCT.2020 11:16:39

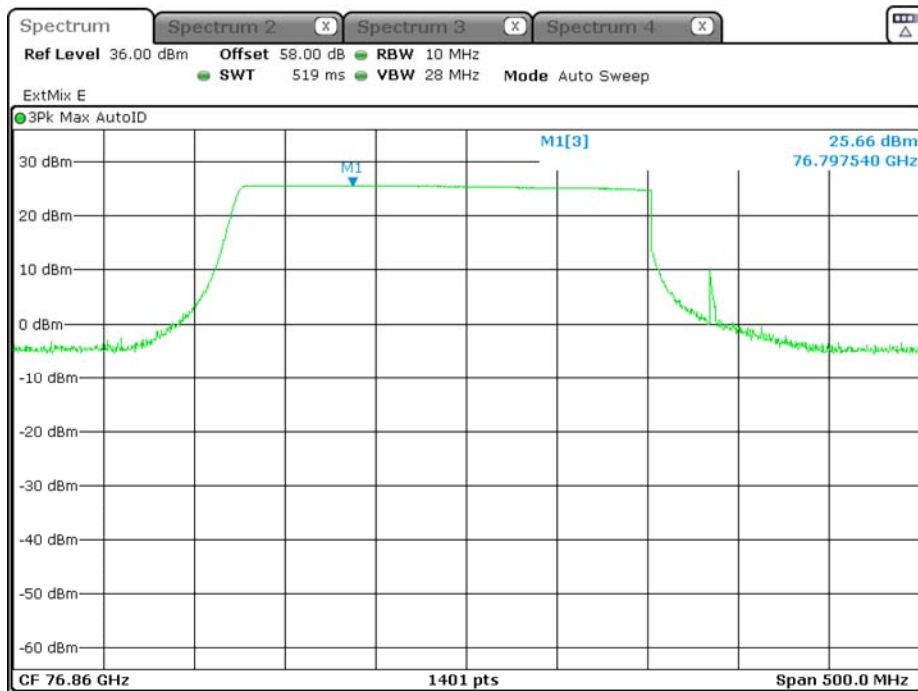


Date: 13.OCT.2020 10:56:47

175 MHz, Highest Channel

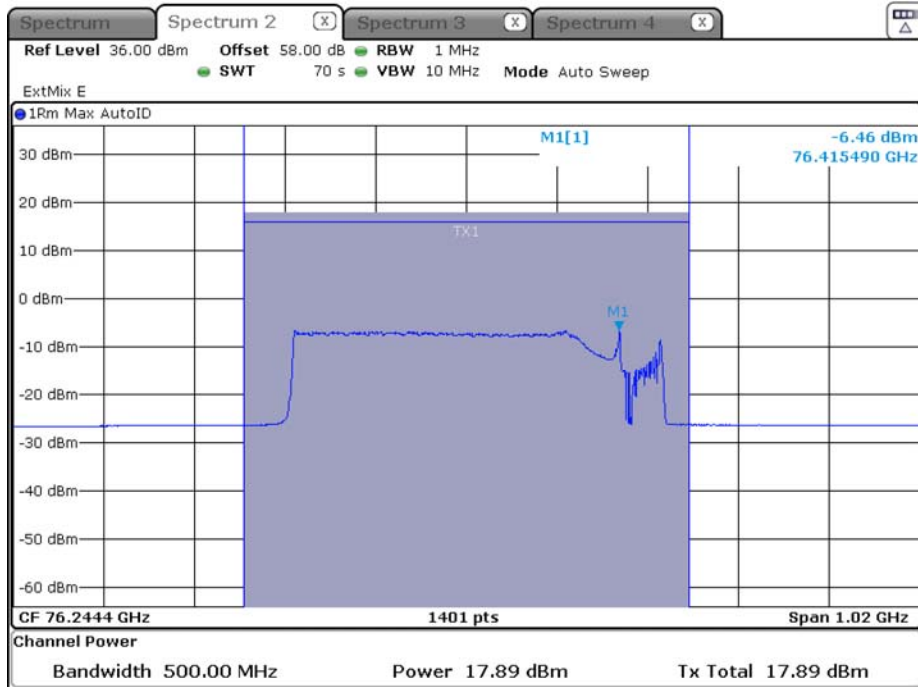


Date: 13.OCT.2020 11:44:04

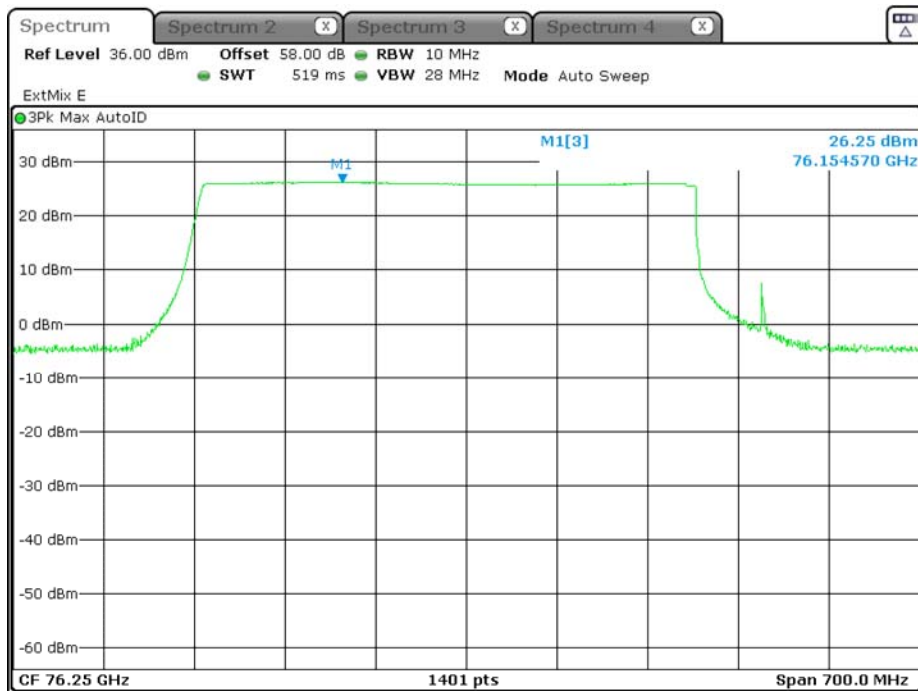

Date: 13.OCT.2020 11:34:59

300 MHz, Lowest Channel

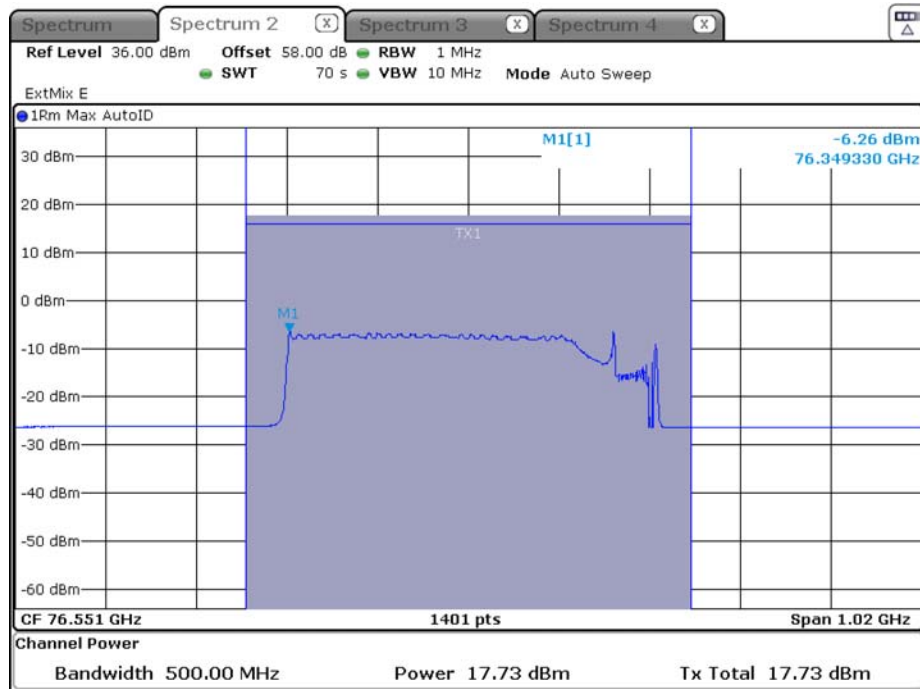


Date: 13.OCT.2020 12:02:13



Date: 13.OCT.2020 12:03:09

300 MHz, Middle Channel

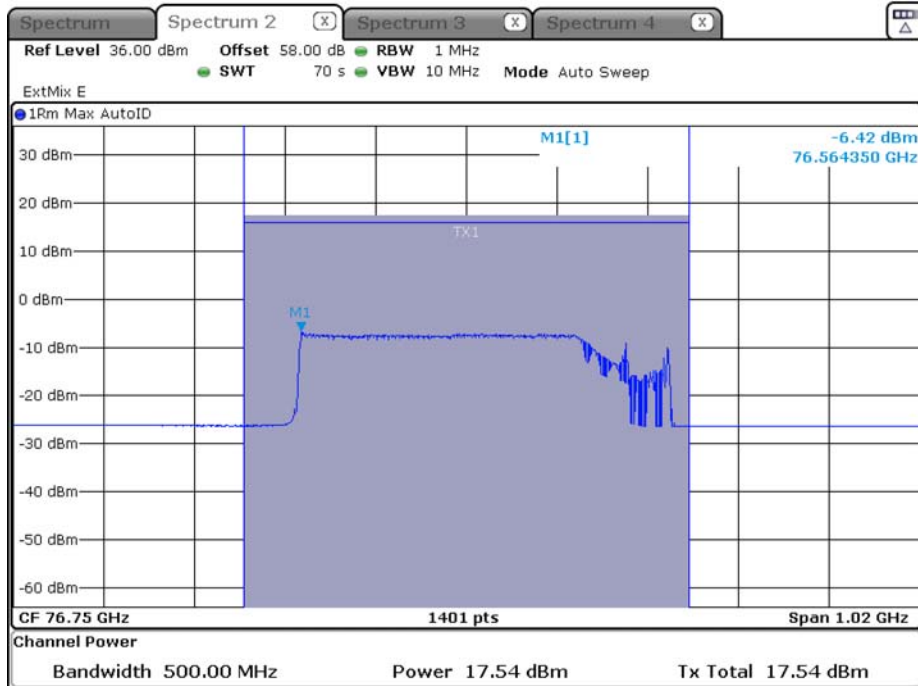


Date: 13.OCT.2020 12:20:23



Date: 13.OCT.2020 13:02:22

300 MHz, Highest Channel

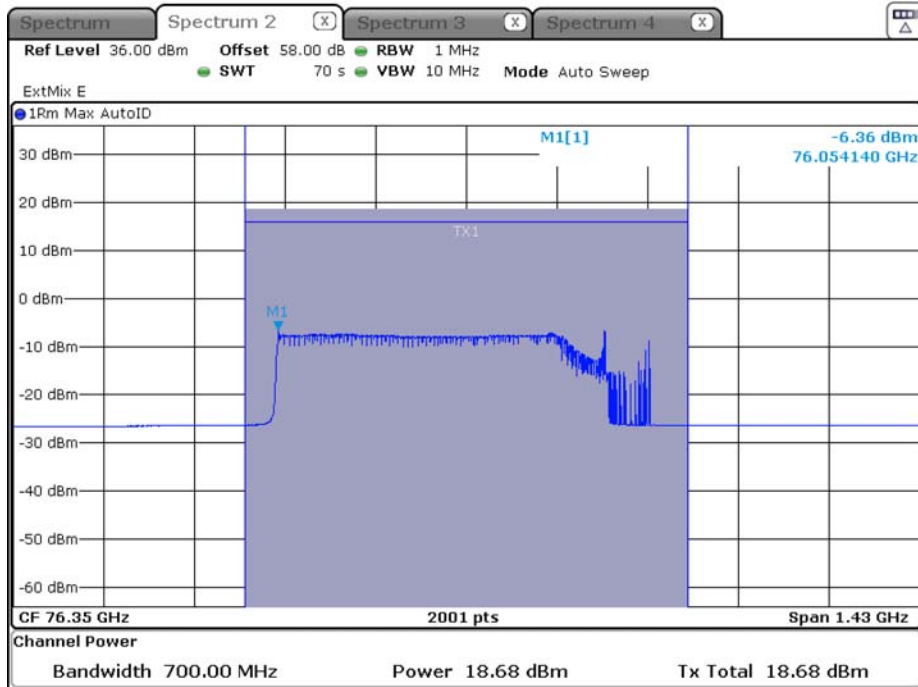


Date: 13.OCT.2020 13:20:20




Date: 13.OCT.2020 13:22:34

425 MHz, Lowest Channel

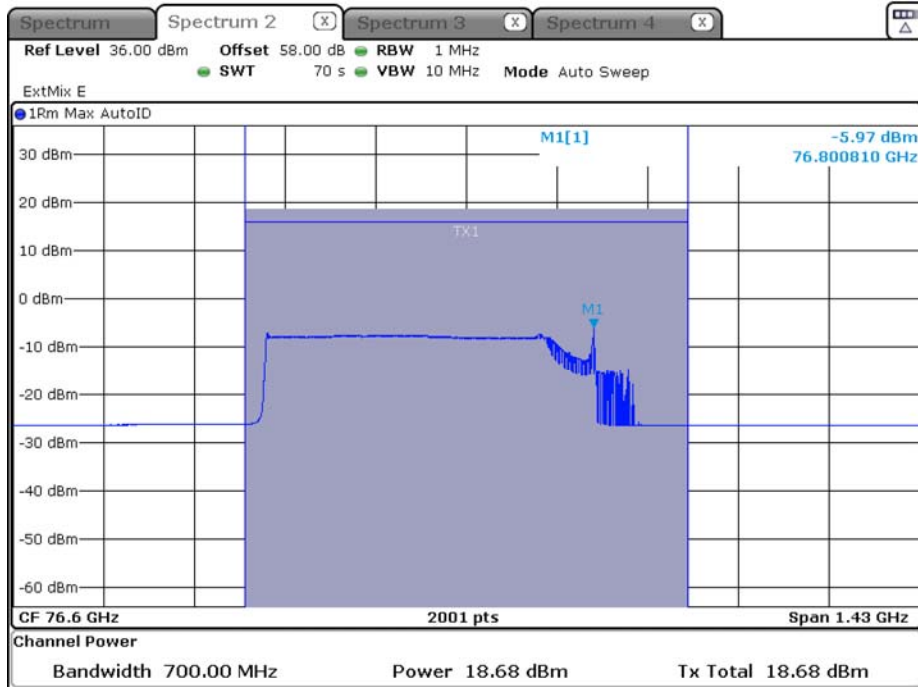


Date: 13.OCT.2020 13:53:11

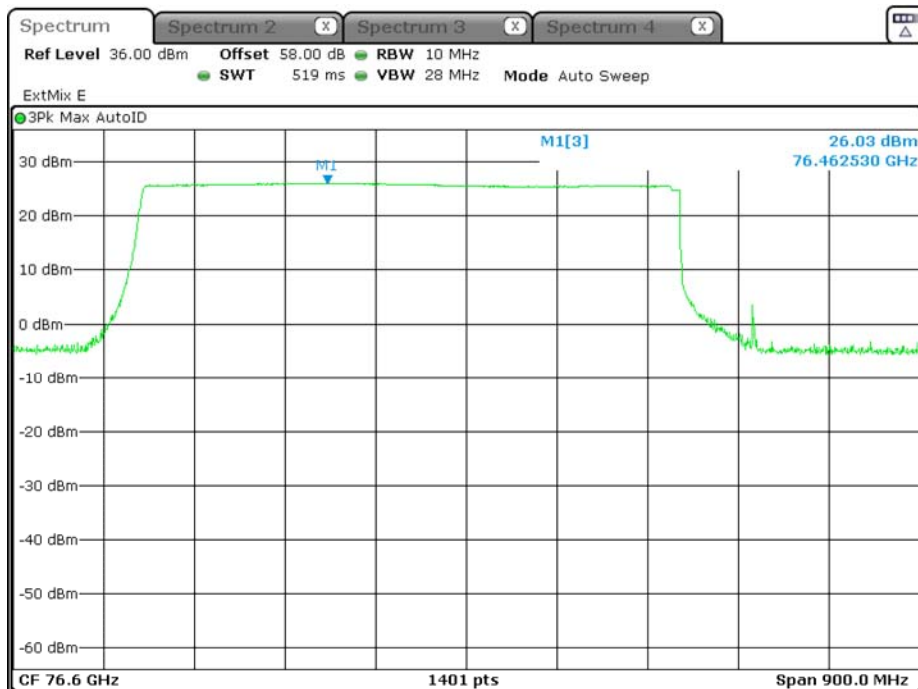


Date: 13.OCT.2020 13:54:06

425 MHz, Middle Channel

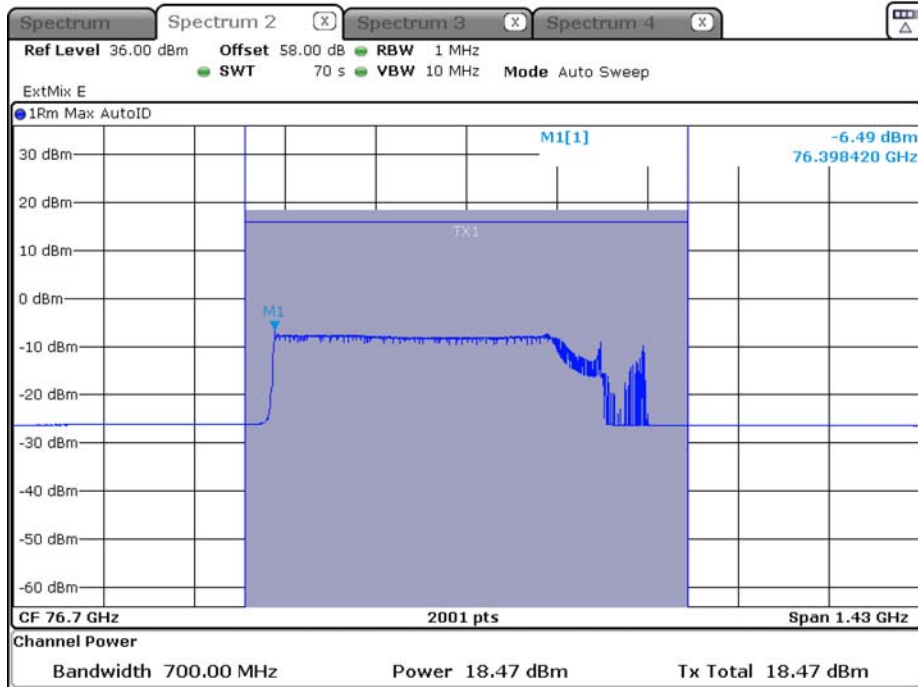

Date: 13.OCT.2020 14:25:39

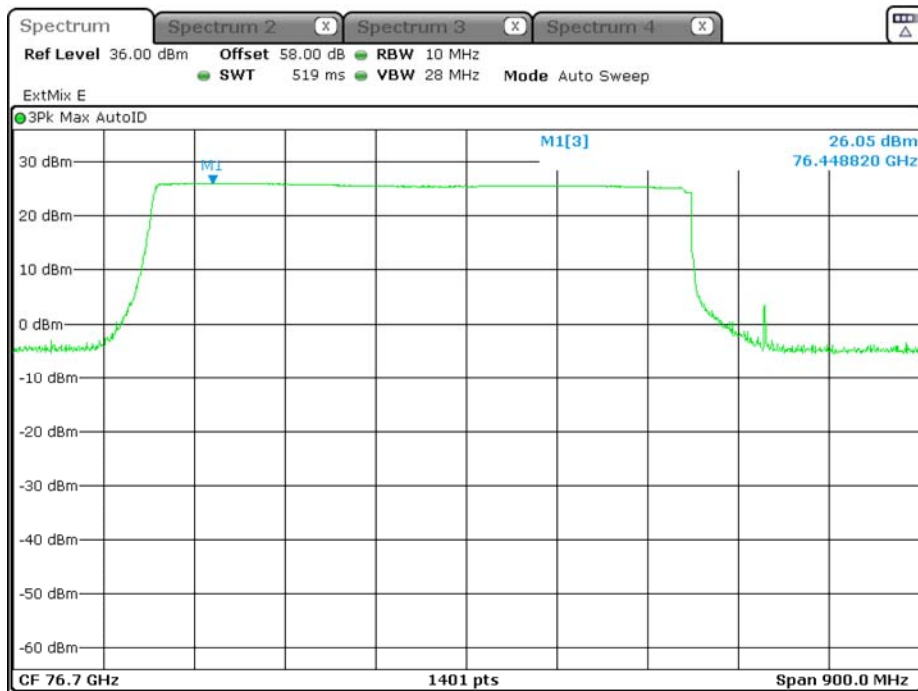

Date: 13.OCT.2020 14:27:03

425 MHz, Highest Channel

10.2 Occupied Bandwidth

Date of Test	2020-10-13
Operator	Alex Fink
Test Site	Fully anechoic room, cabin no. 2

Test Result	
<input checked="" type="checkbox"/>	Passed
<input type="checkbox"/>	Not Passed


Barometric pressure:	974 hPa
Relative humidity:	45 %
Ambient temperature:	21 °C

Specifications:	CFR 47, Part 2, Clause 2.1049 and 2.202(a) RSS-GEN Issue 4, Section 6.6 RSS-251, Issue 2, Section 7
Description:	The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured.
Operation mode:	The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured.
Comment :	Transmitting continuously on frequency with modulation bandwidth as stated in table below

Modulation		Lowest Channel	Middle Channel	Highest Channel	Limit	Note
175 MHz	f _L	76.049 GHz	76.408 GHz	76.736 GHz	≥ 76 GHz	NA
	f _H	76.266 GHz	76.626 GHz	76.955 GHz	≤ 77 GHz	
300 MHz	f _L	76.049 GHz	76.346 GHz	76.561 GHz	≥ 76 GHz	NA
	f _H	76.419 GHz	76.713 GHz	76.931 GHz	≤ 77 GHz	
425 MHz	f _L	76.052 GHz	76.283 GHz	76.395 GHz	≥ 76 GHz	NA
	f _H	76.569 GHz	76.802 GHz	76.914 GHz	≤ 77 GHz	


Note(s): NA

Plots taken during test

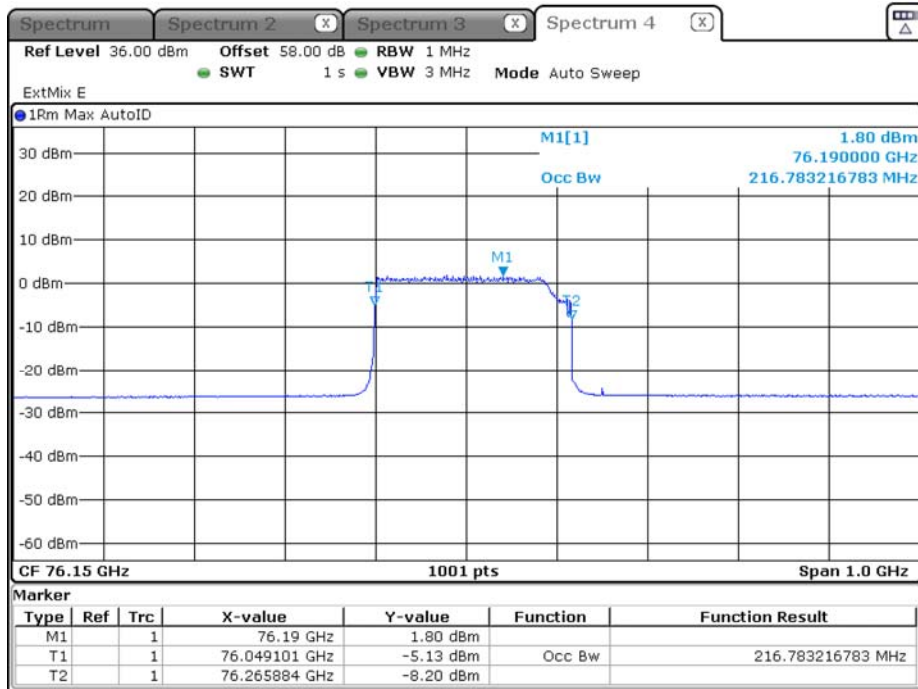


Date: 13.OCT.2020 10:16:56

175 MHz, Lowest Channel

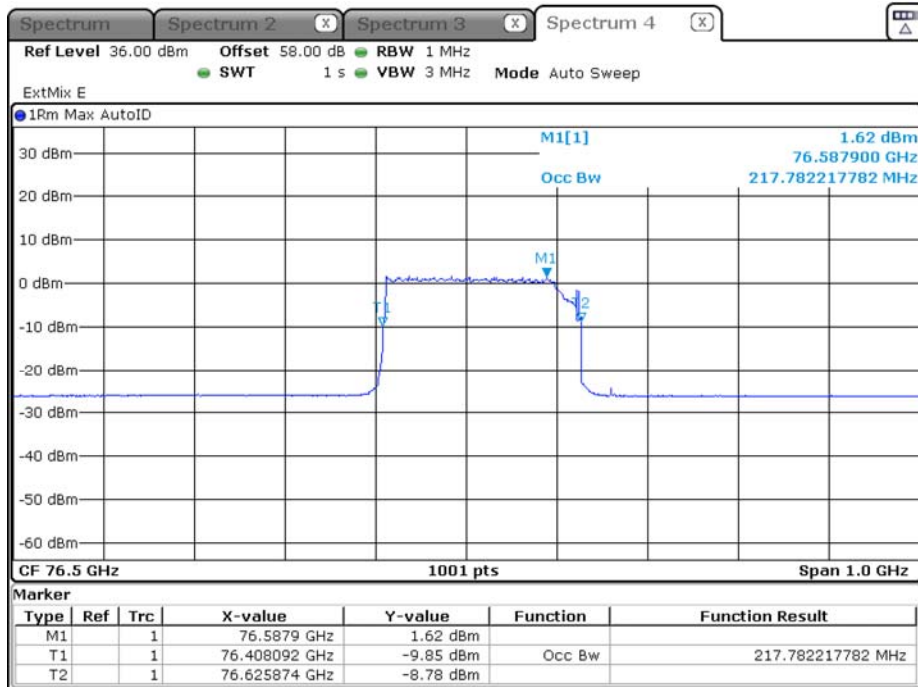


Date: 13.OCT.2020 10:35:03

175 MHz, Middle Channel

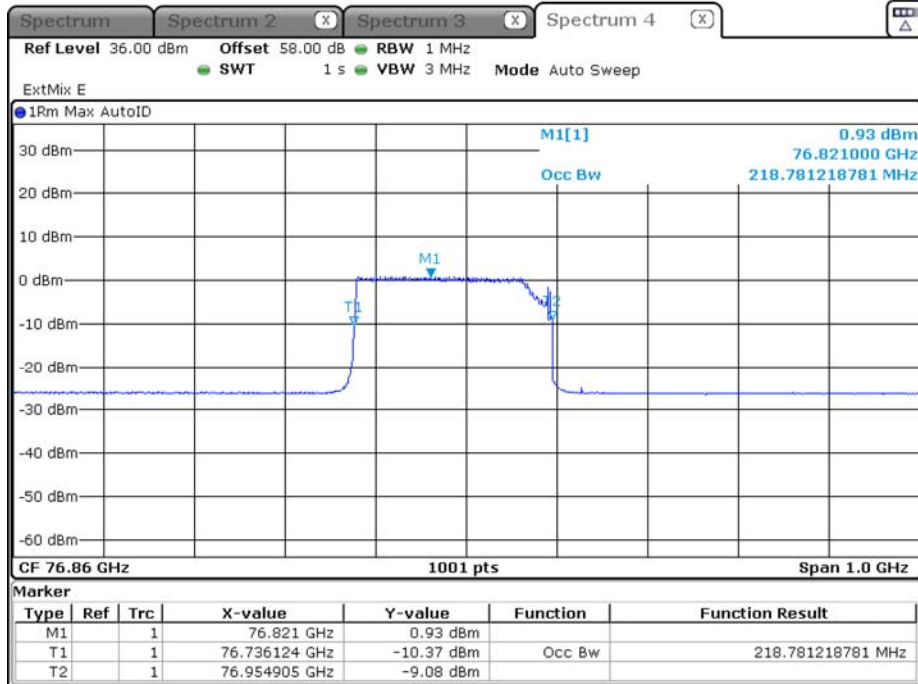


Date: 13.OCT.2020 11:07:47

175 MHz, Highest Channel

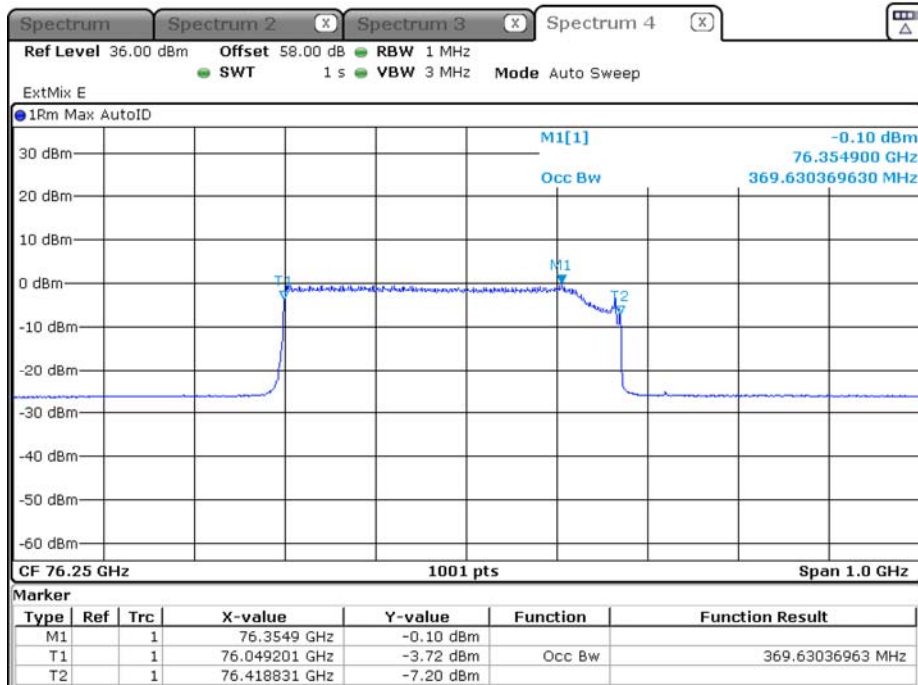


Date: 13.OCT.2020 11:47:30

300 MHz, Lowest Channel

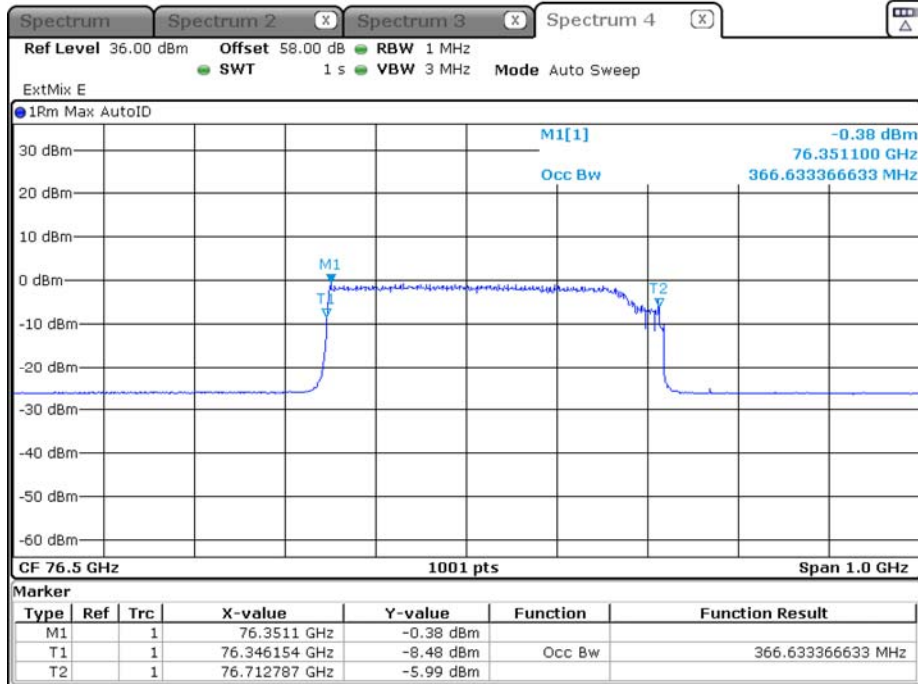


Date: 13.OCT.2020 12:08:54

300 MHz, Middle Channel

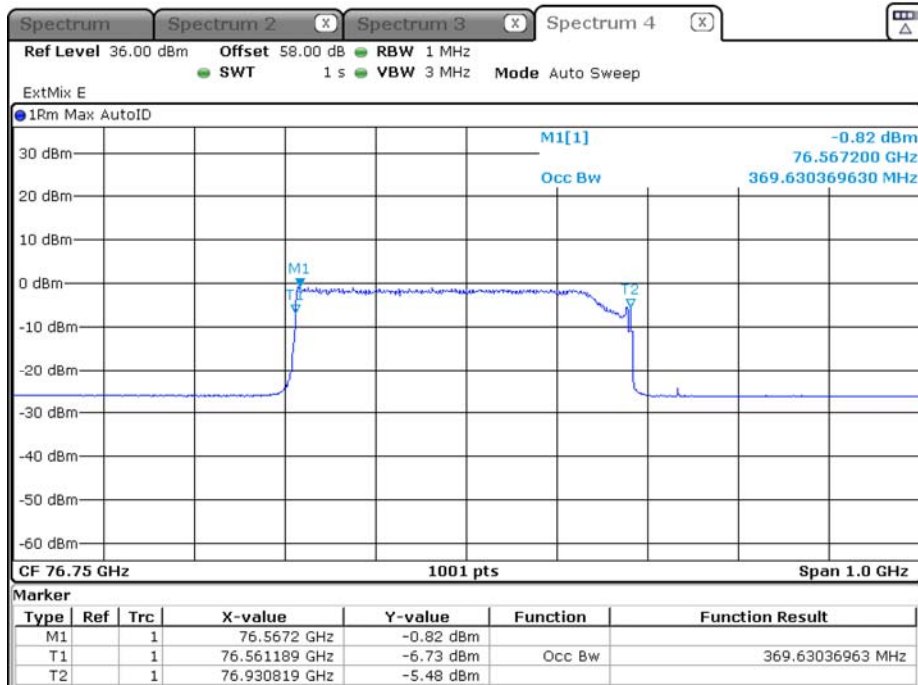


Date: 13.OCT.2020 13:00:02

300 MHz, Highest Channel

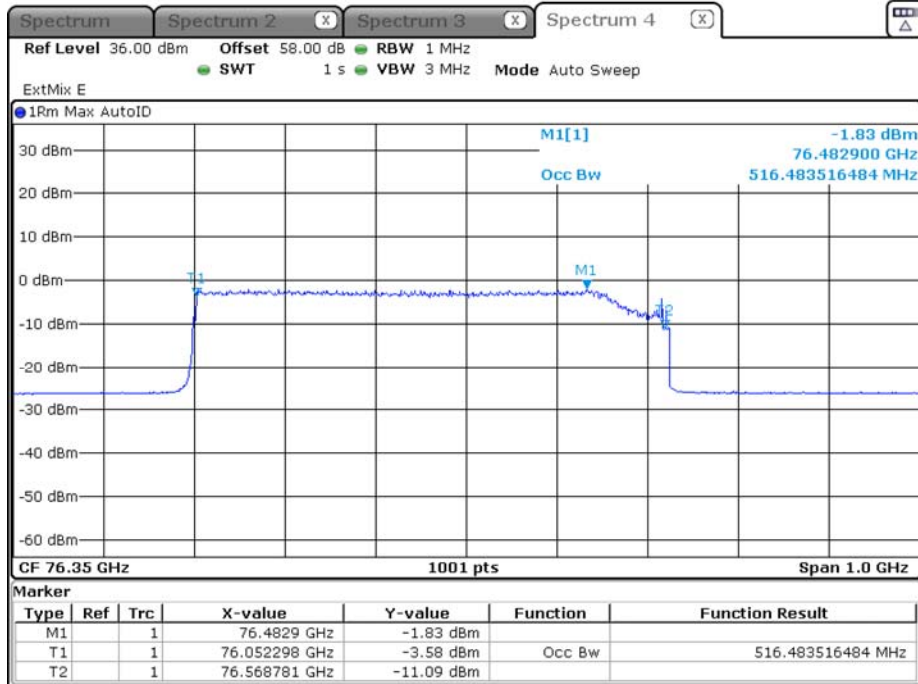


Date: 13.OCT.2020 13:27:22

425 MHz, Lowest Channel

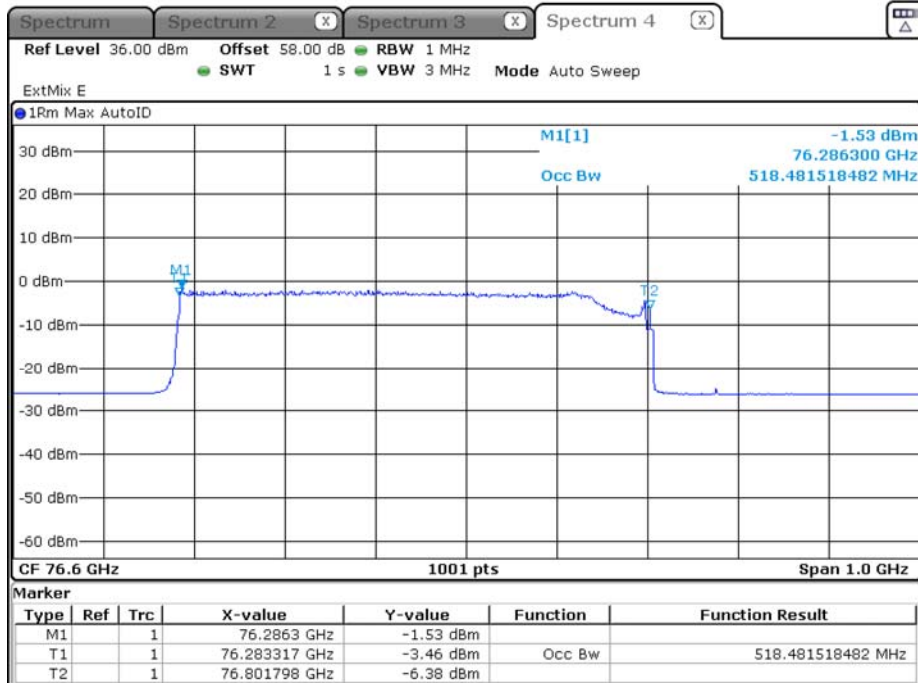

Date: 13.OCT.2020 13:35:12

425 MHz, Middle Channel

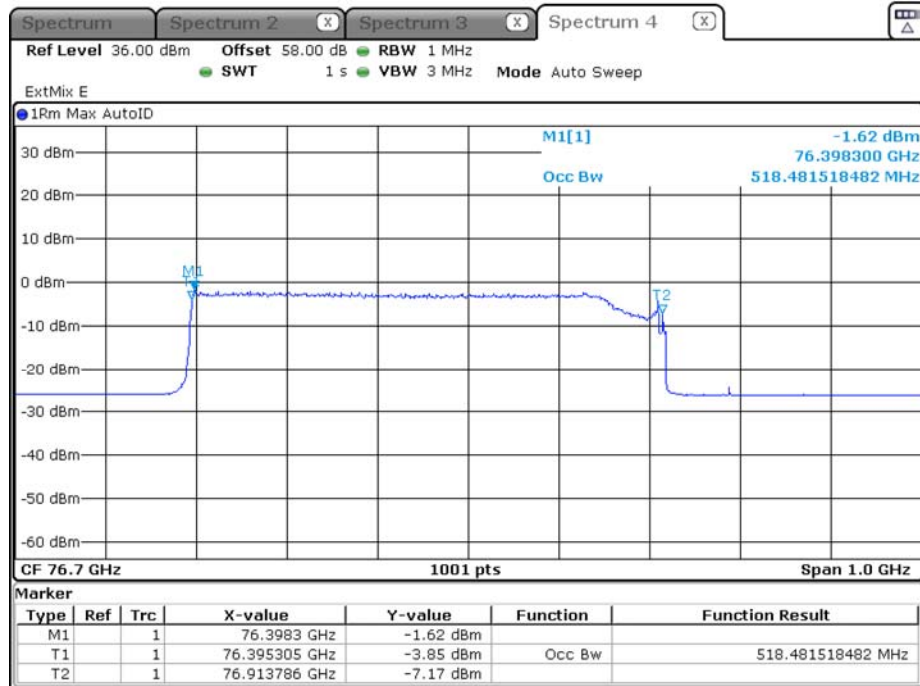

Date: 13.OCT.2020 14:03:07

425 MHz, Highest Channel



10.3 Spurious Radiated Emissions

Date of Test	2020-10-14 to 2020-10-21
Operator	Alex Fink
Test Site	Semi anechoic room, cabin no. 11 Fully anechoic room, cabin no. 2

Test Result	
<input checked="" type="checkbox"/>	Passed
<input type="checkbox"/>	Not Passed

Barometric pressure:	971 hPa
Relative humidity:	50 %
Ambient temperature:	19 °C

Specifications:	CFR 47, Part 95, Subpart M, § 95.3379(a) RSS-251 Issue 2, Section 10
Description:	The power density of any emissions outside the 76 – 81 GHz band shall consist solely of spurious emissions and shall not exceed the following: Radiated emissions below 40 GHz shall not exceed the field strength as shown in the Table 1. The power density of radiated of radiated emissions outside the 76 – 81 GHz band above 40 GHz shall not exceed the power density as shown in the tables on the next page.s
Operation mode:	This test was performed as radiated test in the frequency range 30 MHz to 300 GHz. No significant spurious emissions were observed. The test distance was 3 m in the frequency ranges 30 MHz to 8.2 GHz and 40 GHz to 110 GHz, 1 m in the frequency ranges 8.2 GHz to 40 GHz and 110 GHz to 220 GHz and 0.5 m in the frequency range 220 GHz to 300 GHz.
Comment :	The measurement below was done using EMC 32 V10.40.00 automated software. Based on the antenna power measurement this test was performed with 175 MHz BW on middle frequency and 425 MHz BW on lowest and highest frequency; these modes are considered to cover the worst case scenario. See plots for details.

Sample calculation of field final values:

$$\text{Final Value (dB}\mu\text{V/m)} = \text{Reading Value (dB}\mu\text{V)} + (\text{Antenna Correction Factor (dB/m)} + \text{Cable Correction Factor (dB)})$$