

ANT1:

Test Mode: IEEE 802.11b
Test CH1: 2412MHz



ANT2:

Test Mode: IEEE 802.11b
Test CH1: 2412MHz



Test CH6: 2437MHz



Test CH6: 2437MHz



Test CH11: 2462MHz




Test CH11: 2462MHz




ANT1:

Test Mode: IEEE 802.11g
Test CH1: 2412MHz

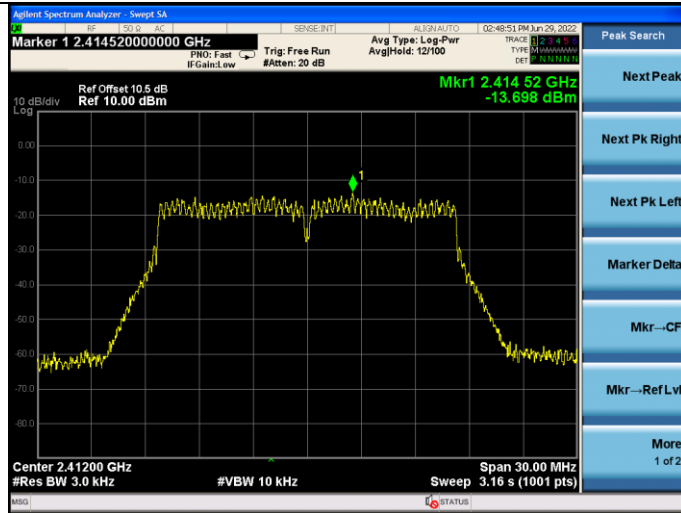


ANT2:


Test Mode: IEEE 802.11g
Test CH1: 2412MHz

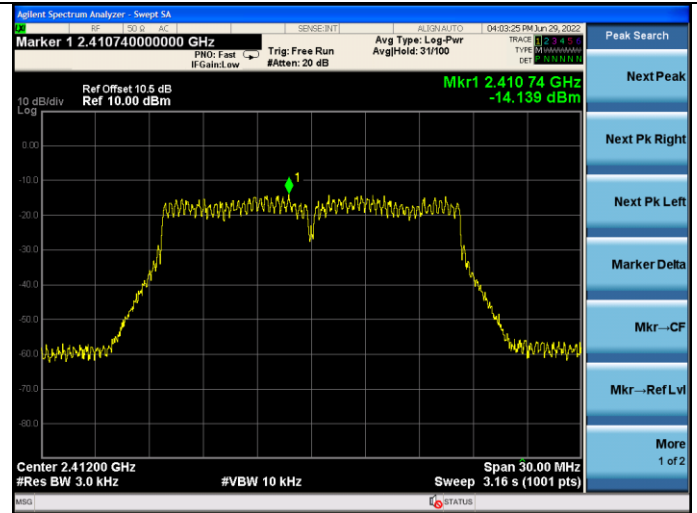


Test CH6: 2437MHz

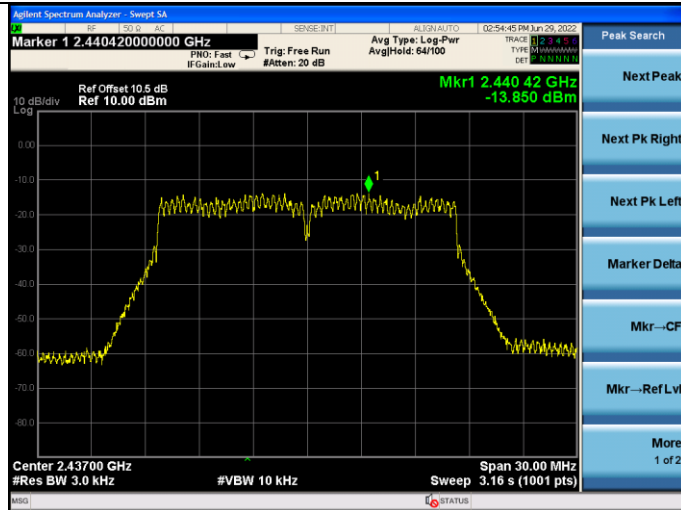


Test CH6: 2437MHz

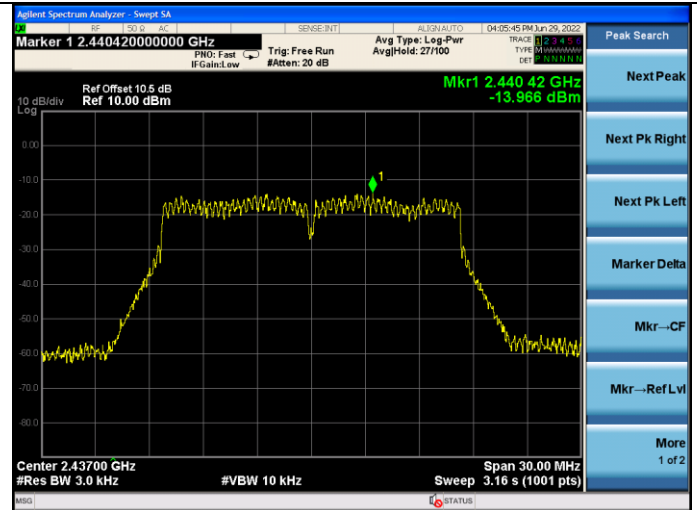

Test CH11: 2462MHz

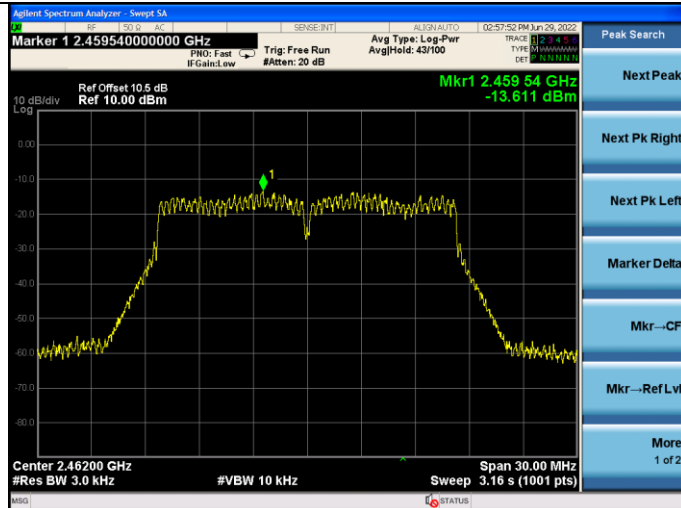


Test CH11: 2462MHz

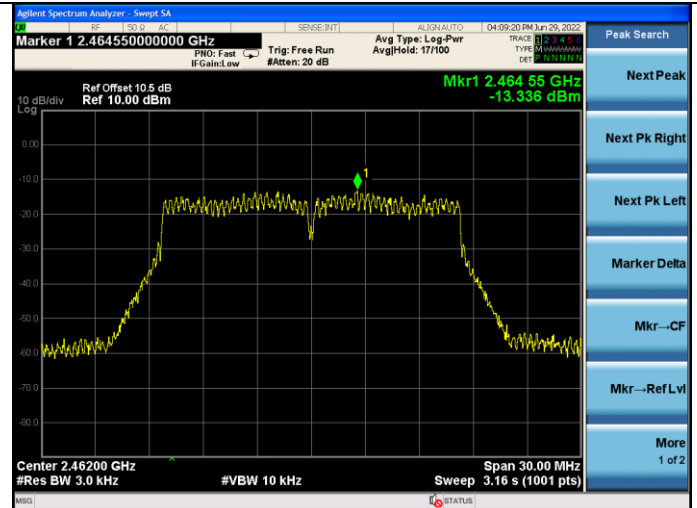


ANT1:

Test Mode: IEEE 802.11n HT20
Test CH1: 2412MHz

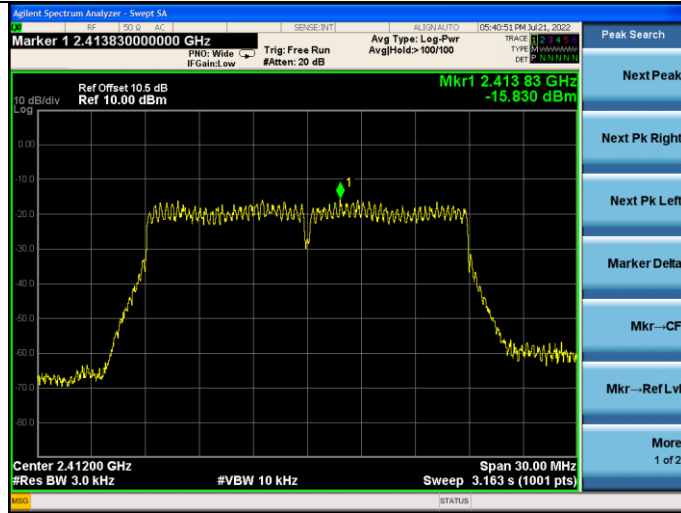


ANT2:


Test Mode: IEEE 802.11n HT20
Test CH1: 2412MHz

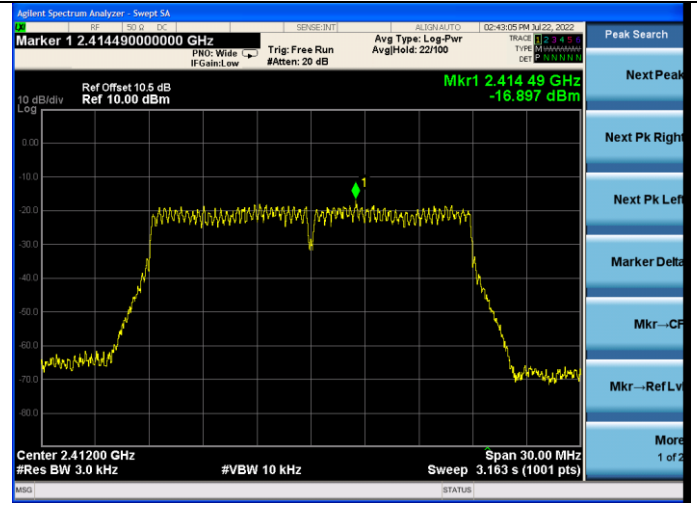


Test CH6: 2437MHz

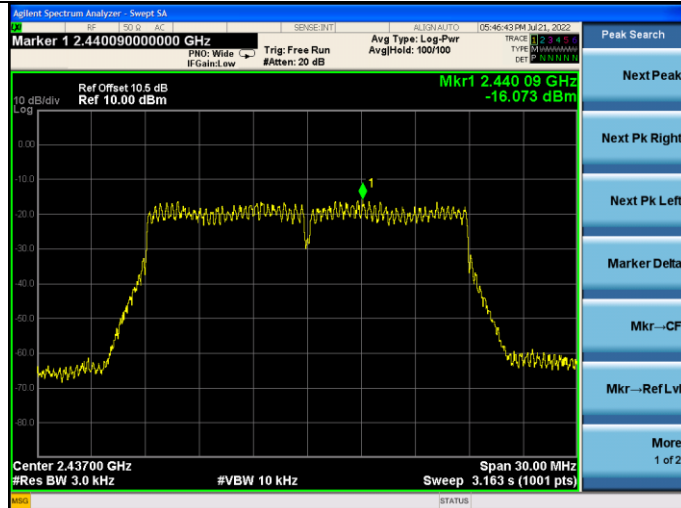


Test CH6: 2437MHz

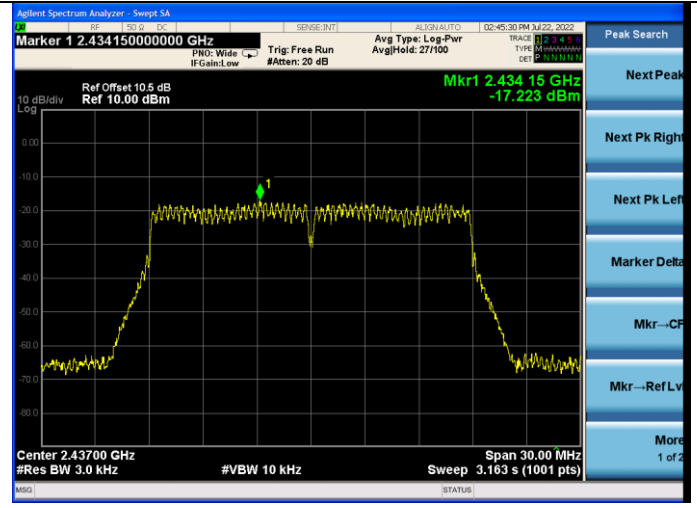

Test CH11: 2462MHz

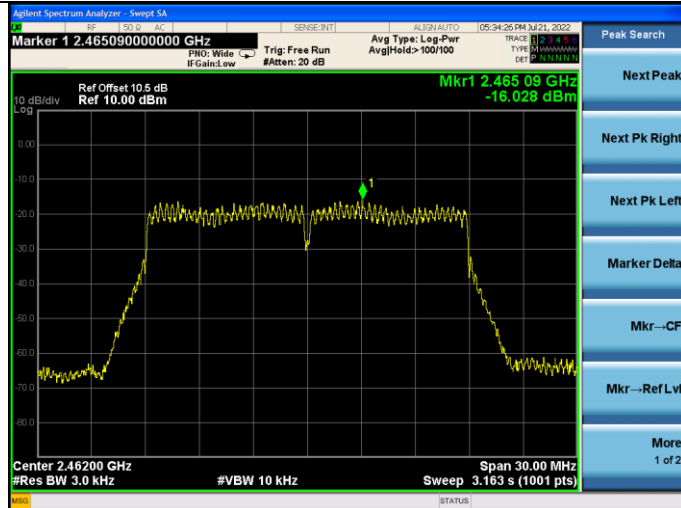


Test CH11: 2462MHz

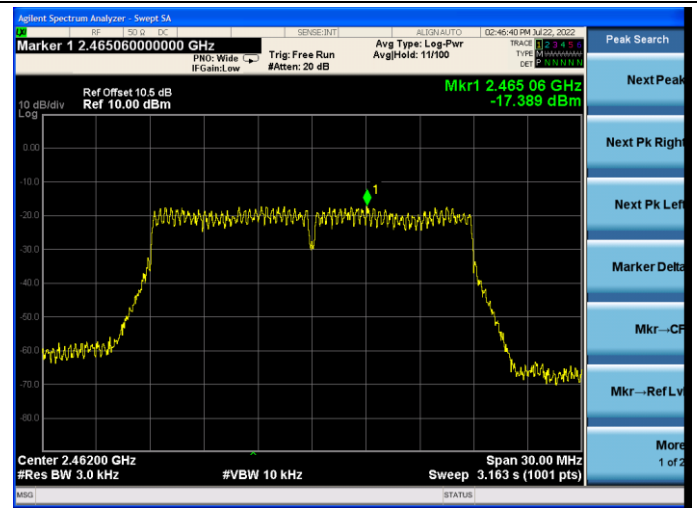


ANT1:

Test Mode: IEEE 802.11n HT40
Test CH3: 2422MHz

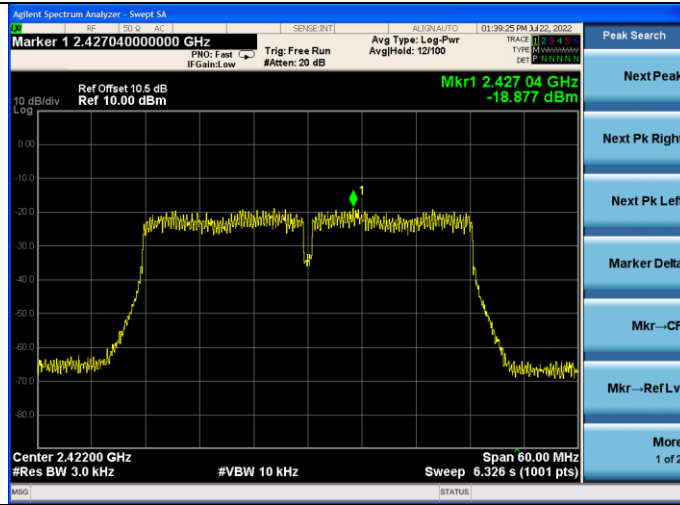


ANT2:


Test Mode: IEEE 802.11n HT40
Test CH3: 2422MHz

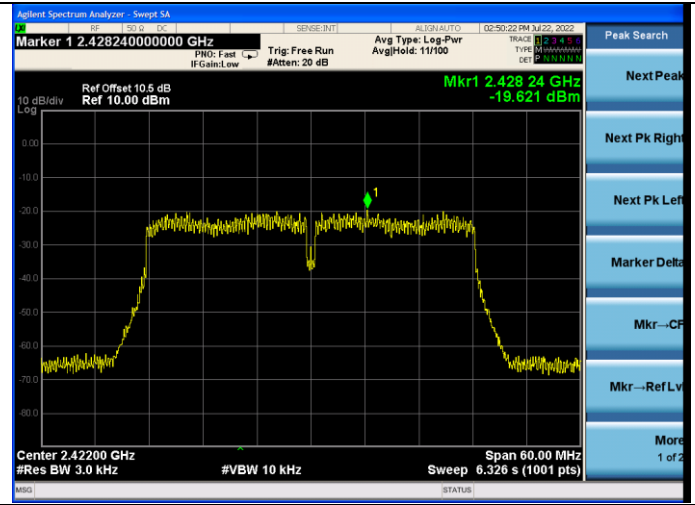


Test CH6: 2437MHz

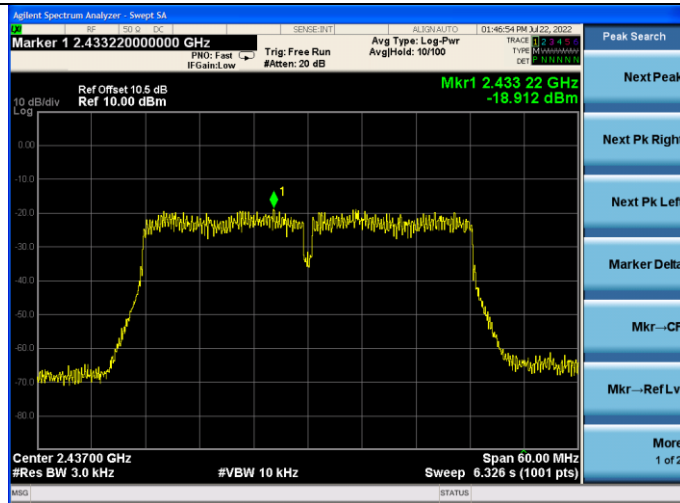


Test CH6: 2437MHz

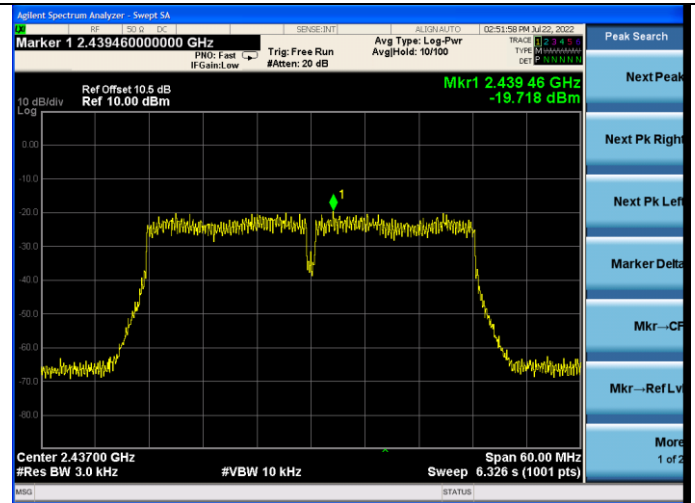

Test CH9: 2452MHz

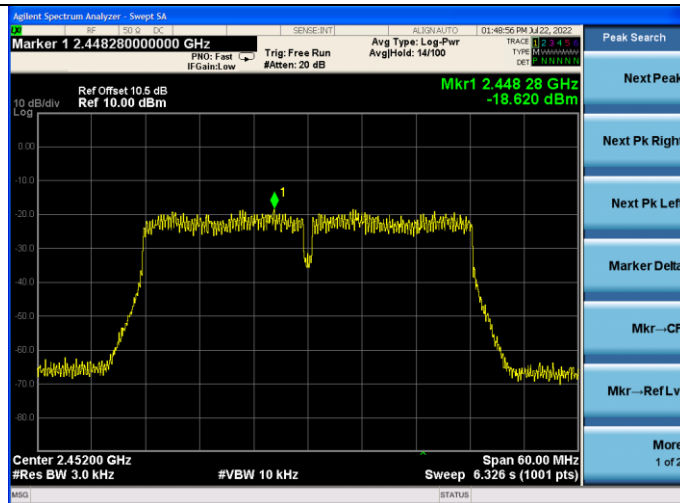

Test CH9: 2452MHz

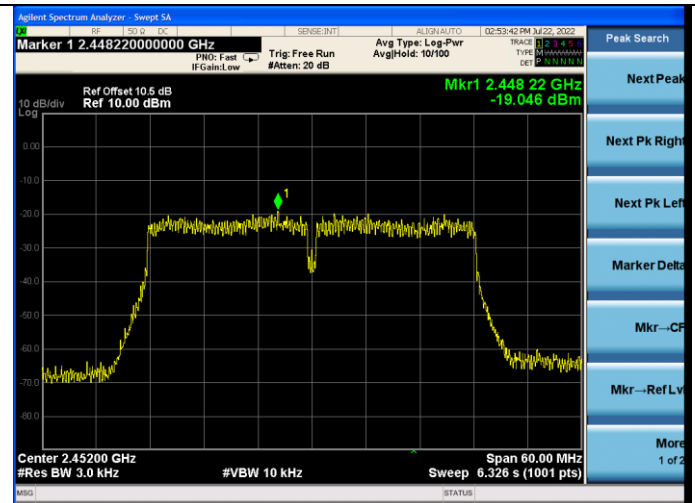

10. ANTENNA REQUIREMENT

10.1. Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

10.2. Antenna Connected Construction

The antennas used for this product are Chip antenna that no antenna other than that furnished by the responsible party shall be used with the device, the maximum peak gain of the transmit antenna is DTS Band: 2.23dBi.

11. DEVIATION TO TEST SPECIFICATIONS

[NONE]

..... **THE END**