



香港標準及檢定中心
The Hong Kong Standards and Testing Centre Ltd

Date : July 13, 1998

FCC ID: LU9-MGA921A

TECHNICAL REPORT
=====

- 1) Full Name of the Manufacturer of the Device
SUPERSONICS ELECTRIC COMPANY
- 2) Mailing Address of the Manufacturer of the Device

Guan Lan Industrial Area
Bao An
CHINA
- 3) Trade Name

MGA
- 4) Model Number

233404
- 5) Additional Model Numbers under which the Device will be Marketed

NIL
- 6) Copy of the Operating Instruction Furnished to the User

As enclosed





The Hong Kong Standards and Testing Centre Ltd.

Date: 1998-06-29
No.: WM1243/504

TEST REPORT

Page 1 of 8

APPLICANT: (CODE : 018309)

MGA Entertainment (H.K.) Ltd.
Unit 704-706, Energy Plaza, 92 Granville Road, Tsimshatsui East, Kowloon, Hong Kong.

DATE OF SAMPLES RECEIVED: 1998.06.13

DATE OF TESTING: 1998.06.20

DESCRIPTION OF SAMPLE(S):

A sample of product said to be:

Product: Walkie Talkie & Radio Control Car
Manufacturer: Supersonics Electric Company
Model Number: 233404
Brand Name: MGA
Rating: DC 6.0V ("AA" size battery x 4) and DC 9V ("6F22" size battery x 1)
Origin: China

INVESTIGATIONS REQUESTED:

Measurement to the relevant clauses of F.C.C. Rules and Regulations Part 15 Subpart B - Unintentional Radiator and Subpart C - Intentional Radiator.

RESULT/ REMARK: Please see attached sheet(s).

CONCLUSION:

From the measurement data obtained, the tested sample was considered to have COMPLIED with the clause 15.109(a) for the Receiver Section and for the Transmitter Section ANSI C63.4-1992 Section 12.1.1.1-2. with the clause 15.235 of Federal Communications Commission Rules and Regulations Part 15.

TEST EQUIPMENT AUDIT: Please see Appendix A

Testing Engineer

Verify by

Patrick Wong
for Managing Director

Conditions in Issuance of Test Report

1. This Report is issued in confidence to the client and it will be strictly treated as such by the Hong Kong Standards and Testing Centre Ltd. It may not be reproduced either in its entirety or in part and it may not be used for advertising. The client to whom the Report is issued may, however, show or send it, or a certified copy thereof prepared by the Hong Kong Standards and Testing Centre Ltd. to his customer, supplier or other persons directly concerned. The Hong Kong Standards and Testing Centre Ltd. will not, without the consent of the client, enter into any discussion or correspondence with any third party concerning the contents of the Report. 2. The report refers only to the sample tested and does not apply to the bulk, unless the sampling has been carried out by the Hong Kong Standards and Testing Centre Ltd. and is stated as such in the Report. 3. In the event of the improper use of the report, the Hong Kong Standards and Testing Centre Ltd. reserves the rights to withdraw it, and to adopt any other remedies which may be appropriate. 4. Samples submitted for testing are accepted on the understanding that the Report issued cannot form the basis of, or be the instrument for, any legal action against the Hong Kong Standards and Testing Centre Ltd. 5. The Hong Kong Standards and Testing Centre Ltd. will not be liable for or accept responsibility for any loss or damage howsoever arising from the use of information contained in any of its Reports or in any communication whatsoever about its said tests or investigations. 6. Applicants wishing to use the Report in court proceedings or arbitration shall inform the Hong Kong Standards and Testing Centre Ltd. to that effect prior to submitting the sample for testing.



The Hong Kong Standards and Testing Centre Ltd.

TEST REPORT

TEST SUMMARY

UNINTENTIONAL RADIATOR

- | | | |
|-------------------------------|--|----------------|
| (A) | Measurement of Radiated Emissions..... | Satisfactory |
| (B) | Line Conducted Voltage Test..... | Not applicable |
| *** INTENTIONAL RADIATOR*** : | | |
| (1) | Measurement of Emission of RF energy on the carrier frequency..... | Satisfactory |
| | Measurement of the out-of band emissions including harmonics..... | Satisfactory |
| (2) | Measurement of Emission Within Band Edges..... | Satisfactory |
| (3) | Measurement of Line-Conducted Voltage onto AC Power Line..... | Not applicable |

TEST DATA

Please refer to the attached result sheets.



The Hong Kong Standards and Testing Centre Ltd.

Date: 1998-06-29
No.: WM1243/504

TEST REPORT

Page 3 of 8

UNINTENTIONAL RADIATOR

(A) Measurement of Radiated Interference

TEST REFERENCE: FCC Rules Part 15 Subpart B section 15.109(a)

TEST CONDITION : Normal

TEST DATE : 1998.06.20

Freq. to which tuned	Freq of the emission	Polarization H-V	Meter reading (at 3m)		Antenna factor	Field Strength (at 3m)		FCC limit
			dB(μ V)	dB		dB(μ V/m)	μ V/m	@ μ V/m
49.860	49.9	<	1.0	+	15.0	< 16.0	< 6	100
	99.7	<	1.0	+	12.2	< 13.2	< 5	150
	149.6	<	1.0	+	9.8	< 10.8	< 3	150
	199.4	<	1.0	+	11.5	< 12.5	< 4	150
	249.3	<	1.0	+	15.9	< 16.9	< 7	200
	299.1	<	1.0	+	17.0	< 18.0	< 8	200
	349.0	<	1.0	+	17.2	< 18.2	< 8	200
	398.8	<	1.0	+	18.8	< 19.8	<10	200
	448.7	<	1.0	+	19.7	< 20.7	<11	200
	498.6	<	1.0	+	20.6	< 21.6	<12	200
	548.4	<	1.0	+	22.2	< 23.2	<14	200
	598.3	<	1.0	+	23.4	< 24.4	<17	200
	648.1	<	1.0	+	23.5	< 24.5	<17	200
	698.0	<	1.0	+	25.0	< 26.0	<20	200
	747.8	<	1.0	+	26.2	< 27.2	<25	200
	797.7	<	1.0	+	27.2	< 28.2	<25	200
	847.5	<	1.0	+	27.2	< 28.2	<25	200
	897.5	<	1.0	+	27.2	< 28.2	<25	200
	947.2	<	1.0	+	27.8	< 28.8	<27	200
	997.1	<	1.0	+	28.5	< 29.5	<27	500

=====SUMMARY=====

All data is within limits

Broad-band Antennas were used and both polarizations of emissions were measured

Polarizations at highest reading indicated as:

H -- Horizontal V -- Vertical



The Hong Kong Standards and Testing Centre Ltd.

Date: 1998-06-29
No.: WM1243/504

TEST REPORT

Page 4 of 8

NOTES FOR THE RADIATION MEASUREMENT

- (1) Test site facility:
Open field test site located at Taipo (Hong Kong) with a metal ground plane on filed with the FCC pursuant to section 2.948 of the FCC Rules.
- (2) Distance between the ET and measuring antenna:
3 meters.
- (3) Measuring instrumentation's:
CISPR Quasi-peak type field strength meter (25 MHz - 1000 MHz.). 6 dB bandwidth set at 120 KHz. Also, peak level of the fundamental emissions was measured in order to determine compliance with the 20dB peak to average limit specified in Section 15.35(b) of the FCC new Rules.
- (4) Measuring antenna:
Broad band antenna for the frequency range 25-1000 MHz, connected with 10 meters coaxial cable. Cable loss of the coaxial cable. included in the Antenna Factor for measurement data. The antenna are capable of measuring both horizontal and vertical polarizations.
- (5) Frequency range scanned:
The frequency range from 25 MHz to 1000 MHz had been searched. Readings of the highest emissions relating to the limit were reported as above.
- (6) Arrangement of EUT:
During the test, the sample was operated at rated supply voltage and arranged for maximum emissions.
- (7) Measuring Procedure:
In accordance with the relevant clauses of the FCC Rules Part 15 section 15.109(a) and ANSI C63.4:1992 section 12.1.1.1-2.
- (8) Measuring Uncertainty:
The calculated uncertainty for measurement performed at 3M test distance are:-
30MHz to 200MHz = $\pm 3.7\text{dB}$, 200MHz to 1000MHz = $+ 3.0\text{dB}/-2.7\text{dB}$.

Remark: Purpose of this test is to provide the Applicant with the necessary test data of their device for the submission to FCC with application for Equipment Authorization under FCC's Equipment Authorization Program. This test itself is not an Approval Test.



The Hong Kong Standards and Testing Centre Ltd.

TEST REPORT

Page 5 of 8

Date: 1998-06-29
No.: WM1243/504

** INTENTIONAL RADIATOR ***

(1) Measurement of Radiated Interference

TEST REFERENCE: FCC Rules Part 15 Subpart Section 15.235(49.82-49.90 MHz)
TEST CONDITION : Normal
TEST DATE : 1998.06.20

Emission of RF energy on the carrier frequency -- 49.860 MHz
(PEAK VALUE)

Emission	Meter	Polarization	Antenna	Field Strength	FCC Limit
Frequency	Reading	H-V	Factor	dB($\mu\text{V}/\text{m}$) (at 3m)	$\mu\text{V}/\text{m}$
49.90	44.3	H	15.0	+ 59.3	922.6
MHz	dB(μV)		dB	dB($\mu\text{V}/\text{m}$)	100000

Emission of RF energy on the carrier frequency -- 49.860 MHz
(AVERAGE VALUE)

Emission	Meter	Polarization	Antenna	Field Strength	FCC Limit
Frequency	Reading	H-V	Factor	dB($\mu\text{V}/\text{m}$) (at 3m)	$\mu\text{V}/\text{m}$
49.90	42.8	H	15.0	+ 57.8	776.2
MHz	dB(μV)		dB	dB($\mu\text{V}/\text{m}$)	10000

... to be continued



The Hong Kong Standards and Testing Centre Ltd.

TEST REPORT

Page 6 of 8

Date: 1998-06-29
No.: WM1243/504

*** INTENTIONAL RADIATOR ***

(1) Measurement of Radiated Interference .. Continued ..

TEST REFERENCE: FCC Rules Part 15 Section 15.235(49.82-49.90 MHz)
TEST CONDITION : Normal
TEST DATE : 1998.06.20

The out-of-band emissions, including harmonics (25-1000 MHz)
(CISPR VALUE)

Emission	Meter	Reading	H-V	Antenna	Field Strength	FCC Limit
Frequency	dB(μV)	Factor	dB	dB(μV/m)	μV/m	μV/m

99.7	9.8	H	+	12.2	22.0	12.6
149.6	4.4	H	+	9.8	14.2	5.1
199.4	22.2	H	+	11.5	33.7	48.4
249.3	11.6	H	+	15.9	27.5	23.7
299.1	1.0		+	17.0	< 18.0	< 7.9
348.8	1.0		+	17.2	< 18.2	< 8.1
398.6	1.0		+	18.8	< 19.8	< 9.8
448.5	1.0		+	19.7	< 20.7	< 10.8
498.3	1.0		+	20.6	< 21.6	< 12.0
543.1	1.0		+	22.2	< 23.2	< 14.5
598.1	1.0		+	23.4	< 24.4	< 16.6
647.8	1.0		+	23.5	< 24.5	< 16.8
697.4	1.0		+	25.0	< 26.0	< 20.0
747.8	1.0		+	26.2	< 27.2	< 22.9
797.7	1.0		+	27.2	< 28.2	< 25.7
847.5	1.0		+	27.2	< 28.2	< 25.7
897.4	1.0		+	27.2	< 28.2	< 25.7
947.2	1.0		+	27.8	< 28.8	< 27.5
997.1	1.0		+	28.5	< 29.5	< 29.9

=====SUMMARY=====

data is within limits

Broad-band Antennas were used and both polarizations of emissions were measured.
polarizations at highest reading indicated as:
H -- Horizontal
V -- Vertical



The Hong Kong Standards and Testing Centre Ltd.

TEST REPORT

Page 7 of 8

Date: 1998-06-29
No.: WM1243/504


*** INTENTIONAL RADIATOR ***

(2) Measurement of Emissions Within Band Edges

TEST REFERENCE: FCC Rules Part 15 section 15.235(49.82-49.90 MHz)

TEST CONDITION: Normal

TEST DATE : 1998.06.20

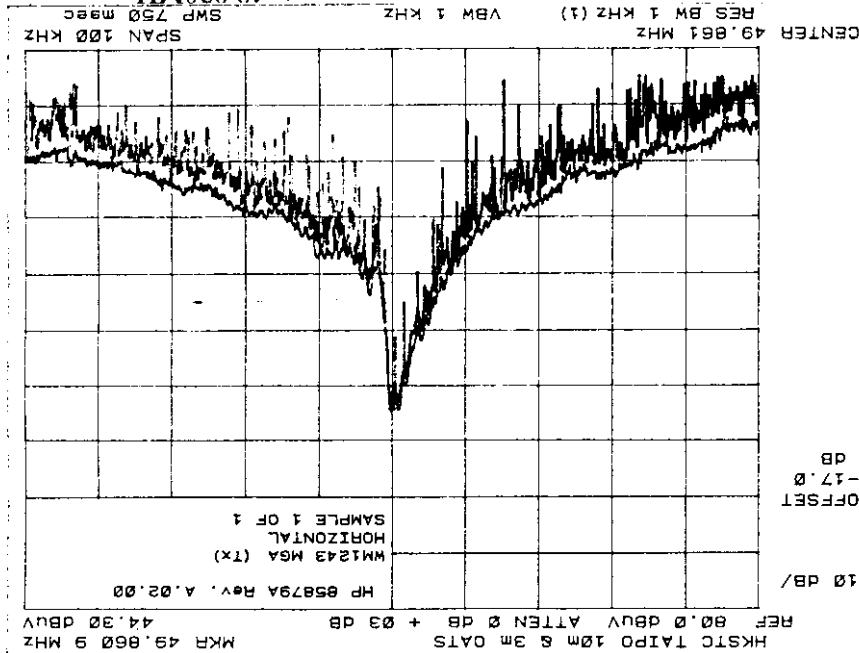

RESULTS AND NOTES

L: FCC Lower Band Edge

H: FCC Higher Band Edge

C: Unmodulated carrier at frequency

D: No. of dB from unmodulated carrier

SPECTRUM ANALYZER SETTINGS

Resolution bandwidth : 1.0KHz

Frequency span : 10.0KHz/div

No. of dB/div : 10.0dB/div

FCC Limit

Minimum No. of dB from unmodulated carrier required : 26.0dB

SUMMARY

All data is within limits



The Hong Kong Standards and Testing Centre Ltd.

TEST REPORT

Page 8 of 8

No.: WM1243/504

Date: 1998-06-29

NOTES FOR THE RADIATION MEASUREMENT

- (1) Test site facility:
Open field test site located at Taipo (Hong Kong) with a metal ground plane on filed with the FCC pursuant to section 2.948 of the FCC rules.
- (2) Distance between the EUT and measuring antenna:
3 meters.
- (3) Measuring instruments:
CISPR Quasi-peak type field strength meter (25 MHz - 1000 MHz). 6 dB bandwidth set at 120KHz. Also, peak level of the fundamental emissions was measured in order to determine compliance with the 20dB peak to average limit specified in Section 15.35(b) of the FCC new Rules.

- (4) Measuring antenna:
Broad band antenna for the frequency range 25-1000 MHz, connected with 10 meters coaxial cable. Cable loss of the coaxial cable, included in the Antenna Factor for measurement data. The antenna are capable of measuring both horizontal and vertical polarizations.

- (5) Frequency range scanned:
The frequency range from 25 MHz to 1000 MHz had been searched. Readings of the highest emissions relating to the limit were reported as above.

- (6) Arrangement of EUT:
During the test, the sample was operated at rated supply voltage and arranged for maximum emissions.

- (7) Measuring Procedure:
In accordance with the relevant clauses of the FCC Rules Part 15 section 15.235.

- (8) Measuring Uncertainty:
The calculated uncertainty for measurement performed at 3M test distance are:-
30MHz to 200MHz = $\pm 3.7\text{dB}$, 200MHz to 1000MHz = $\pm 3.0\text{dB}/-2.7\text{dB}$.

Remark: Purpose of this test is to provide the Applicant with the necessary test data of their device for the submission to FCC with application for Equipment Authorization under FCC's Equipment Authorization Program. This test itself is not an Approval Test.

*****End of Document*****



The Hong Kong Standards and Testing Centre Ltd.

APPENDIX A

Page A1 of A1

Date: 1998-06-29
No.: WM1243/504

TEST EQUIPMENT AUDIT

Radiated Emission

EQP NO.	DESCRIPTION	MANUFACTURER	MODEL NO.	SERIAL NO.	LAST CAL
EM007	SPECTRUM ANALYZER	H P	HP85660B	3144A21192	28/05/98
EM008	SPECTRUM ANALYZER DISPLAY	H P	HP85662A	3144A20514	28/05/98
EM009	QUASI PEAK ADAPTOR	H P	HP85650A	3303A01702	28/05/98
EM010	RF PRESELECTOR	H P	HP85685A	3221A01410	28/05/98
EM011	ATTENUATOR/SWITCH	H P	HP11713A	2508A10595	28/05/98
EM012	PRE-AMPLIFIER	H P	HP8449B	3008A00262	28/05/98
EM013	CONTROLLER (COMPUTER), COLOR MONITOR, KEYBOARD & MOUSE FLOPPY DRIVE	H P H P H P	HP9000 HP A1097C HP9133L	6226A60314 3151J39517 2623A02468	CM 28/05/98
EM017	ANTENNA	ARA INC.	LPB-2513/A	1069	31/12/97
EM072	SIGNAL GENERATOR	HP	8640B	1948A11892	30/03/98
EM083	HKSTC OPEN AREA TEST SITE	HKSTC	N/A	N/A	16/02/98

ABBREVIATIONS:

CM = Corrective Maintenance
N/A = Not Applicable