

Date: 2004-01-10

TEST REPORT

Page 1 of 19

No.: HM112422

FCC PART 15 SUBPART C CERTIFICATION REPORT

FOR LOW POWER TRANSMITTER

TEST REPORT No.: HM112422

Equipment Under Test [EUT]:

Model Number:

Applicant:

FCC ID :

Spiderman 2 RC Racing – 27MHz

267843

MGA Entertainment (HK) Ltd.

LU9267843

Date: 2004-01-10

TEST REPORT

Page 2 of 19

No.: HM112422

CONTENT:

| | | |
|-------------------|---|------------------|
| Cover | Page 1 of 19 | |
| Content | Page 2-3 of 19 | |
| Conclusion | Page 4 of 19 | |
| <u>1.0</u> | <u>General Details</u> | |
| 1.1 | Test Laboratory | Page 5 of 19 |
| 1.2 | Applicant Details Applicant HKSTC Code Number for Applicant Manufacturer | Page 5 of 19 |
| 1.3 | Equipment Under Test [EUT] Description of EUT operation | Page 6 of 19 |
| 1.4 | Date of Order | Page 6 of 19 |
| 1.5 | Submitted Sample | Page 6 of 19 |
| 1.6 | Test Duration | Page 6 of 19 |
| 1.7 | Country of Origin | Page 6 of 19 |
| 1.8 | Additional Information of EUT | Page 7 of 19 |
| <u>2.0</u> | <u>Technical Details</u> | |
| 2.1 | Investigations Requested | Page 8 of 19 |
| 2.2 | Test Standards and Results Summary | Page 8 of 19 |
| <u>3.0</u> | <u>Test Results</u> | |
| 3.1 | Emission | Page 9-12 of 19 |
| 3.2 | Bandwidth Measurement | Page 13-14 of 19 |

Date: 2004-01-10

TEST REPORT

Page 3 of 19

No.: HM112422

Appendix A

List of Measurement Equipment

Page 15 of 19

Appendix B

Duty Cycle Correction During 100 msec

Page 16-17 of 19

Appendix C

Photographs

Page 18-19 of 19

Date: 2004-01-10

TEST REPORT

Page 4 of 19

No.: HM112422

CONCLUSION

The submitted product was deemed to have COMPLIED with the requirements of Federal Communications Commission [FCC] Rules and Regulations Part 15. The tests were performed in accordance with the standards described above and on Section 2.2 in this Test Report.

Verified by
Ivan Toa

K C Lee
for Chief Executive

Date: 2004-01-10

TEST REPORT

Page 5 of 19

No.: HM112422

1.0 **General Details**

1.1 **Test Laboratory**

The Hong Kong Standards and Testing Centre Ltd.
EMC Laboratory
10 Dai Wang Street, Taipo Industrial Estate
New Territories, Hong Kong

Telephone: 852 2666 1888
Fax: 852 2664 4353

1.2 **Applicant Details** **Applicant**

MGA Entertainment (HK) Ltd.
Room 901 Energy Plaza, 92 Granville Road,
Tsimshatsui East, Kowloon, Hong Kong.

HKSTC Code Number for Applicant

MGE001

Manufacturer

N/A

Date: 2004-01-10

TEST REPORT

Page 6 of 19

No.: HM112422

1.3 Equipment Under Test [EUT]

Description of Sample

Product: Spiderman 2 RC Racing – 27MHz
Manufacturer: N/A
Brand Name: N/A
Model Number: 267843
Input Voltage: 4.5Vd.c (“AAA” size battery x 3)

1.3.1 Description of EUT Operation

The Equipment Under Test (EUT) is an MGA Entertainment (HK) Ltd., Spiderman 2 RC Racing – 27MHz. The transmitter is a 2 button transmitter. The EUT continues to transmit while button is being pressed, Modulation by IC. and tape is pulses modulation.

1.4 Date of Order

2003-12-22

1.5 Submitted Sample(s):

2 Samples per model

1.6 Test Duration

2004-01-06

1.7 Country of Origin

China

Date: 2004-01-10

TEST REPORT

Page 7 of 19

No.: HM112422

1.8 Additional Information of EUT

| | Submitted | Not Available |
|------------------------------------|-------------------------------------|--------------------------|
| User Manual | <input checked="" type="checkbox"/> | <input type="checkbox"/> |
| Part List | <input checked="" type="checkbox"/> | <input type="checkbox"/> |
| Circuit Diagram | <input checked="" type="checkbox"/> | <input type="checkbox"/> |
| Printed Circuit Board [PCB] Layout | <input checked="" type="checkbox"/> | <input type="checkbox"/> |
| Block diagram | <input checked="" type="checkbox"/> | <input type="checkbox"/> |
| FCC ID Label | <input checked="" type="checkbox"/> | <input type="checkbox"/> |

Date: 2004-01-10

TEST REPORT

Page 8 of 19

No.: HM112422

2.0 Technical Details

2.1 Investigations Requested

Perform ElectroMagnetic Interference measurement in accordance with FCC 47CFR [Codes of Federal Regulations] Part 15 and ANSI C63.4:2000 for FCC Certification.

2.2 Test Standards and Results Summary Tables

| EMISSION Results Summary | | | | | | |
|--|------------------|-----------------|------------------|-------------------------------------|--------------------------|-------------------------------------|
| Test Condition | Test Requirement | Test Method | Class / Severity | Test Result | | |
| | | | | Pass | Failed | N/A |
| Field Strength of Fundamental Emissions & Spurious Emissions | FCC 47CFR 15.227 | ANSI C63.4:2000 | N/A | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| Radiated Emissions, 30MHz to 1GHz | FCC 47CFR 15.209 | ANSI C63.4:2000 | Class B | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| Conducted Emissions on AC, 0.15MHz to 30MHz | FCC 47CFR 15.207 | ANSI C63.4:2000 | Class B | <input type="checkbox"/> | <input type="checkbox"/> | <input checked="" type="checkbox"/> |

Note: N/A - Not Applicable

3.0 Test Results

3.1 Emission

3.1.1 Radiated Emissions (30 – 1000MHz)


| | |
|--------------------|--------------------------|
| Test Requirement: | FCC 47CFR 15.109 Class A |
| Test Method: | ANSI C63.4:2000 |
| Test Date: | 2004-01-06 |
| Mode of Operation: | On mode |

Test Method:

The sample was placed 0.8m above the ground plane on the OATS *. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case are shown in Test Results of the following pages.

*: OATS [Open Area Test Site] located at HKSTC with a metal ground plane filed with the FCC pursuant to section 2.948 of the FCC rules, with Registration Number: 90657.

Test Setup:

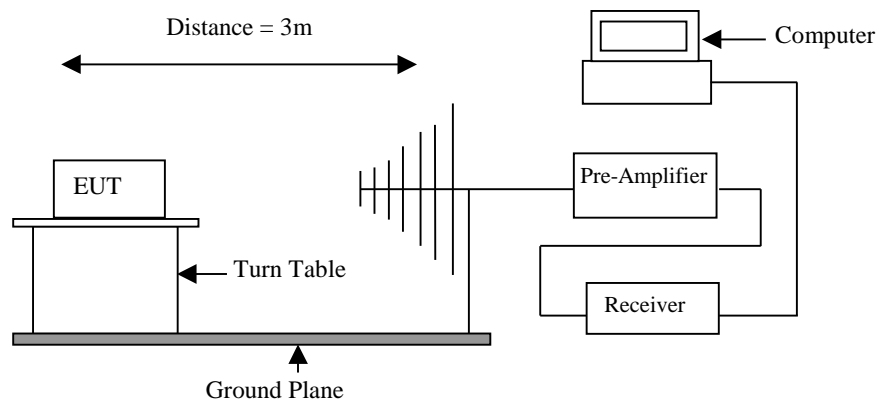

Limits for Field Strength of Fundamental Emissions [FCC 47CFR 15.227]:

| Frequency Range of Fundamental [MHz] | Field Strength of Fundamental Emission [Peak] [$\mu\text{V}/\text{m}$] | Field Strength of Fundamental Emission [Average] [$\mu\text{V}/\text{m}$] |
|---|--|---|
| 26.96-27.28 | 100,000 | 10,000 |

Results:

| Field Strength of Fundamental Emissions Peak Value | | | | | | |
|---|---|--|---|--|-------------------------------------|------------------|
| Frequency MHz | Measured Level @3m dB $\mu\text{V}/\text{m}$ | Correction Factor dB $\mu\text{V}/\text{m}$ | Field Strength dB $\mu\text{V}/\text{m}$ | Field Strength $\mu\text{V}/\text{m}$ | Limit @3m $\mu\text{V}/\text{m}$ | E-Field Polarity |
| 27.15 | 47.20 | 21.9 | 69.1 | 2,851.0 | 100,000 | Vertical |

| Field Strength of Fundamental Emissions Average | | | | | | |
|--|---|--|---|--|-------------------------------------|------------------|
| Frequency MHz | Measured Level @3m dB $\mu\text{V}/\text{m}$ | Correction Factor dB $\mu\text{V}/\text{m}$ | Field Strength dB $\mu\text{V}/\text{m}$ | Field Strength $\mu\text{V}/\text{m}$ | Limit @3m $\mu\text{V}/\text{m}$ | E-Field Polarity |
| *27.145 | 42.4 | 21.9 | 64.3 | 1,640.6 | 10,000 | Vertical |

According to FCC 47CFR15.35, the limit on the radio frequency emissions as measured using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit for the frequency being investigated unless a different peak emission limit is otherwise specified in the rules.

Remarks:

*: Adjusted by Duty Cycle = -4.8dB

Correction Factor included Antenna Factor and Cable Attenuation.

Calculated measurement uncertainty : 30MHz to 1GHz $\pm 5.7\text{dB}$

Date: 2004-01-10

TEST REPORT

Page 11 of 19

No.: HM112422

Limits for Radiated Emissions [FCC 47 CFR 15.209 Class B]:

| Frequency Range [MHz] | Quasi-Peak Limits [$\mu\text{V/m}$] |
|-----------------------|---------------------------------------|
| 30-88 | 100 |
| 88-216 | 150 |
| 216-960 | 200 |
| Above960 | 500 |

The emission limits shown in the above table are based on measurement employing a CISPR quasi-peak detector and above 1000MHz are based on measurements employing an average detector.

Results:

| Radiated Emissions Quasi-Peak | | | | | | |
|----------------------------------|---|--|---|--------------------------------------|------------------------------|---------------------|
| Frequency MHz | Measured Level @3m dB $\mu\text{V/m}$ | Correction Factor dB $\mu\text{V/m}$ | Field Strength dB $\mu\text{V/m}$ | Field Strength $\mu\text{V/m}$ | Limit @3m $\mu\text{V/m}$ | E-Field Polarity |
| 54.29 | 24.1 | 10.1 | 34.2 | 51.3 | 150 | Vertical |
| 81.44 | 23.1 | 9.5 | 32.6 | 42.7 | 150 | Horizontal |
| 108.58 | 24.9 | 10.7 | 35.6 | 60.3 | 150 | Horizontal |
| 135.73 | 23.8 | 10.2 | 34.0 | 50.1 | 200 | Horizontal |
| 162.87 | 20.1 | 11.9 | 32.0 | 39.8 | 200 | Horizontal |
| 190.02 | 17.9 | 13.2 | 31.1 | 35.9 | 200 | Horizontal |
| 217.16 | 19.1 | 15.0 | 34.1 | 50.7 | 200 | Horizontal |
| 244.31 | 23.1 | 16.1 | 39.2 | 91.2 | 200 | Horizontal |
| 271.45 | 23.0 | 17.1 | 40.1 | 101.2 | 200 | Horizontal |

Remarks:

Correction Factor included Antenna Factor and Cable Attenuation.

Calculated measurement uncertainty : 30MHz to 1GHz $\pm 5.7\text{dB}$

Date: 2004-01-10

TEST REPORT

Page 12 of 19

No.: HM112422

3.1.2 Conducted Emissions (0.15MHz to 30MHz)

| | |
|--------------------|------------------|
| Test Requirement: | FCC 47CFR 15.107 |
| Test Method: | ANSI C63.4:2000 |
| Test Date: | 2004-01-06 |
| Mode of Operation: | N/A |

Results: N/A

The EUT is operated by a single source of internal battery power [located in the battery compartment], therefore power line conducted emission was deemed unnecessary.

Date: 2004-01-10

TEST REPORT

Page 13 of 19

No.: HM112422

3.2 20dB Bandwidth of Fundamental Emission

| | |
|--------------------|----------------------------------|
| Test Requirement: | FCC 47 CFR 15.227 |
| Test Method: | ANSI C63.4:2000 (Section 13.1.7) |
| Test Date: | 2004-01-06 |
| Mode of Operation: | On mode |

Test Method:

The bandwidth is measured at an amplitude level reduced from the reference level by a specified ratio. The reference level is the level of the highest amplitude signal observed from the transmitter at the fundamental frequency. Once the reference level is established, the equipment is conditioned with typical modulating signal to produce the worst-case (i.e. the widest) bandwidth.

Test Setup:

As Test Setup of clause 3.1.1 in this test report.

Date: 2004-01-10

TEST REPORT

Page 14 of 19


No.: HM112422

Limits for 20 dB Bandwidth of Fundamental Emission:

| Frequency Range [MHz] | 20dB Bandwidth [KHz] | FCC Limits [MHz] |
|--------------------------|-------------------------|---------------------|
| 27.145 | 41.6 | within 26.96-27.28 |

20dB Bandwidth of Fundamental Emission

~~17~~ 09:11:24 JAN 16, 1995 23:49:37 NOV 12, 1997
MARKER Δ ACTV DET: PEAK
41.6 kHz MEAS DET: PEAK QP AVG
1.01 dB MKR Δ 41.6 kHz
1.01 dB

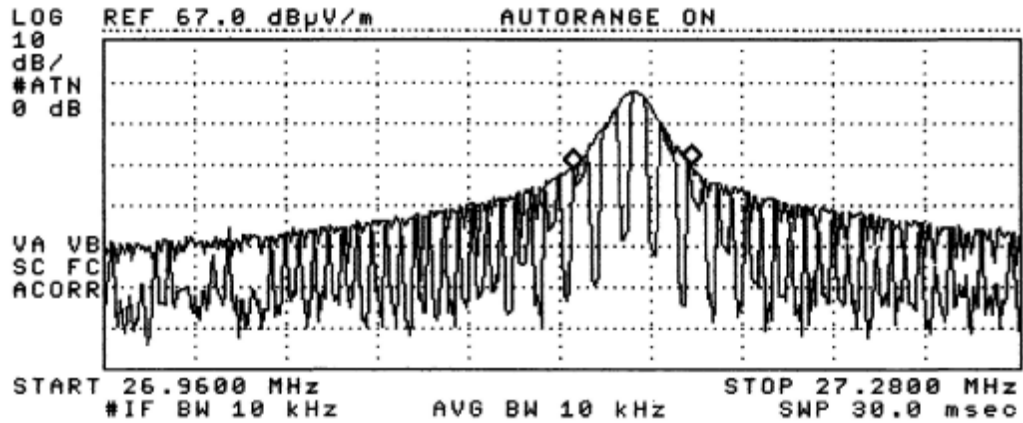

Date: 2004-01-10

TEST REPORT

Page 15 of 19

No.: HM112422

Appendix A**Test Equipment Audit****Radiated Emission**

| EQP NO. | DESCRIPTION | MANUFACTURER | MODEL NO. | SERIAL NO. | LAST CAL |
|---------|--|---|--------------------------------|--|----------|
| EM007 | SPECTRUM ANALYZER | HEWLETT PACKARD | HP85660B | 3144A21192 | 14/03/03 |
| EM008 | SPECTRUM ANALYZER DISPLAY | HEWLETT PACKARD | HP85662A | 3144A20514 | 14/03/03 |
| EM009 | QUASI PEAK ADAPTOR | HEWLETT PACKARD | HP85650A | 3303A01702 | 14/03/03 |
| EM010 | RF PRESELECTOR | HEWLETT PACKARD | HP85685A | 3221A01410 | 14/03/03 |
| EM011 | ATTENUATOR/SWITCH | HEWLETT PACKARD | HP11713A | 2508A10595 | 14/03/03 |
| EM012 | PRE-AMPLIFIER | HEWLETT PACKARD | HP8449B | 3008A00262 | 14/03/03 |
| EM013 | CONTROLLER (COMPUTER), COLOR MONITOR, KEYBOARD & MOUSE FLOPPY DRIVE | HEWLETT PACKARD HEWLETT PACKARD HEWLETT PACKARD | HP9000 HP A1097C HP9133L | 6226A60314 3151J39517 2623A02468 | CM |
| EM020 | HORN ANTENNA | EMCO | 3115 | 4032 | 19/07/00 |
| EM022 | LOOP ANTENNA | EMCO | 6502 | 1189-2424 | 04/08/00 |
| EM072 | SIGNAL GENERATOR | HEWLETT PACKARD | 8640B | 1948A11892 | N/A |
| EM083 | HKSTC OPEN AREA TEST SITE | HKSTC | N/A | N/A | 08/11/02 |
| EM131 | PORTABLE SPECTRUM ANALYSER | HEWLETT PACKARD | 8595EM | 3710A00155 | 18/12/01 |
| EM145 | EMI TEST RECEIVER | R & S | ESCS 30 | 830245/021 | 02/08/03 |
| EM194 | BICONILOG ANTENNA | EMCO | 3142B | 1795 | 14/05/02 |
| EM195 | ANTENNA POSITIONING MAST | EMCO | 2075 | 2368 | N/A |
| EM196 | MULTI-DEVICE CONTROLLER | EMCO | 2090 | 1662 | N/A |

Conducted Emission

| EQP NO. | DESCRIPTION | MANUFACTURER | MODEL NO. | SERIAL NO. | LAST CAL |
|---------|-------------------------------------|----------------------------------|------------|---------------------|----------|
| EM078 | VARIAC | SHANGHAI VOLTAGE | TDGC-3/0.5 | N/A | CM |
| EM081 | SMALL SCREENED ROOM | MIKO INST HK | N/A | N/A | 18/10/02 |
| EM119 | LISN | R & S | ESH3-Z5 | 0831.5518.5 2 | 01/10/02 |
| EM127 | ISOLATION TRANSFORMER 220 TO 300 | WING SUN | N/A | N/A | CM |
| EM142 | PULSES LIMITER | R & S | ESH3Z2 | 357.8810.52 | 03/07/02 |
| EM181 | EMI TEST RECEIVER | R & S | ESIB7 | 100072 | 28/11/01 |
| EM154 | SHIELDING ROOM | SIEMENA MATSUSHITA COMPONENTS | N/A | 803-740-057- 99A | 18/10/02 |
| EM197 | LISN | EMCO | 4825/2 | 1193 | 08/04/03 |

Remarks:

CM Corrective Maintenance
N/A Not Applicable or Not Available
TBD To Be Determined

Appendix B

Duty Cycle Correction During 100msec

Each function key sends a different series of characters, but each packet period (62.812msec) never exceeds a series of 4 long (1.425msec) and 58 short (525µsec) pulses. Assuming any combination of short and long pulses may be obtained due to encoding the worst case transmit duty cycle would be considered $4 \times 1.425\text{msec} + 58 \times 525\mu\text{sec}$ per 62.812msec=57.5% duty cycle. Figure A through C show the characteristics of the pulse train for one of these functions.

Remarks:

Duty Cycle Correction = $20\text{Log}(0.575) = -4.8\text{dB}$

The following figures [Figure A to Figure C] show the characteristics of the pulse train for one of these functions.

Figure A [Pulse Train]

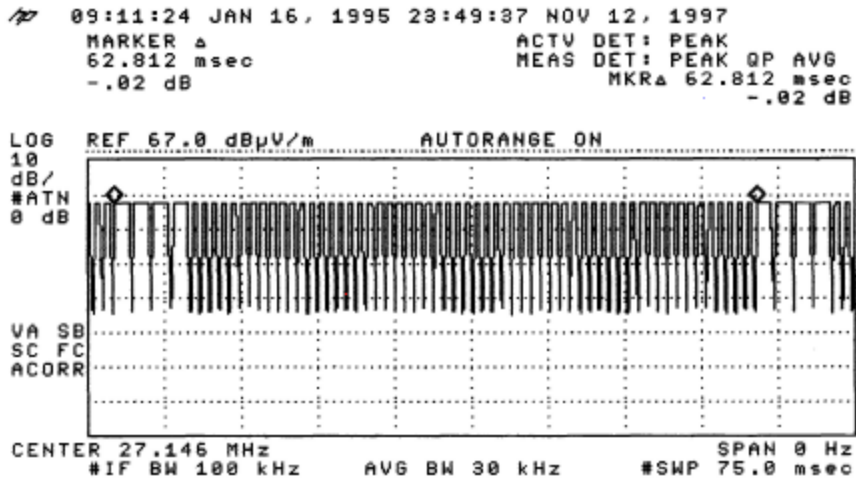


Figure B [Long Pulse]

09:11:24 JAN 16, 1995 23:49:37 NOV 12, 1997
MARKER Δ 1.4250 msec ACTV DET: PEAK
-.10 dB MEAS DET: PEAK QP AVG
MKR Δ 1.4250 msec
-.10 dB


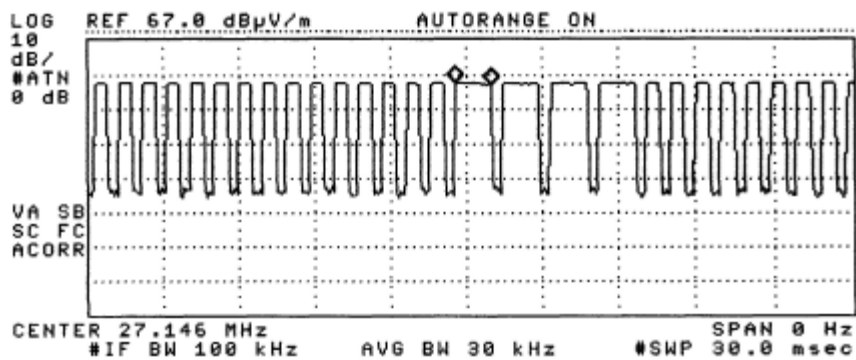


Figure C [Short Pulse]

09:11:24 JAN 16, 1995 23:49:37 NOV 12, 1997
MARKER Δ 525.00 μ sec ACTV DET: PEAK
.18 dB MEAS DET: PEAK QP AVG
MKR Δ 525.00 μ sec
.18 dB

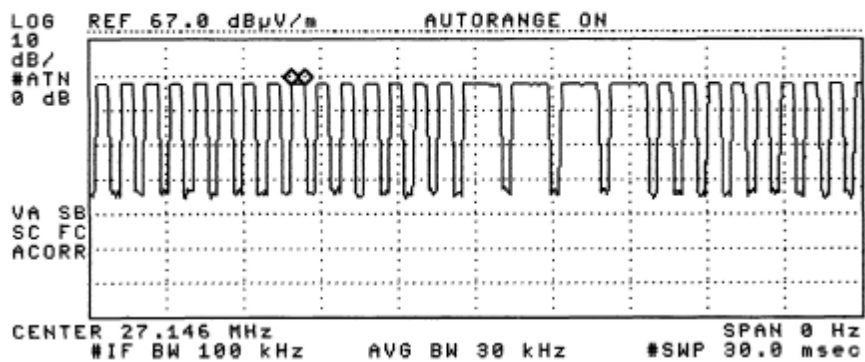

Date: 2004-01-10

TEST REPORT

Page 18 of 19

No.: HM112422

Appendix C

Photographs of EUT

Front View of the product



Rear View of the product



Inner Circuit Top View



Inner Circuit Bottom View



Date: 2004-01-10

TEST REPORT

Page 19 of 19

No.: HM112422

Photographs of EUT

Measurement of Radiated Emission Test Set Up



End of Document